



STEREO TAPE RECORDER

MODEL 4400

ALSO APPLICABLE TO MODEL
4400D STEREO TAPE DECK

SECTION 1	SERVICE MANUAL	2
SECTION 2	PARTS LIST	17
SECTION 3	SCHEMATIC DIAGRAM	36

SECTION 1

SERVICE MANUAL

TABLE OF CONTENTS

I. SPECIFICATIONS	3
II. MEASURING METHOD	4
1. TAPE SPEED DEVIATION	4
2. WOW AND FLUTTER	4
3. FREQUENCY RESPONSE	4
4. SIGNAL TO NOISE RATIO	4
5. TOTAL HARMONIC DISTORTION FACTOR	5
6. CROSS TALK (Cross talk between the tracks)	5
7. ERASE RATIO	5
8. POWER OUTPUT (4400 only)	5
III. DISMANTLING OF UNIT	6
IV. OPEN REEL MECHANISM ADJUSTMENTS	8
1. PINCH WHEEL ADJUSTMENT	9
2. SUPPLY REEL SHAFT ASSEMBLY ADJUSTMENT	9
3. TAKE-UP REEL SHAFT ASSEMBLY ADJUSTMENT	9
4. RECORDING/PLAYBACK CHANGING MECHANISM	9
V. HEAD ADJUSTMENTS	10
1. HEAD HEIGHT ADJUSTMENT	10
2. HEAD SLANT ADJUSTMENT	10
3. HEAD AZIMUTH ALIGNMENT ADJUSTMENT	10
VI. AMPLIFIER ADJUSTMENTS	11
1. PLAYBACK LEVEL ADJUSTMENT	11
2. RECORDING LEVEL ADJUSTMENT	11
3. RECORDING BIAS FREQUENCY ADJUSTMENT	13
4. RECORDING BIAS VOLTAGE ADJUSTMENT (FREQUENCY RESPONSE ADJUSTMENT)	13
5. ERASE VOLTAGE	13
VII. DC RESISTANCE	15
1. HEAD DC RESISTANCE	15
2. MOTOR DC RESISTANCE	15
VIII. COMPOSITE VIEWS OF COMPONENTS	16

I. SPECIFICATIONS

An asterisk next to a figure indicates the minimum guaranteed performance.

TRACK SYSTEM	4-track 2-channel stereo system	
REEL CAPACITY	Up to 7" reel	
TAPE SPEED	7-1/2 and 3-3/4 ips ±2% (*3%)	
WOW AND FLUTTER	Less than 0.15% (*0.22%) RMS at 7-1/2 ips	
FREQUENCY RESPONSE	AKAI SRT Tape	Less than 0.20% (*0.30%) RMS at 3-3/4 ips
	Regular Tape	30 to 23,000 Hz (*40 to 22,000 Hz) ±3 dB at 7-1/2 ips 30 to 15,000 Hz (*40 to 13,000 Hz) ±3 dB at 3-3/4 ips 30 to 20,000 Hz (*40 to 20,000 Hz) ±3 dB at 7-1/2 ips 30 to 13,000 Hz (*40 to 11,000 Hz) ±3 dB at 3-3/4 ips
SIGNAL TO NOISE RATIO	Better than 50 dB at 7-1/2 ips Better than 48 dB at 3-3/4 ips	
HUM AND NOISE (4400 only)	Less than 5 mV at minimum volume	
DISTORTION	Less than 1.5% (*2.0%) at 7-1/2 ips	
CROSS TALK	Less than 2.5% at 3-3/4 ips Better than 70 dB (*60 dB) monaural Better than 50 dB (*45 dB) stereo	
ERASE RATIO	Better than 70 dB	
INPUTS	Mic input	0.8 mV Impedance: 5 kΩ
	Line input	70 mV Impedance: 150 kΩ
	Din input	7 mV
OUTPUTS	Line output	1.228V (4 ±1 dB), using a 250 Hz "O" VU recorded tape
	Din output	0.4V
	Speaker output (4400 only)	16W total music power at 8Ω 12W (*8W) continuous power at 8Ω
BIAS FREQUENCY	105 kHz ±5%	
BIAS LEAK	Less than -30 VU	
HIGH FREQUENCY DEVIATION	Within 2 dB, using an 8,000 Hz 3-3/4 ips recorded tape at 7-1/2 ips	
RECORDING CAPACITY	60 min. stereo recording, using a 1,200 ft. tape at 7-1/2 ips	
FAST FORWARD AND REWIND TIME	152/190 sec., using a 1,200 ft. tape at 60/50 Hz	
MOTOR	4-pole induction 1-speed motor Type: SSM-1 Revolutions: 1,800/1,500 rpm. at 60/50 Hz	
HEADS	Recording Head	In-line 4-track 2-channel recording head Type: P4-154 Gap: 1 micron Impedance: 95Ω ±15% at 1,000 Hz
	Playback Head	In-line 4-track 2-channel playback head Type: P4-150 Gap: 1 micron Impedance: 1,250Ω ±15% at 1,000 Hz
	Erase Head	In-line 4-track 2-channel erase head Type: E4-200 Gap: 0.6 mm Impedance: 200Ω ±5% at 100 kHz
TRANSISTORS	2SC458L(GC) (D) . . . 6	2SC971(2) (3) (red) . . . 2
	2SC871(E) (F) . . . 2	2SC1098(L) (M) . . . 1
IC	LD3141 . . . 4	STK-011 . . . 2 (4400 only)
DIODES	IN34A . . . 2	10DC-1 . . . 1
	WZ-240 . . . 1	
POWER SUPPLY	100 to 240V A.C., 50/60 Hz 120V A.C., 60 Hz for CSA/UL Models 220V A.C., 50 Hz for CEE Models	
POWER CONSUMPTION	60W	DECK: 35W
INSULATION RESISTANCE	More than 50 MΩ	
INSULATION DURABILITY	1,000V A.C. for more than 1 min. duration	
DIMENSIONS	406(W) × 314(H) × 194(D) mm (15.9" × 12.4" × 7.6")	
WEIGHT	13.7 kg (30.1 lbs.)	

NOTE: Specifications subject to change without notice.

II. MEASURING METHOD

1. TAPE SPEED DEVIATION




Fig. 1

As shown in Fig. 1, connect a Frequency Counter to the Line Output of Model 4400. Take a frequency counter reading at the beginning, middle, and end of tape winding during playback. The maximum value of these respective readings will represent tape speed deviation.

2. WOW AND FLUTTER



Fig. 2

Method A

As shown in Fig. 2, connect the Line Output of Model 4400 to the Input of a Wow and Flutter Meter. Use a 3,000 Hz pre-recorded test tape and take a wow and flutter meter reading at the beginning, middle, and end of tape winding. The maximum value of these respective readings will represent the wow and flutter.

Method B

Supply a 3,000 Hz sine wave signal from an Audio Frequency Oscillator and make a recording on a blank tape at the beginning, middle, and end of tape winding. Rewind and Playback tape. Measure wow and flutter with a Wow and Flutter Meter. (The wow and flutter value of Method B will be close to twice that of Method A.)

3. FREQUENCY RESPONSE

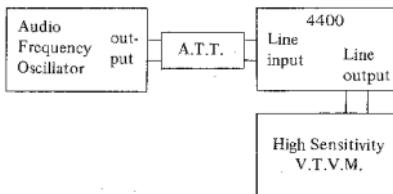


Fig. 3

For measuring frequency response, connect instruments as shown in Fig. 3 and proceed as follows:

- 1) Supply a 1,000 Hz sine wave to the Line Input of Model 4400 from an Audio Frequency Oscillator through an Attenuator. Set recorder to recording mode and turn recording level volume control to maximum. Adjust Attenuator to obtain a +4 dB V.T.V.M. reading.
- 2) Under conditions described in 1) above, re-adjust Attenuator so that the Line Output is -16 dB, and record 40 to 20,000 Hz spot frequencies.
- 3) Rewind tape and playback from the beginning. Take V.T.V.M. spot frequency readings and plot values on a graph.

NOTE: When measuring frequency response, new tape should be used.

4. SIGNAL TO NOISE RATIO



Fig. 4

As shown in Fig. 4, connect a High Sensitivity V.T.V.M. to the Line output of Model 4400. Playback a 250 Hz "0" VU pre-recorded test tape and measure the output. Then remove the tape and measure the noise level under the same condition. Convert each of the measured values into decibels.

5. TOTAL HARMONIC DISTORTION FACTOR

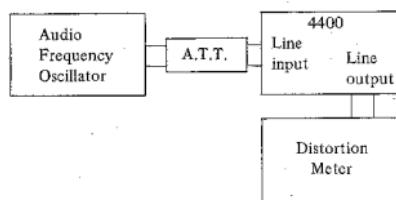


Fig. 5

Connect the measuring instruments as shown in Fig. 5 and record a 1,000 Hz sine wave signal at "0" VU. Playback the resultant signal and measure the overall distortion factor. Measure the noise level of the tape recorder without the tape. Connect the Audio Frequency Oscillator directly to the distortion meter for measurement of the distortion factor of the oscillator. The required distortion factor can be obtained from the results of the above measurement by the following formula:

$$d_0 = d - d_1 - d_2$$

where,
 d_0 = Required distortion factor
 d = Overall distortion factor
 d_1 = Noise level
 d_2 = Distortion factor of the oscillator

NOTE: When measuring the distortion factor, new tape should be used.

6. CROSS TALK

(Cross talk between the tracks)




Fig. 6

As shown in Fig. 6, first record a 1,000 Hz sine wave signal on Track No. 3 at +3 VU level. Next, record under a non-input condition. Then, playback the tape on Tracks No. 3 and 4 through the B.P.F. (band pass filter sensitivity . . . 1:1) and obtain a ratio between the two from the following formula:

$$C = 20 \log \frac{E_0}{E_2 - E_1} (\text{dB})$$

where, C = Desired cross talk ratio (dB)
 E_0 = 1,000 Hz signal output level
 E_2 = 1,000 Hz cross talk level
 E_1 = Non-input signal recorded level



7. ERASE RATIO

As shown in Fig. 4, connect a High Sensitivity V.T.V.M. to the Line Output of Model 4400. Playback a virgin tape and take a V.T.V.M. reading of the output level. Next, record a 1,000 Hz sine wave signal at +3 dB, then playback this recorded signal and take a V.T.V.M. reading of the output level. Next, using this pre-recorded tape, record under a non-input condition and take a reading of the noise level output of the erased signal and obtain a ratio between the two from the following formula:

$$Er = 20 \log \frac{E_0}{E_2 - E_1} (\text{dB})$$

where, Er = Desired erase ratio (dB)
 E_0 = 1,000 Hz signal output level
 E_2 = Non-input signal recorded level
 E_1 = Virgin tape noise output level

8. POWER OUTPUT (4400 only)

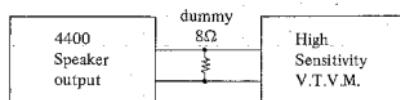


Fig. 7

As shown in Fig. 7, connect an 8Ω dummy load resistor to the speaker output of the recorder and connect this terminal to a High Sensitivity V.T.V.M. Playback a 250 Hz "0" VU pre-recorded test tape and take a V.T.V.M. reading of the output level. The resultant output can be obtained from the results of the above measurement by using the following formula:


$$P = \frac{E^2}{R} (\text{W})$$

where, P = Desired power output (watts)
 E = Measured voltage (R.M.S.)
 $R = 8\Omega$


III. DISMANTLING OF UNIT

In case of trouble, etc. necessitating disassembly, please disassemble in the order shown in photographs. Re-assemble in reverse order.

1

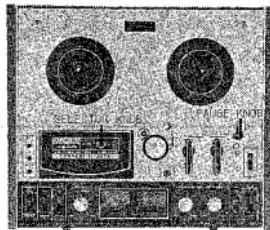

2

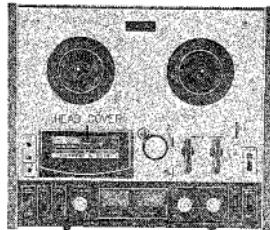


3




4




5








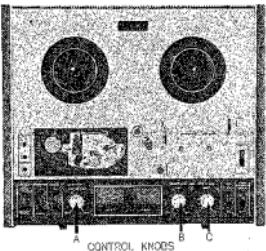


6

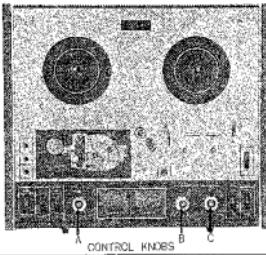


7

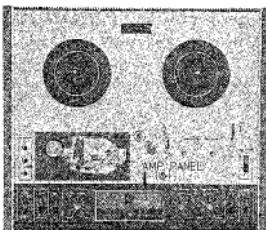

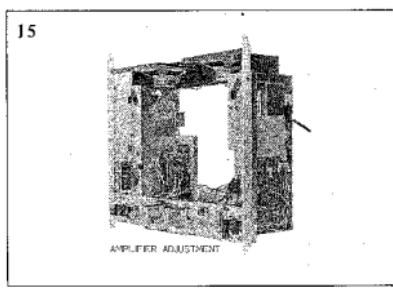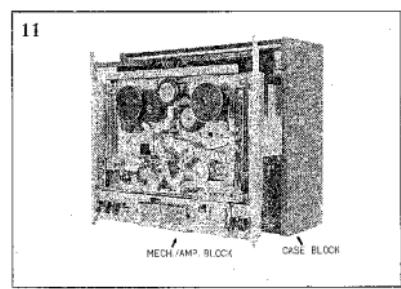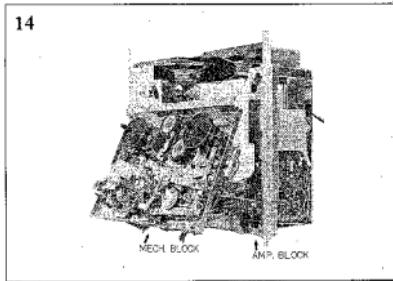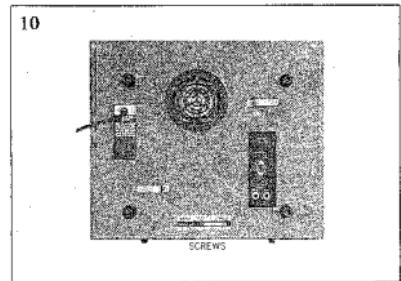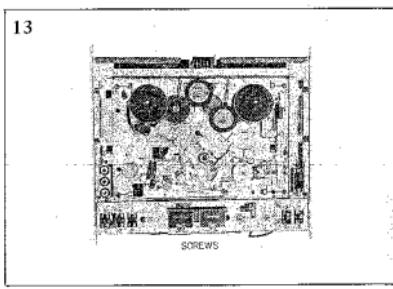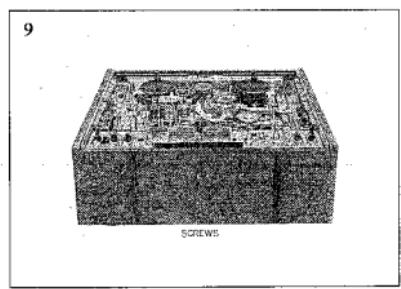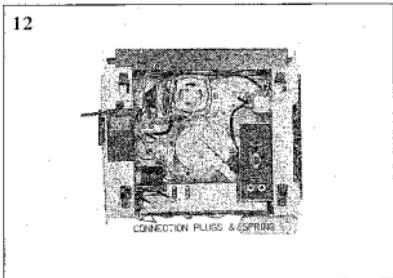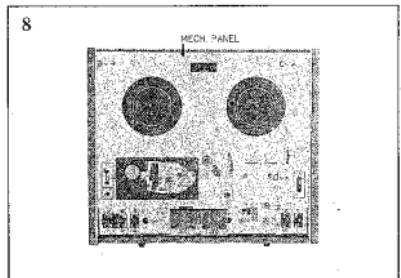

IV. OPEN REEL MECHANISM ADJUSTMENTS

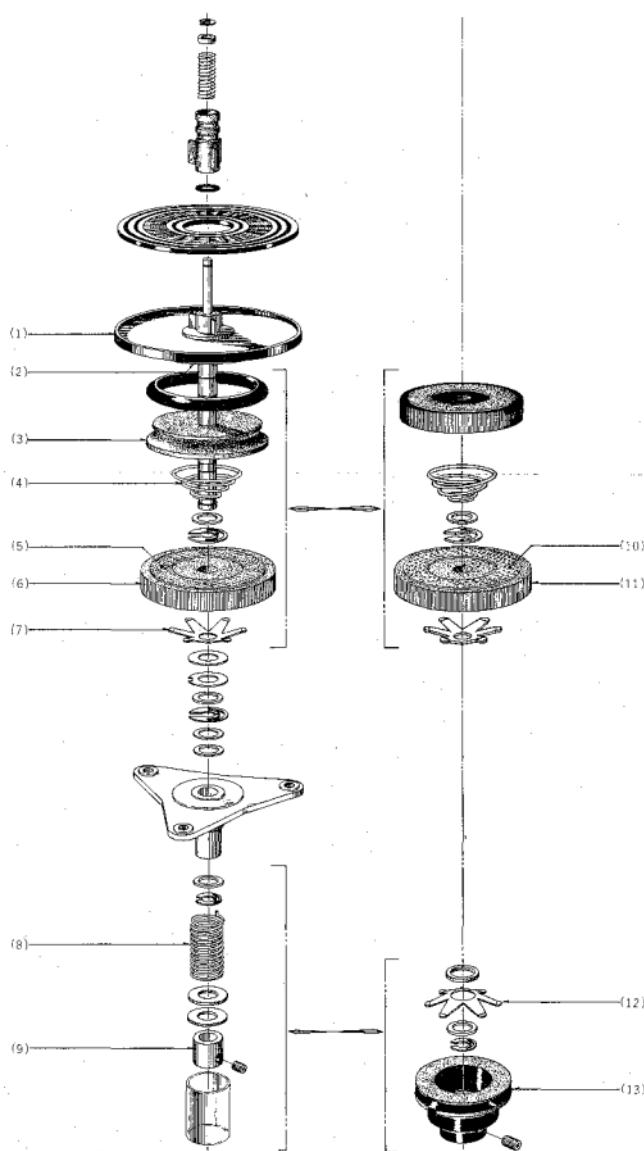

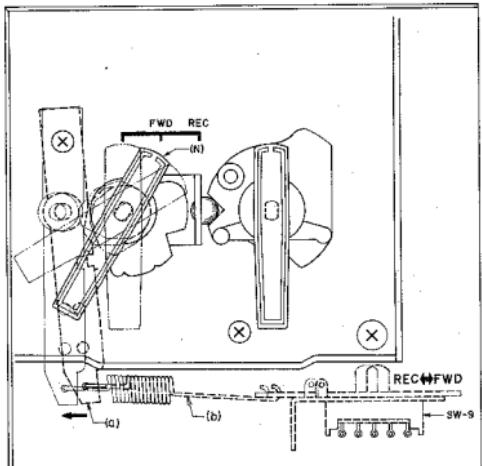


Fig. 9

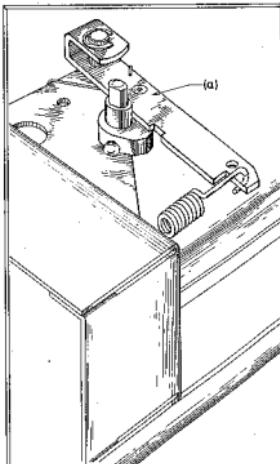


Fig. 10

1. PINCH WHEEL ADJUSTMENT

It is important that the pinch wheel shaft be kept in perfect alignment with the capstan shaft. Proper pinch wheel pressure is between 1,000 and 1,150 grams when the unit is operated at the tape speed of 7-1/2 ips. Any deviation from this specification will result in wow and flutter. Check pinch wheel pressure with a spring scale, and if necessary, adjust the pinch wheel load spring.

2. SUPPLY REEL SHAFT ASSEMBLY ADJUSTMENT (See Fig. 8 at left)

Felt clutch material (2) is used between the lower side of the reel table base plate (1) and the rewind pulley (3) to protect recording tape from excessive tension during rewind operation. To check the amount of friction of this part, install a 5-inch reel with a 60 mm diameter tape and gently pull the end of the tape upward with a spring scale. Adjust the conical spring (4) so that the amount of tension is kept between 400 and 500 grams. Other felt clutch material (5) is attached to the supply roller (6) to provide proper slippage during FWD and REC operation. The procedure for checking friction of this part is the same as the foregoing, and between 80 and 100 grams of tension gives best results. Adjust the spring (7) just under the supply roller (6). When the unit is set to fast forward operation, the amount of friction will decrease to from 15 to 20 grams. Check to see whether this is satisfactory. If not, adjust the spring plate (8) and the pressure of the pulley (9).

3. TAKE-UP REEL SHAFT ASSEMBLY ADJUSTMENT (See Fig. 8 at right)

Felt clutch material (2) is attached to the bottom side of the reel table base plate (1) so that the recording tape will not stretch during fast forward operation due to excessive tension. To check the amount of friction of this part, install a 5-inch reel with a 60 mm diameter tape, and gently pull the end of tape upward with a spring scale. Adjust the conical spring (4) so that the amount of tension at this part is kept between 400 and 500 grams. Other felt clutch material (10) is attached to the take-up roller (11). This is to provide proper slippage during FWD or REC operation. The procedure for checking friction of this part is the same as the foregoing, and between 150 and 180 grams of friction provides the best results. Adjust the spring plate (7) just under the take-up roller (11). When the unit is set to rewind operation, the amount of friction of this part will decrease to from 15 to 20 grams. Check to see whether this is satisfactory. If not, adjust the spring (12) and the pressure of the set sleeve (13).

4. RECORDING/PLAYBACK CHANGING MECHANISM (See Figs. 9, 10)

Turning the FWD/REC knob (N) to recording position causes Lever (a) to pull. Recording Lever (b) (as illustrated by dotted line), and the FWD/REC Changing Switch (SW-9) is turned to recording position. If Lever (a) does not pull Lever (b) properly, Changing Switch SW-9 will not operate properly. This may cause abnormal oscillation and inability to record. In this case, loosen Screw (c) and adjust lever.

V. HEAD ADJUSTMENTS

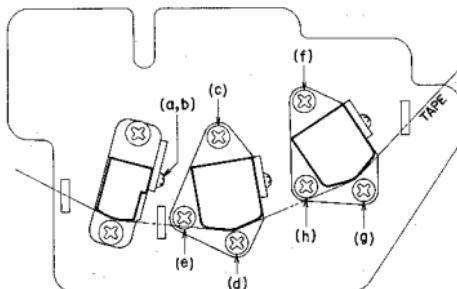


Fig. 11

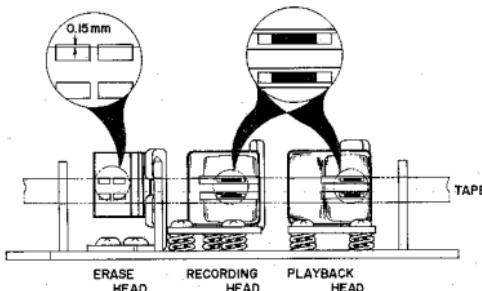


Fig. 12

Since adjustment of the Heads critically affects tape recorder performance, it is essential that Heads be carefully adjusted with precision measuring equipment and suitable recorded tape.

1. HEAD HEIGHT ADJUSTMENT

(See Figs. 11, 12)

1) Erase Head

Adjust height control screws (a), (b) by turning to left and right so that the upper edge of the tape is 0.15 mm lower than the upper edge of the erase head core.

2) Recording Head

Adjust the screws (c), (d) by turning to left and right until the width between the upper edge of channel 1 head core and upper edge of the tape is equal.

3) Playback Head

Adjust the screws (f), (g) by turning to left and right until the width between the upper edge of channel 1 head core and upper edge of the tape is equal.

2. HEAD SLANT ADJUSTMENT

(See Figs. 11, 12)

Adjust the screws (Head Height control screws) by turning to left and right so that each head (Erase, Recording and Playback Head) contacts the tape surface at a right angle.

3. HEAD AZIMUTH ALIGNMENT

ADJUSTMENT (See Figs. 11, 12)

1) Playback Head

Playback an Ampex Alignment test tape (8,000 Hz 3-3/4 ips.) at 7-1/2 ips. Adjust screw (h) by turning to left and right until the various line outputs are maximum.

2) Recording Head

At recording mode, supply a 15,000 Hz sine wave at a -16 dB recording level from an Audio Frequency Oscillator to the line input of the 4400, and set the Monitor switch to "TAPE" position. Then adjust screw (e) by turning to left and right until the various line outputs are maximum.

4. Repeat adjustments outlined in Items 1-2) to 3, above 2 or 3 times to obtain optimum adjusted condition.

VI. AMPLIFIER ADJUSTMENTS

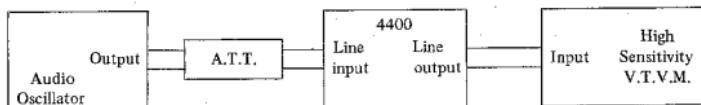


Fig. 13

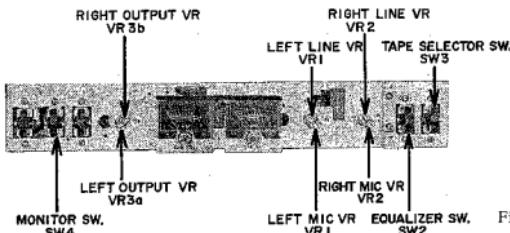


Fig. 14

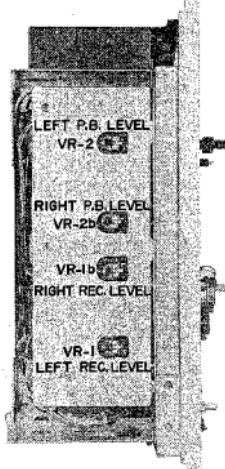


Fig. 15

1. PLAYBACK LEVEL ADJUSTMENT

(See Figs. 13 to 16)

- 1) Set the Monitor switch to "TAPE" position and Equalizer switch to 7-1/2 ips.
 - 2) In case of 4400D, set output VR (VR3a, b 10 kB) to maximum.
 - 3) Connect a High Sensitivity V.T.V.M. to the line output.
 - 4) Playback a 250 Hz pre-recorded test tape at 7-1/2 ips., and adjust semi-fixed resistor VR2 and VR2b (20 kB) to obtain a 4 dB P.B. level. (VU meter indicates "0" VU.)
- Recording Amplifier Adjustment should be made only after Head Adjustments and Playback Amplifier Adjustments have been made.

2. RECORDING LEVEL ADJUSTMENT

(See Figs. 13 to 16)

- 1) Set the Monitor switch to "TAPE" position and Equalizer switch to 7-1/2 ips.
- 2) Connect an Audio Frequency Oscillator to the line input and High Sensitivity V.T.V.M. to the line output.
- 3) Load a Scotch-111 blank tape and set recorder to "REC" mode.
- 4) In case of 4400D, set output VR (VR3a,b 10 kB) to maximum.
- 5) Supply a 1,000 Hz sine wave from an Audio Frequency Oscillator and adjust the line recording level control volumes (VR1 and VR1b 50 kB) until the line output level reaches 4 dB. (VU meter indicates "0" VU.)
- 6) Set the Monitor switch to "SOURCE" position.
- 7) Adjust semi-fixed resistor VR1 and VR1b (2 kB) to obtain 4 dB recording level. (VU meter indicates "0" VU.)
- 8) Repeat 2 times in the same way as indicated in Items 5) to 8) above.

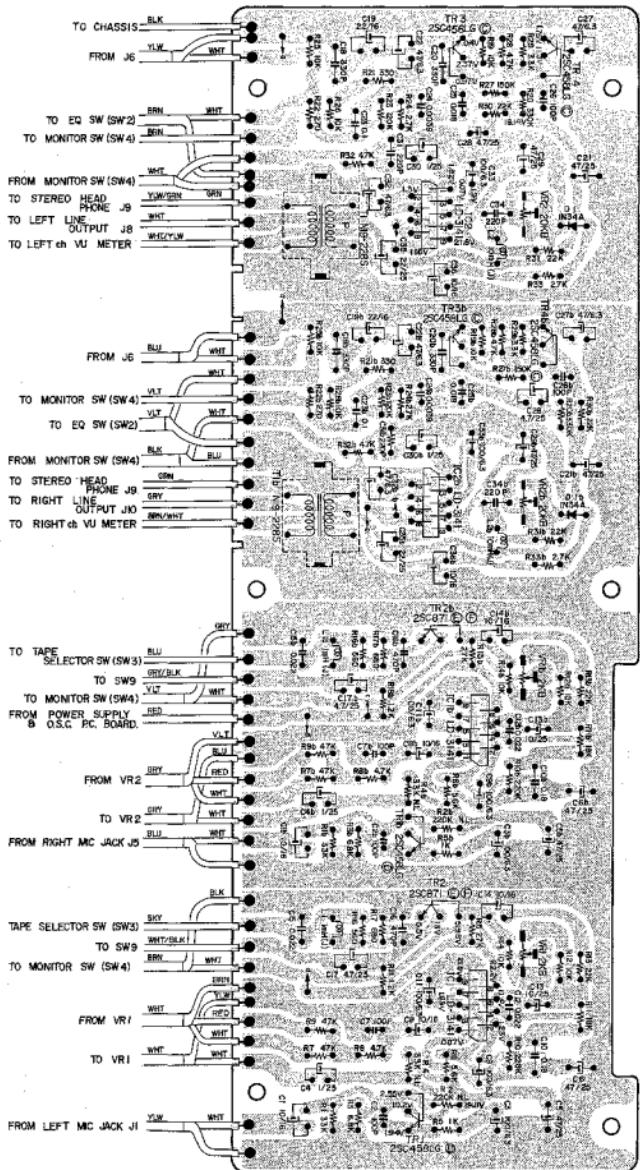


Fig. 16 PRE-AMP. P.C. BOARD (LE-5022)

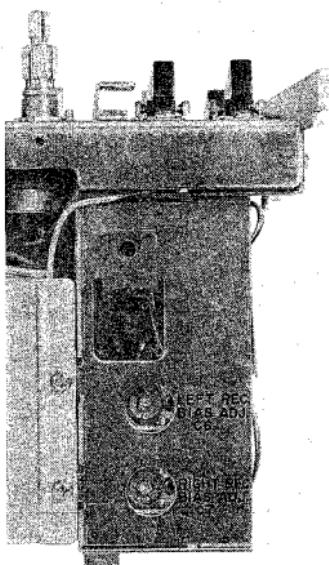


Fig. 17

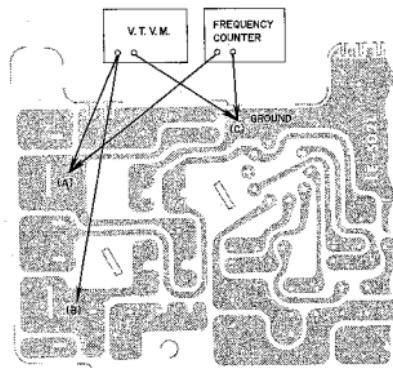


Fig. 18

3. RECORDING BIAS FREQUENCY ADJUSTMENT (See Fig. 18)

- 1) Set the recorder to recording mode.
- 2) Connect a Frequency counter to points (A) and (C) in Fig. 18 of the Oscillator P.C. Board (LE-5021) and read the frequency indication.
- 3) If the bias frequency is $105\text{ kHz} \pm 5\%$, the bias frequency is correct.
- 4) If the bias frequency is incorrect, it can be adjusted by changing the value of condenser C8 (5600 PF) of the oscillator P.C. Board (LE-5021).

4. RECORDING BIAS VOLTAGE ADJUST- MENT (FREQUENCY RESPONSE ADJUSTMENT) (See Figs. 17, 18)

- 1) Set the Monitor switch to "TAPE" position and Equalizer switch to 7-1/2 ips.
- 2) Connect an Audio Frequency Oscillator to the line input through an Attenuator and a High Sensitivity V.T.V.M. to the line output.
- 3) Load a blank test tape "AKAI 100L" (Fuji S-100) and set the recorder to "REC" mode.
- 4) Turn recording level control volume VR1 and VR2 (50 kA) to obtain 4 dB V.T.V.M. reading.
- 5) Under conditions described in Item 4) above, readjust attenuator so that the line output level is -16 dB.
- 6) Record from 40 to 20,000 Hz spot frequencies.
- 7) Adjust Bias Adjustment semi-fixed condenser C6 (70 PF max.) so that the output of 1,000 Hz and 15,000 Hz frequencies are equal.
- 8) The bias voltage at this time is around 11V A.C.

5. ERASE VOLTAGE

- 1) Set the recorder to "REC" mode.
- 2) Connect a V.T.V.M. to points (B) and (C) in Fig. 18 of the oscillator P.C. Board (LE-5021) and read the V.T.V.M. indication.
- 3) The Erase Voltage is around 52V A.C.

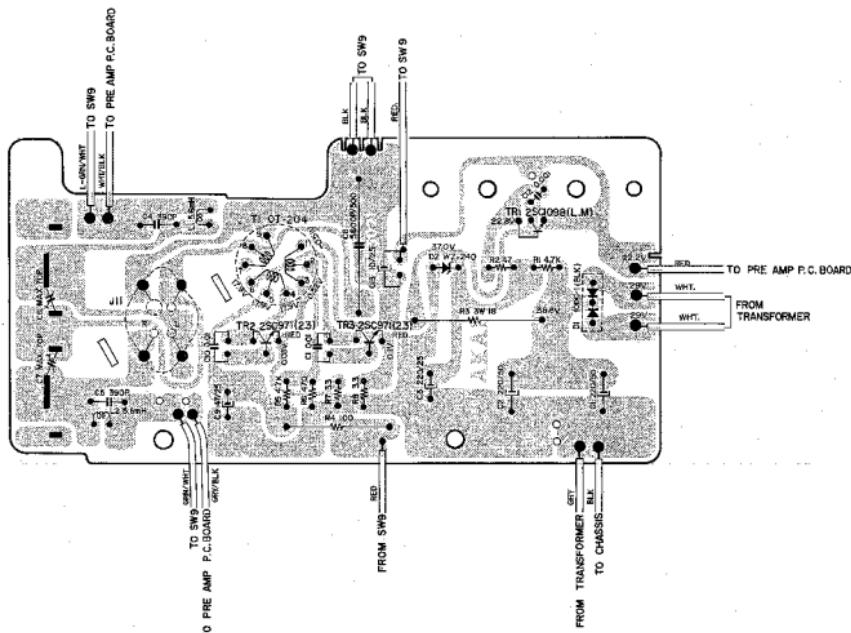


Fig. 19 OSC. POWER P.C. BOARD (LE-5021)

VII. DC RESISTANCE

1. HEAD DC RESISTANCE

P.B. Head	$91.5\Omega \pm 10\Omega$
REC. Head	$15.3\Omega \pm 10\Omega$
ERASE Head	$3.5\Omega \pm 1\Omega$

2. MOTOR DC RESISTANCE


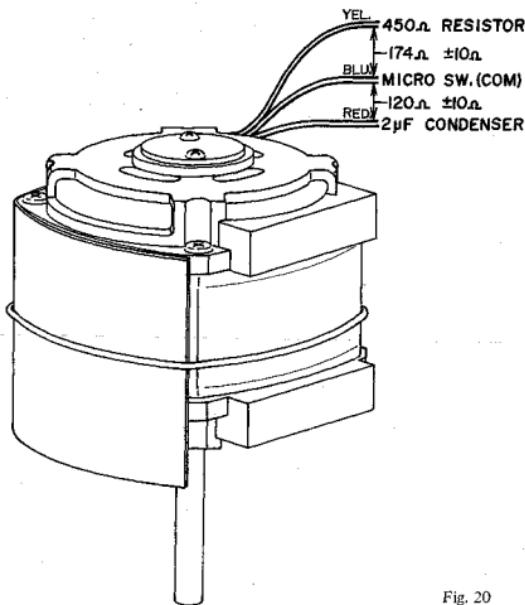


Fig. 20

VIII. COMPOSITE VIEWS OF COMPONENTS

MAIN AMP. P.C. BOARD (LE-5213)

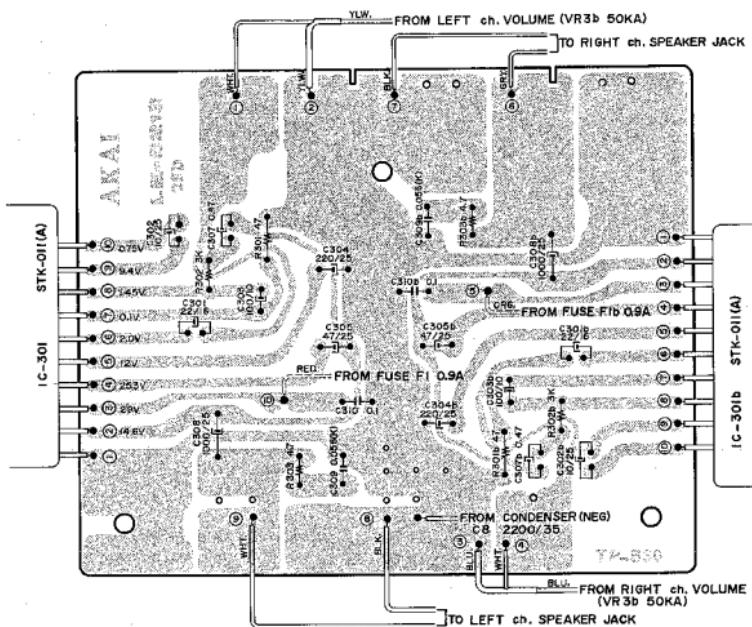

SECTION 2

PARTS LIST


TABLE OF CONTENTS

FIG. 1	HEAD BLOCK	21
FIG. 2	SUPPLY/TAKE UP REEL TABLE BLOCK	21
FIG. 3	MOTOR BLOCK	23
FIG. 4	FLYWHEEL/BELT CHANGE LEVER BLOCK	24
FIG. 5	SWITCH BLOCK	25
FIG. 6	MECHANISM ASSEMBLY BLOCK	26
FIG. 7	PRL-AMP. P.C. BOARD (LE-5022) BLOCK	27
FIG. 8	OSC. POWER SUPPLY P.C. BOARD (LE-5021) BLOCK	28
FIG. 9	MAIN AMP. BLOCK	30
FIG. 10	AMPLIFIER ASSEMBLY BLOCK	31
FIG. 11	FINAL ASSEMBLY BLOCK	33
INDEX		34

HOW TO USE THIS PARTS LIST

1. This parts list is compiled by various individual blocks based on assembly process.
2. When ordering parts, please describe parts number, serial number, and model number in detail.
3. How to read List

The reference number corresponds with illustration or photo number of that particular parts list.

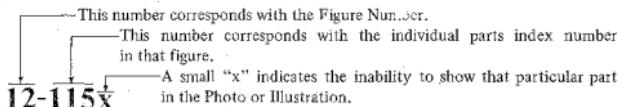

Ref. No.	Parts No.	Description	Schematic No.	Q'ty
FLYWHEEL BLOCK #13				
12-115x	800425	Flywheel Block Assy. Comp.	RUD #13	1
12-116	244506	Flywheel Only	RUD-233	1
12-117x	244754	Felt, Flywheel	RUD-275	1
12-118	251324	Main Metal Case	RUD-236	1
12-119	253080	Main Metal	RUD-237	1

4. The symbol numbers shown on the P.C. Board list can be matched with the Composite Views of Components of the Schematic Diagram or Service Manual.
5. The indications of Resistors and Capacitors in the photos of P.C. Board are being eliminated.
6. The shape of the parts and parts name, etc. can be confirmed by comparing them with the parts shown on the Electrical Parts Table of P.C. Board.
7. Both the kind of part and installation position can be determined by the Parts Number. To determine where a parts number is listed, utilize Parts Index at end of Parts List.
It is necessary first of all to find the Parts Number. This can be accomplished by using the Reference Number listed at right of parts number in the Parts Index. (meaning of ref. no. outlined in Item 3 above).
8. Utilize separate "Price List for Parts" to determine unit price. The most simple method of finding parts Price is to utilize the reference number.


ELECTRICAL PARTS TABLE

	1 	2 Stopper Type 	3 
4 	5 	6 	7 
1 	2 	3 	4 
5 	6 	7 	8 Vertical Type 
9 	10 Vertical Type 	11 	12 
13 	VR 		
L 	TR 		
CR 	D 		

ELECTRICAL PARTS LIST TABLE

Because the indication of resistance and capacities in the T.C. Board photos are being eliminated, please confirm parts name and shape by comparing them with the parts shown in this table.

FIG. 1 ILLUSTRATION OF HEAD BLOCK

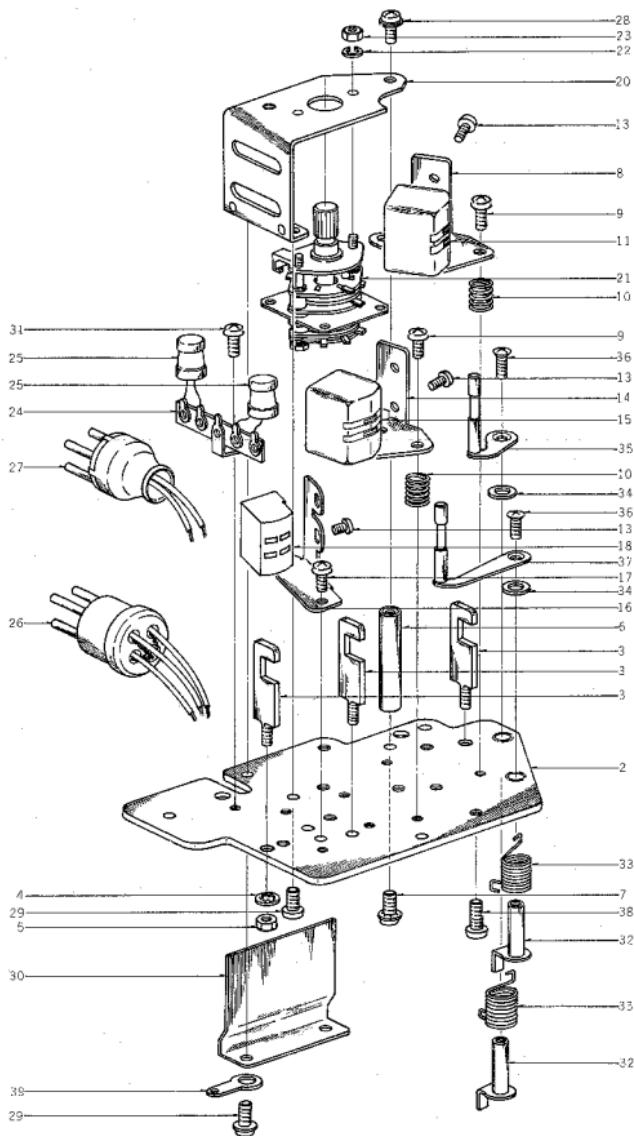


SUPPLY/TAKE-UP REEL TABLE BLOCK

Ref. No.	Parts No.	Description	Schematic No.	Parts No.	Description	Schematic No.	Q'ty
2-1x	BR490184	Supply Reel Table Block					
2-2x	BR490206	Take-up Reel Table Block					
2-3	MT368684	Reel Table Disk A, w/shaft A	XH-101				2
2-4x	MT252112	Friction Cloth B	900-225				2
2-5	MT317463	MR Reel Table Rubber	MR-150				2
2-6	MS255600	Reel Shaft B	XH-103				2
2-7	MT297663	3R 'O' Ring 2.9x1.65M	MR-129				2
2-8	MT255420	Reel Retainer	MR-102				2
2-9	ZG255633	Reel Spring	MR-109				2
2-10	MT255565	Reel Shaft Ring	XH-177				2
2-11	ZW70088	'E' Ring 1.9M	6-19				2
2-12	MR251460	Rewind Pulley	900-222				1
2-13	MT223266	Rubber Ring	900-234				1
2-14	ZG275753	Spring G2 (Left)	900-239				1
2-15	ZW260021	Washer (SUP) D6.1x10x0.13t					3
2-16	ZW260054	Washer (SUP) D6.1x10x0.25t					3
2-17	ZW260065	Washer (SUP) D6.1x10x0.35t					3
2-18	ZT255870	Reel Table Thrust Retainer Pin	900-237				2
2-19	MT252101	Friction Cloth A	900-224				1
2-20	MR252066	Take-up Roller C	900-220				1
2-21	MT255971	Reel Table Spring Plate A	900-227				1
2-22	MT438647	Reel Torque Adjust Thrust 7					
		D6.2x13x0.5t	101022				2
1-1x	BH490195	Head Block Comp.	LE-2	1			
1-2	HZ490296	LD Head Base B (New, w/metal)	LD-11	1			
1-3	HZ274162	Tape Guide #1	4TR-5	3			
1-4	ZW273802	Toothed Lock Washer M3		3			
1-5	ZW273756	Nut M3		3			
1-6	MH312827	LD Switch Prop, New	LD-13	1			
1-7	ZW417025	Screw, binding head 3x8, w/washer		1			
1-8	HZ480420	P.B. Angle Base	LE-0001	1			
1-9	ZW464714	Screw, round head 3x12		6			
1-10	ZG206144	Angle Adjust Spring	RD-15	6			
1-11	HE375131	REC./P.B. HEAD PA-150		1			
1-12x	HZ393974	I-MK Head Terminal Plate	HC-89	2			
1-13	ZW477876	Screw, pan head 2x3		6			
1-14	HZ480431	Rec. Angle Table	LE-0002	1			
1-15	HR475446	REC. HEAD PA-154		1			
1-16	HZ480446	Erase Head Base	LE-0003	1			
1-17	ZW323728	Screw, binding head 3x5		2			
1-18	HE384693	ERASE HEAD EE-400		1			
1-19x	HZ480453	LD Switch Table Comp., New		1			
1-20	HZ312895	LD Switch Table, New	LE	LE-0005	1		
1-21	ES257668	Rotary Switch	LD-12				
		ESR-E263L14AS	26-6-3	1			
1-22	ZW273723	Spring Washer M2		2			
1-23	ZW273734	Nut M2		2			
1-24	EJ255115	Lug Plate VB2L2	33-4-3	1			
1-25	EO390622	Ferrri Inductor FL9H 220 μ H(KO	23-1-4	2			
1-26	EJ297843	4P Plug, w/cap	42-1'-3'	1			
1-27	EJ276963	T type 4P Plug	42-1-16	1			
1-28	ZW417025	Screw, binding head 3x8, w/washer		1			
1-29	ZW413223	Screw, binding head 3x5, w/washer	LE-0004	3			
1-30	HZ480475	Head Shield		1			
1-31	ZW323728	Screw, binding head 3x5		1			
1-32	HL223503	Shift Lever B, w/shaft A	M9-5	2			
1-33	ZG312928	Shifter Spring	LD-19	2			
1-34	ZW336846	Washer (SPC) D4.1x7x1.2t		2			
1-35	HL132941	Shift Lever, w/pin	LD-15	1			
1-36	ZW480622	Screw, oval countersunk head 2.3x6		2			
1-37	HL223536	Shift Lever C, w/pin	M9-5	1			
1-38	ZW413155	Screw, binding head 3x6		1			
1-39	ZW273778	Earth Lug M3		1			
					4x7 (cup)		1
					2-49x	MT438581	Reel Torque Adjust Thrust 1
							D5.8x10.3x1t 101016

When ordering parts, please describe Parts Number, Serial Number, and Model Number in detail.

**FIG. 4 ILLUSTRATION OF FLYWHEEL/
BELT CHANGE LEVER BLOCK**

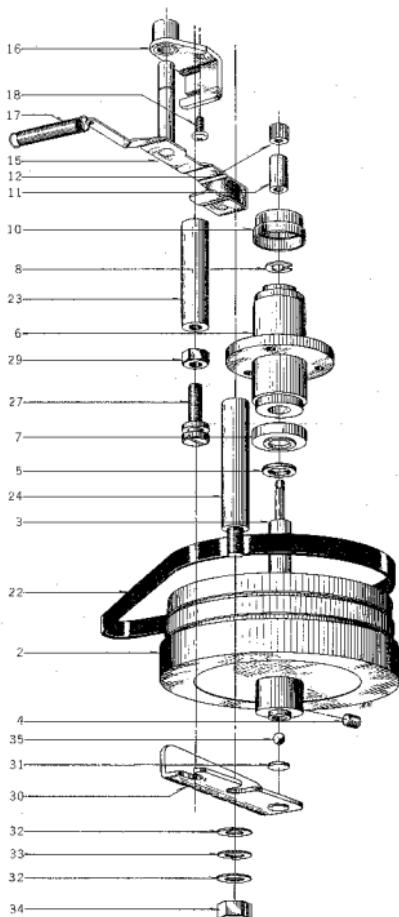

FLYWHEEL/BELT CHANGE LEVER BLOCK

Ref. No.	Parts No.	Description	Schematic No.	Q'ty
FLYWHEEL BLOCK				
4-1x	BF205075	Flywheel Block #5 Comp.		1
4-2	BF244473	Flywheel	707-S-10	1
4-3	MS244708	Flywheel Shaft	SRA-21	1
4-4	ZW373577	Set Screw, hexagon socket		
		5x6 (flat)		
4-5	ZW447208	Flywheel Thrust B	D7.9x13x0.51	1
4-6	MZ296267	Main Case B 24 Comp.	103025	1
4-7	MZ244635	Thrust Cap, Main Metal B2	1630-205	1
4-8	ZW244710	Flywheel Fixing Pin	LF-2006	1
4-9x	MZ244113	Felt D12.5x16x2t	960-250	1
4-10	MZ253313	Main Metal Cap B	MH-208	1
4-11	MY270055	Captstan D8	SRA-7	1
4-12	ZW193027	1100 Captstan Screw	SRA-6B	1
4-13x	ZW252977	Main Shaft Collar	SRA-32	1

BELT CHANGE LEVER BLOCK


4-14x	BL203523	Belt Change Lever Block		
		Comp. A		
4-15	ML217451	Belt Change Lever (Small), w/roller B	MH-221	1
4-16	MZ248354	Belt Guide Stop, w/metal	4TR-221	1
4-17	ZG217337	Belt Return Spring	4TR-224	1
4-18	ZW417150	Screw, pan head 4x6		
4-19x	ZG217394	Belt Change Spring B	MH-125	1
4-20x	ZW260054	Washer (SUP) D6.1x10x0.25t		
4-21x	ZW290283	'U' Ring 2.85M	6-1-1	1

ASSEMBLY BLOCK

4-22	MB256601	Double Face Flat Belt D=110	106912	1
4-23	MZ244633	Flywheel Prop B	4TR-115	1
4-24	MZ244620	Flywheel Prop A	4TR-116	1
4-25x	ZW424056	Screw, pan head 4x10		
4-26x	ZW273914	Spring Washer M4		
4-27	ZW244574	Flywheel Support Adj. Screw	4TR-314	1
4-28x	ZW231794	Tape Guide Washer (Small)	3A-355	1
4-29	ZW413278	Nut M5		
4-30	MZ244530	Flywheel Support Plate B	NB-109	1
4-31	ZW235585	Nylon Plate D=8		
4-32	ZW413998	Washer (SUP) D6.8x12.7x1t		
4-33	ZW393232	Spring Washer 1/4"		
4-34	ZW413280	Inch Nut 1/4" (Mountain 20)		
4-35	MV269965	Steel Ball 4mm		

When ordering parts, please describe Parts Number, Serial Number, and Model Number in detail.

FIG. 5 ILLUSTRATION OF SWITCH BLOCK

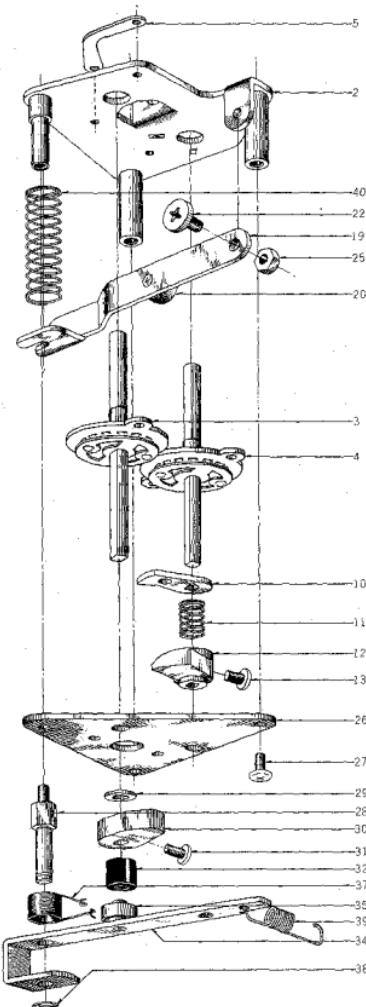


SWITCH BLOCK

Ref. No.	Parts No.	Description	Schematic No.	Q'ty
5-1x	BS480352	Switch Block Comp.	LE	1
5-2	MZ316901	Switch Table A-2 (SX), w/prop	MR-201	1
5-3	ES316934	Y type Rwd. Shaft	25-8-5	1
5-4	ES369865	RCC Y type Rwd. Shaft	RCG-302	1
5-5	MZ316945	Nut Plate	MR-245	2
5-6x	ZW202138	Screw, binding head 3x6, w/washer		4
5-7x	MZ316956	Cam A-3	MR-242	1
5-8x	ZW413201	Screw, pan head 4x8		1
5-9x	ZW260133	Washer (Fiber) D6.1x10x1t		2
5-10	MZ327341	Cam Trap Plate B	SX-301	1
5-11	ZG227586	Spring K	900-214	1
5-12	MZ327352	Cam C-2	SX-202	1
5-13	ZW201778	Screw, pan head 4x8		1
5-14x	ZW434215	Washer (Nylon) D6.1x10.3x		1
5-15x	ZW434193	Washer (Nylon) D6.1x10.3x	0.3t	1
			0.5t	
5-16x	MV270066	Steel Ball D8		1
5-17x	MZ217293	Cam B-2, without Tap	1630-201	1
5-18x	ZW416687	Screw, binding head 4x8		1
5-19	ML257128	Lever I, w/shaft	900-209	1
5-20	MZ2217203	Cam Roller A (Nylon)	900-153	1
5-21x	ZW290283	"U" Ring 2.85M	5-1-1	3
5-22	ZW217877	Pause Lever Retaining Screw		1
5-23x	ZW260166	Washer (Nylon) D6.2x13x		1
			0.125t	
5-24x	ZW273892	Toothed Lock Washer M4		1
5-25	ZW273960	Nut M4		1
5-26	MZ225720	Switch Table B-2	MR-308	1
5-27	ZW413201	Screw, pan head 4x8		2
5-28	MZ258581	Rec. Lever Prop	M9-303	1
5-29	ZW260133	Washer (Fiber) D6.1x10x1t		1
5-30	MZ317068	Amp. Switch Cam B	MR-243	1
5-31	ZW413201	Screw, pan head 4x8		1
5-32	MZ217686	Pause Lever Cushion	LC-102	1
5-33x	BL480150	Switch Lever Block Comp.	LE	1
5-34	ML488744	Rec. Lever C, w/shaft B	1-E-2002	3
5-35	MR269728	Cam Roller D12.5	RC-116	1
5-36x	ZW290283	"U" Ring 2.85M	5-1-1	3
5-37	ZG227564	Spring H	900-120	1
5-38	ZW290283	"U" Ring 2.85M	6-1-1	1
5-39	SL493042	Rec. Wire B	LE-4028	1
5-40	ZG227485	Spring E	900-119	1

When ordering parts, please describe Parts Number, Serial Number, and Model Number in detail.

FIG. 6 ILLUSTRATION OF MECHANISM ASSEMBLY BLOCK

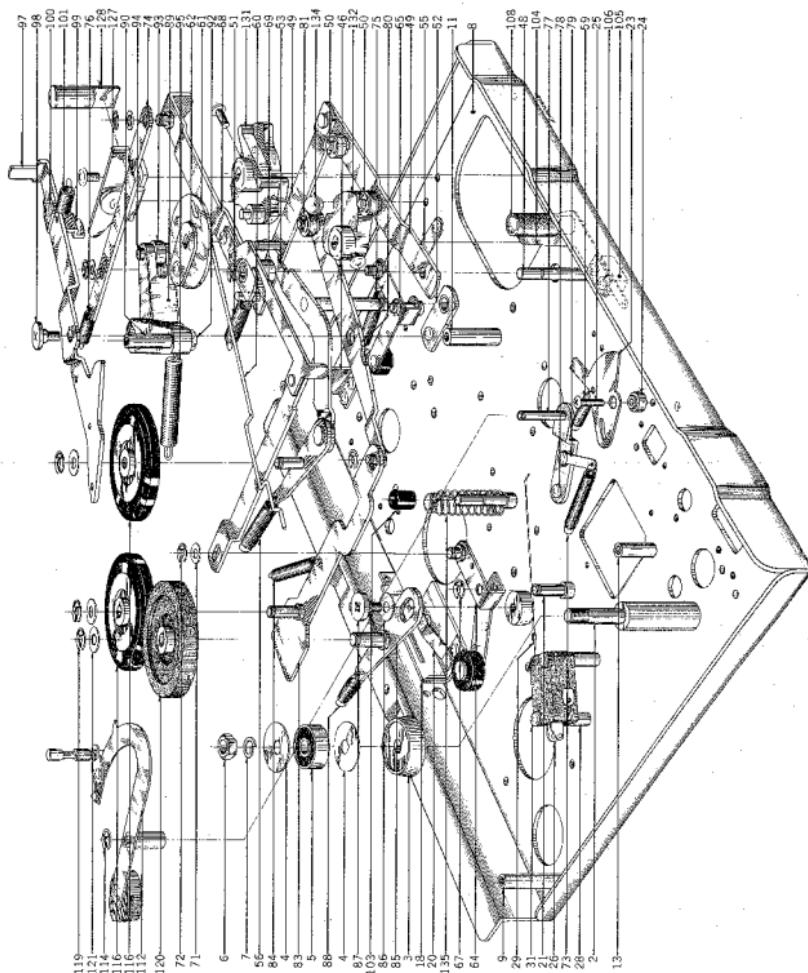


MECHANISM ASSEMBLY BLOCK

Ref. No.	Parts No.	Description	Schematic No.	Qty
TAPE GUIDE BLOCK				
6-1x	BZ400948	Tape Guide Block #4 Comp.	UJF1S1C	1
6-2	MZ204311	Tape Guide Prop #1700	AT-16	1
6-3	SZ465377	Tape Guide Table A	LC-618	1
6-4	ZW231805	Tape Guide Washer (Large)	3A-356	2

When ordering parts, please describe Parts Number, Serial Number, and Model Number in detail.

**FIG. 7 PHOTO OF
PRE-AMP. P.C. BOARD (LE-5022)**

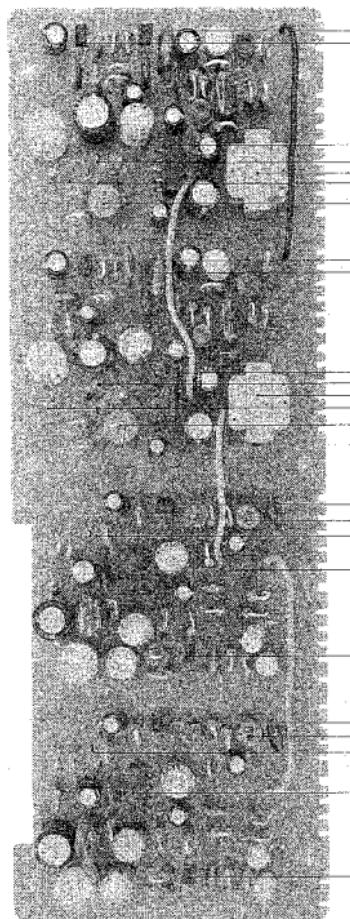


Symbol No.	Parts No.	Description	Q'ty
7-L1	EO243977	Ferrite Inductor FL7H 1MH(J)	2
7-L2	EO244001	Ferrite Inductor FL9H 10MH(J)	2
7-VR1	EV337577	Semi-fixed Volume V10KS-2-4	2 kB
7-VR2	EV337588	Semi-fixed Volume V10KS-2-4	20 kB
7-C1	EC432810	Capacitor, Vertical Type	2
7-C2	EC290520	Elect. 10μF 16WV(NL)	2
7-C3	EC220364	VFM 100PF(I) 50WV	2
7-C4	EC493323	Elect. 1μF 6.3WV	2
7-C5	EC476965	Elect. 47μF 25WV(NL)	2
7-C6	EC220678	Elect. 47μF 25WV	2
7-C7	EC290520	VFM 100PF(I) 50WV	2
7-C8	EC320051	Elect. 10μF 16WV	2
7-C9	EC220364	Elect. 100μF 6.3WV	2
7-C10	EC446297	Mylar 0.18μF(J) 50WV	2
7-C11	EC220364	Elect. 100μF 6.3WV	2
7-C12	EC368335	Mylar 0.022μF(J) 50WV	2
7-C13	EC220994	Elect. 10μF 25WV	2
7-C14	EC320051	Elect. 10μF 16WV	2
7-C15	EC368335	Mylar 0.022μF(J) 50WV	2
7-C16	EC423562	VFM 470PF(I) 50WV	2
7-C17	EC450527	Elect. 4.7μF 25WV	2
7-C18	EC336216	VFM 330PF(I) 50WV	2
7-C19	EC480071	Elect. 22μF 16WV(NL)	2
7-C20	EC336216	VFM 330PF(I) 50WV	2
7-C21	EC476965	Elect. 47μF 25WV(NL)	2
7-C22	EC329771	Elect. 47μF 6.3WV	2
7-C23	EC379170	Mylar 0.1μF(I) 50WV	2
7-C24	EC379787	Mylar 0.0039μF(J) 50WV	2
7-C25	EC389485	Mylar 0.018μF(I) 50WV	2
7-C26	EC290520	VFM 100PF(I) 50WV	2
7-C27	EC329771	Elect. 47μF 6.3WV	2
7-C28	EC450527	Elect. 4.7μF 25WV	2
7-C29	EC220678	Elect. 47μF 25WV	2
7-C30	EC450527	Elect. 4.7μF 25WV	2
7-C31	EC329850	VFM 220PF(I) 50WV	2
7-C32	EC329771	Elect. 47μF 6.3WV	2
7-C33	EC220364	Elect. 100μF 6.3WV	2
7-C34	EC329850	VFM 220PF(I) 50WV	2
7-C35	EC350684	Elect. 22μF 25WV	2
7-C36	EC320051	Elect. 10μF 16WV	2
7-R1	ER349907	Resistor, Stopper Type	2
7-R2	ER414303	Carbon RD1/4 33kΩ(I)	2
7-R3	ER306364	Carbon RD1/4 220kΩ(I) (NL)	2
7-R4	ER480060	Carbon RD1/4 33kΩ(I) (NL)	2
7-R5	ER211465	Carbon RD1/4 1kΩ(J)	2
7-R6	ER213030	Carbon RD1/4 5.6kΩ(J)	2
7-R7	ER346601	Carbon RD1/4 47kΩ(J)	2
7-R8	ER212883	Carbon RD1/4 4.7kΩ(J)	2
7-R9	ER346601	Carbon RD1/4 47kΩ(J)	2
7-R10	ER380711	Carbon RD1/4 220kΩ(J)	2
7-R11	ER346994	Carbon RD1/4 18kΩ(J)	2
7-R12	ER336442	Carbon RD1/4 10kΩ(J)	2
7-R13	ER212264	Carbon RD1/4 22kΩ(J)	2
7-R14	ER336442	Carbon RD1/4 10kΩ(J)	2
7-R15	ER342933	Carbon RD1/4 27kΩ(J)	2
7-R16	ER363644	Carbon RD1/4 560Ω(J)	2
7-R17	ER213300	Carbon RD1/4 680Ω(J)	2
7-R18	ER306843	Carbon RD1/4 1.2kΩ(J)	2
7-R19	ER336442	Carbon RD1/4 10kΩ(J)	2
7-R20	ER362485	Carbon RD1/4 330kΩ(J)	2
7-R21	ER212681	Carbon RD1/4 330Ω(J)	2
7-R22	ER347038	Carbon RD1/4 270Ω(J)	2
7-R23	ER450011	Carbon RD1/4 120kΩ(J)	2
7-R24	ER343078	Carbon RD1/4 2.7kΩ(J)	2
7-R25, 26	FR336442	Carbon RD1/4 10kΩ(J)	4
7-R27	ER357570	Carbon RD1/4 150kΩ(J)	2
7-R28	ER212883	Carbon RD1/4 4.7kΩ(J)	2
7-R29	ER212477	Carbon RD1/4 3.3kΩ(J)	2
7-R30, 31	ER212264	Carbon RD1/4 22kΩ(J)	4
7-R32	ER212883	Carbon RD1/4 4.7kΩ(J)	2
7-R33	ER343078	Carbon RD1/4 2.7kΩ(J)	2

PRE-AMP. P.C. BOARD (LE-5022) BLOCK

Symbol No.	Parts No.	Description	Q'ty
7-1X	BA480251	Pre-amp. P.C. Board Comp. (LE-5022)	1
7-IC1, 2	EJ412413	Line Amp. I.C. LD-3141	1
7-TR1	ET352146	Transistor 2SC455LG(D)	2
7-TR2	ET398845	Transistor 2SC871(E) (F)	2
7-TR3, 4	ET234854	Transistor 2SC458LG(C)	4
7-D1	ED219464	Germanium Diode IN34A	2
7-T1	BT247746	Head Phone Trans. N19-228S	2

When ordering parts, please describe Parts Number, Serial Number, and Model Number in detail.

**FIG. 8 PHOTO OF OSC., POWER SUPPLY
P.C. BOARD (LE-5021)**


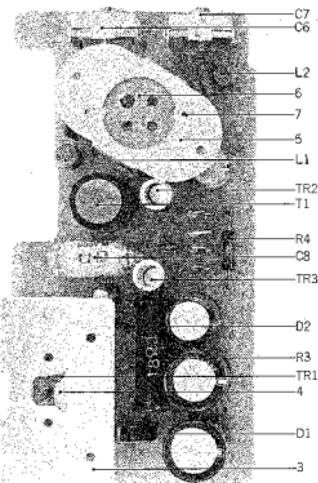


**OSC., POWER SUPPLY
P.C. BOARD (LE-5021) BLOCK**

Symbol No.	Parts No.	Description	Q'ty
8-1x	BA524823	OSC., Power Supply P.C. Board Comp. (LE-5021)	1
8-2x	BA480306	OSC., Power Supply P.C. Board Comp. (LE-5021) (Deck)	1
8-TR1	ET476886	Transistor 2SC1098(L) (M)	1
8-TR2, 3	ET304255	Transistor 2SC971(2) (3) (rcd)	2
8-D1	ED329130	Silicon Diode 10DC-1(black)	1
8-D2	FD511918	Zener Diode WZ-240	1
8-T1	EO383365	OSC. Coil OT-204	1
8-L1, 2	EO321254	Ferri Inductor FL7H 5.6MH(J)	2
8-3	EZ480396	Heat-sink Flute	1
8-4	ZW413155	Screw, binding head 3x6	3
8-5	FZ880418	Socket Table	1
8-6	EJ374027	4P Socket	1
8-7	ZW447772	Tapping Screw #2 3x6(BR)	2
Capacitor, Vertical Type			
8-C1, 2	EC337533	Elect. 220μF 50WV	2
8-C3	EC313121	Elect. 220μF 25WV	1
8-C4, 5	EC350717	VFM 390PF(J) 50WV	2
8-C6, 7	EC425250	Trimmer A-1P3-3 70PF	2
8-C8	EC520492	Styrol 5600PF(J) 500WV (Tub. type)	1
Capacitor, Horizontal Type			
8-C9	EC220678	Elect. 47μF 25WV	1
8-C10, 11	FC250841	Mylar 0.01μF(J) 50WV	2
8-C12	EC350875	Mylar 0.001μF(J) 50WV	1
8-C13	EC220994	Elect. 10μF 25WV	1
Resistor, Stopper Type			
8-R1	ER212883	Carbon RD1/4 4.7k(J)	1
8-R2	ER361642	Carbon RD1/4 47(J)	1
8-R3	FR413717	Wire-wound 3WL 18(J) (L type)	1
8-R4	ER398856	Metal Oxide Film 1W 100(K)	1
8-R5	ER212883	Carbon RD1/4 4.7k(J)	1
8-R6	ER304402	Carbon RD1/4 470(J)	1
8-R7, 8	ER315944	Carbon RD1/4 3.3(J)	2

When ordering parts, please describe Parts Number, Serial Number, and Model Number in detail.

FIG. 9 PHOTO OF MAIN AMP. BLOCK

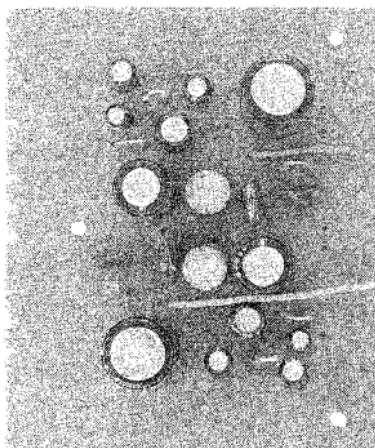
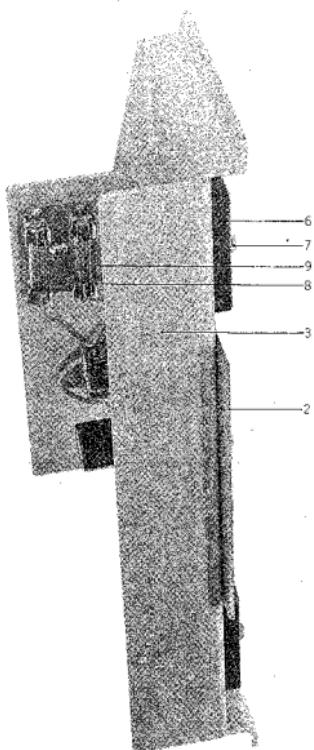


MAIN AMP. BLOCK

Symbol No.	Parts No.	Description	Q'ty
MAIN AMP. BLOCK			
9-1x	BA490151	Main Amp. Block Comp.	1
9-2	BA490173	Main Amp. P.C. Board Comp. (LE-5213)	1
9-3	EZ489396	Heat-sink Plate	1
9-4x	ZW447840	Tapping Screw #2 3x8(BR)	3
9-5x	ZW273802	Toothed Lock Washer M3	2
9-6	E1372126	I.C. STK-011(A)	2
9-7	ZW447805	Tapping Screw #2 3x12(BR)	4
9-8	EJ338062	2P Fuse Holder B	1
9-9	EF435036	Fuse ST-4 0.9A	2
MAIN AMP. P.C. BOARD (LE-5213) BLOCK			
9-2	BA490173	Main Amp. P.C. Board Comp. (LE-5213)	1
Capacitor, Vertical Type			
9-C301	EC331705	Elect. 22μF 16WV	2
9-C302	EC220994	Elect. 10μF 25WV	2
9-C303	EC220105	Elect. 100μF 10WV	2
9-C304	EC313121	Elect. 220μF 25WV	2
9-C305	EC220678	Elect. 47μF 25WV	2
9-C307	EC450281	Elect. 0.47μF 50WV	2
9-C308	EC450270	Elect. 1000μF 25WV	2
9-C309	EC251190	Mylar 0.056μF(K) 50WV	2
9-C310	EC379170	Mylar 0.1μF(J) 50WV	2
Resistor, Stopper Type			
9-R301	ER361642	Carbon RD1/4 47(J)	2
9-R302	ER346544	Carbon RD1/4 3k(J)	2
9-R303	ER399723	Carbon RD1/4 4.7(J)	2

When ordering parts, please describe Parts Number, Serial Number, and Model Number in detail.

FIG. 10 PHOTO OF AMPLIFIER ASSEMBLY BLOCK

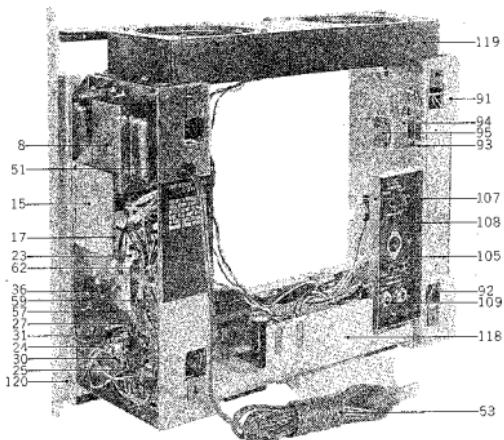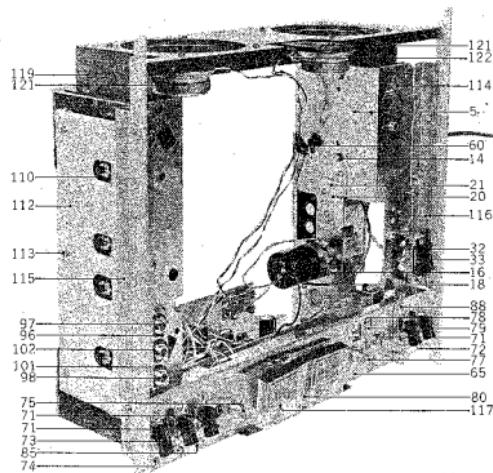

AMPLIFIER ASSEMBLY BLOCK

Ref. No.	Parts No.	Description	Schematic No.	Q'ty	Ref. No.	Parts No.	Description	Schematic No.	Q'ty
10-1x	BZ490162	Power Supply Frame Block Comp.		1	10-4x	BZ480295	Power Supply Frame Block Comp. (CEE)		1
10-2x	BZ480262	Power Supply Frame Block Comp. (Deck)		1	10-5	EZ494853	Power Supply Frame C	LE-5009	1
10-3x	BZ480284	Power Supply Frame Block Comp. (CSA)		1	10-6x	EZ479992	Power Supply Frame A (D)	LE-5009	1
					10-7x	EZ480003	Power Supply Frame B (CSA, CEE)	LE-5009	1
					10-8	BT489813	Power Trans. LET-5	38-6-176	1

When ordering parts, please describe Parts Number, Serial Number, and Model Number in detail.

INDEX






Parts No.	Ref. No. & Symbol No.	Parts No.	Ref. No. & Symbol No.	Parts No.	Ref. No. & Symbol No.	Parts No.	Ref. No. & Symbol No.	Parts No.	Ref. No. & Symbol No.
SE489317	11-25x	ZW260054	2-16	ZW413188	3-23x	ZW413201	6-37x		
SE489565	11-19	ZW260054	2-37x	ZW413188	6-35x	ZW413223	1-29		
SK314100	11-51	ZW260054	4-20x	ZW413188	6-92	ZW413223	3-29		
SKA25158	11-53	ZW260054	6-54x	ZW413188	6-107x	ZW413223	10-14		
SKA75097	11-40	ZW260065	2-17	ZW413188	11-16x	ZW413201	5-8x		
SKA75121	11-41	ZW260065	2-38x	ZW413201	5-27	ZW413201	5-31		
SKA76684	11-48	ZW260065	2-45	ZW413201	6-14x	ZW413201	6-14x		
SKA90375	11-46	ZW260076	6-117x	ZW413223	10-59				
SL493042	5-39	ZW260133	8-9x	ZW413267	6-12x				
SM489295	11-43	ZW260133	5-29	ZW413267	6-35x				
SM489330	11-44x	ZW260144	6-121	ZW413201	6-37x				
SP489251	11-34	ZW260164	5-23x	ZW413223	1-29				
SP489576	11-2x	ZW260166	6-86	ZW413223	6-33x				
SP490587	11-46	ZW260166	11-50x	ZW413223	10-59				
SP490593	11-4x	ZW260166	3-8x	ZW413223	6-106				
SP489600	11-3x	ZW260000	6-96	ZW413267	6-12x				
SP490533	11-35x	ZW270088	2-11	ZW413267	6-33x				
SSA495628	10-121	ZW270088	3-24	ZW413278	4-29				
SZ2276816	11-5	ZW2722935	10-68x	ZW413278	4-29				
SZ330895	11-7	ZW272722	10-100x	ZW413280	4-34				
SZ377190	11-28x	ZW2736688	11-11x	ZW413741	10-51x				
SZ382217	11-17x	ZW273723	1-22	ZW413943	11-39				
SZ382241	11-20x	ZW273734	1-23	ZW413998	4-32				
SZ465377	6-3	ZW273756	1-5	ZW414033	6-10x				
SZ476875	11-56x	ZW273756	6-32x	ZW414044	6-15x				
SZ482152	11-14	ZW273756	10-28x	ZW414055	6-30x				
SZ489227	10-119	ZW273767	6-79	ZW414065	6-31				
UC254250	3-3	ZW273778	1-39	ZW414336	11-39				
ZG206144	1-10	ZW273802	1-4	ZW416687	5-18x				
ZG208091	6-59	ZW273802	6-33x	ZW416687	6-133x				
ZG217337	4-17	ZW273802	9-5x	ZW417025	1-7				
ZG217394	4-19x	ZW273881	6-42x	ZW417025	1-28				
ZG217394	6-138	ZW273881	10-29x	ZW417137	10-113				
ZG217866	6-101	ZW273881	10-103x	ZW417150	4-18				
ZG227147	6-95	ZW273892	5-24x	ZW417150	6-19x				
ZG227428	10-27	ZW273914	4-26x	ZW417227	11-9x				
ZG227441	6-76	ZW273914	10-13x	ZW419646	11-15x				
ZG227452	6-75	ZW273960	5-25	ZW419646	11-29x				
ZG227485	5-40	ZW274026	6-7	ZW424056	3-16				
ZG227542	2-35	ZW274048	6-6	ZW424056	3-22				
ZG227553	2-14	ZW290248	10-114	ZW424056	4-25x				
ZG227561	5-37	ZW290283	4-21x	ZW424124	11-6x				
ZG227575	6-56	ZW290283	5-21x	ZW424124	11-26x				
ZG227575	6-88	ZW290283	5-36x	ZW425788	6-130x				
ZG227586	5-11	ZW290283	5-38	ZW427037	3-11				
ZG255633	2-9	ZW290283	6-67	ZW433001	11-52x				
ZG257095	6-20	ZW290283	6-72	ZW434160	2-33				
ZG270358	6-84	ZW290283	6-82x	ZW434160	11-47x				
ZG290384	6-73	ZW290283	6-119	ZW434171	2-48				
ZG312748	6-60	ZW290294	6-114	ZW434193	5-15x				
ZG312928	1-33	ZW293027	4-12	ZW434215	5-14x				
ZG434092	2-29	ZW300655	3-19	ZW434250	10-12x				
ZG469427	6-51	ZW312693	2-28	ZW434283	11-30x				
ZW200474	3-25	ZW317228	6-129x	ZW447208	4-5				
ZW201150	11-45x	ZW318532	6-109x	ZW447772	8-7				
ZW201183	11-33x	ZW321552	6-113x	ZW447777	10-16				
ZW201167	6-70x	ZW323728	1-17	ZW447777	10-74				
ZW201178	5-13	ZW323728	1-31	ZW447777	10-93				
ZW202105	6-58x	ZW323728	6-47x	ZW447777	10-120				
ZW202133	5-6x	ZW323728	6-78	ZW447805	9-7				
ZW307314	10-31	ZW332728	6-100	ZW447840	9-4x				
ZW217102	6-105	ZW332728	10-35x	ZW448660	10-69x				
ZW217877	5-22	ZW334488	11-18x	ZW455275	10-101				
ZW217877	6-98	ZW330412	6-38x	ZW461935	10-26x				
ZW223323	6-87	ZW330423	6-39x	ZW462835	6-44x				
ZW231693	2-23	ZW330434	6-40x	ZW462846	6-45x				
ZW231794	4-28x	ZW330445	6-41x	ZW464714	1-9x				
ZW231805	6-4	ZW336846	1-34	ZW476741	11-21x				
ZW235585	4-31	ZW373577	4-4	ZW477876	1-13				
ZW244574	4-27	ZW376391	6-96x	ZW480622	1-36				
ZW244710	4-8	ZW376391	6-118x	ZW481072	11-54x				
ZW232977	4-13x	ZW384131	3-4x	ZW481454	11-57x				
ZW253405	11-49x	ZW391680	10-70x	ZW489745	11-10				
ZW254621	3-12	ZW391680	10-102	ZW490116	10-89x				
ZW259795	6-102x	ZW393232	4-33	ZW490127	10-90x				
ZW259918	6-71	ZW393726	6-25	ZW490364	11-27x				
ZW259942	6-66x	ZW408418	11-31						
ZW259975	9-91x	ZW411660	11-32						
ZW260021	2-15	ZW413155	1-38						
ZW260021	2-36	ZW413155	8-4						

SECTION 3

SCHEMATIC DIAGRAM

1. 4400 SCHEMATIC DIAGRAM
2. 4400D SCHEMATIC DIAGRAM


4400D

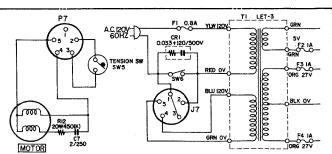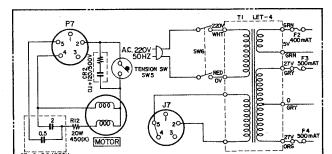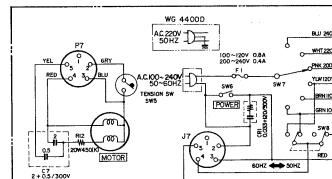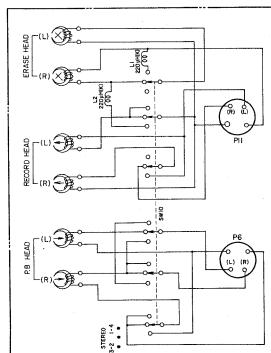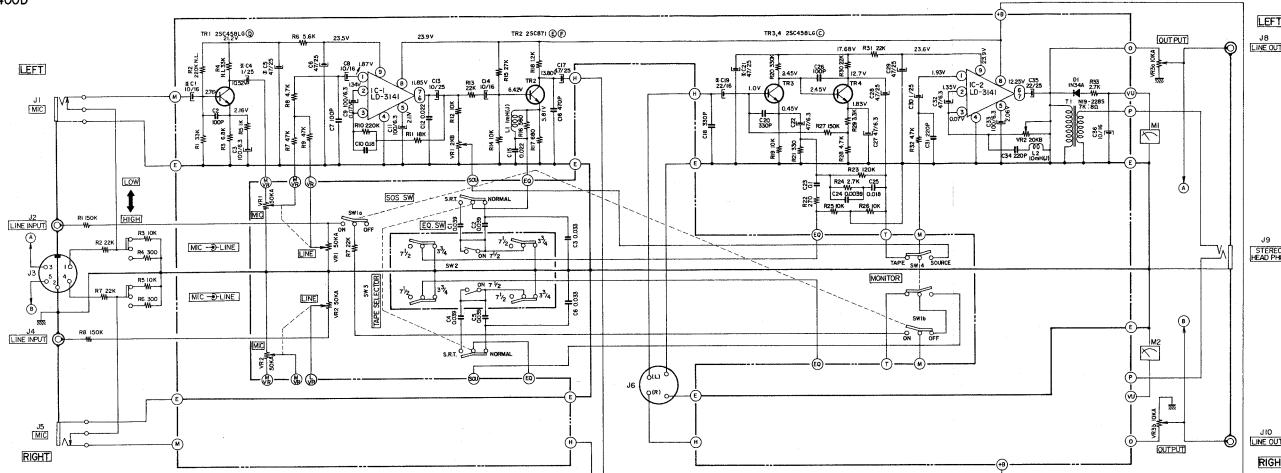

CEE 4400D

CSA 4400D

4400D SCHEMATIC
DIAGRAM NO.2-2 1460656A

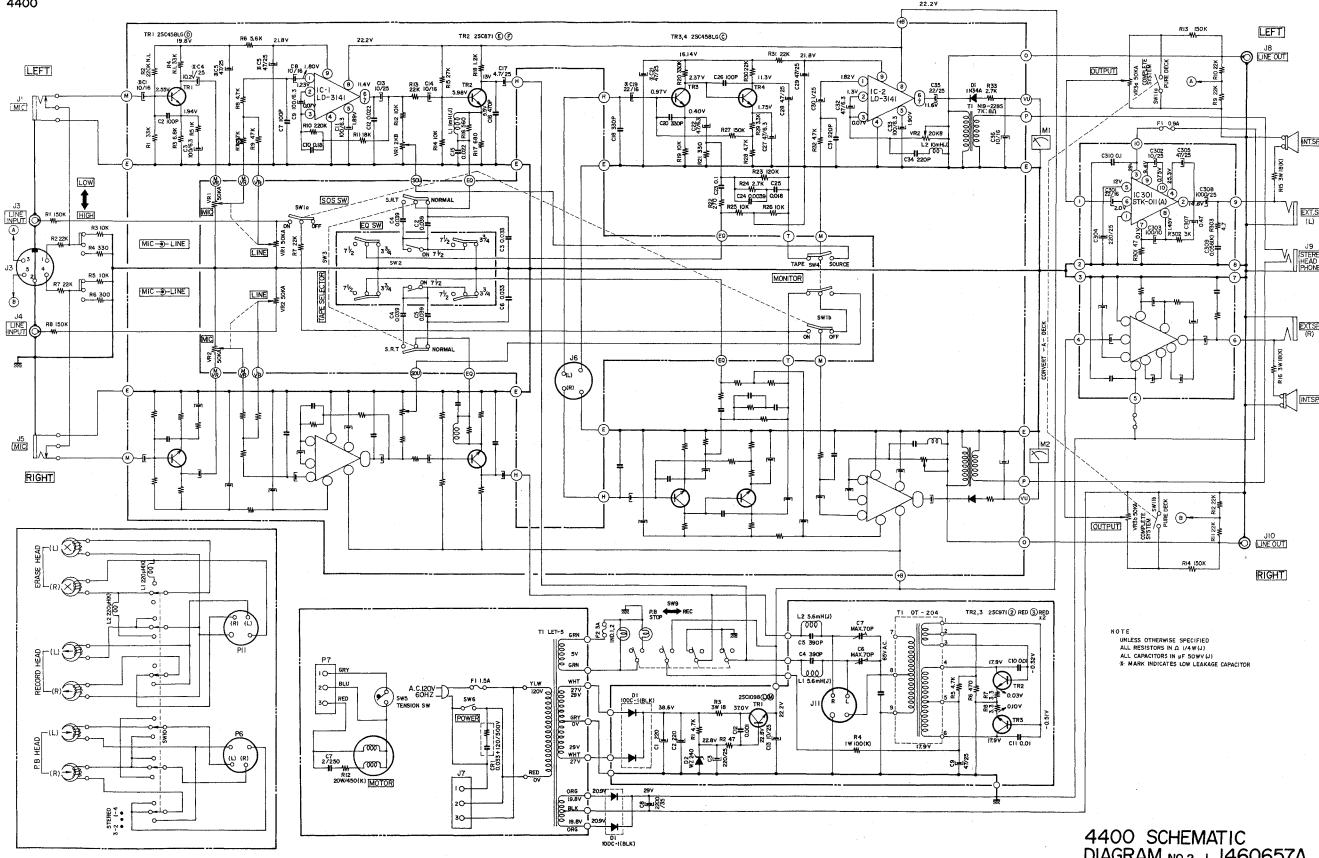

4400 SCHEMATIC
DIAGRAM NO.2-1 1460657A