

# SERVICE MANUAL


## PARTS LIST


AA-1135  
AA-1150

**AA-1135**  
**MODEL AA-1150**



**ALSO APPLICABLE TO BLACK MODEL**



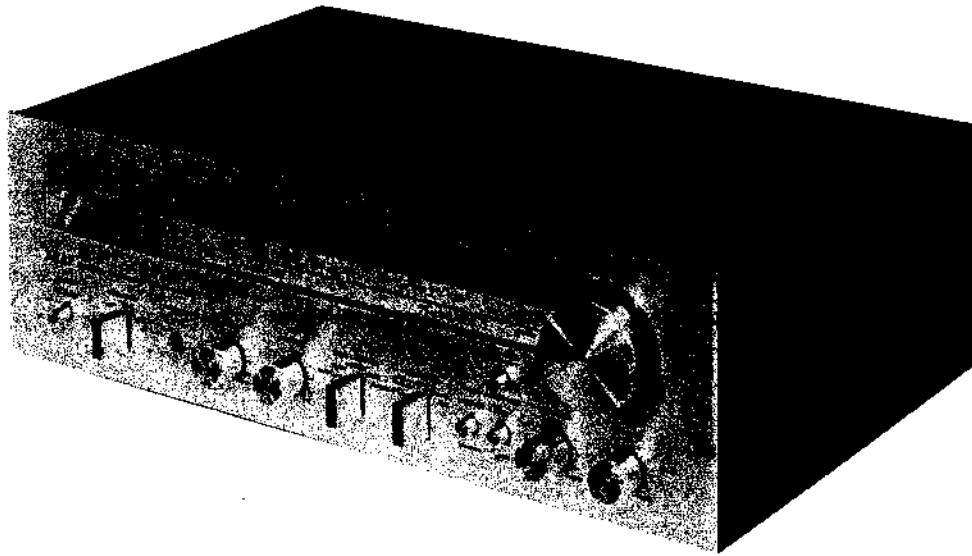

## AKAI STEREO RECEIVER

MODEL AA-1135 AA-1150

SECTION 1	SERVICE MANUAL .....	2
SECTION 2	PARTS LIST .....	31
SECTION 3	SCHEMATIC DIAGRAM .....	48

---

SECTION 1

**SERVICE MANUAL**

TABLE OF CONTENTS

I. TECHNICAL DATA .....	3
II. DISMANTLING OF UNIT .....	5
III. CONTROLS .....	6
1. MODEL AA-1135 .....	6
2. MODEL AA-1150 .....	7
IV. PRINCIPAL PARTS LOCATION .....	8
1. MODEL AA-1135 .....	8
2. MODEL AA-1150 .....	9
V. OPERATING PRINCIPLES OF QUADRATURE DETECTION SYSTEM .....	10
VI. OPERATING PRINCIPLES OF PLL CIRCUIT EMPLOYED IN STEREO DEMODULATION CIRCUIT .....	12
1. PLL CIRCUIT OPERATION .....	12
2. STEREO DEMODULATION CIRCUIT .....	13
VII. LEVEL DIAGRAM .....	14
1. MODEL AA-1135 .....	14
2. MODEL AA-1150 .....	15
VIII. TUNER ADJUSTMENT .....	16
1. FM TUNER SECTION ADJUSTMENT .....	17
2. AM TUNER SECTION ADJUSTMENT .....	18
IX. MAIN AMPLIFIER ADJUSTMENT .....	19
X. TUNING CORD THREADING .....	20
XI. CLASSIFICATION OF VARIOUS P.C BOARDS .....	21
1. RELATION OF P.C. BOARD TITLE AND IDENTIFICATION NUMBER .....	21
2. MODEL AA-1135 COMPOSITION OF VARIOUS P.C BOARDS .....	22
3. MODEL AA-1150 COMPOSITION OF VARIOUS P.C BOARDS .....	25

For basic adjustments, measuring methods, and operating principles, refer to GENERAL OPERATING PRINCIPLES AND ADJUSTMENTS.

# I. TECHNICAL DATA

## AMPLIFIER SECTION

		AA-1135	AA-1150
POWER OUTPUT		35 watts per channel, min RMS, at 8 ohms from 20 to 20,000 Hz with no more than 0.2% T.H.D.	50 watts per channel, min RMS, at 8 ohms from 20 to 20,000 Hz with no more than 0.1% T.H.D.
POWER BAND WIDTH (IHF)		6 Hz to 50 kHz T.H.D. 0.2% at 8 ohms	6 Hz to 50 kHz T.H.D. 0.1% at 8 ohms
S/N RATIO	PHONO AUX	Better than 80 dB Better than 90 dB	Better than 80 dB Better than 90 dB
RESIDUAL NOISE		Less than 0.8 mV at 8 ohms	Less than 0.5 mV at 8 ohms
CHANNEL SEPARATION (IHF) PHONO		Better than 55 dB at 1 kHz	Better than 55 dB at 1 kHz
DAMPING FACTOR		More than 30 (1 kHz, 8 ohms)	More than 30 (1 kHz, 8 ohms)
OUTPUT	SPEAKER HEADPHONES	A, B (4 to 16 ohms)/A+B (8 to 16 ohms) 4 to 16 ohms	A, B (4 to 16 ohms)/A+B (8 to 16 ohms) 4 to 16 ohms
INPUT SENSITIVITY/IMPEDANCE	PHONO AUX	3 mV/47 kohms 150 mV/100 kohms	3 mV/47 kohms 150 mV/100 kohms
TAPE MONITOR	1) INPUT  OUTPUT  2) INPUT OUTPUT	PIN: 150 mV/100 kohms DIN: 150 mV/100 kohms PIN: 150 mV/4 kohms DIN: 30 mV/30 kohms PIN: 150 mV/100 kohms PIN: 150 mV/100 kohms	PIN: 150 mV/100 kohms DIN: 150 mV/100 kohms PIN: 150 mV/4 kohms DIN: 30 mV/30 kohms PIN: 150 mV/100 kohms PIN: 150 mV/100 kohms
FREQUENCY RESPONSE	PHONO (RIAA) AUX/TAPE MONITOR	30 Hz to 15 kHz $\pm 1$ dB 6 Hz to 70 kHz +0 dB, -2 dB	30 Hz to 15 kHz $\pm 1$ dB 6 Hz to 70 kHz +0 dB, -2 dB
TONE CONTROL	BASS TREBLE	$\pm 9$ dB at 100 Hz $\pm 9$ dB at 10 kHz	$\pm 9$ dB at 100 Hz $\pm 9$ dB at 10 kHz
LOUDNESS CONTROL		$\pm 10$ dB at 100 Hz, +5 dB at 10 kHz (Volume control set -30 dB position)	+10 dB at 100 Hz, +5 dB at 10 kHz (Volume control set -30 dB position)
FILTER	HIGH LOW		-6 dB at 10 kHz -6 dB at 50 Hz

## TUNER SECTION

### FM

		AA-1135	AA-1150
FREQUENCY RANGE		88 MHz to 108 MHz	88 MHz to 108 MHz
SENSITIVITY (IHF)		1.8 $\mu$ V	1.7 $\mu$ V
CAPTURE RATIO		1.3 dB	1.3 dB
SELECTIVITY (IHF)		More than 70 dB	More than 70 dB
IMAGE REJECTION		More than 65 dB (at 98 MHz)	More than 90 dB (at 98 MHz)
IF REJECTION		More than 90 dB (at 98 MHz)	More than 100 dB (at 98 MHz)
SPURIOUS REJECTION		More than 90 dB (at 98 MHz)	More than 100 dB (at 98 MHz)
AM SUPPRESSION		50 dB	50 dB
S/N RATIO		65 dB	65 dB
HARMONIC DISTORTION	MONO STEREO	Less than 0.2% (100% Mod.) Less than 0.4% (100% Mod.)	Less than 0.15% (100 Mod.) Less than 0.3% (100 Mod.)
STEREO SEPARATION		More than 40 dB at 1 kHz	More than 42 dB at 1 kHz
SUBCARRIER SUPPRESSION		More than 52 dB	More than 75 dB

### AM

FREQUENCY RANGE		520 kHz to 1,605 kHz	520 kHz to 1,605 kHz
SENSITIVITY (IHF)		180 $\mu$ V/m (Bar antenna), 10 $\mu$ V (External antenna)	180 $\mu$ V/m (Bar antenna), 10 $\mu$ V (External antenna)
SELECTIVITY (IHF)		More than 30 dB	More than 30 dB
IMAGE REJECTION		More than 65 dB at 1 MHz	More than 65 dB at 1 MHz
IF REJECTION		More than 45 dB	More than 45 dB
S/N RATIO		45 dB	45 dB

TUNING INDICATOR METER		FM center tuning/AM, FM signal strength meter	FM center tuning/AM, FM signal strength meter
MUTING LEVEL CONTROL		Switchable to ON/OFF	Switchable to ON/OFF, 3 to 30 $\mu$ V Variable
ANTENNA INPUT IMPEDANCE		300 ohms balanced, 75 ohms unbalanced	300 ohms balanced, 75 ohms unbalanced

# V. OPERATING PRINCIPLES OF QUADRATURE DETECTION SYSTEM

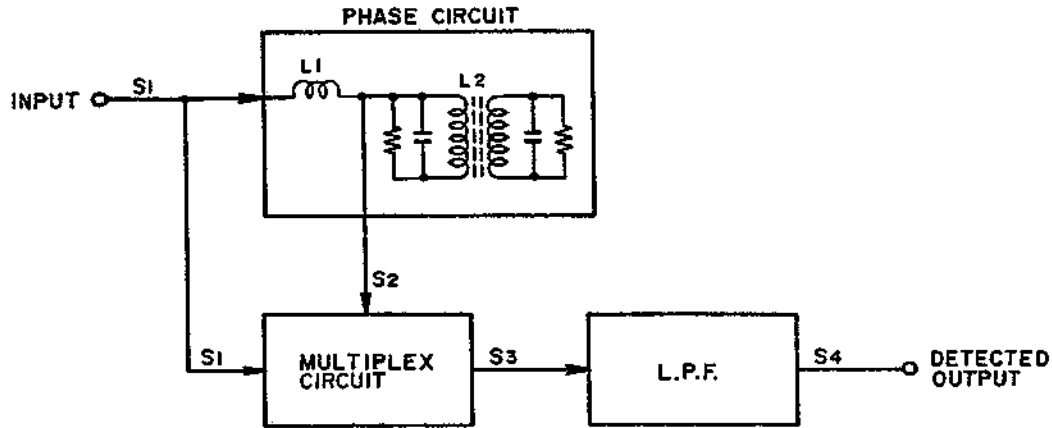


Fig. 7 Quadrature Detection Block Diagram

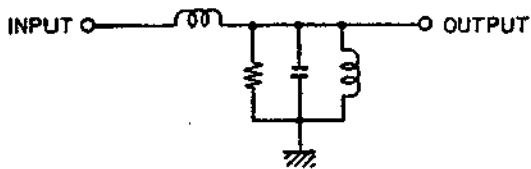


Fig. 8 Single Tuning Type

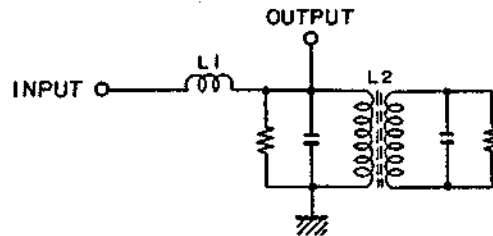


Fig. 9 Double Tuning Type

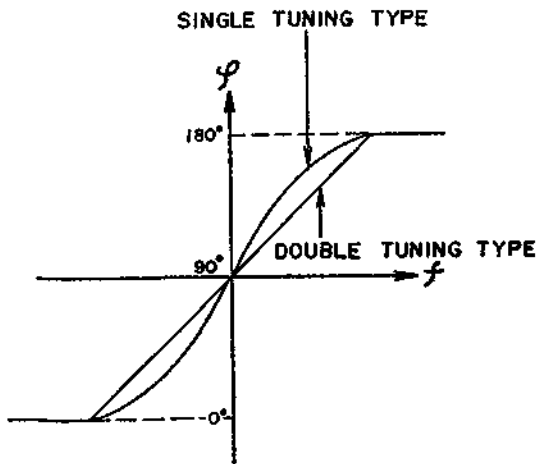


Fig. 10 Tuning Curve

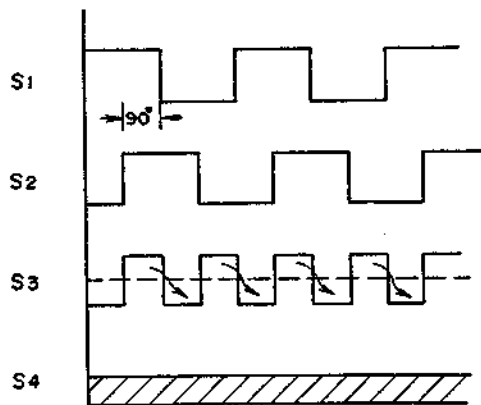


Fig. 11 Output at Non-modulation

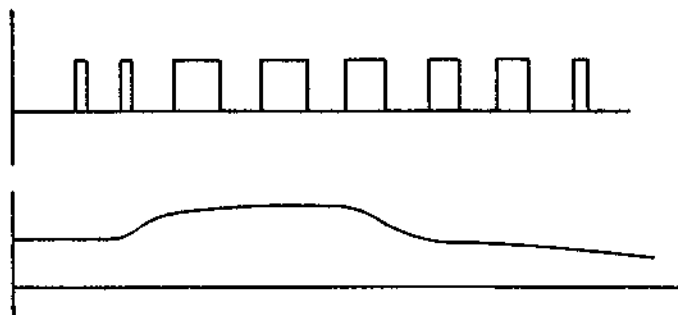


Fig. 12 Output at Modulation Time

---

The Quadrature Detection Circuit is comprised of a Phase Circuit, a Multiplier Circuit and a Low Pass Filter (L.P.F.) as shown in Fig. 7.

There are two types of Phase Circuits, the Single tuning type shown in Fig. 8 and the Double tuning type shown in Fig. 9. However, because with the double tuning type there is less frequency deviation in relation to carrier frequency, linearity is improved as shown in Fig. 10 and phase distortion is reduced this type phase circuit is employed in the AA-1135 and AA-1150.

Input signal S1 is divided into the part which enters the direct multiplier circuit and the part which passes the phase circuit and enters the multiplier circuit. The signal supplied to the phase circuit is always  $90^\circ$  phase delayed at L1. Also because at Non-modulation time, L2 is tuned to 10.7 MHz, if modulation is applied and S1 is changed from 10.7 MHz, phase deviation at L2 will take place proportionately in relation to this changed part and this becomes S2 signal which is delayed in relation to S1.

At Non-modulation, because as shown in Fig. 11 input signal S1 and  $90^\circ$  phase delayed (by means of L1) signal S2 are switched by means of the multiplier circuit, the output signal becomes S3. Because this S3 passes the low pass filter and becomes S4 fixed direct current, the detector output is zero. Then, when modulation is applied, because the switched output is varied according to the degree of modulation, and the output which passed the low pass filter becomes the pulsating current part as shown in Fig. 12 detector output is obtained.

## VI. OPERATING PRINCIPLES OF PLL CIRCUIT EMPLOYED IN STEREO DEMODULATION CIRCUIT

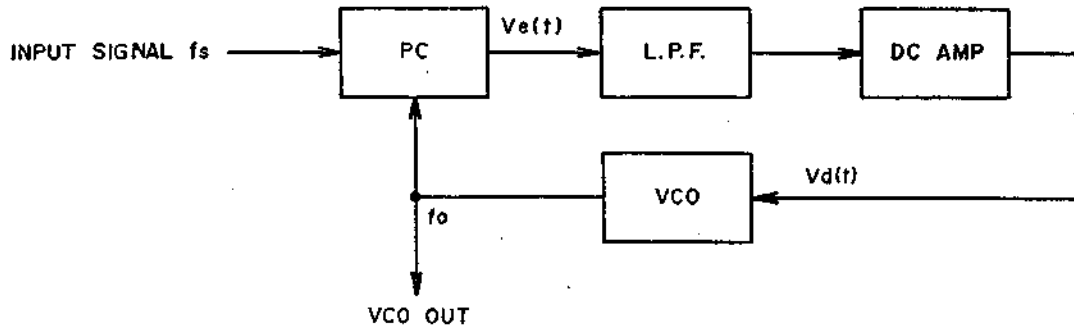


Fig. 13 PLL Circuit

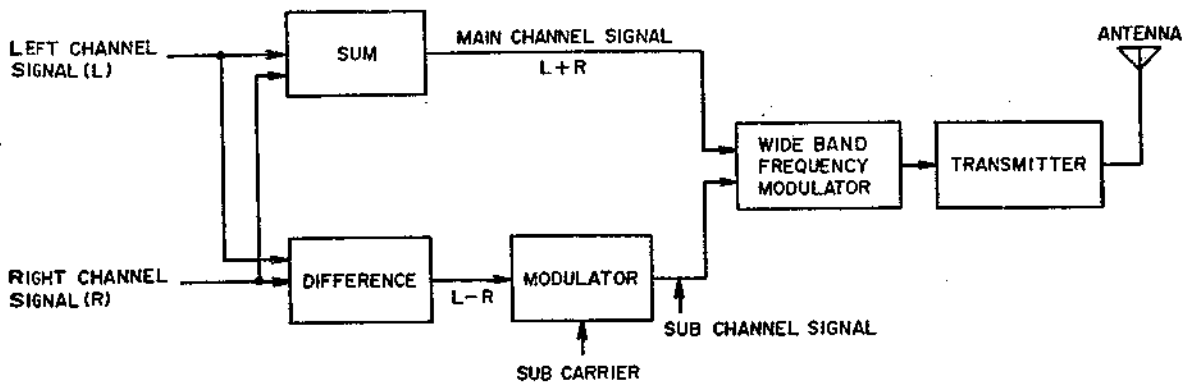


Fig. 14 FM Broadcasting System Diagram

To separate FM stereo broadcast signal received to data into left and right signals, a 19 kHz pilot signal was successively multiplied to form a 38 kHz signal and stereo separation was effected from this. However, with this multiplier system, change in coils due to wear occurred and adjustment points were numerous, etc. Therefore, this model employs a newly developed PLL circuit which produces an exceedingly accurate 38 kHz switching signal.

### 1. PLL CIRCUIT OPERATION

PLL circuit is a kind of feedback circuit and is comprised of a Phase Comparator (PC), a Low Pass Filter (LPF), a Direct Current Amplifier (DC Amp), and a Voltage Control Oscillator (VCO) as shown in Fig. 13.

The PC compares input signal  $F_s$  and VCO oscillator output and generates the difference in signal voltage  $V_e(t)$  proportionately to this phase deviation. This  $V_e(t)$  passes LPF and the DC Amp and becomes control voltage. This control voltage supplied to VCO and VCO oscillation frequency is DC controlled. When there is no input signal  $F_s$ , because there is also no  $V_e(t)$ , control voltage  $V_d(t)$  becomes zero, and VCO maintains a \*free-running oscillation frequency. When a signal enters, VCO oscillation frequency  $f_o$  is controlled to narrow the difference between  $F_s$  by means of feedback as described above, and the PLL circuit assumes a synchronous condition. This is referred

to as input signal lock. (In case the difference between  $F_o$  and  $F_s$  is too large, the differential signal frequency becomes high and is reduced at the LPF. However, because the VCO control voltage does not change, PLL will not stay within the \*lock range).

Because of the ability of the signal interference removing LPF to accumulate the previous voltage; in case the PLL deviates from within the lock range due to certain interference, the original condition is quickly reinstated.

#### \* Free running frequency:

Oscillating frequency when there is no input signal.

#### \* Lock range:

At the condition in which the VCO oscillation frequency is locked to the input signal, the lock range is the oscillating frequency in which when the input signal changes, the PLL maintains its input signal lock condition. Accordingly, in case  $F_s$  is changed inside the PLL lock range, VCO oscillation frequency always follows this, and a no frequency deviation and no phase difference signal is obtained. In other words, VCO oscillation frequency can be locked to  $F_s$ .



## 2. STEREO DEMODULATION CIRCUIT

As shown in Fig. 14 for FM broadcasts, the sum signal (L+R) consists of left signal (L) and right signal (R) and the audio frequency band of this signal in its original form is frequency modulated. On the other hand, the difference signal of both (L-R) is changed to high frequency through the use of the sub carrier, and is referred to as the sub channel signal. The carrier is further frequency modulated and sent to the FM stereo transmitter.

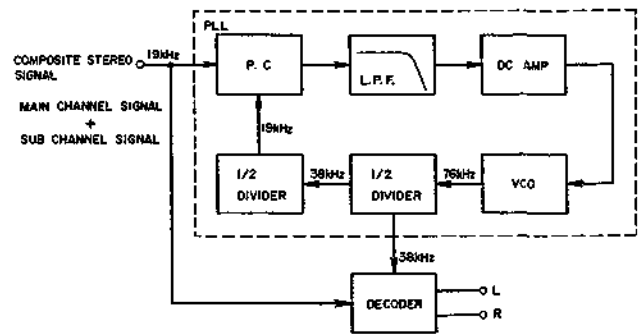


Fig. 15 MPX IC Function

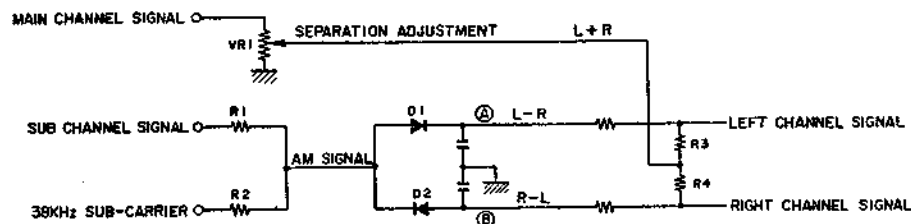


Fig. 16 Multiplex Decoder

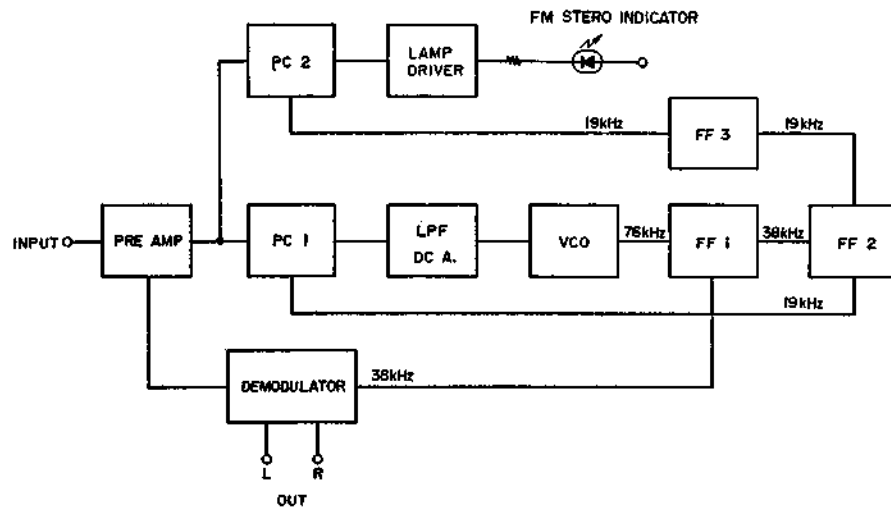


Fig. 17 LA-3350 Function System Diagram

Accordingly, for composite stereo signal demodulation, the sub carrier used for demodulation at the transmitter must be the same uniform 38 kHz signal as the frequency and phase. If the 38 kHz waveform is asymmetrical, channel separation will become poor. At the PLL employed MPX stereo demodulator circuit, as shown in Fig. 13 first a 76 kHz signal is oscillated and when this passes the divider, a symmetrical 38 kHz signal is obtained. This 38 kHz sub carrier is supplied to the multiplex decoder together with the sub channel of the composite stereo signal. At the multiplex decoder, left and right channel audio signals are separated in order as shown in Fig. 16. The 38 kHz sub carrier composited with the sub channel signal of which the carrier part was

removed when sub channel signal and sub carrier passed R1, R2 produces the regular AM wave. Then, because this envelope is detected by mutually reverse polarity connected diodes D1 and D2, L-R signal is emitted at point A and R-L signal at point B.

Also, because main channel signal (L+R) is supplied to R3, R4 center point, A, B point voltage is added and subtracted and becomes

$$(L+R) + (L-R) = 2L \text{ (left channel)}$$

$$(L+R) + (R-L) = 2R \text{ (right channel)}$$

The level of the main channel signal (L+R) can be adjusted by means of variable resistor VR for optimum separation. Thus, the function of actually employed PLL IC LA-3350 is shown in Fig. 17.

# VII. LEVEL DIAGRAM

## 1. MODEL AA-1135

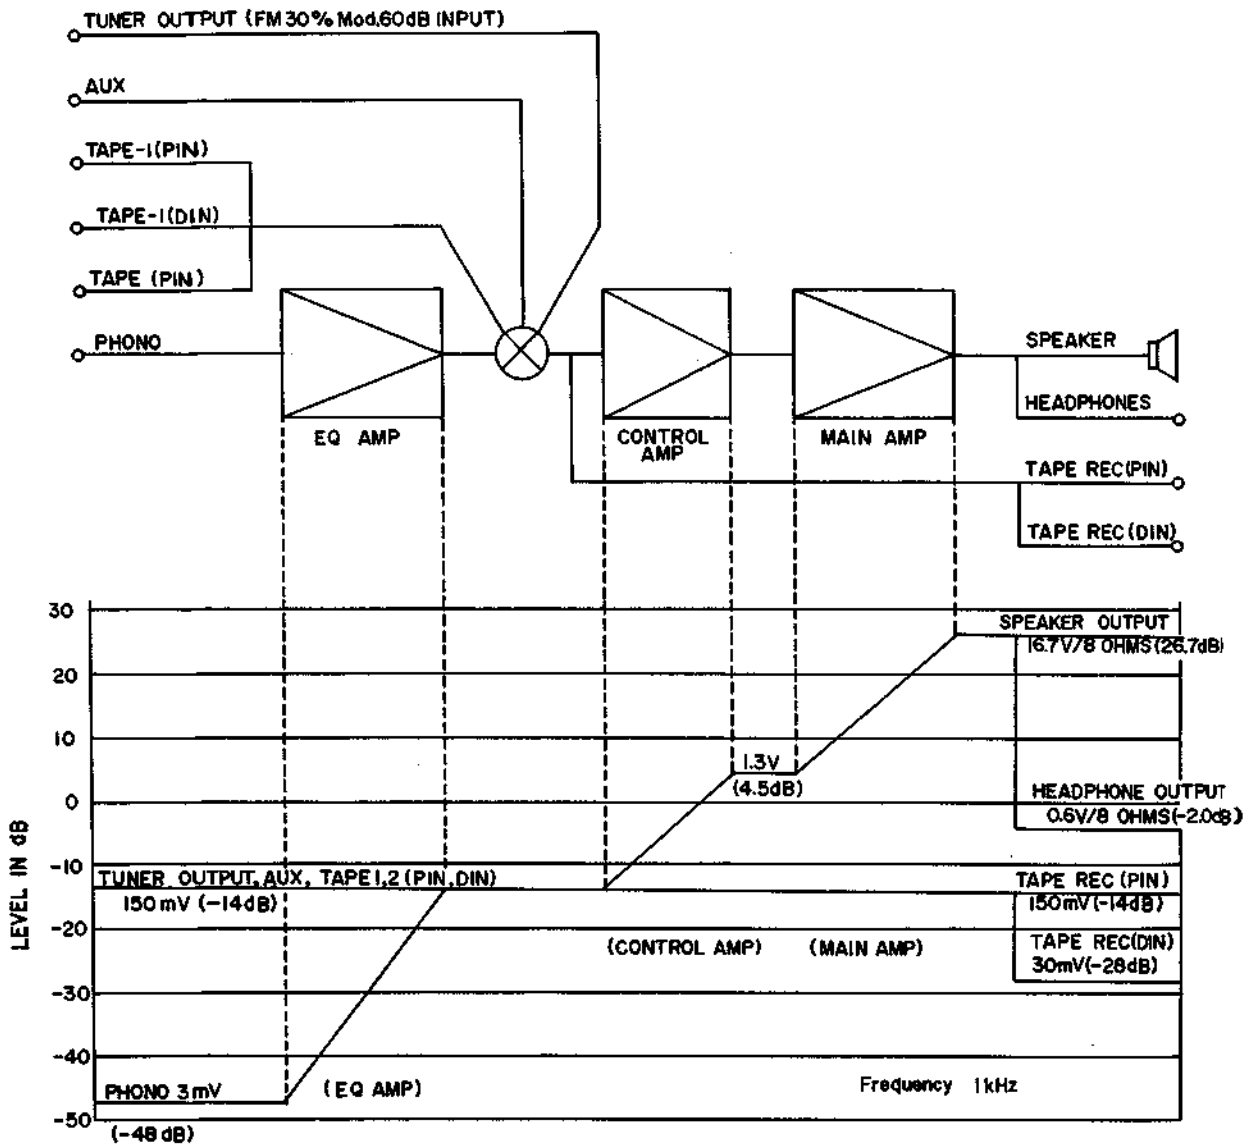


Fig. 18 Level Diagram of Model AA-1135

## 2. MODEL AA-1150

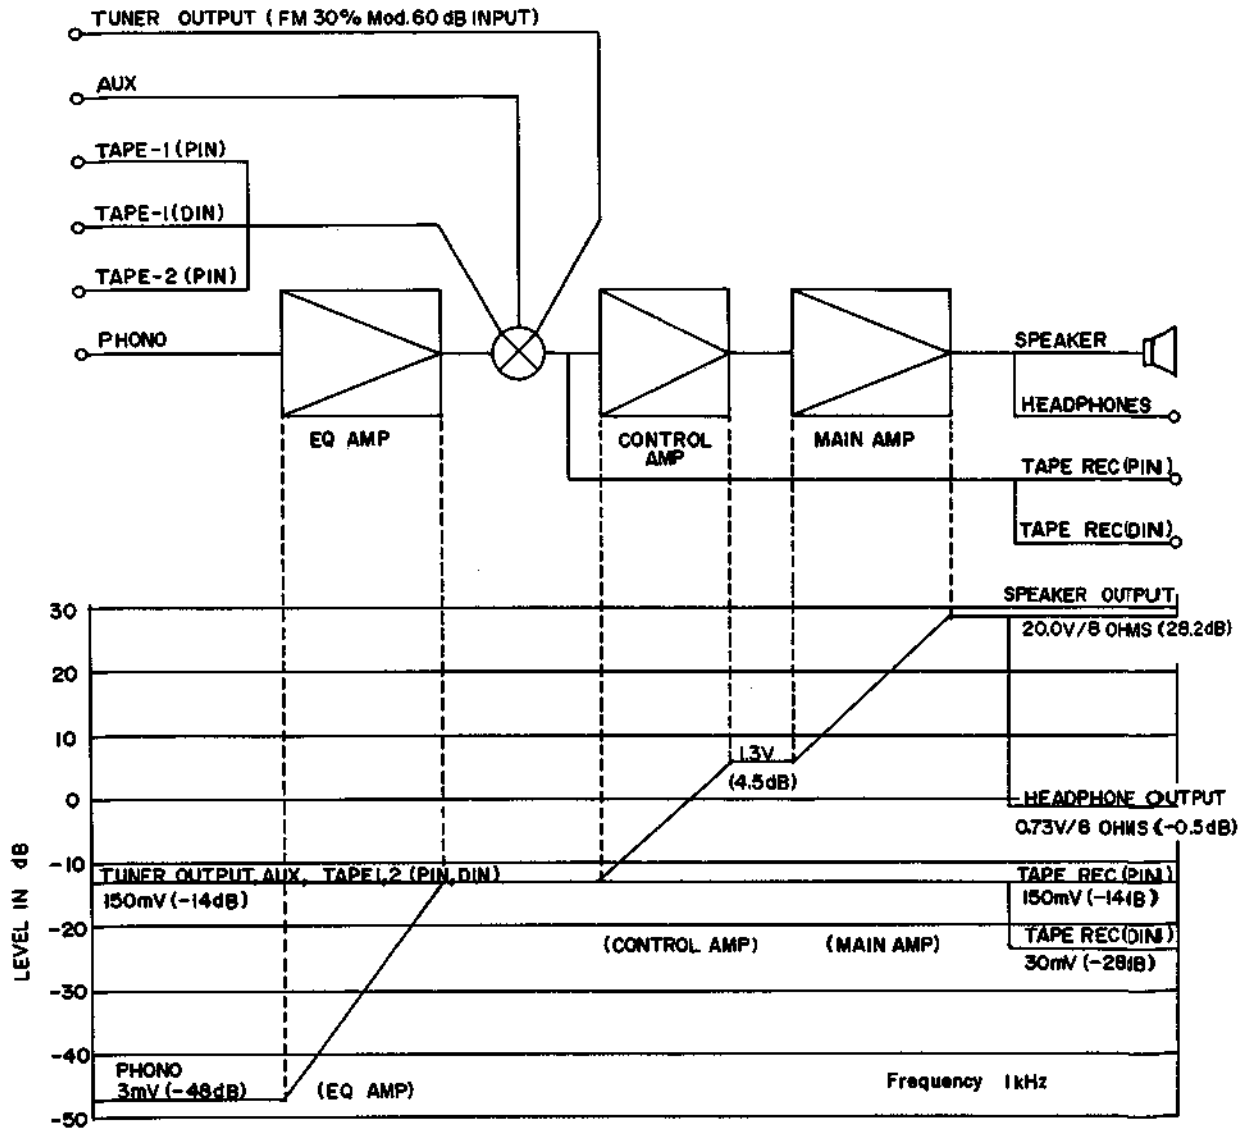


Fig. 19 Level Diagram of Model AA-1150

# VIII. TUNER ADJUSTMENT

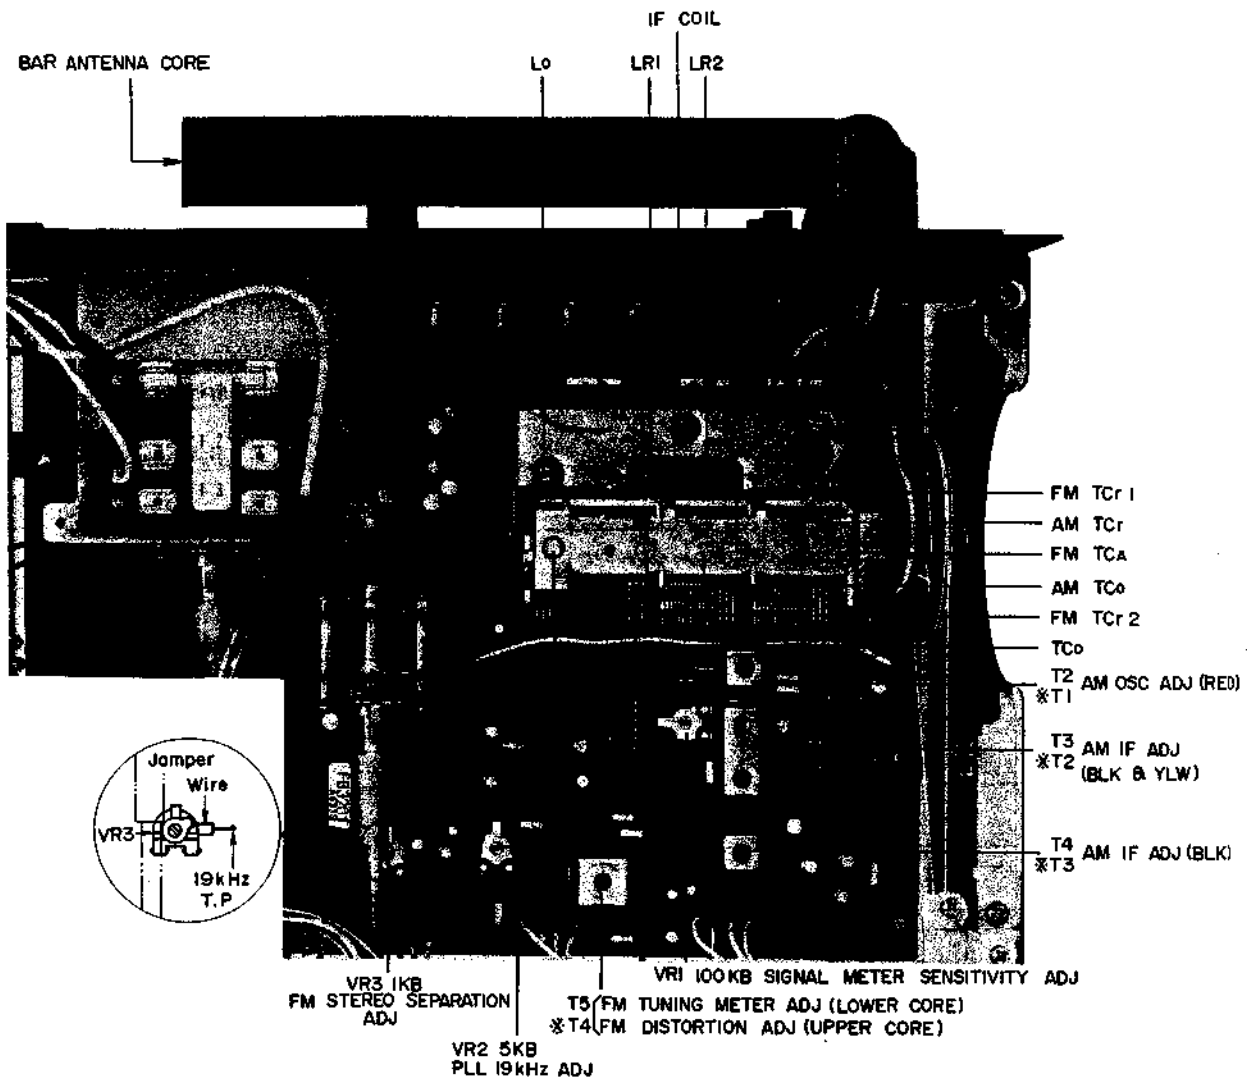


Fig. 20 Multi Function P.C Board AB-3501A (AA-1135)  
AB-5001A (AA-1150)

- Notes; 1. Schematic Numbers of AA-1135 indicated by \* mark.  
2. Please refer to Fig. 21 for Front End of AA-1135.

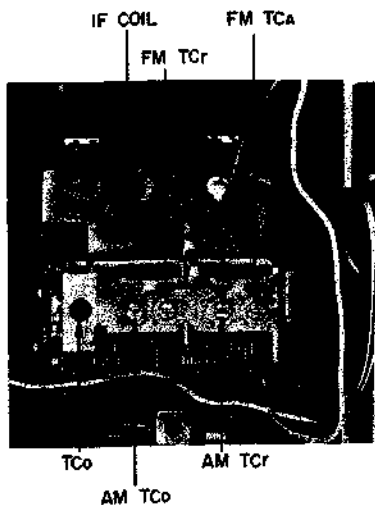


Fig. 21 Front End (AA-1135)

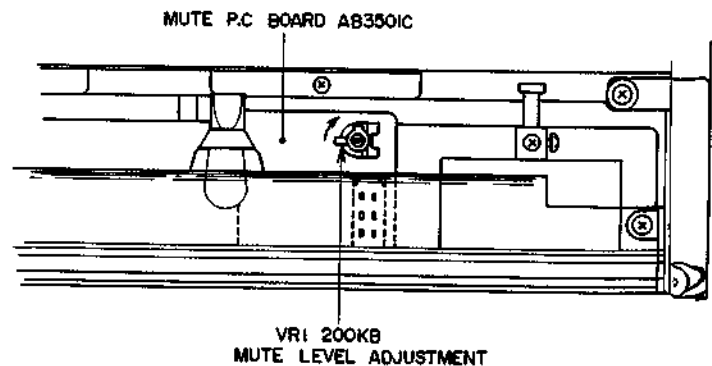


Fig. 22 Mute Level Adjustment (Only AA-1135)

### 1. FM TUNER SECTION ADJUSTMENT (Refer to Fig. 20, 21 and 22)

Step	Adjustment Item	Adjustment Point	Result	Remarks
1	Front End IF Coil	IF Coil (Front End)	Maximum Noise Level	Selector to FM. FM Mute to OFF. Tune only noise without interference of broadcasting.
2	Tuning Meter Centering	T5 *T4 Lower Side core (Multi Function P.C Board)	Center Tuning Meter Indication	Same as above
3	Distortion Factor	T5 *T4 Upper Side core (Multi Function P.C Board)	Less than 0.15% *0.2% Distortion Factor	98 MHz, 60 dB (mono) input. Less than 0.15% *0.2% on both channels.
4	Confirmation of Tuning Meter Indication			If Tuning Meter Indication is not at center position, re-adjust STEP 2 and 3 above.
5	High Range Frequency Coverage	TCo (Front End)	error: within $\pm 300$ kHz	108 MHz, 60 dB (mono) input.
6	Low Range Frequency Coverage	Lo (Front End)	error: within $\pm 300$ kHz	88 MHz, 60 dB (mono) input. (only AA-1150)
7	High Range Sensitivity	FM TCr, FM TCA (Front End)	Less than 3% Distortion Factor	FM Mute to OFF. 108 MHz, Less than 10 dB, *12 dB (mono) input.
8	Low Range Sensitivity	LR1, LR2 (Front End)	Less than 3% Distortion Factor	FM Mute to OFF. 88 MHz, Less than 10 dB (mono) input. (For AA-1135: confirmator only)
9	Mid Range Sensitivity Confirmation		Less than 3% Distortion Factor	FM Mute to OFF. 98 MHz, Less than 10 dB, *12 dB (mono) input.
10	Mute Level	VR1 200 kB (Mute P.C Board)	No signal emitted from output	FM Mute to OFF. 88 MHz, 20 dB (mono) input. (Refer to Fig. 22) (only AA-1135)
11	PLL IC Free Running Frequency	VR2 5 kB (Multi Function P.C Board)	19.00 kHz	Frequency Counter to Test Point (Multi Function P.C Board) See NOTE 3.
12	Stereo Indicator Lighting Confirmation			98 MHz, 60 dB (stereo) input. No lighting of stereo indicator indicates no stereo separation.
13	Stereo Separation	VR 3 1 kB (Multi Function P.C Board)	More than 42 dB, *40 dB (1 kHz)	98 MHz, 60 dB (stereo) 1 ch input. Distortion Factor must be less than 0.3%, *0.4%.

Step	Adjustment Item	Adjustment Point	Result	Remarks
14	Stereo Separation		More than 42 dB, *40 dB (1 kHz)	98 MHz, 60 dB (stereo) R ch input. Distortion Factor must be less than 0.3%, *0.4%. If it exceeds 0.3% *0.4% adjust the coil in STEP 1 within 1/2 turn.
15	Signal Meter Sensitivity	VR1 100 kB (Multi Function P.C Board)	Indicator at "5".	98 MHz, 100 dB (mono) input.

Chart 1

- NOTES: 1. AA-1135 specifications are indicated by \* marks.  
 2. When the distortion factor of less than 3% cannot be obtained at Step 9, repeat Front End IF Coil and Step 7 through 9 adjustments several times.  
 3. Free Running Frequency of the PLL IC must be an exact 19.00 kHz.

## 2. AM TUNER SECTION ADJUSTMENT (Refer to Fig. 20 and 21)

Step	Adjustment Item	Adjustment Point	Result	Remarks
1	Low Range Scale Indication	T2 *T1 (RED) (Multi Function P.C Board)	Maximum Output	Selector to AM. 520 kHz 50 dB input. Tuning Indicator to 520 kHz. Error within 2%.
2	Low Range Sensitivity	T3 *2 (BLK and YLW) T4 *T3 (BLK) (Multi Function P.C Board) Bar Antenna Core (Rear Panel)	Maximum Output Minimum Distortion Factor	520 kHz, 50 dB input. Less than 10% Distortion Factor.
3	High Range Scale Indication	AM TCo (Front End)	Maximum Output	1,400 kHz, 50 dB input. Tuning Indicator to 1,400 kHz. Error within 2%.
4	High Range Sensitivity	AM TCr (Front End)	Maximum Output Minimum Distortion Factor	1,400 kHz, 50 dB input. Less than 10% Distortion Factor.

Chart 2

- NOTES: 1. AA-1135 specifications are indicated by \* mark.  
 2. For best results, repeat Steps 1 through 4 two or three times.

# IX. MAIN AMPLIFIER ADJUSTMENT

MODEL AA-1135 and AA-1150

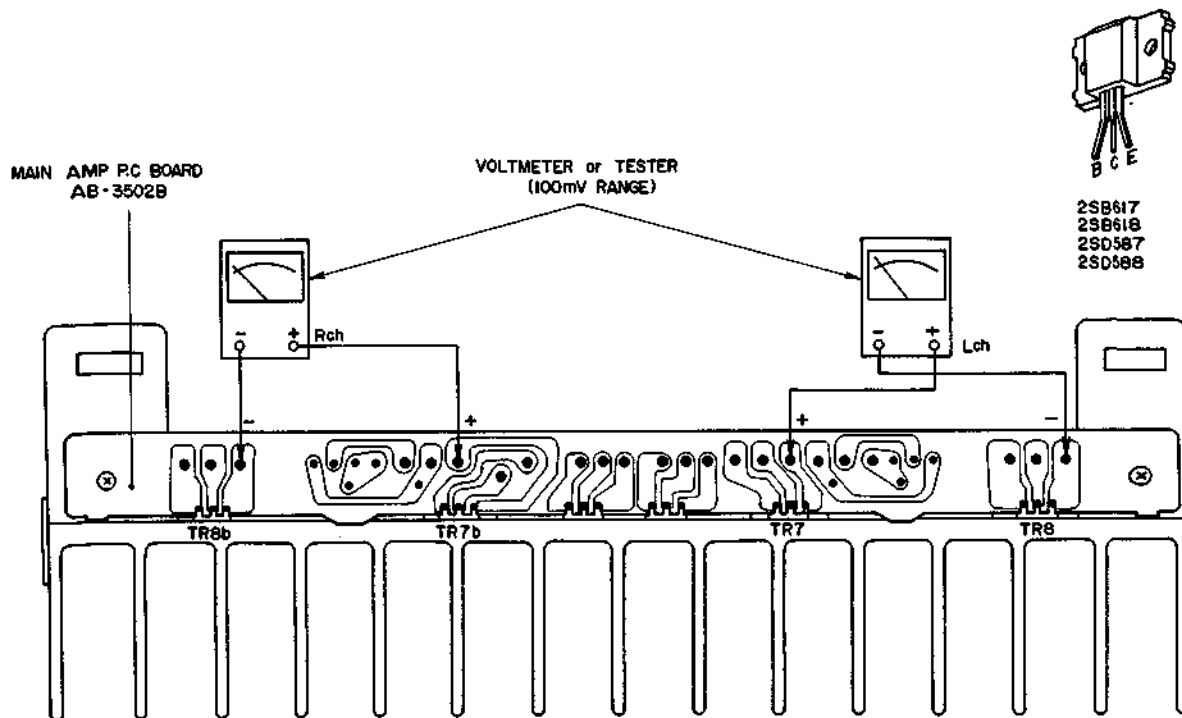


Fig. 23 Instrument Connection

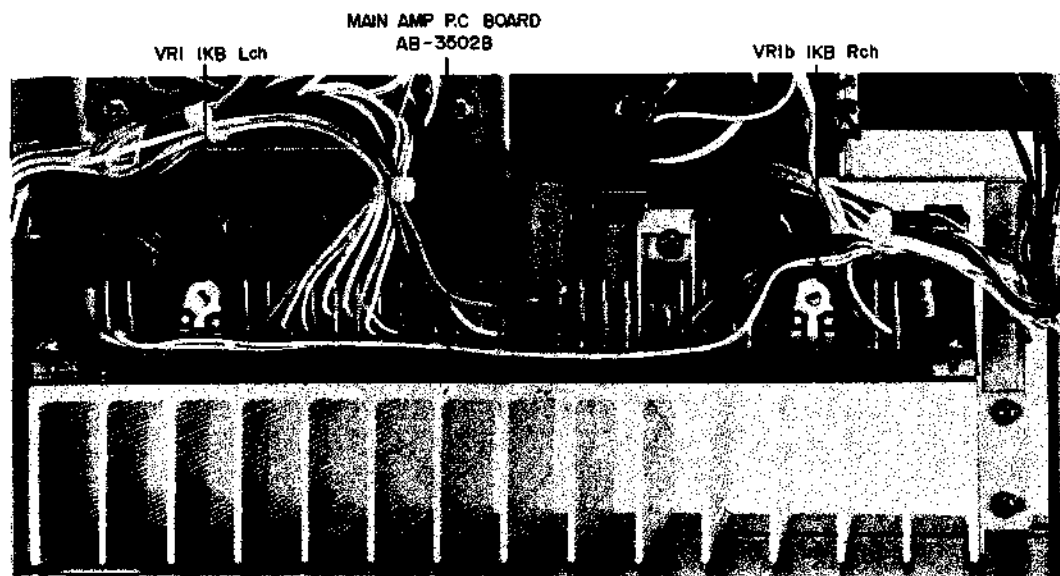


Fig. 24 Adjustment Point

Step	Adjustment Item	Adjustment Point	Result	Remarks
1	Idling Current (Left channel)	VR1 1 kΩ (Main Amp P.C Board)	25 mV	Use a Voltmeter or Tester with DC 100 mV range.
2	Idling Current (Right channel)	VR1b 1 kΩ (Main Amp P.C Board)	25 mV	

Chart 3

\* Be careful not to damage the Power Transistors.

# X. TUNING CORD THREADING

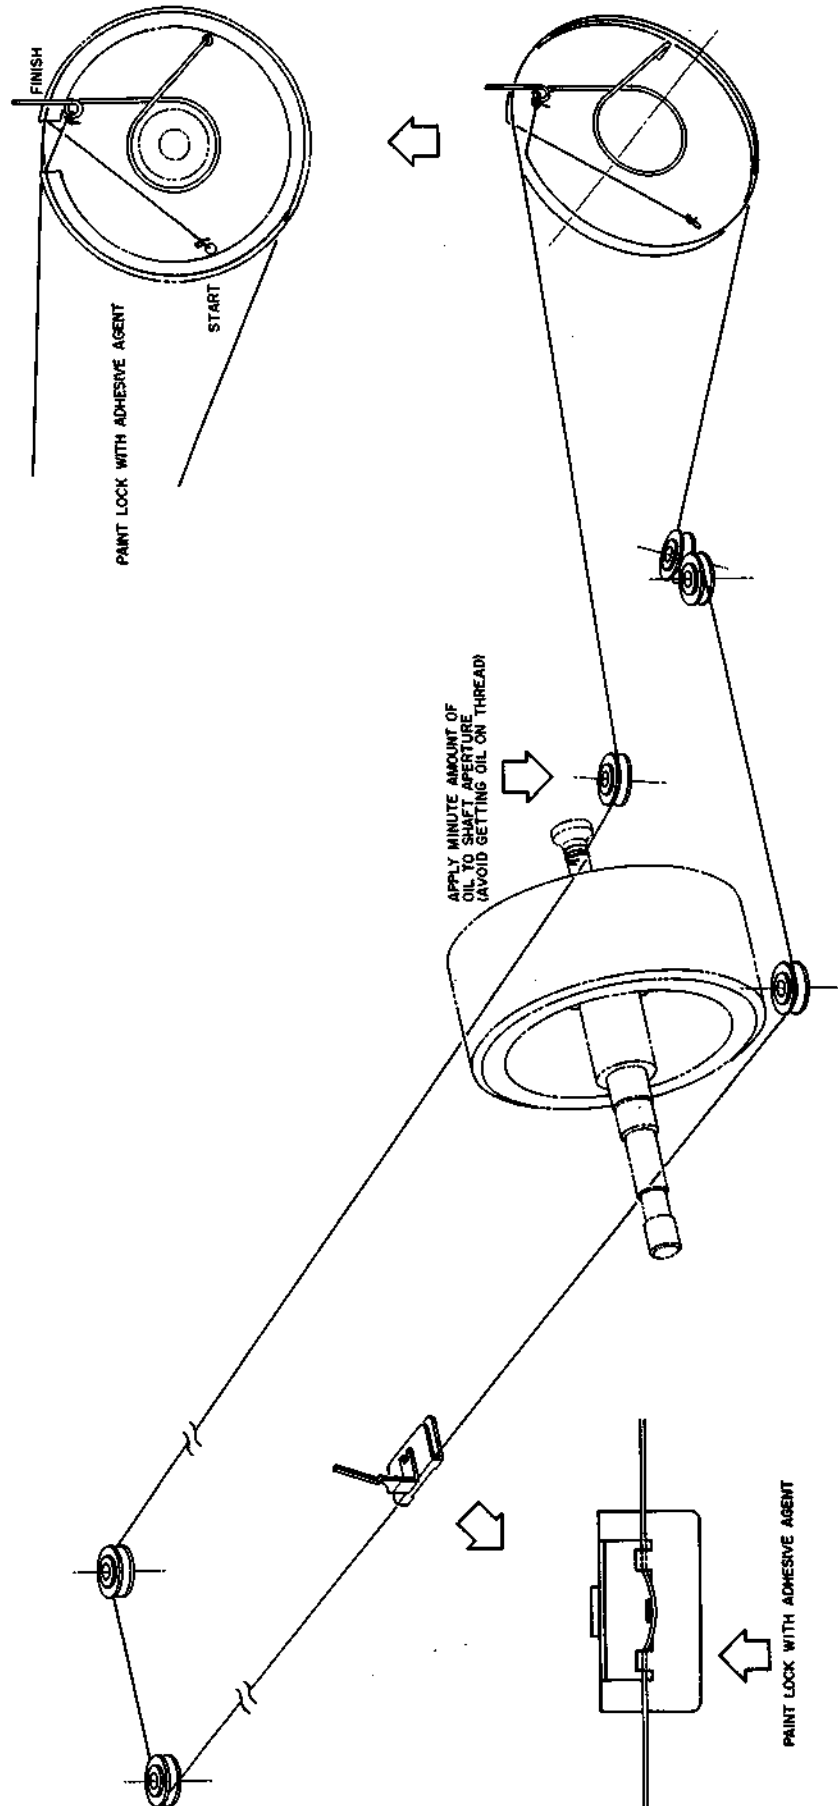


Fig. 25 Tuning Cord Threading



# XI. CLASSIFICATION OF VARIOUS P.C BOARDS

## 1. RELATION OF P.C BOARD TITLE AND IDENTIFICATION NUMBER

### 1) Model AA-1135

P.C Board Title	P.C Board Number
Multi Function P.C Board	AB-3501A
Tone Control P.C Board	AB-3501B
Mute P.C Board	AB-3501C
LED P.C Board	AB-3501D
Fuse P.C Board	AB-3501E
Main Amp (A) P.C Board	AB-3502A
Main Amp (B) P.C Board	AB-3502B


Chart 4

### 2) Model AA-1150

P.C Board Title	P.C Board Number
Multi Function P.C Board	AB-5001A
Tone Control P.C Board	AB-5001B
Filter Mute P.C Board	AB-5001C
LED (A) P.C Board	AB-5001D
LED (B) P.C Board	AB-5001E
Fuse P.C Board	AB-5001F
Main Amp (A) P.C Board	AB-3502A
Main Amp (B) P.C Board	AB-3502B


Chart 5

2. MODEL AA-1135 COMPOSITION OF VARIOUS P.C BOARDS  
 1) MULTI FUNCTION P.C BOARD AB-3501A (3 ED) & LED P.C BOARD AB-3501D

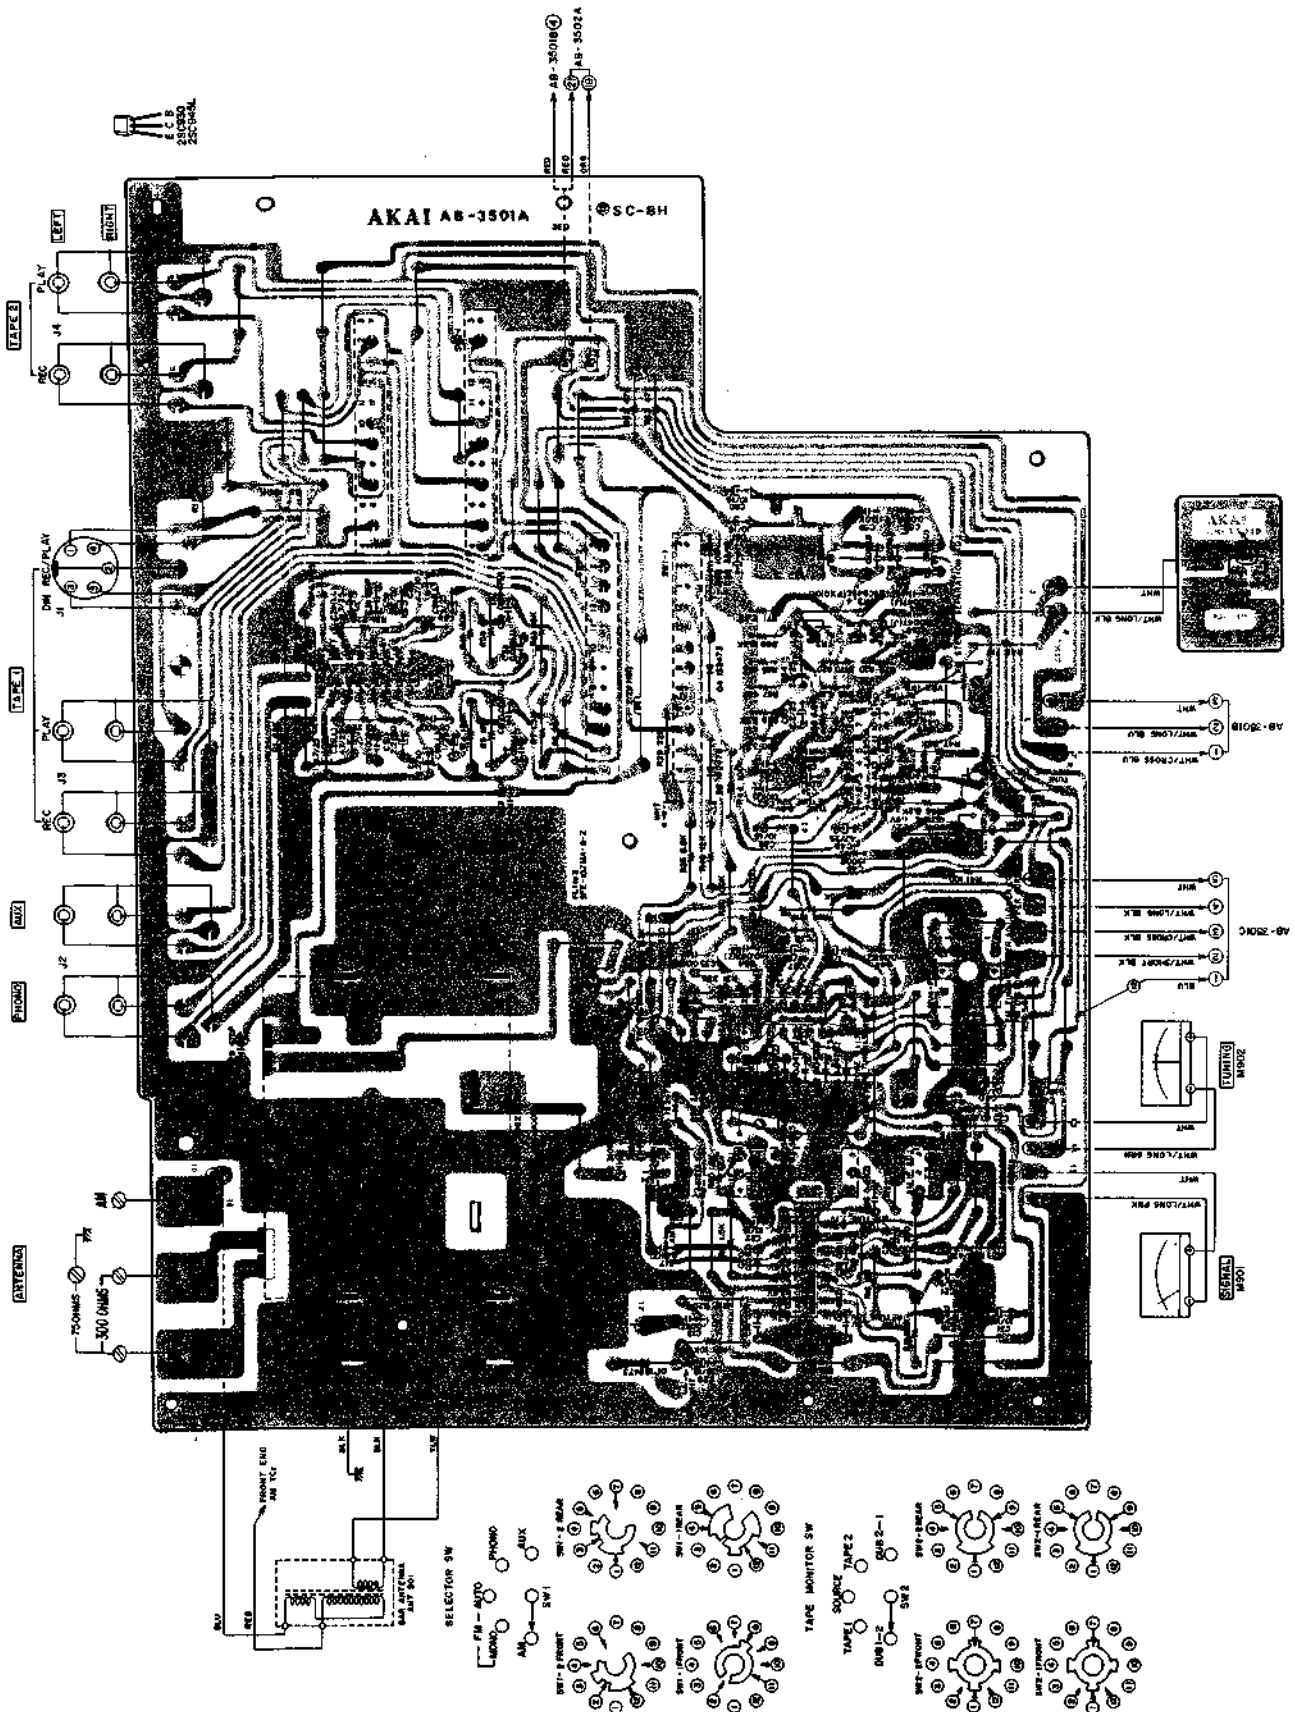



## 2) MAIN AMP (A/B) P.C BOARD AB-3502A/B (2ED) & FUSE P.C BOARD AB-3501E

WARNING: Δ INDICATES SAFETY CRITICAL COMPONENTS. FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS.  
 AVERTISSEMENT: Δ ILLUQUE LES COMPOSANTS CRITIQUES DE SÛRETÉ. POUR MAINTENIR LE DEGRÉ DE SÛRETÉ DE L'APPAREIL, NE REMPLACER LES COMPOSANTS DONT LE FONCTIONNEMENT EST CRITIQUE POUR LA SÛRETÉ QUE PAR DES PIÈCES RECOMMANDÉES PAR LE FABRICANT.

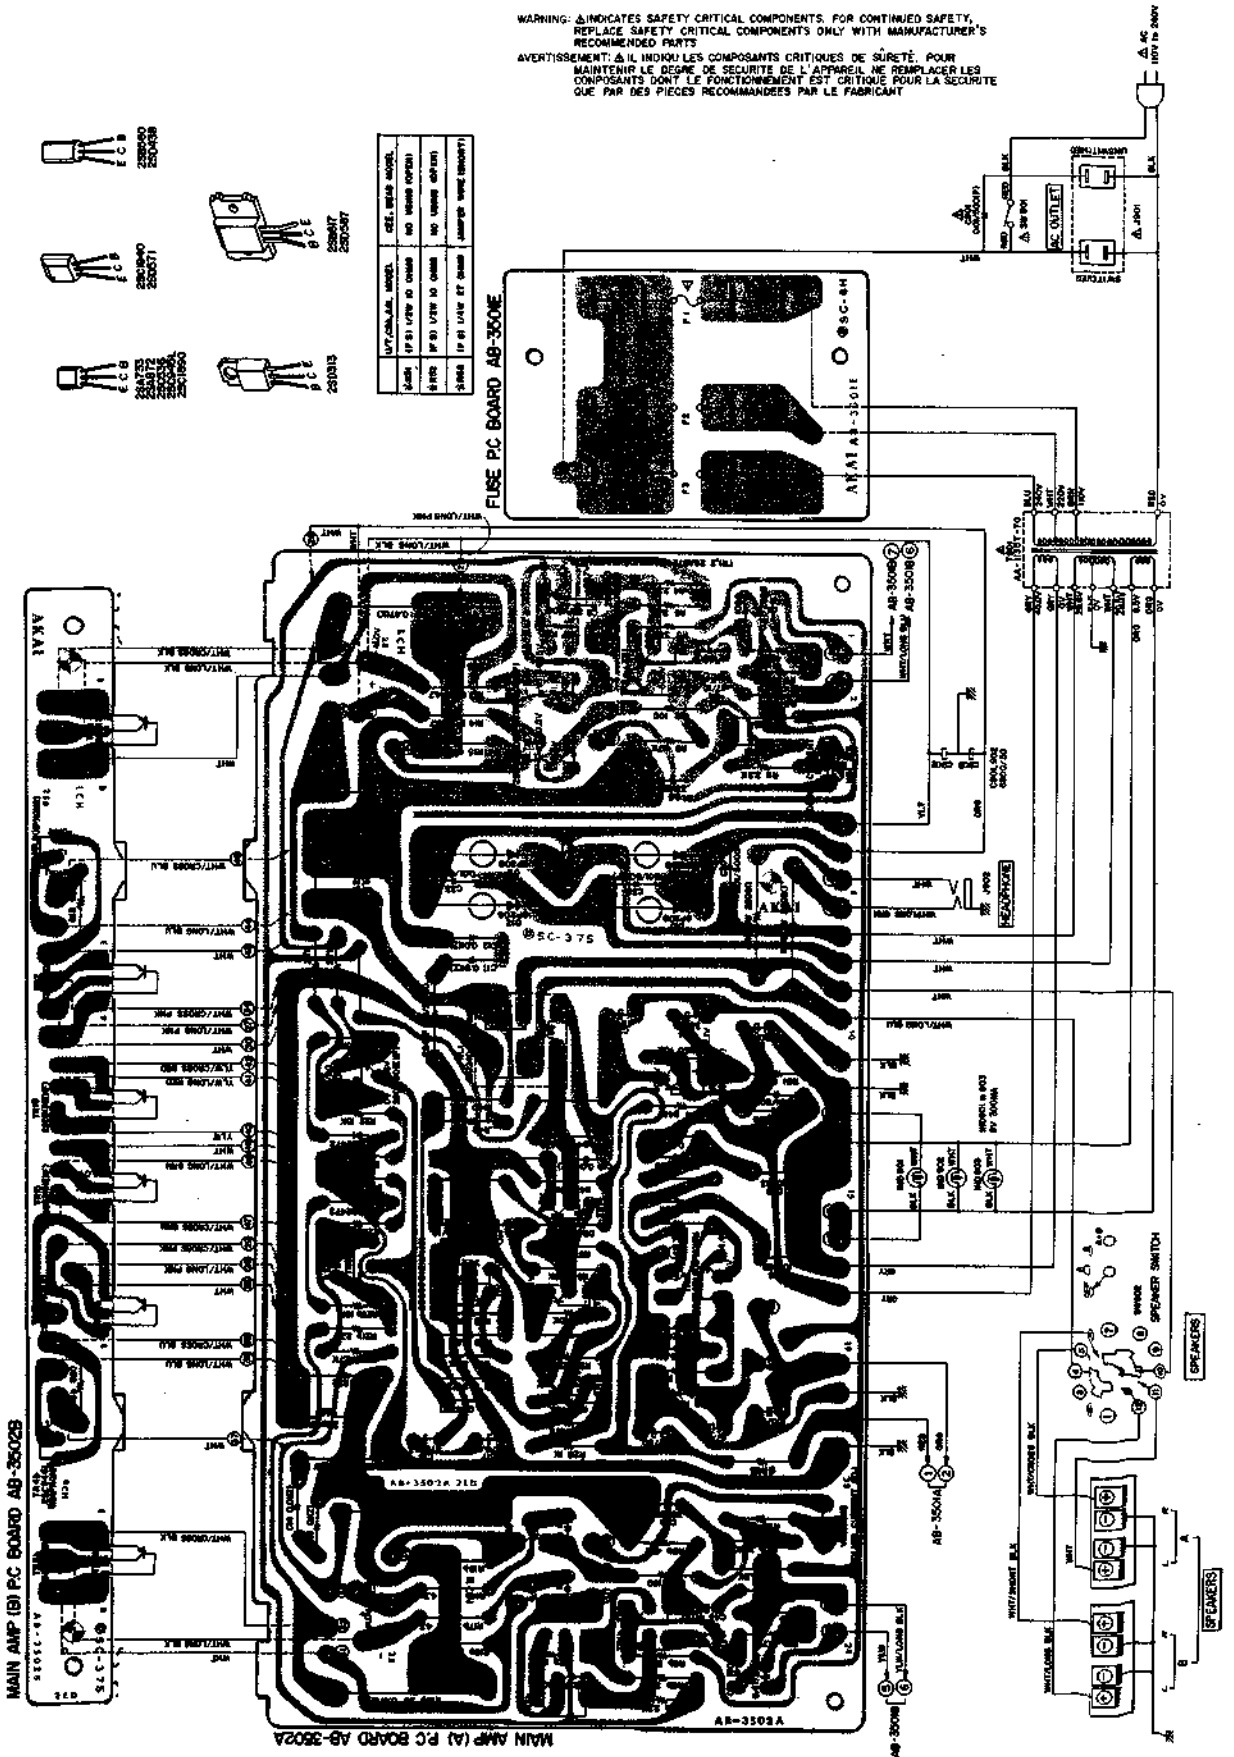


3) TONE CONTROL P.C BOARD AB-3501B

4) MUTE P.C BOARD AB-3501C

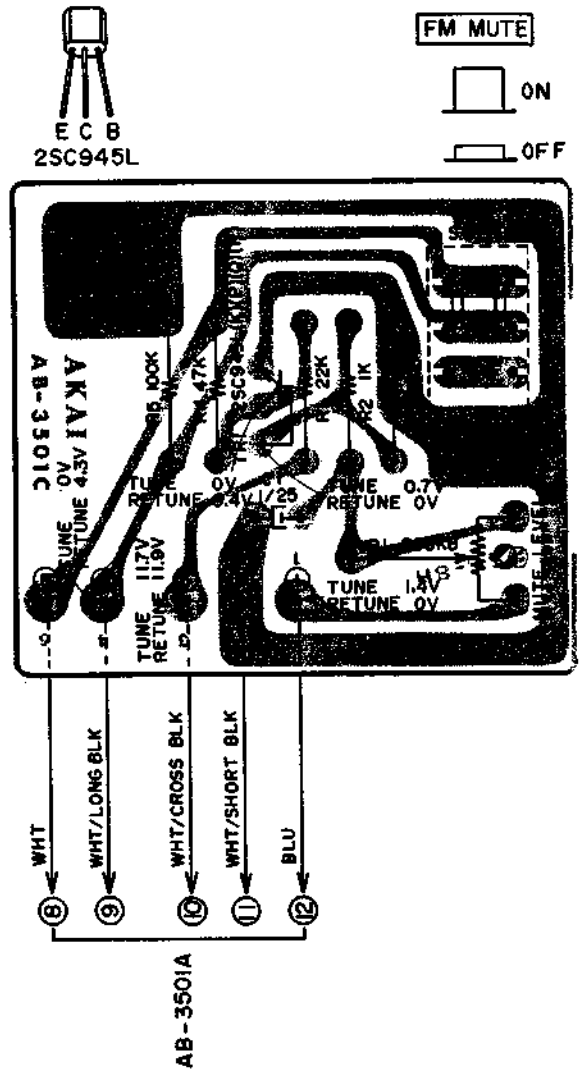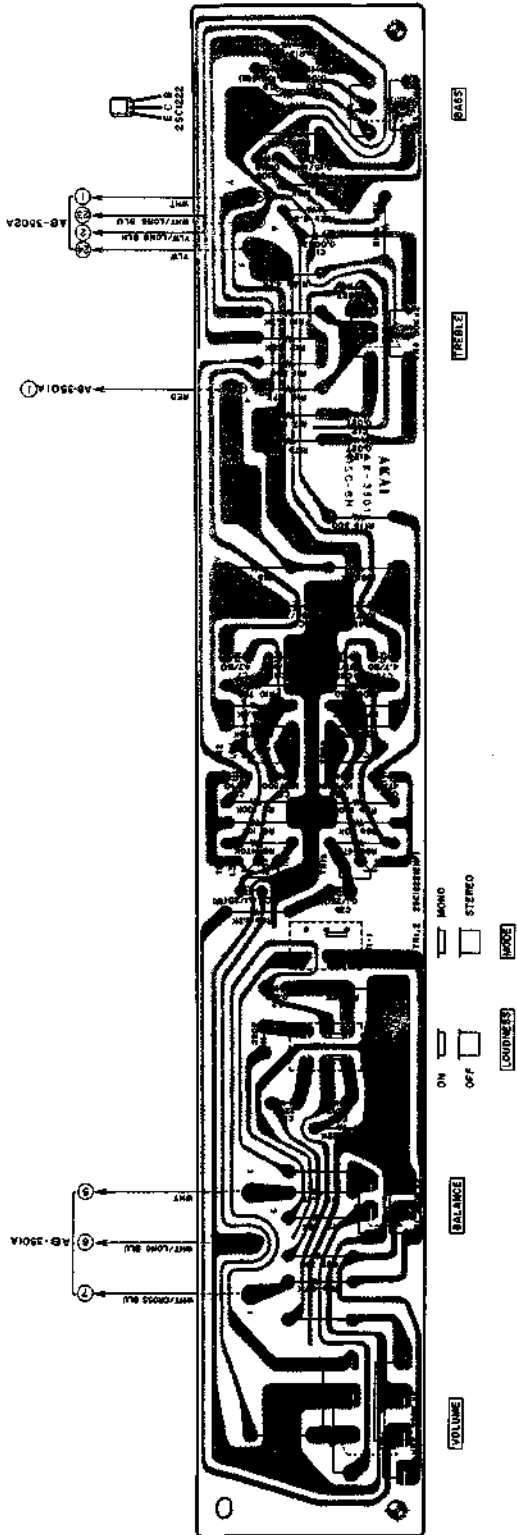


### 3. MODEL AA-1150 COMPOSITION OF VARIOUS P.C BOARDS

#### 1) MULTI FUNCTION P.C BOARD AB-5001A (3 ED)

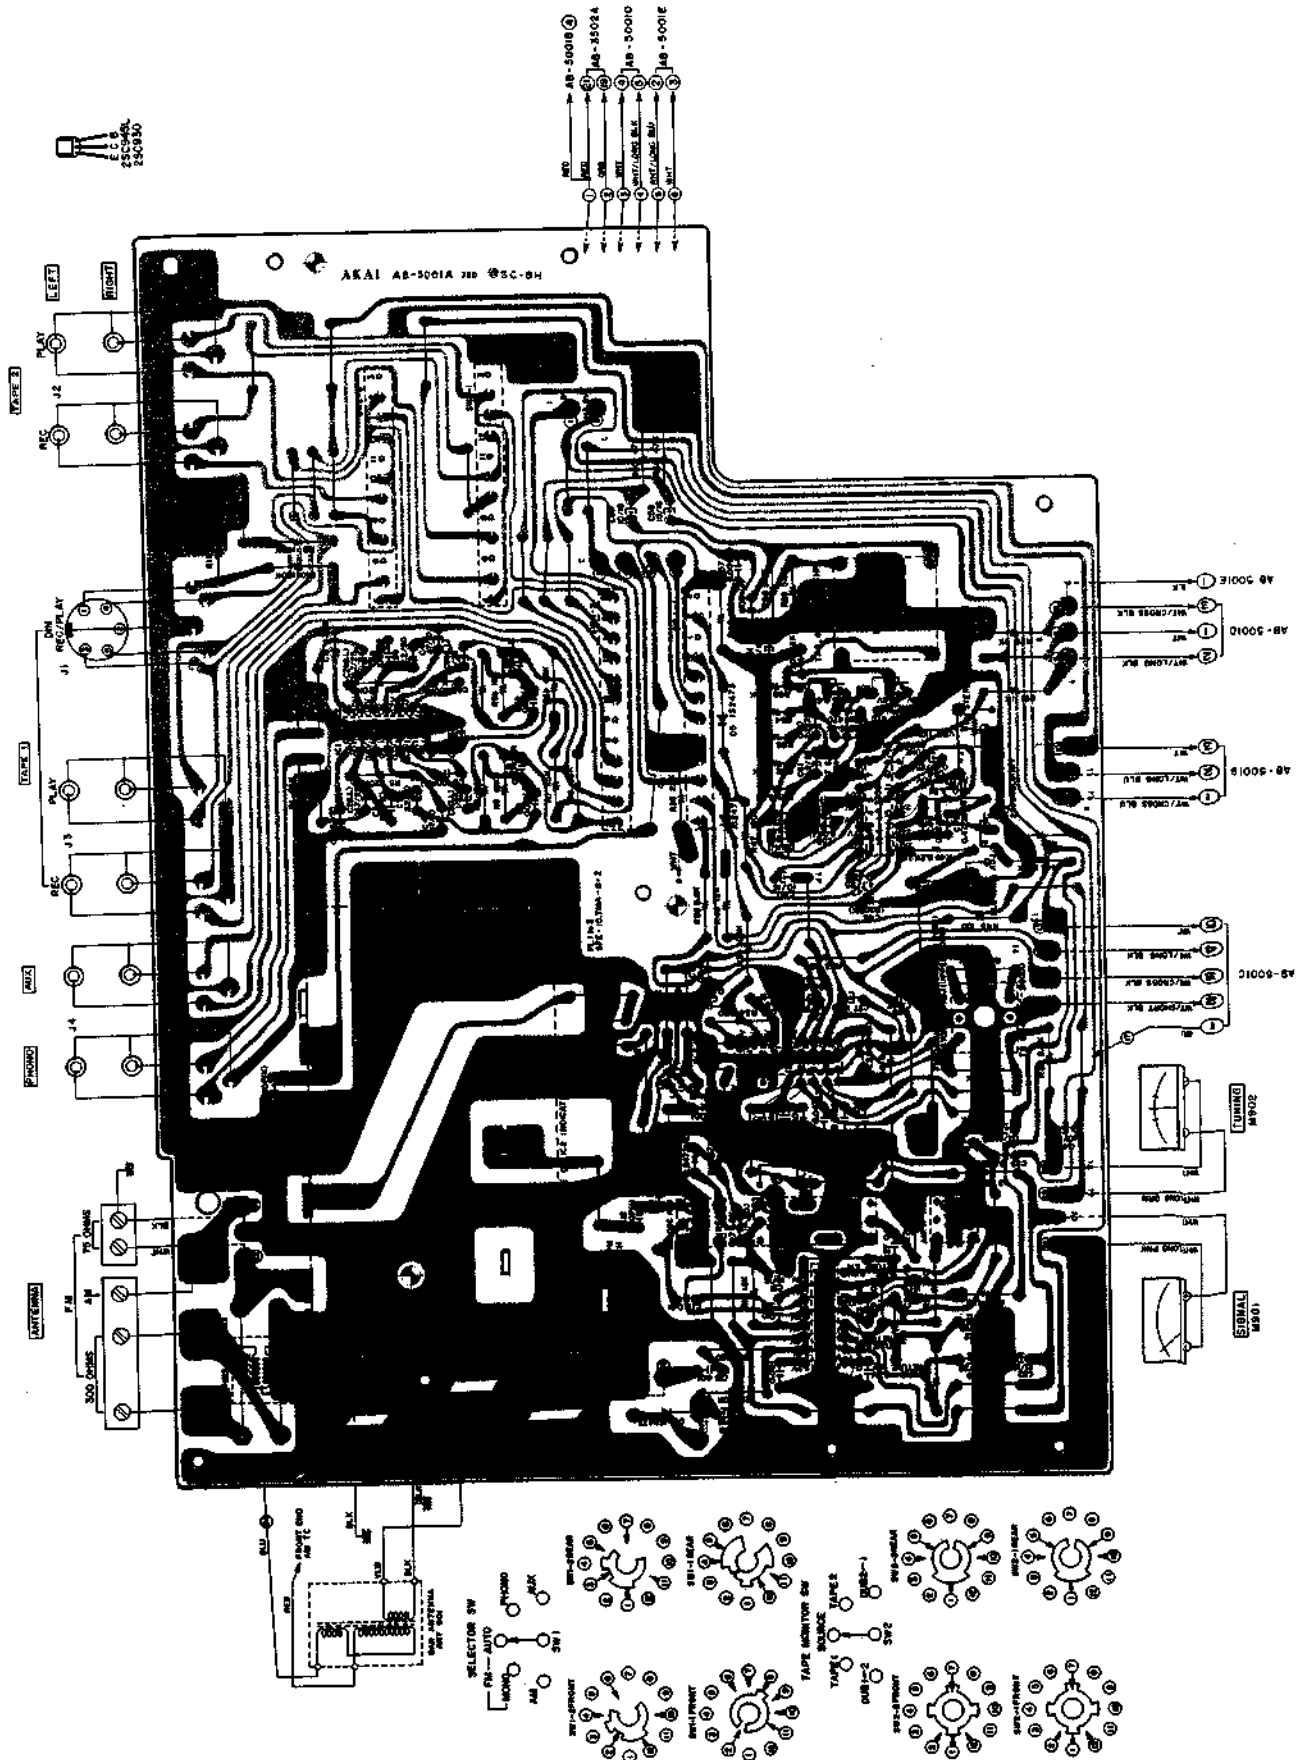


## 2) MAIN AMP (A/B) P.C BOARD AB-3502A/B (2ED) & FUSE P.C BOARD AB-5001F


WARNING: INDICATES SAFETY CRITICAL COMPONENTS. FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS.  
 AVERTISSEMENT: & IL INDIQUÉ LES COMPOSANTS CRITIQUES DE SÛRETÉ. POUR MAINTENIR LE DEGRÉ DE SÛRETÉ DE L'APPAREIL, NE REMPLACER LES COMPOSANTS DONT LE FONCTIONNEMENT EST CRITIQUE POUR LA SÛRETÉ QUE PAR DES PIÈCES RECOMMANDÉES PAR LE FABRICANT.

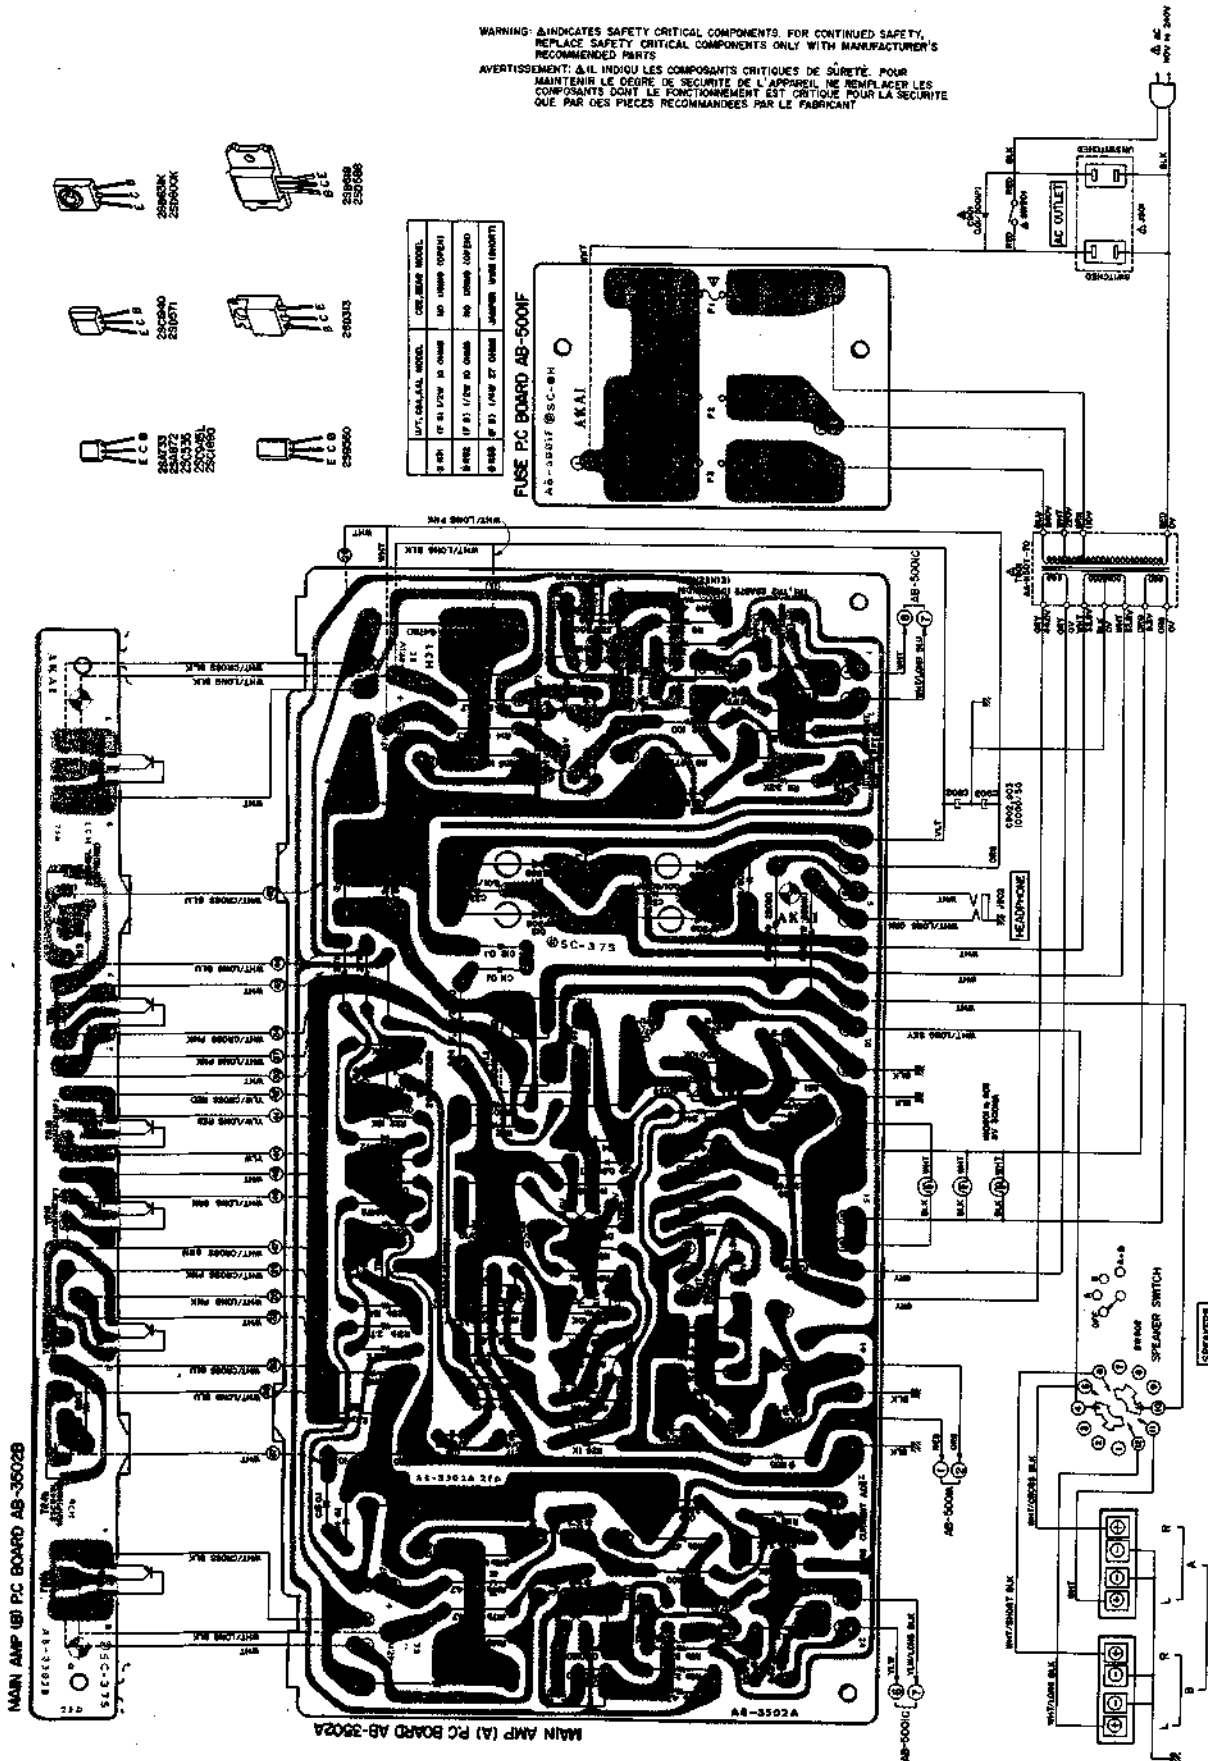


3) TONE CONTROL P.C BOARD AB-5001B

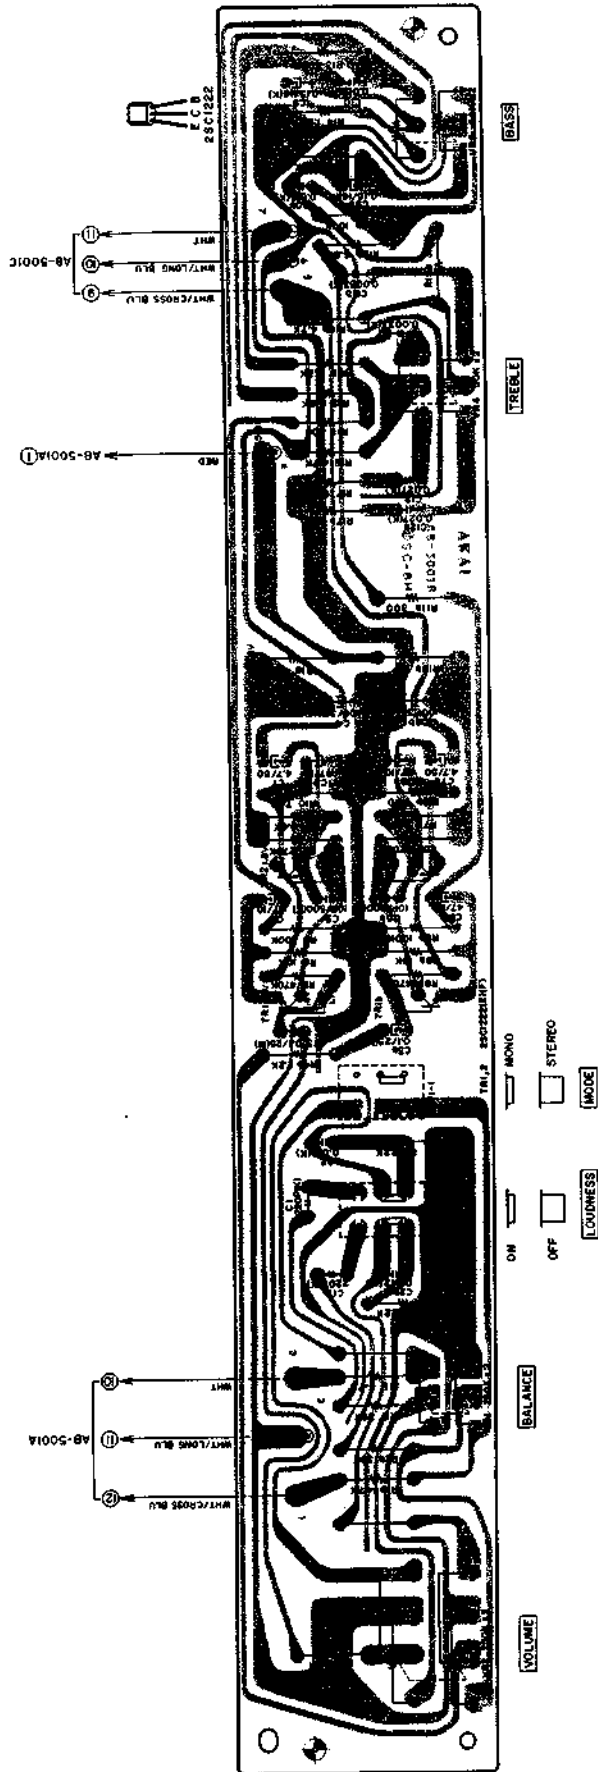

4) FILTER MUTE P.C BOARD AB-5001C

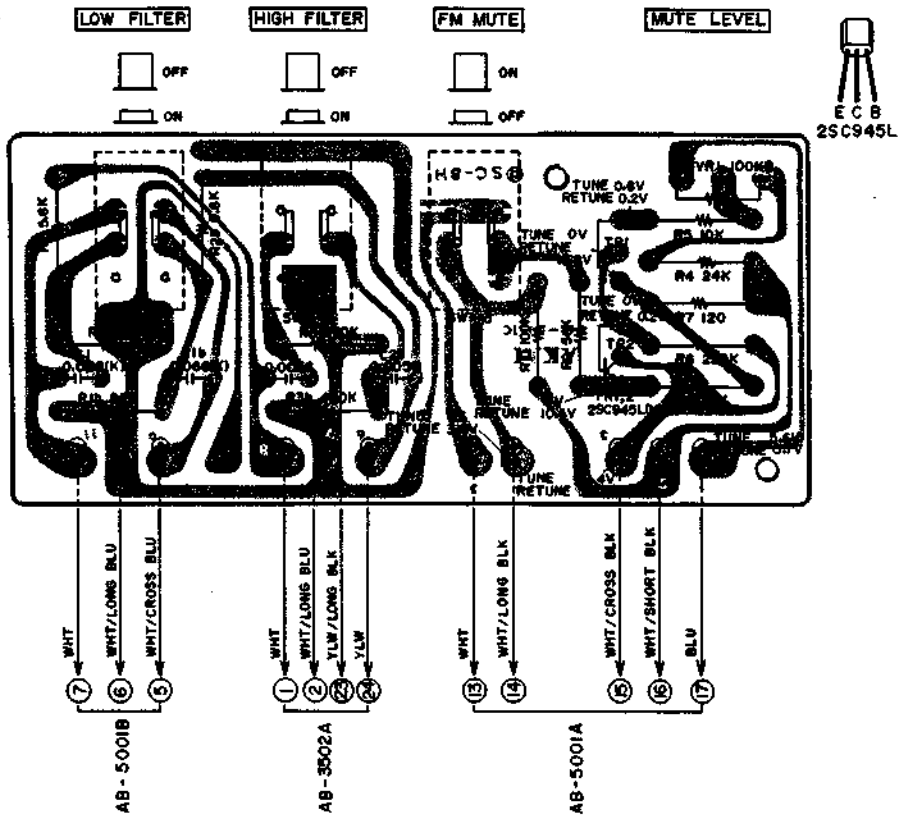

5) LED (A/B) P.C BOARD AB-5001D/E

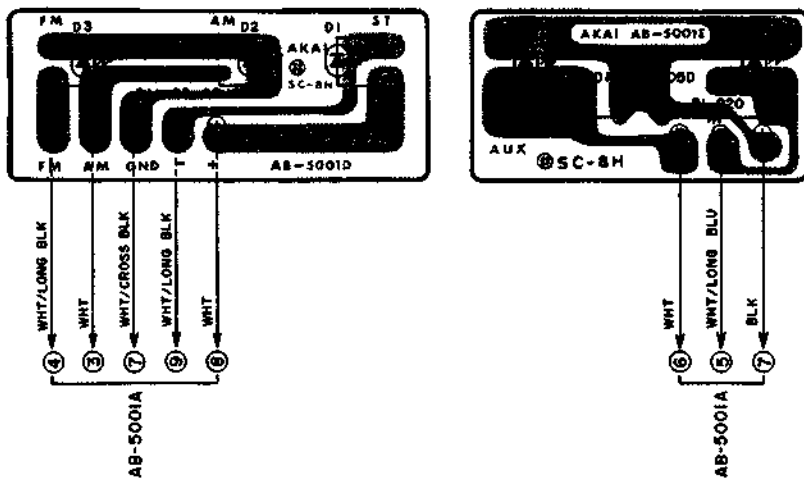







---

SECTION 2

**PARTS LIST**


TABLE OF CONTENTS

RECOMMENDED SPARE PARTS LIST . . . . .	34
[1] AA-1135/BL	
1. MULTI FUNCTION P.C BOARD (AB-3501A) BLOCK . . . . .	36
2. TONE CONTROL P.C BOARD (AB-3501B) BLOCK . . . . .	36
3. MUTE P.C BOARD (AB-3501C) BLOCK . . . . .	37
4. MAIN AMP P.C BOARD (A) (AB-3502A)/(B) (AB-3502B) BLOCK . . . . .	37
5. ASSEMBLY BLOCK . . . . .	38
6. FINAL ASSEMBLY BLOCK . . . . .	40
[2] AA-1150/BL	
7. MULTI FUNCTION P.C BOARD (AB-5001A) BLOCK . . . . .	41
8. TONE CONTROL P.C BOARD (AB-5001B) BLOCK . . . . .	41
9. FILTER MUTE P.C BOARD (AB-5001C) BLOCK . . . . .	41
10. MAIN AMP P.C BOARD (A) (AB-3502A)/(B) (AB-3502B) BLOCK . . . . .	41
11. ASSEMBLY BLOCK . . . . .	42
12. FINAL ASSEMBLY BLOCK . . . . .	44
LIST OF INTERCHANGEABLE SEMICONDUCTORS . . . . .	45
INDEX . . . . .	47

Resister and Capacitor which is not listed in this parts list, please refer to COMMON LIST FOR SERVICE PARTS.

## HOW TO USE THIS PARTS LIST

1. This parts list is compiled by various individual blocks based on assembly process.
2. When ordering parts, please describe parts number, serial number, and model number in detail.
3. How to read list.

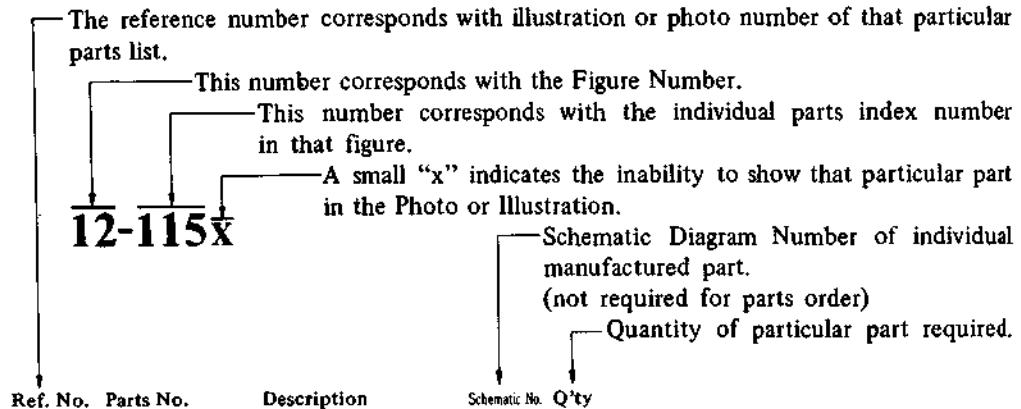

4. The symbol numbers shown on the P.C. Board list can be matched with the Composite Views of components of the Schematic Diagram or Service Manual.
5. The indications of Resistors and Capacitors in the photos of P.C. Board are being eliminated.
6. The shape of the parts and parts name, etc. can be confirmed by comparing them with the parts shown on the Electrical Parts Table of P.C. Board.
7. Both the kind of part and installation position can be determined by the Parts Number. To determine where a parts number is listed, utilize Parts Index at end of Parts List.  
It is necessary first of all to find the Parts Number. This can be accomplished by using the Reference Number listed at right of parts number in the Parts Index. (meaning of ref. no. outlined in Item 3 above).
8. Utilize separate "Price List for Parts" to determine unit price. The most simple method of finding parts Price is to utilize the reference number.

### CAUTION:

1. When placing an order for parts, be sure to list the parts no. model no., and description. There are instances in which if any of this information is omitted, parts cannot be shipped or the wrong parts will be delivered.
2. Please be careful not to make a mistake in the parts no. If the parts no. is in error, a part different from the one ordered may be delivered.
3. Because parts number and parts unit supply in the Preliminary Service Manual (Basic Parts List) may be partially changed, please use this parts list for all future reference.

**WARNING:** Δ INDICATES SAFETY CRITICAL COMPONENTS. FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS.


**AVERTISSEMENT:** Δ IL INDIQUE LES COMPOSANTS CRITIQUES DE SURETE. POUR MAINTENIR LE DEGRE DE SECURITE DE L'APPAREIL NE REMPLACER LES COMPOSANTS DONT LE FONCTIONNEMENT EST CRITIQUE POUR LA SECURITE QUE PAR DES PIECES RECOMMANDEES PAR LE FABRICANT.

## AC INLET SYSTEM

This model is equipped with an AC INLET SYSTEM. Please refer to the AC INLET SYSTEM CHART below for the specific type. By the AC INLET SYSTEM, AC (mains) cord can be connected to and disconnected from the model because the model is provided with socket exclusively for AC (mains) cord on its main body. Please note, however, that certain models are not equipped with this system and has a built-in AC (mains) cord as before.

### AC INLET SYSTEM CHART



#### CLASS I

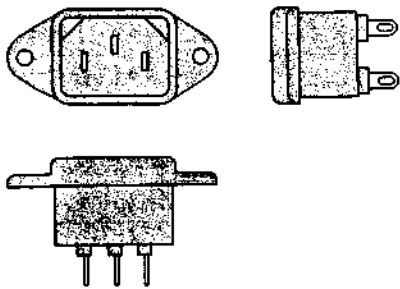


Picture 1  
AC INLET  
to be  
installed  
on machines

#### CLASS II

☐ This mark indicating double insulation will be attached to machine's rear panel

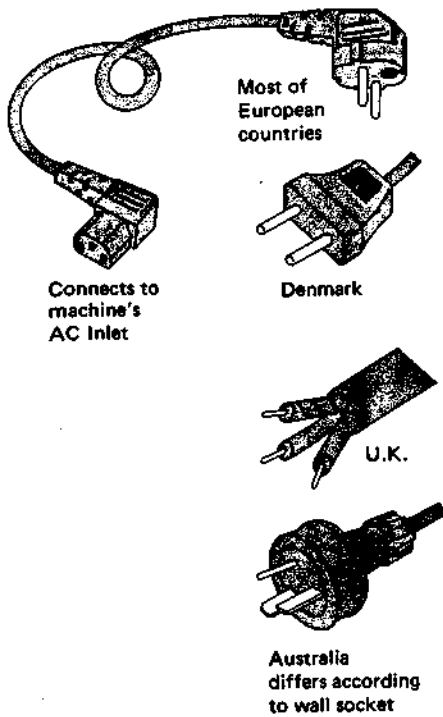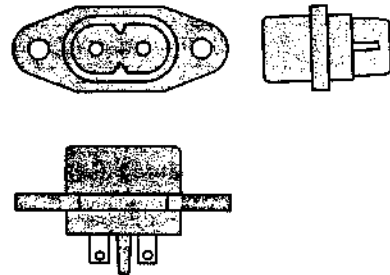

Picture 2  
AC (mains)  
cord

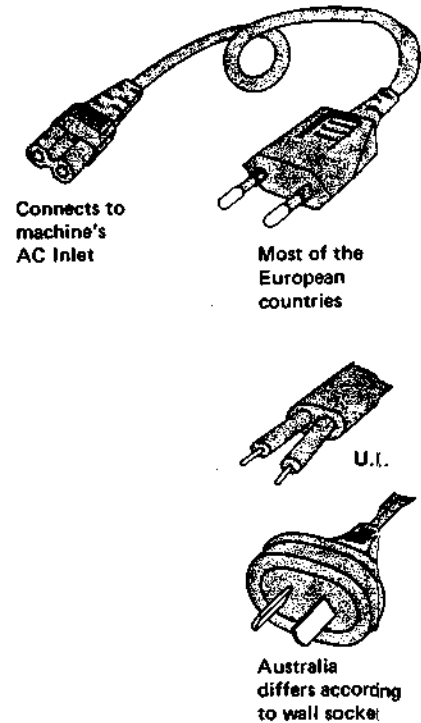

#### Parts List for AC (mains) Cord Set

	Standard	Description	Type of AC Inlet	Part No.
Class I	CEE	Cord Set CEE (3 cores)	3P	EW32993
	BEAB	Cord Set BEAB (3 cores)	3P	EW32994
	SAA	Cord Set SAA (3 cores)	3P	EW32996
	U/T	Cord Set U/T (3 cores)	3P	EW32646
Class II	CEE	Cord Set CEE (2 cores)	2P	EW68144
	BEAB	Cord Set BEAB (2 cores)	2P	EW32995
	SAA	Cord Set SAA (2 cores)	2P	EW32991
	U/T	Cord Set U/T (2 cores)	2P	EW32899

## RECOMMENDED SPARE PARTS LIST

Because, if the parts listed below are on hand, almost any repair can be accomplished, we suggest that you stock these Recommended Spare Parts Items.

Parts No.	Description	Note
BA300377	Multi Function P.C Board Comp. AB-3501A	U/T, CSA, AAL AA-1135 Only
BA303317	Multi Function P.C Board Comp. AB-3501A	CEE, BEAB AA-1135 Only
BA300375	Tone Control P.C Board Comp. AB-3501B	AA-1135 Only
BA300371	Mute P.C Board Comp. AB-3501C	AA-1135 Only
BA300387	Main Amp P.C Board (A) Comp. AB-3502A	U/T, CSA, AAL AA-1135 Only
BA304137	Main Amp P.C Board (A) Comp. AB-3502A	CEE, BEAB AA-1135 Only
BA300732	Multi Function P.C Board Comp. AB-5001A	U/T, CSA, AAL AA-1150 Only
BA303319	Multi Function P.C Board Comp. AB-5001A	CEE, BEAB AA-1150 Only
BA301548	Tone Control P.C Board Comp. AB-5001B	AA-1150 Only
BA300728	Filter Mute P.C Board Comp. AB-5001C	AA-1150 Only
BA301654	Main Amp P.C Board (A) Comp. AB-3502A	U/T, CSA, AAL AA-1150 Only
BA304138	Main Amp P.C Board (A) Comp. AB-3502A	CEE, BEAB AA-1150 Only
BA300389	Main Amp P.C Board (B) Comp. AB-3502B	
BT301177	△ Power Trans. AA-1135T-70	T901 U/T AA-1135 Only
BT301171	△ Power Trans. AA-1135T-30	T901 CSA
BT301172	△ Power Trans. AA-1135T-20	T901 AAL
BT301174	△ Power Trans. AA-1135T-40	T901 CEE
BT301175	△ Power Trans. AA-1135T-50	T901 BEAB
BT301239	△ Power Trans. AA-1150T-70	T901 U/T AA-1150 Only
BT301236	△ Power Trans. AA-1150T-30	T901 CSA
BT301234	△ Power Trans. AA-1150T-20	T901 AAL
BT301237	△ Power Trans. AA-1150T-40	T901 CEE
BT301238	△ Power Trans. AA-1150T-50	T901 BEAB
ED300924	Silicon Diode GP08D	
ED245417	Silicon Diode GP20G	AA-1135 Only
ED245428	Silicon Diode GP30G	AA-1150 Only
ED300829	Zener Diode RD13E (C)	
ED698826	LED SR-105D	
EE301419	Front End FB513U12	AA-1135 Only
EE301242	Front End FB621U19	AA-1150 Only
EI697871	IC LA3122S	
EI293185	IC LA1240	AA-1150 Only
EI299700	IC HA1197	AA-1135 Only
EI650586	IC LA1230	
EI293207	IC LA3350A	
EM204344	Signal Meter KL-243X-9	M901
EM300355	Signal Meter KL-243X-26 (BL)	M901 (BL) Model Only

Parts No.	Description	Note
EM204355	Tuning Meter KL-243X-10	M902
EM300354	Tuning Meter KL-243X-27 (BL)	M902 (BL) Model Only
EP300917	Relay MU24D2X-0 (M)	RL1
ES224436	△ Push SW. JP01	SW901 U/T
ES239218	△ Push SW. JP01 (TV-4)	SW901 CSA, AAL
ES242346	△ Push SW. JP17	SW901 CEE, BEAB
ET557965	Transistor 2SA733 (Q) (R)	
ET293218	Transistor 2SA872 (D1) (D2) (D3) (E1) (E2) (E3)	
ET219868	Transistor 2SB560 (E) (F)	
ET302713	Transistor 2SB617 (Q) (R)	AA-1135 Only
ET302716	Transistor 2SB618 (Q) (R)	AA-1150 Only
ET301165	Transistor 2SB631K (E) (F)	AA-1150 Only
ET240660	Transistor 2SB560 (E) (F) RED	AA-1135 Only
ET621235	Transistor 2SC536 (E) (F) (G)	
ET618873	Transistor 2SC930 (E) (F)	
ET635220	Transistor 2SC945L (K) (P)	
ET635218	Transistor 2SC945L (K) (P) (Q) (R)	
ET459810	Transistor 2SC1222 (E) (F)	
ET300928	Transistor 2SC1890 (E) (D)	
ET240636	Transistor 2SC1940 (K) (L) (M)	
ET452531	Transistor 2SD313 (E) (F)	
ET240671	Transistor 2SD438 (E) (F) RED	AA-1135 Only
ET666404	Transistor 2SD571 (K) (L)	
ET302714	Transistor 2SD587 (Q) (R)	AA-1135 Only
ET302715	Transistor 2SD588 (Q) (R)	AA-1150 Only
ET300931	Transistor 2SD600K (E) (F)	AA-1150 Only

# [1] AA-1135/BL

## 1. MULTI FUNCTION P.C BOARD (AB-3501A) BLOCK

Symbol No.	Parts No.	Description	Schematic Q'ty No.
1-1	BA300377	Multi Function P.C Board Comp. AA-1135	AB-3556 1
1-2	BA303317	Multi Function P.C Board Comp. AA-1135 (CEE)	AB-3556 1
1-IC1	EI697871	IC LA-3122S	45-8-185 1
1-IC2	EI299700	IC HA1197	45-8-218 1
1-IC3	EI650586	IC LA-1230	45-8-152 1
1-IC4	EI293207	IC LA-3350A	45-8-153 1
1-TR 1	ET618873	Transistor 2SC930 (E) (F)	45-1-185 1
1-TR2to4	ET635220	Transistor 2SC945L (K) (P)	45-1-85 3
1-D1to4	ED624903	Silicon Diode 1S2473	45-3-28 4
1-D5	ED560913	Silicon Diode 1S2473 VE	45-3-23 1
1-L1	E0539820	Peaking Coil 2.2 $\mu$ F(K)	23-1-187 1
1-L2	E0650610	Inductor 144LZ 18 $\mu$ H(J)	23-1-240 1
1-L3,4	E0650428	Inductor 146LY 39 $\mu$ H(J)	23-1-214 2
1-T1	E0293387	Osc Coil RWR-42282N	23-4-41 1
1-T2	BT650384	AM-IF Trans. CFU-085-D 468 kHz	23-1-214 1
1-T3	BT293398	AM-IF Trans. 10EZ RMC-42246BCH 468 kHz	23-1-276 1
1-T4	E0650608	Discri Coil MV4-FLC-20000	23-1-243 1
1-FL1to3	ER650430	Ceramic Filter SFE-10.7 MA-8-Z	53-1-102 3
1-VR 1	EV550023	Semi-fixed/Vol. V10K8-4-2 100 kB	36-10-250 1
1-VR 2	EV499364	Semi-fixed/Vol. V10K8-4-2 5 kB	36-10-250 1
1-VR 3	EV484863	Semi-fixed/Vol. V10K8-4-2 1 kB	36-10-250 1
1-SW 1	ES301188	Rotary SW. SR26(PH-2)N 2-5-5	25-6-113 1
1-SW 2	ES245733	Rotary SW. SR26N 1-2-5 20 KC	25-6-98 1
1-J1	EJ698051	DIN Jack	31-1-158 1
1-J2to4	EJ293365	4P Pin Jack	31-1-197 3
1-C9	EC493323	Elect./C. (Vert. Type) 1 $\mu$ F 25WV NL	24-20-4 2
1-C25	EC523282	Solid Aluminum/C. (Vert. Type) 0.1 $\mu$ F(M) 25WV	24-19-2 1
1-C46	EC666494	Styrol/C. (Vert. Type) 1500PF(K) 50WV	24-11-3 1
1-C47	EC522167	Solid Aluminum/C. (Vert. Type) 0.22 $\mu$ F(M) 25WV	24-19-2 1
1-C48,49	EC621257	Solid Aluminum/C. (Vert. Type) 0.47 $\mu$ F(M) 25WV	24-19-2 2

## 2. TONE CONTROL P.C BOARD (AB-3501B) BLOCK

Symbol No.	Parts No.	Description	Schematic Q'ty No.
2-1	BA300375	Tone Control P.C Board Comp. AA-1135	AB-3560 1
2-TR1,2	ET459810	Transistor 2SC1222(E)(F)	45-1-110 4
2-VR1	EV301168	Single axial 2 throw Vol. V16L4G1Z 250kx2	36-22-29 1
2-VR2	EV301200	Single axial 2 throw Vol. V24L5G3BM 250kx2	36-1-54 1
2-VR3,4	EV242267	Single axial 2 throw Vol. V16L4G3N 50kx2	36-22-19 2
2-SW1	ES301169	Push SW. J-P7164#01	25-5-294 1
2-C3	EC523282	Solid Aluminum/C. (Vert. Type) 0.1 $\mu$ F(M) 25WV	24-19-2 2




### 3. MUTE P.C BOARD (AB-3501C) BLOCK

Symbol No.	Parts No.	Description	Schematic No.	Q'ty
3-1	BA300371	Mute P.C Board Comp. AA-1135	AB-3558	1
3-TR1	ET635218	Transistor 2SC945L (K)(P)(Q)(R)	45-1-85	1
3-VR1	EV648527	Semi-fixed/Vol. V10K8-4-2 200 k $\Omega$	36-10-250	1
3-SW1	ES301180	Push SW. J-P7104#04	25-5-262	1

### 4. MAIN AMP P.C BOARD (A)(AB-3502A)/ (B)(AB-3502B) BLOCK

Symbol No.	Parts No.	Description	Schematic No.	Q'ty
4-1	BA300387	Main Amp P.C Board (A) Comp. AA-1135	AB-3557	1
4-2	BA304137	Main Amp P.C Board (A) Comp. AA-1135 (CEE)		1
4-TR1,2	ET293218	Transistor 2SA872(D1,2,3) (E1,2,3)	45-1-260	4
4-TR3	ET240636	Transistor 2SC1940(K)(L)(M)	45-1-241	2
4-TR5	ET240671	Transistor 2SD438(E)(F) RED	45-1-252	2
4-TR6	ET240660	Transistor 2SB560(E)(F) RED	45-1-251	2
4-TR9	ET300928	Transistor 2SC1890(E)(D)	45-1-279	2
4-TR10	ET557965	Transistor 2SA733(Q)(R)	45-1-124	1
4-TR11to13	ET621235	Transistor 2SC536(E)(F)(G)	45-1-55	3
4-TR14	ET666404	Transistor 2SD571(K)(L)	45-1-218	1
4-TR16	ET219868	Transistor 2SB560(E)(F)	45-1-232	1
4-TR17	ET635218	Transistor 2SC945L (K)(P)(Q)(R)	45-1-85	1
4-D1to5	ED214457	Silicon Diode 1S2472	45-3-41	4
4-D6	ED300829	Zener Diode RD-13E(C)	45-6-72	1
4-D7,8	ED300924	Silicon Diode GP08D	45-2-68	2
4-D9to12	ED245417	Silicon Diode GP20G	45-2-70	4
4-VR1	EV300921	Semi-fixed/Vol. V10K8-1-2 1 k $\Omega$	36-10-255	2
4-L1,2	EO650823	Phase Compensation Coil 2.2 $\mu$ H(F)	23-1-239	2
4-RL1	EP300917	Relay MU24D2X-0(M)	47-1-34	1
4-R14	ER293580	Carbon/R.(F) 1/4W 4.7 ohms(J)	35-11-12	2
4-R15,16	ER663614	Carbon/R.(F) 1/4W 150 ohms(I)	35-11-12	4
4-R17	ER293580	Carbon/R.(F) 1/4W 4.7 ohms(J)	35-11-12	2
4-R18	ER301762	Cement/R. (Wire Wound Type) 3W 0.47 ohms(I)	35-16-58	2
4-R19	ER300925	Cement/R. (Wire Wound Type) 3W 0.47 ohms(I)	35-16-2	2
4-R24,25	ER666224	Carbon/R.(F) 1/2W 10 ohms(J)	35-11-13	2
4-R31,32	ER666224	Carbon/R.(F) 1/2W 10 ohms(J)	35-11-13	2
4-R41	ER389687	Metal Oxide Film/R. 1W 220 ohms(I)	35-15-10	1
4-R45,46	ER389687	Metal Oxide Film/R. 1W 220 ohms(I)	35-15-10	2
4-R55	ER223525	Carbon/R.(F) 1/4W 27 ohms(J)	35-11-12	1
4-C1	EC621257	Solid Aluminum/C.(Vert. Type) 0.47 $\mu$ F(M) 25WV	24-19-2	2
4-C16	EC662128	Solid Aluminum/C.(Vert. Type) 2.2 $\mu$ F(M) 25WV	24-19-2	1
4-C27,28	EC204671	Ceramic/C. DD31-6 0.01 $\mu$ RP 500WV	24-5-66	2
4-C30to33	EC204671	Ceramic/C. DD31-6 0.01 $\mu$ RP 500WV	24-5-66	4
4-3	BA300389	Main Amp P.C Board (B) Comp. AA-1135	AB-3557	1
4-TR4	ET635218	Transistor 2SC945L (K)(P)(Q)(R)	45-1-85	2

# 5. ILLUSTRATION OF ASSEMBLY BLOCK

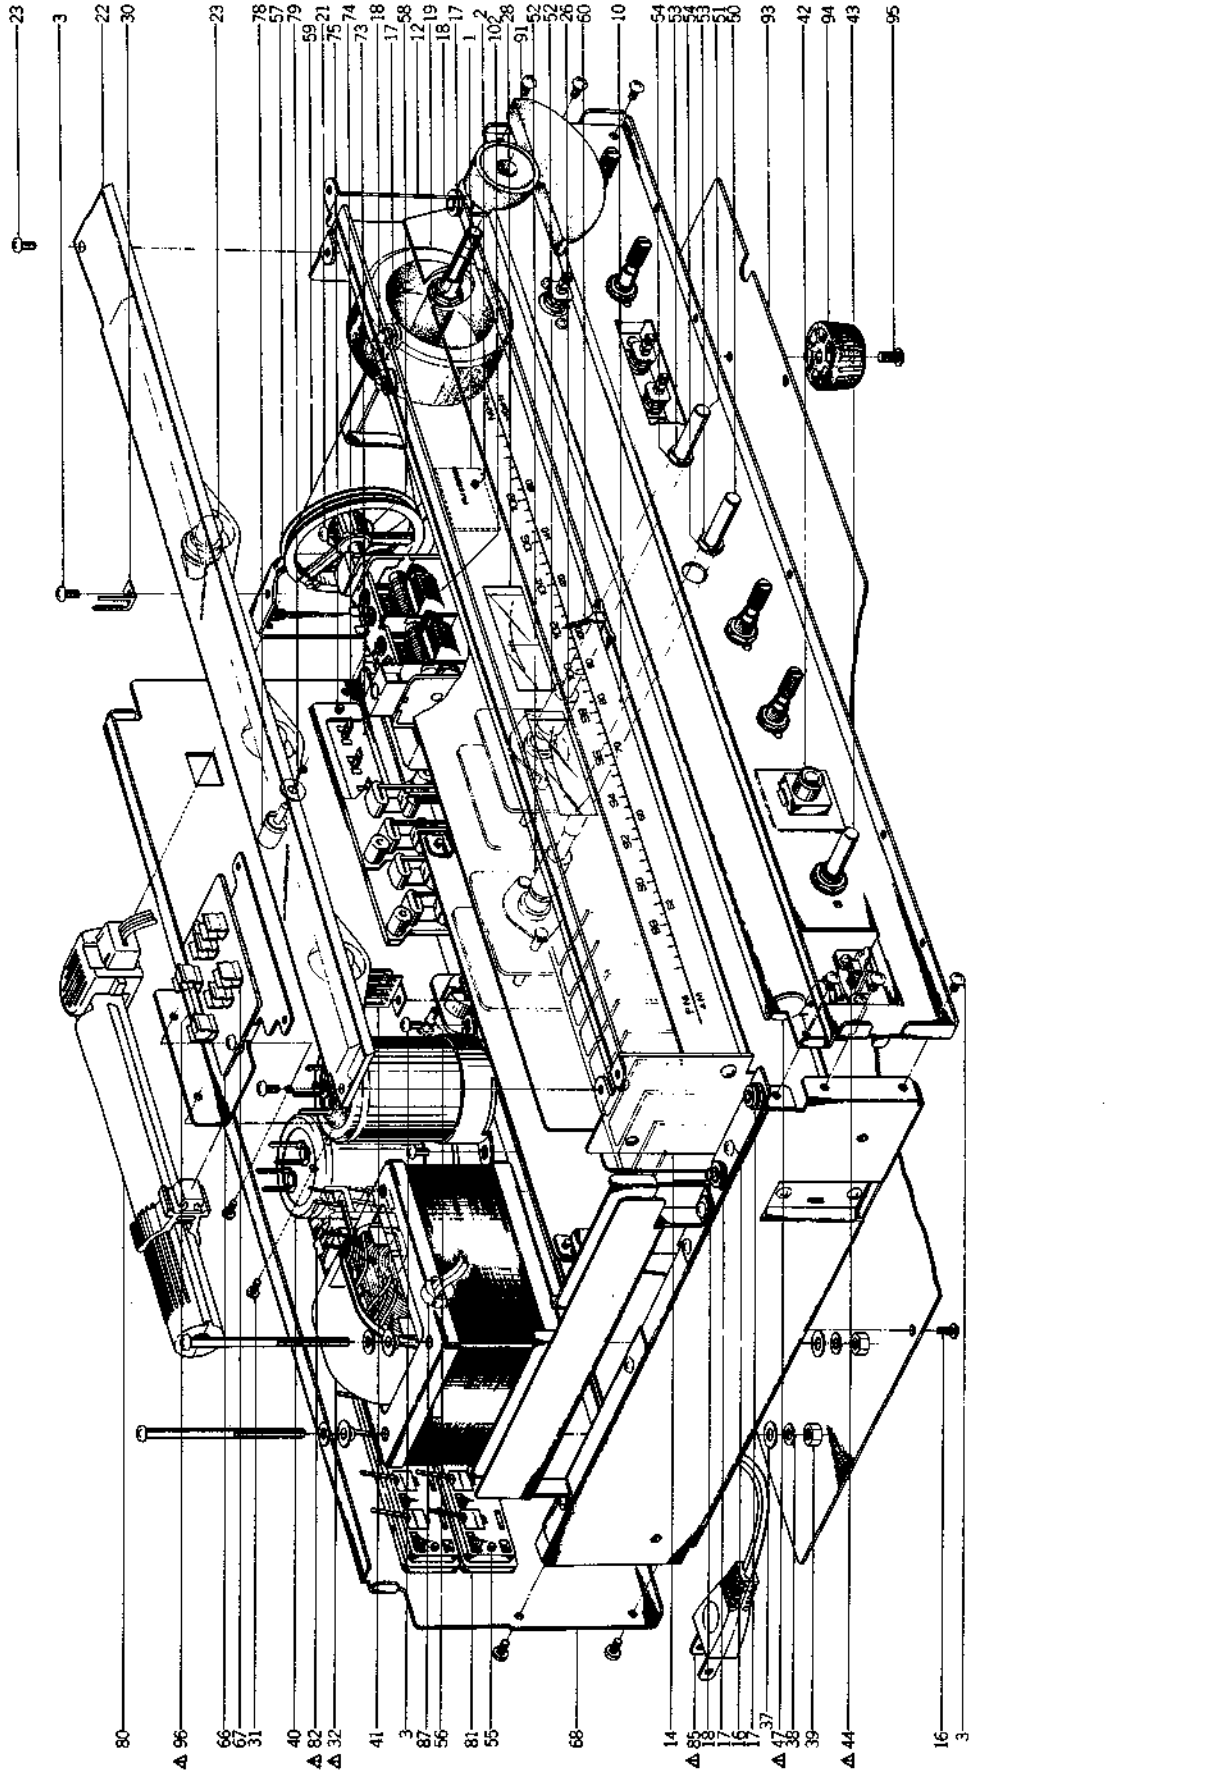


## 5) ASSEMBLY BLOCK

Ref. No.	Parts No.	Description	Schematic Q'ty No.	Ref. No.	Parts No.	Description	Schematic Q'ty No.
<b>LED P.C BOARD BLOCK</b>							
5-1	BA300378	LED P.C Board Comp.		5-57	MI301149	Dial Wheel AA-1135	2-15-17 1
		AA-1135	AB-3559 1	5-58	ZG300891	Dial Wheel Spring	AB-3533 1
5-2	ED698826	LED SR-105D	45-15-16 1	5-59	TA207347	Thread D0.5 2m	1
				5-60	TA300414	Pointer Part AA-1135	AB-3534 1
				5-61x	ZW288786	Earth Lug M3 (BSP) 0.8t (CSA, AAL)	1
<b>MAIN AMP P.C BOARD BLOCK</b>							
5-3	ZS325495	Tapping Screw #2, 3x6(BR)	47	5-62x	ZS417150	Screw, pan head 4x6 (CEE, BEAB)	1
5-4x	ET302714	Transistor 2SD587(Q)(R)	45-1-274 2	5-63x	ZW273892	Toothed Lock Washer (CEE, BEAB)	1
5-5x	ET302713	Transistor 2SB617(Q)(R)	45-1-273 2	5-64x	ZW273881	Earth Lug (CEE, BEAB)	1
5-6x	ET452531	Transistor 2SD313(E)(F)	45-1-105 1	5-65x	ZW416698	Nut M4 (CEE, BEAB)	1
5-7x	ET452531	Transistor 2SD313(E)(F)	45-1-105 1	<b>FUSE P.C BOARD BLOCK</b>			
5-8x	ZW632226	Insulator Washer, Bush M	45-16-27 2	5-66	BA300381	Fuse P.C Board Comp. AA-1135 (only U/T)	AB-3561 1
5-9x	ZS421806	Screw, pan head 3x8	10	5-67	EJ514822	Fuse Holder, P.C Board S-N5051	40-1-28 6
<b>SCALE PLATE BLOCK</b>							
5-10	TA301023	Scale Plate (A)	AB-3525/ 3526 1	<b>REAR PANEL BLOCK</b>			
5-11x	TA303289	Scale Plate (C)(BL)	AB-3525/ 3526 1	5-68	SP300952	Rear Panel (1)	AB-3520 1
5-12	TA300904	Scale Holder (A)	AB-3512 1	5-69x	SP300953	Rear Panel (2) (CSA)	AB-3520 1
5-13x	TA301650	Scale Holder (A-BL)	AB-3512 1	5-70x	SP300954	Rear Panel (3) (AAL)	AB-3521 1
5-14	TA300905	Scale Holder (B)	AB-3513 1	5-71x	SP300948	Rear Panel (4) (CEE)	AB-3522 1
5-15x	TA301649	Scale Holder (B-BL)	AB-3513 1	5-72x	SP300949	Rear Panel (5) (BEAB)	AB-3522 1
5-16	ZS447840	Tapping Screw #2, 3x8(BR)	8	5-73	EJ293646	3P Antenna Terminal Plate	32-1-78 1
5-17	MR530662	Roller B	91-5009 6	5-74	ML300879	Earth Parts	AB-3517 1
5-18	ZS530673	Roller Screw A	91-5010 6	5-75	ZS355522	Screw, pan head 3x6	4
5-19	TA301772	Tuning Wheel Part-G	13-2-34 1	5-76x	ZW288786	Earth Lug M3 (BSP) 0.8t	1
5-20x	ZW259514	Washer (Nylon) D3.1x8x1t	7	5-77x	ZW562476	Earth Lug M3	1
5-21	ZS379350	Screw, pan head 3x6	13	5-78	SK652397	Knob 0512-2	34-1-4 1
5-22	SM300915	Illumination Plate	AB-3524 1	5-79	ZW652408	Washer (SPC) D3.2x10x0.5t	1
5-23	EL301185	Lamp 8V 300MA(400MMx2)	28-2-60 1	5-80	EE299621	Bar Antenna	55-1-49 1
5-24	EL301191	Lamp 8V 300MA(500MMx2)	28-2-60 1	5-81	EJ240581	4P Push Terminal	32-1-72 2
5-25	EL301204	Lamp 8V 300MA(600MMx2)	28-2-60 1	5-82	EZ225145	△ 2 throw AC Outlet	31-1-166 1
5-26	EM204344	Signal Meter KL-243X-9	46-1-127 1	5-83x	EJ296853	△ 3P Inlet CM-3 (CEE, BEAB)	31-1-199 1
5-27x	EM300355	Signal Meter KL-243X-26 (BL)	46-1-165 1	5-84x	ZS463353	Tapping Screw #2, 3x8 (BR) (CEE, BEAB)	2
5-28	EM204355	Tuning Meter KL-243X-10	46-1-128 1	5-85	EW374894	△ AC Cord CUL 3M	26-3-19 1
5-29x	EM300354	Tuning Meter KL-243X-27 (BL)	46-1-163 1	5-86x	EW207742	△ AC Cord CUL (CSA, AAL)	26-3-45 1
<b>ASSEMBLY BLOCK</b>							
5-30	EJ539447	Earth Terminal 2P, T4460	32-1-32 1	5-87	EZ631945	Strain Relief SR-4N-4	2-7-49 1
5-31	ZS447761	Tapping Screw #2, 3x6(BR) (Black)	8	5-88x	EJ301197	Fuse Holder AA-35L (CSA, AAL)	40-1-150 1
5-32	BT301177	△ Power Trans. AA-1135T-70	38-4-519 1	5-89x	EJ303141	Fuse Holder AA-35S1 (CEE)	40-1-151 1
5-33x	BT301171	△ Power Trans. AA-1135T-30 (CSA)	38-4-539 1	5-90x	EJ303140	Fuse Holder AA-35S2 (BEAB)	40-1-160 1
5-34x	BT301172	△ Power Trans. AA-1135T-20 (AAL)	38-4-553 1	5-91	SE300910	Nut Cover	AB-3518 1
5-35x	BT301174	△ Power Trans. AA-1135T-40 (CEE)	38-4-517 1	5-92x	SE301680	Nut Cover (BL)	AB-3518 1
5-36x	BT301175	△ Power Trans. AA-1135T-50 (BEAB)	38-4-518 1	5-93	SP300914	Bottom Plate	AB-3523 1
5-37	ZW575774	Washer (SPC) D4.5x9.8x0.7t	4	5-94	SZ645243	Circular Foot A CA	CA-6014 4
5-38	ZW273914	Spring Washer	4	5-95	ZS565942	Tapping Screw #2, 4x8 (pan)	4
5-39	ZW273960	Nut M4	4	5-96	EF575212	△ Fuse 4A 250V	39-1-50 1
5-40	EC301170	Elect./C. 6800μF 50WV	24-10-118 2	5-97x	EF277402	△ Fuse ST-2 1A (CSA, AAL)	39-1-63 1
5-41	EJ551035	Wrapping Terminal, 4P T-5251	32-1-36 1	5-98x	EF378595	△ Fuse ST-2 4A (CSA, AAL)	39-1-63 1
5-42	EJ301199	Headphone Jack 3P64M	31-2-83 1	5-99x	EF623103	△ Fuse (SEMKO T Type) 1AT (CEE, BEAB)	39-1-53 2
5-43	ES301166	Rotary SW. SR321N1-2-4	25-7-48 1	5-100x	EF668474	△ Fuse (SEMKO T Type) 400MAT (CEE, BEAB)	39-1-53 1
5-44	ES224436	△ Push SW. JP01	25-5-221 1	5-101x	EF690996	△ Fuse (SEMKO T Type) 4AT (CEE, BEAB)	39-1-53 2
5-45x	ES239218	△ Push SW. JP01 (TV-4) (CSA)	25-5-222 1	5-102	EE301419	Front End FB513U12	57-2-44 1
5-46x	ES242346	△ Push SW. JP17 (CEE)	25-5-224 1				
5-47	EC684720	△ Ceramic/C. CLD16YE 0.01μF(P) 500WV	24-5-61 1				
5-48x	EC286198	△ Ceramic/C. AL-10 0.01μF(Z) 125WV (CSA)	24-5-69 1				
5-49x	EC301320	△ MP/C. PME271Y447 4700PF 250WV(CEE)	24-9-118 2				
5-50	MS300898	Relay Shaft (B)	AB-3538 1				
5-51	MS300899	Relay Shaft (C)	AB-3538 1				
5-52	TA646773	Joint	AA-5240 2				
5-53	ZW270123	'E' Ring 4M	6-1-9 4				
5-54	ZW322110	Washer (Nylon) D6.1x10.3x1.0t	2				
5-55	ZS522865	Tapping Screw #2, 3x12(BR)	10				
5-56	ZW698308	Nylon Rivet (FNPR) 3x5.5 (Black) 2-7-54 1	1				

When ordering parts, please describe Parts Number, Description, and Model Number in detail.

## 6. PHOTO OF FINAL ASSEMBLY BLOCK

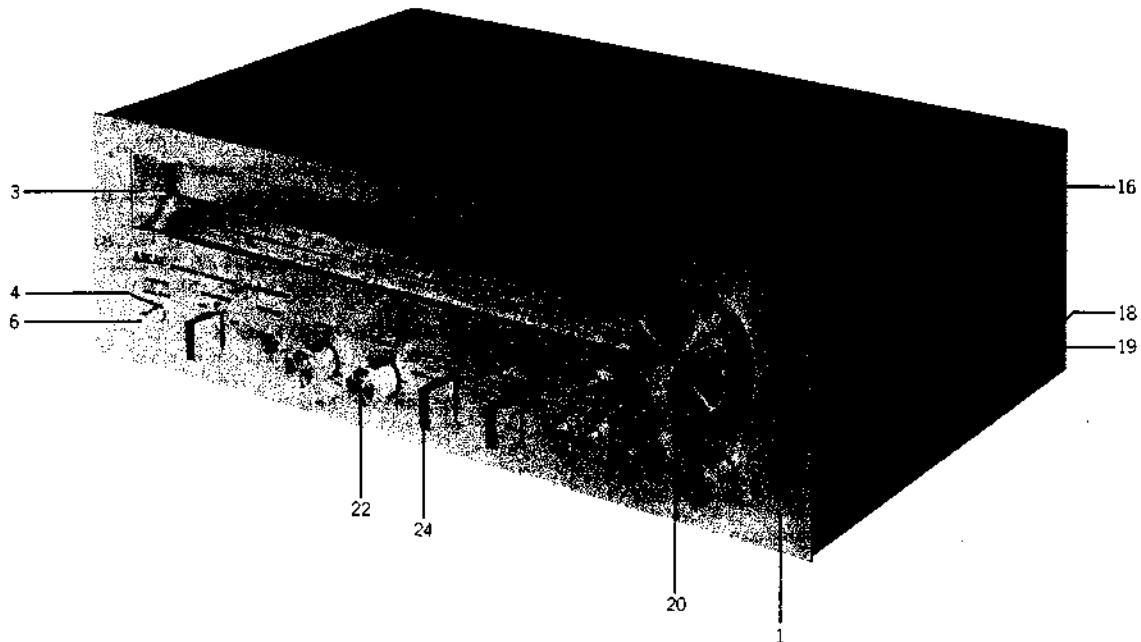

## 6) FINAL ASSEMBLY BLOCK

Ref. No.	Parts No.	Description	Schematic Q'ty No.
<b>FRONT PANEL BLOCK</b>			
6-1	BD300383	Front Panel Block Comp. AA-1135	1
6-2x	BD303296	Front Panel Block Comp. AA-1135-BL	1
6-3	SP300938	Front Plate	AB-3536 1
6-4	SE286560	Button Escutcheon (B)	AC-3538 2
6-5x	ZG286435	Taper Spring	AC-3536 4
6-6	SK301969	Push Button Knob (B)	AC-3537 4
6-7x	SK301807	Push Button Knob (D) (BL)	AC-3562 4
<b>FINAL ASSEMBLY BLOCK</b>			
6-8x	ZS447840	Tapping Screw #2, 3x8 (BR)	2
6-9x	ZS379350	Screw, pan head 3x6	2
6-10x	ZW330412	Adjust, Washer (U) D4x13x0.13t	2
6-11x	ZW330423	Adjust, Washer (U) D4x13x0.25t	2
6-12x	ZW603797	Adjust. Washer (U) D4x13x0.5t	2
6-13x	ZW413190	Adjust. Washer (U) D4x13x0.8t	2
6-14x	ZW330456	Adjust. Washer (U) D4x13x1t	2
6-15x	ZW439547	Adjust. Washer (U) D4x13x1.5t	2
6-16	BC300940	Cabinet	AB-3529 1
6-17x	BC301651	Cabinet BL	AB-3529 1
6-18	ZW548010	Spot Facing Washer	MU-6028 4
6-19	ZS510344	Screw, binding head 4x12	4
6-20	SK300889	Tuning Knob	AB-3530 1
6-21x	SK301682	Tuning Knob (BL)	AB-3530 1
6-22	SK646817	Single Knob	AA-5250 4
6-23x	SK281564	Single Knob (BL)	AA-5250 4
6-24	SK646830	Selector Knob	AA-5253 3
6-25x	SK281586	Selector Knob (BL)	AA-5253 3

## [2] AA-1150/BL

### 7. MULTI FUNCTION P.C BOARD (AB-5001A) BLOCK

Symbol No.	Parts No.	Description	Schematic Q'ty No.
7-1	BA300732	Multi Function P.C Board Comp. AA-1150	AB-5007 1
7-2	BA303319	Multi Function P.C Board Comp. AA-1150 (CEE)	AB-5007 1
7-IC1	EI697871	IC LA-3122S	45-8-185 1
7-IC2	EI293185	IC LA-1240	45-8-220 1
7-IC3	EI650586	IC LA-1230	45-8-152 1
7-IC4	EI293207	IC LA-3350A	45-8-153 1
7-TR1	ET618873	Transistor 2SC930(E)(F)	45-1-185 1
7-TR2to4	ET635220	Transistor 2SC945L(K)(P)	45-1-85 3
7-D1	ED560913	Silicon Diode 1S2473 VE	45-3-23 1
7-D2to6	ED624903	Silicon Diode 1S2473	45-3-28 5
7-T1	BT444137	Balun Trans. 75 ohms— 300 ohms	23-1-129 1
7-T2	EO293387	Osc Coil RWR-42282N	23-4-41 1
7-T3	BT650384	AM-IF Trans. CFU-085-D 468 kHz	23-1-241 1
7-T4	BT293398	AM-IF Trans. 10EZ RMC- 42246BCH 468 kHz	23-1-276 1
7-T5	EO650608	Discr Coil MV4-FLC-20000	23-1-243 1
7-L1	EO539820	Peaking Coil 2.2μH(K)	23-1-187 1
7-L2	EO650610	Inductor 144LZ 18μH(J)	23-1-240 1
7-FL1to3	ER650430	Ceramic Filter SFE-10.7 MA-8-Z	53-1-102 3
7-FL4	ER656908	Block Filter FB3201	53-1-103 1
7-VR1	EV550023	Semi-fixed/Vol. V10K8-4-2 100 kΩ	36-10-250 1
7-VR2	EV499364	Semi-fixed/Vol. V10K8-4-2 5 kΩ	36-10-250 1
7-VR3	EV484863	Semi-fixed/Vol. V10K8-4-2 1 kΩ	36-10-250 1
7-SW1	ES301188	Rotary SW. SR26(PH-2)N 2-5-5	25-6-113 1
7-SW2	ES245733	Rotary SW. SR26N 1-2-5 20 kΩ	25-6-98 1
7-J1	EJ698051	Din Jack	31-1-158 1
7-J2to4	EJ293365	4P Pin Jack	31-1-197 3
7-C12	EC650406	Styrol/C. (Vert. Type) 310PF(J) 50WV	24-11-3 1
7-C25	EC523282	Solid Aluminum/C. (Vert. Type) 0.1μF(M) 25WV	24-19-2 1
7-C41	EC523282	Solid Aluminum/C. (Vert. Type) 0.1μF(M) 25WV	24-19-2 1
7-C46	EC666494	Styrol/C. (Vert. Type) 1500PF(K) 50WV	24-11-3 1
7-C48	EC522167	Solid Aluminum/C. (Vert. Type) 0.22μF(M) 25WV	24-19-2 1
7-C49,50	EC621257	Solid Aluminum/C. (Vert. Type) 0.47μF(M) 25WV	24-19-2 2

### 8. TONE CONTROL P.C BOARD (AB-5001B) BLOCK

Symbol No.	Parts No.	Description	Schematic Q'ty No.
8-1	BA301548	Tone Control P.C Board Comp. AA-1150	AB-5012 1
8-TR1,2	ET459810	Transistor 2SC1222(E)(F)	45-1-110 4
8-VR1	EV301168	Single axial 2 throw Vol. V16L4G1Z 250kx2	36-22-29 1
8-VR2	EV301200	Single axial 2 throw Vol. V24L5G3BM 250kx2	36-1-54 1
8-VR3,4	EV301294	Double axial 2 throw Vol. V16L4DG 15C 50kx2	36-18-6 2
8-SW1	ES301169	Push SW. J-P7164#01	25-5-264 1
8-C3	EC523282	Solid Aluminum/C. (Vert. Type) 0.1μF(M) 25WV	24-19-2 2
8-C9	EC301214	Aluminum/C. (Vert. Type) 0.15μF(K) 16WV	24-19-2 2

### 9. FILTER MUTE P.C BOARD (AB-5001C) BLOCK


Symbol No.	Parts No.	Description	Schematic Q'ty No.
9-1	BA300728	Filter Mute P.C Board Comp. AA-1150	AB-5009 1
9-TR1,2	ET635220	Transistor 2SC945L(K)(P)	45-1-85 2
9-SW1	ES301299	Push SW.	25-5-263 1
9-VR1	EV301233	Vol. V16L4 100 kΩ	36-6-27 1

### 10. MAIN AMP P.C BOARD (A)(AB-3502A)/ (B)(AB-3502B) BLOCK

Symbol No.	Parts No.	Description	Schematic Q'ty No.
10-1	BA301654	Main Amp P.C Board (A) Comp. AA-1150	AB-3557 1
10-2	BA304138	Main Amp P.C Board (A) Comp. AA-1150 (CEE)	AB-3557 1
10-TR1,2	ET293218	Transistor 2SA872(D1,2,3) (E1,2,3)	45-1-260 4
10-TR3	ET240636	Transistor 2SC1940(K)(L)(M)	45-1-241 2
10-TR5	ET300931	Transistor 2SD600K(E)(F)	45-1-276 2
10-TR6	ET301165	Transistor 2SB631K(E)(F)	45-1-277 2
10-TR9	ET300928	Transistor 2SC1890(E)(D)	45-1-279 2
10-TR10	ET557965	Transistor 2SA733(Q)(R)	45-1-124 1
10-TR11to13	ET621235	Transistor 2SC536(E)(F)(G)	45-1-55 3
10-TR14	ET666404	Transistor 2SD571(K)(L)	45-1-218 1
10-TR16	ET219868	Transistor 2SB560(E)(F)	45-1-232 1
10-TR17	ET635218	Transistor 2SC945L(K)(P) (Q)(R)	45-1-85 1
10-TR19	ET557965	Transistor 2SA733(Q)(R)	45-1-124 2
10-D1to5	ED214457	Silicon Diode 1S2472	45-3-41 7
10-D6	ED300829	Zener Diode RD-13E(C)	45-6-72 1
10-D7,8	ED300924	Silicon Diode GP08D	45-2-68 2
10-D9to12	ED245428	Silicon Diode GP30G	45-2-69 4
10-VR1	EV300921	Semi-fixed/Vol. V10K8-1-2 1 kΩ	36-10-255 2
10-L1,2	EO650823	Phase Compensation Coil 2.2μH(K)	23-1-239 2
10-RL1	EP300917	Relay MU24D2X-O(M)	47-1-34 1
10-R14	ER293580	Carbon/R. (F) 1/4W 4.7 ohms(J)	35-11-12 2
10-R15,16	ER663614	Carbon/R. (F) 1/4W 150 ohms(J)	35-11-12 4
10-R17	ER293580	Carbon/R. (F) 1/4W 4.7 ohms(J)	35-11-12 2
10-R18,19	ER653567	Cement/R. (Wire-wound Typ) SW 0.47 ohms(K)	35-16-3 4
10-R24,25	ER666224	Carbon/R. (F) 1/2W 10 ohms(J)	35-11-13 2
10-R31,32	ER666224	Carbon/R. (F) 1/2W 10 ohms(J)	35-11-13 2
10-R41	ER389687	Metal Oxide Film/R. 1W 220 ohms(K)	35-15-10 1
10-R45,46	ER409814	Metal Oxide Film/R. 2W 220 ohms(K)	35-15-8 2
10-C1	EC621257	Solid Aluminum/C. (Vert. Type) 0.47μF(M) 25WV	24-19-2 2
10-C16	EC662128	Solid Aluminum/C. (Vert. Type) 2.2μF(M) 25WV	24-19-2 1
10-C27,28	EC204671	Ceramic/C. DD31-6 0.01μF(I) 500WV	24-5-66 2
10-C30to33	EC204671	Ceramic/C. DD31-6 0.01μF(I) 500WV	24-5-66 4
10-3	BA300389	Main Amp P.C Board (B) Comp. AA-1133	AB-3557 1
10-R13	ER245395	Carbon/R. (F) 1/4W 820 ohms(J)	35-11-12 2
10-TR4	ET635218	Transistor 2SC945L(K)(P) (Q)(R)	45-1-85 2

When ordering parts, please describe Parts Number, Description, and Model Number in detail.

# 11. ILLUSTRATION OF ASSEMBLY BLOCK

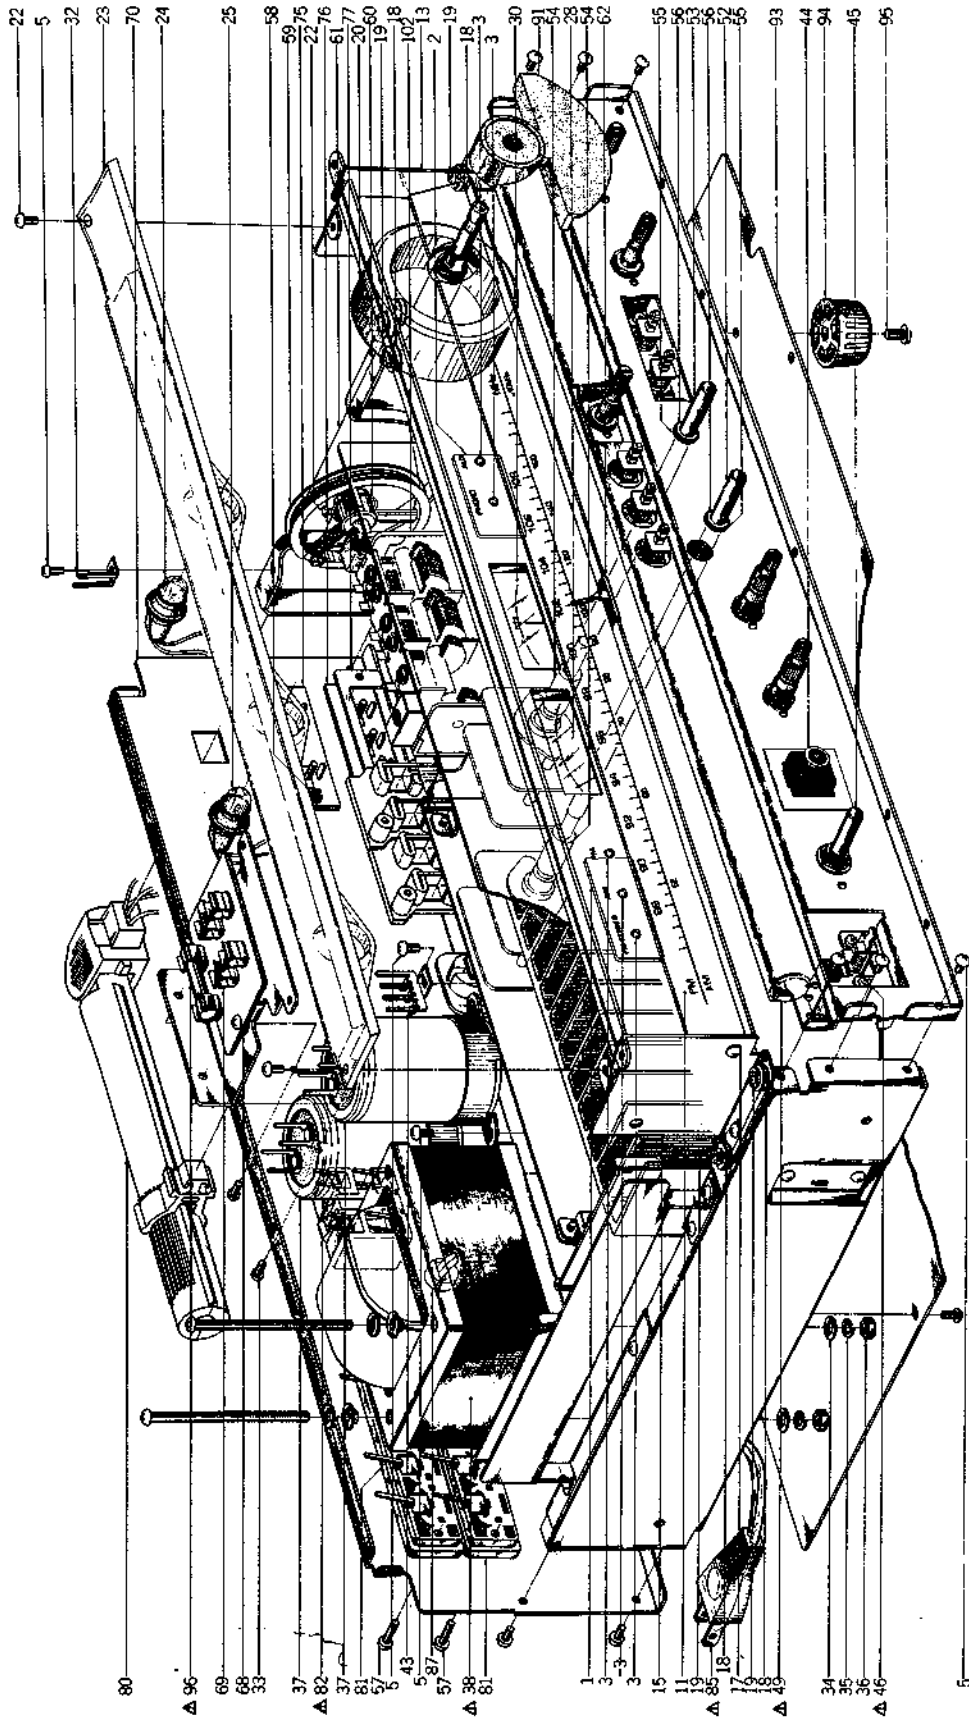


# 11) ASSEMBLY BLOCK

Ref. No.	Parts No.	Description	Schematic Q'ty No.	Ref. No.	Parts No.	Description	Schematic Q'ty No.
<b>LED P.C BOARD BLOCK</b>				11-56	ZW270123	'E' Ring 4M	6-1-9 4
11-1	BA300729	LED P.C Board Comp. AA-1150(A)	AB-5010 1	11-57	ZS522865	Tapping Screw #2, 3x12(BR)	10
11-2	BA300730	LED P.C Board Comp. AA-1150(B)	AB-5011 1	11-58	ZW698308	Nylon Rivet (FNPR) 3x5.5 (Black)	2-7-54 3
11-3	ED698826	LED SR-105D	45-15-16 5	11-59	MI301149	Dial Wheel AA-1135	2-15-17 1
11-4x	ZW632226	Insulator Washer, Bush M	45-16-27 5	11-60	ZG300891	Dial Wheel Spring	AB-3533 1
<b>MAIN AMP BLOCK</b>				11-61	TA207347	Thread D0.5 2m	1
11-5	ZS325495	Tapping Screw #2, 3x6(BR)	55	11-62	TA300414	Pointer Part AA-1135	AB-3534 1
11-6x	ET302715	Transistor 2SD588(Q)(R)	45-1-276 2	11-63x	ZW288786	Earth Lug M3, (BSF) 0.8t (CSA, AAL)	1
11-7x	ET302716	Transistor 2SB618(Q)(R)	45-1-275 2	11-64x	ZS417150	Screw, pan head 4x6 (CEE, BEAB)	1
11-8x	ET452531	Transistor 2SD313(E)(F)	45-1-105 2	11-65x	ZW273892	Toothed Lock Washer (CEE, BEAB)	1
11-9x	ZW632226	Insulator Washer, Bush M	45-16-27 2	11-66x	ZW273881	Earth Lug (CEE, BEAB)	1
11-10x	ZS421806	Screw, pan head 3x8	10	11-67x	ZW416698	Nut M4 (CEE, BEAB)	1
<b>SCALE PLATE BLOCK</b>				<b>FUSE P.C BOARD BLOCK</b>			
11-11	TA301024	Scale Plate (B)	AB-3526/ 3526 1	11-68	BA301554	Fuse P.C Board Comp. AA-1150 (U/T)	AB-5013 1
11-12x	TA303290	Scale Plate (D) (BL)	AB-3526/ 3526 1	11-69	EJ514822	Fuse Holder, P.C Board S-N5051	40-1-28 6
11-13	TA300904	Scale Holder (A)	AB-3512 1	<b>REAR PANEL BLOCK</b>			
11-14x	TA301650	Scale Holder (A-BL)	AB-3512 1	11-70	SP300955	Rear Panel (6)	AB-5002 1
11-15	TA300905	Scale Holder (B)	AB-3513 1	11-71x	SP300956	Rear Panel (7) (CSA)	AB-5002 1
11-16x	TA301649	Scale Holder (B-BL)	AB-3513 1	11-72x	SP300957	Rear Panel (8) (AAL)	AB-5003 1
11-17	ZS447840	Tapping Screw #2, 3x8 (BR)	6	11-73x	SP300950	Rear Panel (9) (CEE)	AB-5003 1
11-18	MR530662	Roller B	91-5009 6	11-74x	SP300951	Rear Panel (10) (BEAB)	AB-5004 1
11-19	ZS530673	Roller Screw A	91-5010 6	11-75	EJ293646	3P Antenna Terminal Plate	32-1-78 1
11-20	TA301772	Tuning Wheel Part-G	13-2-34 1	11-76	EJ302685	2P Antenna Terminal Plate	32-1-82 1
11-21x	ZW259514	Washer (Nylon) D3.1x8x1t	2	11-77	ML300879	Earth Parts	AB-3517 1
11-22	ZS379350	Screw, panhead 3x6	14	11-78x	ZS355522	Screw, pan head 3x6	4
11-23	SM300915	Illumination Plate	AB-3524 1	11-79x	ZW562476	Earth Lug M3	1
11-24	EL301185	Lamp 8V 300MA(400MMx2)	28-2-60 1	11-80	EE299621	Bar Antenna	55-1-49 1
11-25	EL301191	Lamp 8V 300MA(500MMx2)	28-2-60 1	11-81	EJ240581	4P Push Terminal	32-1-72 2
11-26x	EL301204	Lamp 8V 300MA(600MMx2)	28-2-60 1	11-82	EZ225145	△ 2 throw AC Outlet (U/T, CSA, AAL)	31-1-166 1
11-27x	ZW259514	Washer (Nylon) D3.1x8x1t	4	11-83x	EJ296853	△ 3P Inlet CM-3 (CEE, BEAB)	31-1-199 1
11-28	EM204344	Signal Meter KL-243X-9	46-1-127 1	11-84x	ZS463353	Tapping Screw #2, 3x8 (BR) (CEE, BEAB)	2
11-29x	EM300355	Signal Meter KL-243X-26 (BL)	46-1-165 1	11-85	EW374894	△ AC Cord CUL 3M	26-3-19 1
11-30	EM204355	Tuning Meter KL-243X-10	46-1-128 1	11-86	EW207742	△ AC Cord CUL (CSA, AAL)	26-3-45 1
11-31x	EM300354	Tuning Meter KL-243X-27 (BL)	46-1-163 1	11-87	EZ631945	Strain Relief SR-4N-4	2-7-49 1
<b>ASSEMBLY BLOCK</b>				11-88x	EJ301150	Fuse Holder AA-50L (CSA, AAL)	40-1-152 1
11-32	EJ539447	Earth Terminal 2P, T4460	32-1-32 1	11-89x	EJ303142	Fuse Holder AA-50S1 (CEE)	40-1-153 1
11-33	ZS447761	Tapping Screw #2, 3x6 (BR) (Black)	14	11-90x	EJ303143	Fuse Holder AA-50S2 (BEAB)	40-1-159 1
11-34	ZW575774	Washer (SPC) D4.5x9.8x0.7t	4	11-91	SE300910	Nut Cover	AB-3518 1
11-35	ZW273914	Spring Washer	4	11-92x	SE301680	Nut Cover (BL)	AB-3518 1
11-36	ZW273960	Nut M4	4	11-93	SP300914	Bottom Plate	AB-3523 1
11-37	EC301298	Elect./C. 10,000µF 50WV	24-10-119 2	11-94	SZ645243	Circular Foot A CA	CA-6014 4
11-38	BT301239	△ Power Trans. AA-1150T-70	38-4-524 1	11-95	ZS65942	Tapping Screw #2, 4x8 (Pan)	4
11-39x	BT301236	△ Power Trans. AA-1150T-30 (CSA)	38-4-521 1	11-96	EF575223	△ Fuse 5A 250V	39-1-50 1
11-40x	BT301234	△ Power Trans. AA-1150T-20 (AAL)	38-4-520 1	11-97x	EF277402	△ Fuse ST-2 1A (CSA, AAL)	39-1-63 2
11-41x	BT301237	△ Power Trans. AA-1150T-40 (CEE)	38-4-522 1	11-98x	EF459843	△ Fuse ST-2 5A (CSA, AAL)	39-1-63 1
11-42x	BT301238	△ Power Trans. AA-1150T-50 (BEAB)	38-4-523 1	11-99x	EF623103	△ Fuse (SEMKO T Type) 1AT	39-1-53 2
11-43	EJ551035	Wrapping Terminal, 4P T-5251	32-1-36 1	11-100x	EF668474	△ Fuse (SEMKO T Type) 400MAT (CEE, BEAB)	39-1-53 1
11-44	EJ301199	Headphone Jack 3P64M	31-2-43 1	11-101x	EF249851	△ Fuse (SEMKO T Type) 5AT (CEE, BEAB)	39-1-53 2
11-45	ES301166	Rotary SW. SR321N1-2-4	25-7-48 1	11-102	EE301242	Front End FB621U19	57-2-45 1
11-46	ES224436	△ Push SW. JP01	25-5-221 1				
11-47x	ES239218	△ Push SW. JP01 (TV-4)(CSA)	25-5-222 1				
11-48x	ES242346	△ Push SW. JP17 (CEE)	25-5-224 1				
11-49	EC684720	△ Ceramic/C. CLD16YE 0.01µF(P) 500WV	24-5-61 1				
11-50x	EC286198	△ Ceramic/C. AL-10 0.01µF(Z) 125WV (CSA)	24-5-69 1				
11-51x	EC301320	△ MP/C. PME271Y447 4700PF 250WV (CEE)	24-9-118 2				
11-52	MS300898	Relay Shaft (B)	AB-3538 1				
11-53	MS300899	Relay Shaft (C)	AB-3538 1				
11-54	TA646773	Joint	AA-5240 2				
11-55	ZW322110	Washer (Nylon) D6.1x10.3x1.0t	2				

When ordering parts, please describe Parts Number, Description, and Model Number in detail.

## 12. PHOTO OF FINAL ASSEMBLY BLOCK

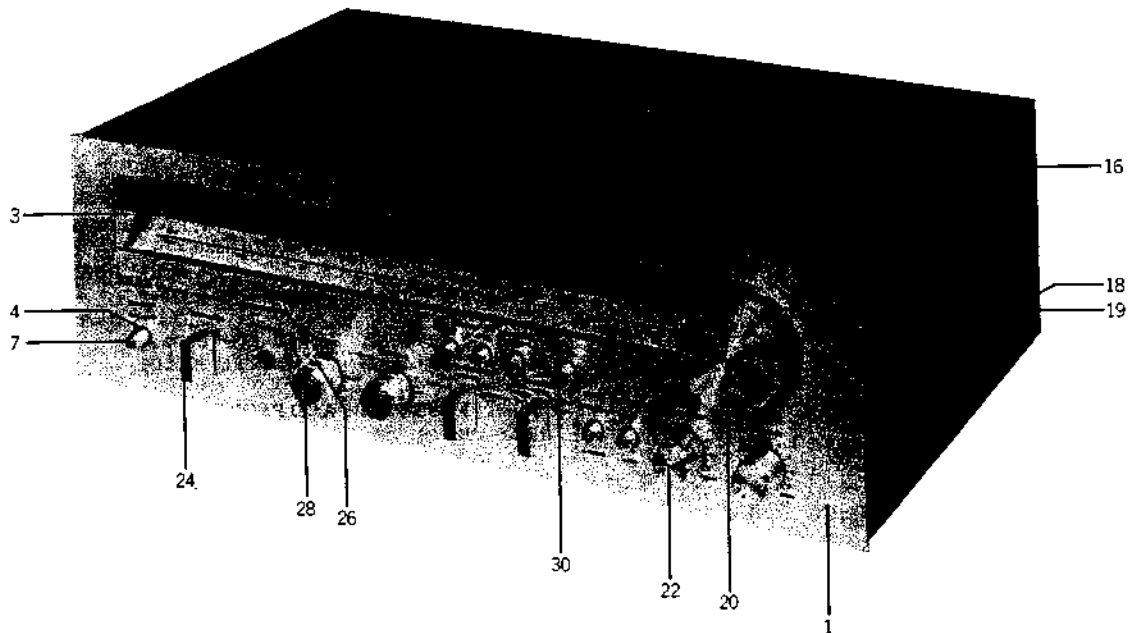

## 12) FINAL ASSEMBLY BLOCK

Ref. No.	Parts No.	Description	Schematic Q'ty No.	Symbol No.	Parts No.	Description	Schematic Q'ty No.
<b>FRONT PANEL BLOCK</b>							
12-1	BD301551	Front Panel Block Comp.					
		AA-1150	AB-3545	1			
12-2x	BD303315	Front Panel Block Comp.					
		AA-1150-BL	AB-3545	1			
12-3	SP300938	Front Plate	AB-3536	1			
12-4	SE286560	Button Escutcheon (B)	AC-3538	3			
12-5x	SK301807	Push Button Knob (D) (BL)	AC-3562	6			
12-6x	ZG286435	Taper Spring	AC-3536	6			
12-7	SK301969	Push Button Knob (B)	AC-3537	6			
<b>FINAL ASSEMBLY BLOCK</b>							
12-8x	ZS447840	Tapping Screw #2, 3x8 (BR)		4			
12-9x	ZS379350	Screw, pan head 3x6		2			
12-10x	ZW330412	Adjust. Washer (U)					
		D4x13x0.13t		2			
12-11x	ZW330423	Adjust. Washer (U)					
		D4x13x0.25t		2			
12-12x	ZW603797	Adjust. Washer (U)					
		D4x13x0.5t		2			
12-13x	ZW413190	Adjust. Washer (U)					
		D4x13x0.8t		2			
12-14x	ZW330456	Adjust. Washer (U)					
		D4x13x1t		2			
12-15x	ZW439547	Adjust. Washer (U)					
		D4x13x1.5t		2			
12-16	BC300940	Cabinet	AB-3529	1			
12-17x	BC301651	Cabinet (BL)	AB-3529	1			
12-18	ZW548010	Spot Facing Washer	MU-6028	4			
12-19	ZS510344	Screw, binding head 4x12		4			
12-20	SK300889	Tuning Knob	AB-3530	1			
12-21x	SK301682	Tuning Knob (BL)	AB-3530	1			
12-22	SK646817	Single Knob	AA-5250	4			
12-23x	SK281564	Single Knob (BL)	AA-5250	4			
12-24	SK646830	Selector Knob	AA-5253	3			
12-25x	SK281586	Selector Knob (BL)	AA-5253	3			
12-26	SK300901	Double Knob (Lower)	AB-3537	2			
12-27x	SK301681	Double Knob Lower (BL)	AB-3537	2			

When ordering parts, please describe Parts Number, Description, and Model Number in detail.



## LIST OF INTERCHANGEABLE SEMICONDUCTORS

As far as service is concerned, in case the original parts cannot be obtained, the interchangeable parts listed below can be substituted.

Original Parts			Interchangeable Parts	
Description	Parts No.	Utilizing P.C Board	Description	Parts No.
2SA733(P)(Q)(R)	ET539122	AB-3501A	2SA564(Q)(R)	ET538154
2SA733(Q)(R)	ET557965	AB-5001A AB-3502A	2SA628(D)(E)(F)(G)	ET539144
2SA872(E1)(E2) (F1)(F2)	ET300929	AB-3502A	2SA640-1(E)(F)(G)(H)	ET204221
2SB560(E)(F)	ET240660	AB-3502A	2SA815(O)(Y)	ET649078
2SB617(Q)(R)	ET302713	AB-3502B		
2SB618(Q)(R)	ET302716	AB-3502B		
2SB631K(E)(F)	ET301165	AB-3502A (only AA-1150)	2SA814(O)(Y)	ET623057
2SC536(E)(F)(G)	ET621235	AB-3502A	2SC711(E)(F)(G)(H) 2SC945L(K)(P)	ET619727 ET635220
2SC930(E)(F)	ET618873	AB-3501A AB-5001A	2SC454(B)(C) 2SC372(Y)	ET591316 ET234808
2SC945L(K)(P)(Q)(R)	ET635218	AB-3502B	2SC536(F)(G)(H)	ET631215
2SC945L(Q)(R)	ET635220	AB-3501A/C AB-5001A/C	2SC711(F)(G)(H) 2SC1647(R)(S)	ET621268 ET651181
2SC1222(E)(F)	ET459810	AB-3501B AB-5001B	2SC1000(BL)(GR) 2SC1313(G)(H)	ET621181 ET604124
2SC1890(E)(D)	ET300928	AB-3502A	2SC1628(O)(Y)	ET623035
2SC1940(K)(L)(M)	ET240636	AB-3502A		
2SD313(E)(F)	ET452531	AB-3502A	2SC1061(A)(B)(C) 2SD571(L)(M)	ET371880 ET651356
2SD438(E)(F)	ET240671	AB-3502A (only AA-1135)	2SC1625(O)(Y)	ET640667
2SD571(K)(L)	ET666404	AB-3502A	2SC1384(Q)(R)(S) 2SD438(E)(F)	ET623801 ET240671
2SD587(Q)(R)	ET302714	AB-3502B		
2SD588(Q)(R)	ET302715	AB-3502B		
2SD600K(E)(F)	ET300931	AB-3502A (only AA-1150)	2SC1624(O)(Y)	ET621046
1S2472	ED214457	AB-3502A		
1S2473	ED624903	AB-3501A AB-5001A	1S1588 WG599	ED591447 ED511721
GP08D	ED300924	AB-3502A	10D2 1N4003	ED22548 ED57295

Original Parts			Interchangeable Parts	
Description	Parts No.	Utilizing P.C Board	Description	Parts No.
GP20G	ED245417	AB-3502A (only AA-1135)	HIFI SPECIAL SR3AM-1-B	ED558033 ED523642
GP30G	ED245428	AB-3502A (only AA-1150)	HIFI SPECIAL SR3AM-1-B	ED558033 ED523642
RD13E(B)	ED223558	AB-3502A	WZ-130	ED539976
SR105D	ED293523	AB-3501D AB-5001D/E		

# INDEX

Parts No.	Ref. No. & Symbol No.	Parts No.	Ref. No. & Symbol No.	Parts No.	Ref. No. & Symbol No.	Parts No.	Ref. No. & Symbol No.	Parts No.	Ref. No. & Symbol No.
BA300371	3-1	ED560913	1-D5	EP300917	4-RL1	EV300921	10-VR1	TA207347	11-61
BA300375	2-1	ED560913	7-D1	EP300917	10-RL1	EV301168	2-VR1	TA300414	5-60
BA300377	1-1	ED624903	1-D1to4	ER223525	4-R55	EV301168	8-VR1	TA300414	11-62
BA300378	5-1	ED624903	7-D2to6	ER245395	10-R13	EV301200	2-VR2	TA300904	5-12
BA300381	5-66	ED698826	5-2	ER293580	4-R14	EV301200	8-VR2	TA300904	11-13
BA300387	4-1	ED698826	11-3	ER293580	4-R17	EV301233	9-VR1	TA300905	5-14
BA300389	4-3	EE299621	5-80	ER293580	10-R14	EV301294	8-VR3,4	TA300905	11-15
BA300389	10-3	EE299621	11-80	ER293580	10-R17	EV484863	1-VR3	TA301023	5-10
BA300728	9-1	EE301242	11-102	ER300925	4-R19	EV484863	7-VR3	TA301024	11-11
BA300729	11-1	EE301419	5-102	ER301762	4-R18	EV499364	1-VR2	TA301649	5-15x
BA300730	11-2	EF249851	11-101x	ER389687	4-R41	EV499364	7-VR2	TA301649	11-16x
BA300732	7-1	EF277402	5-97x	ER389687	4-R45,46	EV550023	1-VR1	TA301650	5-13x
BA301548	8-1	EF277402	11-97x	ER389687	10-R41	EV550023	7-VR1	TA301772	5-19
BA301554	11-68	EF378595	5-98x	ER409814	10-R45,46	EV648527	3-VR1	TA301772	11-20
BA301654	10-1	EF459843	11-98x	ER650430	1-FL1to3	EW207742	5-86x	TA303289	5-11x
BA303317	1-2	EF575212	5-96	ER650430	7-FL1to3	EW207742	11-86	TA303290	11-12x
BA303319	7-2	EF575223	11-96	ER653567	10-R18,19	EW374894	5-85	TA301650	11-14x
BA304137	4-2	EF623103	5-99x	ER656908	7-FL4	EW374894	11-85	TA646773	5-52
BA304138	10-2	EF623103	11-99x	ER663614	4-R15,16	EZ225145	5-82	TA646773	11-54
BC300940	6-16	EF668474	5-100x	ER663614	10-R15,16	EZ225145	11-82	ZG286435	6-5x
BC300940	12-16	EF668474	11-100x	ER666224	4-R24,25	EZ631945	5-87	ZG286435	12-6x
BC301651	6-17x	EF690996	5-101x	ER666224	4-R31,32	EZ631945	11-87	ZG300891	5-58
BC301651	12-17x	EI293158	7-IC2	ER666224	10-R24,25	MI301149	5-57	ZG300891	11-60
BD300383	6-1	EI293207	1-IC4	ER666224	10-R31,32	MI301149	11-59	ZS325495	5-3
BD301551	12-1	EI293207	7-IC4	ES224436	5-44	ML300879	5-74	ZS325495	11-5
BD303296	6-2x	EI299700	1-IC2	ES224436	11-46	ML300879	11-77	ZS355522	5-75
BD303315	12-2x	EI650586	1-IC3	ES239218	5-45x	MR530662	5-17	ZS355522	11-78x
BT293398	1-T3	EI650586	7-IC3	ES239218	11-17x	MR530662	11-18	ZS379350	5-21
BT293398	7-T4	EI697871	1-IC1	ES242346	5-46x	MS300898	5-50	ZS379350	6-9x
BT301171	5-33x	EI697871	7-IC1	ES242346	11-48x	MS300898	11-52	ZS379350	11-22
BT301172	5-34x	EJ240581	5-81	ES245733	1-SW2	MS300899	5-51	ZS379350	12-9x
BT301174	5-35x	EJ240581	11-81	ES245733	7-SW2	MS300899	11-53	ZS417150	5-62x
BT301175	5-36x	EJ293365	1-J2to4	ES301166	5-43	SE286560	6-4	ZS417150	11-64x
BT301177	5-32	EJ293365	7-J2to4	ES301166	11-45	SE286560	12-4	ZS421806	5-9x
BT301234	11-40x	EJ293646	5-73	ES301169	2-SW1	SE300910	5-91	ZS421806	11-10x
BT301236	11-39x	EJ293646	11-75	ES301169	8-SW1	SE300910	11-91	ZS447761	5-31
BT301237	11-41x	EJ296853	5-83x	ES301180	3-SW1	SE301680	5-92x	ZS447761	11-33
BT301238	11-42x	EJ296853	11-83x	ES301188	1-SW1	SE301680	11-92x	ZS447840	5-16
BT301239	11-38	EJ301150	11-88x	ES301188	7-SW1	SK281564	6-23x	ZS447840	6-4x
BT444137	7-T1	EJ301197	5-88x	ES301299	9-SW1	SK281564	12-23x	ZS447840	11-17
BT650384	1-T2	EJ301199	5-42	ET219868	4-TR16	SK281586	6-25x	ZS447840	12-8x
BT650384	7-T3	EJ301199	11-44	ET219868	10-TR16	SK281586	12-25x	ZS463353	5-44x
EC204671	4-C27, 28	EJ302685	11-76	ET240636	4-TR3	SK287662	12-29x	ZS463353	11-84x
EC204671	4-C30to33	EJ303140	5-90x	ET240636	10-TR3	SK300889	6-20	ZS510344	6-19
EC204671	10-C27, 28	EJ303141	5-89x	ET240660	4-TR6	SK300889	12-20	ZS510344	121-9
EC204671	10-C30to33	EJ303142	11-89x	ET240671	4-TR5	SK300901	12-26	ZS522865	5-45
EC286198	5-48x	EJ303143	11-90x	ET293218	4-TR1,2	SK301681	12-27x	ZS522865	11-57
EC286198	11-50x	EJ514822	5-67	ET293218	10-TR1,2	SK301682	6-21x	ZS530673	5-8
EC301170	5-40	EJ514822	11-69	ET300928	4-TR9	SK301682	12-21x	ZS530673	11-19
EC301214	8-C9	EJ539447	5-30	ET300928	10-TR9	SK301683	12-31x	ZS565942	5-45
EC301298	11-37	EJ539447	11-32	ET300931	10-TR5	SK301807	6-7x	ZS565942	11-5
EC301320	5-49x	EJ551035	5-41	ET301165	10-TR6	SK301807	12-5x	ZW259514	5-10x
EC301320	11-51x	EJ551035	11-43	ET302713	5-5x	SK301969	6-6	ZW259514	11-21x
EC493323	1-C9	EJ698051	1-J1	ET302714	5-4x	SK301969	12-7	ZW259514	11-27x
EC522167	1-C47	EJ698051	7-J1	ET302715	11-6x	SK644670	12-28	ZW270123	5-3
EC522167	7-C48	EL301185	5-23	ET302716	11-7x	SK646817	6-22	ZW270123	11-6
EC523282	1-C25	EL301185	11-24	ET452531	5-6x	SK646817	12-22	ZW273881	5-44x
EC523282	2-C3	EL301191	5-24	ET452531	5-7x	SK646830	6-24	ZW273881	11-64x
EC523282	7-C25	EL301191	11-25	ET452531	11-8x	SK646830	12-24	ZW273914	5-8
EC523282	7-C41	EL301204	5-25	ET459810	2-TR1,2	SK646841	12-30	ZW273914	11-35
EC523282	8-C3	EL301204	11-26x	ET459810	8-TR1,2	SK652397	5-78	ZW273960	5-19
EC621257	1-C48,49	EM300354	5-29x	ET557965	4-TR10	SM300915	5-22	ZW273960	11-36
EC621257	4-C1	EM300354	11-31x	ET557965	10-TR10	SM300915	11-23	ZW273892	5-33x
EC621257	7-C49,50	EM300355	5-27x	ET557965	10-TR19	SP300914	5-93	ZW273892	11-65x
EC621257	10-C1	EM300355	11-29x	ET618873	1-TR1	SP300914	11-93	ZW288786	5-41x
EC650406	7-C12	EM204344	5-26	ET618873	7-TR1	SP300938	6-3	ZW288786	5-16x
EC662128	4-C16	EM204344	11-28	ET621235	4-TR11to13	SP300938	12-3	ZW288786	11-63x
EC662128	10-C16	EM204355	5-28	ET621235	10-TR11to13	SP300948	5-71x	ZW322110	5-4
EC666494	1-C46	EM204355	11-30	ET635218	3-TR1	SP300949	5-72x	ZW322110	11-5
EC666494	7-C46	EO293387	1-T1	ET635218	4-TR4	SP300950	11-73x	ZW330412	6-10x
EC684720	5-47	EO293387	7-T2	ET635218	4-TR17	SP300951	11-74x	ZW330412	121-0x
EC684720	11-49	EO539820	1-L1	ET635218	10-TR4	SP300952	5-68	ZW330423	6-11x
ED214457	4-D1to5	EO539820	7-L1	ET635218	10-TR17	SP300953	5-69x	ZW330423	121-1x
ED214457	10-D1to5	EO650428	1-L3,4	ET635220	1-TR2to4	SP300954	5-70x	ZW330456	6-44x
ED245417	4-D9to12	EO650608	1-T4	ET635220	7-TR2to4	SP300955	11-70	ZW330456	121-4x
ED245428	10-D9to12	EO650608	7-T5	ET635220	9-TR1,2	SP300956	11-71x	ZW413190	6-13x
ED300829	4-D6	EO650610	1-L2	ET666404	4-TR14	SP300957	11-72x	ZW413190	121-3x
ED300829	10-D6	EO650610	7-L2	ET666404	10-TR14	SZ645243	5-94	ZW416698	5-5x
ED300924	4-D7,8	EO650823	4-L1,2	EV242267	2-VR3,4	SZ645243	11-94	ZW416698	11-67x
ED300924	10-D7,8	EO650823	10-L1,2	EV300921	4-VR1	TA207347	5-59	ZW439547	6-15x

# INDEX


Parts No.	Ref. No. & Symbol No.	Parts No.	Ref. No. & Symbol No.	Parts No.	Ref. No. & Symbol No.	Parts No.	Ref. No. & Symbol No.	Parts No.	Ref. No. & Symbol No.
ZW439547	12-15x								
ZW562476	5-77x								
ZW562476	11-79x								
ZW548010	6-18								
ZW548010	12-18								
ZW575774	5-37								
ZW575774	11-34								
ZW603797	6-12x								
ZW603797	12-12x								
ZW632226	5-8x								
ZW632226	11-4x								
ZW632226	11-9x								
ZW652408	5-79								
ZW698308	5-56								
ZW698308	11-58								

## SECTION 3

# SCHEMATIC DIAGRAM

1. AA-1135 SCHEMATIC DIAGRAM No. 2-1 1542442A
2. AA-1150 SCHEMATIC DIAGRAM No. 2-2 1542443A


AA-1135

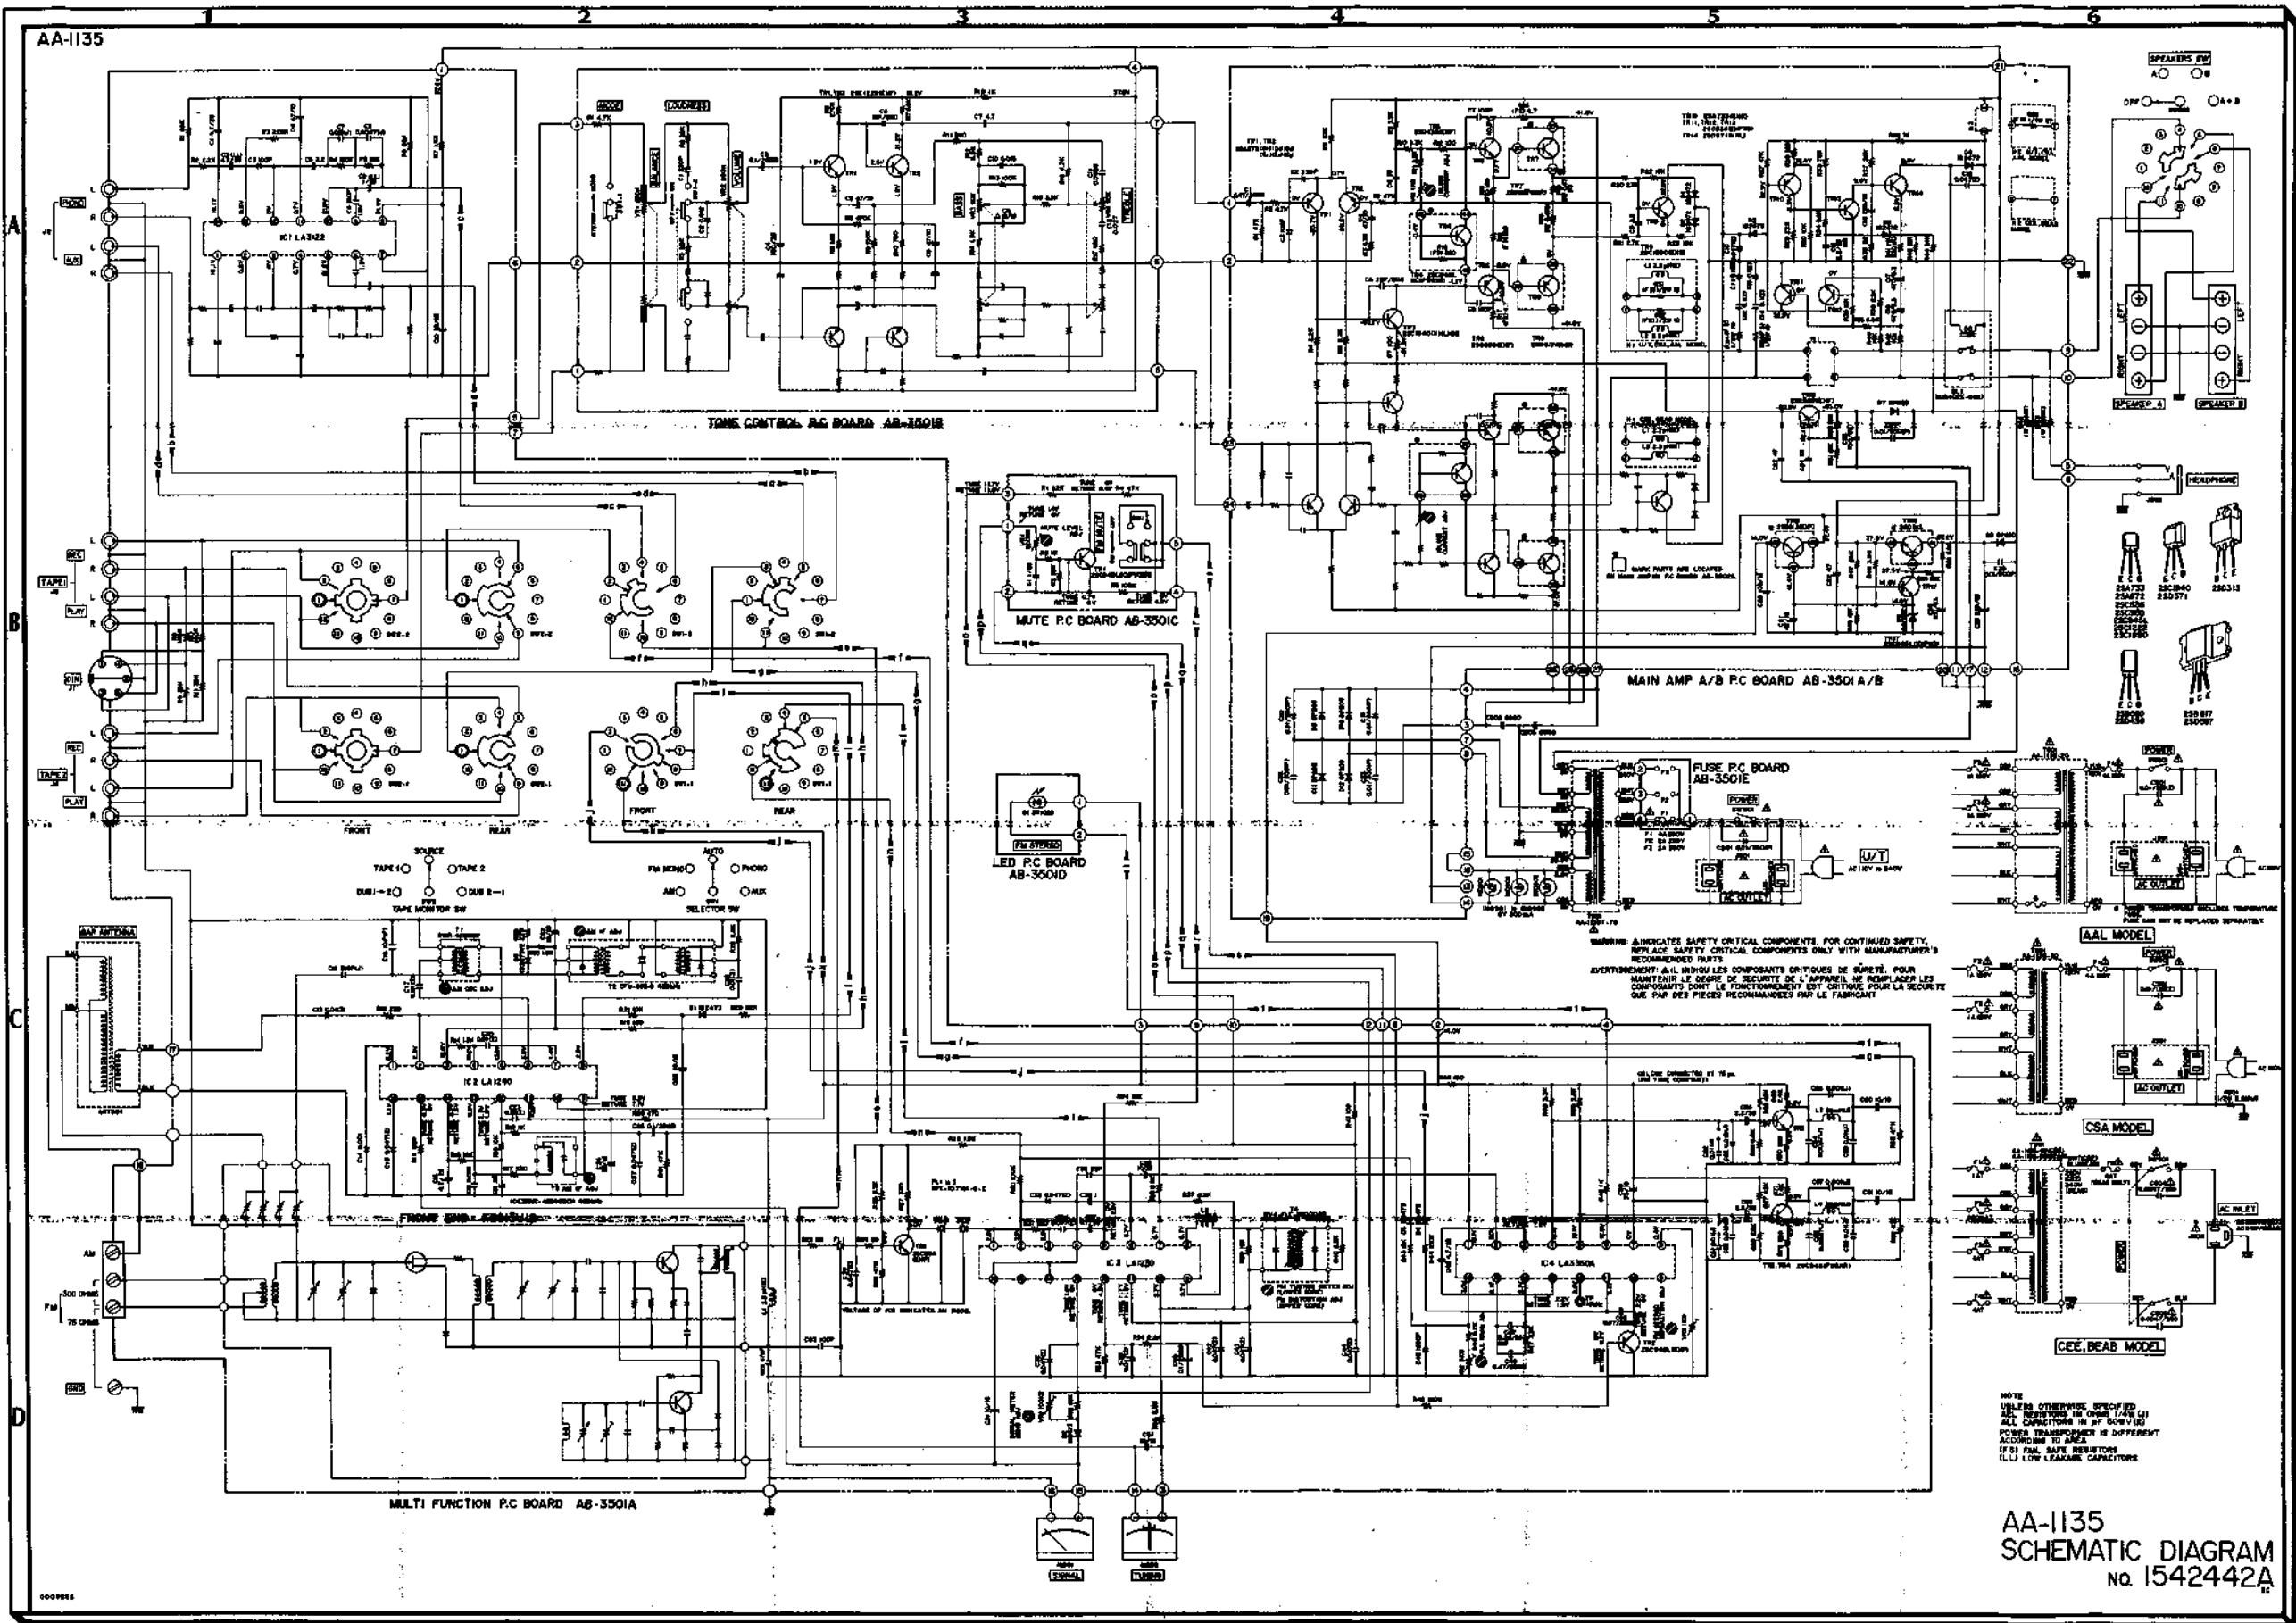

WARNING: INDICATES SAFETY CRITICAL COMPONENTS. FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS.  
 AVERTISSEMENT: ILL INDIQUE LES COMPOSANTS CRITIQUES DE SÉCURITÉ. POUR MAINTENIR LE DEGRÉ DE SÉCURITÉ DE L'APPAREIL, NE REMPLACEZ LES COMPOSANTS DONT LE FONCTIONNEMENT EST CRITIQUE POUR LA SÉCURITÉ QUE PAR DES PIÈCES RECOMMANDÉES PAR LE FABRICANT.

NOTE:  
 UNLESS OTHERWISE SPECIFIED:  
 ALL RESISTORS IN OHMS (1/4W 1%)  
 ALL CAPACITORS IN µF (50V/50)  
 POWER TRANSISTORS IN DIFFERENT  
 PACKAGING TO SAME  
 (R) FOL. FILM RESISTORS  
 (C) LOW LEAKAGE CAPACITORS

AA-1135  
 SCHEMATIC DIAGRAM  
 No. 1542442A

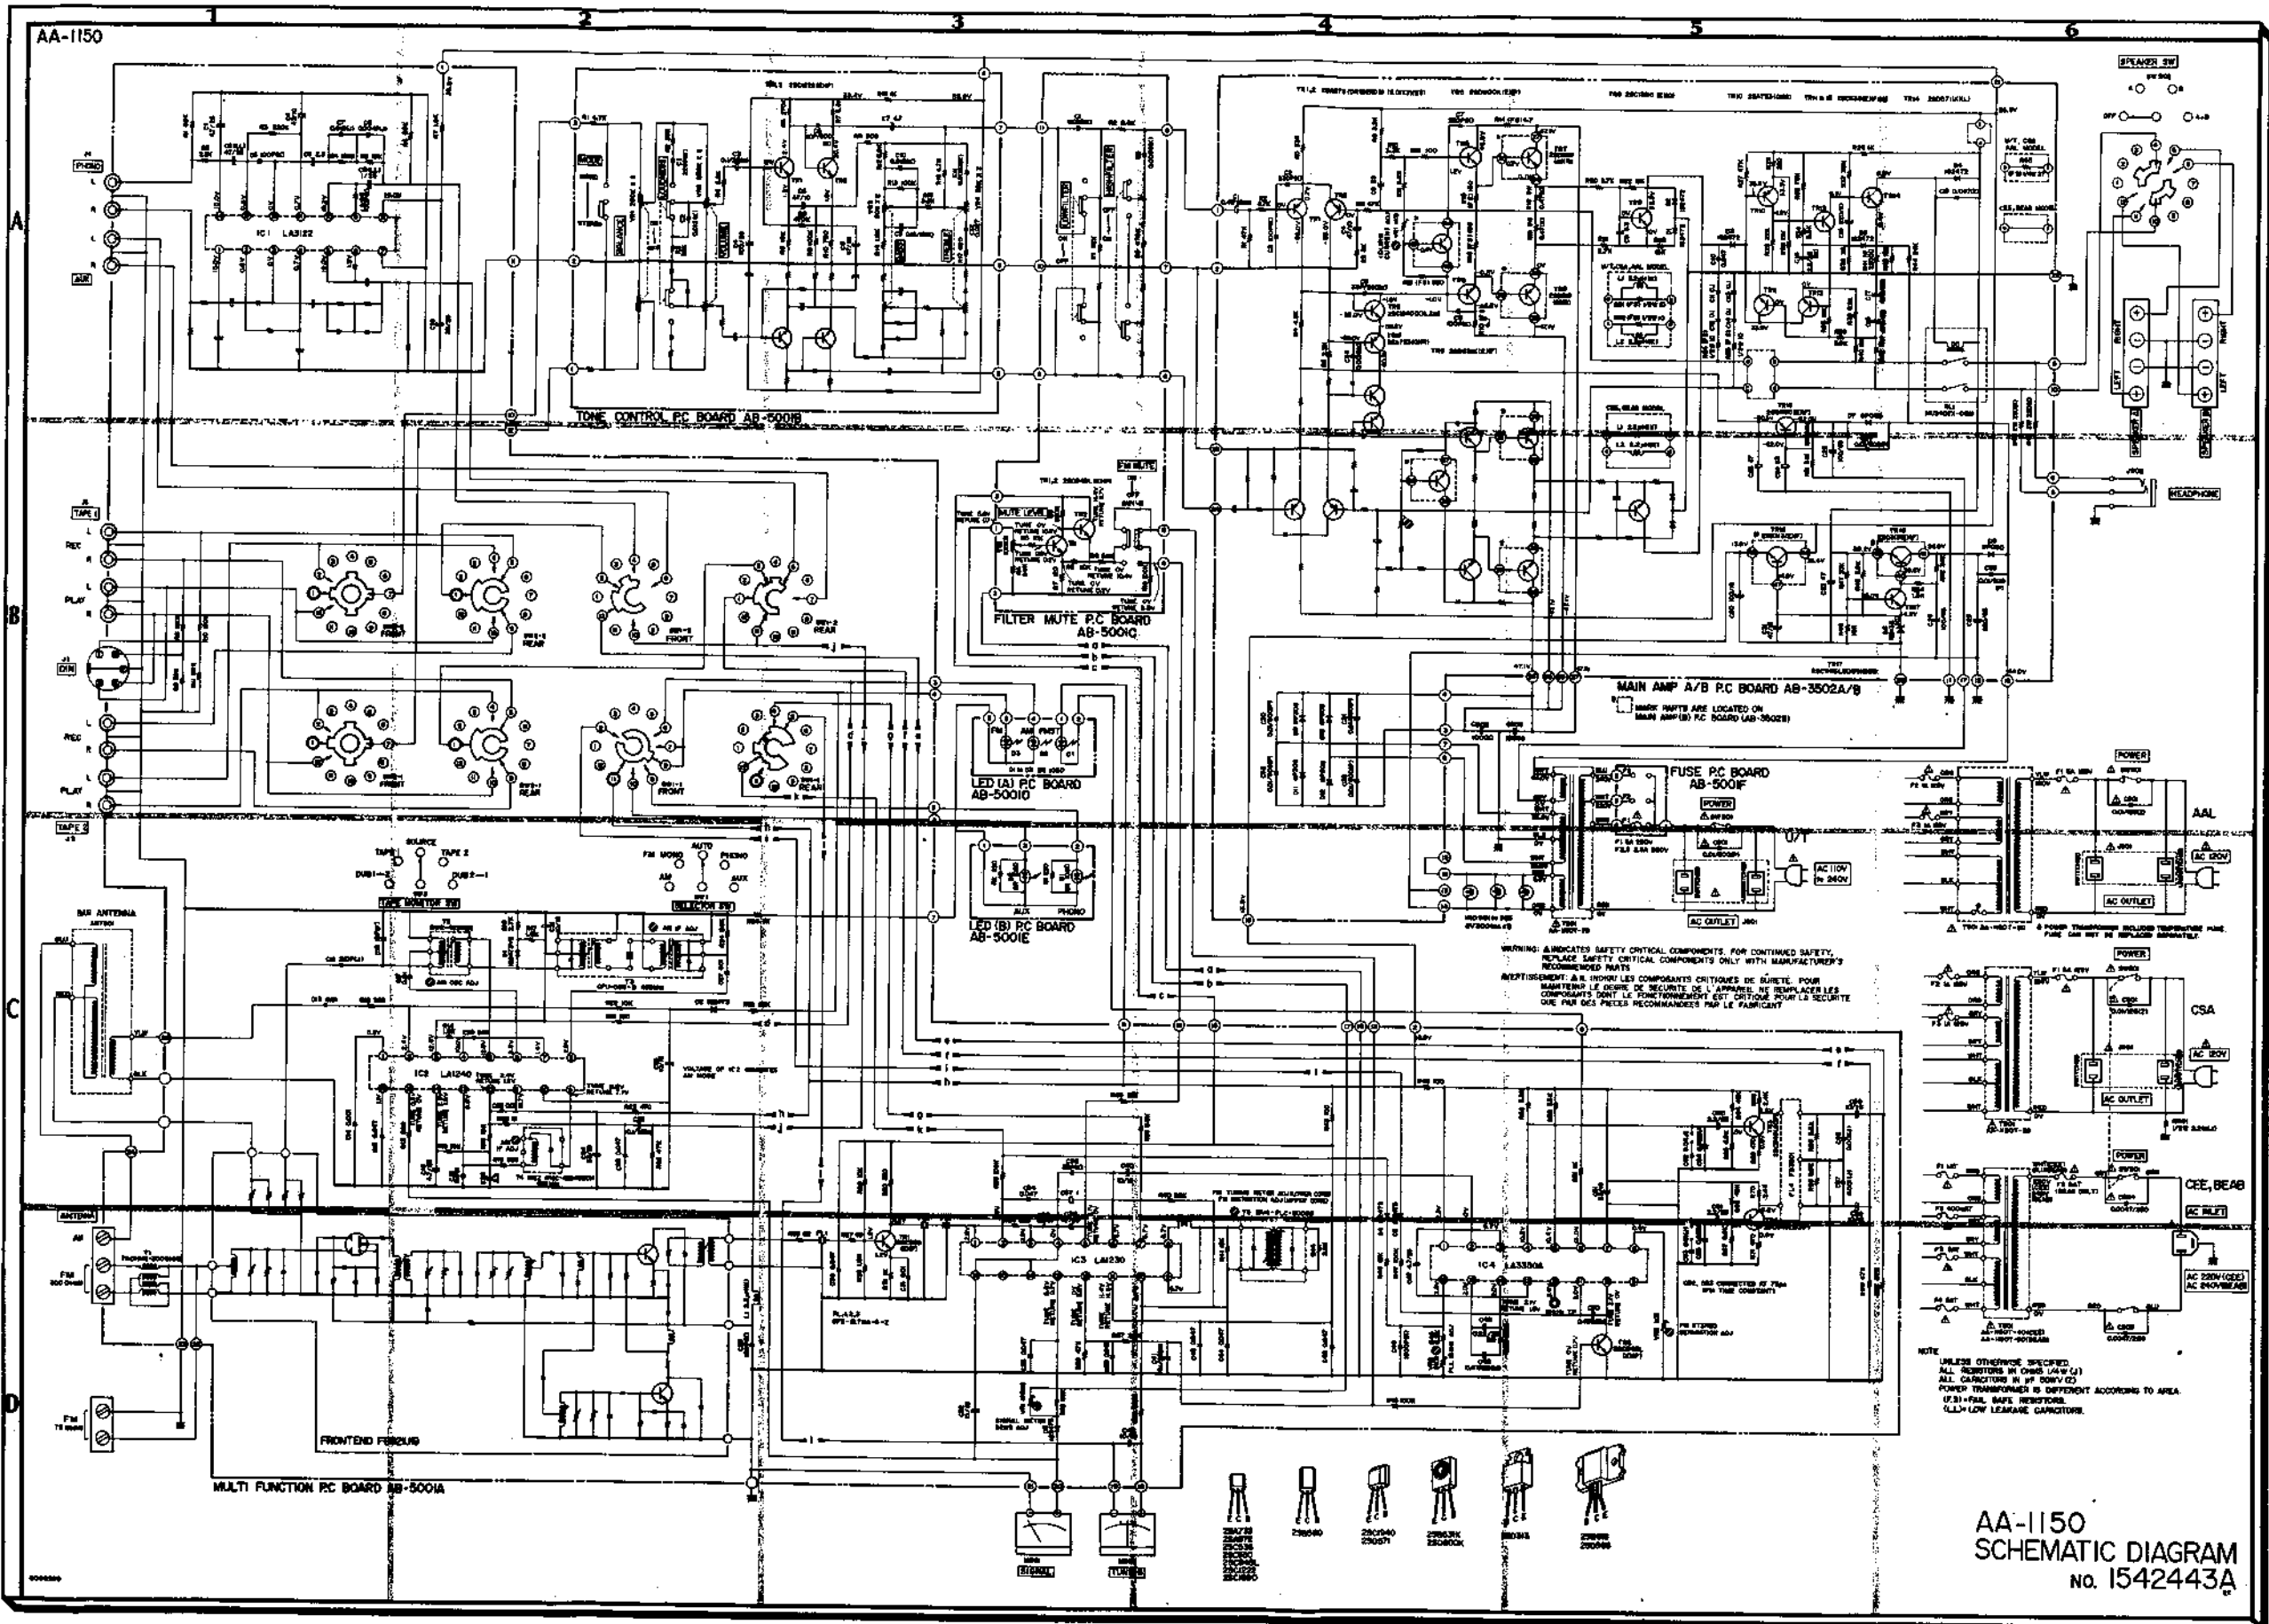

AA-1150  
SCHEMATIC DIAGRAM  
No. 1542443A