



# AKAI SERVICE MANUAL

AM-U06

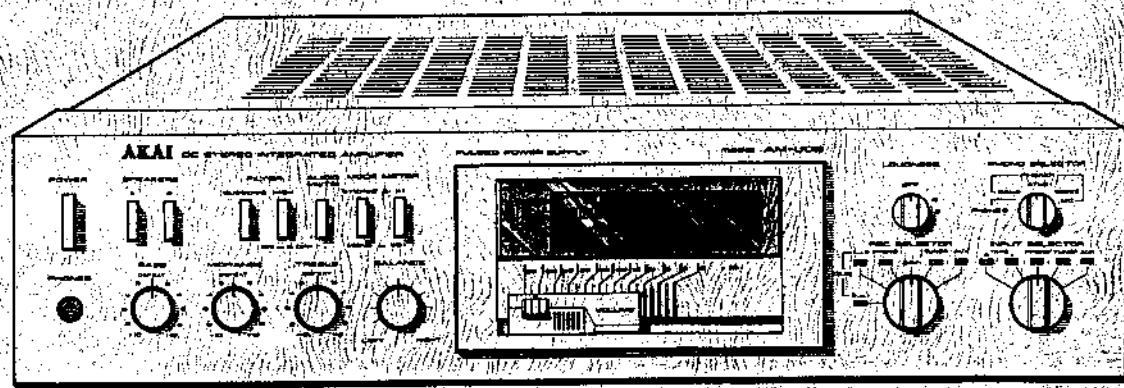

DC STEREO INTEGRATED AMPLIFIER

MODEL **AM-U06**

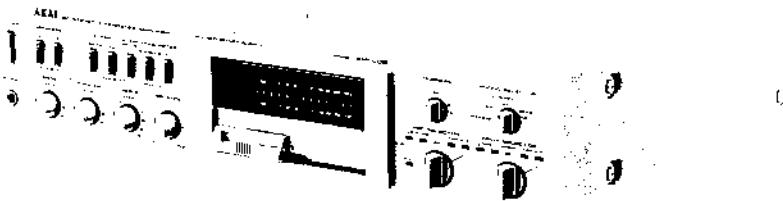

## DC STEREO INTEGRATED AMPLIFIER

MODEL **AM-U06**

ALSO APPLICABLE TO BLACK PANEL MODEL

|                                   |    |
|-----------------------------------|----|
| SECTION 1 SERVICE MANUAL .....    | 3  |
| SECTION 2 PARTS LIST .....        | 29 |
| SECTION 3 SCHEMATIC DIAGRAM ..... | 42 |

### SECTION 1

## SERVICE MANUAL

### TABLE OF CONTENTS

|                                                      |    |
|------------------------------------------------------|----|
| I. TECHNICAL DATA .....                              | 4  |
| II. DISMANTLING OF UNIT .....                        | 5  |
| III. CONTROLS .....                                  | 6  |
| IV. PRINCIPAL PARTS LOCATION .....                   | 7  |
| V. VOLTAGE CONVERSION .....                          | 8  |
| VI. OPERATION OF PULSE POWER CIRCUIT .....           | 9  |
| VII. LEVEL DIAGRAM .....                             | 16 |
| VIII. ADJUSTMENTS .....                              | 17 |
| IX. CLASSIFICATION OF VARIOUS P.C BOARDS .....       | 18 |
| 1. P.C BOARD TITLES AND IDENTIFICATION NUMBERS ..... | 18 |
| 2. COMPOSITION OF VARIOUS P.C BOARDS .....           | 19 |

For basic adjustments, measuring methods, and operating principles, refer to GENERAL TECHNICAL MANUAL.

## I. TECHNICAL DATA

### POWER AMPLIFIER SECTION

|                                        |                                                                                                                      |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------------|
| RATED POWER OUTPUT<br>2-CHANNEL DRIVEN | 68 watts per channel, minimum RMS, at 8 ohms from 20 to 20,000 Hz with no more than 0.008% total harmonic distortion |
| POWER BANDWIDTH (IHF)                  | 6 Hz to 60 kHz/8 ohms<br>(Total harmonic distortion: 0.05%)                                                          |
| SIGNAL TO NOISE RATIO (IHF)            |                                                                                                                      |
| PHONO                                  | Better than 84 dB                                                                                                    |
| AUX                                    | Better than 97 dB*                                                                                                   |
| RESIDUAL NOISE                         | Less than 0.5 mV at 8 ohms                                                                                           |
| CHANNEL SEPARATION (IHF)               |                                                                                                                      |
| PHONE                                  | Better than 60 dB at 1,000 Hz                                                                                        |
| DAMPING FACTOR                         | More than 180 (1 kHz, 8 ohms)                                                                                        |
| OUTPUT                                 |                                                                                                                      |
| SPEAKERS                               | A, B (4 to 16 ohms)/A+B (8 to 16 ohms)                                                                               |
| HEADPHONES                             | 4 to 16 ohms                                                                                                         |

### PREAMPLIFIER SECTION

|                             |                                                                                                                                                                                               |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| INPUT SENSITIVITY/IMPEDANCE |                                                                                                                                                                                               |
| PHONE 1                     | MC: 80 µV/10 ohms<br>MM: 3 mV/33k, 47k, 100k ohms switchable<br>3 mV/47 kohms                                                                                                                 |
| PHONE 2                     | 150 mV/100 kohms                                                                                                                                                                              |
| AUX                         | 150 mV/100 kohms                                                                                                                                                                              |
| TUNER                       | 150 mV/100 kohms                                                                                                                                                                              |
| TAPE MONITOR                | 150 mV/100 kohms (PIN)<br>30 mV/100 kohms (DIN)                                                                                                                                               |
| OUTPUT LEVEL/IMPEDANCE      |                                                                                                                                                                                               |
| TAPE REC                    | 150 mV/1 kohms (PIN)<br>150 mV/100 kohms (DIN)                                                                                                                                                |
| REC OUTPUT                  | 1 V/1 kohms                                                                                                                                                                                   |
| FREQUENCY RESPONSE          |                                                                                                                                                                                               |
| PHONE (RIAA EQUALIZATION)   | 30 Hz to 15 kHz +0.2 dB                                                                                                                                                                       |
| AUX, TUNER, TAPE MONITOR    | 6 Hz to 100 kHz +0 dB, -2 dB                                                                                                                                                                  |
| TONE CONTROL                |                                                                                                                                                                                               |
| BASS                        | ±8 dB at 100 Hz                                                                                                                                                                               |
| MIDRANGE                    | ±6 dB at 1 kHz                                                                                                                                                                                |
| TREBLE                      | ±8 dB at 10 kHz                                                                                                                                                                               |
| AUDIO MUTE                  | -20 dB                                                                                                                                                                                        |
| LOUDNESS CONTROL            | at 100 Hz                  at 10 kHz<br>1. 3 dB                  1. 2.5 dB<br>2. 6 dB                  2. 5 dB<br>3. 9 dB                  3. 8 dB<br>(VOLUME control set at -30 dB position) |
| FILTER                      |                                                                                                                                                                                               |
| SUBSONIC                    | -3 dB at 18 Hz                                                                                                                                                                                |
| HIGH                        | -3 dB at 10 kHz                                                                                                                                                                               |


### MISCELLANEOUS

|                    |                                                                                                                                                                              |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| POWER REQUIREMENTS | 120V, 60 Hz for USA and Canada<br>220V, 50 Hz for Europe except UK<br>240V, 50 Hz for UK and Australia<br>110V/220V/240V, 50/60 Hz internally switchable for other countries |
| POWER CONSUMPTION  | C/T      280W<br>CSA      360W<br>AAL      220W<br>CEE      450W<br>UK, SAA   510W                                                                                           |
| DIMENSIONS         | 440 (W) x 105 (H) x 308 (D) mm<br>(17.3 x 4.1 x 12.1 inches)                                                                                                                 |
| WEIGHT             | 8.3 kg (18.3 lbs)                                                                                                                                                            |

\* For improvement purposes, specifications and design are subject to change without notice.

## II. DISMANTLING OF UNIT

In case of trouble, etc. necessitating dismantling, please dismantle in the order shown in the photographs. Reassemble in reverse order.

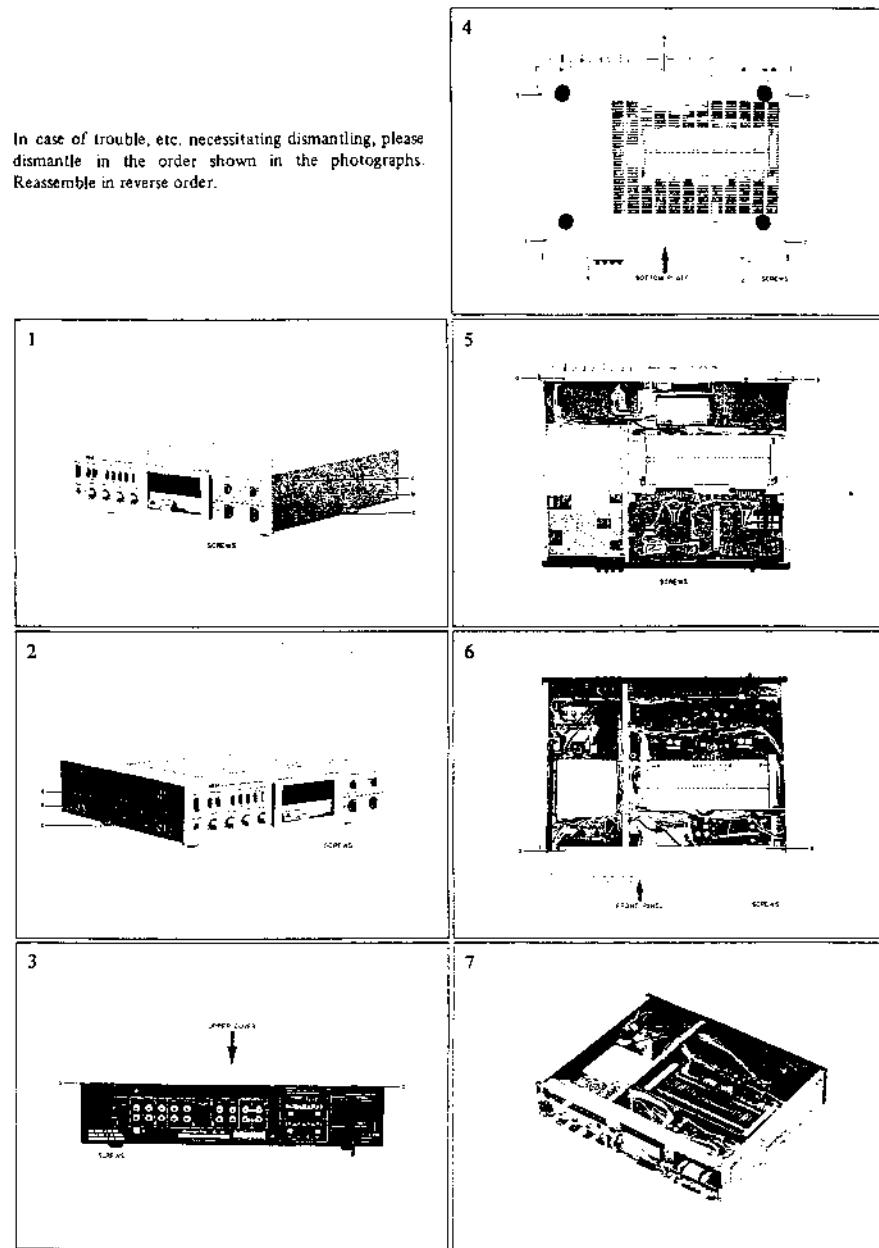

### III. CONTROLS

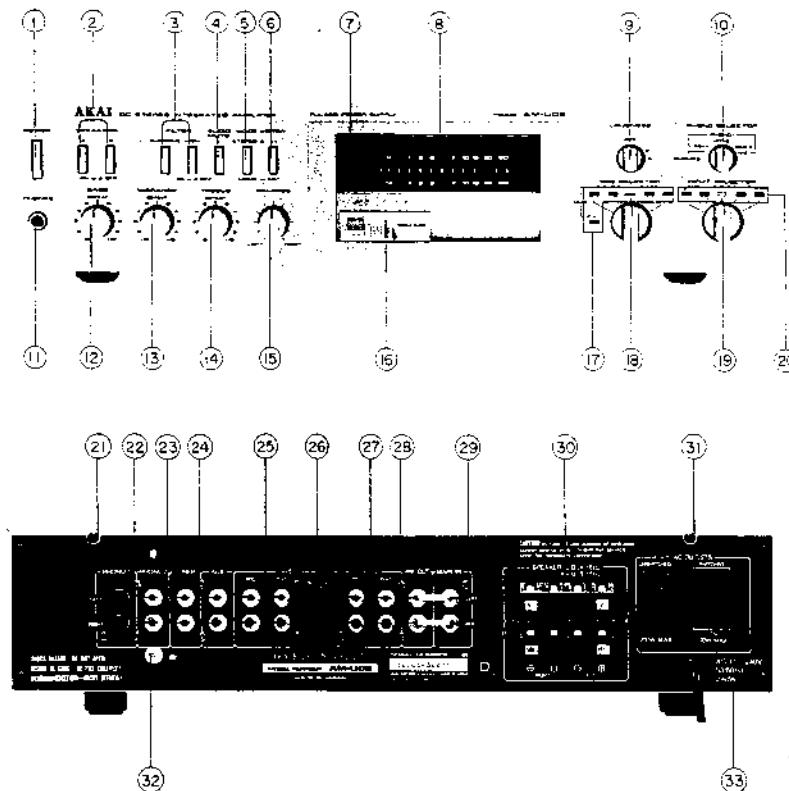


Fig. 1 Controls

1. POWER SWITCH
2. SPEAKER SYSTEM SELECTOR SWITCHES
3. FILTER SWITCHES
4. AUDIO MUTE
5. MODE SELECTOR
6. METER SWITCH
7. CLIPPING INDICATOR
8. FLD BAR METER
9. LOUDNESS SWITCH
10. PHONO SELECTOR
11. HEADPHONE JACK
12. BASS CONTROL
13. MIDRANGE TONE CONTROL
14. TREBLE CONTROL
15. STEREO BALANCE CONTROL
16. VOLUME CONTROL
17. RECORDING SELECTOR INDICATOR
18. RECORDING SELECTOR
19. INPUT SELECTOR
20. INPUT SELECTOR INDICATOR
21. PHONO 1 INPUT TERMINALS
22. PHONO 2 INPUT TERMINALS
23. TUNER TERMINALS
24. AUX TERMINALS
25. TAPE 1 SYSTEM REPLAY TERMINALS
26. TAPE 1 SYSTEM DIN JACK
- (Some models do not have this facility.)
27. TAPE 2 SYSTEM REC/PLAY TERMINALS
28. PRE-OUT TERMINALS
29. MAIN-IN TERMINALS
30. A AND B SYSTEM SPEAKER TERMINALS
31. EXTRA AC OUTLETS
- (Some models are not equipped with this facility.)
32. GROUND TERMINAL
33. AC CORD (Some models are equipped with an AC inlet instead of an AC cord. Connect with an appropriate power cord.)

### IV. PRINCIPAL PARTS LOCATION

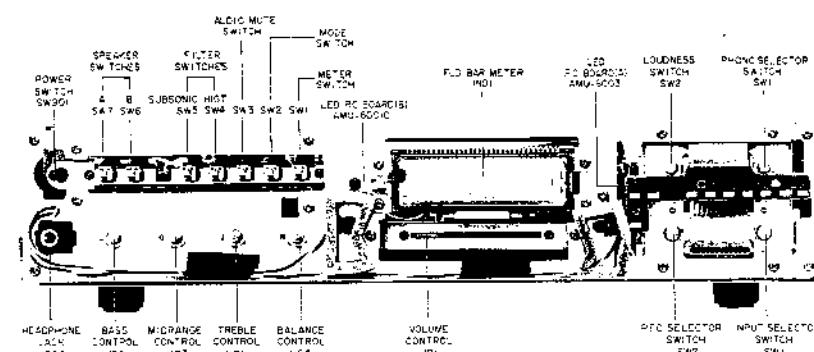


Fig. 2 Front View

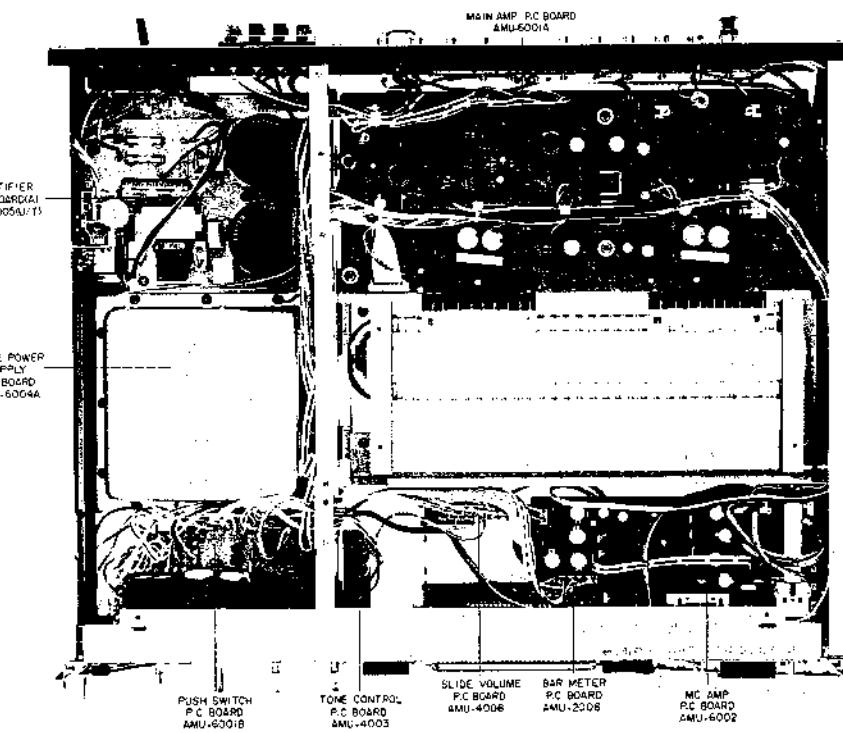


Fig. 3 Top View

## V. VOLTAGE CONVERSION

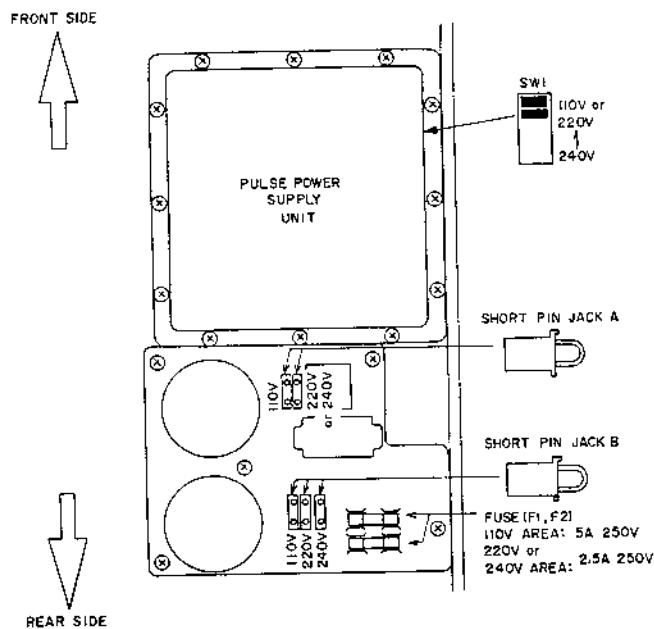


Fig. 4 Voltage Conversion (U/T model)

Models for Canada, USA, Europe, UK, and Australia are not equipped with this facility.

Each machine is preset at the factory according to destination, but some machines can be set to 110 V, 220V or 240V as required.

If voltage change is necessary, this can be accomplished as follows.

- 1) Disconnect AC Power Cord.
- 2) Loosen holding screws and remove upper cover.
- 3) Align the short pin jacks A and B with the position for each voltage area as shown in Fig. 4.
- 4) Set the slide switch located at the right hand side of the pulse power supply unit in Fig. 4.
- 5) Change the fuses. 5A for 110V and 2.5A for 220 to 240V following the printed instructions explicitly.

## VI. OPERATION OF PULSE POWER CIRCUIT

The Pulse Power Circuit is composed of a high-voltage rectifier circuit, oscillator starting circuit, inverter circuit (blocking oscillator circuit), transformer circuit, rectifier circuit and smoothing circuit as shown below.

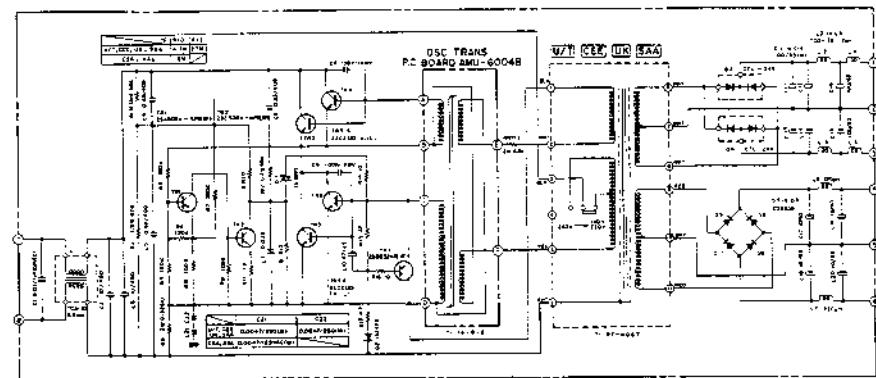


Fig. 5 Schematic Diagram for Power Section

### 1. HIGH-VOLTAGE RECTIFIER CIRCUIT

Either the voltage doubling rectifier system, or the bridge rectifier system is selected according to the difference in the power supply voltage. That is, voltage doubling rectification is adopted for input

voltage of 100 to 120V (for the U.S. Canada and Japan), while bridge rectification is adopted for those of 220 to 240V (for Europe, etc.), to obtain a DC voltage of approximately 300V.

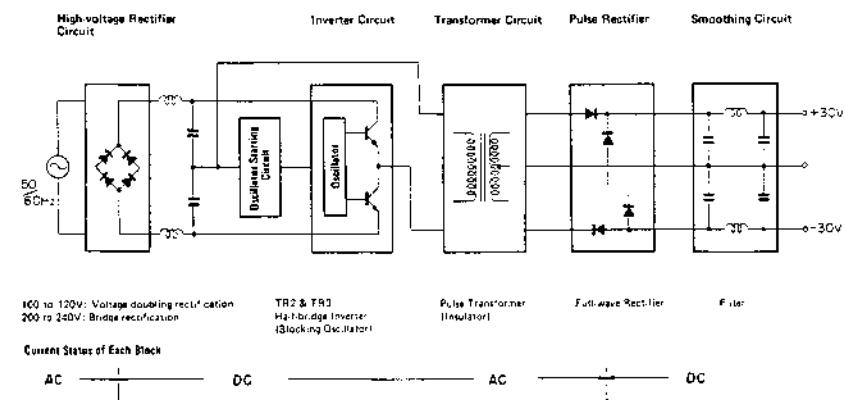


Fig. 6 Block Diagram

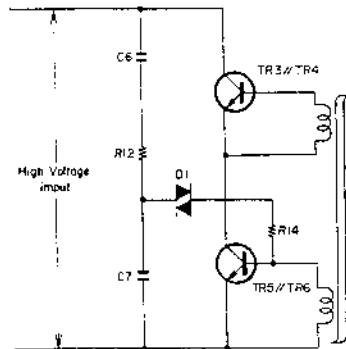


Fig. 7 Principle of Starting Oscillation

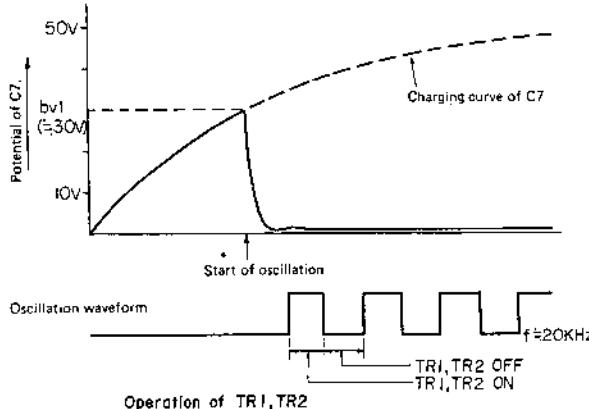


Fig. 9 Operation of TR1

## 2. OSCILLATOR STARTING CIRCUIT

At power switch-on, this circuit creates an initial pulse which starts the inverter circuit of the next stage. D1 is a double-directional trigger diode that quickly turns on when the voltage at both ends exceeds the breakdown voltage (approx. 30V) as breakdown voltage flows through it. When the potential of C7 is raised to about 30V by switching-on the power, it will cause a positive trigger pulse to be applied to the bases of TR5/TR6, thereby starting oscillation.

During oscillation, 20 kHz and 300 Vp-p square waves will appear at the intersecting point of TR3/TR4 and TR4/TR5, so that TR1 and TR2 will repeat the 20 kHz switching operation. That is, the potential of C7 will be discharged when they are turned on, whereas C7 will be charged when turned off. For this reason, the potential of C7 will not reach the breakdown voltage of D1, as can be seen from Fig. 9, so that D1 will be in a high-impedance state. And the operations of these circuits are absolutely unrelated to those of other circuits.

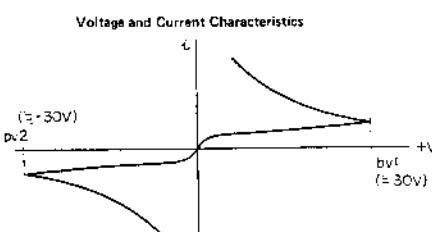


Fig. 8 Diode Characteristics

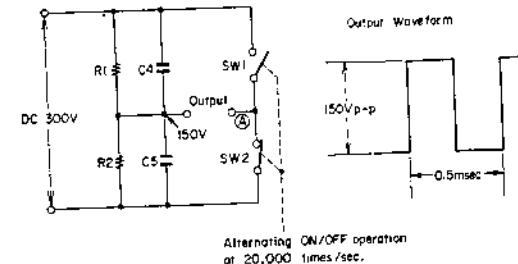


Fig. 10 Principle Diagram of Inverter

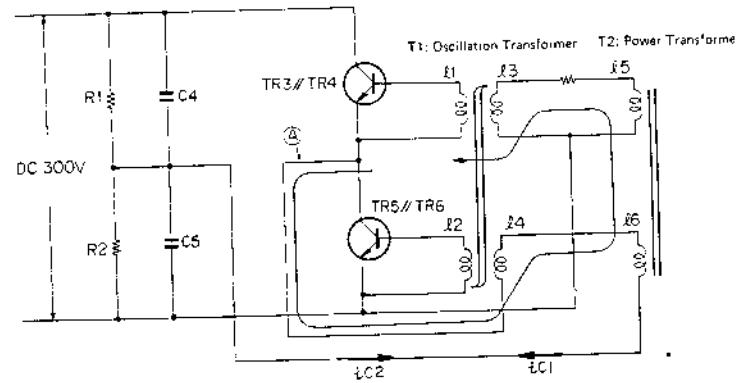


Fig. 11 Basic Schematic Diagram

## 3. INVERTER CIRCUIT (BLOCKING OSCILLATOR CIRCUIT)

As illustrated by Fig. 10, the inverter circuit alternately switches the DC voltage ON and OFF, thus converting it to square wave pulses. The switching is achieved by transistors under the use of a blocking oscillator. The operating principle is shown in Fig. 11. The 300V is divided into 150V and applied to the mid-point of C4 (R1) and C5 (R2). (This will be referred as the mid-point hereinafter.)

First, a trigger pulse is applied to the base of TR3 by the oscillator starting circuit. This causes TR3 to turn on and a collector current  $i_{C2}$  to flow in from the mid-point. Since this current flows from R6 to R4, current will also be induced in R5 and R3. Therefore, this current will be fed back to coil L2 of TR3's base, following flux variations in T1 (Toroidal trans-

former) which accompany current variations in R3. As this loop is formed in a direction that realizes positive feedback, collector current  $i_{C2}$  will continue to increase with the increase in the base current of TR3. As a result, the current flowing through R3 will also continue to increase, causing the flux density to become higher and to eventually reach saturation after the passage of a certain time. When the flux saturates so that the flux no longer varies, the R3 to R2 loop will be disconnected as a result. However, even after this positive feedback loop has been disconnected, collector current  $i_{C2}$  will continue to flow for a while, due to the action of the counter electromotive force that works in the direction that permits continued current flow. But, soon, the collector current will start to decrease rapidly.

#### TR2 ON (TR3 OFF) Period

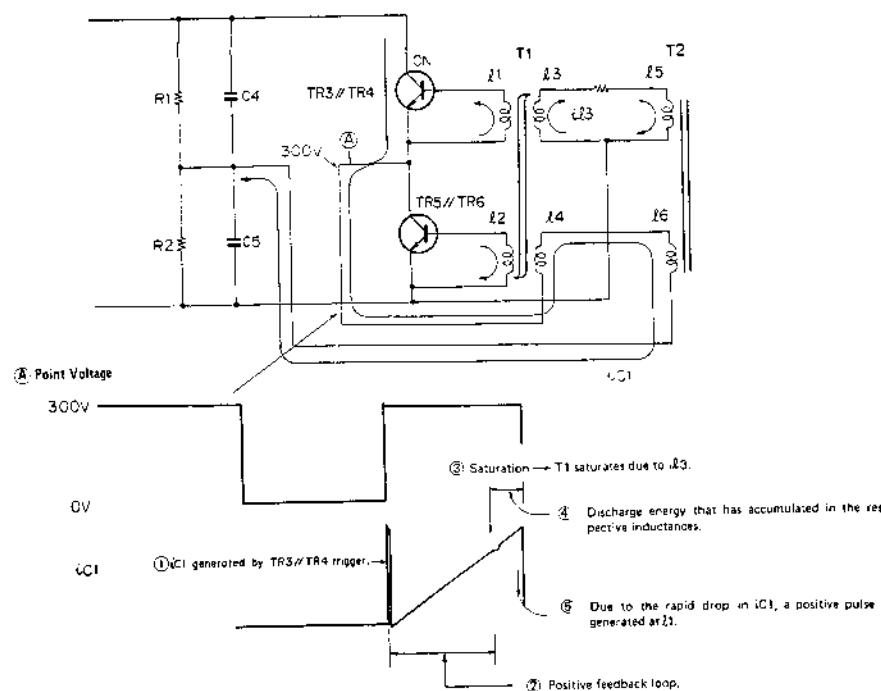


Fig. 12 TR3/TR4 turn-on period

During the above process, TR5/TR6 will be turned on, while TR3/TR4 will be "cut-off". This is because coil  $\ell_1$  of TR3/TR4's base is wound in a direction opposite to which  $\ell_2$  is wound, so that an inverse-direction voltage will be induced for TR3/TR4's base-emitter potential  $V_{BE}$ . For this reason, the potential of the intersecting point of TR3/TR4 and TR5/TR6 will become "0"V. When  $iC2$  starts to decrease rapidly, the resultant flux variation will cause a positive pulse to be generated at  $\ell_1$ , which, in turn, will cause TR3/TR4 to turn on and TR5/TR6 to be cut-off. Likewise, when the collector (emitter) current  $iC2$  flows in the order of  $\ell_4$  to  $\ell_6$  to mid-point, it will cause a positive feedback loop of  $\ell_6$  to  $\ell_5$  to  $\ell_3$  to  $\ell_1$  to be formed, so that a process similar to that just described will take place.

#### TR5,6 ON (TR2 OFF) Period

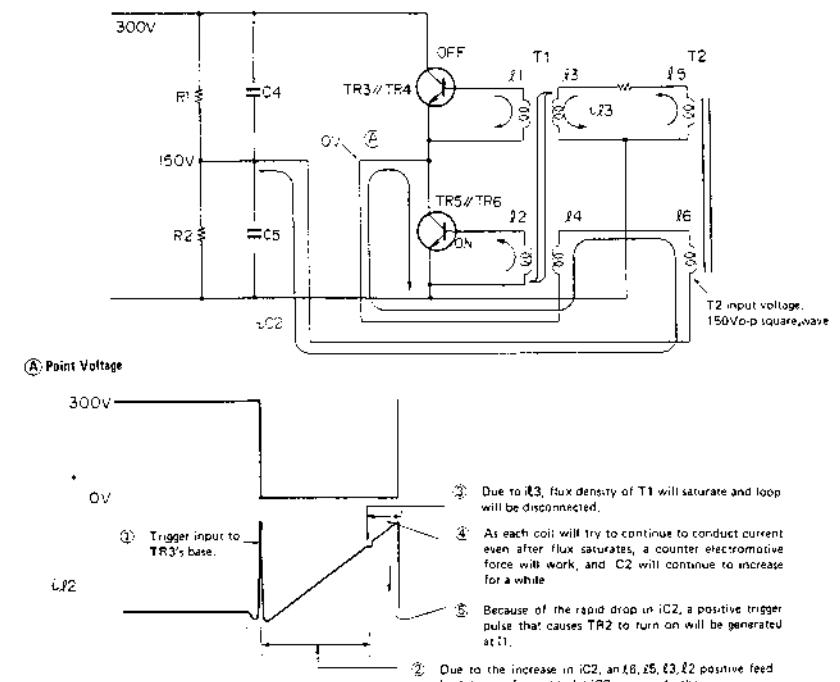


Fig. 13 TR5,6 turn-on period

In this way, TR3/TR4 and TR5/TR6 will be alternately turned on again and again, causing square waves to be generated. Fig. 13 gives the waveforms appearing at the respective sections during the serial process.

When a potential is produced at  $R5$  (0.22 ohms) due to overload (load shortening, etc.), TR7 goes ON and the base and emitter of TR5/TR6 are shorted, causing the oscillation to stop for overload protection.

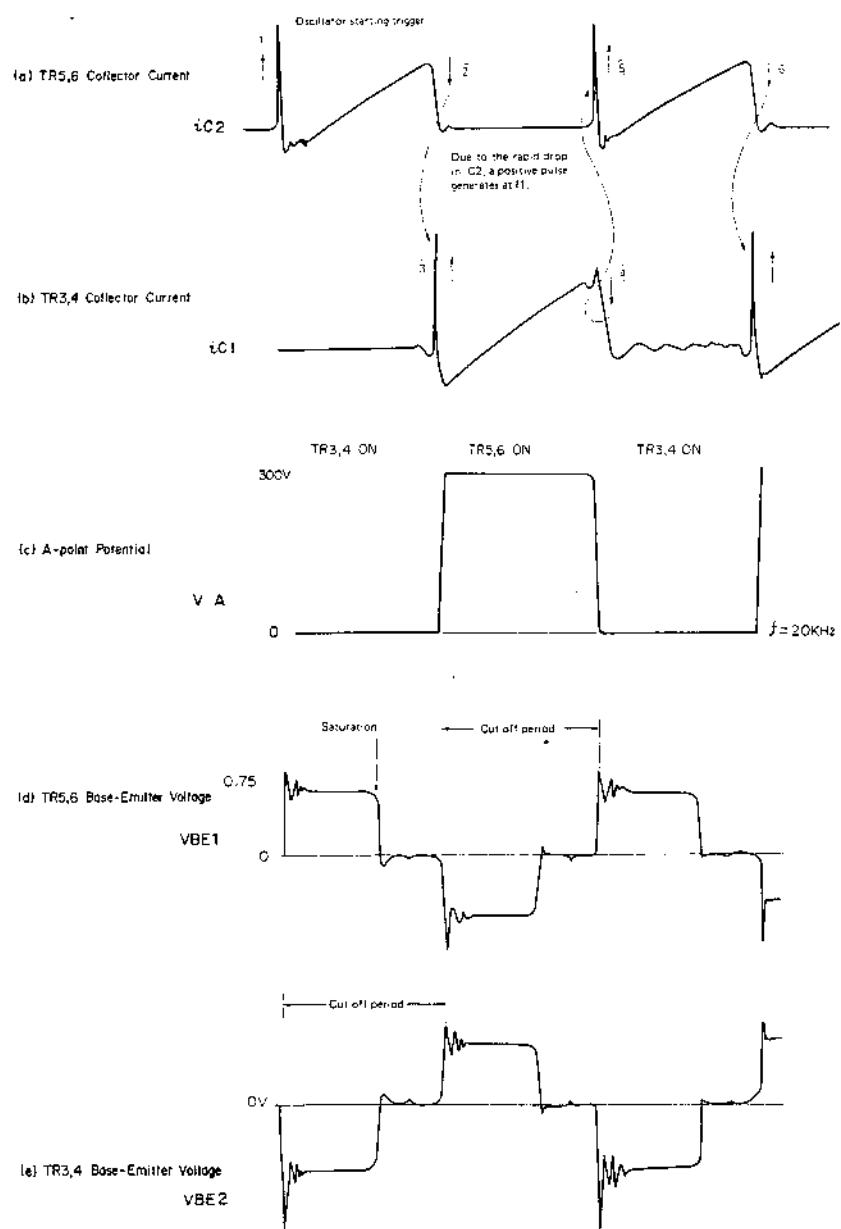


Fig. 14. Summary of waveforms appearing at each section

As shown in (d) and (e), the waveform of the base-emitter voltage of TR311/TR4 and TR5/TR6 will become "0" V upon saturation of T1's flux. In the meantime, the base current will flow in the direction similar to that before saturation, because of the counter electromotive force.

Meanwhile, by having a negative feedback applied at the high frequency range, the capacitor provided between the collector and bases of TR3/TR4 and TR5/TR6 will function so as to hold down the wave height to an adequate level to prevent the peak values from rising above the maximum ratings of the respective transistors.

The oscillating frequency of this circuit is determined by such factors as the maximum flux density of T1 and the current flowing through L3. It is ordinarily designed to be approximately 20 kHz.

#### 4. TRANSFORMER CIRCUIT

Although it is based on the same principle as that applied to general power transformers, the core material has been changed into ferrite material from the conventional electrical steel plate material to match the input waveform (square wave of approx. 20 kHz). Owing to the high permeability and use of high frequencies, power loss is far less than with conventional transformers. Therefore, it permits miniaturization of circuitry, which is the advantage of using a pulse power supply.

At the same time, the transformer circuit functions to insulate the secondary-side chassis potential from the AC input potential applied to the prime side.

#### 5. RECTIFIER CIRCUIT

Although this is a full-wave rectifier circuit intended for use with both plus and minus power supplied, it employs first recovery diodes having a quick reverse recovery time (trr) to enable high-efficiency rectification of square waves. Ordinary rectifying diodes cannot be used in this circuit.

#### 6. SMOOTHING CIRCUIT

Because of the high frequencies, it enables direct current having a low ripple factor to be obtained with a small-capacity electrolytic capacitor. Since it has to handle square waves and impulsive triggers, and because of large number of harmonics, the pulse power supply is formed into an LPF (smoothing circuit employing a choke coil). At the same time, to avoid interference caused by radiation and induction of electromagnetic waves, the pulse power circuit, excluding the high-voltage rectifier circuit, is enclosed in a shield case to ensure sufficient shield-off. Packing used for the shield case is made of conductive material if it has been damaged during servicing or for other reasons, it must be replaced with new packing. Otherwise, undesirable radiation from the damaged part may cause noise to generate in other circuits.

## **VII. LEVEL DIAGRAM**

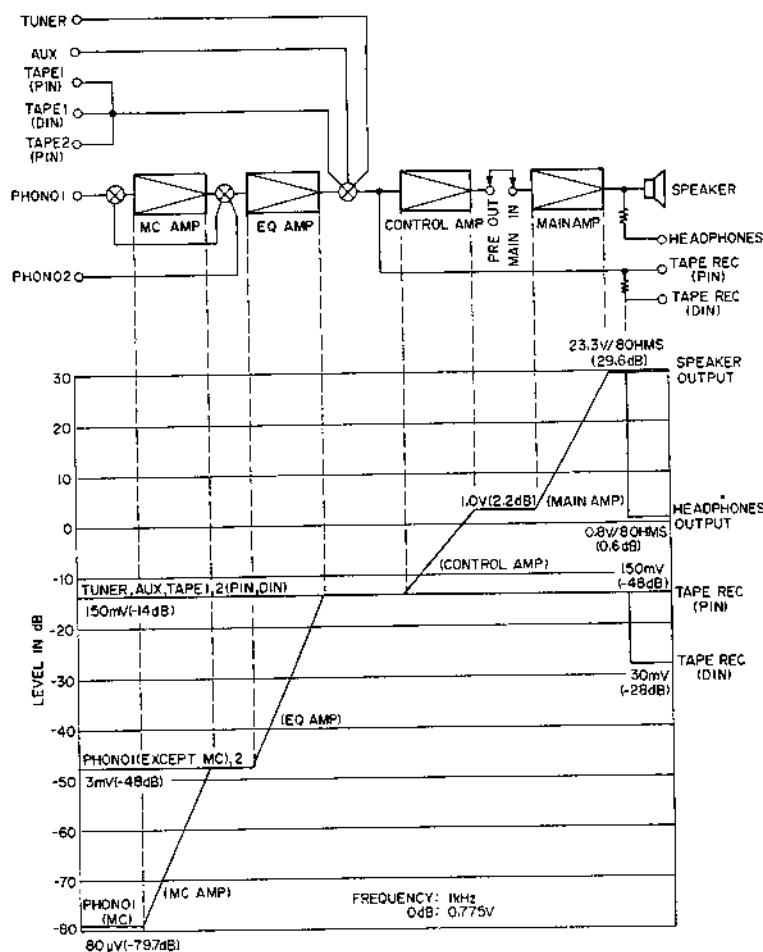


Fig. 15

## **VIII. ADJUSTMENTS**

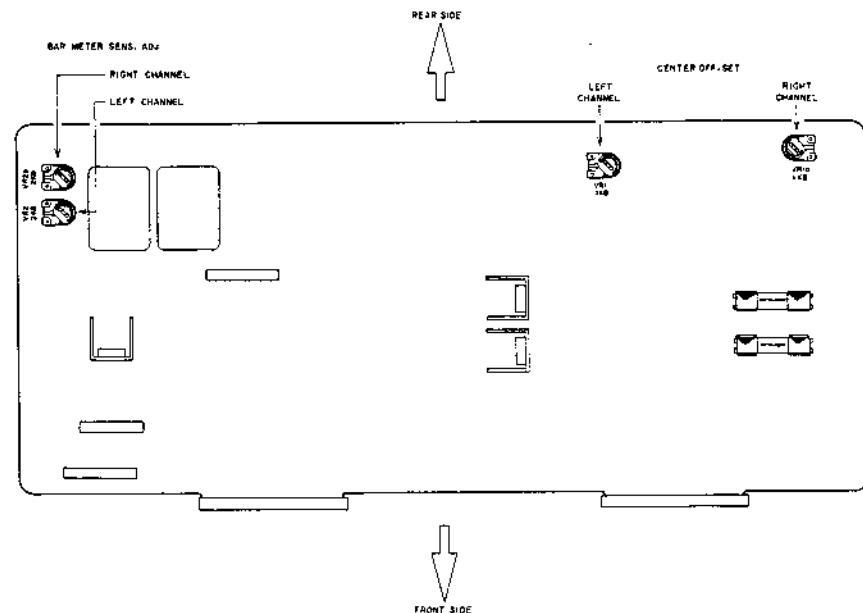


Fig. 16 Main Amp P.C. Board

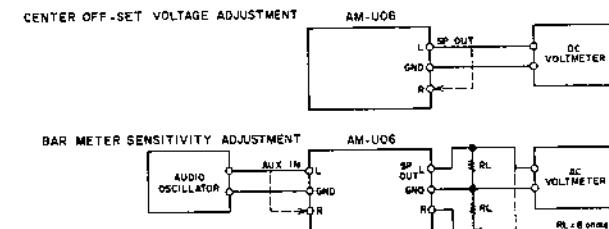


Fig. 17 Instruments connection

#### **1. CENTER OFF-SET VOLTAGE ADJUSTMENT (Refer to Figs. 16, 17)**

Connect the Digital Voltmeter or DC Voltmeter to the SPEAKER terminals. Adjust the VRI (L-ch) VRIb (R-ch) on the Main Amp P.C. board, so that the Voltmeter reads  $0 \pm 10\text{ mV}$ .

## **2. BAR METER SENSITIVITY ADJUSTMENT (Refer to Figs. 16, 17)**

Set the METER Switch to "x1  $\Omega$ " position. Connect load resistors (RL=8 ohms) to the SPEAKER terminals, and input a sine wave signal of 1 kHz to the AUX terminal. Control the input signal level until the AC Voltmeter connected to the both ends of the load resistor reads 10.95V.

Under this condition, adjust the VR2 (L-ch), VR2b (R-ch) 2kB, so that the BAR METER indicates 15W.

## **IX. CLASSIFICATION OF VARIOUS P.C BOARDS**


### **1. P.C BOARD TITLES AND IDENTIFICATION NUMBERS**

| P.C. Board Title                       | P.C Board Number |
|----------------------------------------|------------------|
| Main Amp P.C Board                     | AMU-6001A        |
| Push Switch P.C Board                  | AMU-6001B        |
| Led P.C Board (B)                      | AMU-6001C        |
| MC Amp P.C Board                       | AMU-6002         |
| LED P.C Board (A)                      | AMU-6003         |
| Pulse Power Supply P.C Board           | AMU-6004A        |
| Rectifier P.C Board (A) (U/T)          | AMU-6005         |
| Rectifier P.C Board (C) (CEE, SAA, UK) | AMU-6006         |
| Rectifier P.C Board (B) (CSA, AAL)     | AMU-6023         |
| Selector P.C Board                     | AMU-4002         |
| Tone Control P.C Board                 | AMU-4003         |
| Pin Jack P.C Board                     | AMU-4005         |
| Slide Volume P.C Board                 | AMU-4008         |
| Bar Meter P.C Board                    | AMU-2006         |

Chart-1

## 2. COMPOSITION OF VARIOUS P.C BOARDS


### 1) MAIN AMP P.C BOARD AMU-6001A and LED P.C BOARD (B) AMU-6001C

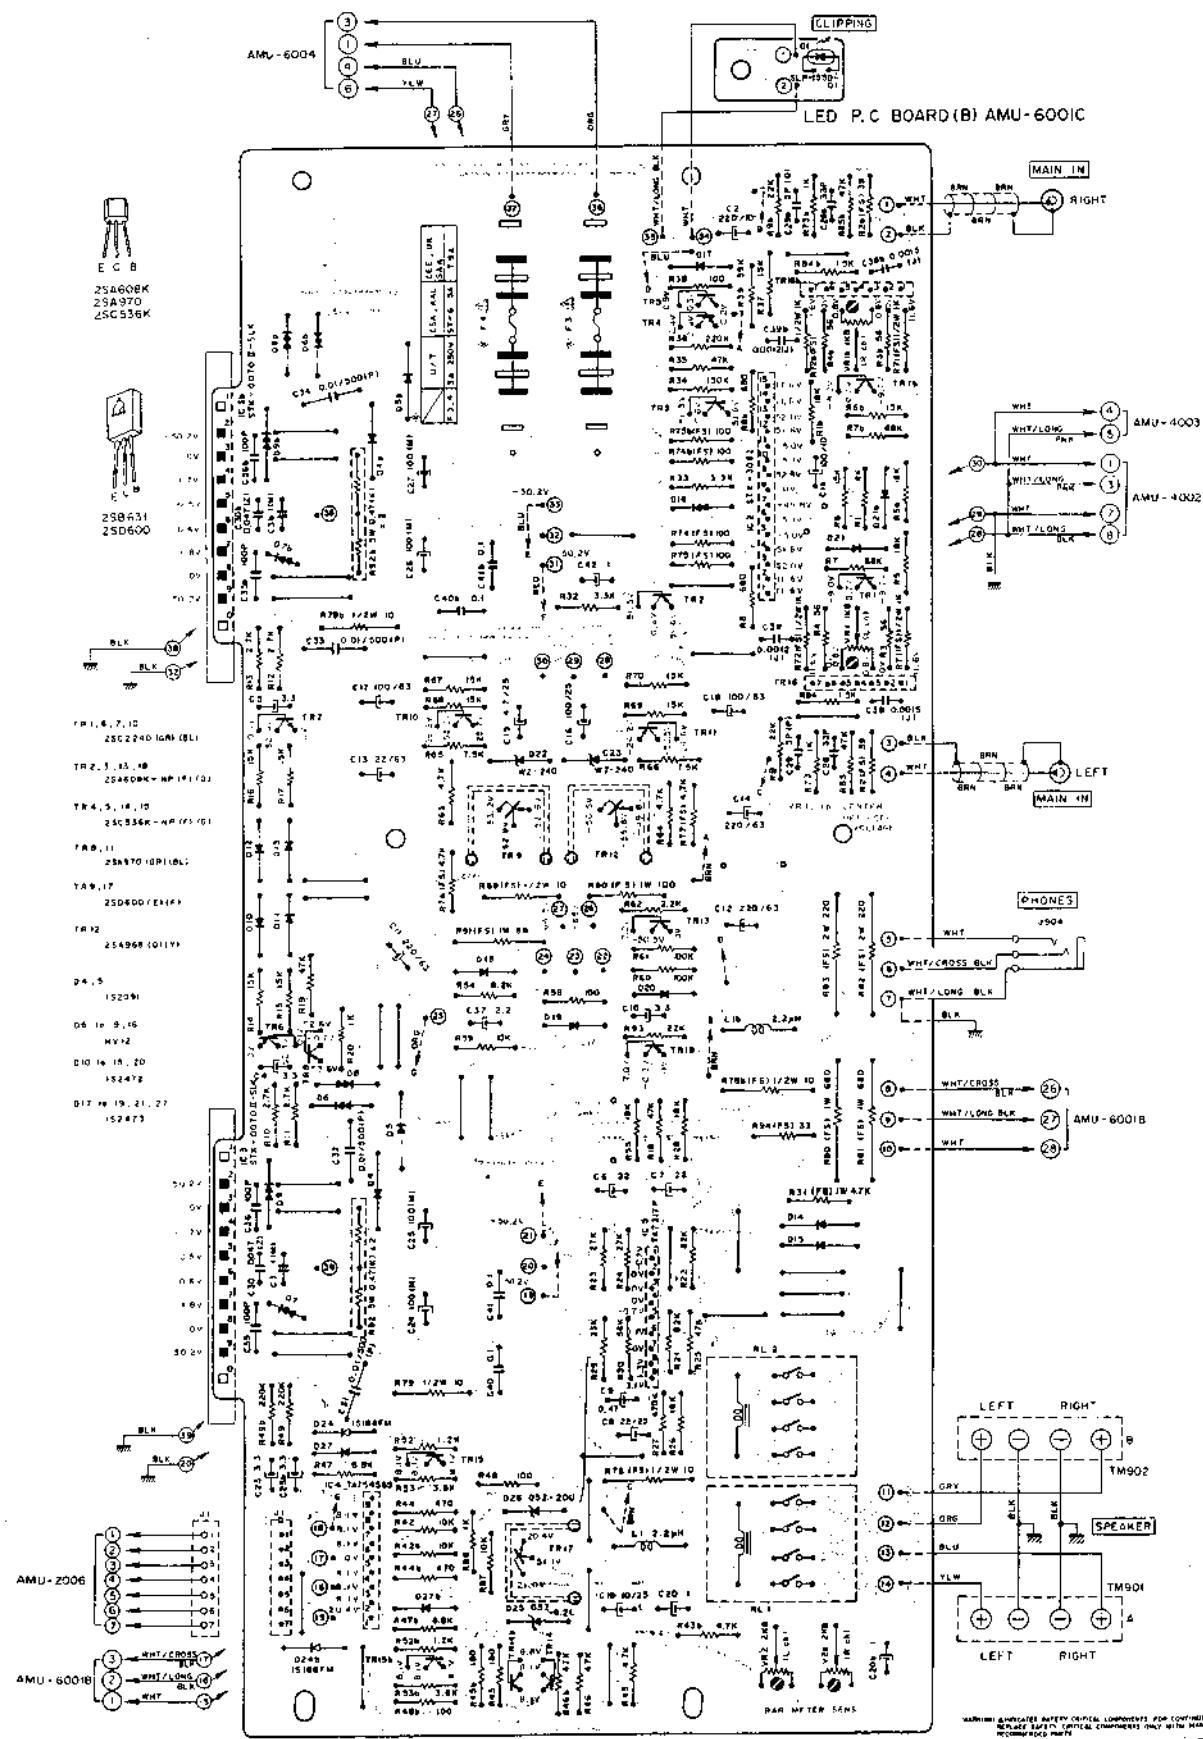


MAIN AMP P.C BOARD AMU-6001A

WARNING: INDICATES SAFETY CRITICAL COMPONENTS FOR CONTINUED SAFETY.  
REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S  
SPECIFIED PART NUMBER. LES COMPOSANTS SENSIBLES À LA SÉCURITÉ POUR  
MAINTENIR LE Niveau DE SÉCURITÉ DE L'APPAREIL, NE SOUSTITUEZ-LES  
QUE PAR DES PIÈCES RECOMMANDÉES PAR LE FABRICANT.


## 2) PUSH SWITCH P.C BOARD AMU-6001B

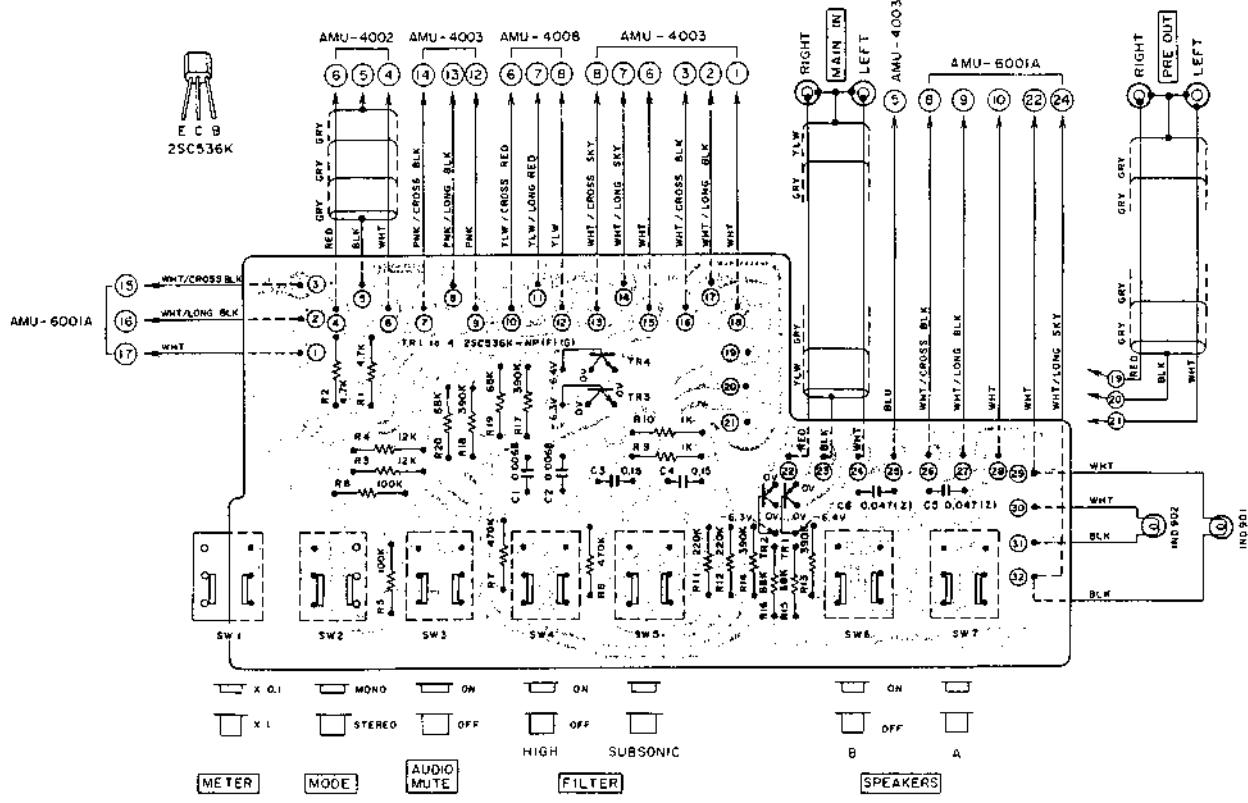


3) MC AMP P.C BOARD AMU-6002

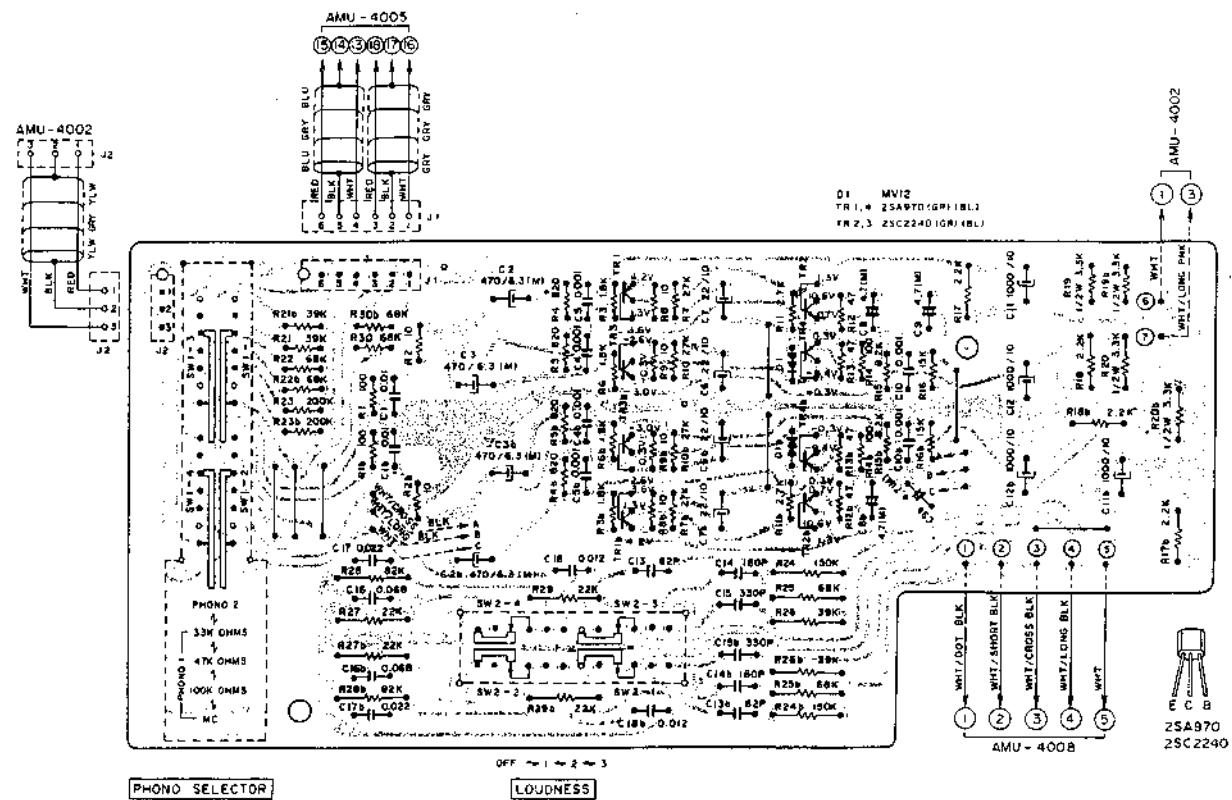


4) LED P.C BOARD (A) AMU-6003

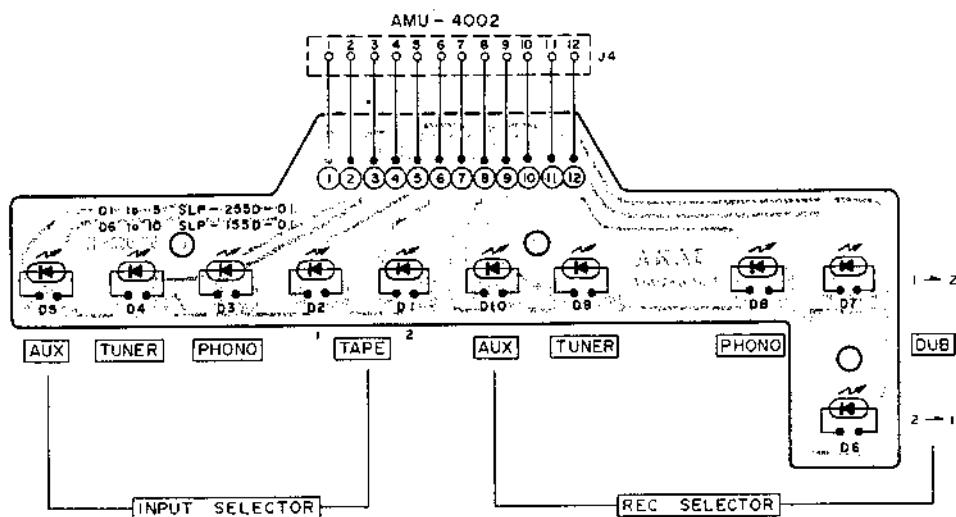


5) SELECTOR P.C BOARD AMU-4002

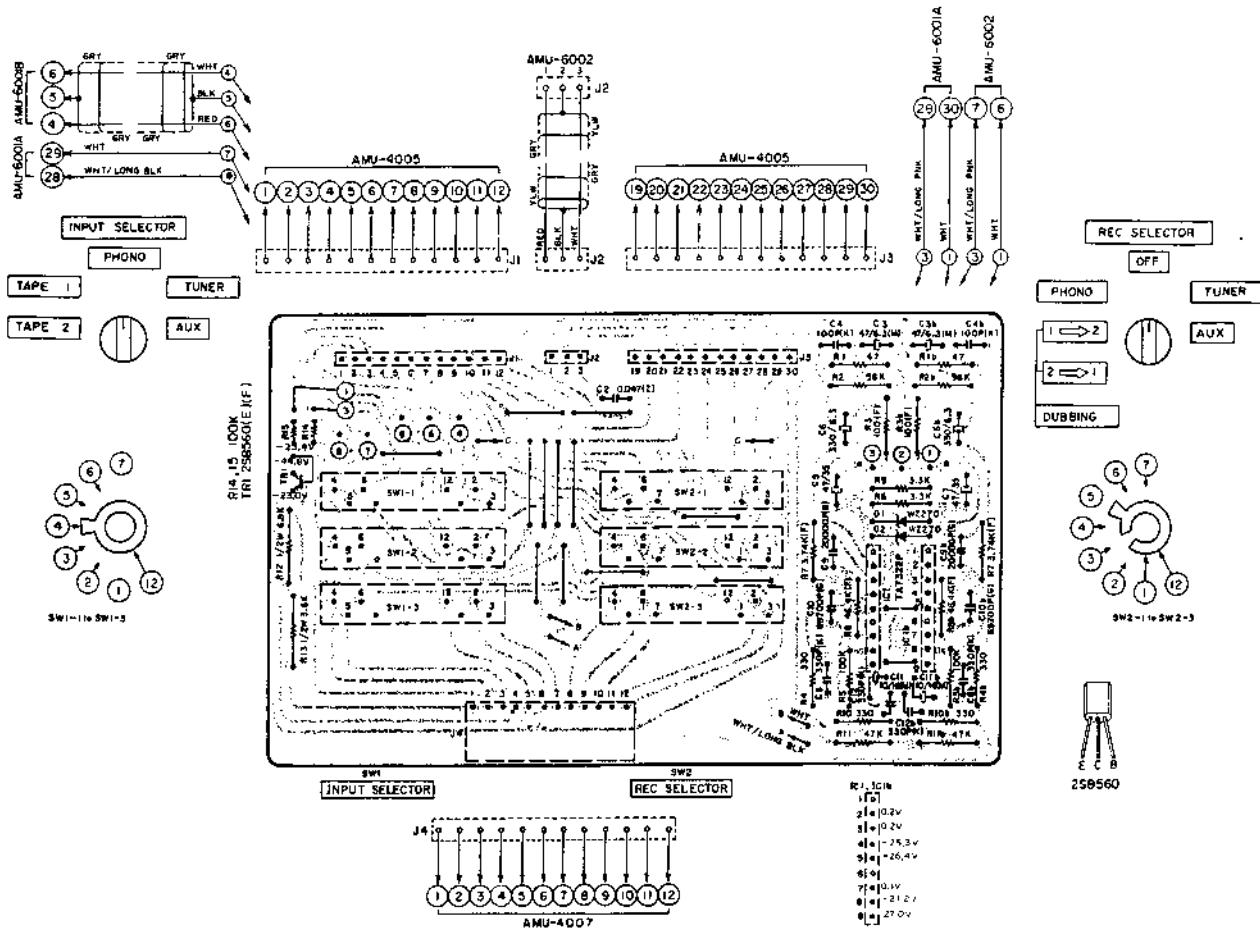


6) TONE CONTROL P.C BOARD AMU-4003

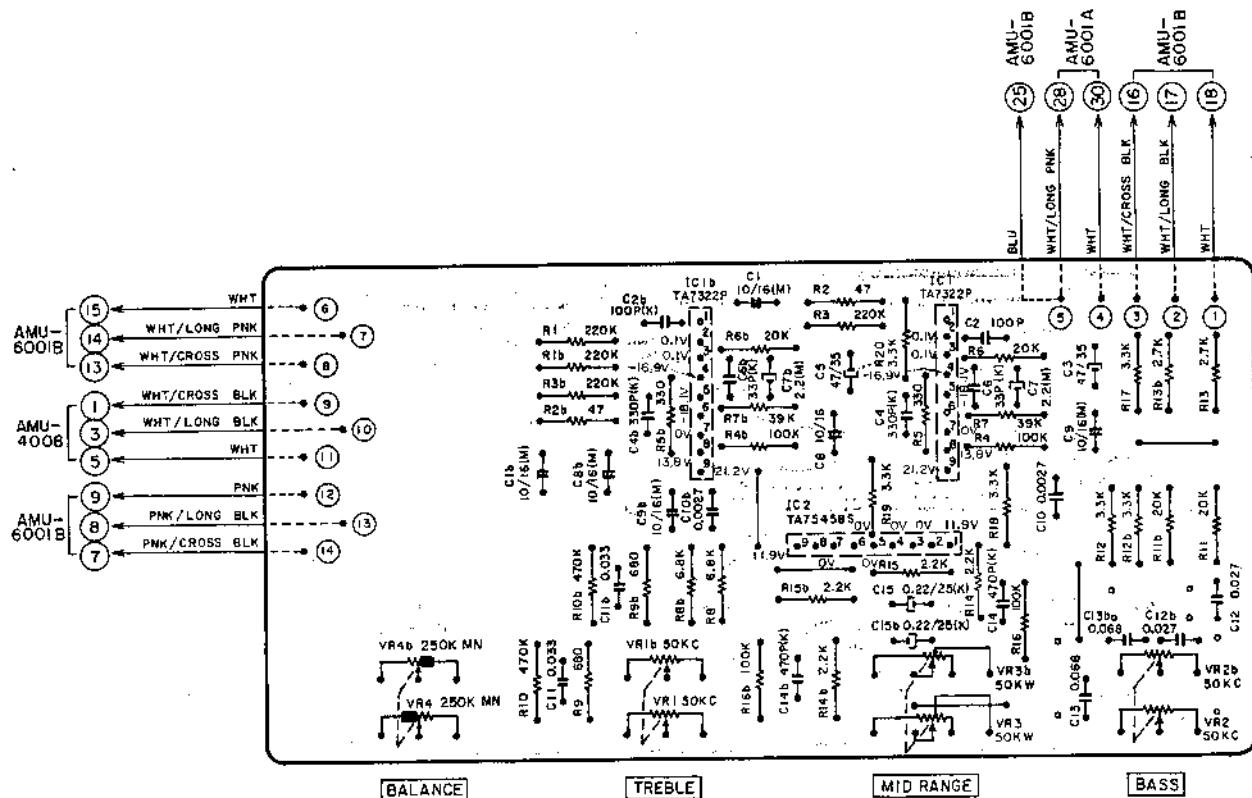


7) PIN JACK P.C BOARD AMU-4005

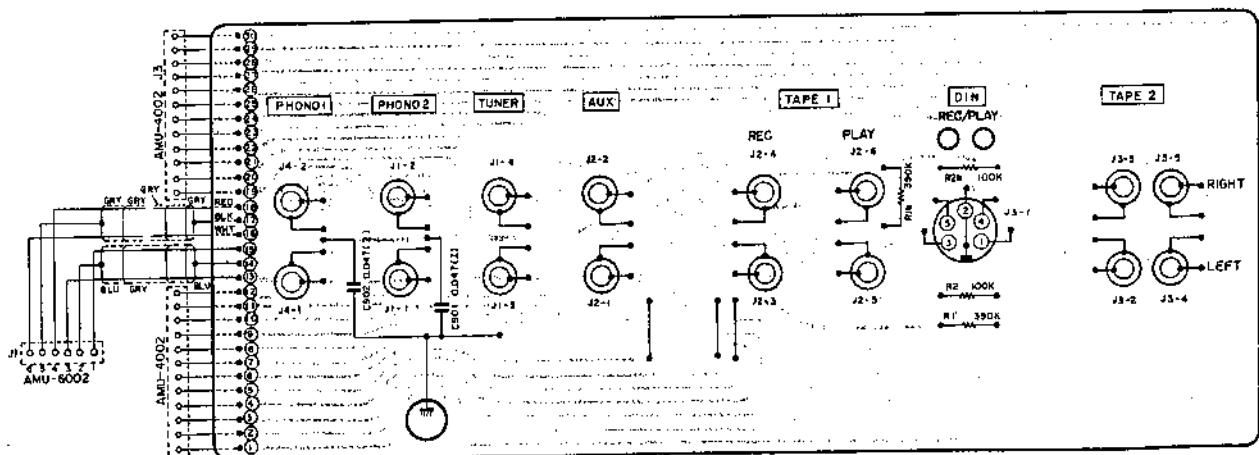


8) SLIDE VOLUME P.C BOARD AMU-4008

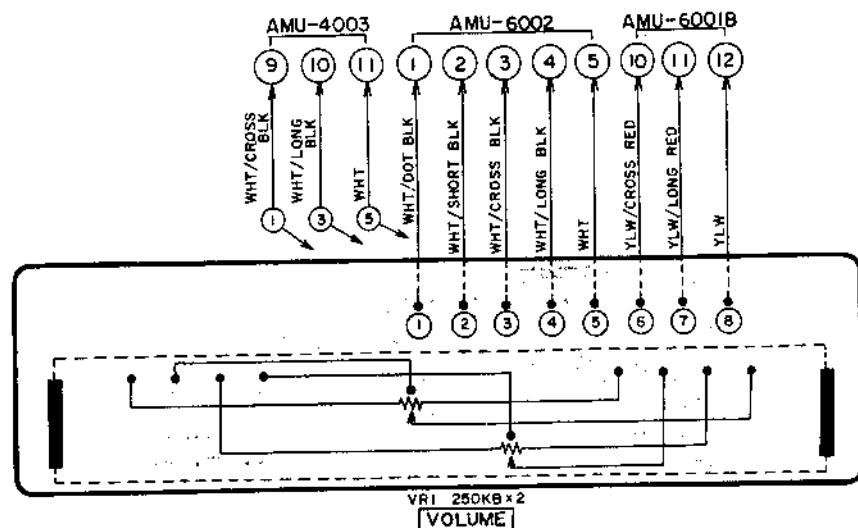

**9) BAR METER P.C BOARD AMU-2006**

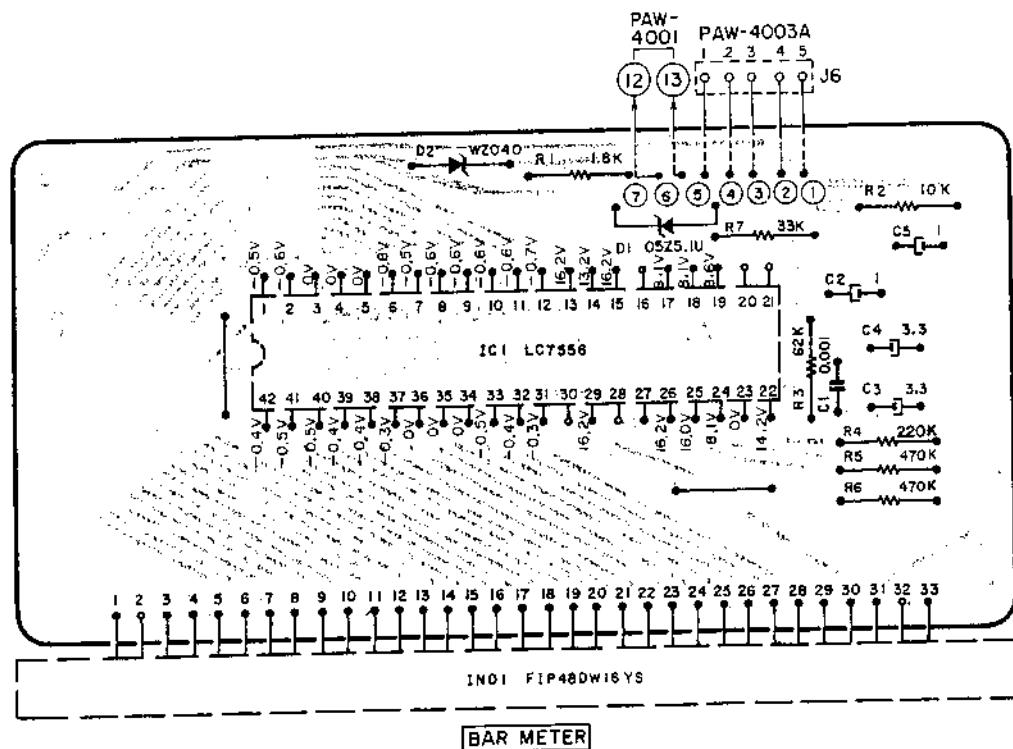


10) PULSE POWER SUPPLY P.C BOARD AMU-6004A (2ED)

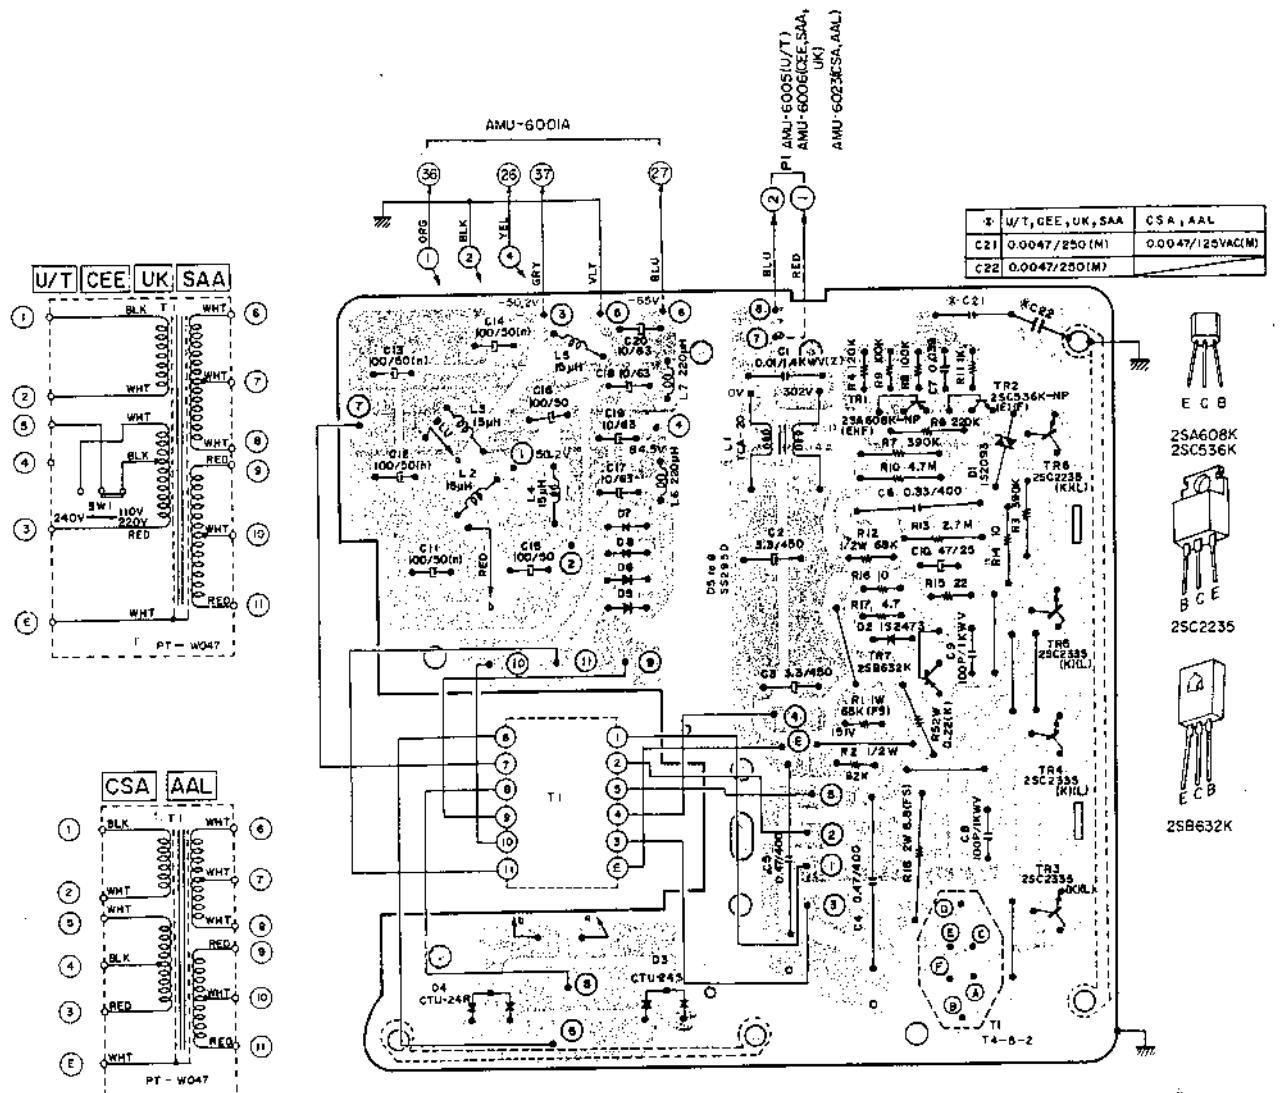


WARNING: & INDICATES SAFETY CRITICAL COMPONENTS FOR CONTINUED SAFETY,  
REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S  
RECOMMENDED PARTS


Avertissement: & indique les composants critiques de sûreté. Pour  
maintenir le degré de sécurité de l'appareil, ne remplacer les  
composants dont le fonctionnement est critique pour la sécurité  
que par des pièces recommandées par le fabricant.

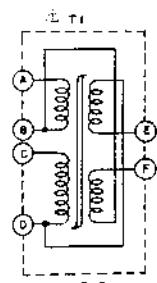


11) RECTIFIER P.C BOARD (A) (U/T) AMU-6005

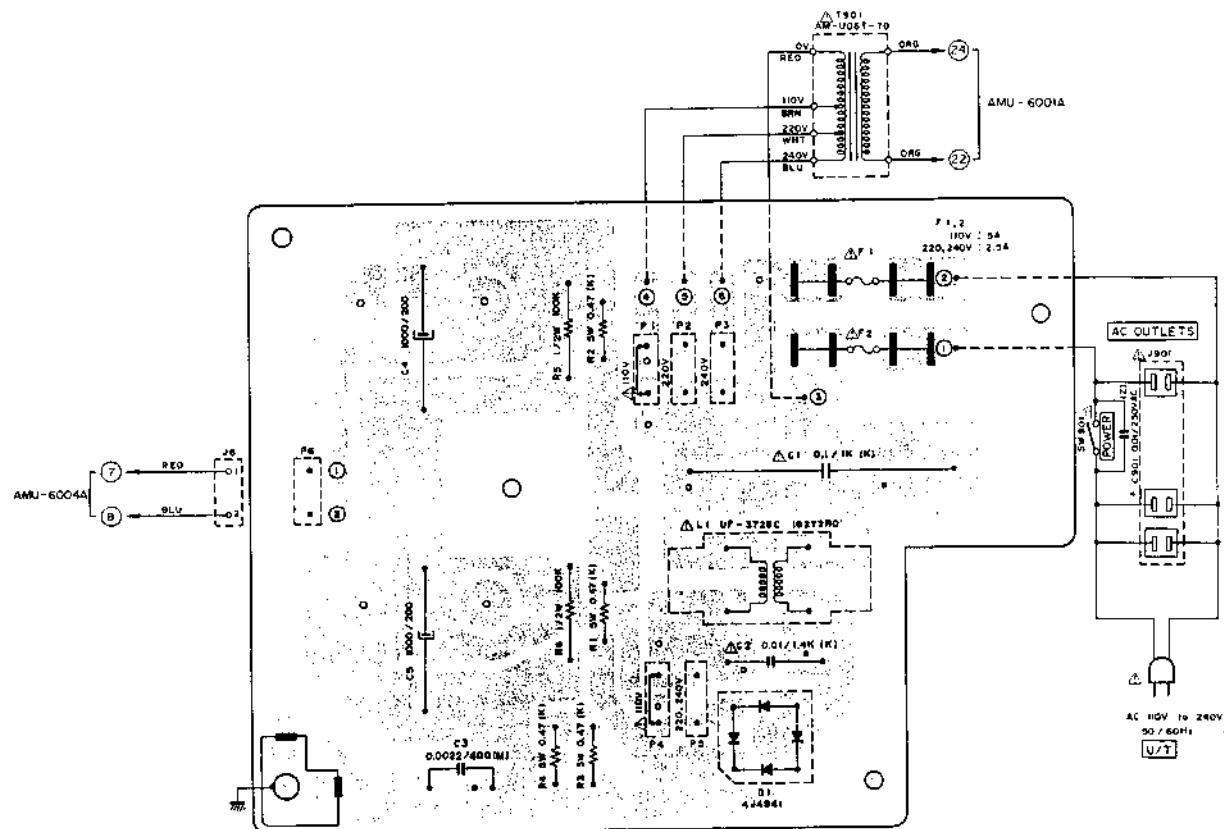

12) RECTIFIER P.C BOARD (C) (CEE, UK, SAA) AMU-6006

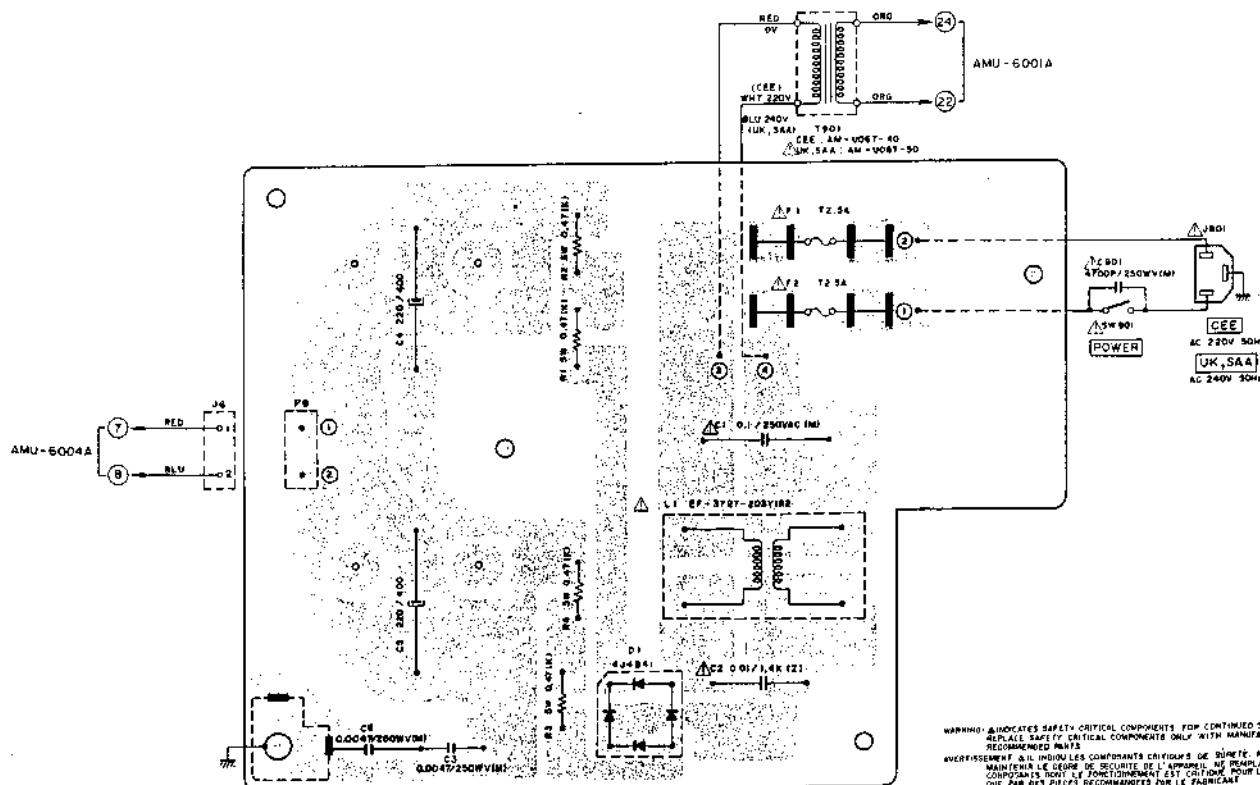

13) RECTIFIER P.C BOARD (B) (CSA, AAL) AMU-6023

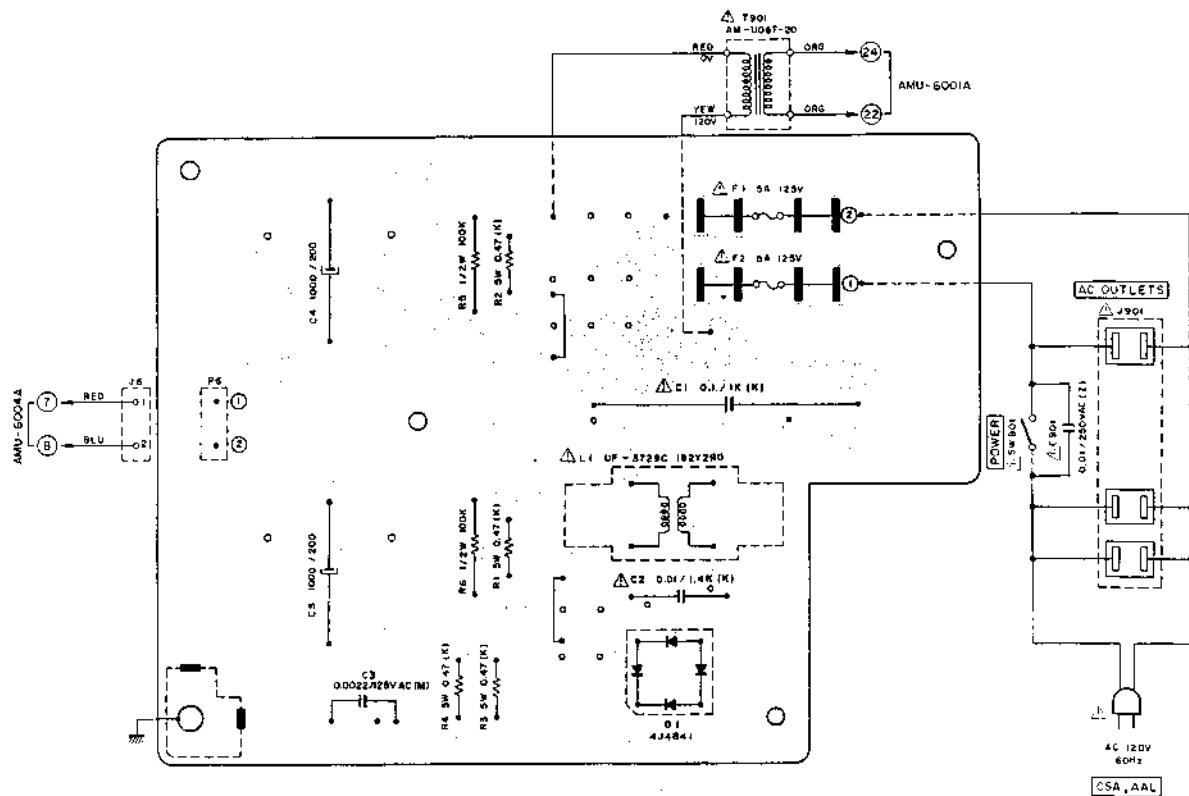

WARNING:  $\Delta$  INDICATES SAFETY CRITICAL COMPONENTS. FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS.

AVERTISSEMENT:  $\Delta$  IL INDIQUE LES COMPOSANTS CRITIQUES DE SURETE. POUR MAINTENIR LE DEGRE DE SECURITE DE L'APPAREIL, NE REMPLACER LES COMPOSANTS DONT LE FONCTIONNEMENT EST CRITIQUE POUR LA SURETE QUE PAR DES PIECES RECOMMANDÉES PAR LE FABRICANT.

SECTION 2

**PARTS LIST**

TABLE OF CONTENTS


|                                                         |    |
|---------------------------------------------------------|----|
| 1. RECOMMENDED SPARE PARTS LIST .....                   | 32 |
| 2. MAIN AMP P.C BOARD (AMU-6001A) BLOCK .....           | 34 |
| 3. MC AMP P.C BOARD (AMU-6002) BLOCK .....              | 35 |
| 4. PULSE POWER SUPPLY P.C BOARD (AMU-6004A) BLOCK ..... | 35 |
| 5. RECTIFIER P.C BOARD (AMU-6005/6006/6023) BLOCK ..... | 36 |
| 6. SELECTOR P.C BOARD (AMU-4002) BLOCK .....            | 36 |
| 7. TONE CONTROL P.C BOARD (AMU-4003) BLOCK .....        | 37 |
| 8. PUSH SW. P.C BOARD (AMU-6001B) BLOCK .....           | 37 |
| 9. ASSEMBLY BLOCK .....                                 | 38 |
| 10. FINAL ASSEMBLY BLOCK .....                          | 40 |
| INDEX .....                                             | 41 |

Resistor and Capacitor which is not listed in this parts list, please refer to COMMON LIST FOR SERVICE PARTS.

## HOW TO USE THIS PARTS LIST

- This parts list is compiled by various individual blocks based on assembly process.
- When ordering parts, please describe parts number, serial number, and model number in detail.
- How to read List

The reference number corresponds with illustration or photo number of that particular parts list.

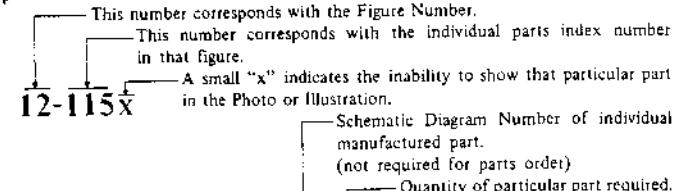

| Ref. No.                  | Parts No. | Description                | Schematic No. | Q'ty |
|---------------------------|-----------|----------------------------|---------------|------|
| <b>FLYWHEEL BLOCK #13</b> |           |                            |               |      |
| 12-115x                   | 800425    | Flywheel Block Assy. Comp. | RDG. #13      | 1    |
| 12-116                    | 244506    | Flywheel Only              | RD-233        | 1    |
| 12-117x                   | 244754    | Felt, Flywheel             | RD-275        | 1    |
| 12-118                    | 251324    | Main Metal Case            | RD-236        | 1    |
| 12-119                    | 253080    | Main Metal                 | RD-337        | 1    |

- The symbol numbers shown on the P.C. Board list can be matched with the Composite Views of Components of the Schematic Diagram or Service Manual.
- Please utilize separate "Common List for Service Parts" for Resistor Parts orders.
- The shape of the parts and parts name, etc. can be confirmed by comparing them with the parts shown on the Electrical Parts Table of P.C. Board.
- Both the kind of part and installation position can be determined by the Parts Number. To determine where a parts number is listed, utilize Parts Index at end of Parts List.  
It is necessary first of all to find the Parts Number. This can be accomplished by using the Reference Number listed at right of parts number in the Parts Index. (meaning of ref. no. outlined in Item 3 above).
- Utilize separate "Price List for Parts" to determine unit price. The most simple method of finding parts Price is to utilize the reference number.

**CAUTION:** 1. When placing an order for parts, be sure to list the parts no., model no., and description. There are instances in which if any of this information is omitted, parts cannot be shipped or the wrong parts will be delivered.  
2. Please be careful not to make a mistake in the parts no. If the parts no. is in error, a part different from the one ordered may be delivered.  
3. Because parts number and parts unit supply in the Preliminary Service Manual (Basic Parts List) may be partially changed, please use this parts list for all future reference.

**WARNING:** INDICATES SAFETY CRITICAL COMPONENTS. FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS.


**AVERTISSEMENT:** IL INDIQUE LES COMPOSANTS CRITIQUES DE SURETE. POUR MAINTENIR LE DEGRE DE SECURITE DE L'APPAREIL NE REMPLACER LES COMPOSANTS DONT LE FONCTIONNEMENT EST CRITIQUE POUR LA SECURITE QUE PAR DES PIECES RECOMMANDÉES PAR LE FABRICANT.

## AC INLET SYSTEM


This model is equipped with an AC INLET SYSTEM. Please refer to the AC INLET SYSTEM CHART below for the specific type. By the AC INLET SYSTEM, AC (mains) cord can be connected to and disconnected from the model because the model is provided with socket exclusively for AC (mains) cord on its main body. Please note, however, that certain models are not equipped with this system and has a built-in AC (mains) cord as before.

### AC INLET SYSTEM CHART

#### CLASS I

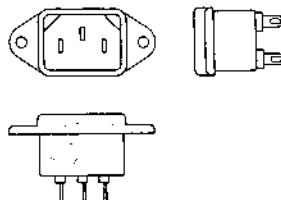

Picture 1  
AC INLET  
to be  
installed  
on machines

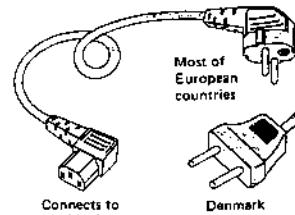

Connects to  
machine's  
AC Inlet




Danmark

Picture 2  
AC (mains)  
cord




U.K.



Australia  
differs according  
to wall socket

#### CLASS II

This mark indicating double insulation will be attached to machine's rear panel



Connects to  
machine's  
AC Inlet

Most of the  
European  
countries



U.K.

Australia  
differs according  
to wall socket

### Parts List for AC (mains) Cord Set

| Standard | Description | Type of AC Inlet        | Parts No. |
|----------|-------------|-------------------------|-----------|
| Class I  | CEE         | Cord Set CEE (3 cores)  | 3P        |
|          | BEAB        | Cord Set BEAB (3 cores) | 3P        |
|          | SAA         | Cord Set SAA (3 cores)  | 3P        |
|          | U/T         | Cord Set U/T (3 cores)  | EW302646  |
| Class II | CEE         | Cord Set CEE (2 cores)  | 2P        |
|          | BEAB        | Cord Set BEAB (2 cores) | 2P        |
|          | SAA         | Cord Set SAA (2 cores)  | 2P        |
|          | U/T         | Cord Set U/T (2 cores)  | EW302899  |

## 1. RECOMMENDED SPARE PARTS LIST

Because, if the parts listed below are on hand, almost any repair can be accomplished, we suggest that you stock these Recommended Spare Parts Items.

| Parts No. | Description                                     | Notes         |
|-----------|-------------------------------------------------|---------------|
| BA320373  | Main Amp P.C Board Comp. AM-U06 (CEE)           | CEE, UK, SAA  |
| BA320374  | Main Amp P.C Board Comp. AM-U06 (CSA)           | CSA, AAL      |
| BA320352  | Main Amp P.C Board Comp. AM-U06 (U/T)           |               |
| BT326589  | △ Power Trans. AM-U06T-20                       | CSA, AAL      |
| BT326590  | △ Power Trans. AM-U06T-40                       | CEE           |
| BT326591  | △ Power Trans. AM-U06T-50                       | UK, SAA       |
| BT326592  | △ Power Trans. AM-U06T-70                       | U/T           |
| BT326607  | Pulse Trans. PT-W06T                            |               |
| EC326583  | △ Metallized Mylar/C. (Vert.) 0.047μF (K) 400WV | CSA, AAL      |
| ED562386  | Germanium Diode 1S188AM                         |               |
| ED322772  | LED SLP-155D-01                                 |               |
| ED322773  | LED SLP-255D-01                                 |               |
| ED323513  | Silicon Diode CTU-24R                           |               |
| ED323512  | Silicon Diode CTU-24S                           |               |
| ED325275  | Silicon Diode SS295D                            |               |
| ED323056  | Silicon Diode 1S2091                            |               |
| ED214457  | Silicon Diode 1S2472                            |               |
| ED624903  | Silicon Diode 1S2473                            |               |
| ED560913  | Silicon Diode 1S2473 VE                         |               |
| ED326605  | Silicon Stack 4J4B41                            |               |
| ED323057  | Silicon Varistor MV12                           |               |
| ED323573  | Trigger Diode 1S2093                            |               |
| ED242368  | Zener Diode WZ-240                              |               |
| ED323059  | Zener Diode WZ-270                              |               |
| ED323534  | Zener Diode 05Z-20U                             |               |
| ED323535  | Zener Diode 05Z-8.2L                            |               |
| EF459843  | △ Fuse ST-6 5A                                  | CSA, AAL      |
| EF306951  | △ Fuse 2.5A 250V                                | U/T           |
| EF326613  | △ Fuse 5A 250V                                  | U/T           |
| EF623125  | △ Fuse (Semko T) 2.5AT                          | CEE, UK, SAA  |
| EF249851  | △ Fuse (Semko T) 5AT                            | CEE, UK, SAA  |
| EI326597  | IC STK-007Q(2)-SL                               |               |
| EI326595  | IC STK-3062                                     |               |
| EI323564  | IC TA7317P                                      |               |
| EI323054  | IC TA7322P                                      |               |
| EI322599  | IC TA75458S                                     |               |
| EI325947  | Osc. Trans. P.C Board Assy AM-U06               |               |
| EJ240535  | △ 3-Throw AC Outlet                             | U/T, CSA, AAL |
| EJ296853  | △ 3P Inlet CM-3                                 | CEE, UK, SAA  |
| EJ323145  | DIN 5P, Pin Jack 4P                             |               |

| Parts No. | Description                                    | Notes        |
|-----------|------------------------------------------------|--------------|
| EJ301199  | Headphone Jack 3P64M                           |              |
| EJ326596  | Pin Jack 2P                                    |              |
| EJ323143  | Pin Jack 4P                                    |              |
| EJ323144  | Pin Jack 6P                                    |              |
| EJ322582  | Push Terminal 4P                               |              |
| EL326611  | Lamp (Cord) 8V 50mA (530mm×2)                  |              |
| EO326617  | Phase Compensation Coil 2.2μH (K)              |              |
| EP313565  | Relay MS4U 48V DC                              |              |
| ES324162  | △ Push SW. SDG-IP TV-S                         | U/T          |
| ES679566  | △ Push SW. SDG1P-E 5A/80A 250V                 | CSA, AAL     |
| ES310839  | △ Push SW. SDG1P-E 5A/80A 250V                 | CEE, UK, SAA |
| ES326587  | Rotary Slide SW. SRZR044S                      |              |
| ES326586  | Rotary Slide SW. SRZW45S                       |              |
| ES323062  | Rotary SW. SRJ3035                             |              |
| ES323063  | Rotary SW. SRJ3036                             |              |
| ES306725  | Slide SW. I-S4017                              |              |
| ES326593  | 7-Throw Push SW. J-K2113                       |              |
| ET311792  | FET 2SK150 (GR) (Y) (BL)                       |              |
| ET323529  | Transistor 2SA608K-NP (E) (F)                  |              |
| ET322244  | Transistor 2SA608K-NP (F) (G)                  |              |
| ET311791  | Transistor 2SA968 (O) (Y)                      |              |
| ET305463  | Transistor 2SA970 (GR) (BL)                    |              |
| ET219868  | Transistor 2SB560 (E) (F)                      |              |
| ET322598  | Transistor 2SB632K (E) (F)                     |              |
| ET307195  | Transistor 2SC2240 (GR) (BL)                   |              |
| ET323572  | Transistor 2SC2335 (K)                         |              |
| ET316171  | Transistor 2SC536K-NP (E) (F)                  |              |
| ET316643  | Transistor 2SC536K-NP (F) (G)                  |              |
| ET323105  | Transistor 2SD600 (E) (F)                      |              |
| EV478686  | Semi-Fixed/Vol. V8K4-1 1kΩ                     |              |
| EV464196  | Semi-Fixed/Vol. V8K4-1 2kΩ                     |              |
| EV324346  | Single-Axial 2-Throw/Vol. V16L4G3N 250kΩ×2     |              |
| EV323061  | 2-Throw Slide/Vol. WSDA119F02 250k (Special)×2 |              |
| EV323053  | 2-Throw/Vol. GM70ED78A 50kW×2                  |              |
| EV323051  | 2-Throw/Vol. GM70E838A-50kCx2                  |              |
| EV323052  | 2-Throw/Vol. GM70E839A-50kCx2                  |              |
| EW306428  | △ AC Cord (U/T)                                |              |
| EW305691  | △ AC Cord CUL                                  | CSA, AAL     |

**2. MAIN AMP P.C BOARD (AMU-6001A)  
BLOCK**

| Symbol No. | Parts No. | Description                             | Schematic No.           | Symbol No. | Parts No.                             | Description                                       | Schematic No. |
|------------|-----------|-----------------------------------------|-------------------------|------------|---------------------------------------|---------------------------------------------------|---------------|
| 2-1        | BA320352  | Main Amp P.C Board Comp. AM-U06 (U/T)   | AML-6008                | 2-R90      | ER323996                              | Metal Oxide Film/R.<br>F 1W 100 ohms(J)           | 35-19-4       |
| 2-2        | BA320374  | Main Amp P.C Board Comp. AM-U06 (CSA)   | (CSA, AAL) AML-6008     | 2-R91      | ER324359                              | Metal Oxide Film/R.<br>F 1W 56 ohms(J)            | 35-19-4       |
| 2-3        | BA320373  | Main Amp P.C Board Comp. AM-U06 (CEE)   | (CEE, UK, SAA) AMU-6038 | 2-R92      | ER322590                              | Cement/R. (Metal Plate)<br>5W (0.47+0.47) ohms(K) | 35-19-84      |
| 2-IC2      | EC1326595 | IC STK-3062<br>(5-B-F)                  | 1-C3                    | EC657044   | NP/C. (Vert.) 1μF(M)                  | 35-11-30                                          |               |
| 2-IC4      | EC1322599 | IC TA75458S                             | 2-C31to34               | EC204671   | Ceramic/C. DD31-4E<br>0.01μF(P) 500WV | 24-5-66                                           |               |
| 2-IC5      | EC1323564 | IC TA7317P                              | 2-4                     | ZS323495   | Tapping Screw, #2 BR 3x6              | 24-5-66                                           |               |
| 2-TR1      | ET307195  | Transistor<br>2SC2140 (GR)(BL)          | 2-5                     | ZS447840   | Tapping Screw, #2 BR 3x8              | 24-5-66                                           |               |
| 2-TR2,3    | ET322244  | Transistor<br>2SA608K-NP(F)(G)          | 25-1-373                |            |                                       |                                                   |               |
| 2-TR4,5    | ET316643  | Transistor<br>2SC536K-NP(F)(G)          | 25-1-372                |            |                                       |                                                   |               |
| 2-TR6,7    | ET307195  | Transistor<br>2SC2240(GR)(BL)           | 25-1-302                |            |                                       |                                                   |               |
| 2-TR8      | ET305463  | Transistor<br>2SA970(GR)(BL)            | 25-1-303                |            |                                       |                                                   |               |
| 2-TR9      | ET323105  | Transistor 2SD600(E)(F)                 | 25-1-303                |            |                                       |                                                   |               |
| 2-TR10     | ET307195  | Transistor<br>2SC2240(GR)(BL)           | 25-1-302                |            |                                       |                                                   |               |
| 2-TR11     | ET305463  | Transistor<br>2SA970(GR)(BL)            | 25-1-303                |            |                                       |                                                   |               |
| 2-TR12     | ET311791  | Transistor 2SA968(O)(Y)                 | 25-1-303                |            |                                       |                                                   |               |
| 2-TR13     | ET322244  | Transistor<br>2SA608K-NP(F)(G)          | 25-1-375                |            |                                       |                                                   |               |
| 2-TR14,15  | ET316643  | Transistor<br>2SC536K-NP(F)(G)          | 25-1-362                |            |                                       |                                                   |               |
| 2-TR16     | ET311792  | FET 2SK150(GR)(Y)(BL)                   | 25-1-32                 |            |                                       |                                                   |               |
| 2-TR17     | ET323105  | Transistor 2SD600(E)(F)                 | 25-1-303                |            |                                       |                                                   |               |
| 2-TR18     | ET322244  | Transistor<br>2SA608-NP(F)(G)           | 25-1-375                |            |                                       |                                                   |               |
| 2-D4,5     | ED323056  | Silicon Diode 1S2091                    | 25-3-66                 |            |                                       |                                                   |               |
| 2-D6to9    | ED123057  | Silicon Varistor MV12                   | 45-10-16                |            |                                       |                                                   |               |
| 2-D10to15  | ED114457  | Silicon Diode 1S2472                    | 45-3-41                 |            |                                       |                                                   |               |
| 2-D16      | ED323057  | Silicon Varistor MV12                   | 45-10-16                |            |                                       |                                                   |               |
| 2-D17to19  | ED624903  | Silicon Diode 1S2473                    | 45-3-28                 |            |                                       |                                                   |               |
| 2-D20      | ED214457  | Silicon Diode 1S2472                    | 45-3-41                 |            |                                       |                                                   |               |
| 2-D21      | ED624903  | Silicon Diode 1S2473                    | 45-3-28                 |            |                                       |                                                   |               |
| 2-D22,23   | ED242368  | Zener Diode WZ-240                      | 45-6-37                 |            |                                       |                                                   |               |
| 2-D24      | ED562386  | Germanium Diode<br>1ST88AM              | 45-3-24                 |            |                                       |                                                   |               |
| 2-D25      | ED323535  | Zener Diode 05Z-2L                      | 45-6-76                 |            |                                       |                                                   |               |
| 2-D26      | ED323534  | Zener Diode 05Z-20U                     | 45-6-76                 |            |                                       |                                                   |               |
| 2-D27      | ED624903  | Silicon Diode 1S2473                    | 45-3-28                 |            |                                       |                                                   |               |
| 2-VR1      | EV478686  | Semi-Fixed/Vol.<br>V8K4-1 1kΩ           | 35-10-266               |            |                                       |                                                   |               |
| 2-VR2      | EV464196  | Semi-Fixed/Vol.<br>V8K4-1 2kΩ           | 36-10-266               |            |                                       |                                                   |               |
| 2-RL1,2    | EP313565  | Relay MS4U 48V DC<br>(T-1-39)           |                         |            |                                       |                                                   |               |
| 2-L1       | EO326617  | Phase Compensation Coil<br>2.2mH(X)     | 23-1-424                |            |                                       |                                                   |               |
| 2-R2       | ER326615  | Carbon/R. F 1/4W<br>39 ohms(J)          | 35-11-30                |            |                                       |                                                   |               |
| 2-R31      | ER313774  | Metal Oxide Film/R.<br>F 1W 4.7k (J)    | 35-19-1                 |            |                                       |                                                   |               |
| 2-R71,72   | ER323074  | Carbon/R. F 1/4W 1k(J)                  | 35-11-30                |            |                                       |                                                   |               |
| 2-R74,75   | ER322591  | Carbon/R. F 1/4W<br>100 ohms(J)         | 35-11-30                |            |                                       |                                                   |               |
| 2-R76,77   | ER323075  | Carbon/R. F 1/4W<br>4.7k (J)            | 35-11-30                |            |                                       |                                                   |               |
| 2-R78      | ER308875  | Carbon/R. F 1/2W<br>10 ohms(J)          | 35-11-27                |            |                                       |                                                   |               |
| 2-R80,81   | ER326616  | Metal Oxide Film/R.<br>F 1W 680 ohms(J) | 35-19-4                 |            |                                       |                                                   |               |
| 2-R82,83   | ER328136  | Metal Oxide Film/R.<br>F 3W 220 ohms(J) | 35-19-5                 |            |                                       |                                                   |               |
| 2-R89      | ER308875  | Carbon/R. F 1/2W<br>10 ohms(J)          | 35-11-21                |            |                                       |                                                   |               |

**3. MC AMP P.C BOARD (AMU-6002) BLOCK**

| Symbol No. | Parts No. | Description                   | Schematic No.     |
|------------|-----------|-------------------------------|-------------------|
| 3-TR1      | ET305463  | Transistor<br>2SA970(GR)(BL)  | 45-1-303          |
| 3-TR2,3    | ET307195  | Transistor<br>2SC2240(GR)(BL) | 45-1-302          |
| 3-TR4      | ET305463  | Transistor<br>2SA970(GR)(BL)  | 45-1-303          |
| 3-DI       | ED323057  | Silicon Varistor MV12         | 45-10-16          |
| 3-SW1      | FS-326586 | Rotary Slide SW.              | SRZW45S 25-6-197  |
| 3-SW2      | ES326587  | Rotary Slide SW.              | SRZR044S 25-6-198 |
| 3-C8,9     | EC324922  | NP/C. 4.7μF(M) 50WV           | 24-17-35          |
| 3-C14      | EC324109  | Styrol/C. 180PF(J) 50WV       | 24-11-17          |
| 3-C15      | EC314995  | Styrol/C. 330PF(J) 50WV       | 24-11-17          |

**4. PULSE POWER SUPPLY P.C BOARD  
(AMU-6004A) BLOCK**

| Symbol No. | Parts No. | Description                                                         | Schematic No. |
|------------|-----------|---------------------------------------------------------------------|---------------|
| 4-TR1      | ET323529  | Transistor<br>2SA608K-NP(E)(F)                                      | 45-1-373      |
| 4-TR2      | ET316171  | Transistor<br>2SC536K-NP(E)(F)                                      | 45-1-381      |
| 4-TR3to6   | ET323572  | Transistor 2SC2335(K)                                               | 45-1-382      |
| 4-TR7      | ET322598  | Transistor 2SB632K(E)(F)                                            | 45-1-374      |
| 4-D1       | ED323573  | Trigger Diode 1S2093                                                | 45-3-63       |
| 4-D2       | ED560913  | Silicon Diode 1S2473 VE                                             | 45-3-22       |
| 4-D3       | ED323512  | Silicon Diode CTU-24S                                               | 45-2-101      |
| 4-D4       | ED323513  | Silicon Diode CTU-24R                                               | 45-2-102      |
| 4-D5to8    | ED325275  | Silicon Diode SS295D                                                | 45-2-105      |
| 4-T1       | ET1325947 | OSC. Trans. P.C Board<br>Assy AM-U06                                | AMU-6034      |
| 4-T1       | BT326607  | Pulse Trans. PT-W06T                                                | 23-1-418      |
| 4-SW1      | ES306725  | Slide SW. J-S4017                                                   | 25-3-157      |
| 4-L1       | EO325281  | Choke Coil TCA-20                                                   | 23-1-411      |
| 4-L2to5    | EO325278  | Inductor TCD-35                                                     | 23-1-412      |
| 4-L6       | EO325280  | Choke Coil 220μH                                                    | 23-1-413      |
| 4-R1       | ER325277  | Metal Oxide Film/R.<br>F 1W 68k (J)                                 | 35-19-1       |
| 4-R5       | ER324222  | Metal Plate/R.<br>2W 0.22 ohm(K)                                    | 35-16-38      |
| 4-R18      | ER325288  | Metal Oxide Film/R.<br>F 2W 6.8 ohms(J)                             | 35-19-1       |
| 4-C2,3     | EC326608  | Elect./C. (Vert.)<br>10μF 450WV                                     | 24-12-76      |
| 4-C4,5     | EC326609  | Metalized Mylar/C.<br>(Vert.) 0.68μF(K) 400WV                       | 24-16-28      |
| 4-C6       | EC326316  | Metalized Mylar/C.<br>(Vert.) 0.33μF(K) 400WV                       | 24-16-28      |
| 4-C8,9     | EC323517  | Ceramic/C. (Vert.)<br>DP3100 B 100PF(K)<br>1KW                      | 24-5-101      |
| 4-C21      | EC325286  | Ceramic/C. (Vert.) HS<br>D 0.0022μF(M) 400WV<br>(U/T, CEE, UK, SAA) | 24-5-104      |
| 4-C21      | EC325266  | Ceramic/C. D 0.0047μF(P) 125VAC<br>(CSA, AAL)                       | 24-5-87       |
| 4-1        | ZG323474  | Hold Spring                                                         | UCW-5023      |
| 4-2        | ZS419670  | Screw, Pan 3x12                                                     |               |
| 4-3        | ZS380046  | Screw, Pan 3x10                                                     |               |
| 4-4        | ZS379350  | Screw, Pan 3x6                                                      |               |
| 4-5        | ZS558101  | Screw, Pan 3x6 w/Washer                                             |               |
| 4-6        | TA323481  | Packing (A)                                                         | UCW-5029      |

**5. RECTIFIER P.C BOARD  
(AMU-6005/6006/6023) BLOCK**

| Symbol No. | Parts No. | Description                                                         | Schematic No. |
|------------|-----------|---------------------------------------------------------------------|---------------|
| S-D1       | ED326605  | Silicon Stack 4J4B41                                                | 45-2-106      |
| S-L1       | ER325265  | △ Power Filter<br>UF-3729 C 182Y2R0<br>(U/T, CSA, AAL)              | 23-1-103      |
| S-L1       | ER325268  | △ Power Filter<br>EF-3727-203Y1R2<br>(CEE, UK, SAA)                 | 23-1-114      |
| S-R104     | ER622978  | Metal Plate/R MPC71F1<br>SW 0.47 ohm(K)                             | 35-16-18      |
| S-C1       | EC323557  | △ Oil Paper/C.<br>0.1μF(K) 1kWV (U/T)                               | 24-6-1        |
| S-C1       | EC326827  | △ Metallized Mylar/C.<br>(Vert.) 0.1μF(M)<br>125VAC (CSA, AAL)      | 24-16-30      |
| S-C1       | EC258298  | △ MP/C. PEM271<br>0.1μF(M) 250WV<br>(CEE, UK, SAA)                  | 24-9-118      |
| S-C2       | EC325671  | MP/C. (Vert.)<br>0.01μF(M) 250WV (U/T)                              | 24-1-134      |
| S-C2       | EC314688  | Ceramic/C. DE7150 FZ<br>0.01μF(P) 25WV<br>(CSA, AAL)                | 24-3-31       |
| S-C2       | EC325671  | MP/C. (Vert.) 0.01μF(M)<br>250WV (CEE, UK, SAA)                     | 24-9-134      |
| S-C3       | EC325286  | Ceramic/C. (Vert.) HS<br>D 0.0022μF(M) 400WV<br>(U/T, CEE, UK, SAA) | 24-5-104      |
| S-C3       | EC326828  | Ceramic/C. DE7160 F<br>0.0022μF(M) 125VAC<br>(CSA, AAL)             | 24-5-87       |
| S-C4,5     | EC326604  | Elect./C. 1000μF 200WV<br>(U/T, CSA, AAL)                           | 24-12-74      |
| S-C4,5     | EC326606  | Elect./C. 220μF 400WV<br>(CEE, UK, SAA)                             | 24-12-75      |

**6. SELECTOR P.C BOARD  
(AMU-4002) BLOCK**

| Symbol No. | Parts No. | Description                                  | Schematic No. |
|------------|-----------|----------------------------------------------|---------------|
| 6-IC1      | EI323054  | IC TA7322P                                   | 45-8-419      |
| 6-TR1      | ET219868  | Transistor 2SB560(E)(F)                      | 45-1-132      |
| 6-D1,2     | ED323059  | Zener Diode W2-270                           | 45-6-61       |
| 6-SW1      | ES323062  | Rotary SW. SRJ3035                           | 25-6-191      |
| 6-SW2      | ES323063  | Rotary SW. SRJ3036                           | 25-6-192      |
| 6-R3       | ER323067  | Metal Oxide Film/R.<br>1/4W 100 ohms(F)      | 35-17-20      |
| 6-R7       | ER323351  | Metal Oxide Film/R.<br>1/4W 3.74k (F)        | 35-17-20      |
| 6-R8       | ER323069  | Metal Oxide Film/R.<br>1/4W 46.4 ohms(F)     | 35-17-20      |
| 6-C3       | EC318358  | NP/C. 47μF(M) 6.3WV                          | 24-17-35      |
| 6-C9       | EC324102  | Polypropylene/C. (Vert.)<br>0.02μF(G) 50WV   | 24-22-10      |
| 6-C10      | EC324103  | Polypropylene/C. (Vert.)<br>0.0697μF(G) 50WV | 24-22-10      |
| 6-C11      | EC323055  | NP/C. 10μF(M) 16WV                           | 24-17-35      |

**7. TONE CONTROL P.C BOARD  
(AMU-4003) BLOCK**

| Symbol No. | Parts No. | Description                                   | Schematic No. |
|------------|-----------|-----------------------------------------------|---------------|
| 7-IC1      | EI323054  | IC TA7322P                                    | 45-8-419      |
| 7-IC2      | EI322599  | IC TA75458S                                   | 45-8-415      |
| 7-VR1      | EV323051  | 2-Throw/Vol.<br>GM70E838A-50kCx2              | 36-22-53      |
| 7-VR2      | EV323052  | 2-Throw/Vol.<br>GM70E839A-50kCx2              | 36-22-53      |
| 7-VR3      | EV323053  | 2-Throw/Vol.<br>GM70ED78A-50kWx2              | 36-22-60      |
| 7-VR4      | EV324346  | Single-Axial 2-Throw/Vol.<br>V16L4G3N 250kCx2 | 36-22-65      |
| 7-C1       | EC323055  | NP/C. 10μF(M) 16WV                            | 24-17-35      |
| 7-C8,9     | EC323055  | NP/C. 10μF(M) 16WV                            | 24-17-35      |
| 7-C15      | EC243393  | Solid Aluminum/C.<br>(Vert.) 0.22μF(K) 10WV   | 24-19-2       |

**8. PUSH SW. P.C BOARD  
(AMU-6001B) BLOCK**


| Symbol No. | Parts No. | Description                          | Schematic No. |
|------------|-----------|--------------------------------------|---------------|
| 8-TR1to4   | ET316643  | Transistor<br>2SC536K-NP(F)(G)       | 45-1-362      |
| 8-SWIto7   | ES326593  | 7-Throw Push SW.<br>J-K2113 25-5-381 |               |

When ordering parts, please quote Parts Number, Description and Model Number.

When ordering parts, please quote Parts Number, Description and Model Number.

---

## 9. ASSEMBLY BLOCK

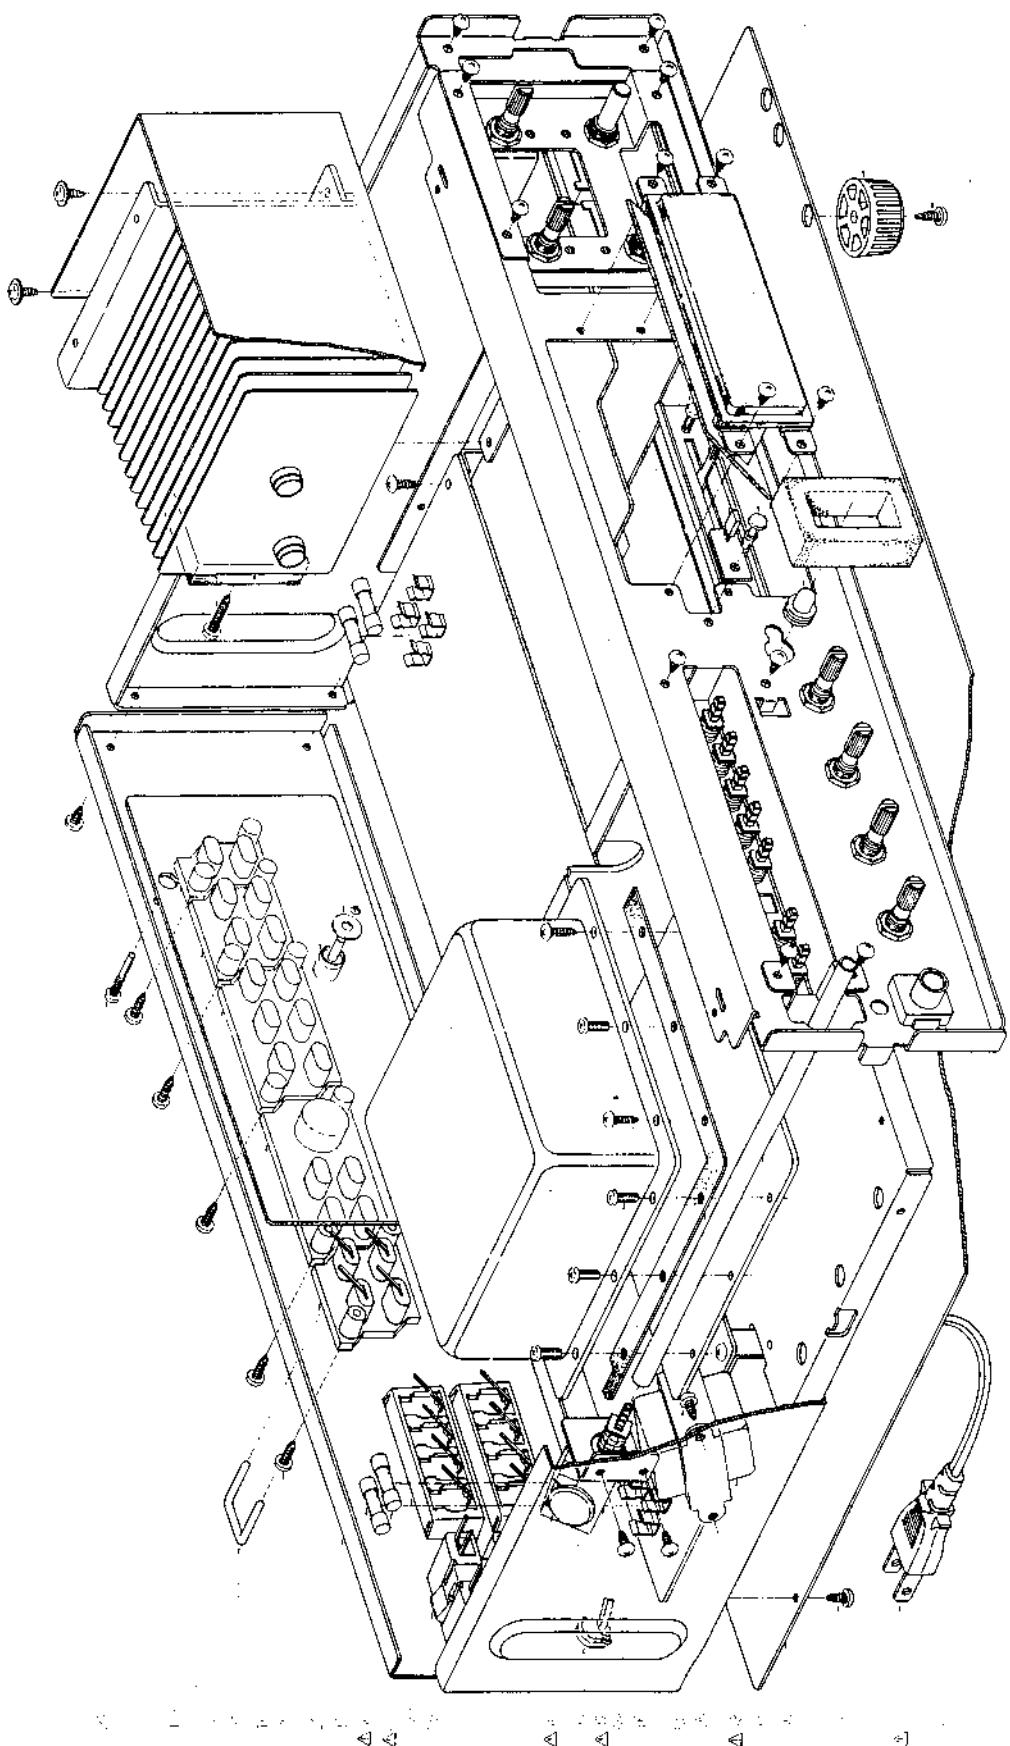


## ASSEMBLY BLOCK

| Ref.<br>No. | Parts No. | Description                                            | Schematic<br>No. | Ref.<br>No. | Parts No. | Description                                   | Schematic<br>No. |
|-------------|-----------|--------------------------------------------------------|------------------|-------------|-----------|-----------------------------------------------|------------------|
|             |           | LED P.C BOARD (A) BLOCK                                |                  | 9-45        | ZW698308  | Nylon Rivet (NRB) 3x5.5<br>(Black)            | 2-7-54           |
| 9-1x        | ED322773  | LED SLP-255D-01                                        | 45-15-27         | 9-46        | E1326611  | Lamp (Cord) 8V 50mA<br>(550mmx2)              | 28-2-34          |
| 9-2x        | ED322772  | LED SLP-155D-01                                        | 45-15-28         | 9-47        | E1301199  | Headphone Jack 3P64M<br>(U/T)                 | 31-2-32          |
| 9-3x        | SE326570  | LED Escutcheon                                         | AMU-6014         | 9-48        | BT326592  | △ Power Trans. AM-U06T-70<br>(CSA, AAL)       | 38-4-33          |
| 9-4x        | ZS468101  | Tapping Screw #2, Pan 2.6x6                            |                  | 9-49x       | BT326589  | △ Power Trans. AM-U06T-70<br>(CEE)            | 38-4-33          |
|             |           | LED P.C BOARD (B) BLOCK                                |                  | 9-50x       | BT326590  | △ Power Trans. AM-U06T-70<br>(UK, SAA)        | 38-4-33          |
| 9-5         | ED322772  | LED SLP-155D-01                                        | 45-15-28         | 9-51x       | BT326591  | △ Power Trans. AM-U06T-50<br>(U/K, SAA)       | 38-4-33          |
|             |           | SLIDE VOL. P.C BOARD BLOCK                             |                  | 9-52        | ZS455207  | Tapping Screw, #2 BR 3x5                      |                  |
| 9-6         | EV323061  | 2 Throw Slide/Vol.<br>WSDA119FOZ                       |                  | 9-53x       | ZS434250  | Screw, Pan 4x8, w/Washer                      |                  |
|             |           |                                                        |                  | 9-54x       | ZW413188  | Nut, #1 M4                                    |                  |
|             |           |                                                        |                  | 9-55x       | ZS406416  | Tapping Screw, #2<br>Countersunk 3x8          |                  |
| 9-7         | ZS417216  | Screw, Pan 3x4                                         | 36-27-7          | 9-56x       | ZS498273  | Tapping Screw, #2 BR 3x8 W=8                  |                  |
|             |           | PIN JACK P.C BOARD BLOCK                               |                  | 9-57x       | ZS297641  | Tapping Screw, #2 BIND 3x8<br>W=10            |                  |
| 9-8         | EJ323143  | Pin Jack 4P                                            | 31-5-13          | 9-58x       | EJ313601  | △ Mini Connector Assy C1101<br>(CEE, UK, SAA) | 38-6-33          |
| 9-9         | EJ323144  | Pin Jack 6P                                            | 31-5-13          | 9-59        | ZS23664   | Tapping Screw, #2 BR 3x10                     |                  |
| 9-10        | EJ323145  | Din 5P, Pin Jack 4P                                    | 31-5-17          | 9-60        | EF326613  | △ Fuse 5A 250V (U/T)                          | 39-1-64          |
| 9-11        | EJ326596  | Pin Jack 2P                                            | 31-5-16          | 9-61x       | EF306951  | △ Fuse 2.5A 250V (U/T)                        | 39-1-64          |
|             |           | HEAT SINK BLOCK                                        |                  | 9-62x       | EF325683  | △ Fuse 5A 125V (CSA, AAL)                     | 39-1-67          |
| 9-12        | EJ326597  | IC STK-0070(2)-SL                                      | 45-4-42          | 9-63x       | EF459843  | △ Fuse ST-6 5A (CSA, AAL)                     | 39-1-65          |
| 9-13        | ZS321279  | Tapping Screw, #2 BR 3x18                              |                  | 9-64x       | EF623125  | △ Fuse (Semko T) 2.5AT<br>(CEE, UK, SAA)      | 38-1-53          |
|             |           | PULSE POWER SUPPLY BLOCK                               |                  | 9-65x       | EF249851  | △ Fuse (Semko T) 5AT<br>(CEE, UK, SAA)        | 38-1-53          |
| 9-14x       | ZS379350  | Screw, Pan 3x6                                         |                  | 9-66        | SP323044  | Bottom Plate<br>AMU-4034                      |                  |
| 9-15        | TA325261  | Packing                                                | AMU-6012         | 9-67        | ZS471840  | Tapping Screw, #2 BR 3x8                      |                  |
| 9-16        | ZS306459  | B-Tight Screw, BR 3x8                                  |                  | 9-68        | SA-312465 | Circular Foot (A) Part CA<br>CA-6014          |                  |
|             |           | REAR PANEL BLOCK                                       |                  | 9-69        | ZS565942  | Tapping Screw, #2 Pan 4x8                     |                  |
| 9-17        | SP326562  | Rear Panel (A) (U/T)                                   | AMU-6008         |             |           |                                               |                  |
| 9-18x       | SP326563  | Rear Panel (B) (CSA)                                   | AMU-6009         |             |           |                                               |                  |
| 9-19x       | SP326565  | Rear Panel (C) (AAL)                                   | AMU-6009         |             |           |                                               |                  |
| 9-20x       | SP326566  | Rear Panel (D) (CEE)                                   | AMU-6010         |             |           |                                               |                  |
| 9-21x       | SP326567  | Rear Panel (E) (UK,SAA)                                | AMU-6010         |             |           |                                               |                  |
| 9-22        | EJ325358  | Earth Terminal                                         | 32-1-115         |             |           |                                               |                  |
| 9-23        | ZW652408  | Washer (SPC) D3.2x10x0.51                              |                  |             |           |                                               |                  |
| 9-24        | ZS308673  | Tapping Screw, Pan 3x10<br>w/Guide                     | 7-1-58           |             |           |                                               |                  |
|             |           |                                                        |                  |             |           |                                               |                  |
| 9-25        | EJ322581  | Pin Jack 4P (RED, WHT)                                 | 32-1-126         |             |           |                                               |                  |
| 9-26        | ZS512865  | Tapping Screw, #2 BR 3x12<br>(Black)                   |                  |             |           |                                               |                  |
|             |           |                                                        |                  |             |           |                                               |                  |
| 9-27        | EJ554578  | Short Plug                                             | 42-1-65          |             |           |                                               |                  |
| 9-28        | EJ322582  | Push Terminal 4P                                       | 32-1-127         |             |           |                                               |                  |
| 9-29        | EJ240535  | △ 3 Throw AC Outlet<br>(U/T, CSA, AAL)                 |                  |             |           |                                               |                  |
|             |           |                                                        |                  |             |           |                                               |                  |
| 9-30        | EW306428  | △ AC Cord (U/T)                                        | 38-5-54          |             |           |                                               |                  |
| 9-31x       | EW305691  | △ AC Cord CUL (CSA, AAL)                               | 38-5-65          |             |           |                                               |                  |
| 9-32        | E2631945  | Strain Relief SR-4N-4                                  | 27-6             |             |           |                                               |                  |
| 9-33x       | EJ296B53  | △ 3P In Let CM-3<br>(CEE, UK, SAA)                     | 38-5-59          |             |           |                                               |                  |
|             |           |                                                        |                  |             |           |                                               |                  |
| 9-34x       | Z5463353  | Tapping Screw, #2 BR 3x8<br>(Black) (CEE, UK, SAA)     | 38-5-63          |             |           |                                               |                  |
|             |           |                                                        |                  |             |           |                                               |                  |
|             |           | ASSEMBLY BLOCK                                         |                  |             |           |                                               |                  |
| 9-35x       | ZS325495  | Tapping Screw, #2 BR 3x6                               |                  |             |           |                                               |                  |
| 9-36x       | ZS308846  | Tapping Screw, #2 BR 3x8<br>(Oval Neck) (Black)        | 7-1-69           |             |           |                                               |                  |
| 9-37        | ES324162  | △ Push SW. SDG1P TV-5<br>(U/T)                         | 25-5-57          |             |           |                                               |                  |
|             |           |                                                        |                  |             |           |                                               |                  |
| 9-38x       | ES679366  | △ Push SW. SDG1P TV5<br>(CSA, AAL)                     | 25-5-54          |             |           |                                               |                  |
| 9-39x       | ES310839  | △ Push SW. SDG1P 5A/80A<br>250V (CEE, UK, SAA)         | 25-5-55          |             |           |                                               |                  |
| 9-40        | EC321302  | △ Ceramic/C. E 0.01μF(Z)<br>250VAC (U/T)               | 25-5-56          |             |           |                                               |                  |
| 9-41x       | EC314689  | △ Ceramic/C. DE7150 FZ<br>0.01μF(P) 125W (CSA, AAL)    | 24-5-57          |             |           |                                               |                  |
| 9-42x       | EC327382  | △ MP/C. (Vert.)<br>0.0047μF(M) 250WV<br>(CEE, UK, SAA) | 24-5-57          |             |           |                                               |                  |
| 9-43        | TA323028  | Push Rod                                               | AMU-6012         |             |           |                                               |                  |
| 9-44x       | ZS422076  | Screw, Pan 3x8                                         |                  |             |           |                                               |                  |

When ordering parts, please quote Parts Number, Description and Model Number.

## **INDEX**

## 10. FINAL ASSEMBLY BLOCK

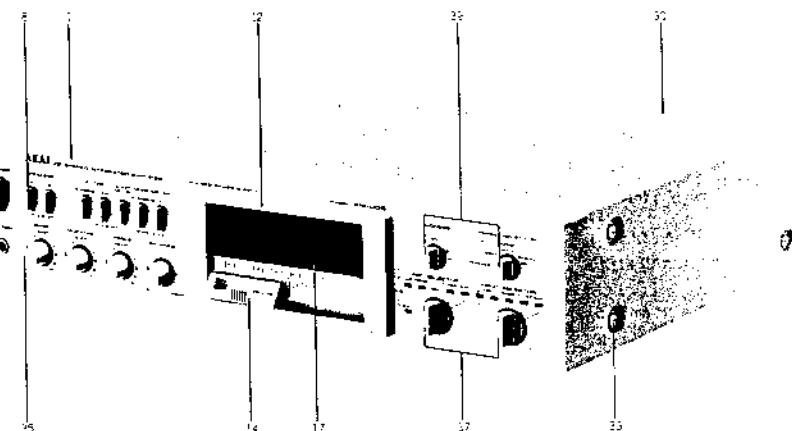

## **FINAL ASSEMBLY BLOCK**

| Ref.<br>No. | Parts No. | Description                 | Schematic<br>No. | Ref.<br>No. | Parts No. | Description                                  | Schematic<br>No. |
|-------------|-----------|-----------------------------|------------------|-------------|-----------|----------------------------------------------|------------------|
|             |           | <b>FRONT PANEL BLOCK</b>    |                  |             |           | <b>FINAL ASSEMBLY BLOCK</b>                  |                  |
| 10-1        | BD325920  | Front Panel Block AM-U06    | AMU 6029         | 10-22x      | ZW616004  | Washer (SPC) D3.1x8x1t                       |                  |
| 10-2x       | BD325921  | Front Panel Block AM-U06-BL | AMU 6029         | 10-23x      | ZS322402  | Special Tapping Screw, Pan 3x8               | 7-1-70           |
| 10-3x       | SE322578  | Escutcheon (A)              | ATK 2013         |             |           |                                              |                  |
| 10-4        | SB322576  | Button (A)                  | ATK 2012         | 10-24x      | ZS447840  | Tapping Screw, #2 BR 3x8                     |                  |
| 10-5x       | ZG322577  | Button (A-BL)               | ATK 2012         | 10-25x      | ZW324157  | Washer (SPC) D6.2x13x0.25t                   |                  |
| 10-6x       | ZG322579  | Spring (A)                  | ATK 2014         | 10-26x      | ZW324158  | Washer (SPC) D6.2x13x0.5t                    |                  |
| 10-7x       | SE322559  | Escutcheon                  | AMU 2045         | 10-27x      | ZW324159  | Washer (SPC) D6.2x13x0.6t                    |                  |
| 10-8        | SB322557  | Button                      | AMU 2044         | 10-28x      | ZW65983   | Washer (SPC) D6.2x13x1t                      |                  |
| 10-9x       | SB322558  | Button (BL)                 | AMU 2044         | 10-29x      | ZW324161  | Washer (SPC) D6.2x13x1.6t                    |                  |
| 10-10x      | ZG322566  | Spring                      | AMU 2050         | 10-30       | SP323045  | Upper Plate (A)                              | AMU-4039         |
| 10-11x      | SE325061  | Escutcheon (A)              | ATV 4029         | 10-31x      | SP323047  | Upper Plate (B) (AAL)                        | AMU-4039         |
| 10-12       | SE322538  | Bar Meter Escutcheon        | AMU 2032         | 10-32x      | SP323046  | Upper Plate (A,BL)                           | AMU-4039         |
| 10-13x      | SE322539  | Bar Meter Escutcheon (BL)   | AMU 2032         | 10-33       | ZS322570  | S-Tight Screw, Bind 4x8                      |                  |
| 10-14       | SK324171  | Slide Knob Part AM-U04      | AMU 4061         | 10-34x      | ZS322580  | S-Tight Screw, Bind 4x8<br>(Black) (AAL, BL) |                  |
| 10-15x      | SK323147  | Slide Knob (BL) Part        |                  |             |           |                                              |                  |
|             |           | AM-U04-BL                   | AMU 4061         | 10-35       | SK323042  | Knob                                         | AMU-4037         |
| 10-16x      | ZW270088  | 'E' Ring 1.9M               | 6-1-9            | 10-36x      | SK323043  | Knob (BL)                                    | AMU-4037         |
| 10-17       | SZ322544  | Bar Meter Plate             | AMU-2036         | 10-37       | SK322553  | Knob (B)                                     | AMU-2042         |
| 10-18x      | SB322545  | Bar Meter Filter            | AMU-2037,2058    | 10-38x      | SK322554  | Knob (B-BL)                                  | AMU-2042         |
| 10-19x      | TA323037  | Vol. Illumination Plate     | AMU-4033         | 10-39       | SK322555  | Knob (C)                                     | AMU-2043         |
| 10-20x      | SP323038  | Scale Back Plate            | AMU-4034         | 10-40x      | SK322556  | Knob (C-BL)                                  | AMU-2043         |
| 10-21x      | SP323039  | Scale Back Plate (BL)       | AMU-4034         |             |           |                                              |                  |

| Part No. | Ref. No. & Symbol No. | Parts No. | Ref. No. & Symbol No. | Parts No. | Ref. No. & Symbol No. | Parts No. | Ref. No. & Symbol No. | Parts No. | Ref. No. & Symbol No. |
|----------|-----------------------|-----------|-----------------------|-----------|-----------------------|-----------|-----------------------|-----------|-----------------------|
| BA320352 | 2-1                   | EJ301199  | 9-47                  | SA312465  | 9-48                  |           |                       |           |                       |
| BA320373 | 2-3                   | EJ313601  | 9-58x                 | SB322557  | 10-8                  |           |                       |           |                       |
| BA320374 | 2-2                   | EJ3212581 | 9-25                  | SB322558  | 10-9x                 |           |                       |           |                       |
| BD325920 | 10-1                  | EJ3212582 | 9-28                  | SB322576  | 10-4                  |           |                       |           |                       |
| BD325921 | 10-2X                 | EJ323143  | 9-8                   | SB322577  | 10-5x                 |           |                       |           |                       |
| BT326589 | 9-49x                 | EJ323144  | 9-9                   | SE322538  | 10-12                 |           |                       |           |                       |
| BT326590 | 9-50x                 | EJ323145  | 9-10                  | SE322539  | 10-13x                |           |                       |           |                       |
| BT326591 | 9-51x                 | EJ323538  | 9-22                  | SE321659  | 10-7x                 |           |                       |           |                       |
| BT326592 | 9-48                  | EJ326595  | 9-11                  | SE322578  | 10-3x                 |           |                       |           |                       |
| BT326607 | 4-T1                  | EJ554578  | 9-27                  | SE325061  | 10-11x                |           |                       |           |                       |
| EC204671 | 2-C31to34             | EL326611  | 9-46                  | SE326570  | 9-3x                  |           |                       |           |                       |
| EC243393 | 7-C15                 | EO325278  | 4-L2to5               | SX322553  | 10-37                 |           |                       |           |                       |
| EC258298 | 5-C1                  | EO325280  | 4-L6                  | SK322554  | 10-38x                |           |                       |           |                       |
| EC314688 | 5-C2                  | EO325281  | 4-L1                  | SK322555  | 10-39                 |           |                       |           |                       |
| EC314688 | 9-41x                 | EO326617  | 2-L1                  | SK322556  | 10-40x                |           |                       |           |                       |
| EC314995 | 3-C15                 | EP313565  | 2-R1,L2               | SK323042  | 10-35                 |           |                       |           |                       |
| EC318358 | 6-C3                  | ER308875  | 2-R78                 | SK323043  | 10-36x                |           |                       |           |                       |
| EC321302 | 9-40                  | ER308875  | 2-R89                 | SK323147  | 10-15x                |           |                       |           |                       |
| EC323055 | 6-C11                 | ER313774  | 2-R31                 | SK324171  | 10-14                 |           |                       |           |                       |
| EC323055 | 7-C1                  | ER322590  | 2-R92                 | SP-323038 | 10-20x                |           |                       |           |                       |
| EC323055 | 7-C8,9                | ER322591  | 2-R74,75              | SP323039  | 10-21x                |           |                       |           |                       |
| EC323517 | 4-C8,9                | ER323067  | 6-R3                  | SP323044  | 9-6x                  |           |                       |           |                       |
| EC313557 | 5-C1                  | ER323069  | 6-R8                  | SP323045  | 10-30                 |           |                       |           |                       |
| EC324102 | 6-C9                  | ER323074  | 2-R71,72              | SP323046  | 10-32x                |           |                       |           |                       |
| EC324103 | 6-C10                 | ER323075  | 2-R76,77              | SP323047  | 10-31x                |           |                       |           |                       |
| EC324109 | 3-C14                 | ER323251  | 6-R7                  | SP326562  | 9-17                  |           |                       |           |                       |
| EC324922 | 3-C8,9                | ER323396  | 2-R90                 | SP326563  | 9-18x                 |           |                       |           |                       |
| EC325266 | 4-C21                 | ER324222  | 4-R5                  | SP326565  | 9-19x                 |           |                       |           |                       |
| EC325286 | 4-C21                 | ER324359  | 2-R91                 | SP326566  | 9-20x                 |           |                       |           |                       |
| EC325286 | 5-C3                  | ER325114  | 2-R94                 | SP326567  | 9-21x                 |           |                       |           |                       |
| EC325316 | 4-C6                  | ER325265  | 5-L1                  | SZ322544  | 10-17                 |           |                       |           |                       |
| EC325671 | 5-C2                  | ER325268  | 5-L1                  | SZ322545  | 10-18x                |           |                       |           |                       |
| EC325671 | 5-C2                  | ER325277  | 4-R1                  | TA323028  | 9-43                  |           |                       |           |                       |
| EC326604 | 5-C4,5                | ER325288  | 4-R18                 | TA323037  | 10-19x                |           |                       |           |                       |
| EC326606 | 5-C4,5                | ER326615  | 2-R2                  | TA323481  | 4-6                   |           |                       |           |                       |
| EC326608 | 4-C2,3                | ER326616  | 1-R80,81              | TA325261  | 9-15                  |           |                       |           |                       |
| EC326609 | 4-C4,5                | ER328186  | 2-R82,83              | ZG322566  | 10-10x                |           |                       |           |                       |
| EC326827 | 5-C1                  | ER622978  | 5-R1to4               | ZG322579  | 10-6x                 |           |                       |           |                       |
| EC326828 | 5-C3                  | ES306725  | 4-SW1                 | ZG323474  | 4-1                   |           |                       |           |                       |
| EC326828 | 9-42x                 | ES310639  | 9-39x                 | ZS297641  | 9-57x                 |           |                       |           |                       |
| EC657044 | 2-C3                  | ES320362  | 6-SW1                 | ZS306459  | 9-16                  |           |                       |           |                       |
| ED214457 | 2-D10to15             | ES323063  | 6-SW2                 | ZS308673  | 9-24                  |           |                       |           |                       |
| ED214457 | 2-D20                 | ES324162  | 9-37                  | ZS308684  | 9-36x                 |           |                       |           |                       |
| ED242468 | 2-D22,23              | ES326588  | 3-SW1                 | ZS321279  | 9-13                  |           |                       |           |                       |
| ED322172 | 9-2x                  | ES326587  | 3-SW2                 | ZS322402  | 10-23x                |           |                       |           |                       |
| ED322772 | 9-5                   | ES326593  | 8-SW1to7              | ZS322570  | 10-33                 |           |                       |           |                       |
| ED322773 | 9-1x                  | ES679566  | 9-38x                 | ZS323580  | 10-34x                |           |                       |           |                       |
| ED323056 | 2-D4,5                | ET1219868 | 6-TR1                 | ZS325495  | 2-4                   |           |                       |           |                       |
| ED323057 | 2-D6to9               | ET305463  | 2-TRR                 | ZS325495  | 9-35x                 |           |                       |           |                       |
| ED323057 | 2-D16                 | ET305463  | 2-TR11                | ZS379350  | 4-4                   |           |                       |           |                       |
| ED323057 | 3-D1                  | ET305463  | 3-TR1                 | ZS379350  | 9-14x                 |           |                       |           |                       |
| ED323059 | 6-D1,2                | ET305463  | 3-TR4                 | ZS380046  | 4-3                   |           |                       |           |                       |
| ED323512 | 4-D3                  | ET307195  | 2-TR1                 | ZS40616   | 9-55x                 |           |                       |           |                       |
| ED323513 | 4-D4                  | ET307195  | 2-TR6,7               | ZS417216  | 9-7                   |           |                       |           |                       |
| ED323534 | 2-D26                 | ET307195  | 2-TR10                | ZS419670  | 4-2                   |           |                       |           |                       |
| ED323535 | 2-D25                 | ET307195  | 3-TR2,3               | ZS422076  | 9-6x                  |           |                       |           |                       |
| ED323573 | 4-D1                  | ET311791  | 2-TR12                | ZS434250  | 9-53x                 |           |                       |           |                       |
| ED325275 | 4-D5to8               | ET311792  | 2-TR16                | ZS447840  | 2-5                   |           |                       |           |                       |
| ED326605 | 5-D1                  | ET316171  | 4-TR2                 | ZS447840  | 9-67                  |           |                       |           |                       |
| ED560913 | 4-D2                  | ET316643  | 2-TR4,3               | ZS447840  | 10-14x                |           |                       |           |                       |
| ED562386 | 2-D24                 | ET316643  | 2-TR14,15             | ZS455207  | 9-52                  |           |                       |           |                       |
| ED624903 | 2-D17to19             | ET316643  | 8-TR1to4              | ZS463353  | 9-34x                 |           |                       |           |                       |
| ED624903 | 2-D21                 | ET322244  | 2-TR2,3               | ZS466101  | 9-4x                  |           |                       |           |                       |
| ED624903 | 2-D27                 | ET322244  | 2-TR13                | ZS498273  | 9-56x                 |           |                       |           |                       |
| EF249851 | 9-6x                  | ET322244  | 2-TR18                | ZS522865  | 9-26                  |           |                       |           |                       |
| EF306951 | 9-6x                  | ET322598  | 4-TR7                 | ZS5333664 | 9-59                  |           |                       |           |                       |
| EF325683 | 9-6x                  | ET323105  | 2-TR9                 | ZS558101  | 4-5                   |           |                       |           |                       |
| EF326613 | 9-60                  | ET323105  | 2-TR17                | ZS5656942 | 9-69                  |           |                       |           |                       |
| EF459843 | 9-53x                 | ET323529  | 4-TR1                 | ZW265983  | 10-28x                |           |                       |           |                       |
| EF623125 | 9-64x                 | ET323572  | 4-TR3to6              | ZW270088  | 10-16x                |           |                       |           |                       |
| EJ321299 | 2-IC4                 | EV323051  | 7-VR1                 | ZW324157  | 10-25x                |           |                       |           |                       |
| EJ322599 | 7-IC2                 | EV323052  | 7-VR2                 | ZW324158  | 10-26x                |           |                       |           |                       |
| EJ323054 | 6-IC1                 | EV323053  | 7-VR3                 | ZW324159  | 10-27x                |           |                       |           |                       |
| EJ323054 | 7-IC1                 | EV323061  | 9-6                   | ZW324161  | 10-29x                |           |                       |           |                       |
| EJ323564 | 2-IC5                 | EV324346  | 7-VR4                 | ZW413188  | 9-54x                 |           |                       |           |                       |
| EJ325947 | 4-T1                  | EV464196  | 2-VR2                 | ZW616004  | 10-22x                |           |                       |           |                       |
| EJ326595 | 1-IC2                 | EV478686  | 2-VR1                 | ZW652408  | 9-23                  |           |                       |           |                       |
| EJ326597 | 9-12                  | EW305691  | 9-31x                 | ZW698308  | 9-45                  |           |                       |           |                       |
| EJ420535 | 9-29                  | EW306428  | 9-30                  |           |                       |           |                       |           |                       |
| EJ420535 | 9-33x                 | E7631945  | 9-32                  |           |                       |           |                       |           |                       |


---

SECTION 3


**SCHEMATIC DIAGRAM**

1. SCHEMATIC DIAGRAM OF ICs
2. AM-U06 NO. 4-1 1601220A CONNECTION DIAGRAM
3. AM-U06 NO. 4-2 1601221A MAIN AMP SCHEMATIC DIAGRAM
4. AM-U06 NO. 4-3 1601222A PULSE POWER SCHEMATIC DIAGRAM
5. AM-U06 NO. 4-4 1601223A MC AMP SCHEMATIC DIAGRAM


## LC7556

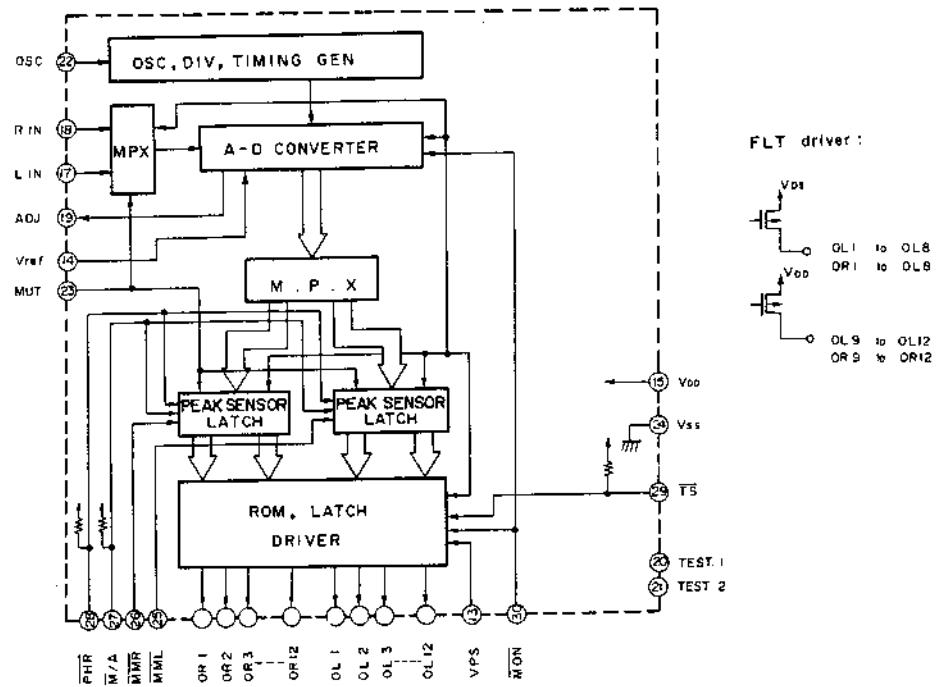


STK-0070II

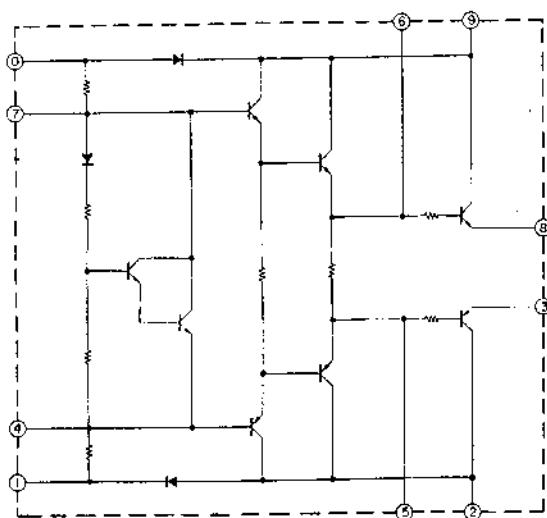



STK-3062

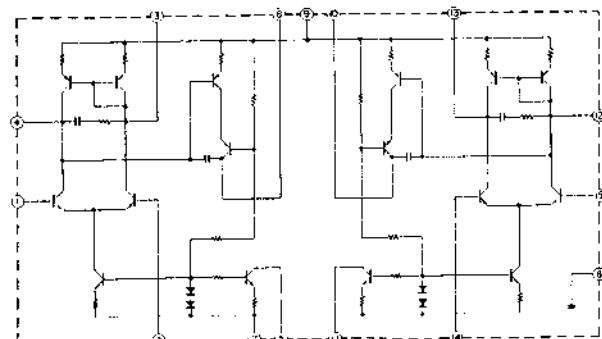



TA7322P

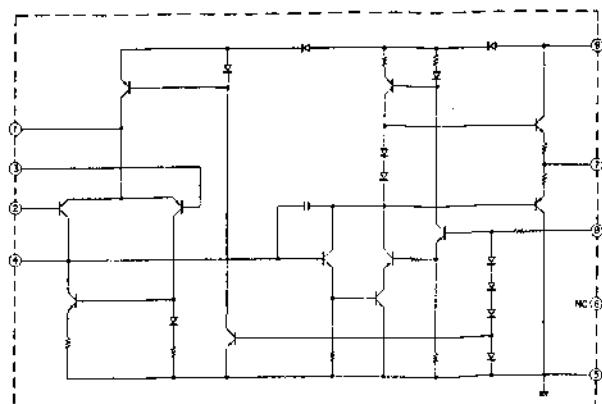


## TA7317P

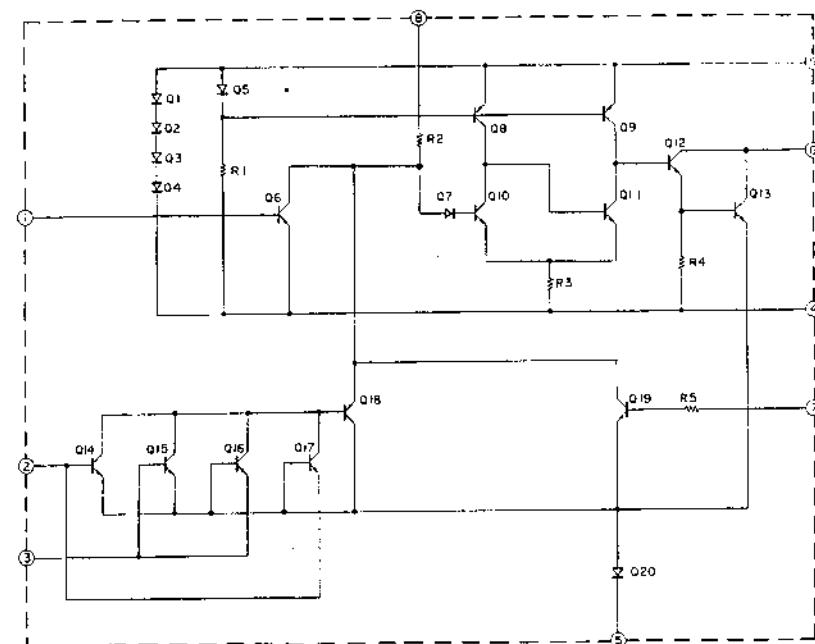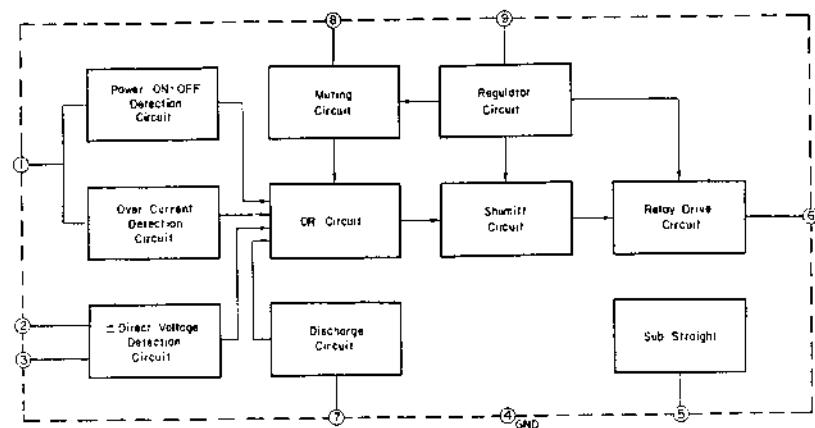


## TA75458S

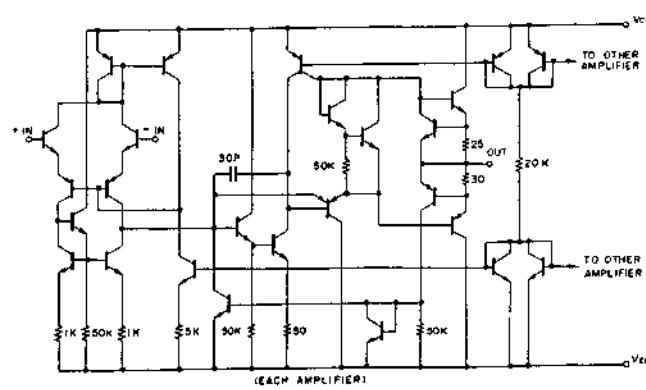
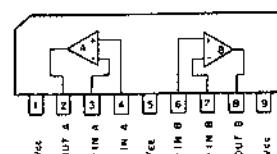


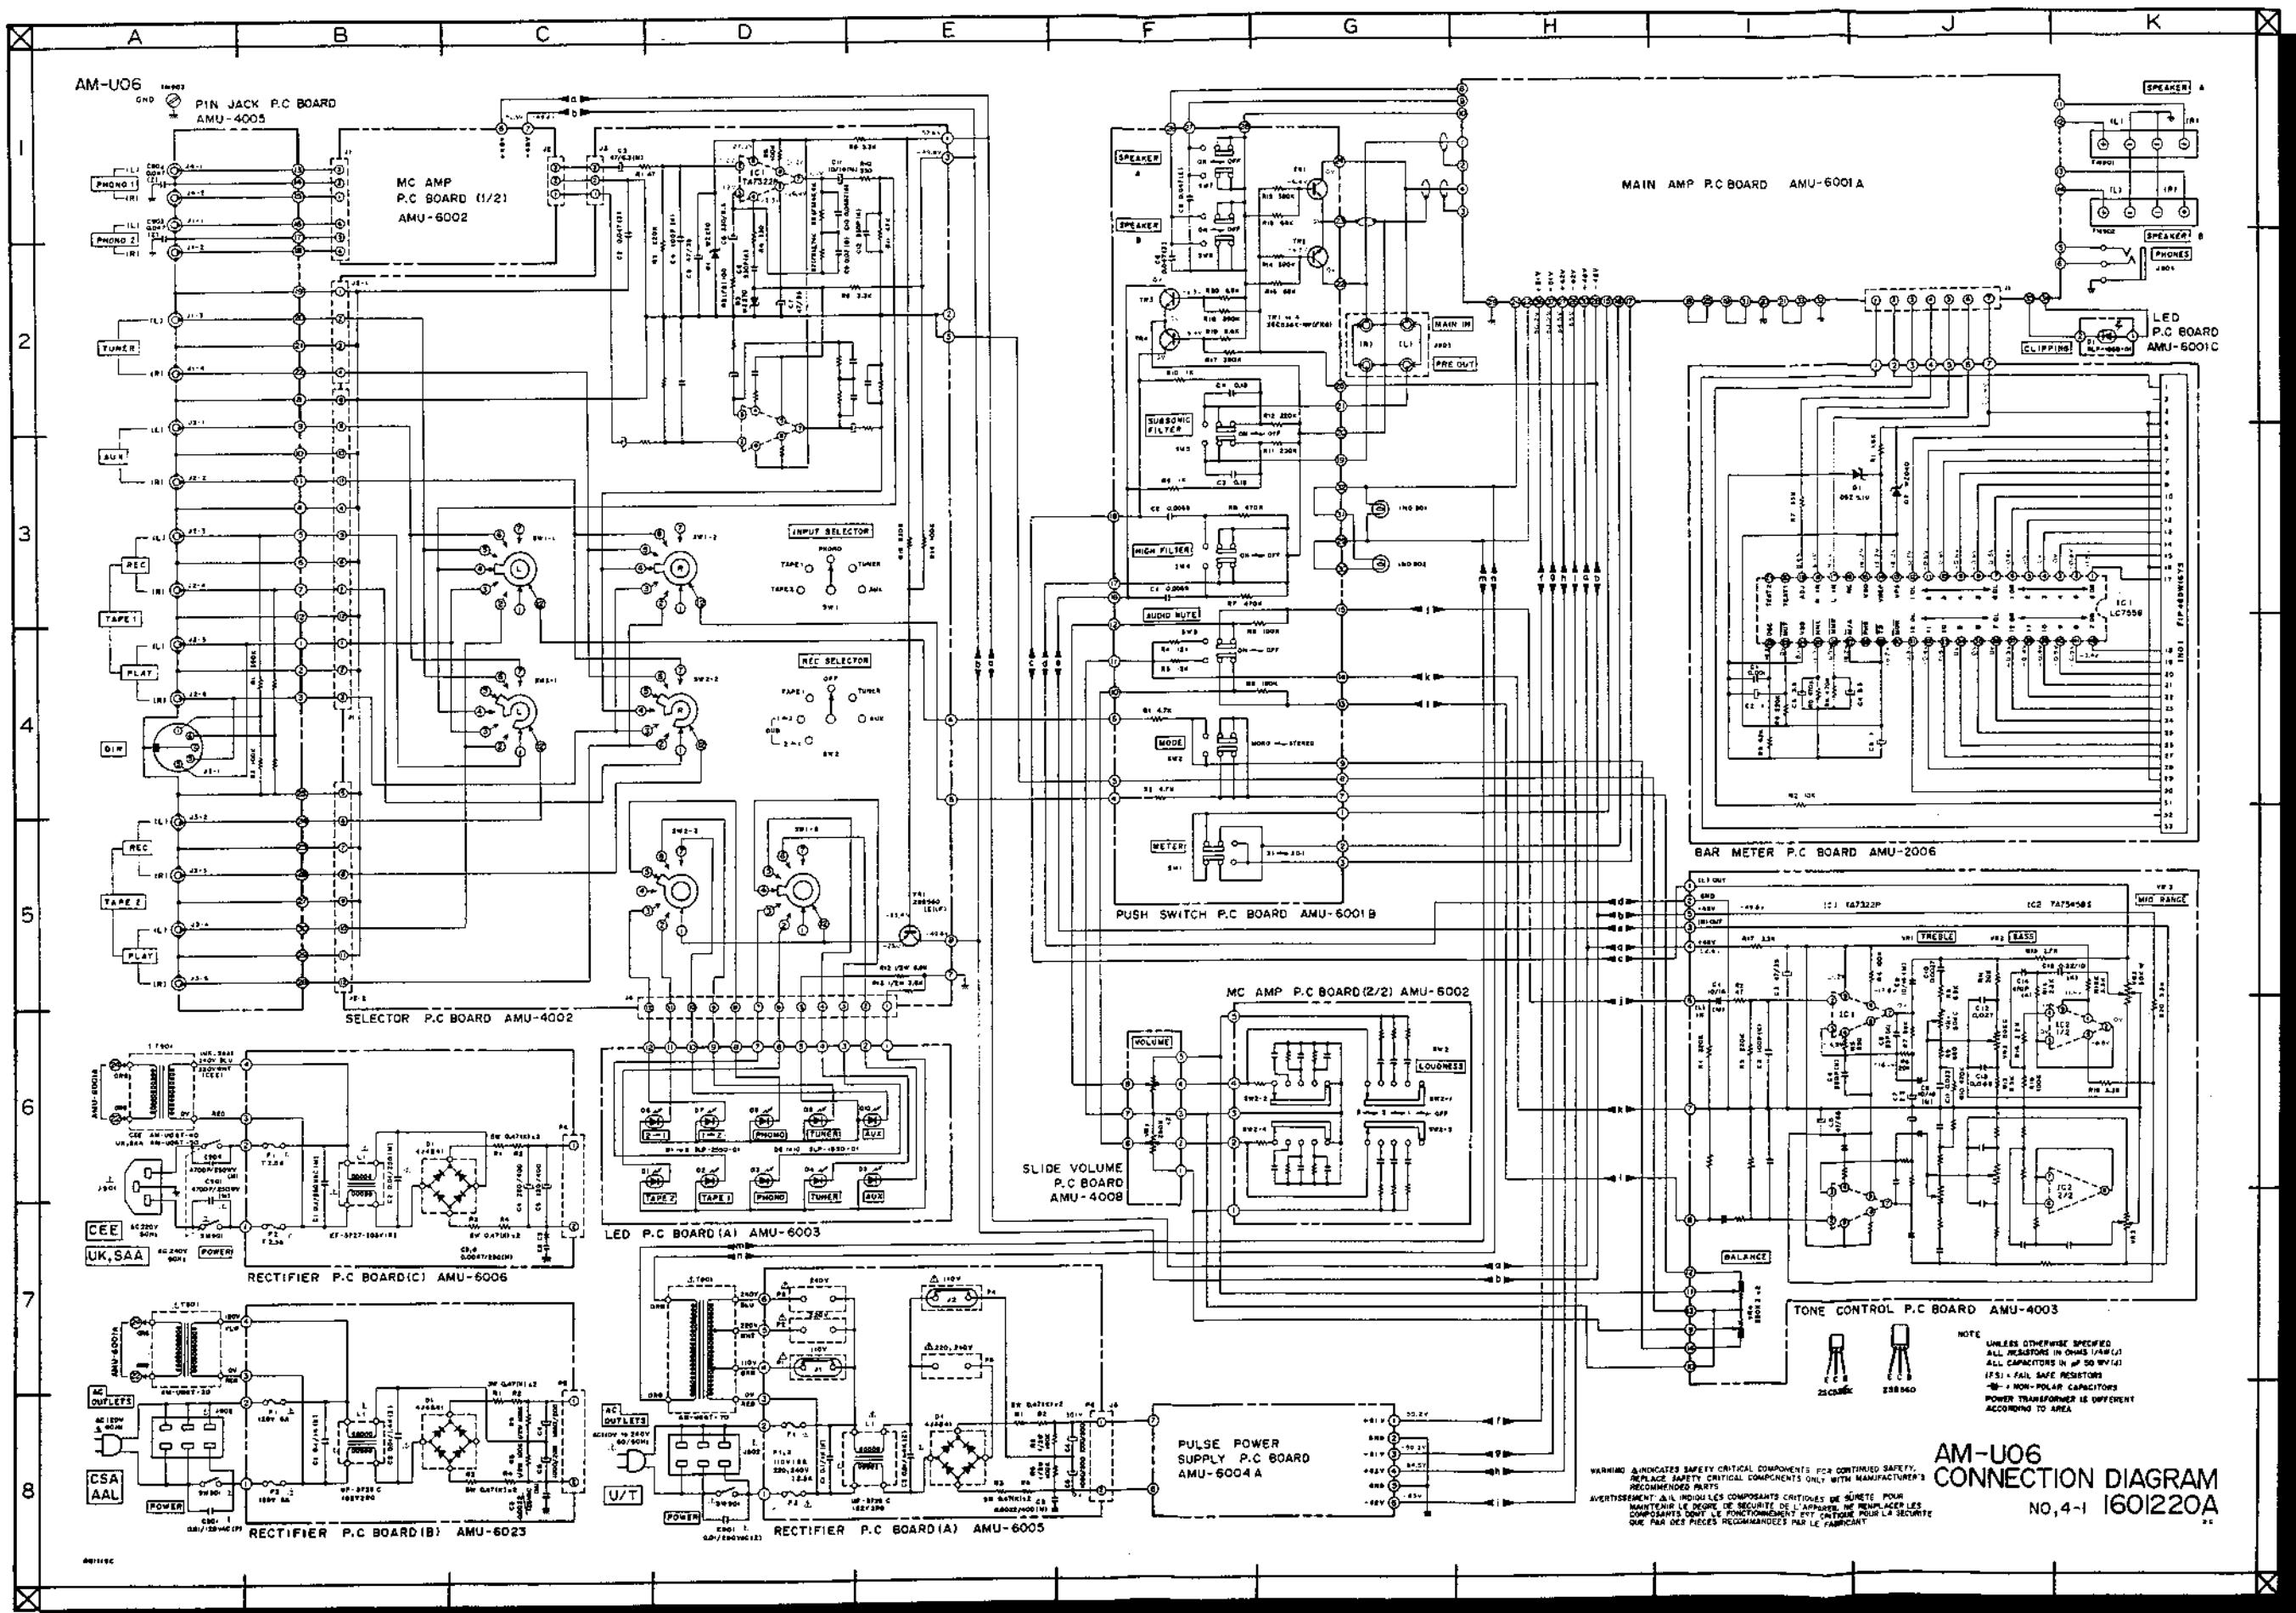

AM-U06

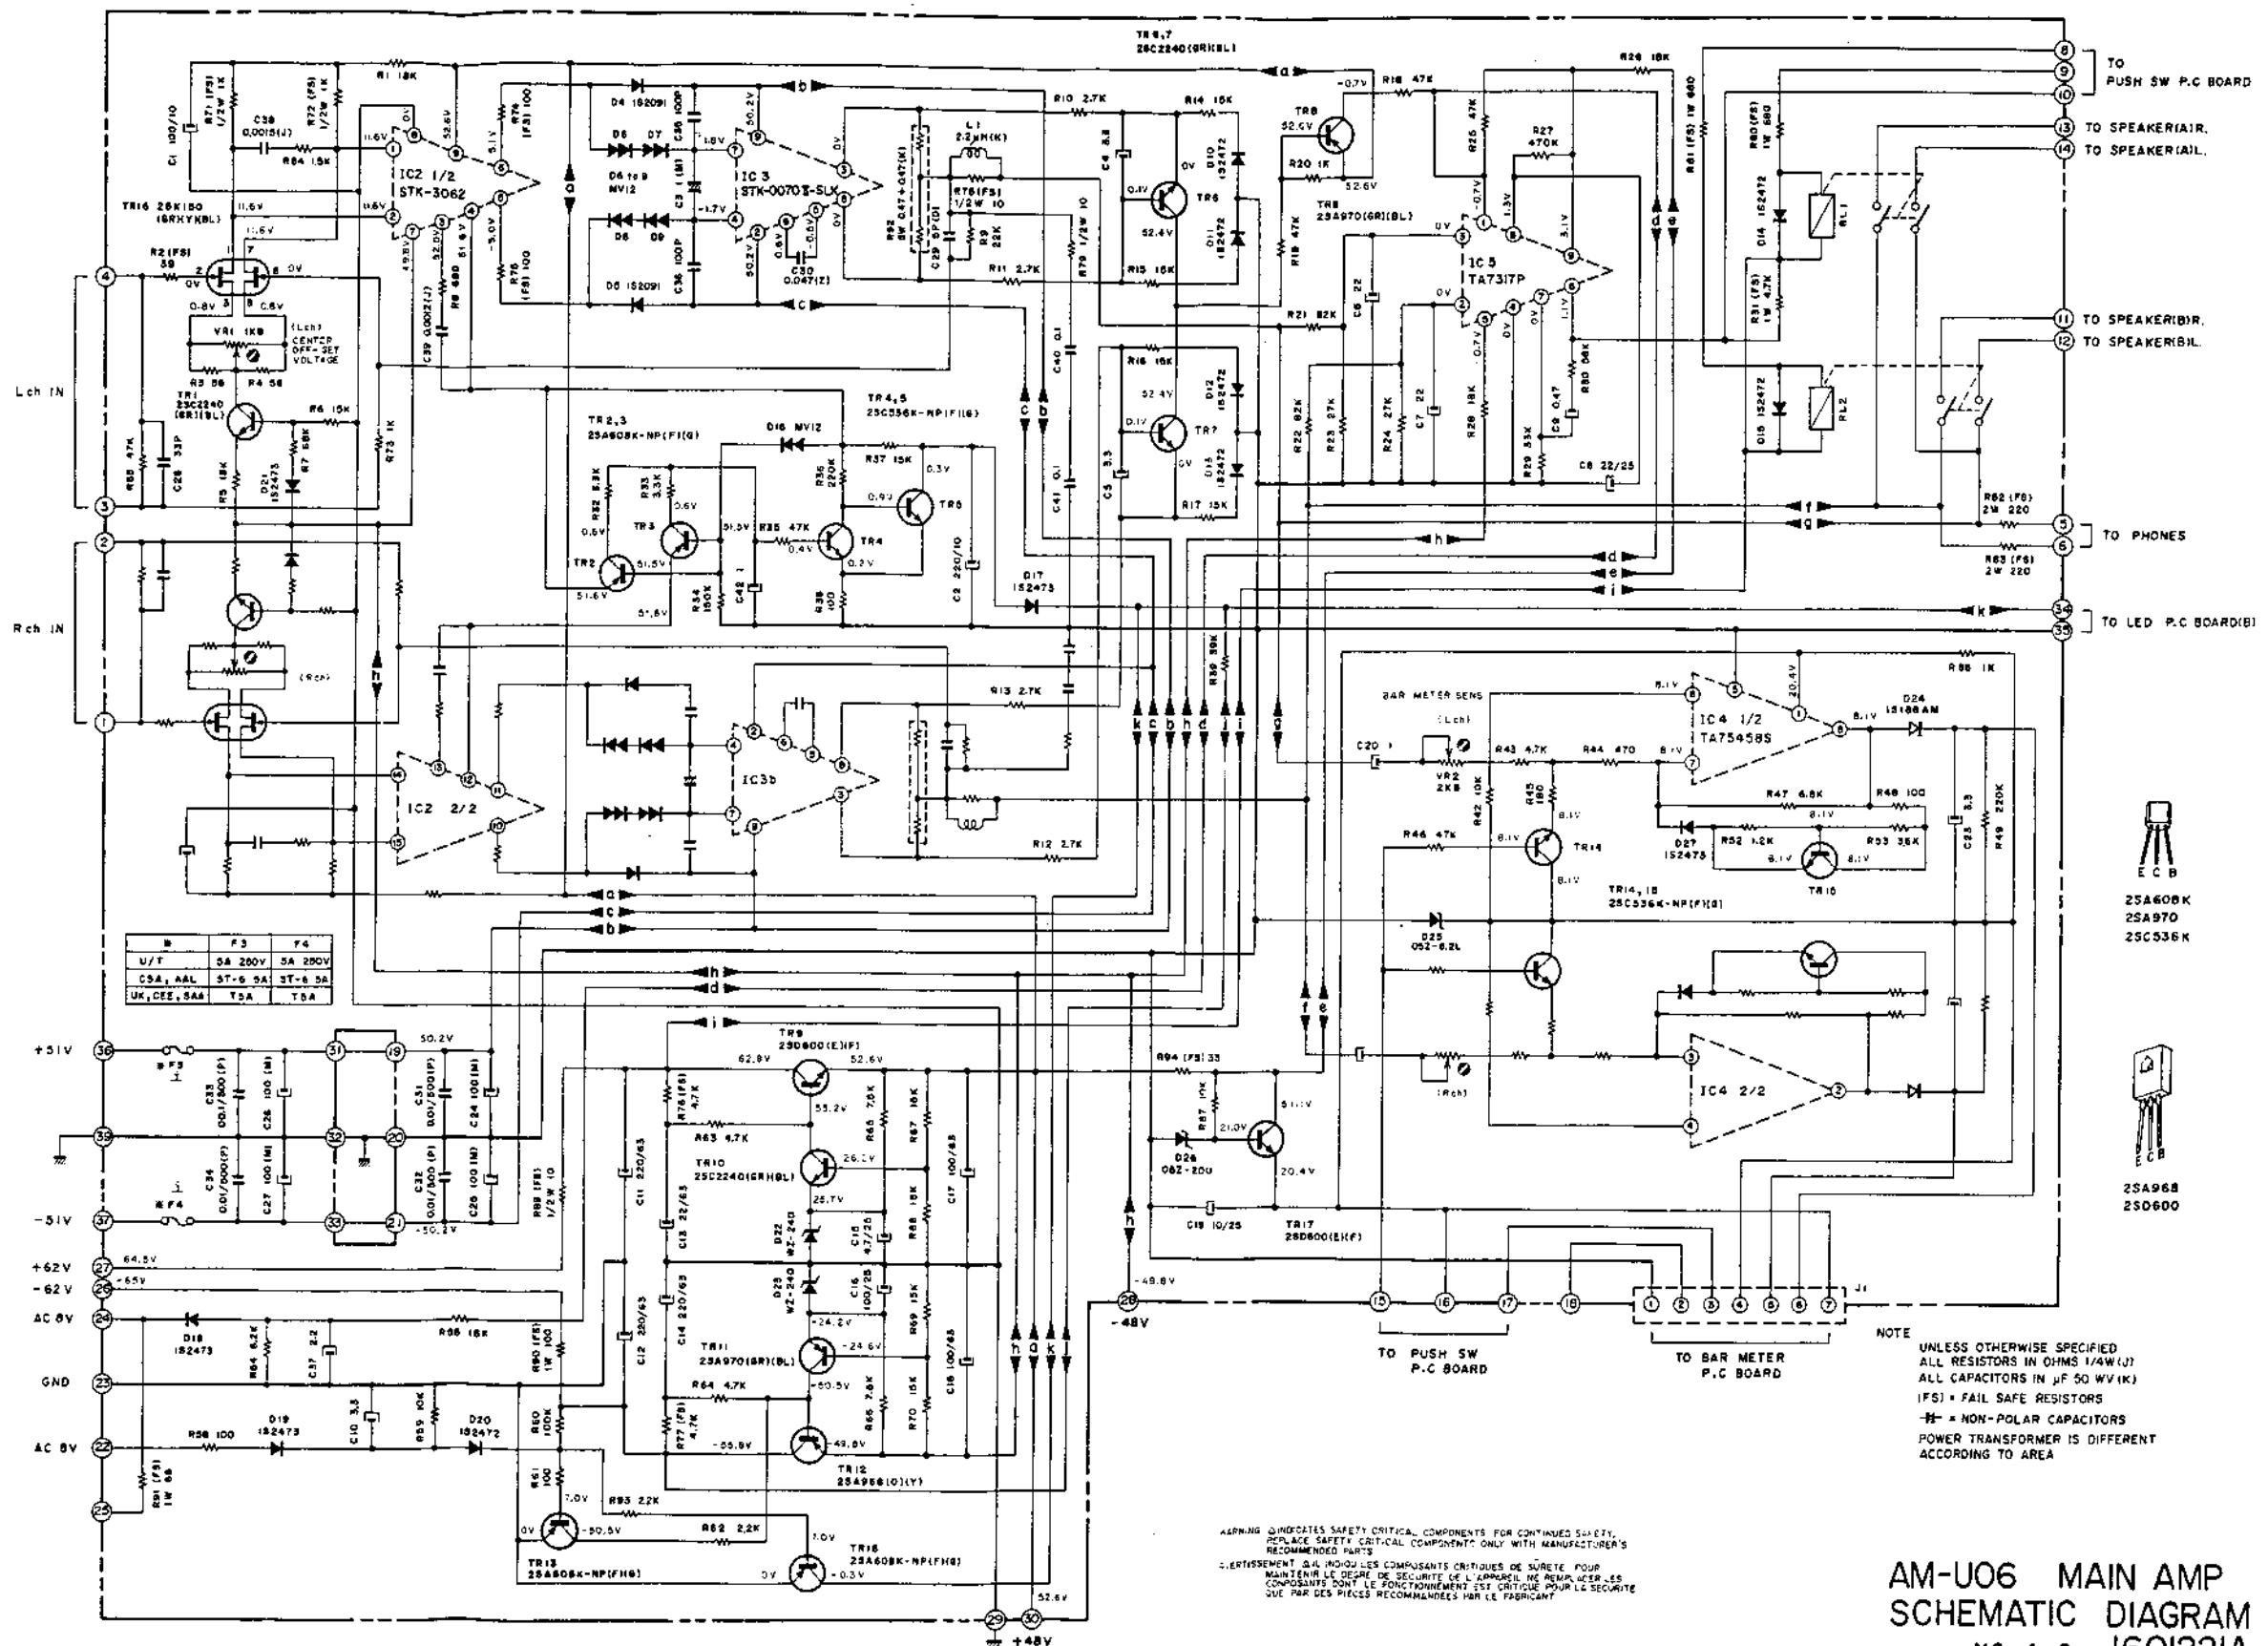

AM-U06

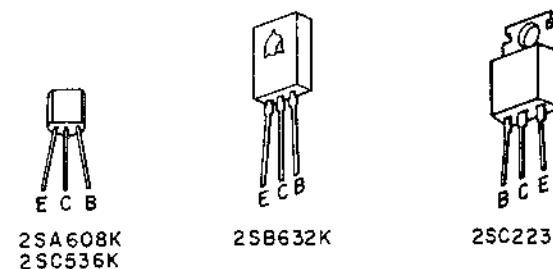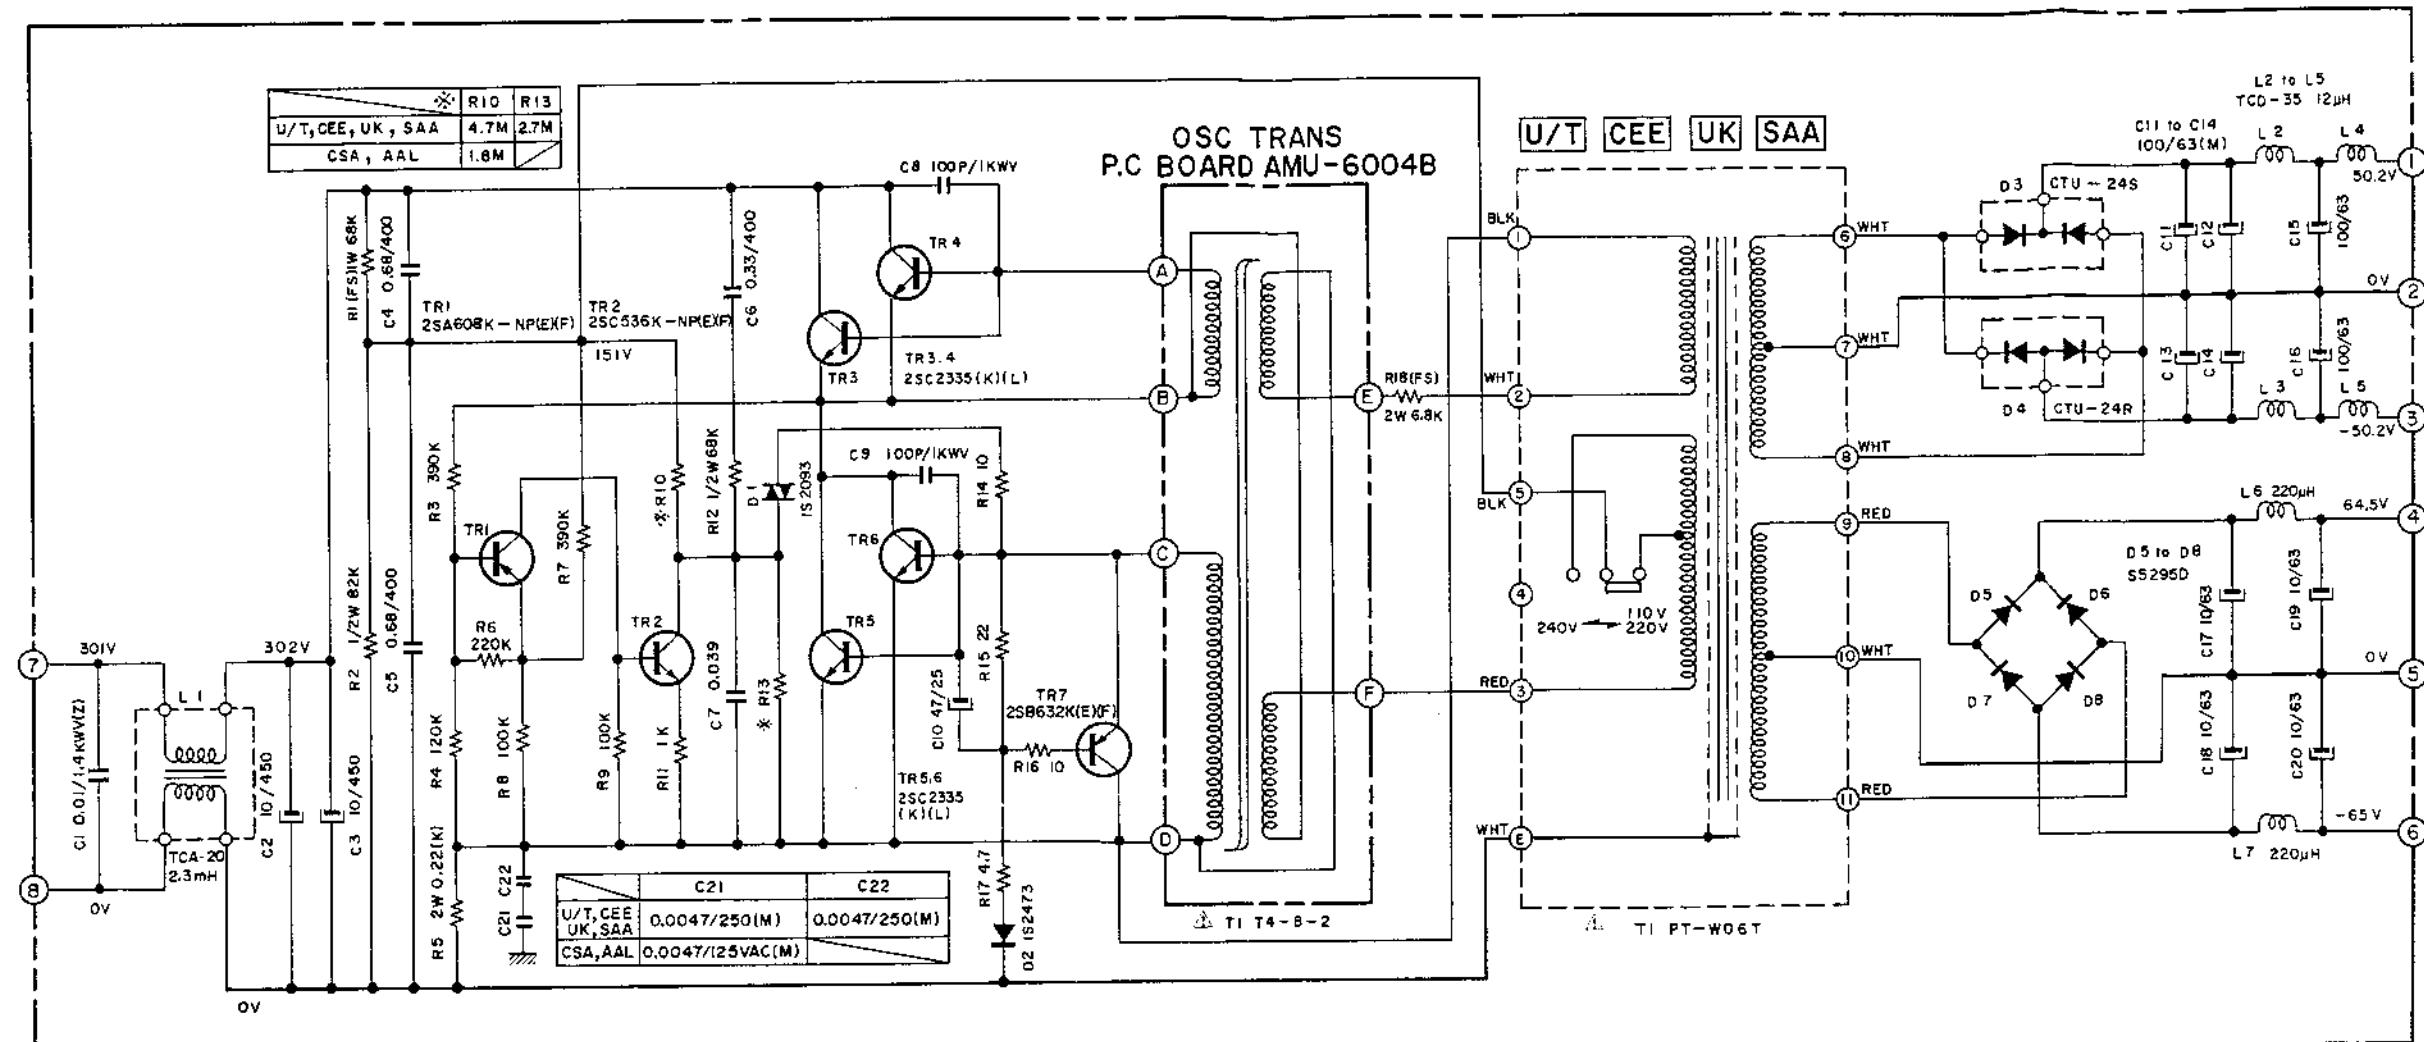

WARNING: INDICATES SAFETY CRITICAL COMPONENTS FOR CONTINUED SAFETY.  
REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S  
SPECIFIED EQUIVALENTS.

AVERTISSEMENT: AINSI QUELS COMPOSANTS CRITIQUES DE SURETE POUR  
MAINTENIR LE DEGRE DE SECURITE DE L'APPAREIL NE remplacer LES  
COMPOSANTS DONT LE FONCTIONNEMENT EST CRITIQUE POUR LA SECURITE  
QUE PAR DES PIECES RECOMMANDÉES PAR LE FABRICANT.

AM-U06  
PULSE POWER  
SCHEMATIC DIAGRAM  
NO. 4-3 1601222A

