



# Service Manual

# Nakamichi

## SR-3

## SR-3A

## SR-3E

### Stereo Receiver



## CONTENTS

1.	General	1
2.	Parts Location for Electrical Adjustment	3
3.	Electrical Adjustments	4
3. 1.	Power Amplifier Section	4
3. 2.	Tuner Section	4
4.	Mechanism Ass'y and Parts List	7
4. 1.	Synthesis	7
4. 2.	Chassis Ass'y (A01)	8
4. 3.	Front Panel Ass'y (A02)	9
4. 4.	Rear Panel Ass'y (B01)	9
5.	Mounting Diagrams and Parts List	10
5. 1.	Power Switch P.C.B. Ass'y	10
5. 2.	AC Outlet P.C.B. Ass'y	10
5. 3.	Band Selector P.C.B. Ass'y	10
5. 4.	Volume P.C.B. Ass'y	11
5. 5.	Loudness Switch P.C.B. Ass'y	11
5. 6.	Speaker Switch P.C.B. Ass'y	12
5. 7.	Tone Control P.C.B. Ass'y	12
5. 8.	Speaker Terminal P.C.B. Ass'y	13
5. 9.	Power Supply P.C.B. Ass'y	13
5. 10.	Video Amp. P.C.B. Ass'y	15
5. 11.	Control Switch P.C.B. Ass'y	16
5. 12.	Display P.C.B. Ass'y	17
5. 13.	Main P.C.B. Ass'y	19
5. 14.	Eq. Sub P.C.B. Ass'y	20
5. 15.	Phono Input P.C.B. Ass'y	30
6.	Schematic Diagrams	31
6. 1.	IC Block Diagrams	31
6. 2.	Schematic Diagrams	34
6.2.1.	Tuner and Power Supply Section	34
6.2.2.	Amplifier Section	37
7.	Wiring Diagrams	40
8.	Block Diagrams	42
8. 1.	Tuner Section	42
8. 2.	Amplifier Section	42
9.	Specifications	43

## 1. GENERAL

### 1.1. Voltage Selector

Voltage selector is installed on the rear panel for Other version of the Nakamichi SR-3.  
This voltage selector can select either 110 V, 120 V, 220 V or 240 V at customer's disposal.

Schematic Ref. No.	Part No.	Description	Qty	Schematic Ref. No.	Part No.	Description	Qty
01	FA03548A	Package Ass'y (SR-3 (Canada))	1	01	0B90070A	AM Loop Antenna Holder	1
	FA03550A	Package Ass'y (SR-3 (Australia))	1	02	0B90081A	Feeder Antenna	1
	FA03549A	Package Ass'y (SR-3 (Other))	1	03	0B90194A	Antenna Adapter F (SR-3 & SR-3A)	1
	FA03547A	Package Ass'y (SR-3A)	1	04	0B90208A	Antenna Adapter EP (SR-3E)	1
	FA03569A	Package Ass'y (SR-3E (Europe & Germany))	1		0B90198A	AM Loop Antenna	1
	0F03988A	Carton Box (SR-3)	1		0D03092B	Poly-Bag 320x340x0.08	1
	0F03987A	Carton Box (SR-3A)	1		0D04449A	Important Notice Card	1
	0F03990B	Carton Box (SR-3E)	1		0D04651B	Owner's Manual SR-4/3/2 & SR-4A/3A/2A	1
	0F03984B	Packing L	1		0D04764B	Owner's Manual SR-4E/3E/2E	1
	0F03991A	Packing R	1		0D04673B	French Text (SR-4/3/2 (Canada))	1
	0F03670A	Poly-Sheet	1		0D04674B	Owner's Manual Text (SR-4/3/2 (Australia))	1
	0M03456A	Voltage Seal 220V (SR-3 (Other))	2		0D04675B	Owner's Manual Text (SR-4/3/2 (Other))	1
	0M03457A	Voltage Seal 240V (SR-3 (Australia))	2		DA03873A	Warranty Card Ass'y (SR-3A)	1
	DA03991A	Accessory Ass'y (SR-3 (Canada))	1	0D04766A	Catalogue (SR-3A)	1	
	DA03992A	Accessory Ass'y (SR-3 (Australia))	1	0D04767A	Warranty Card (SR-3 (Canada))	1	
DA04009A	Accessory Ass'y (SR-3 (Other))	1					
DA03990A	Accessory Ass'y (SR-3A)	1					
DA03996A	Accessory Ass'y (SR-3E (Europe))	1					
DA04055A	Accessory Ass'y (SR-3E (Germany))	1					

1.2. Package Ass'y and Parts List

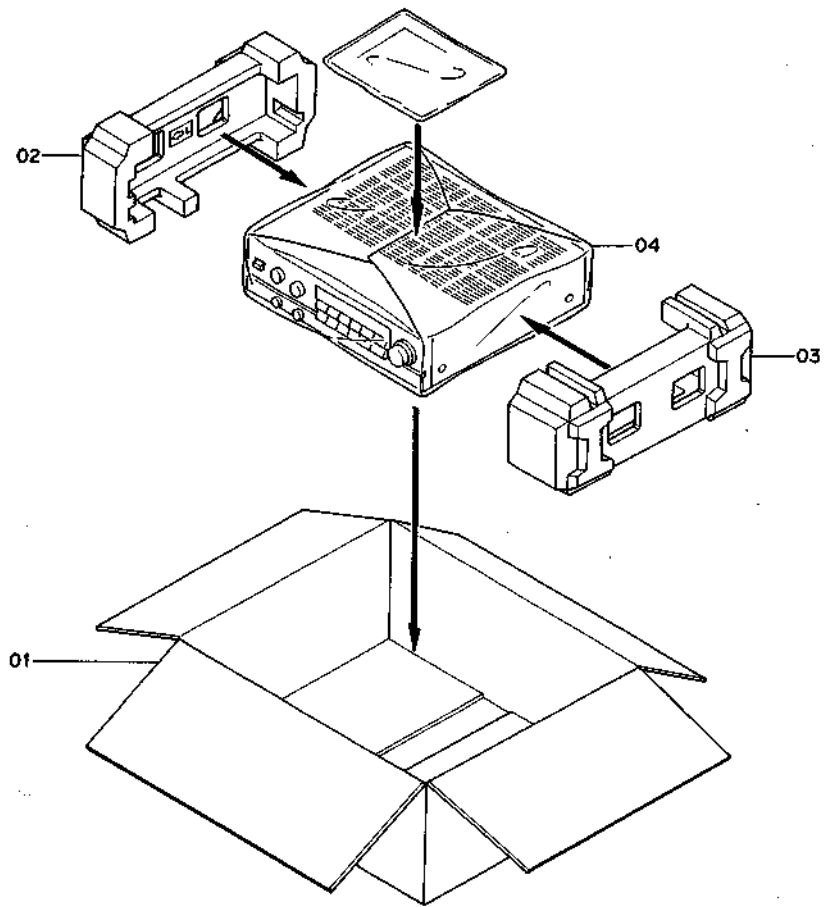


Fig. 1.1

1.3. Accessory Ass'y and Parts List

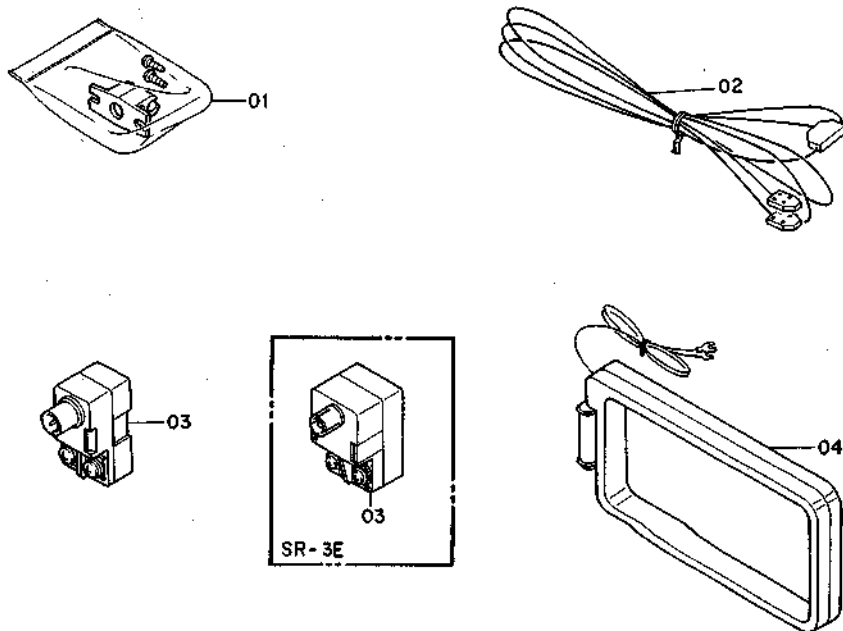


Fig. 1.2

2. PARTS LOCATION FOR ELECTRICAL ADJUSTMENT

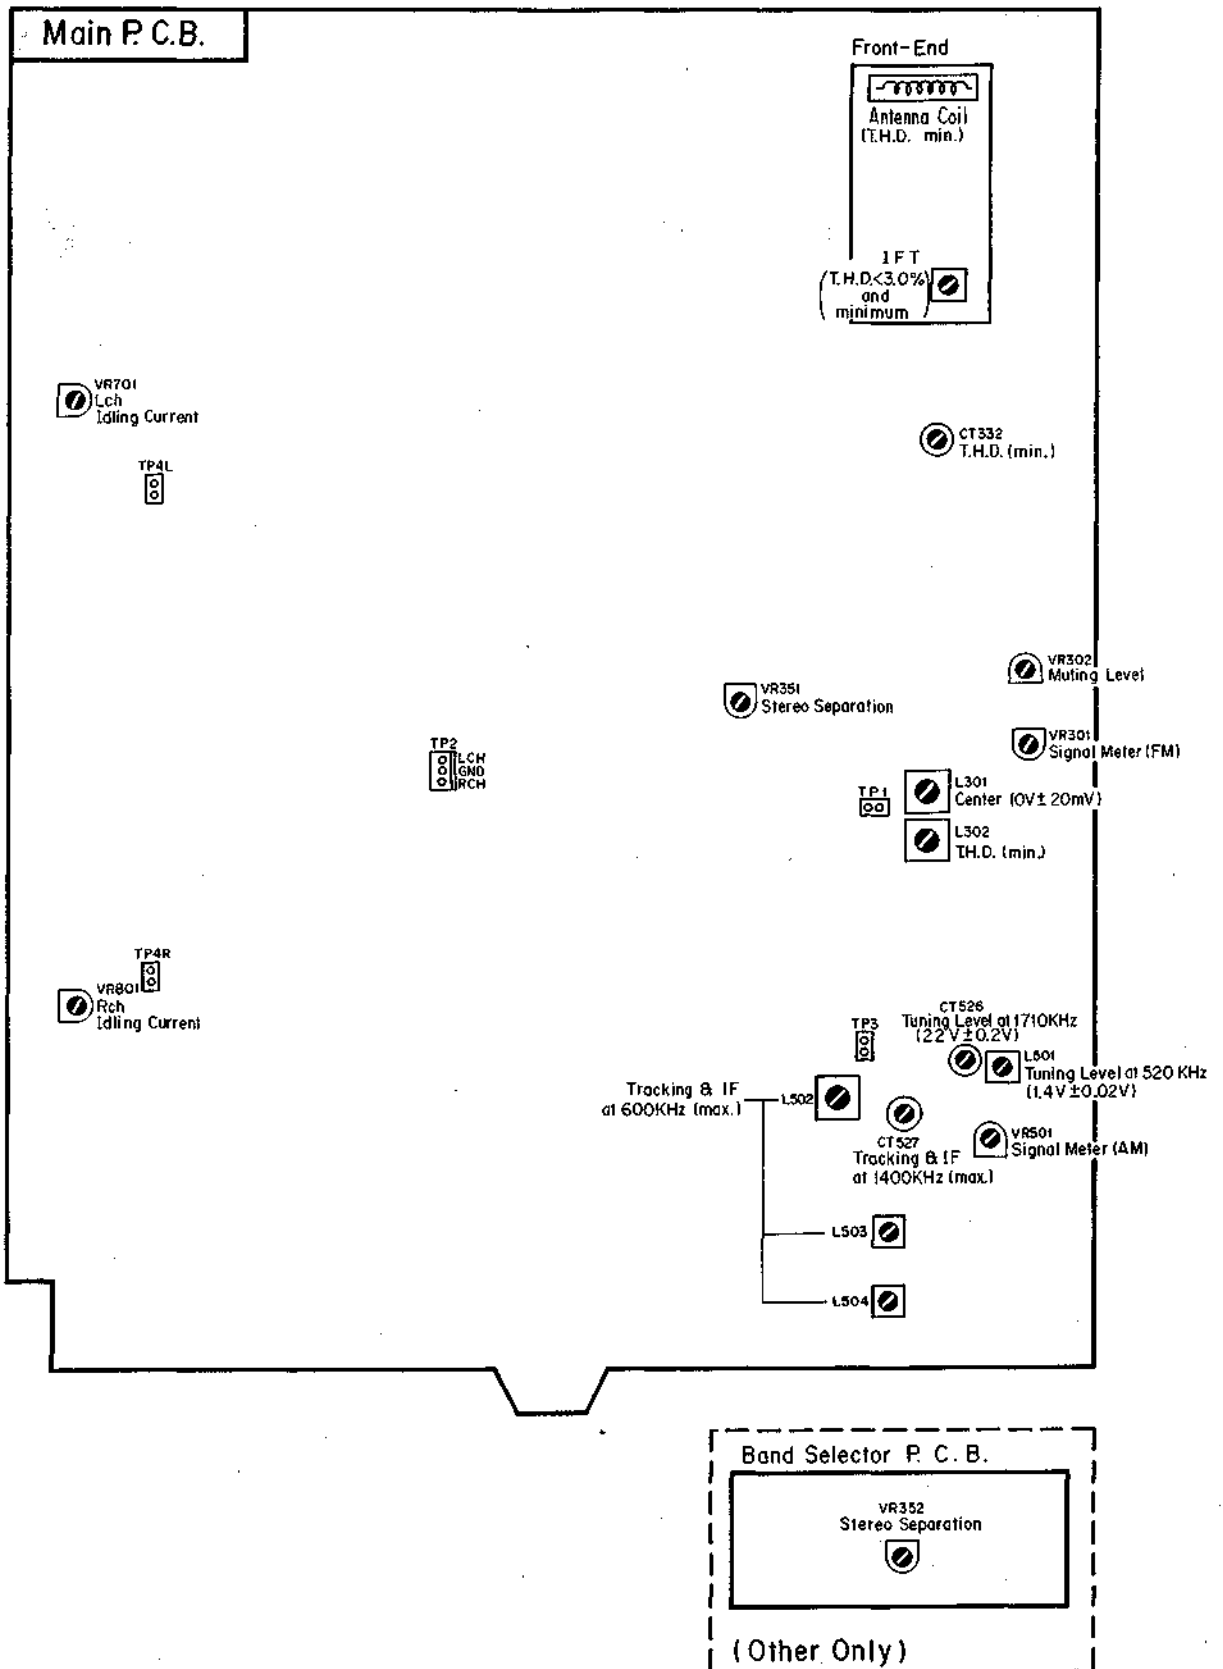


Fig. 2

### 3. ELECTRICAL ADJUSTMENTS

#### 3.1. Power Amplifier Section

STEP	ITEM	SIGNAL SOURCE	OUTPUT CONNECTION	MODE	ADJUSTMENT	REMARKS
1	Idling Current	None	DC Voltmeter between TP4L-1 & 2 and TP4R-1 & 2 on Main P.C.B.	Input Selector - CD Output Level - Min. Speaker Selector A/B - OFF	Main P.C.B. VR701 VR801	1. Insert shorting plugs into the CD Player Input Jacks. 2. Turn ON the power and allow 3 minutes before adjusting. (Top Cover must be installed in this period of time.) 3. Adjust VR701 (VR801) to obtain 20 mV $\pm$ 1 mV on the DC voltmeter.

#### 3.2. Tuner Section

Note: Adjustment should be made in a shielded room in principle.

##### 3.2.1. FM Tuner Section

STEP	ITEM	OUTPUT CONNECTION	MODE	ADJUSTMENT	REMARKS
1	Preliminary Step	See Fig. 3.1	Stereo Receiver Input Selector - Tuner Band Selector - FM Tape Monitor - Source  Signal Generator Freq. - 98 MHz RF Level - 65 dBf Modulation - See REMARKS		1. Set the Stereo Receiver as indicated in the MODE. 2. Adjustment and confirmation should be made after tuning in to the set carrier frequency of the Signal Generator.  Note: Contents of modulation 1. For U.S.A., Canada & Other (Wide) o Stereo Audio: 1 kHz, 91% Pilot: 19 kHz, 9% o Mono Audio: 1 kHz, 100% 2. For Europe, Germany, Australia & Other (Narrow) o Stereo Audio: 1 kHz, 51% Pilot: 19 kHz, 9% o Mono Audio: 1 kHz, 60%
2	Usable Sensitivity Adjustment	Distortion Meter to Tape 1 Record Output Jacks	Stereo Receiver Same as above  Signal Generator Freq. - 98 MHz RF Level - 12.5 dBf Modulation - Mono	Main P.C.B. Front-end IFT Antenna Coil (See Fig. 2)	1. Set the Stereo Receiver to Manual mode by pressing the Tuning Mode button. 2. Adjust the IFT to obtain minimum distortion (total harmonic distortion (THD): 3% or less). 3. Adjust the distance between windings of antenna coil to obtain minimum distortion. 4. Set the frequency of the Signal Generator to 90 MHz/106 MHz and check that the THD is 3% or less.

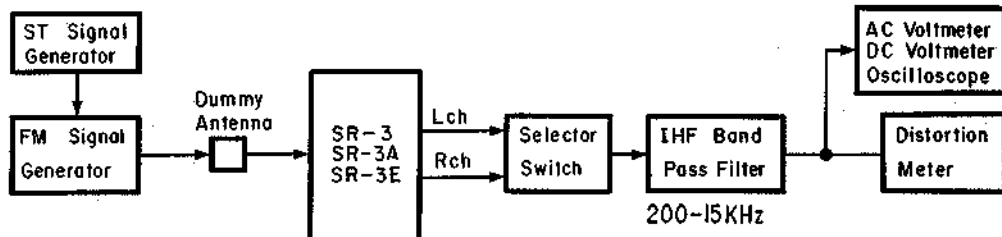


Fig. 3.1

STEP	ITEM	OUTPUT CONNECTION	MODE	ADJUSTMENT	REMARKS
3	Center Voltage and THD Adjustment	DC Voltmeter between TP1-1 & TP1-2 on Main P.C.B. and Distortion Meter to Tape 1 Record Jacks	Stereo Receiver Same as above  Signal Generator Freq. - 98 MHz RF Level - 65 dBf Modulation - Mono	Main P.C.B. L301 L302	<ol style="list-style-type: none"> <li>1. Set the Stereo Receiver to Manual mode.</li> <li>2. Adjust L301 so that the reading on the DC voltmeter is 0 V <math>\pm</math>20 mV.</li> <li>3. Adjust L302 to obtain minimum distortion (THD: 0.07% or less). Repeat 2 and 3, if necessary.</li> </ol>
4	Muting Level Adjustment	Oscilloscope to Tape 1 Record Output Jacks	Stereo Receiver Same as above  Signal Generator Freq. - 98 MHz RF Level - 30 dBf Modulation - Stereo	Main P.C.B. VR302	<ol style="list-style-type: none"> <li>1. Set the Stereo Receiver to Auto mode.</li> <li>2. Rotate VR302 fully counterclockwise. Then, return it clockwise gradually until a waveform appears on the oscilloscope.</li> <li>3. Decrease the RF level of the Signal Generator until the waveform on the oscilloscope disappears. Then increase the RF level gradually until a waveform appears again. At this point, check that the RF level of the Signal Generator is 30 dBf <math>\pm</math>3 dB.</li> </ol>
5	Signal Strength Meter Level Adjustment	None	Stereo Receiver Same as above  Signal Generator Freq. - 98 MHz RF Level - 56 dBf Modulation - Stereo	Main P.C.B. VR301	<ol style="list-style-type: none"> <li>1. Set the Stereo Receiver to Auto mode.</li> <li>2. Adjust VR301 so that all segments (1-5) of the signal strength meter light up.</li> <li>3. Decrease the RF level of the Signal Generator to distinguish the segment 5. Next, increase the RF level gradually so that the segment 5 starts illuminating. At this point, check that the RF level of the Signal Generator is 56 dBf <math>\pm</math>2 dB.</li> </ol>
6	Stereo Separation Adjustment	AC Voltmeter to Tape 1 Record Output Jacks	Stereo Receiver Same as above  Signal Generator Freq. - 98 MHz RF Level - 65 dBf Modulation - L or R only	Main P.C.B. VR351.  Band Selector P.C.B. VR352 (Other only)	<p><b>Except for Other version:</b></p> <ol style="list-style-type: none"> <li>1. Set the Stereo Receiver to Auto mode.</li> <li>2. Apply modulation to only L channel.</li> <li>3. Adjust VR351 to obtain minimum reading on the AC voltmeter at the R channel output jack.</li> <li>4. Apply modulation to only R channel.</li> <li>5. Check that the reading on the AC voltmeter at the L channel output jack is within <math>\pm</math>1 dB with respect to the reading in 3. If not, repeat 2 through 4.</li> </ol> <p><b>For Other version:</b></p> <ol style="list-style-type: none"> <li>1. Set the switches on the rear panel as follows: Freq. Step FM/AM - 100 kHz/10 kHz IF Band - Wide</li> <li>2. Adjust VR351 by applying the same procedures as mentioned above.</li> <li>3. Set the switches as follows: Freq. Step FM/AM - 50 kHz/9 kHz IF Band - Narrow</li> <li>4. Apply the same procedures as mentioned above, except for VR352.</li> </ol>

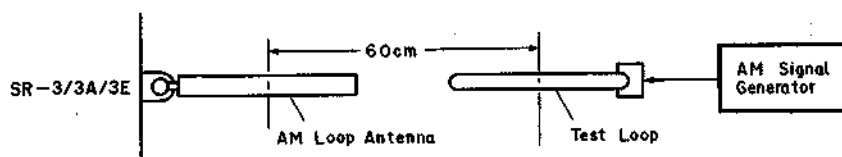


Fig. 3.2

STEP	ITEM	OUTPUT CONNECTION	MODE	ADJUSTMENT	REMARKS
7	Stereo/Mono Selection Check and THD Adjustment		Stereo Receiver Same as above  Signal Generator Freq. - 98 MHz RF Level - 65 dBf Modulation - Stereo/ Mono	Main P.C.B. CT332	<ol style="list-style-type: none"> <li>1. Set the Stereo Generator to L-R mode.</li> <li>2. Set the Stereo Receiver to Manual mode and check that the Stereo indicator goes out and stereo outputs disappear.</li> <li>3. Set the Stereo Receiver to Auto mode and adjust CT332 to obtain minimum distortion (THD: 0.09% or less).</li> </ol>

### 3.2.2. AM Tuner Section

Note: Frequencies for Europe, Germany, Australia and Other (Narrow) are indicated in parentheses.

STEP	ITEM	OUTPUT CONNECTION	MODE	ADJUSTMENT	REMARKS
1	Tuning Level Adjustment	DC Voltmeter between TP3-1 and TP3-2 on Main P.C.B.	Stereo Receiver Input Selector - Tuner Band Selector - AM Tape Monitor - Source  Signal Generator Freq. - 520 (522) kHz/ 1710 (1611) kHz	Main P.C.B. L501 CT526	<ol style="list-style-type: none"> <li>1. Set the frequency of the Signal Generator to 520 kHz (522 kHz) and make tuning.</li> <li>2. Adjust L501 to obtain 1.4 V <math>\pm</math>0.02 V on the DC voltmeter.</li> <li>3. Change the frequency to 1710 kHz (1611 kHz) and make tuning.</li> <li>4. Adjust CT526 to obtain 22 V <math>\pm</math>0.2 V on the DC voltmeter.</li> <li>5. If satisfactory results are not obtained, repeat 1 through 4.</li> </ol>
2	Tracking and IF Adjustment	AC Voltmeter to Tape 1 Record Output Jacks	Stereo Generator Same as above  Signal Generator Freq. - 600 (603) kHz/ 1400 (1404) kHz RF Level - 82 dB $\mu$ /m Modulation - 400 Hz 30%	Main P.C.B. L502 L503 L504 CT527	<ol style="list-style-type: none"> <li>1. Set the measurement instruments as shown in Fig. 3.2. Set the distance between the AM Loop Antenna of the SR-3/3A/3E and a test loop to 60 cm. To obtain 56 dB<math>\mu</math>/m at the AM Loop Antenna, set the RF level output of the AM Signal Generator to 82 dB<math>\mu</math>/m as loss is 26 dB<math>\mu</math>/m in this setting.</li> <li>2. Set the frequency of the Signal Generator to 600 kHz (603 kHz) and make tuning.</li> <li>3. Adjust L502 to obtain maximum reading on the AC voltmeter.</li> <li>4. Adjust L503 to obtain maximum reading on the AC voltmeter.</li> <li>5. Adjust L504 to obtain maximum reading on the AC voltmeter.</li> <li>6. Set the frequency to 1400 kHz (1404 kHz) and make tuning.</li> <li>7. Adjust CT527 to obtain maximum reading on the AC voltmeter.</li> <li>8. Repeat 2 through 7 once.</li> </ol>
3	Signal Strength Meter Level Adjustment	None	Stereo Generator Same as above  Signal Generator Freq. - 1000 (999) kHz RF Level - 106 dB $\mu$ /m	Main P.C.B. VR501	<ol style="list-style-type: none"> <li>1. With the same setting as in Step 2, set the RF level output of the AM Signal Generator to 106 dB<math>\mu</math>/m in order to obtain 80 dB<math>\mu</math>/m at the AM Loop Antenna.</li> <li>2. Adjust VR501 so that the segment 5 of the signal strength meter starts illuminating.</li> </ol> <p>Note: Before adjustment, select AM mode and wait for more than three minutes.</p>

## 4. MECHANISM ASS'Y AND PARTS LIST

### 4.1. Synthesis

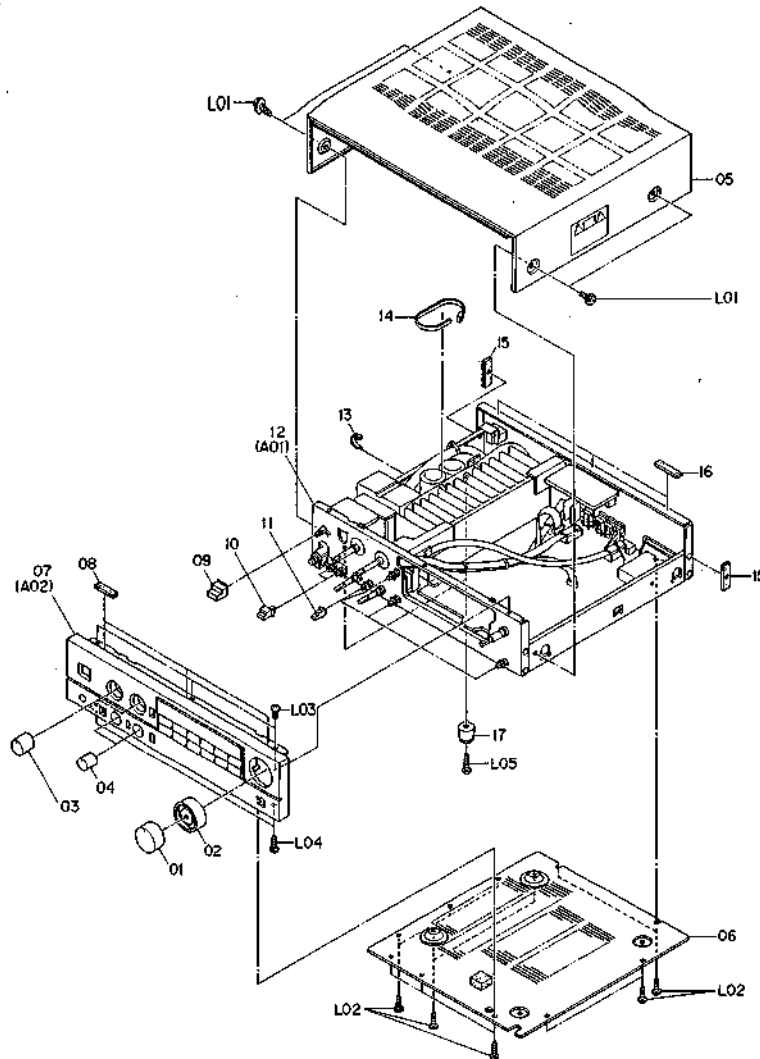


Fig. 4.1

Schematic Ref. No.	Part No.	Description	Q'ty	Schematic Ref. No.	Part No.	Description	Q'ty
		<b>Synthesis</b> Serial No.: D10501001 -			(OE00888A)	BT3x12 @ Binding	(2)
					(OJ05214A)	P.C.B. Cushion	(1)
01	HA05103A	Volume Knob Ass'y	1	07	HA05098A	Front Panel Ass'y (SR-3 (Canada))	1
02	HA05104A	Balance Knob Ass'y	1		HA05099A	Front Panel Ass'y (SR-3 (Australia & Other))	1
03	HA05105A	Selector Knob Ass'y	2		HA05101A	Front Panel Ass'y (SR-3A)	1
04	HA05106A	Tone Control Knob Ass'y	2		HA05100A	Front Panel Ass'y (SR-3E (Europe & Germany))	1
05	HA05149A	Top Cover Ass'y (SR-3 (Canada & Australia), SR-3A & SR-3E (Europe))	1	08	OJ05364A	Top Cover Cushion T4	3
	HA05180A	Top Cover Ass'y (SR-3 (Other))	1	09	OH04947A	Power Switch Knob	1
	HA05266A	Top Cover Ass'y (SR-3E (Germany)) (Consisting of the followings):	1	10	OH04950B	Push Switch Knob 10L	2
	(OH04934C)	Top Cover	(1)	11	OH04949E	Push Switch Knob 5L	4
	(OJ05215B)	Power Transformer Cushion (SR-3, SR-3A & SR-3E (Europe))	(1)	12	JA04240A	Chassis Ass'y (SR-3 (Canada))	1
	(OJ05376A)	Power Transformer Cushion VDE (SR-3E (Germany))	(1)		JA04242A	Chassis Ass'y (SR-3 (Australia))	1
	(OM04377B)	Caution Label	(1)		JA04241A	Chassis Ass'y (SR-3 (Other))	1
	(OJ05261A)	Top Cover Cushion S	(3)		JA04244A	Chassis Ass'y (SR-3A)	1
	(OM04811A)	Voltage Caution Sheet (SR-3 (Other))	(1)		JA04243A	Chassis Ass'y (SR-3E (Europe))	1
	(OM04812A)	Voltage Caution Label (SR-3 (Other))	(1)	13	JA04288A	Chassis Ass'y (SR-3E (Germany))	1
06	JA04245A	Bottom Cover Ass'y (Consisting of the followings):	1	14	OB90019A	Insu-Lock SKB80	27
	(OJ05203C)	Bottom Cover	(1)	15	OB08515A	Insu-Lock BK-1	4
	(OJ05162A)	Leg T-S	(2)	16	OJ05226A	Side Cushion	2
	(OM04377B)	Caution Label	(1)	17	OJ05363A	Top Cover Cushion T3	3
				L01	OJ05162A	Leg T-S	2
				L01	OE03032A	BT4x8 @ Pan Washer-faced (Black Chromate)	4
				L02	OE00868A	BT3x8 @ Binding	12
				L03	OE00857A	BT3x6 @ Binding	3
				L04	OE00921A	BT3x8 @ Binding (Black Chromate)	2
				L05	OE00888A	BT3x12 @ Binding	2



Schematic Ref. No.	Part No.	Description	Qty
A01	JA04240A	Chassis Ass'y (SR-3 (Canada))	1
	JA04242A	Chassis Ass'y (SR-3 (Australia))	1
	JA04241A	Chassis Ass'y (SR-3 (Other))	1
	JA04244A	Chassis Ass'y (SR-3A)	1
	JA04243A	Chassis Ass'y (SR-3E (Europe))	1
	JA04288A	Chassis Ass'y (SR-3E (Germany))	1
		Serial No.: D10501001 -	
01	OJ05092A	Snap Plate	1
02	OJ05258B	Selector Knob Himelton	2
03	OJ05200C	Front Chassis	1
04	BA06380A	Power Switch P.C.B. Ass'y (SR-3 (Canada) & SR-3A)	1
	BA06252A	Power Switch P.C.B. Ass'y (SR-3 (Australia & Other))	1
	BA06251A	Power Switch P.C.B. Ass'y (SR-3E (Europe))	1
	BA06821A	Power Switch P.C.B. Ass'y (SR-3E (Germany))	1
05	BA06254A	Speaker Switch P.C.B. Ass'y	1
06	OB70081A	Rotary Switch Controller 6-5	1
07	OB70080A	Rotary Switch Controller 4-4	1
08	OB70084A	Push Switch Controller	1
09	OB70085A	Push Switch Wire	1
10	BA06245A	Tone Control P.C.B. Ass'y (SR-3, SR-3A & SR-3E (Europe))	1
	BA06827A	Tone Control P.C.B. Ass'y (SR-3E (Germany))	1
11	BA06243A	Volume P.C.B. Ass'y	1
12	BA06290A	Loudness Switch P.C.B. Ass'y	1
13	OJ05201C	Power Supply Chassis	1
14	OB50075A	Power Transformer (SR-3 (Canada) & SR-3A)	1
	OB50076A	Power Transformer (SR-3 (Australia) & SR-3E (Europe))	1
	OB50077A	Power Transformer (SR-3 (Other))	1
	OB50091A	Power Transformer (SR-3E (Germany))	1
15	BA06248A	Power Supply P.C.B. Ass'y (SR-3 (Canada & Other) & SR-3A)	1
	BA06249A	Power Supply P.C.B. Ass'y (SR-3 (Australia) & SR-3E (Europe))	1
	BA06828A	Power Supply P.C.B. Ass'y (SR-3E (Germany))	1
16	OJ05019A	Collar Bushing 10mm	2
17	OJ05208A	Collar Bushing 15mm	2
18	OB90210A	Insu-Lock T30MR-HS	4
19	OJ05206A	Heat Sink Holder B	1
20	OJ05204B	Heat Sink Holder C	1
21	BA06237A	Main P.C.B. Ass'y (SR-3 (Canada) & SR-3A)	1
	BA06310A	Main P.C.B. Ass'y (SR-3 (Australia))	1
	BA06239A	Main P.C.B. Ass'y (SR-3 (Other))	1
	BA06238A	Main P.C.B. Ass'y (SR-3E (Europe))	1
	BA06825A	Main P.C.B. Ass'y (SR-3E (Germany))	1
22	BA06283A	Speaker Terminal P.C.B. Ass'y (SR-3, SR-3A & SR-3E (Europe))	1
	BA06822A	Speaker Terminal P.C.B. Ass'y (SR-3E (Germany))	1
23	BA06257A	Video Amp. P.C.B. Ass'y (SR-3 & SR-3A)	1
	BA06850A	Video Amp. P.C.B. Ass'y (SR-3E (Europe))	1
	BA06830A	Video Amp. P.C.B. Ass'y (SR-3E (Germany))	1
24	OB82759A	PD Connector (BLK) (SR-3 (Canada & Other) & SR-3A)	1
25	OB82758A	PD Connector (BRN) (SR-3 (Canada & Other) & SR-3A)	1
26	OB60388A	AC Outlet P.C.B. (SR-3 (Canada & Other) & SR-3A)	1
27	OJ05224A	Insulator (SR-3 (Canada))	1
28	HA05089A	Rear Panel Ass'y (SR-3 (Canada))	1
	HA05091A	Rear Panel Ass'y (SR-3 (Australia))	1
	HA05090A	Rear Panel Ass'y (SR-3 (Other))	1
	HA05093A	Rear Panel Ass'y (SR-3A)	1
	HA05092A	Rear Panel Ass'y (SR-3E (Europe & Germany))	1
29	OJ05202C	Side Chassis	1
30	BA06308A	Band Selector P.C.B. Ass'y (SR-3 (Other))	1
31	OB81738A	Ground Wire (SR-3E (Germany))	1
L01	OE00612A	M3x6 # Pan (2A)	9
L02	OE00868A	BT3x8 # Binding	18
L03	-	Nut M9	(1)
L04	-	Washer	(1)

4.2. Chassis Ass'y (A01)

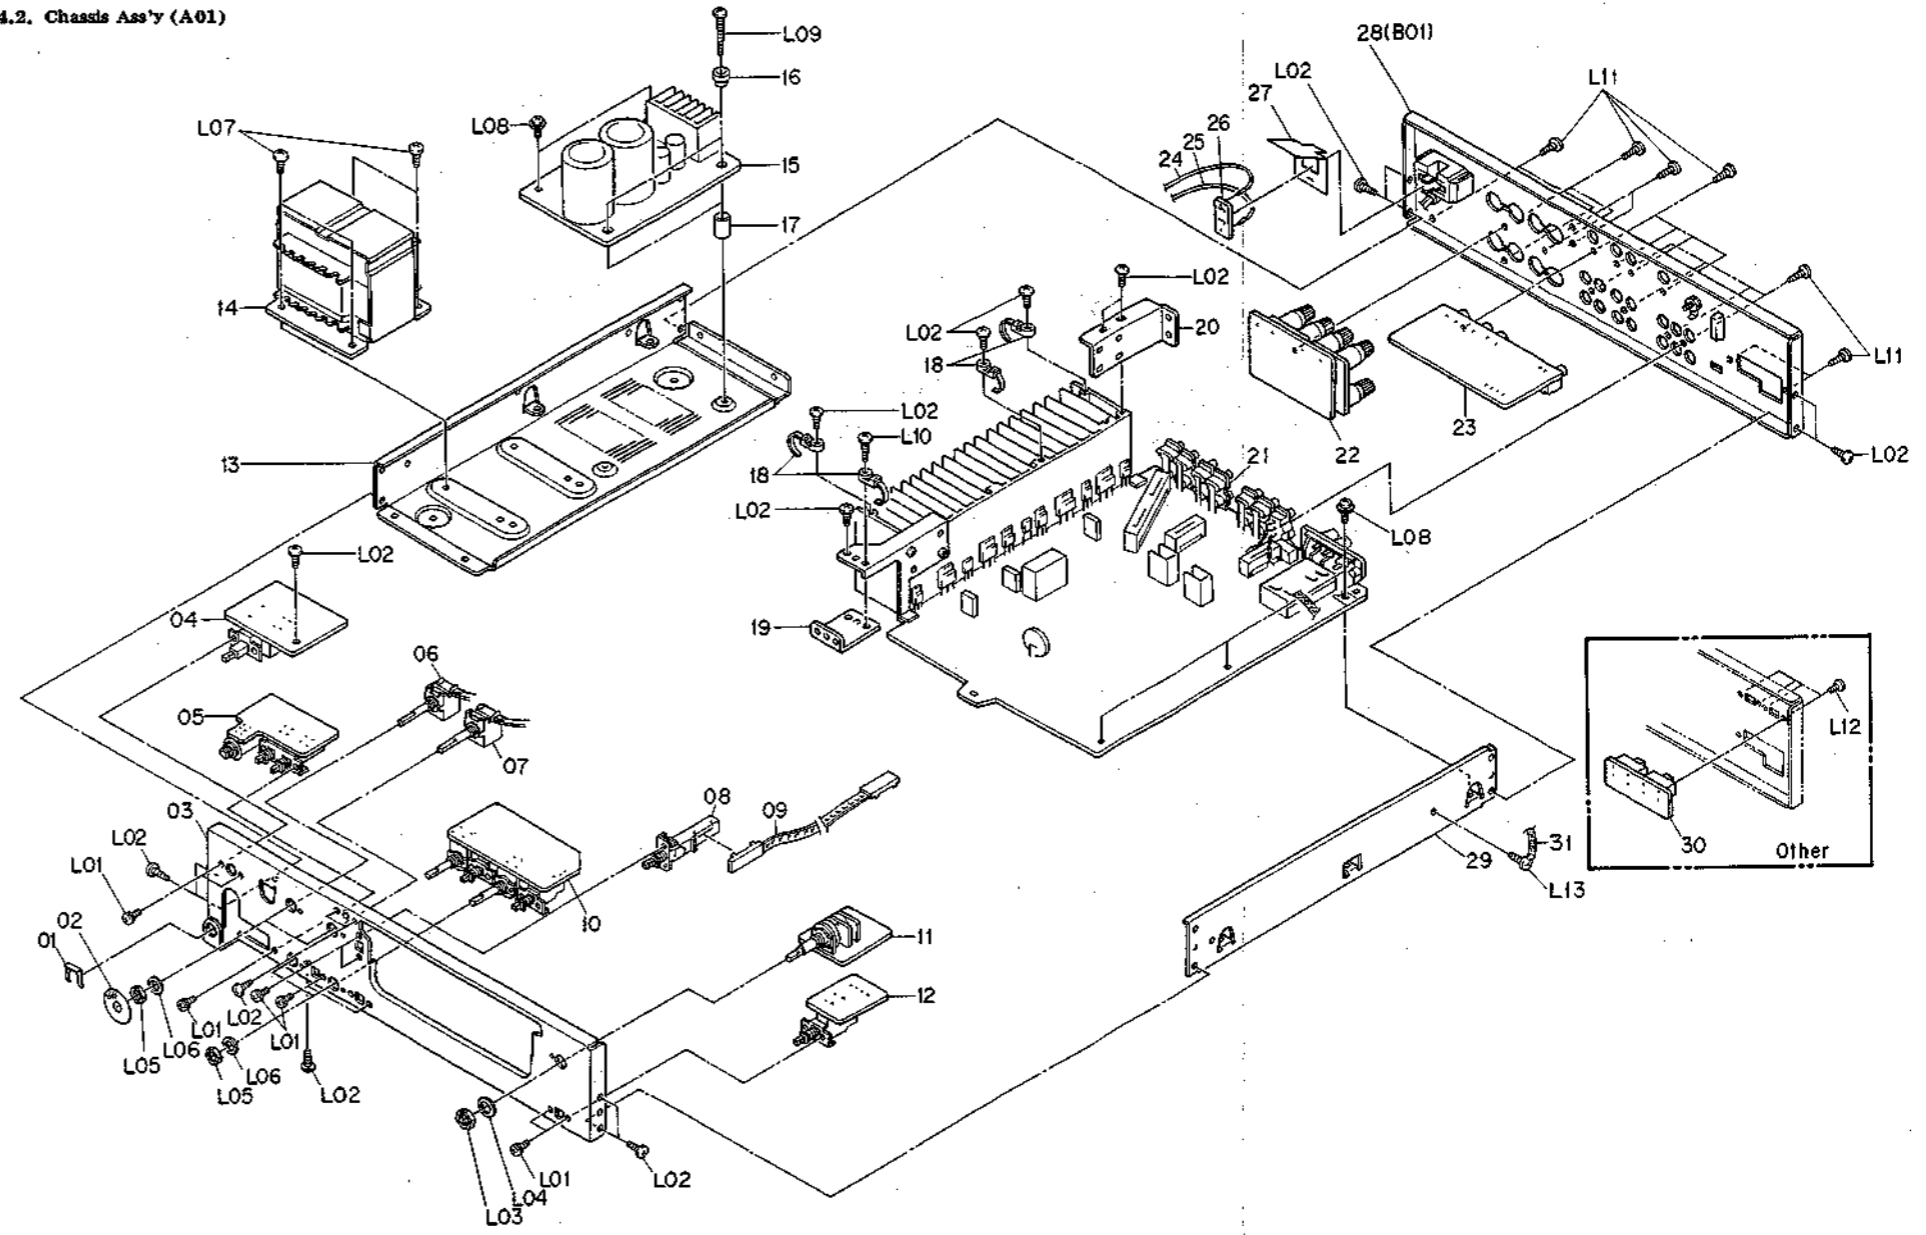


Fig. 4.2

Schematic Ref. No.	Part No.	Description	Qty
L05	-	Nut M7	(4)
L06	-	Washer	(4)
L07	OE08217A	BT4x8 # Binding	4
L08	OE03157A	BT3x8 # Binding with Washer	5
L09	OE03071A	BT3x25 # Binding	2
L10	OE00888A	BT3x12 # Binding	1
L11	OE00921A	BT3x8 # Binding (Black Chromate)	16
L12	OE00945A	M2.6x4 # Binding (Black Chromate) (SR-3 (Other))	4
L13	OE03321A	ST3x6 # Binding (SR-3E (Germany))	1

4.3. Front Panel Ass'y (A02)

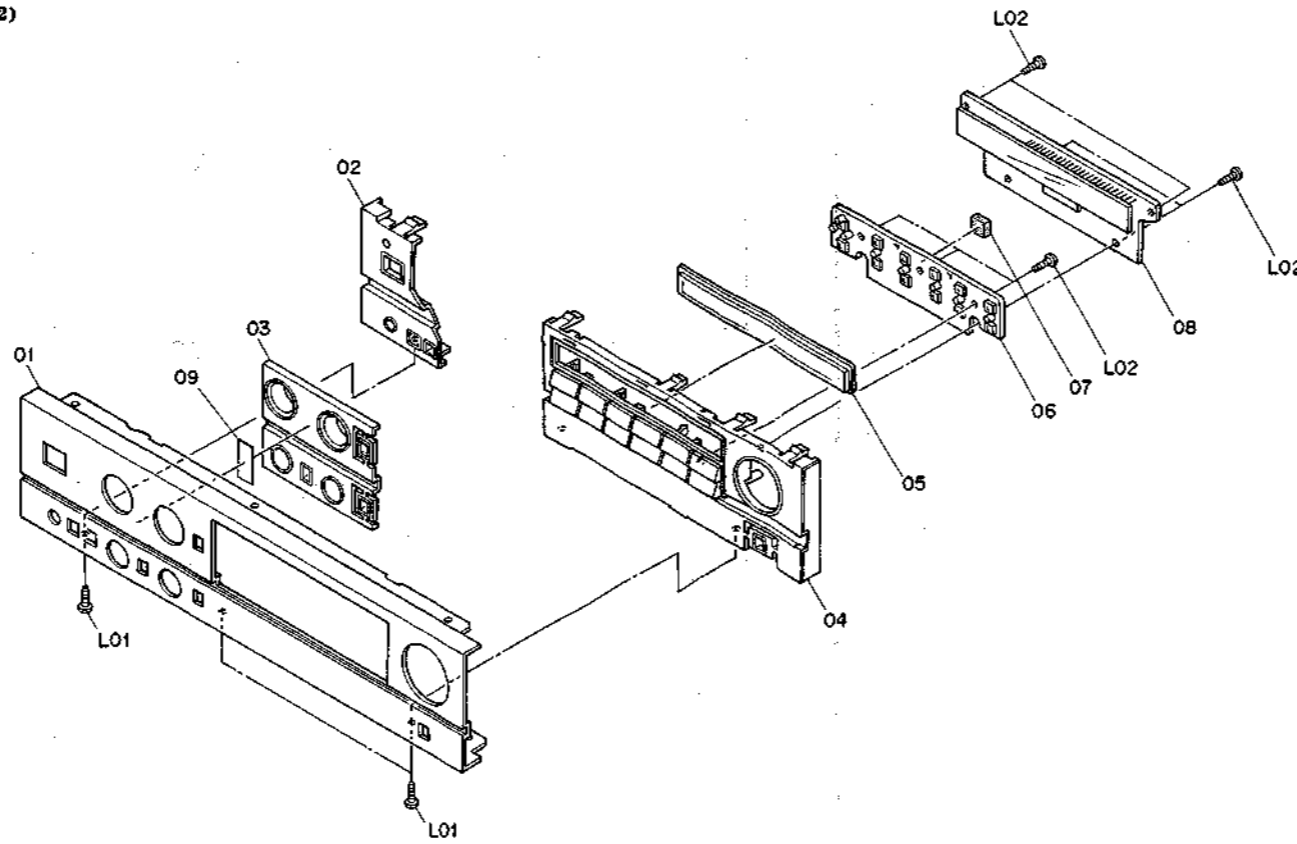


Fig. 4.3

4.4. Rear Panel Ass'y (B01)

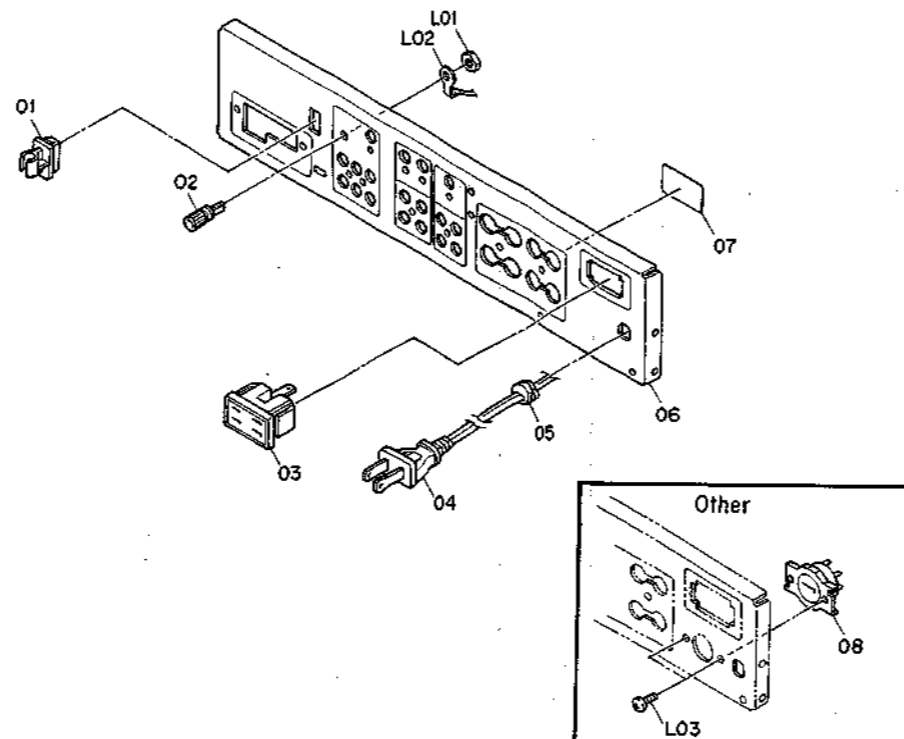


Fig. 4.4

Schematic Ref. No.	Part No.	Description	Qty	
A02	HA05098A	Front Panel Ass'y (SR-3 (Canada))	1	
	HA05099A	Front Panel Ass'y (SR-3 (Australia & Other))	1	
	HA05101A	Front Panel Ass'y (SR-3A)	1	
	HA05100A	Front Panel Ass'y (SR-3E (Europe & Germany))	1	
		Serial No.: D10501001 -		
	01	OH04924B	Front Panel (SR-3)	1
		OH04923B	Front Panel (SR-3A)	1
		OH04925A	Front Panel (SR-3E)	1
	02	OH04935C	Front Escutcheon L	1
03	OH04936A	Front Escutcheon C	1	
04	HA05102B	Front Escutcheon R Ass'y	1	
05	OH04938A	Display Lens	1	
06	BA06242A	Control Switch P.C.B. Ass'y	1	
07	OJ05262A	Indicator Cushion	1	
08	BA06240A	Display P.C.B. Ass'y (SR-3 (Canada) & SR-3A)	1	
	BA06241A	Display P.C.B. Ass'y (SR-3 (Australia & Other) & SR-3E (Europe & Germany))	1	
L01	0E00921A	BT3x8 @ Binding (Black Chromate)	3	
L02	0E00868A	BT3x8 @ Binding	7	
B01	HA05089A	Rear Panel Ass'y (SR-3 (Canada))	1	
	HA05091A	Rear Panel Ass'y (SR-3 (Australia))	1	
	HA05090A	Rear Panel Ass'y (SR-3 (Other))	1	
	HA05093A	Rear Panel Ass'y (SR-3A)	1	
	HA05092A	Rear Panel Ass'y (SR-3E (Europe & Germany))	1	
		Serial No.: D10501001 -		
	01	0B90071A	AM Loop Antenna Holder	1
	02	0B81604A	Ground Terminal T-5435	1
	03	0B81597A	AC Outlet 2P (SR-3 (Canada & Other) & SR-3A)	1
	04	0B90205A	Power Cord (SR-3 (Canada & Other) & SR-3A)	1
		0B05241A	Power Cord (SR-3 (Australia))	1
		0B08093U	Power Cord (SR-3E (Europe & Germany))	1
	05	0B08351A	Cord Bushing 4K-4 (SR-3 (Canada & Other) & SR-3A)	1
		0B08037U	Cord Bushing C (SR-3 (Australia & SR-3E (Europe & Germany))	1
	06	OH04931B	Rear Panel (SR-3 (Canada))	1
		OH04965B	Rear Panel (SR-3 (Australia))	1
		OH04933B	Rear Panel (SR-3 (Other))	1
		OH04930B	Rear Panel (SR-3A)	1
		OH04932A	Rear Panel (SR-3E (Europe & Germany))	1
	07	0M04380A	Barrier Caution Label (SR-3 (Canada) & SR-3A)	1
	08	0B70049A	Voltage Selector (SR-3 (Other))	1
L01	-	Nut (Ground Terminal)	(1)	
L02	-	Earth Lug (Ground Terminal)	(1)	
L03	0E00985A	M3x6 @ Binding (Black Chromate) (SR-3 (Other))	2	

## 5. MOUNTING DIAGRAMS AND PARTS LIST

- Notes: 1. Mounting diagram shows a dip side view of the printed circuit board.  
 2. Diode is 1SS53, 1S1555, or 1SS176 unless otherwise specified.  
 3. Following transistors are interchangeable with each other.  
 a. 2SA733, 2SA608SP, 2SA1048, 2SA1175  
 b. 2SC945, 2SC536SP, 2SC2458, 2SC2785  
 4. Abbreviation for part name:  
 TR — Transistor, SiD — Silicon Diode, ZD — Zener Diode, Varicap — Variable Capacitance Diode  
 RK — Carbon Resistor, RM — Metal Film Resistor, RF — Fail Safe Type Resistor, RC — Cement Resistor  
 CE — Electrolytic Capacitor, CM — Mylar Capacitor, CC — Ceramic Capacitor, CP — PP Capacitor,  
 CMM — Metalized Mylar Capacitor, CSP — Polystyrene Capacitor, C — Mica Capacitor

5.1. Power Switch P.C.B. Ass'y

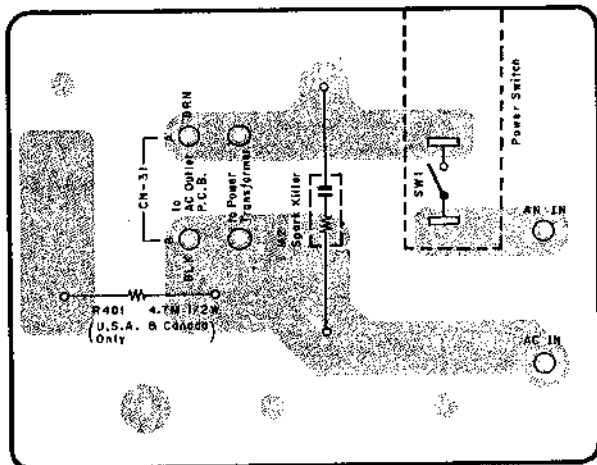


Fig. 5.1

5.2. AC Outlet P.C.B. Ass'y

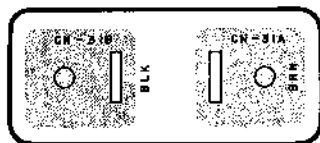


Fig. 5.2

5.3. Band Selector P.C.B. Ass'y

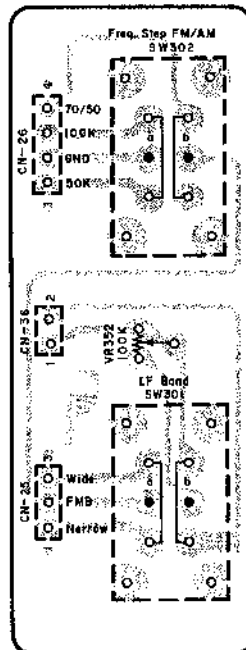


Fig. 5.3.1 2nd Version

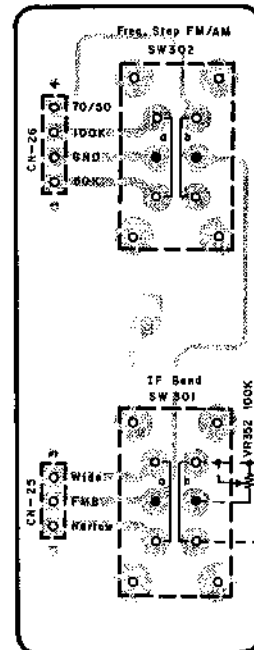


Fig. 5.3.2 1st Version

Schematic Ref. No.	Part No.	Description	Schematic Ref. No.	Part No.	Description
R401	BA06380A	Power Switch P.C.B. Ass'y (SR-3 (Canada) & SR-3A)	CN31A CN31B	OB90264A	Spark Killer XE-333 (SR-3E (Europe & Germany))
	BA06252A	Power Switch P.C.B. Ass'y (SR-3 (Australia & Other))		OE00752A	Eyelet 2x3 (2)
	BA06251A	Power Switch P.C.B. Ass'y (SR-3E (Europe))		OE00147A	Earth Lug B-6 (SR-3 (Canada) & SR-3A) (1)
	BA06821A	Power Switch P.C.B. Ass'y (SR-3E (Germany))		BA06255A	AC Outlet P.C.B. Ass'y (SR-3 (Canada & Other) & SR-3A)
SW1	OB60387B	Power Switch P.C.B. R.K 4.7M 1/2W J (SR-3 (Canada) & SR-3A)	VR352 SW301,302 CN25 CN26 CN36	OB60388A	AC Outlet P.C.B.
	OB20057A	Power Switch P.C.B. R.K 4.7M 1/2W J (SR-3 (Canada) & SR-3A)		OB82758A	PD Connector V450
M2	OB71005A	Power Switch (SR-3 (Canada) & SR-3A)	OB60378B OB32099A OB70039A OB82804A OB82805A OB82905A	OB82759A	PD Connector V450
	OB71006A	Power Switch (SR-3 (Australia & Other) & SR-3E (Europe & Germany))		BA06308A	Band Selector P.C.B. Ass'y (SR-3 (Other))
	OB08342A	Spark Killer (SR-3 (Canada) & SR-3A)		OB60378B	Band Selector P.C.B. Semi VR 100K
	OB08240A	Spark Killer (SR-3 (Australia & Other))		OB32099A	Slide Switch 22S
				OB70039A	3P Connector 160
				OB82804A	4P Connector 200
				OB82805A	2P Connector S200

5.4. Volume P.C.B. Ass'y

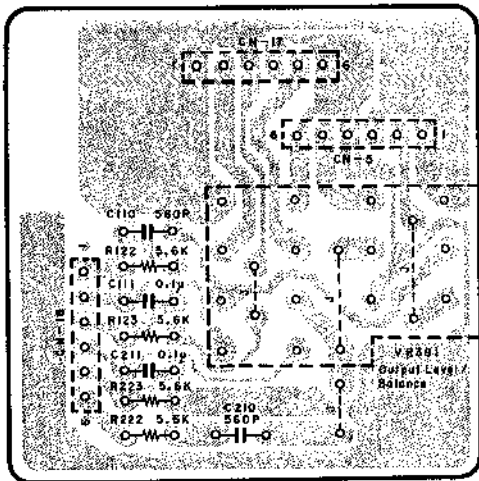


Fig. 5.4

5.5. Loudness Switch P.C.B. Ass'y

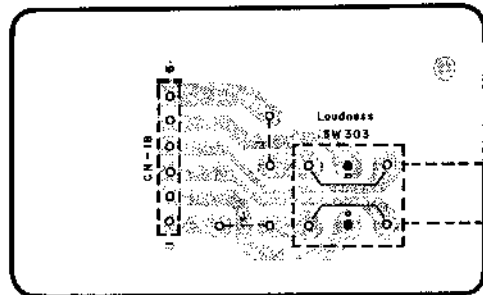


Fig. 5.5.1 2nd Version

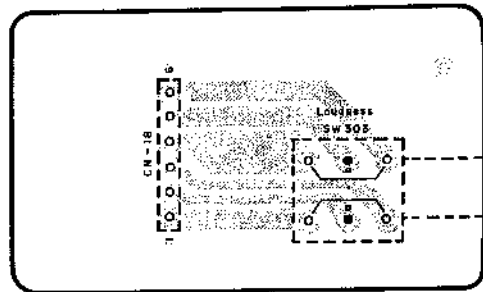


Fig. 5.5.2 1st Version

Schematic Ref. No.	Part No.	Description	Schematic Ref. No.	Part No.	Description	Schematic Ref. No.	Part No.	Description	
VR391 R122,123 222,223 C110,210 C111,211 CN5,17 18	BA06243A	Volume P.C.B. Ass'y	Q105,106 205,206 Q107,207 411 Q108,208 410 ZD102,202 ZD402 R124,132 224,232 R125,225 R126,226 R127,227 R128,228 R129,229 R130,230 R131,231 R162,262 R410 R420 R421 C112,212	BA06245A	Tone Control P.C.B. Ass'y (SR-3, SR-3A & SR-3E (Europe))	C113,119 213,219 C114,214 C115,215 C116,216 SW304	OB09816A	CE 10µ 16V (LN)	
	OB60383B	Volume P.C.B.		BA06827A	Tone Control P.C.B. Ass'y (SR-3E (Germany))		OB09242A	C 47P 50V J	
	OB30061A	VR RK1612420		— Line Amp. —	OB10193A		FET 2SK184 (GR)	OB09302A	C 100P 50V J
	OB09695A	RK 5.6K 1/6W J		OB10050A	TR 2SA970 (BL)		OB05583A	CM 0.033µ 50V J	
SW303 CN18 CN18	BA06290A	Loudness Switch P.C.B. Ass'y	OB06142A	TR 2SC2240 (BL)	C027,028 CN3 CN4 CN6,17 19,19 CN20,20 AJ BJ	OB70074A	Push Switch 1 Key		
	OB60390B	Loudness Switch P.C.B.	OB12150A	ZD 5.6V		— Subsonic Filter —	OB09735A	RK 270K 1/6W J	
	OB70074A	Push Switch 1 Key	OB12174A	ZD 12V		OB41298A	CMM 0.1µ 50V J		
	OB81013A	Dip Mate 6P	OB22229A	RM 1.00K 1/6W F		OB70074A	Push Switch 1 Key		
R742,842 CN23A CN23B CN33	OB82736A	Ribbon Cable 6P 110mm	OB22315A	RM 5.62K 1/6W F	— Miscellaneous —	OB81018A	Dip Mate 6P		
	BA06254A	Speaker Switch P.C.B. Ass'y	OB22371A	RM 18.2K 1/6W F		OB81010A	Dip Mate 3P		
	OB60385C	Speaker Switch P.C.B.	OB22265A	RM 2.20K 1/6W F		WH3D-1	OB82040B	PD Connector V050	
	OB24105A	RF 330 2W J	OB22347A	RM 11.0K 1/6W F		OB82041B	PD Connector V050		
	OB82744B	PD Connector V600	OB09673A	RK 680 1/6W J		OB82734B	Ribbon Cable 6P		
	OB82745B	PD Connector V720	OB09679A	RK 1.2K 1/6W J		500mm (1)	OB82735B	Ribbon Cable 6P	
	OB82760A	PD Connector V350	OB09695A	RK 5.6K 1/6W J		320mm (1)	OB82737B	Ribbon Cable 6P	
	OB70075A	Push Switch 2 Key (1)	OB22516A	RM 332K 1/6W F		120mm (1)	OB82738B	Ribbon Cable 3P	
	OB81478A	Headphone Jack (1)	OB09677A	RK 1K 1/6W J		140mm (1)			
			OB09665A	RK 330 1/6W J					
		OB09685A	RK 2.2K 1/6W J						
		OB41703A	CSP 100P 50V J (SR-3, SR-3A & SR-3E (Europe))						
		OB41704A	CSP 330P 50V J (SR-3E (Germany))						
		— Tone Amp. —							
		IC393	OB11070A	IC NJM072S					
		VR392	OB30062A	VR 100K (B)x2					
		VR393	OB30063A	VR 500K (B)x2					
		R134,234	OB09725A	RK 100K 1/6W J					
		R135-138	OB09715A	RK 39K 1/6W J					
		235-238	OB09723A	RK 82K 1/6W J					
		R139,239							

5.6. Speaker Switch P.C.B. Ass'y

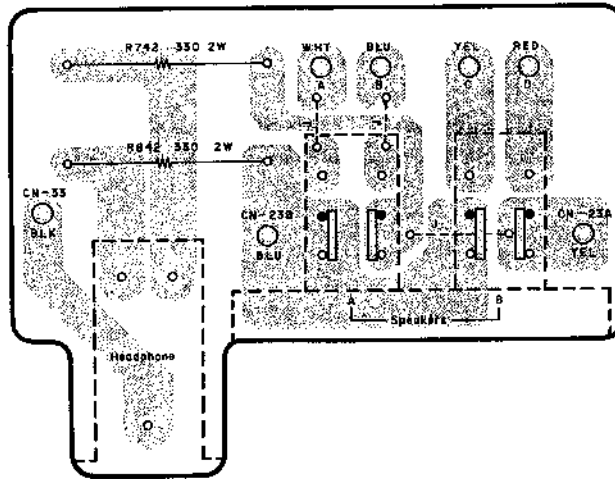


Fig. 5.6

5.7. Tone Control P.C.B. Ass'y

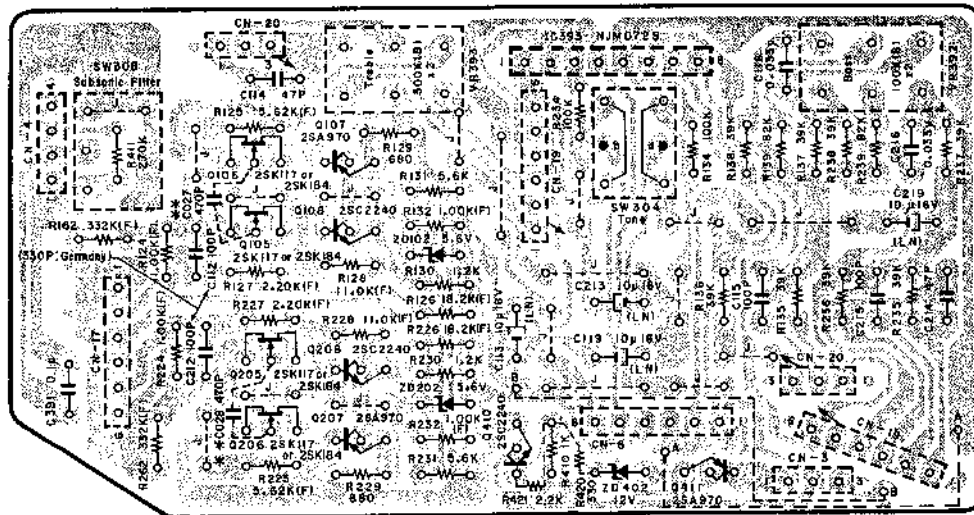


Fig. 5.7.1 2nd Version \*\* : SR-3E (Germany) only.

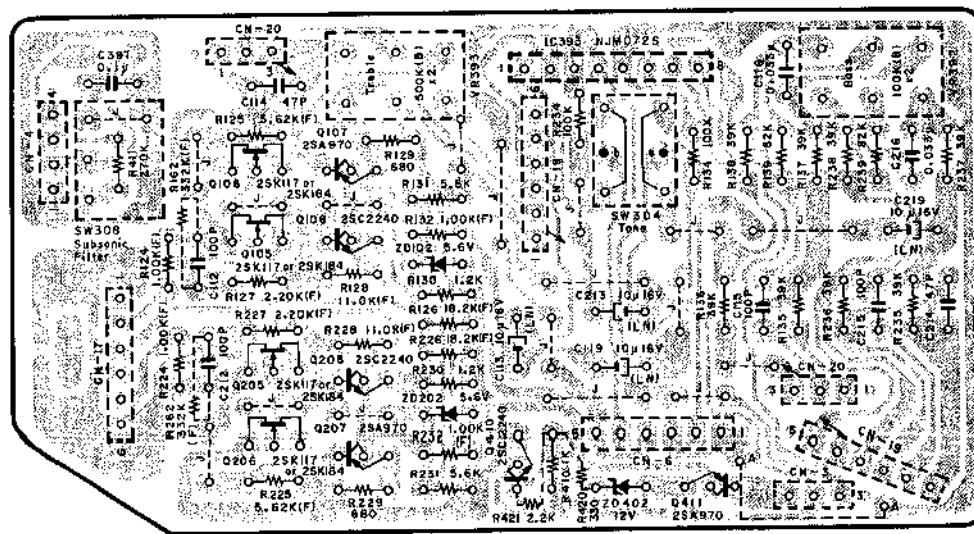


Fig. 5.7.2 1st Version (For SR-3 & SR-3A only)

5.8. Speaker Terminal P.C.B. Ass'y

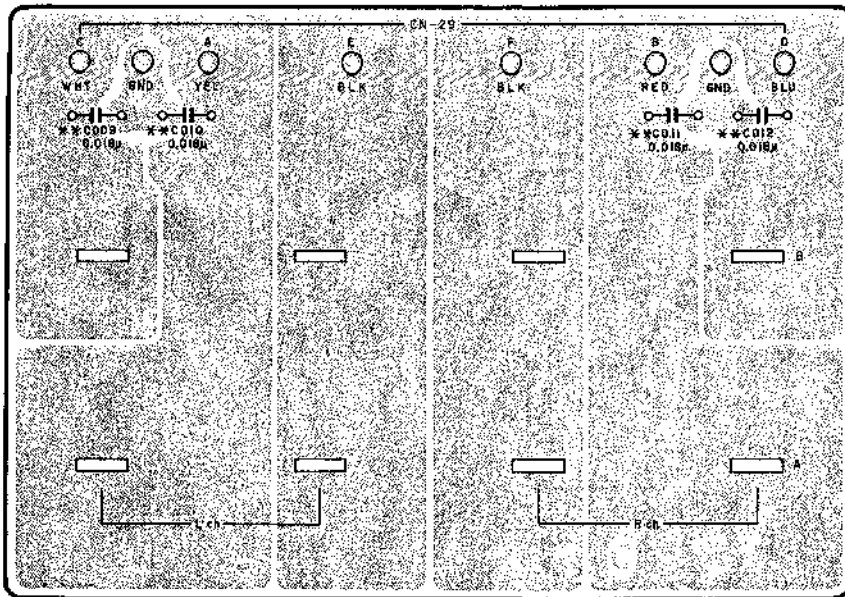


Fig. 5.8

\*\* SR-3E (Germany) only.

5.9. Power Supply P.C.B. Ass'y

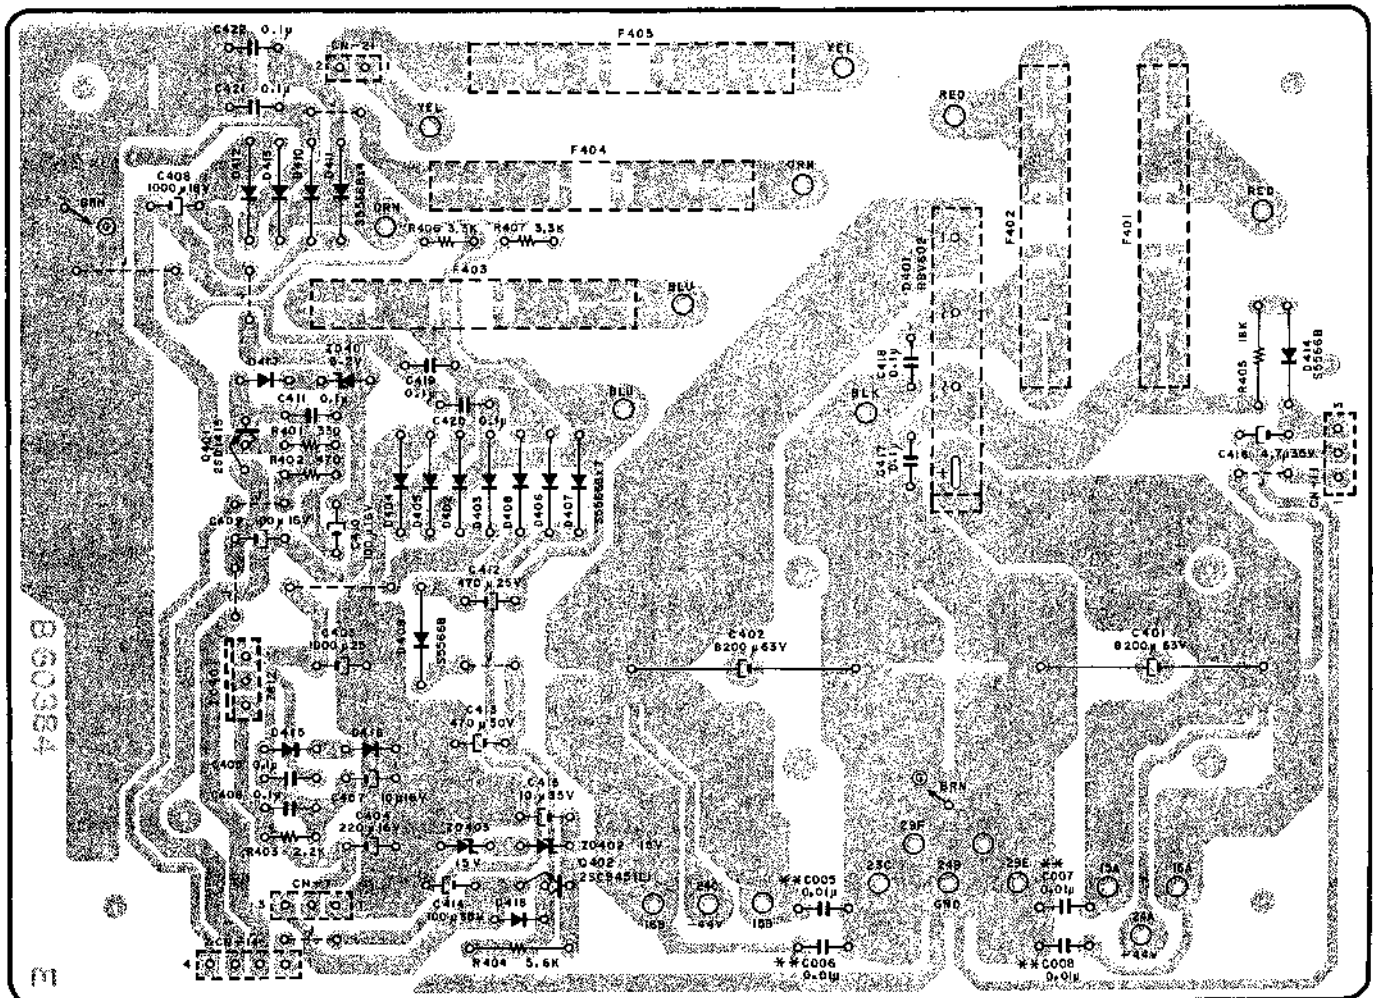


Fig. 5.9

\*\* SR-3E (Germany) only.

Schematic Ref. No.	Part No.	Description	Schematic Ref. No.	Part No.	Description
C009,010 011,012 CN29A CN29B CN29C CN29D CN29E,29F	BA06283A	Speaker Terminal P.C.B. Ass'y (SR-3, SR-3A & SR-3E (Europe))	F405	OB08252A	Fuse T250mA 250V (SR-3 (Australia) & SR-3E (Europe & Germany))
	BA06822A	Speaker Terminal P.C.B. Ass'y (SR-3E (Germany))	CN7,11 CN14 CN15A CN15B CN16A CN16B CN21 CN23C CN24A CN24B CN24C	OB81635A OB81636A OB82740B OB82741B OB82742B OB82743B OB82803A OB82746B OB82747B OB82748B OB82749B OB08349B	3P-T Post 4P-T Post PD Connector V400 PD Connector V400 PD Connector V520 PD Connector V520 2P Connector PD Connector V440 PD Connector V300 PD Connector V300 PD Connector V300 Fuse Clip (SR-3 (Australia) & SR-3E (Europe & Germany)) (10)
	OB60386C	Speaker Terminal P.C.B.		OM03855A	Fuse Label 5A 125Vx2 (SR-3 (Canada & Other) & SR-3A) (1)
	OB41289A	CMM 0.018μ 50V J (SR-3E (Germany))		OM04137A	Fuse Label T250mA 250V (SR-3 (Australia) & SR-3E (Europe & Germany)) (1)
	OB82753A	PD Connector V420		OM04191A	Fuse Label T1A 250V (SR-3 (Australia) & SR-3E (Europe & Germany)) (1)
	OB82754A	PD Connector V420		OM04443A	Fuse Label T3.15A 250Vx2 (SR-3 (Australia) & SR-3E (Europe & Germany)) (1)
	OB82755A	PD Connector V420		OM04194A	Fuse Label T315mA 250V (SR-3 (Australia) & SR-3E (Europe & Germany)) (1)
	OB82756A	PD Connector V420		OE00612A	M3x6 ΦFan (2A) (2)
	OB82757A	PD Connector V250		OJ05197A	Heat Sink (1)
	OB81595B	Speaker Terminal 8P (1)		OE03355A	Earth Lug (1)
	OB90019A	Insu-Lock SKB80 (4)		OB90019A	Insu-Lock SKB80 (6)
	OB83056B	Ground Wire (SR-3E (Germany)) (1)		OB90206A	Insu-Lock SKB4M (1)
IC401 Q401 Q402 ZD401 ZD402,403 D401 D402-414 D415,416 417,418 R401 R402 R403 R404 R405 R406,407 C005,006 007,008 C401,402 C403 C404 C405,406 411,417 418-422 G407 C408 C409,410 C412 C413 C414 C415 C416 F401,402 F401,402 F403,404 F403 F404 F405	BA06248A	Power Supply P.C.B. Ass'y (SR-3 (Canada & Other) & SR-3A)			
	BA06249A	Power Supply P.C.B. Ass'y (SR-3 (Australia) & SR-3E (Europe))			
	BA06828A	Power Supply P.C.B. Ass'y (SR-3E (Germany))			
	OB60384E	Power Supply P.C.B.			
	OB11252A	IC AN78M12			
	OB10012A	TR 2SD1415			
	OB01872A	TR 2SC945L (P,Q)			
	OB12153A	ZD 6.2V			
	OB12181A	ZD RD6.2JS-T1B2 15V			
	OB12388A	SID RBV-602			
	OB12362A	SID S5566B (13)			
	OB06398A	SID 1SS176			
	OB09665A	RK 330 1/6W J			
	OB09669A	RK 470 1/6W J			
	OB09685A	RK 2.2K 1/6W J			
	OB01887A	RK 5.6K 1/4W J			
	OB05560A	RK 18K 1/4W J			
	OB09689A	RK 3.3K 1/6W J			
	OB41286A	CMM 0.01μ 50V J (SR-3E (Germany))			
	OB40410A	CE 8200μ 63V			
	OB40095A	CE 1000μ 25V			
	OB40079A	CE 220μ 16V			
	OB41298A	CMM 0.1μ 50V J (8)			
	OB01412A	CE 10μ 16V			
	OB40082A	CE 1000μ 16V			
	OB40078A	CE 100μ 16V			
	OB40094A	CE 470μ 25V			
	OB40128A	CE 470μ 50V			
	OB40104A	CE 100μ 35V			
	OB40100A	CE 10μ 35V			
	OB40099A	CE 4.7μ 35V			
	OB08370A	Fuse 5A (SR-3 (Canada & Other) & SR-3A)			
	OB08281A	Fuse T3.15A 250V (SR-3 (Australia) & SR-3E (Europe & Germany))			
	OB08374A	Fuse 1A (SR-3 (Canada & Other) & SR-3A)			
	OB08263U	Fuse T315mA 250V (SR-3 (Australia) & SR-3E (Europe & Germany))			
	OB08347U	Fuse T1A 250V (SR-3 (Australia) & SR-3E (Europe & Germany))			
	OB08698A	Fuse 500mA (SR-3 (Canada & Other) & SR-3A)			

5.10. Video Amp. P.C.B. Ass'y

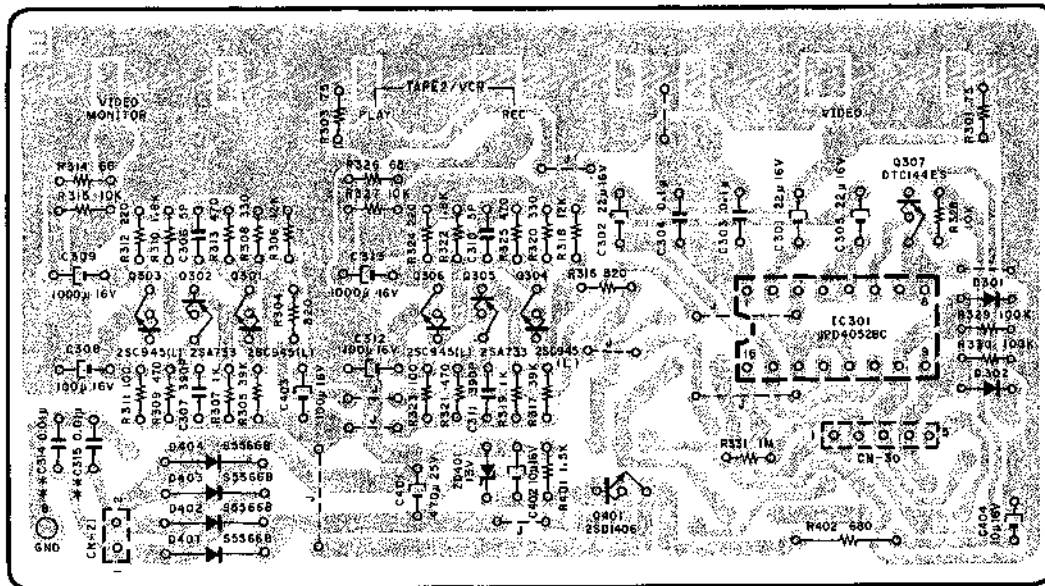


Fig. 5.10

\*\* SR-3E (Germany) only.

Schematic Ref. No.	Part No.	Description	Schematic Ref. No.	Part No.	Description	Schematic Ref. No.	Part No.	Description
	BA06257A	Video Amp. P.C.B. Ass'y (SR-3 & SR-3A)	C402,404	OB01412A	CE 10 $\mu$ 16V		BA06242A	Control Switch P.C.B. Ass'y
	BA06850A	Video Amp. P.C.B. Ass'y (SR-3E (Europe))	CN21	OB81634A	2P-T Post B2B-EH		OB60381D	Control Switch P.C.B.
	BA06830A	Video Amp. P.C.B. Ass'y (SR-3E (Germany))	CN30	OB81637A	5P-T Post B5B-EH		OB10058A	TR DTA114ES
	OB60389E	Video Amp. P.C.B. IC		OB81592B	Pin Jack 1P (4)	Q901,902	OB10068A	TR DTC114ES (6)
IC301	OB11247A	IC $\mu$ PD4052BC		OB83057B	GND 50mm (1) (SR-3E (Germany))	905-908	OB12395A	LED SLR-34PC3F (Green) (8)
Q301,303	OB01872A	TR 2SC945L (P,Q)		OB08680B	Heat Sink A (1)	Q903,904	OB06398A	SiD 1SS176 (10)
Q302,305	OB06013A	TR 2SA733 (P,Q)		OE00972A	Nut Hex. M3 (1)	LED910-917		
Q307	OB10062A	TR DTC144ES		OE03319A	M3x8 $\phi$ Binding (1)	D901-905		
Q401	OB06452A	TR 2SD1406 (Y)				908,909		
ZD401	OB12317A	ZD 13V MTZ13B				817-919		
D301,302	OB06398A	SiD 1SS176				D906,907	OB12391A	SID MC911
D401-404	OB12362A	SiD S5566B				R901,909	OB09657A	RK 150 1/6W J
R301,303	OB09650A	RK 75 1/6W J				R902,903	OB09689A	RK 3.3K 1/6W J
R304,316	OB09675A	RK 820 1/6W J				905-908		
R305,317	OB09715A	RK 39K 1/6W J				R904	OB09661A	RK 220 1/6W J
R306,318	OB09703A	RK 12K 1/6W J				SW901-912	OB70062A	Tact Switch KHH10910 (12)
R307,319	OB09677A	RK 1K 1/6W J				CN12	OB82800A	12P Connector 170mm
R308,320	OB09665A	RK 330 1/6W J				CN18	OB82801A	5P Connector 170mm
R309,313	OB09669A	RK 470 1/6W J					0J05209B	LED Reflector D100 (8)
321,325								
R310,322	OB09683A	RK 1.8K 1/6W J						
R311,323	OB09653A	RK 100 1/6W J (SR-3, SR-3A & SR-3E (Germany))						
	OB09907A	RF 100 1/2W J (SR-3E (Europe))						
R312,324	OB09661A	RK 220 1/6W J						
R314,326	OB09649A	RK 68 1/6W J						
R315,327	OB09701A	RK 10K 1/6W J						
328								
R329,330	OB09725A	RK 100K 1/6W J						
R331	OB09749A	RK 1M 1/6W J						
R401	OB09681A	RK 1.5K 1/6W J						
R402	OB05794A	RK 680 1/4W J						
C301,302	OB01862A	CE 22 $\mu$ 16V						
305								
C303,304	OB41298A	CMM 0.1 $\mu$ 50V J						
C306,310	OB09276A	CC 5P 50V						
C307,311	OB41002A	CP 390P 100V J						
C308,312	OB01400A	CE 100 $\mu$ 16V						
403								
C309,313	OB40082A	CE 1000 $\mu$ 16V						
C314,315	OB41286A	CMM 0.01 $\mu$ 50V J (SR-3E (Germany))						
C401	OB40094A	CE 470 $\mu$ 25V						



5.11. Control Switch P.C.B. Ass'y

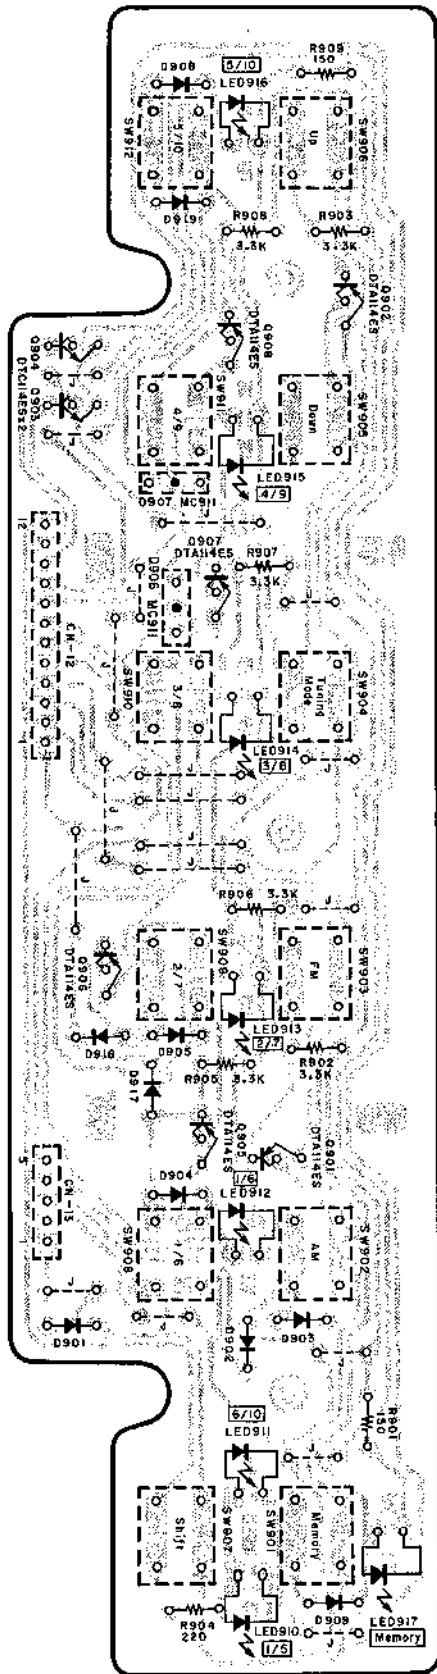


Fig. 5.11.1 2nd Version

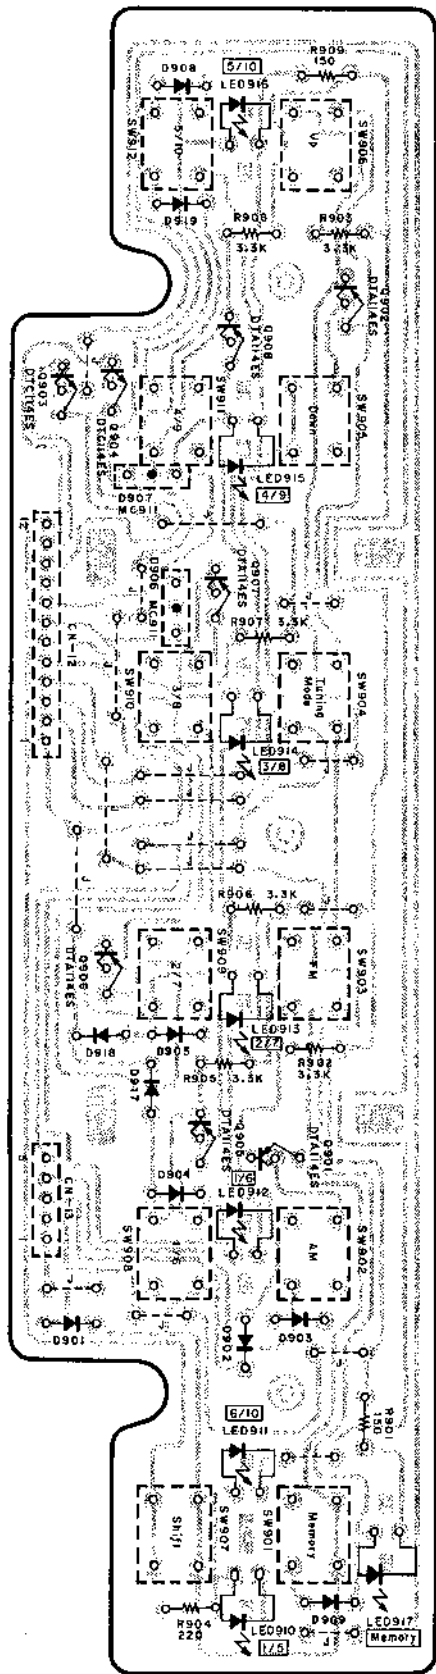


Fig. 5.11.2 1st Version

5.12. Display P.C.B. Ass'y  
 5.12.1 For SR-3 (Canada) & SR-3A  
 (1) 2nd Version

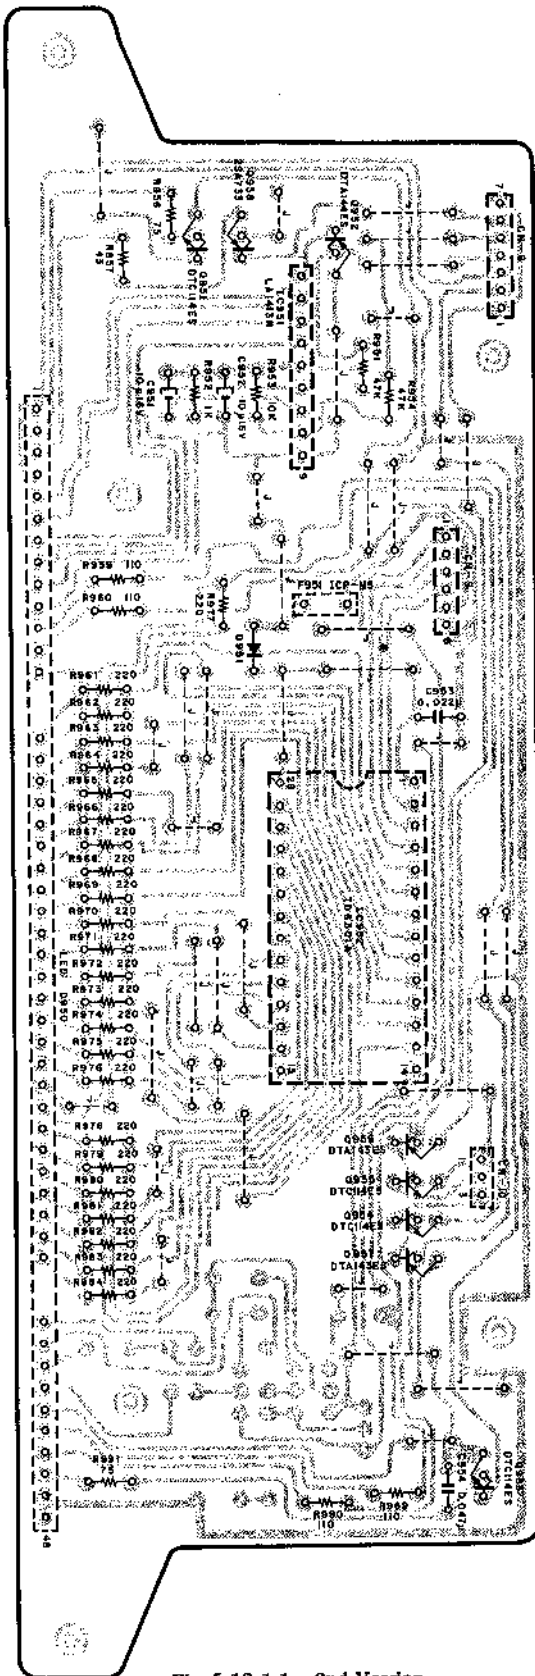


Fig. 5.12.1.1 2nd Version

(2) 1st Version

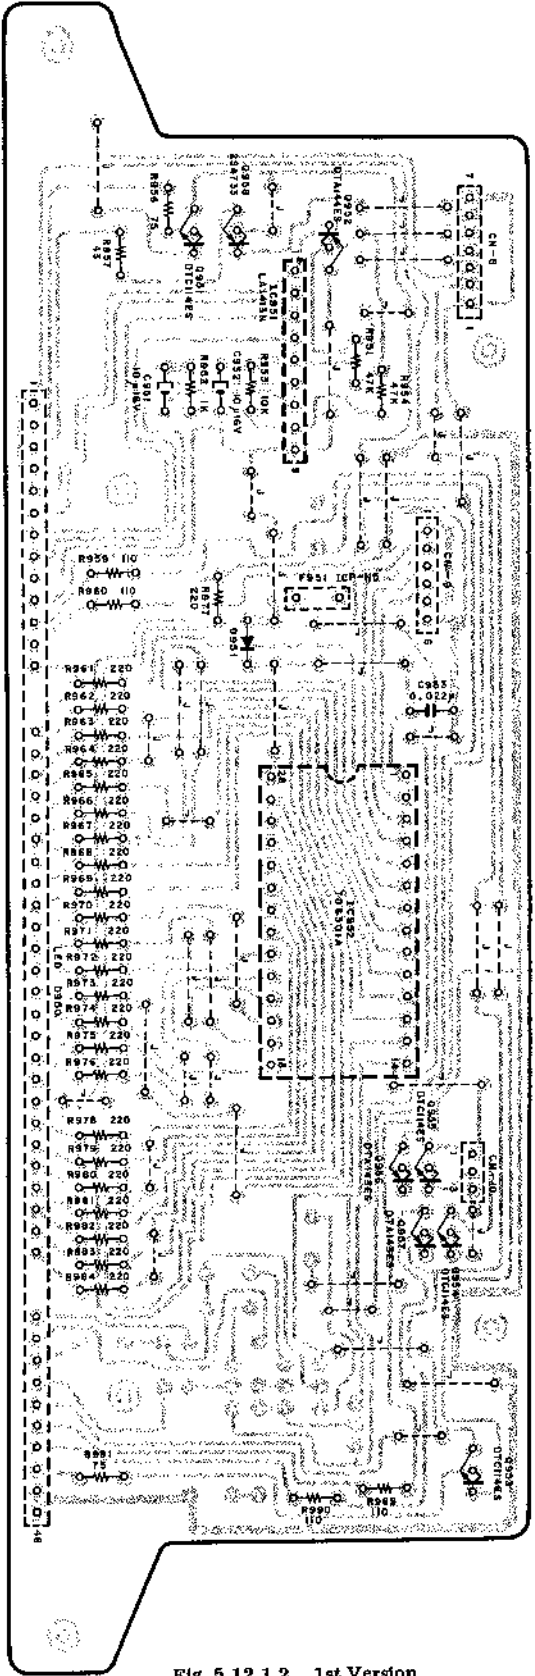


Fig. 5.12.1.2 1st Version

Schematic Ref. No.	Part No.	Description
	BA06240A	Display P.C.B. Ass'y (SR-3 (Canada) & SR-3A) 2nd Version
IC951	OB60380D	Display P.C.B.
IC952	OB11244A	IC LA1413N
Q951,953 954,955	OB11160A	IC TD6301A
Q952	OB10068A	TR DTC114ES
Q952	OB10053A	TR DTA144ES
Q956,957	OB10060A	TR DTA143ES
Q958	OB06013A	TR 2SA733 (P,Q)
D950	OB12385A	Display Unit
D951	OB06398A	SiD 1SS176
R951,954	OB09717A	RK 47K 1/6W J
R952	OB09677A	RK 1K 1/6W J
R953	OB09701A	RK 10K 1/6W J
R956,991	OB09650A	RK 75 1/6W J
R957	OB09644A	RK 43 1/6W J
R959,960 989,990	OB09654A	RK 110 1/6W J
R961-984	OB09661A	RK 220 1/6W J (24)
C951,952	OB40009A	CE 10μ 16V
C953	OB41554A	CC 0.022μ 25V Z
C954	OB41555A	CC 0.047μ 25V Z
F951	OB11248A	IC Protector ICP-N5
CN8	OB82796A	7P Connector 280mm
CN9	OB82797A	6P Connector 280mm
CN10	OB82798A	3P Connector 260mm
	OE00846A	BT3x8 @ Pan (2)
	BA06240A	Display P.C.B. Ass'y (SR-3 (Canada) & SR-3A) 1st Version
IC951	OB60380A	Display P.C.B.
IC952	OB11244A	IC LA1413N
Q951,953 954,955	OB11160A	IC TD6301A
Q952	OB10068A	TR DTC114ES
Q952	OB10053A	TR DTA144ES
Q956,957	OB10060A	TR DTA143ES
Q958	OB06013A	TR 2SA733 (P,Q)
D950	OB12385A	Display Unit
D951	OB06398A	SiD 1SS176
R951,954	OB09717A	RK 47K 1/6W J
R952	OB09677A	RK 1K 1/6W J
R953	OB09701A	RK 10K 1/6W J
R956,991	OB09650A	RK 75 1/6W J
R957	OB09644A	RK 43 1/6W J
R959,960 989,990	OB09654A	RK 110 1/6W J
R961-984	OB09661A	RK 220 1/6W J (24)
C951,952	OB40009A	CE 10μ 16V
C953	OB41554A	CC 0.022μ 25V Z
F951	OB11248A	IC Protector ICP-N5
CN8	OB82796A	7P Connector 280mm
CN9	OB82797A	6P Connector 280mm
CN10	OB82798A	3P Connector 260mm
	OE00846A	BT3x8 @ Pan (2)

5.12.2. For SR-3 (Australia & Other) & SR-3E (Europe & Germany)  
(1) 2nd Version

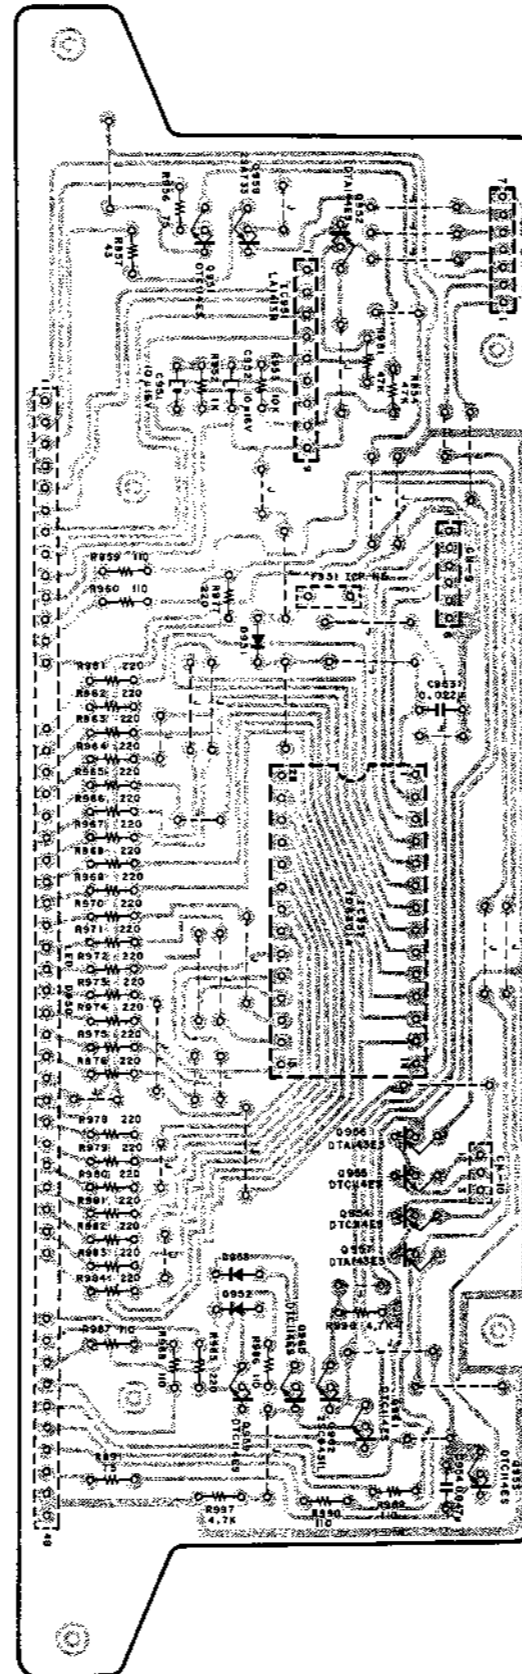


Fig. 5.12.2.1 2nd Version

(2) 1st Version (For SR-3 (Australia & Other only))

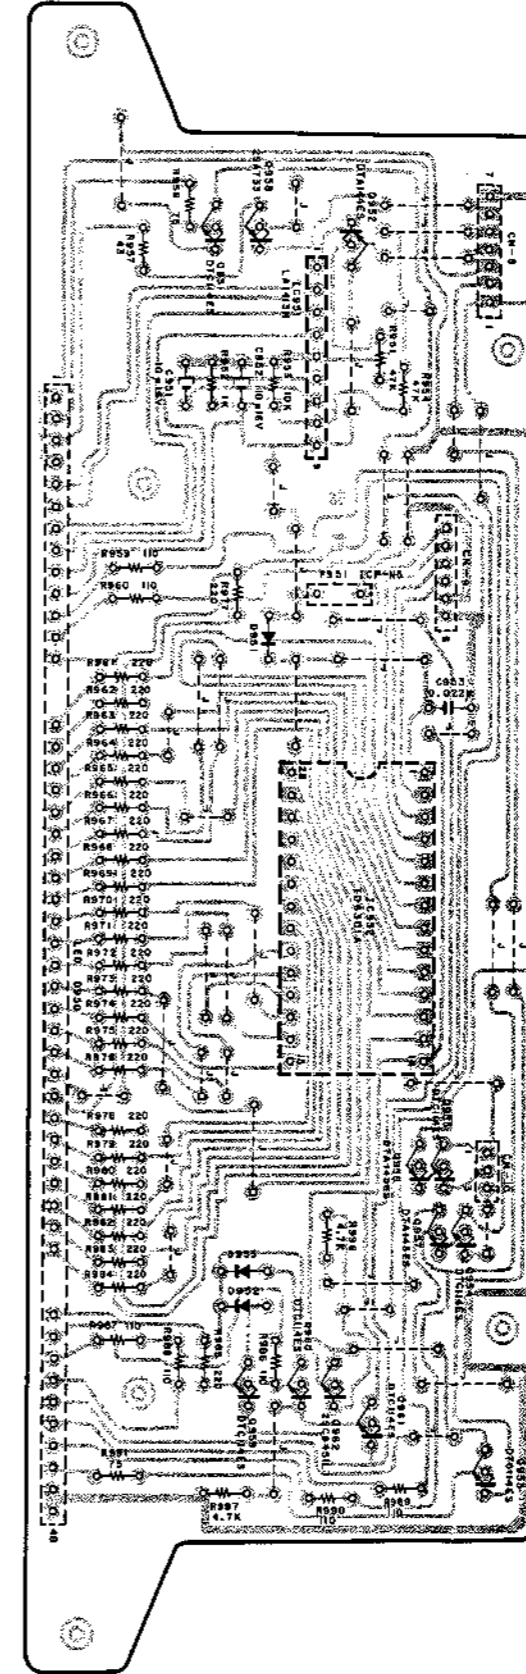


Fig. 5.12.2.2 1st Version

Schematic Ref. No.	Part No.	Description
	BA06241A	Display P.C.B. Ass'y (SR-3 (Australia & Other): 2nd Version) (SR-3E (Europe & Germany))
IC951	OB60380D	Display P.C.B.
IC952	OB11244A	IC LB1413N
Q951,953 954,955 959-961	OB11160A	IC TD6301A
Q952	OB10068A	TR DTC114ES (7)
Q952	OB10053A	TR DTA144ES
Q956,957	OB10060A	TR DTA143ES
Q958	OB06013A	TR 2SA733 (P,Q)
Q962	OB01872A	TR 2SC945L (P,Q)
D950	OB12385A	Display Unit
D951,952 953	OB06398A	SiD 1SS176
R951,954	OB09717A	RK 47K 1/6W J
R952	OB09677A	RK 1K 1/6W J
R953	OB09701A	RK 10K 1/6W J
R956,991	OB09650A	RK 75 1/6W J
R957	OB09644A	RK 43 1/6W J
R959,960 986-990	OB09654A	RK 110 1/6W J (7)
R961-985	OB09661A	RK 220 1/6W J (25)
R996,997	OB09693A	RK 4.7K 1/6W J
C951,952	OB40009A	CE 10μ 16V
C953	OB41554A	CC 0.022μ 25V Z
C954	OB41555A	CC 0.047μ 25V Z
F951	OB11248A	IC Protector ICP-N5
CN8	OB82796A	7P Connector 280mm
CN9	OB82797A	6P Connector 260mm
CN10	OB82798A	3P Connector 260mm
	OE00846A	BT3x8 @ Pan (2)
	BA06241A	Display P.C.B. Ass'y (SR-3 (Australia & Other)): 1st Version
IC951	OB60380A	Display P.C.B.
IC952	OB11244A	IC LB1413N
Q951,953 954,955 959-961	OB11160A	IC TD6301A
Q952	OB10068A	TR DTC114ES (7)
Q952	OB10053A	TR DTA144ES
Q956,957	OB10060A	TR DTA143ES
Q958	OB06013A	TR 2SA733 (P,Q)
Q962	OB01872A	TR 2SC945L (P,Q)
D950	OB12385A	Display Unit
D951,952 953	OB06398A	SiD 1SS176
R951,954	OB09717A	RK 47K 1/6W J
R952	OB09677A	RK 1K 1/6W J
R953	OB09701A	RK 10K 1/6W J
R956,991	OB09650A	RK 75 1/6W J
R957	OB09644A	RK 43 1/6W J
R959,960 986-990	OB09654A	RK 110 1/6W J (7)
R961-985	OB09661A	RK 220 1/6W J (25)
R996,997	OB09693A	RK 4.7K 1/6W J
C951,952	OB40009A	CE 10μ 16V
C953	OB41554A	CC 0.022μ 25V Z
F951	OB11248A	IC Protector ICP-N5
CN8	OB82796A	7P Connector 280mm
CN9	OB82797A	6P Connector 260mm
CN10	OB82798A	3P Connector 260mm
	OE00846A	BT3x8 @ Pan (2)

5.13. Main P.C.B. Ass'y  
5.13.1. For SR-3 (Canada) & SR-3A  
(1) 2nd Version

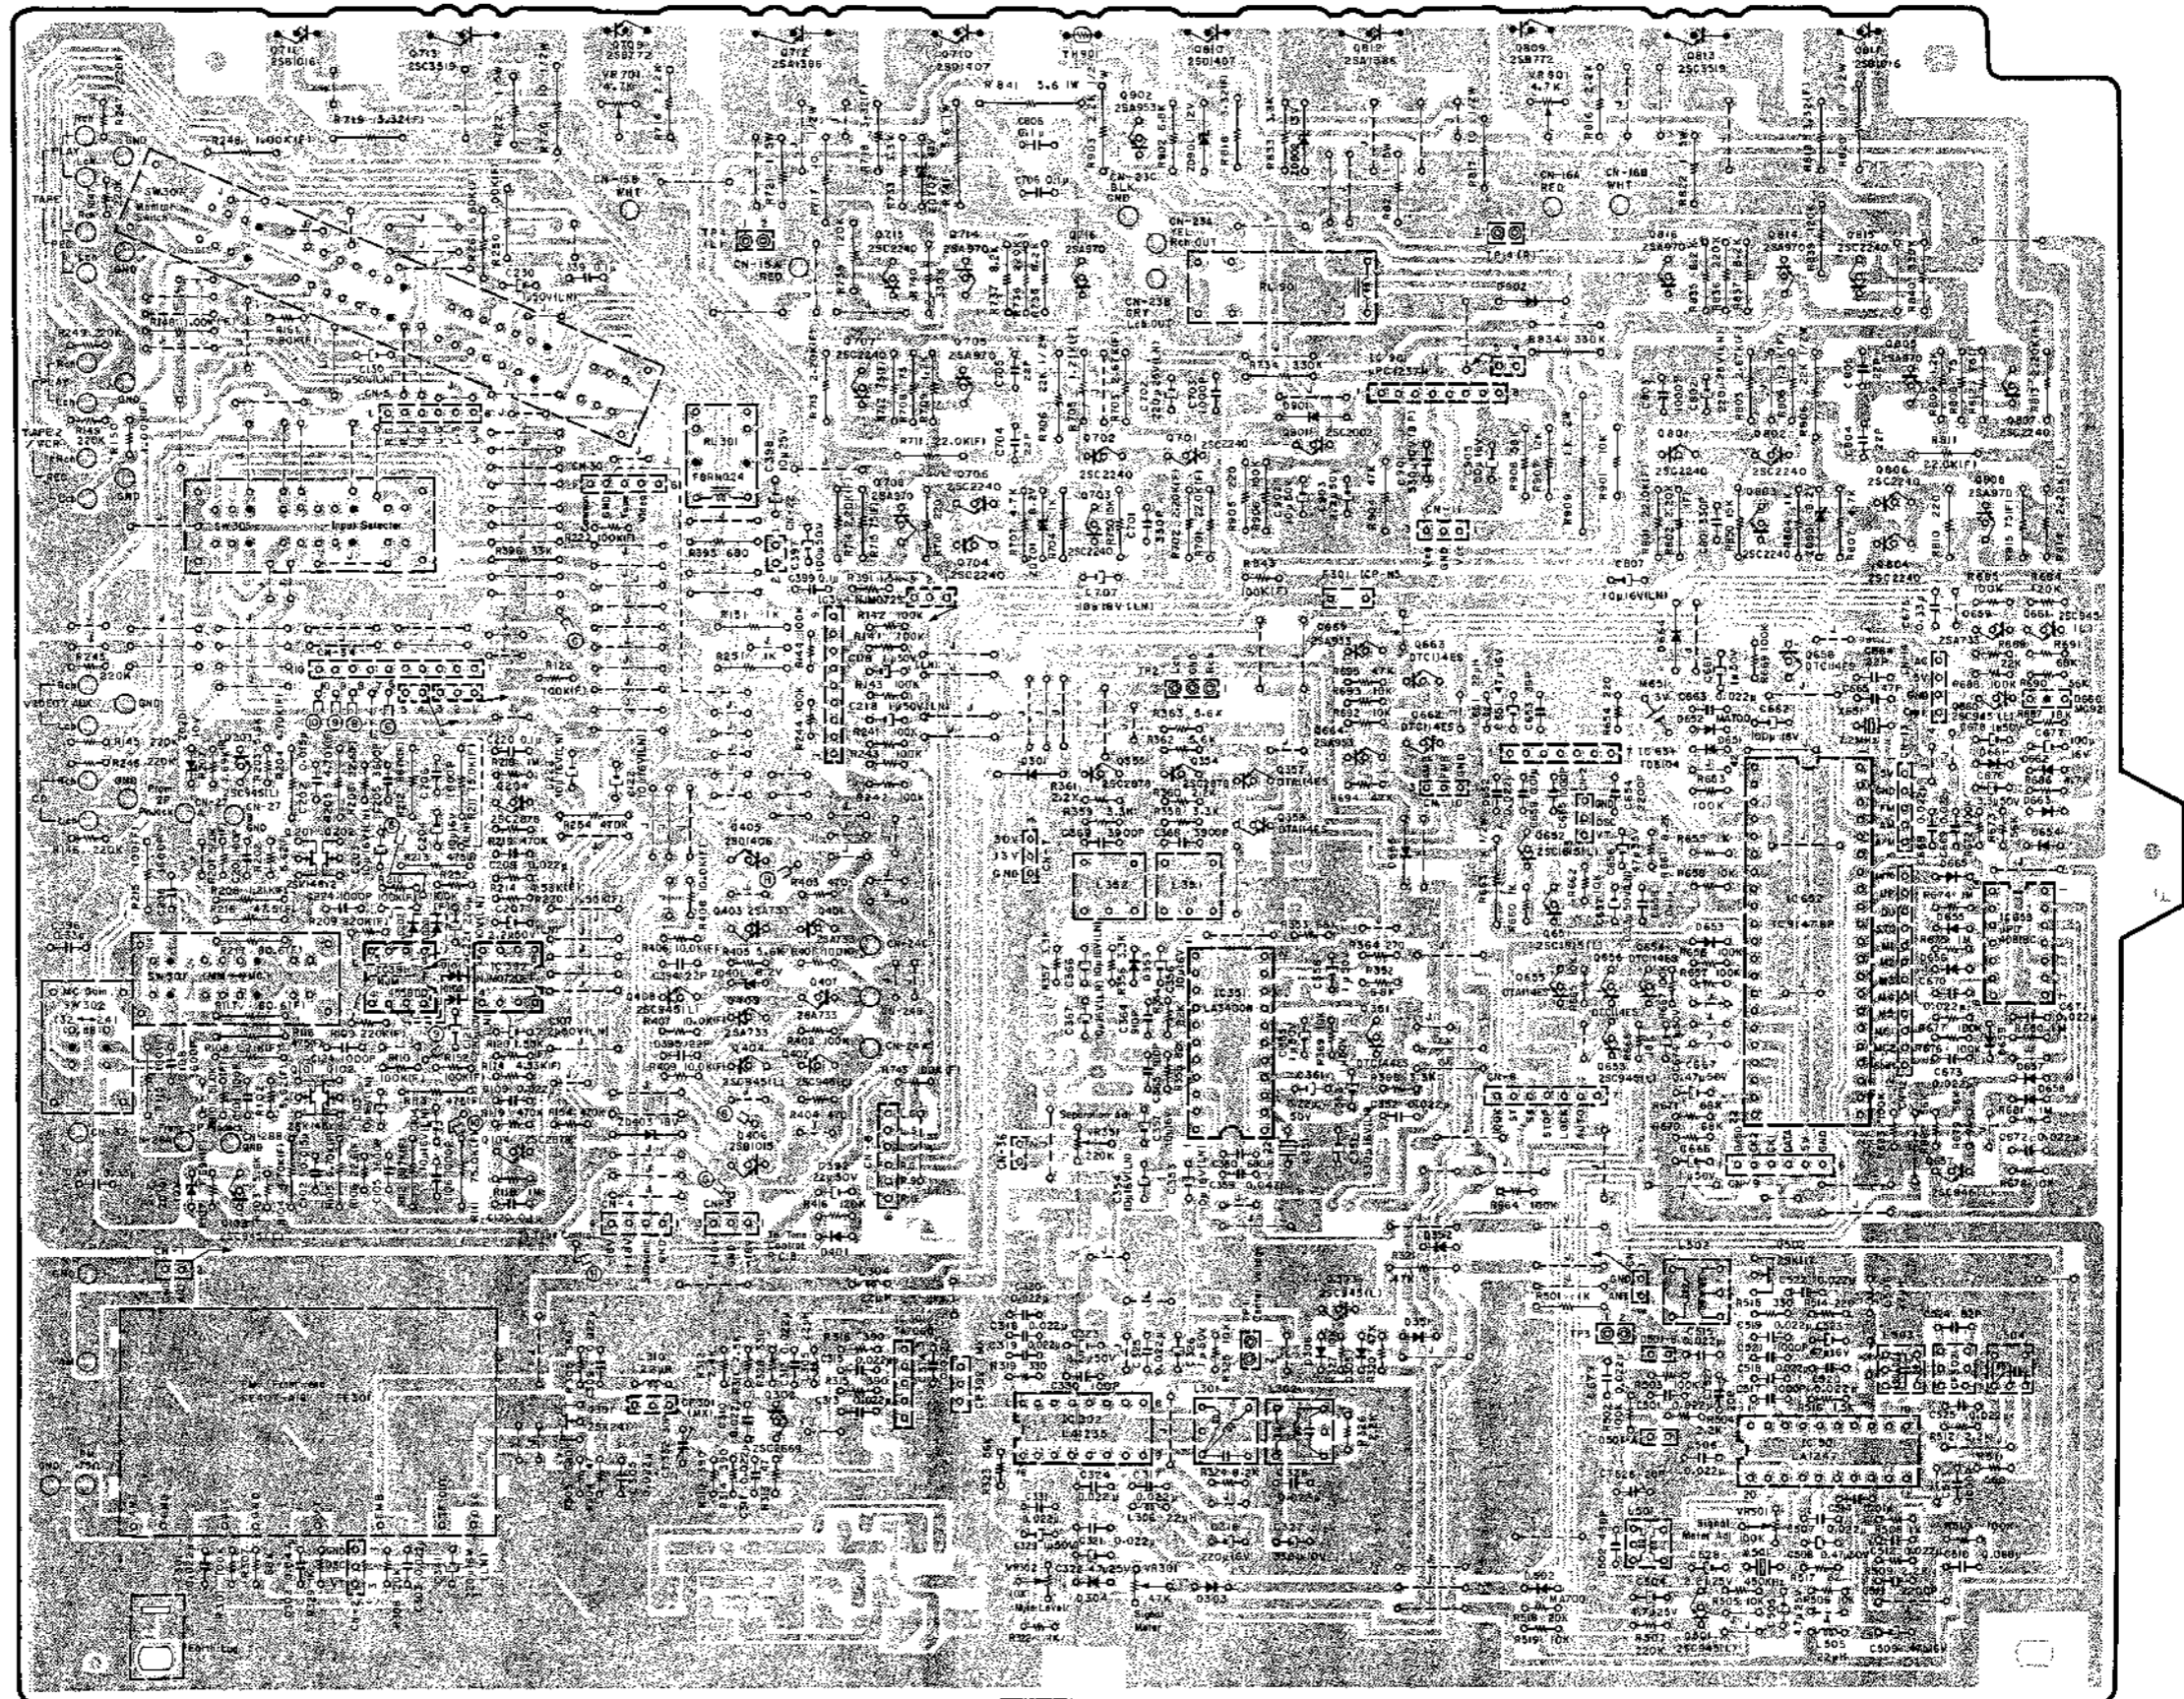


Fig. 5.13.1.1 2nd Version (For SR-3 (Canada) & SR-3A)



(2) 1st Version


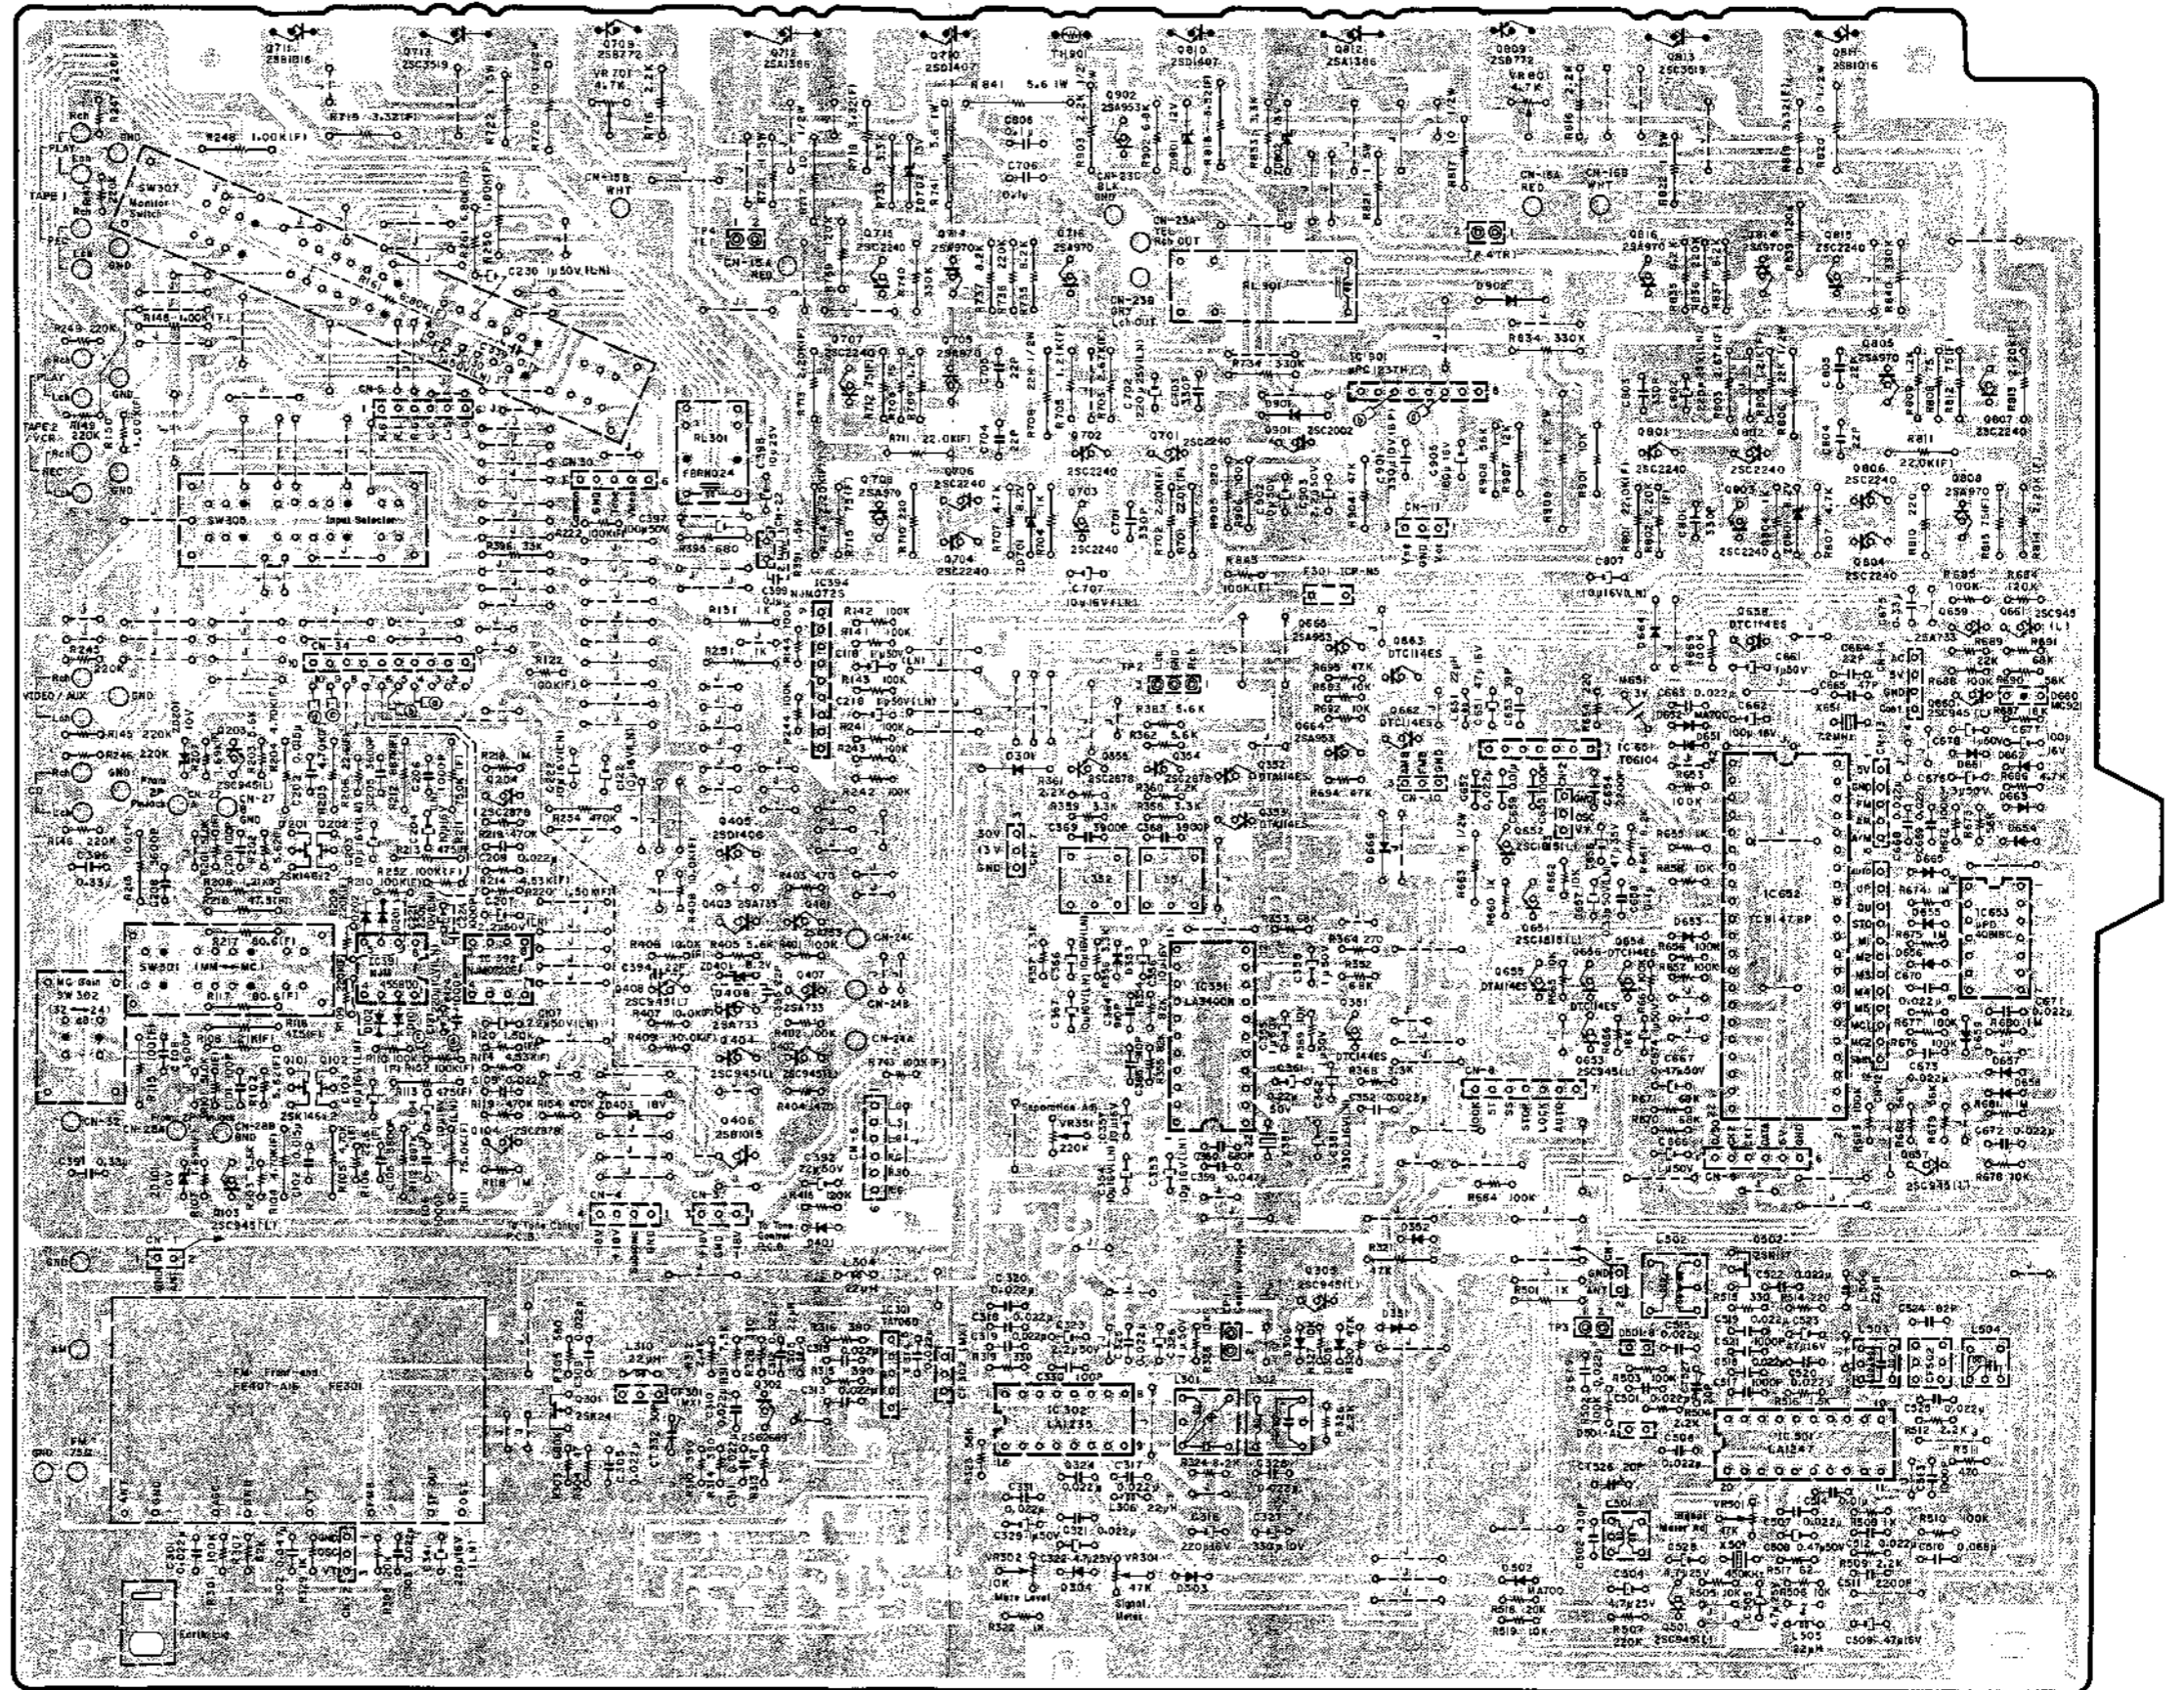


Fig. 5.13.1.2 1st Version (For SR-3 (Canada) & SR-3A)



5.13.2. For SR-3 (Other & Australia)  
(1) 2nd Version

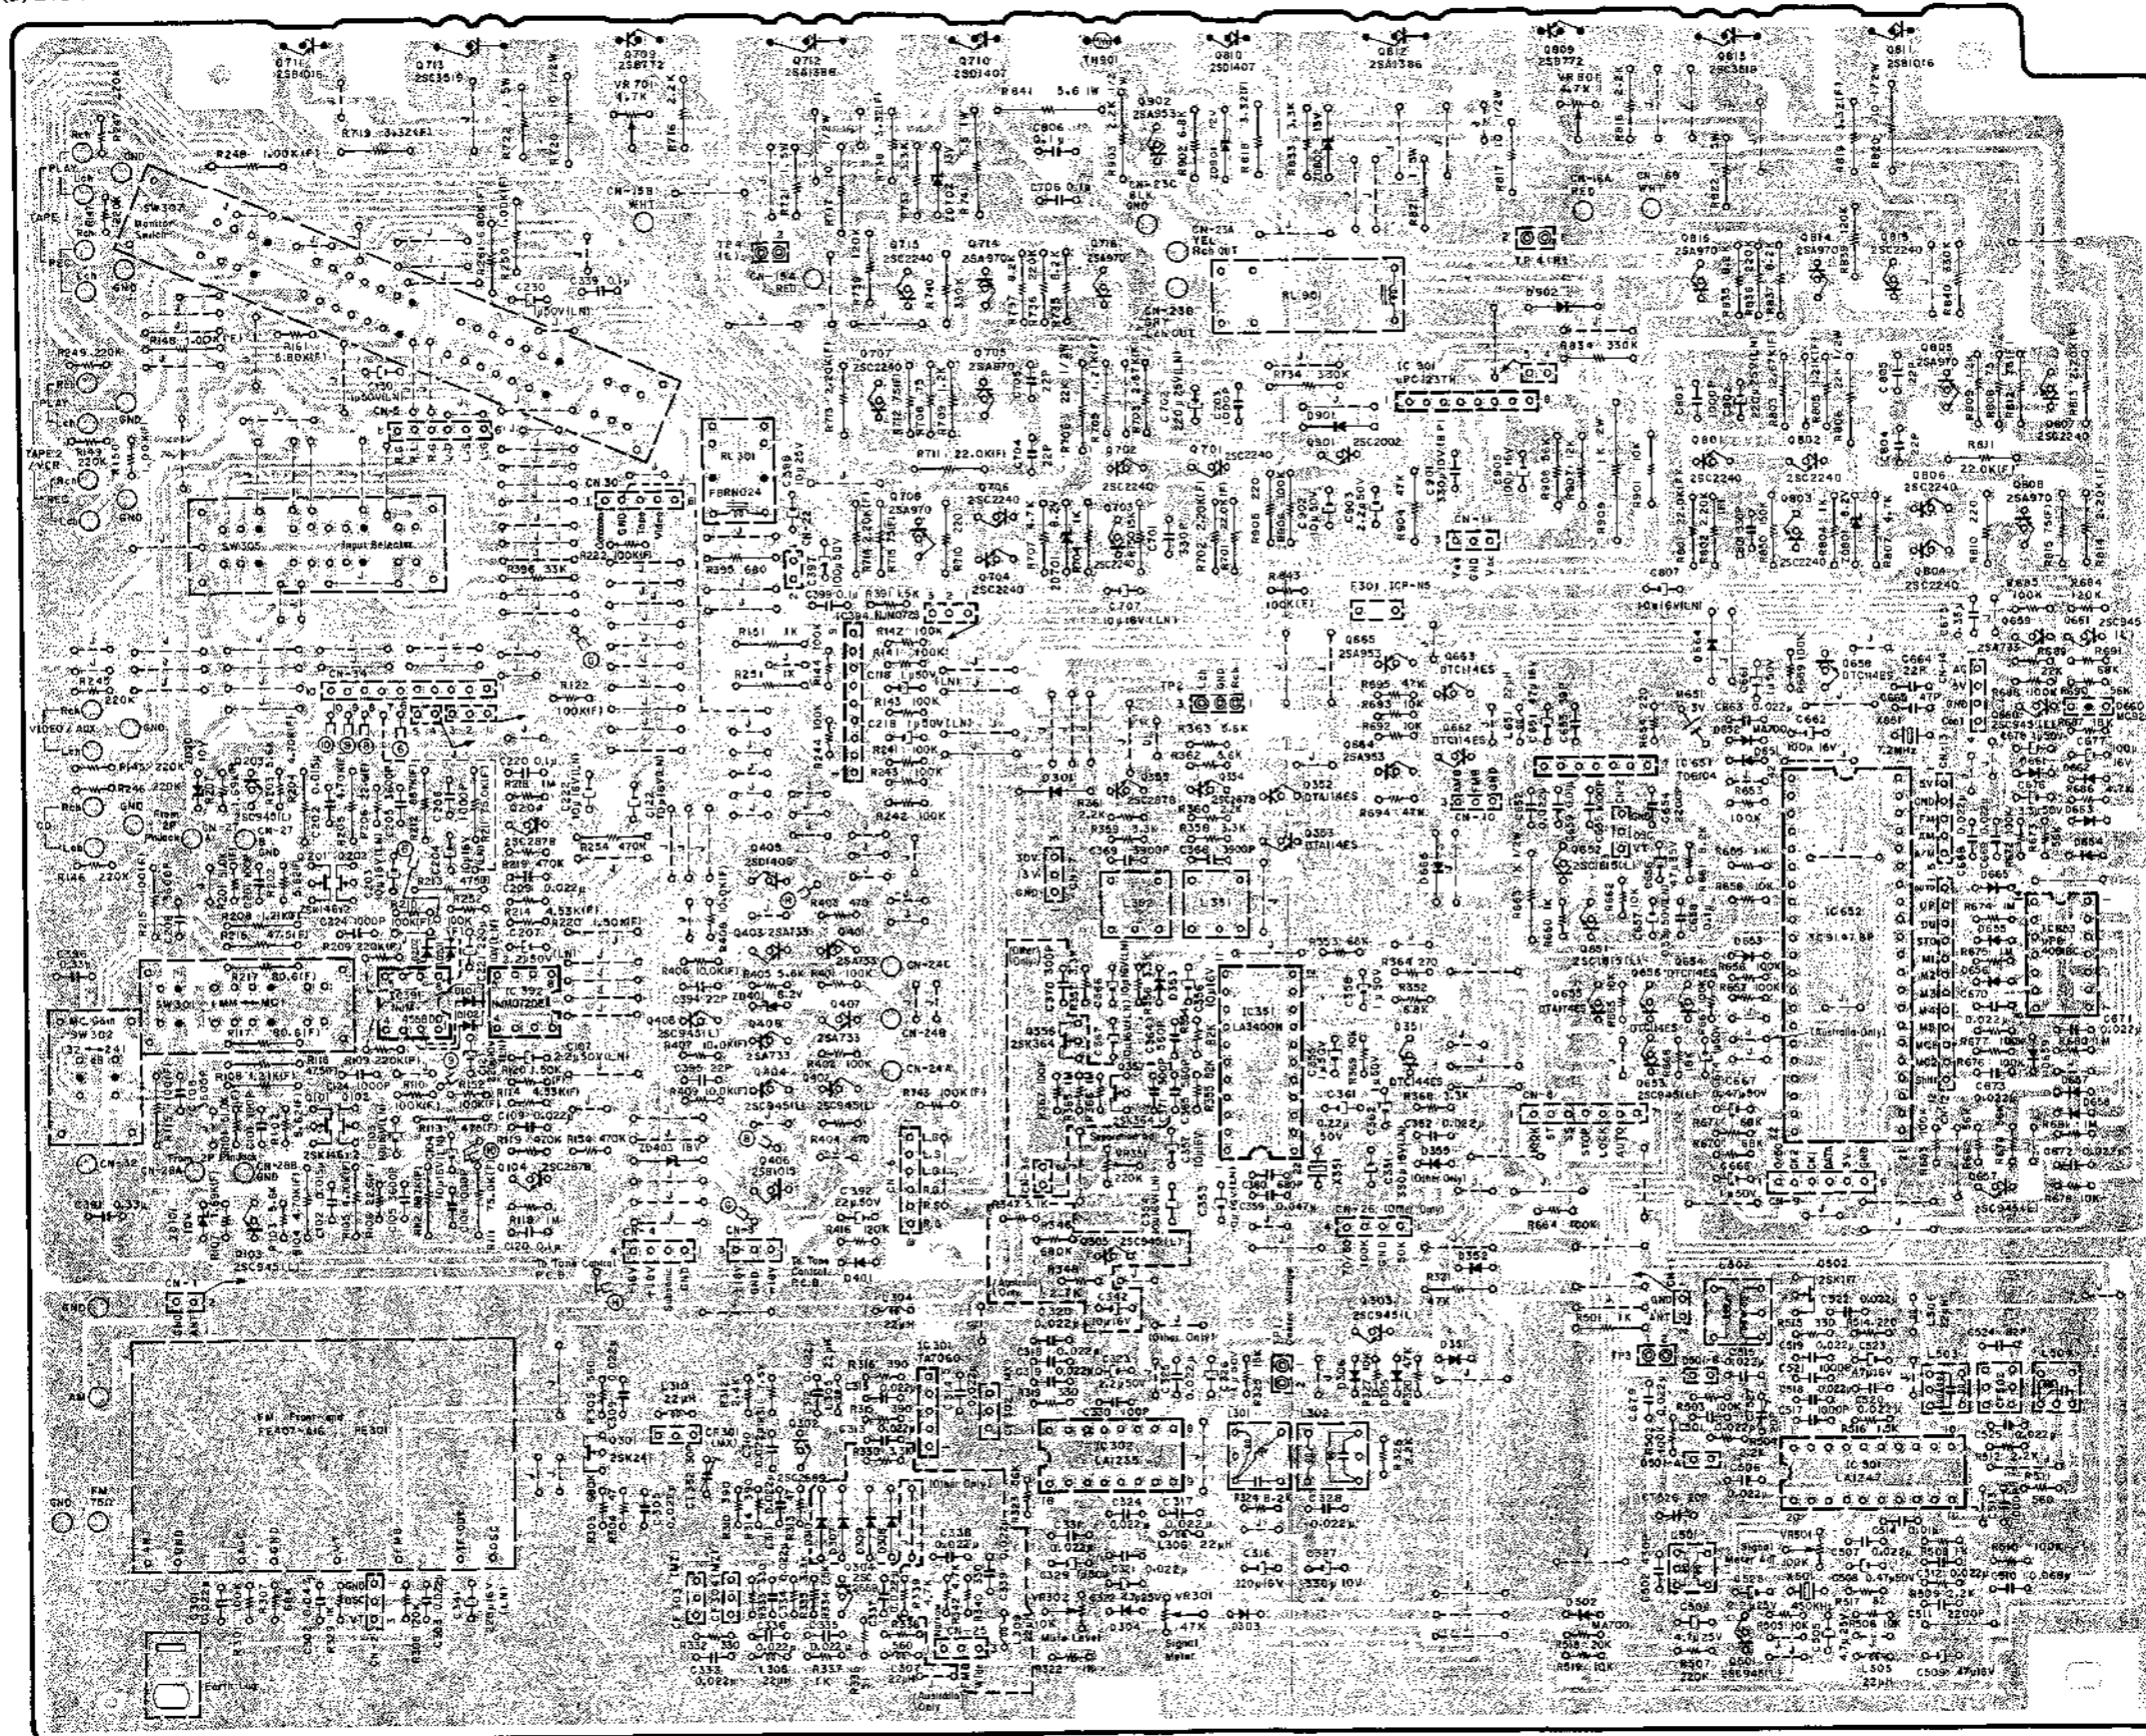

Schematic Ref. No.	Part No.	Description
	BA06239A	Main P.C.B. Ass'y (SR-3 (Other) 2nd Version)
	- FM -	
IC301	OB11156A	IC TA7060AP
IC302	OB11157A	IC LA1235
Q301	OB10127A	FET 2SK241 (GR)
Q302,304	OB10174A	TR 2SC2669 (O.Y)
Q303	OB01872A	TR 2SC945L (P.O)
D303-306	OB06398A	SD 18S176 (4)
D307-310	OB06181A	SD 18S53 (4)
L301	OB51240A	FM Det. Coil A
L302	OB51241A	FM Det. Coil B
L304-810	OB51239A	Micro Coil 22μH (7)
VR301	OB32084A	Semi VR 47K
VR302	OB32080A	Semi VR 10K
R301	OB09725A	RK 100K 1/6W J
R303	OB09745A	RK 68K 1/6W J
R304,313	OB09645A	RK 47 1/6W J
R305,338	OB09671A	RK 560 1/6W J
R307	OB09721A	RK 68K 1/6W J
R308	OB09724A	RK 120K 1/6W J
R310,314	OB09667A	RK 390 1/6W J
R315,316		
R311,334	OB09698A	RK 7.5K 1/6W J
R312	OB09686A	RK 2.4K 1/6W J
R319,332	OB09665A	RK 330 1/6W J
R333,340		
R320	OB09717A	RK 47K 1/6W J
R321	OB05641A	RK 47K 1/4W J
R322,329	OB09677A	RK 1K 1/6W J
R337		
R323	OB09719A	RK 56K 1/6W J
R324	OB09699A	RK 8.2K 1/6W J
R325	OB09705A	RK 15K 1/6W J
R326	OB09685A	RK 2.2K 1/6W J
R327	OB09701A	RK 10K 1/6W J
R330,335	OB09689A	RK 3.3K 1/6W J
R336	OB09646A	RK 51 1/6W J
R339,342	OB09693A	RK 4.7K 1/6W J
CF301,302	OB41818A	Ceramic Filter SFE10.7MX2K-A
CF303,304	OB41746A	Ceramic Filter SFE10.7MX3GH15/
CT332	OB41614A	C Trimmer 30P
C301,303	OB41554A	CC 0.022μ 25V Z (24)
305,309		
310,311		
313,314		
315,318		
319,320		
321,324		
325,328		
331		
333-339		
C302	OB41294A	CMM 0.047μ 50V J
C312,317	OB41290A	CMM 0.022μ 50V J
C316	OB40079A	CE 220μ 16V
C322	OB01402A	CE 4.7μ 25V
C323	OB09372A	CE 2.2μ 50V
C326,329	OB01405A	CE 1μ 50V
C327	OB40066A	CE 330μ 10V
C330	OB41071A	CC 100P 50V J
C341	OB40420A	CE 220μ 16V (LN)
F301	OB11248A	IC Protector ICP-N-E
FE301	OB91016A	Front-end FE407-A16
CN2	OB82792A	3P Connector W240
CN7	OB82795A	3P Connector 370
CN25	OB81635A	3P-T Post
TP1	OB81634A	2P-T Post
	OE03355A	Earth Lug (1)
	- AM -	
IC501	OB11243A	IC LA1247
Q501	OB01872A	TR 2SC945L (P.O)
Q502	OB06129A	FET 2SK117 (Y)
D501	OB12386A	Varicap KV1226Y
D502	OB12363A	SD MA700
L501	OB51235A	Osc. Coil
L502	OB51236A	Ant. Coil
L503	OB51234A	IFT 2 AM
L504	OB51233A	IFT 1 AM
L505,506	OB51239A	Micro Coil 22μH
VR501	OB32086A	Semi VR 100K
R501	OB01857A	RK 1K 1/4W J


Note: For Australia, D309, D310, and pins 1 and 2 of CN-25 are shorted with jumper wires.

Fig. 5.13.2.1 2nd Version (For SR-3 (Other & Australia))





(2) 1st Version

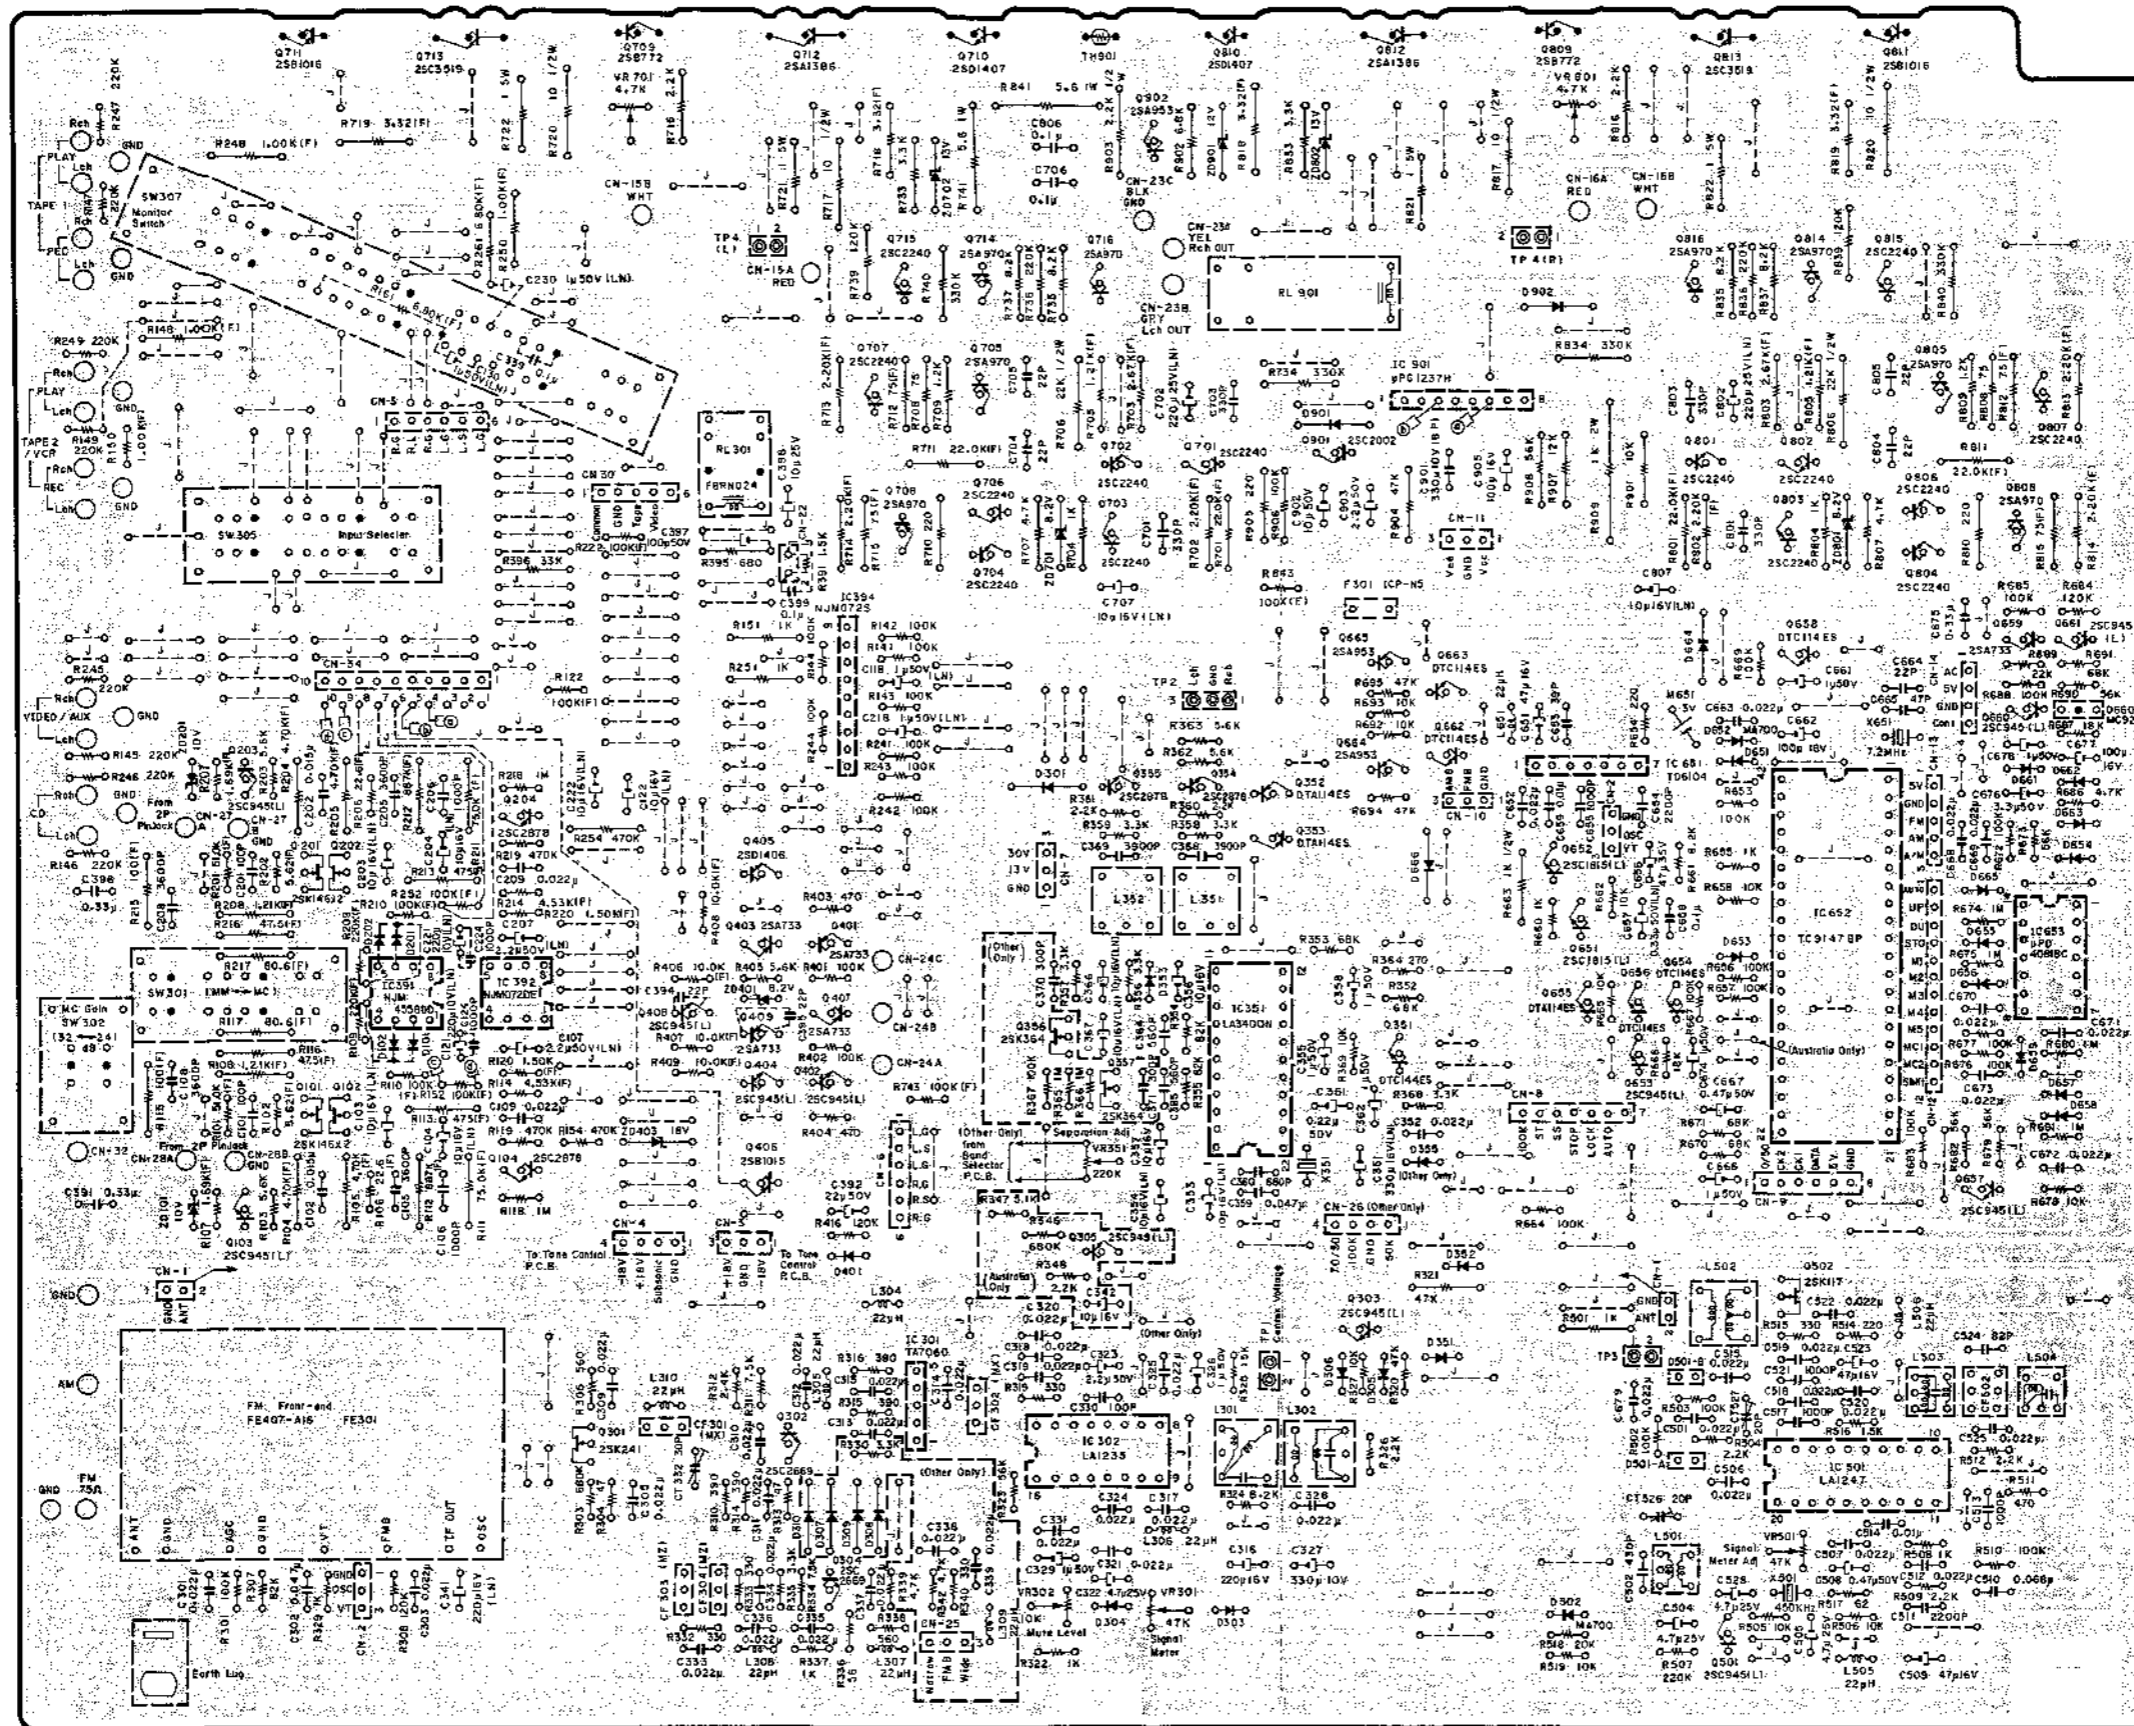

Schematic Ref. No.	Part No.	Description
	BA06239A	Main P.C.B. Ass'y (SR-3 (Other)) 1st Version
	- FM -	
IC301	OB11156A	IC TA7060AP
IC302	OB11157A	IC LA1235
Q301	OB10127A	FET 2SK241 (GR)
Q302,304	OB10174A	TR 2SC2669 (O.Y)
Q303	OB01872A	TR 2SC945L (P.C)
D303-306	OB06398A	SID 1SS176 (4
D307-310	OB06181A	SID 1SS53 (4
L301	OB51240A	FM Det. Coil A
L302	OB51241A	FM Det. Coil B
L304-310	OB51239A	Micro Coil 22μH (7
VR301	OB32084A	Semi VR 47K
VR302	OB32080A	Semi VR 10K
R301	OB09725A	RK 100K 1/6W J
R303	OB09745A	RK 680K 1/6W J
R304,313	OB09645A	RK 47 1/6W J
R305,338	OB09671A	RK 560 1/6W J
R307	OB09723A	RK 82K 1/6W J
R308	OB09727A	RK 120K 1/6W J
R310,314	OB09667A	RK 390 1/6W J
315,316		
R311,334	OB09698A	RK 7.5K 1/6W J
R312	OB09686A	RK 2.4K 1/6W J
R319,332	OB09665A	RK 330 1/6W J
333,340		
R320	OB09717A	RK 47K 1/6W J
R321	OB05641A	RK 47K 1/4W J
R322,329	OB09677A	RK 1K 1/6W J
337		
R323	OB09719A	RK 56K 1/6W J
R324	OB09699A	RK 8.2K 1/6W J
R325	OB09705A	RK 15K 1/6W J
R326	OB09685A	RK 2.2K 1/6W J
R327	OB09701A	RK 10K 1/6W J
R330,335	OB09689A	RK 3.3K 1/6W J
R336	OB09647A	RK 56 1/6W J
R339,342	OB09693A	RK 4.7K 1/6W J
CF301,302	OB41700A	Ceramic Filter SFE10.7MX2H-A
CF303,304	OB41076A	Ceramic Filter SFE10.7MS3GKY-C
CT332	OB41614A	C Trimmer 30P
C301,303	OB41554A	CC 0.022μ 25V Z
305,309		
310,311		
313,314		
315,318		
319,320		
321,324		
325,328		
331		
333-339		
C302	OB41294A	CMM 0.047μ 50V J
C312,317	OB41290A	CMM 0.022μ 50V J
C316	OB40079A	CE 220μ 16V
C322	OB01402A	CE 4.7μ 25V
C323	OB09372A	CE 2.2μ 50V
C326,329	OB01405A	CE 1μ 50V
C327	OB40066A	CE 330μ 10V
C330	OB41071A	CC 100P 50V J
C341	OB40420A	CC 220μ 16V (LN)
F301	OB11248A	IC Protector ICP-NI
FE301	OB91016A	Front-end FE407-A16
CN2	OB82792A	3P Connector W24C
CN7	OB82795A	3P Connector 370
CN25	OB81635A	3P-T Post
TP1	OB81634A	2P-T Post
	OE03355A	Earth Lug (1
	- AM -	
IC501	OB11243A	IC LA1247
Q501	OB01872A	TR 2SC945L (P.C)
Q502	OB06129A	FET 2SK117 (Y)
D501	OB12386A	Varicap KV1226Y
D502	OB12363A	SID MA700
L501	OB51235A	Osc. Coil
L502	OB51236A	Ant. Coil
L503	OB51234A	IFT 2 AM
L504	OB51233A	IFT 1 AM
L505,506	OB51239A	Micro Coil 22μH
VR501	OB32084A	Semi VR 47K
R501	OB01857A	RK 1K 1/4W J

Note: For Australia, D309, D310, and pins 1 and 2 of CN-25 are shorted with jumper wires.

Fig. 5.13.2.2 1st Version (For SR-3 (Other & Australia))



5.13.3. For SR-3E (Europe)

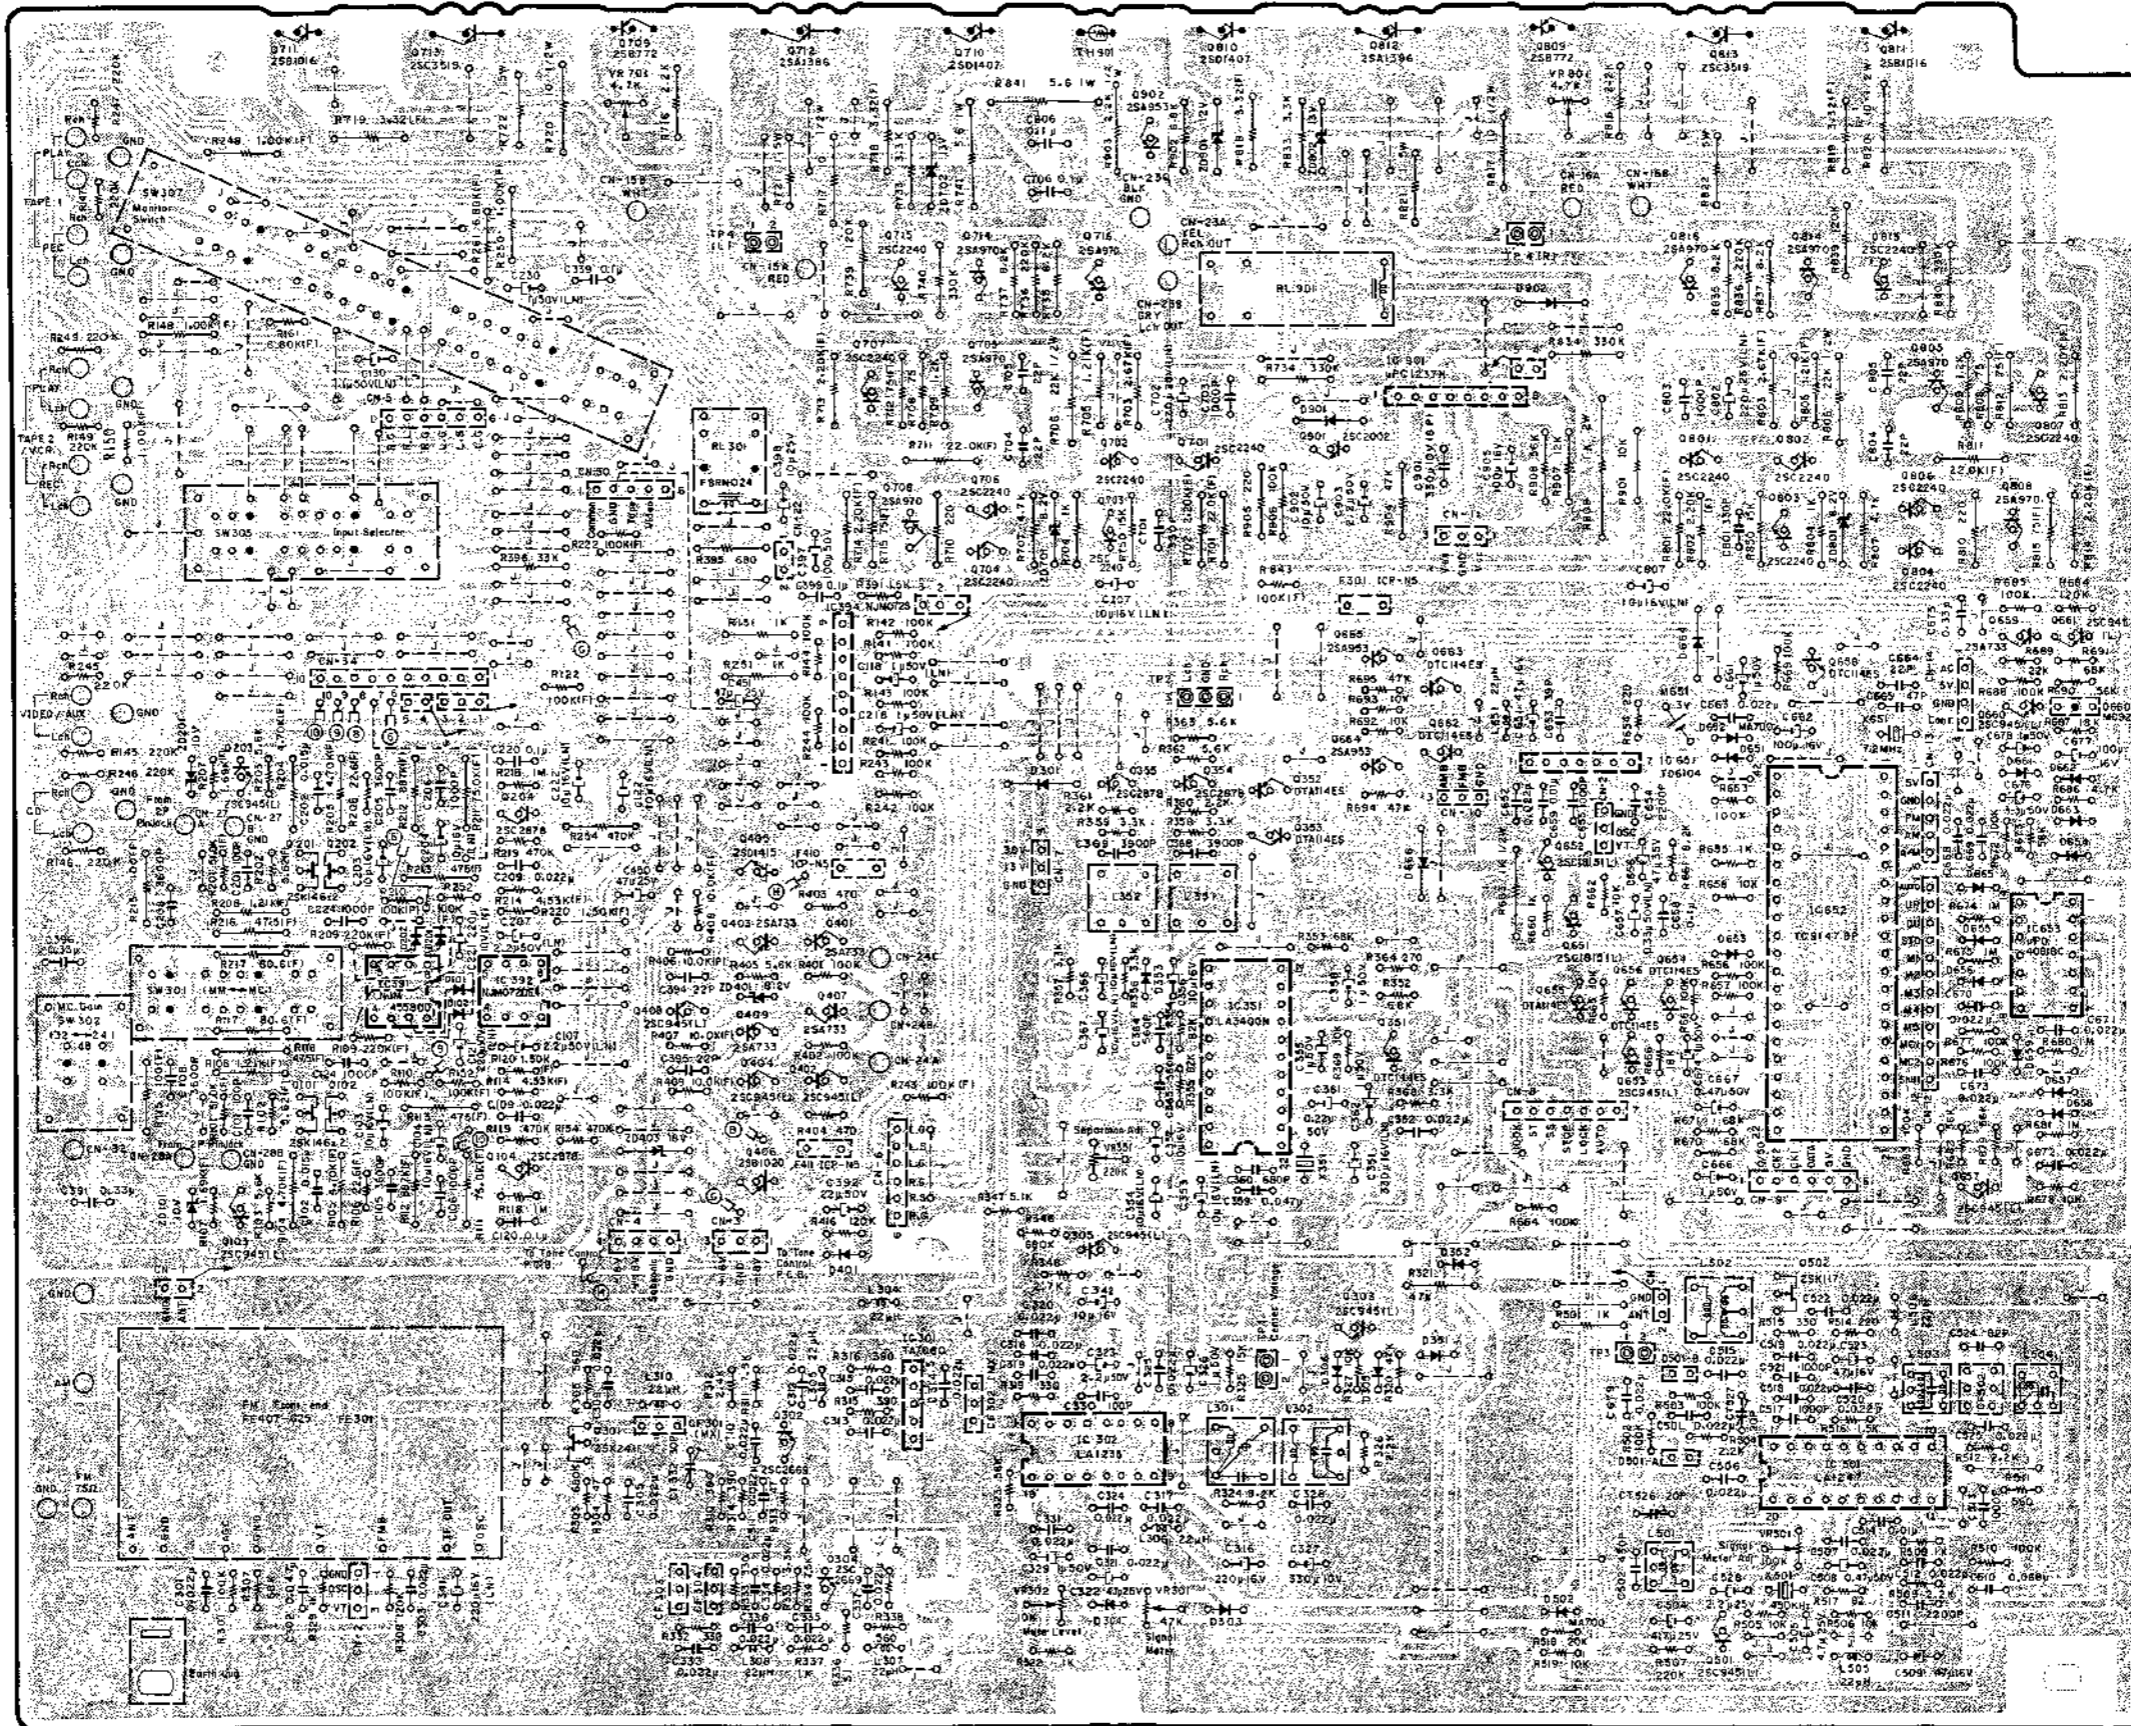


Fig. 5.13.3. For SR-3E (Europe)

Table with 18 columns: Schematic Ref. No., Part No., Description, Schematic Ref. No., Part No., Description, Schematic Ref. No., Part No., Description, Schematic Ref. No., Part No., Description, Schematic Ref. No., Part No., Description, Schematic Ref. No., Part No., Description. Includes detailed part lists and a schematic diagram of the main P.C.B. assembly.

5.14. Eq. Sub P.C.B. Ass'y

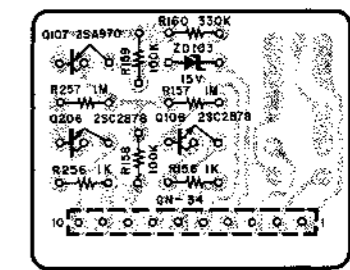


Fig. 5.14

5.13.4. For SR-3E (Germany)

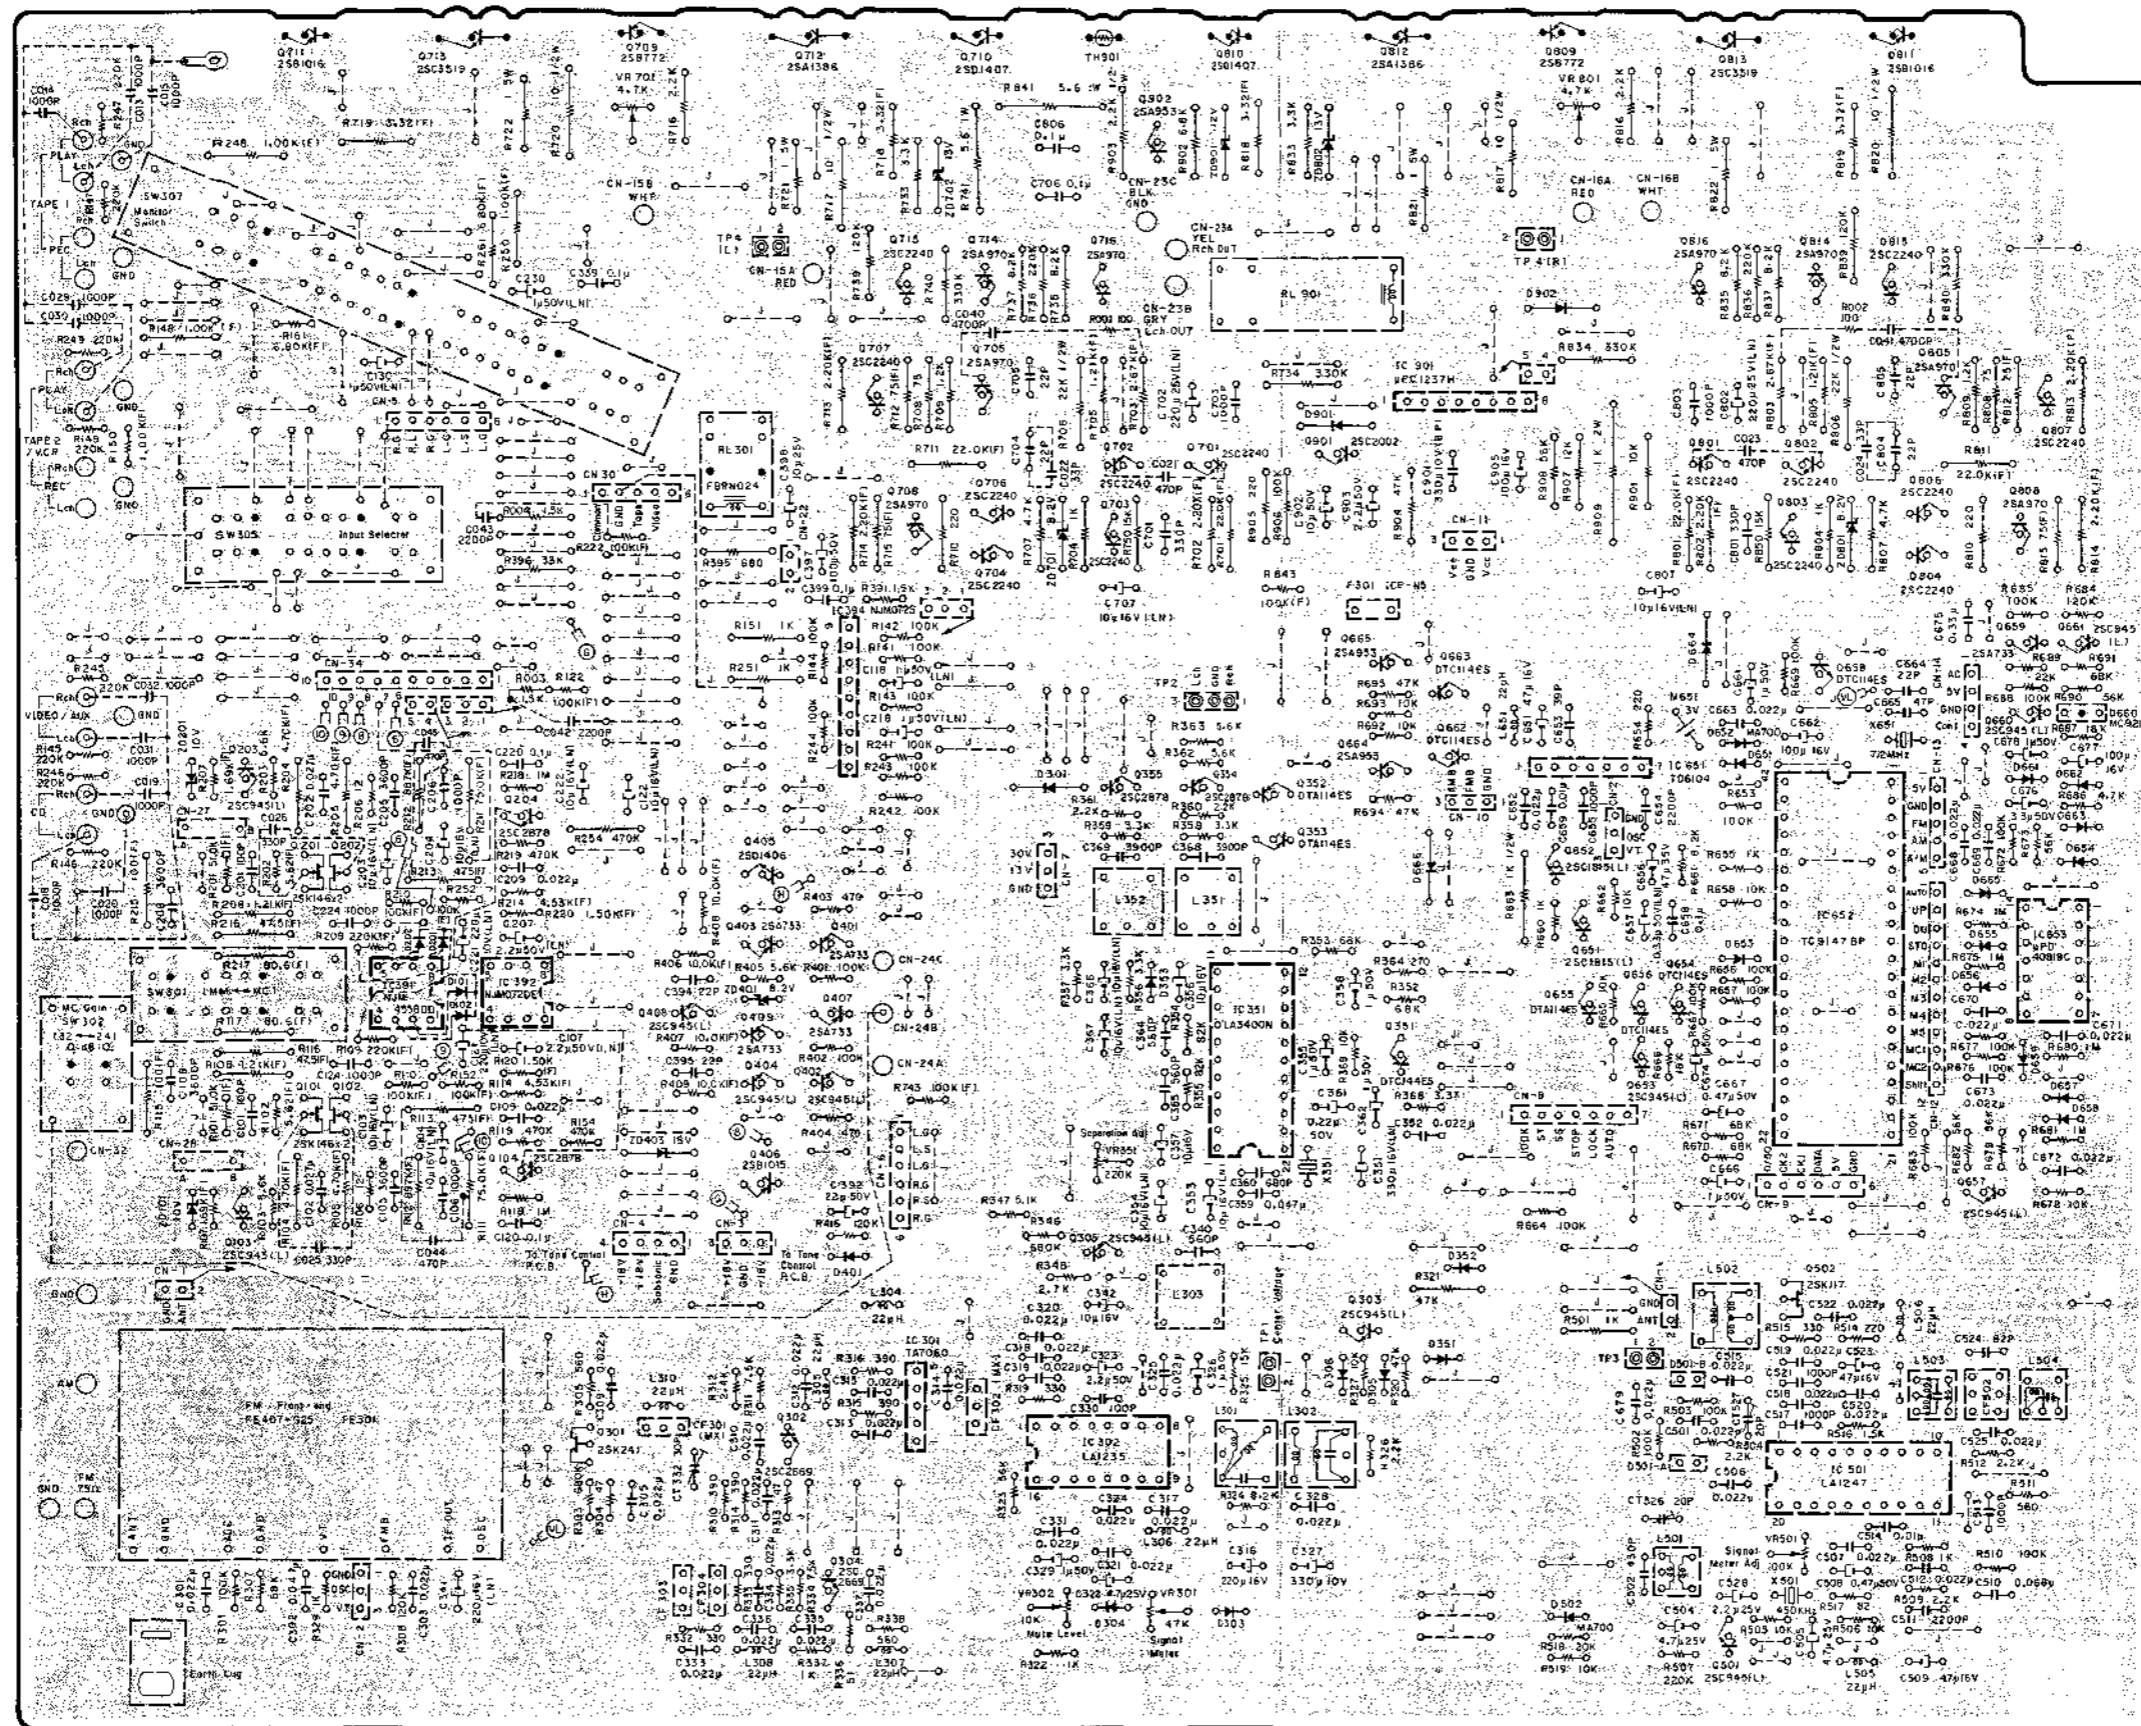


Fig. 5.13.4 For SR-3E (Germany)

Schematic Ref. No.	Part No.	Description
	BA06825A	Main P.C.B. Ass'y (SR-3E (Germany) — FM —
IC301	OB11156A	IC TA7060AP
IC302	OB11157A	IC LA1235
Q301	OB10127A	FET 2SK241 (GR
Q302,304	OB10174A	TR 2SC2669 (O
Q303,305	OB10187A	TR 2SC945L (P
D303-306	OB06398A	SID 1SS176 (
L301	OB51240A	FM Det. Coil A
L302	OB51241A	FM Det. Coil B
L303	OB51238A	Anti-birdy Filter
L304-308	OB51239A	Micro Coil 22μH (
VR301	OB32084A	Semi VR 47K
VR302	OB32080A	Semi VR 10K
R301	OB09725A	RK 100K 1/6W
R303,346	OB09745A	RK 680K 1/6W
R304,318	OB09645A	RK 47 1/6W
R305,338	OB09671A	RK 56K 1/6W
R307	OB09721A	RK 68K 1/6W
R308	OB09727A	RK 120K 1/6W
R310,314	OB09667A	RK 390 1/6W
315,316		
R311,334	OB09698A	RK 7.5K 1/6W
R312	OB09686A	RK 2.4K 1/6W
R319,332	OB09665A	RK 330 1/6W
333		
R320	OB09717A	RK 47K 1/6W
R321	OB06641A	RK 47K 1/4W
R322,329	OB09677A	RK 1K 1/6W
337		
R323	OB09719A	RK 56K 1/6W
R324	OB09699A	RK 8.2K 1/6W
R325	OB09705A	RK 15K 1/6W
R326	OB09685A	RK 2.2K 1/6W
R327	OB09701A	RK 10K 1/6W
R335	OB09689A	RK 3.3K 1/6W
R336	OB09646A	RK 51 1/6W
R347	OB09694A	RK 5.1K 1/6W
R348	OB09687A	RK 2.7K 1/6W
CF301,302	OB41818A	Ceramic Filter SFE10.7MX2K-A
CF303,304	OB41746A	Ceramic Filter SFE10.7MS3GH1E
CT332	OB41614A	C Trimmer 30P
C301,303	OB41554A	CC 0.02μ 25V 2
305,309		
310,311		
313,314		
315,318		
319,320		
321,324		
325,328		
331,333		
334,335		
336,337		
C302	OB41294A	CMM 0.047μ 50V
C312,317	OB41290A	CMM 0.022μ 50V
C316	OB40079A	CE 220μ 16V
C322	OB01402A	CE 4.7μ 25V
C323	OB09372A	CE 2.2μ 50V
C326,329	OB01405A	CE 1μ 50V
C327	OB40066A	CE 330μ 10V
C330	OB41071A	CC 100P 50V J
C340	OB41404A	CP 560P 50V J
C341	OB40420A	CE 220μ 16V (L
C342	OB01412A	CE 10μ 16V
F301	OB11248A	IC Protector ICP-N
FE301	OB91017A	Front-end FE407-G25
CN2	OB88053A	3P Connector W24
CN7	OB82795A	3P Connector 370mm
TP1	OB81634A	2P-T Post
	OE03856A	Earth Lug (1
		— AM —
IC501	OB11243A	IC LA1247
Q501	OB01872A	TR 2SC945L (P,G
Q502	OB06129A	FET 2SK117 (Y)
D501	OB12386A	Vacicap KV1226V
D502	OB12363A	SID MA700
L501	OB51235A	Osc. Coil



## 6. SCHEMATIC DIAGRAMS

### 6.1. IC Block Diagrams

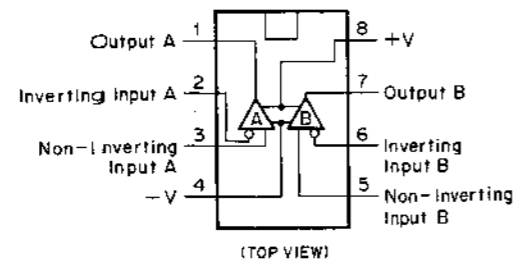


Fig. 6.1.1 Operational Amp. IC 4558DD, 072DE

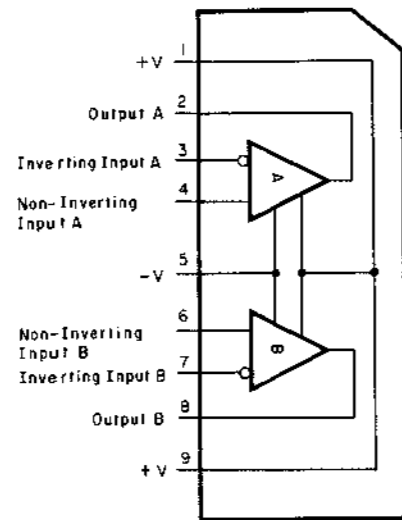


Fig. 6.1.2 Operational Amp. IC 072S

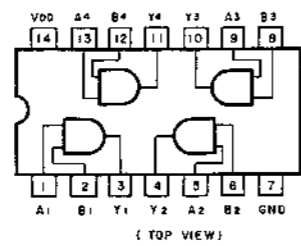


Fig. 6.1.3 AND Gate C-MOS IC μPD4081BC

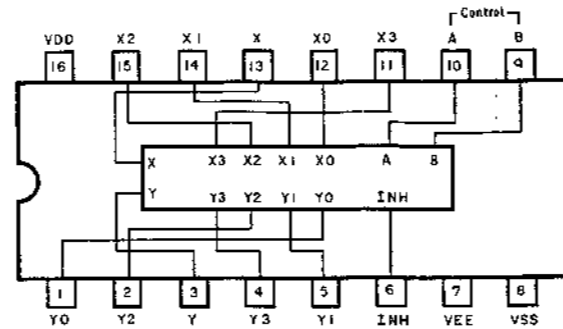


Fig. 6.1.4 Analog Multiplexers/Demultiplexers IC μPD4052BC

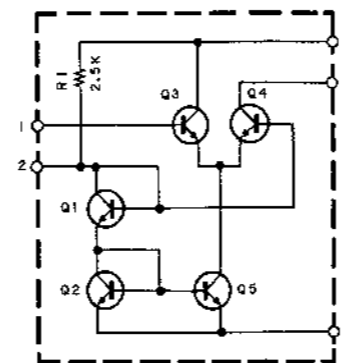


Fig. 6.1.5 FM IF Amp. IC TA7060AP

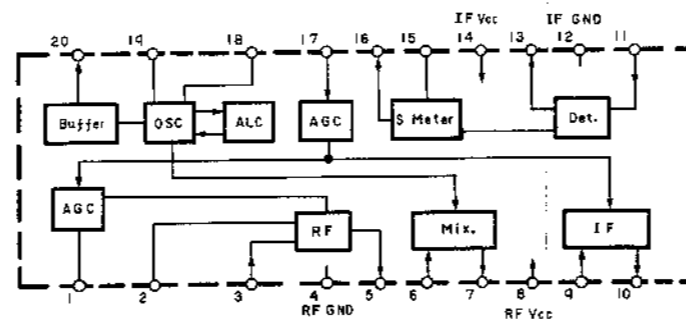


Fig. 6.1.6 AM Tuner IC LA1247

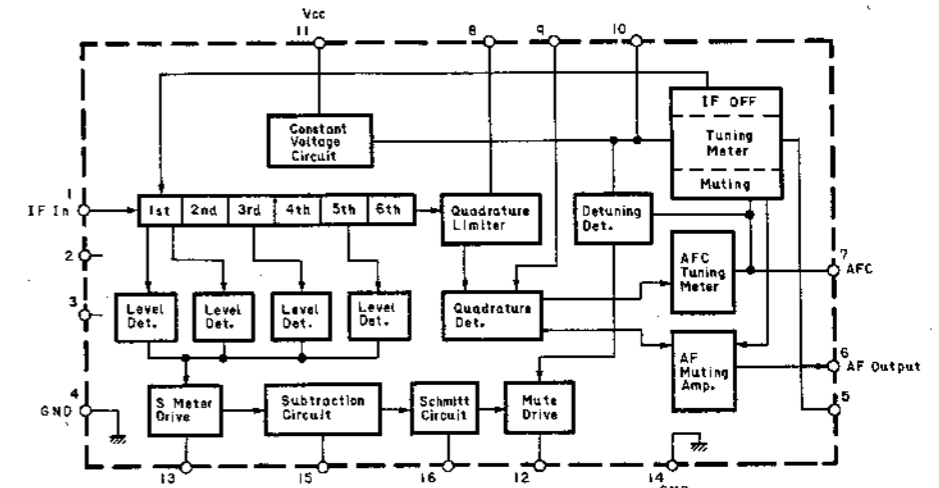


Fig. 6.1.7 FM IF System IC LA1235

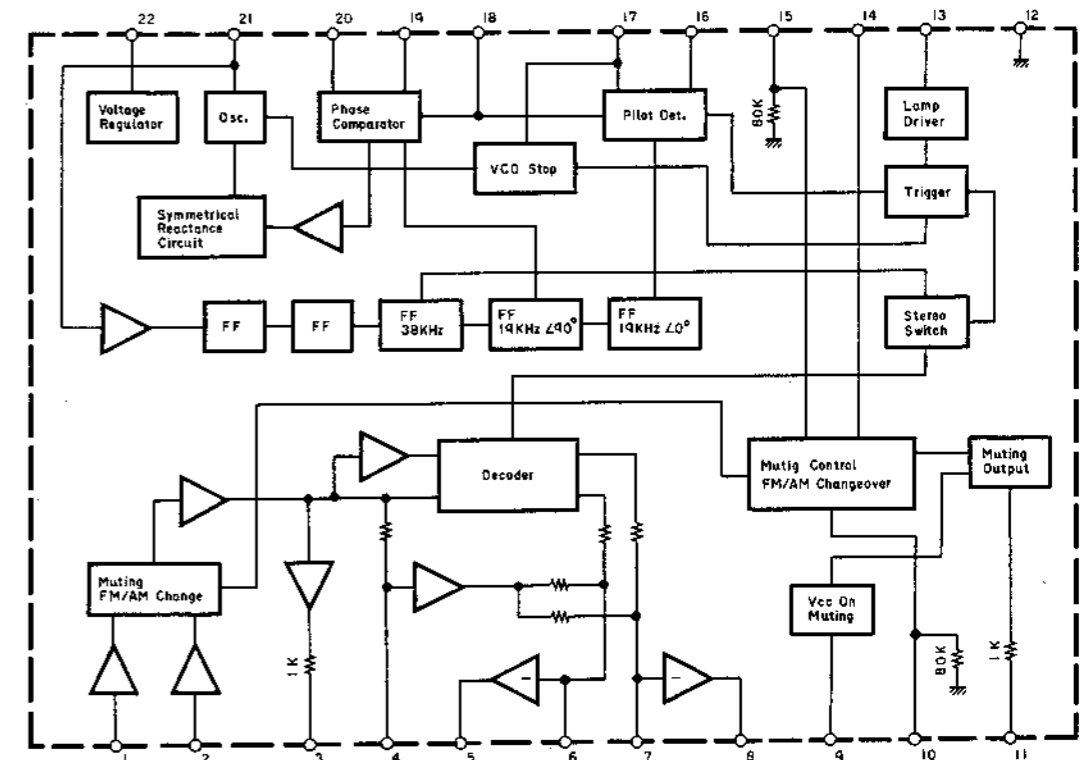


Fig. 6.1.8 FM Stereo Demodulator IC LA3400N



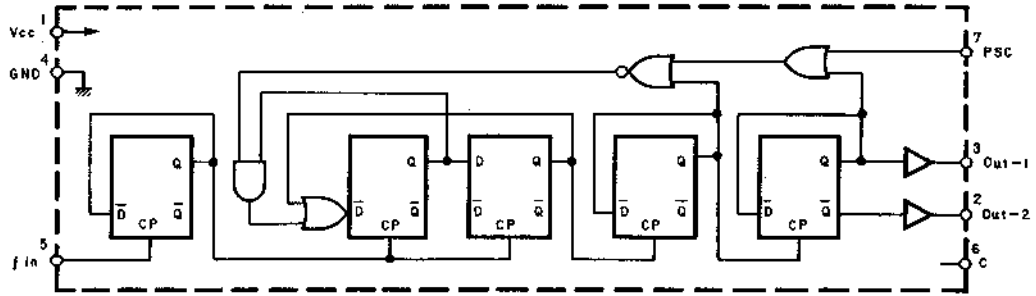


Fig. 6.1.9 ECL Prescaler (FM) IC TD6104

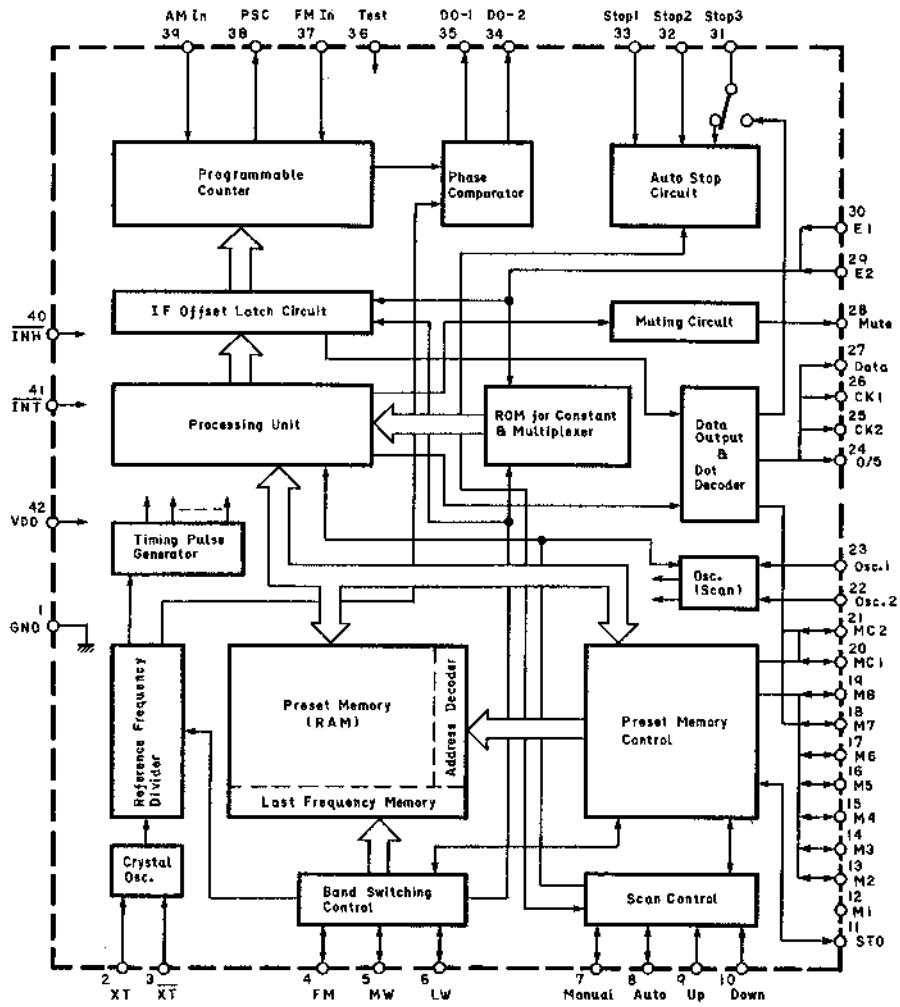


Fig. 6.1.10 FM/MW/LW 3-Band Digital Tuning (Static Method) IC TC9147BP

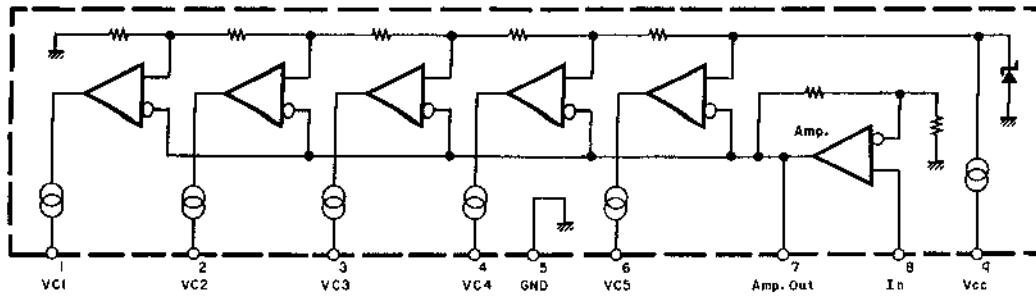


Fig. 6.1.11 Signal Meter Driver IC LB1413N

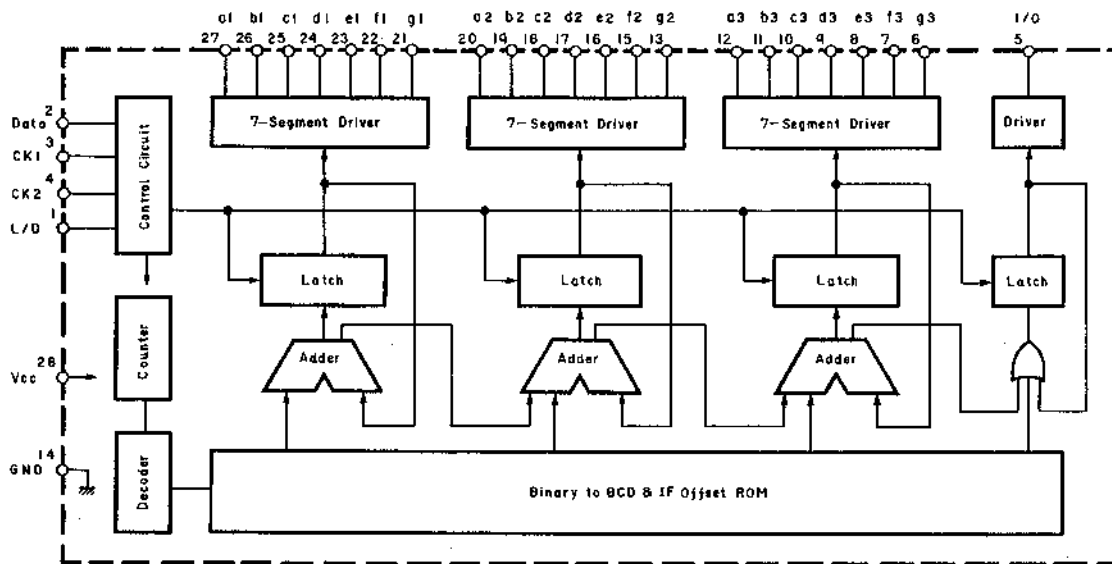


Fig. 6.1.12 Indicator Driver IC TD6301A

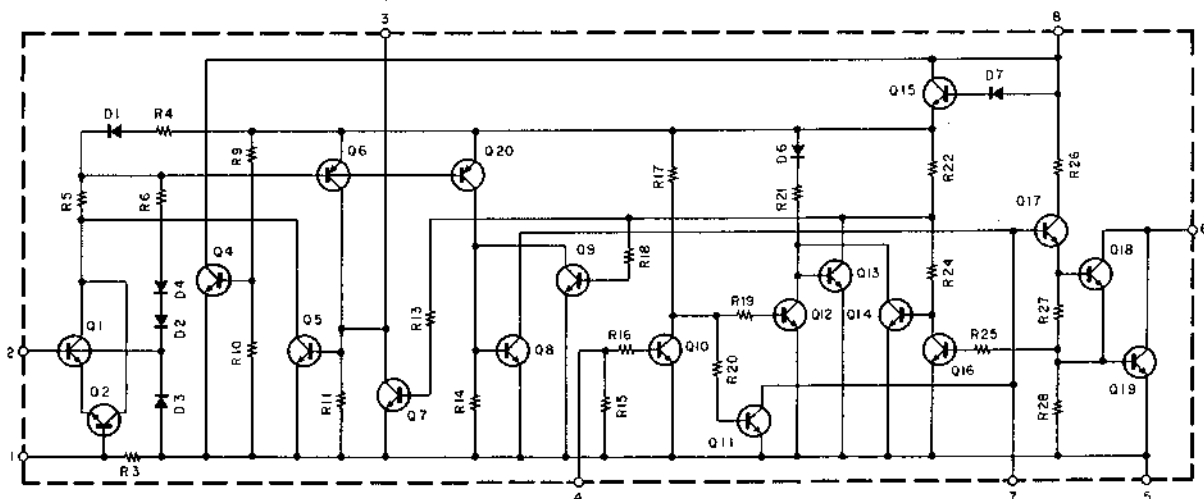


Fig. 6.1.13 Power Amp./Speaker Protector IC  $\mu$ PC1237H

6.2. Schematic Diagrams  
 6.2.1. Tuner and Power Supply Section  
 (1) For SR-3 (Canada) & SR-3A


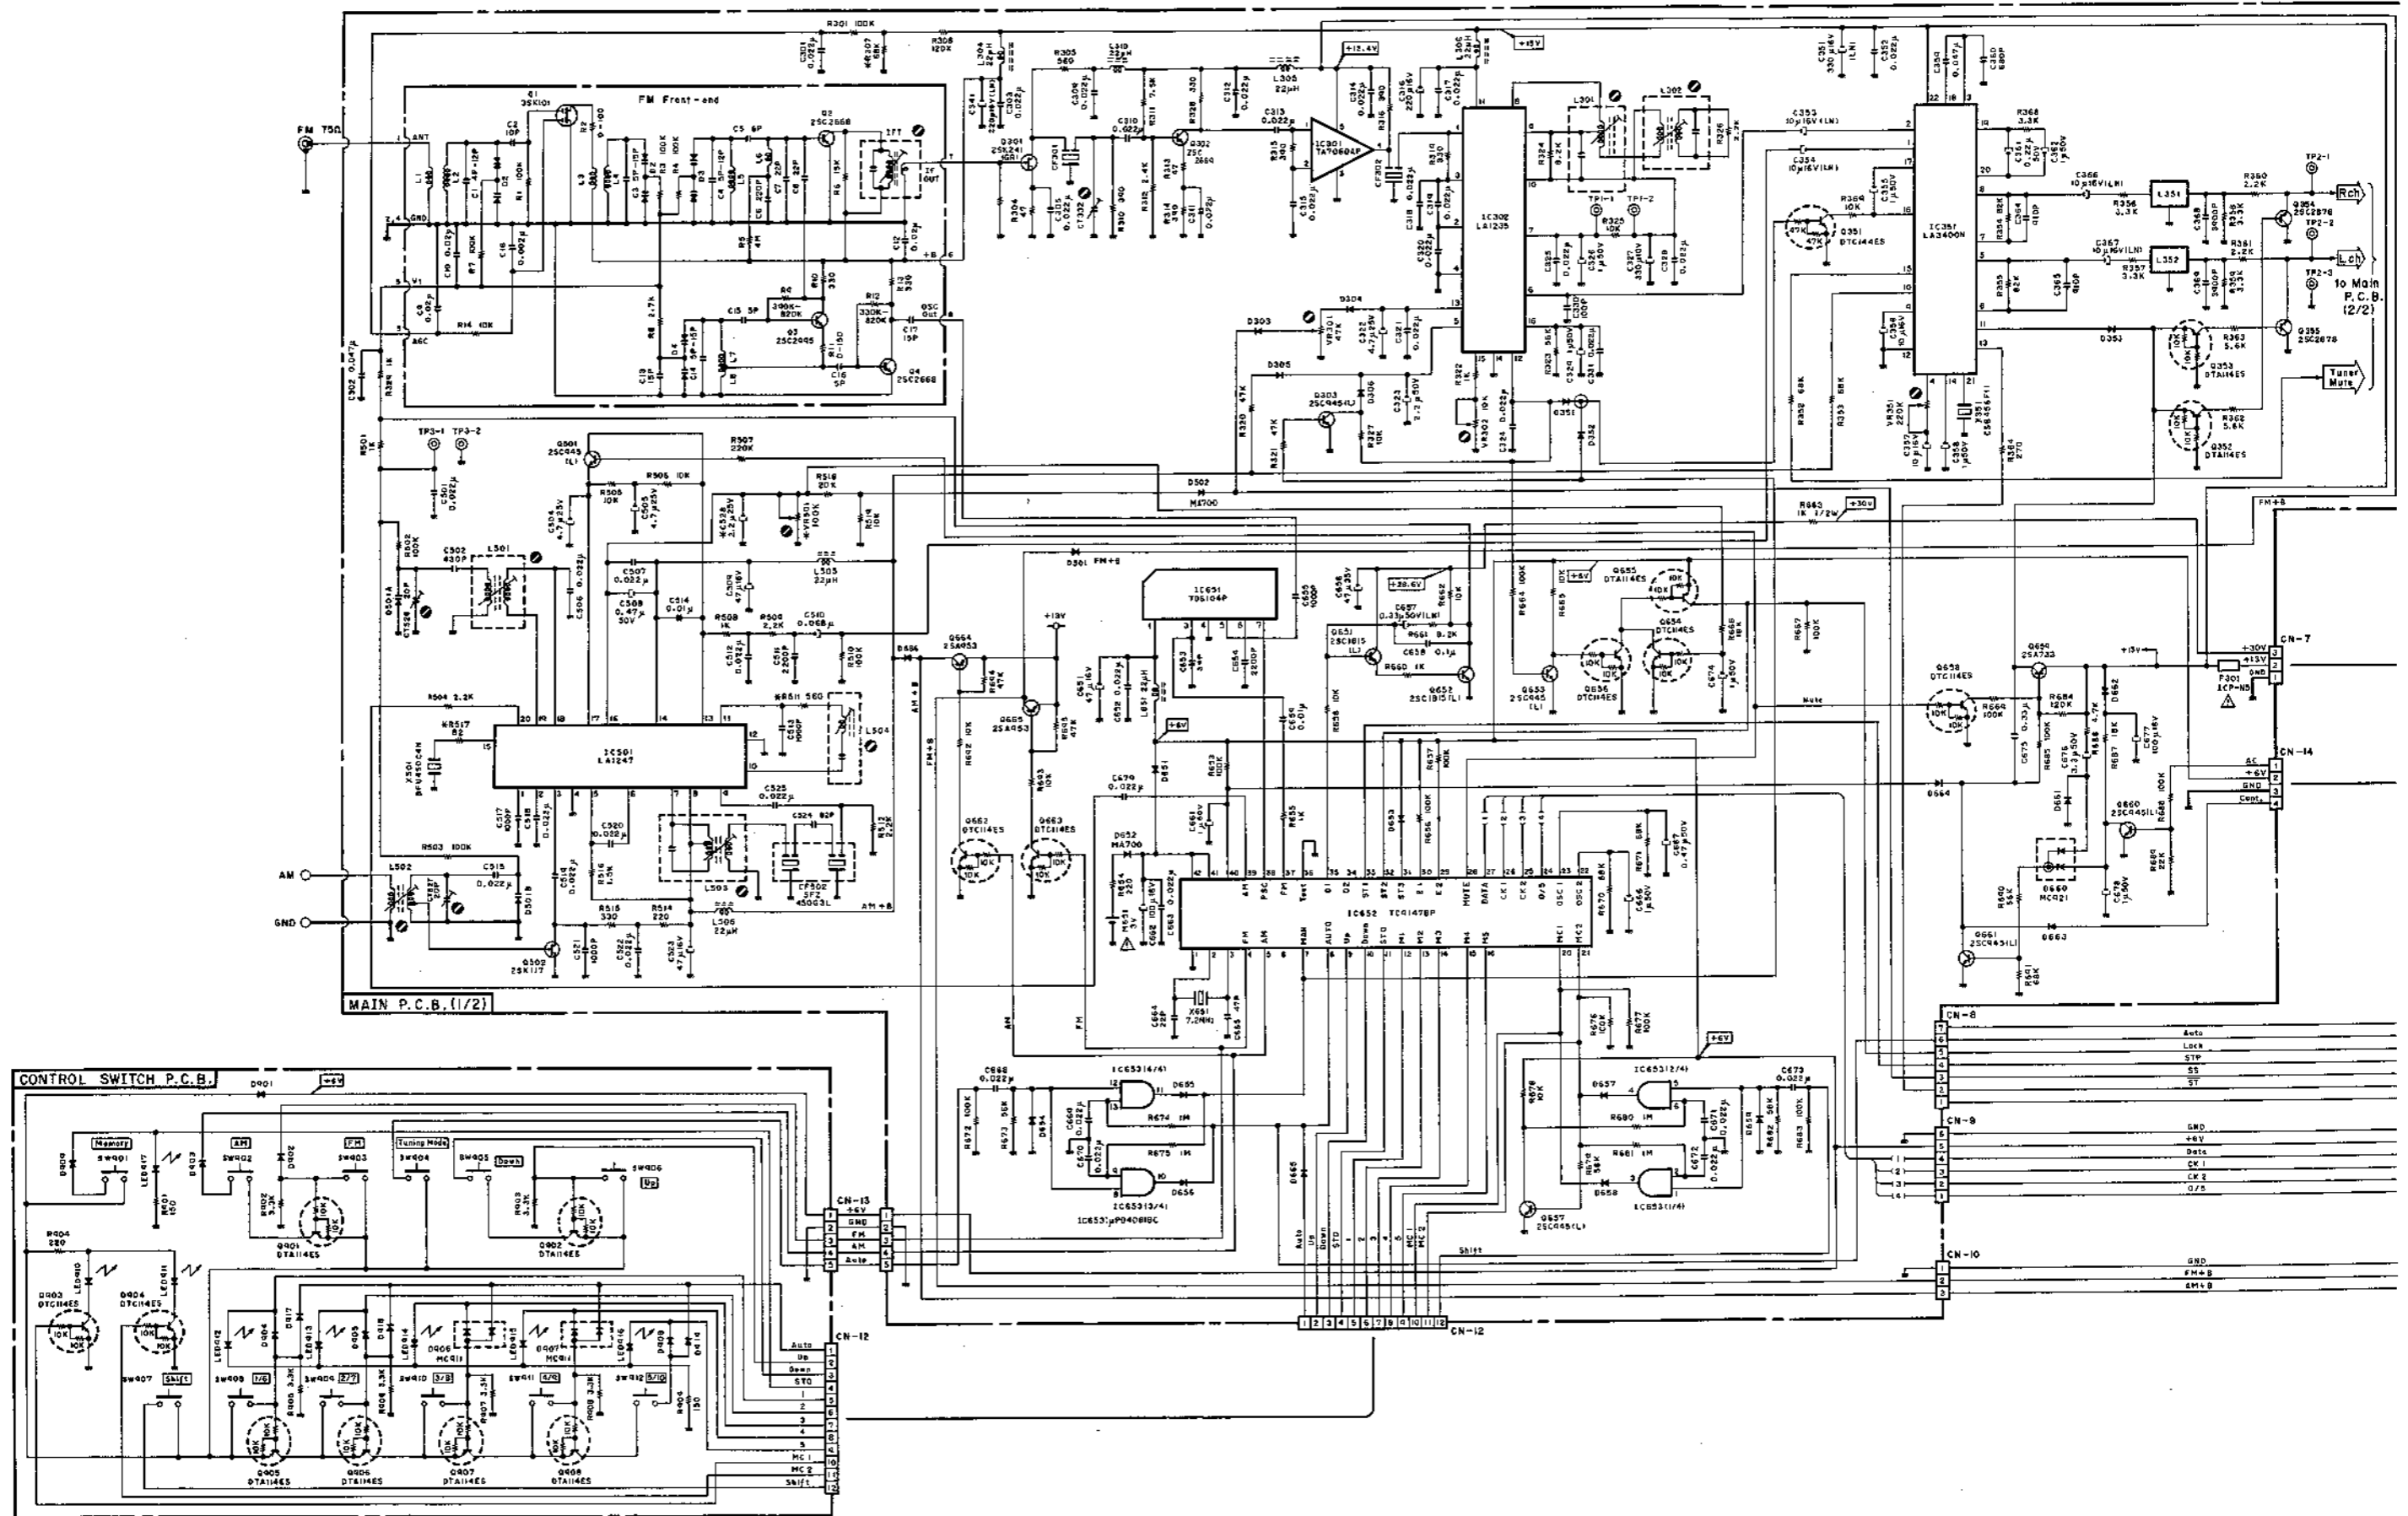



Fig. 6.2.1.1 For SR-3 (Canada) & SR-3A

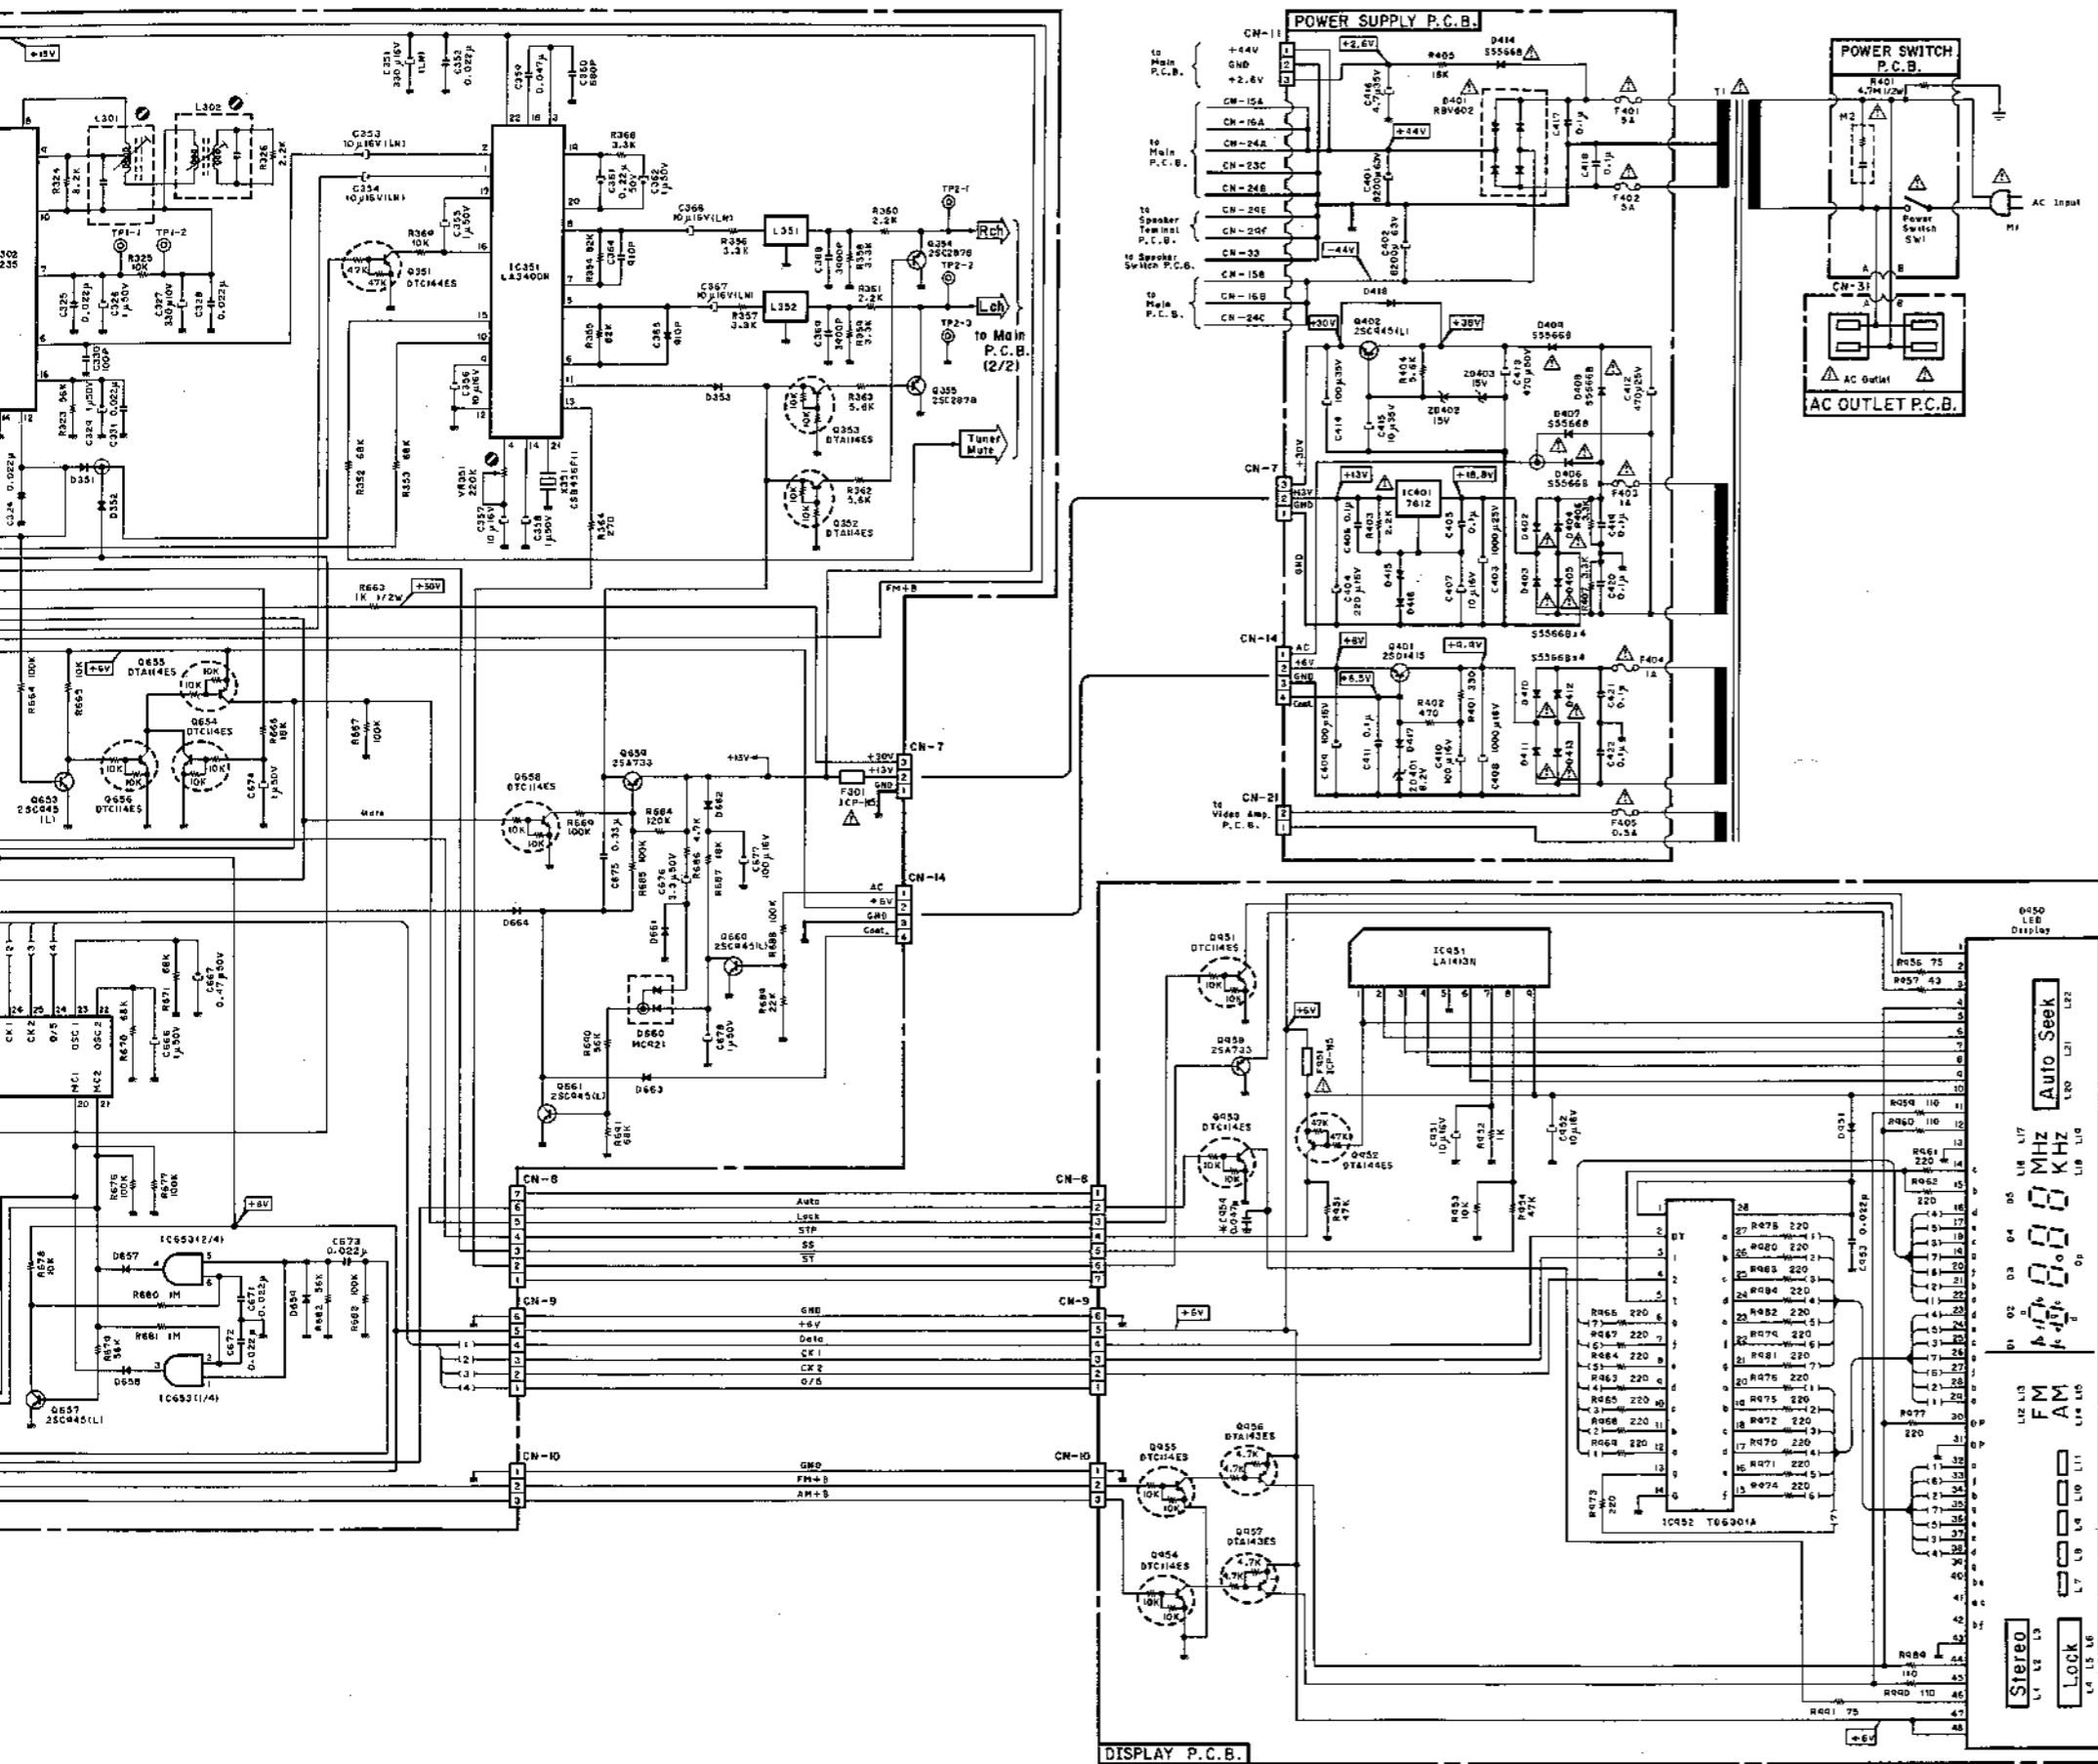

**WARNING:**

Parts marked with the symbol  have critical characteristics. Use **ONLY** replacement parts recommended by the manufacturer. It is recommended that the unit be operated from a suitable DC supply or batteries during initial check-out procedures.

**CAUTION:**

Before returning the unit to the customer, make sure you make either (1) a leakage current check or (2) a line to chassis resistance check. If the leakage current exceeds 0.5 milliamp, or if the resistance from chassis to either side of the power cord is less than 240 k ohms, the unit is defective. **WARNING — DO NOT** return the unit to the customer until the problem is located and corrected.

**For Lithium Battery:**

Use **ONLY** replacement parts recommended by the manufacturer. Replacement must be done only by qualified service personnel because of risk for explosion.

- Notes:
1. Diode is 1SS53, 1S1555, or 1SS176 unless otherwise specified.
  2. Resistor and capacitor marked with \* show typical value.
  3. 2SA733, 2SA608SP, 2SA1048 and 2SA1175 are interchangeable with each other.
  4. 2SC945, 2SC536SP, 2SC2458 and 2SC2785 are interchangeable with each other.




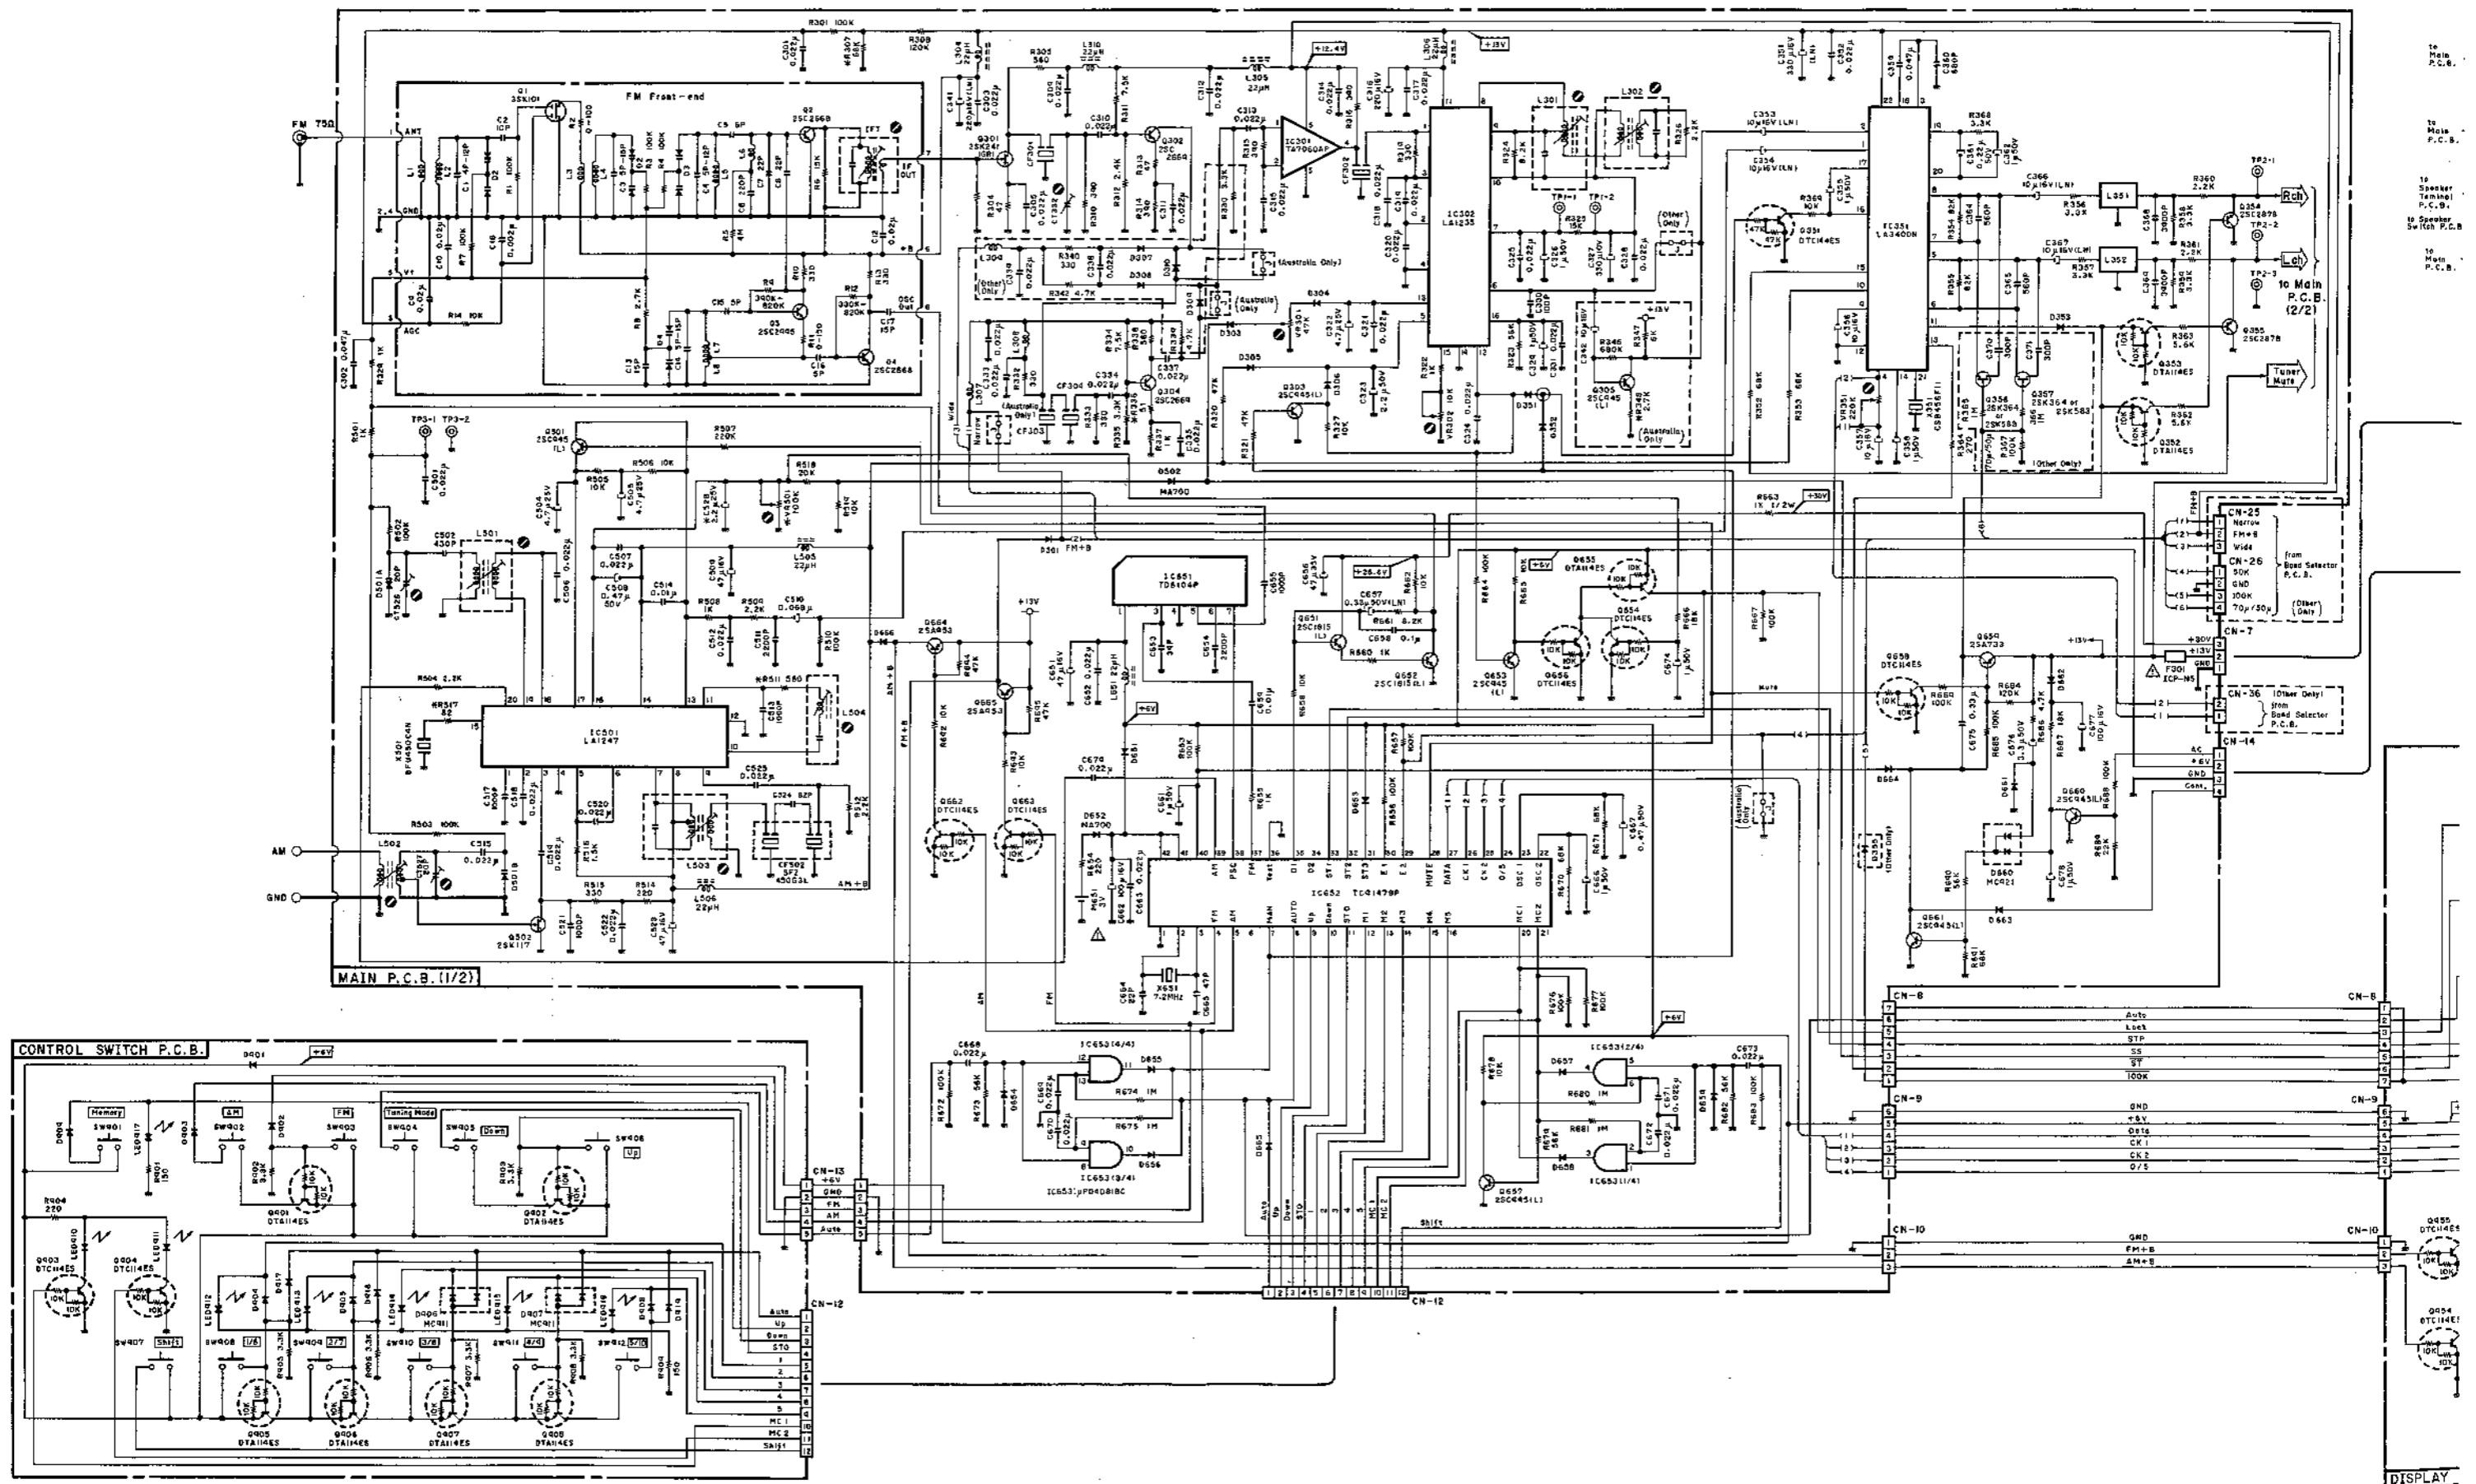



Fig. 6.2.1.2 For SR-3 (Australia & Other)

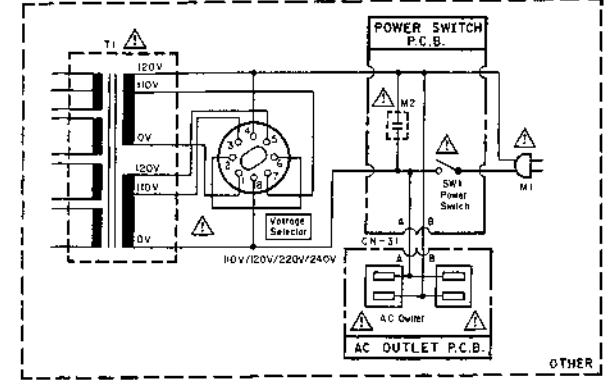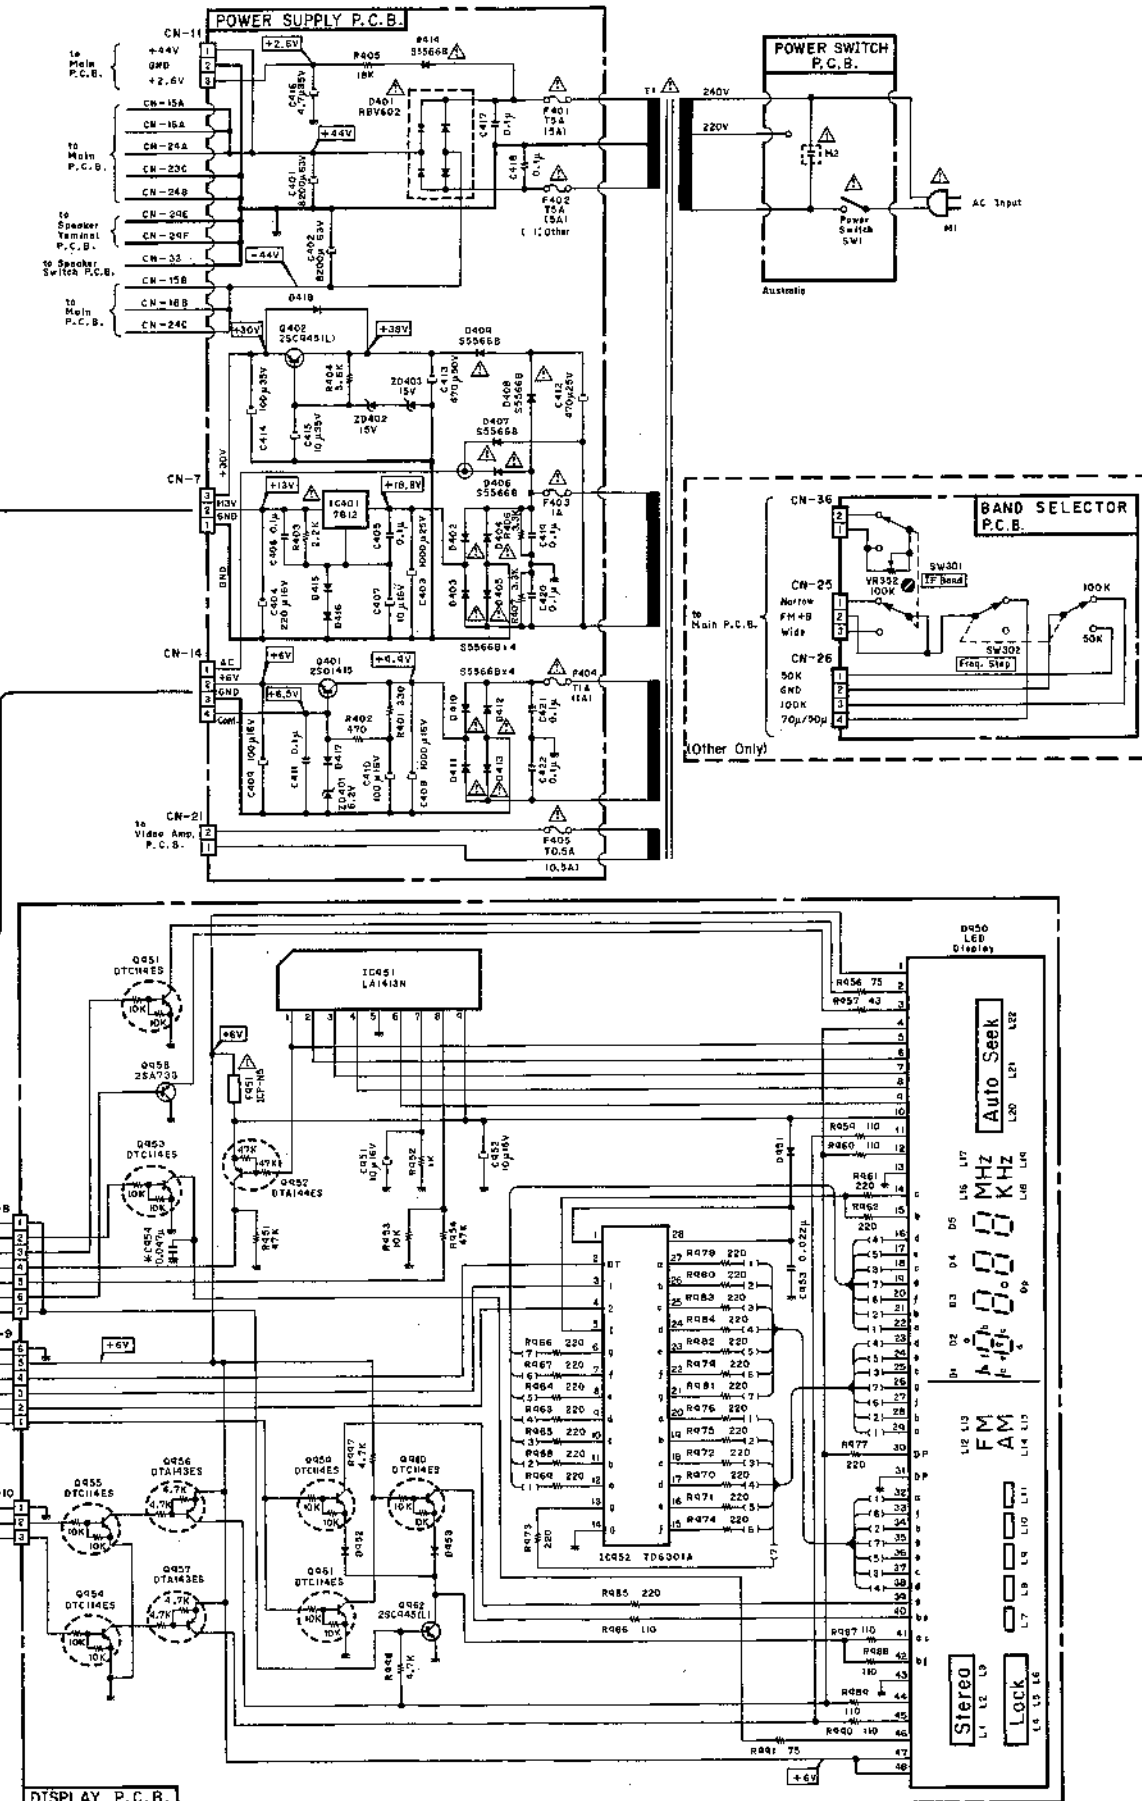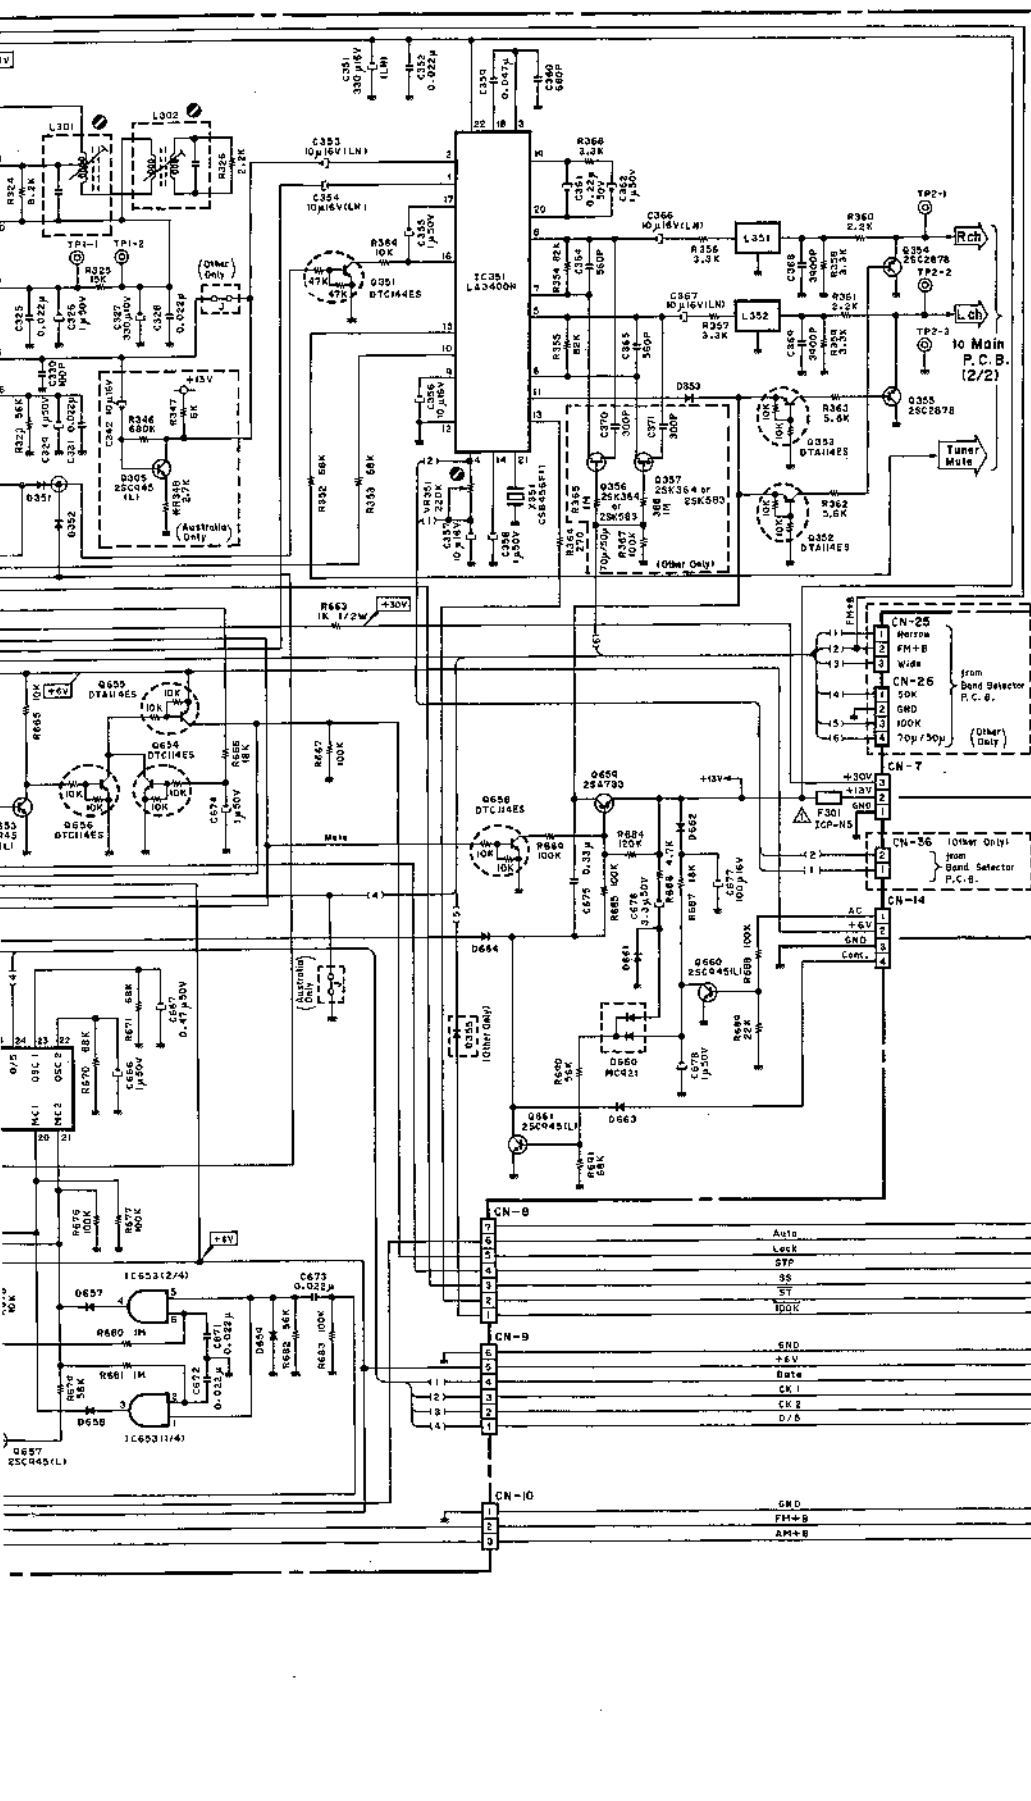

**WARNING:**  
 Parts marked with the symbol  have critical characteristics. Use **ONLY** replacement parts recommended by the manufacturer. It is recommended that the unit be operated from a suitable DC supply or batteries during initial check-out procedures.

**CAUTION:**  
 Before returning the unit to the customer, make sure you make either (1) a leakage current check or (2) a line to chassis resistance check. If the leakage current exceeds 0.5 milliamp, or if the resistance from chassis to either side of the power cord is less than 240 k ohms, the unit is defective. **WARNING - DO NOT** return the unit to the customer until the problem is located and corrected.

**For Lithium Battery:**  
 Use **ONLY** replacement parts recommended by the manufacturer. Replacement must be done only by qualified service personnel because of risk for explosion.

- Notes:
1. Diode is 1SS53, 1S1555, or 1SS176 unless otherwise specified.
  2. Resistor and capacitor marked with \* show typical value.
  3. 2SA733, 2SA608SP, 2SA1048 and 2SA1175 are interchangeable with each other.
  4. 2SC945, 2SC536SP, 2SC2458 and 2SC2785 are interchangeable with each other.

(3) For SR-3E (Europe & Germany)

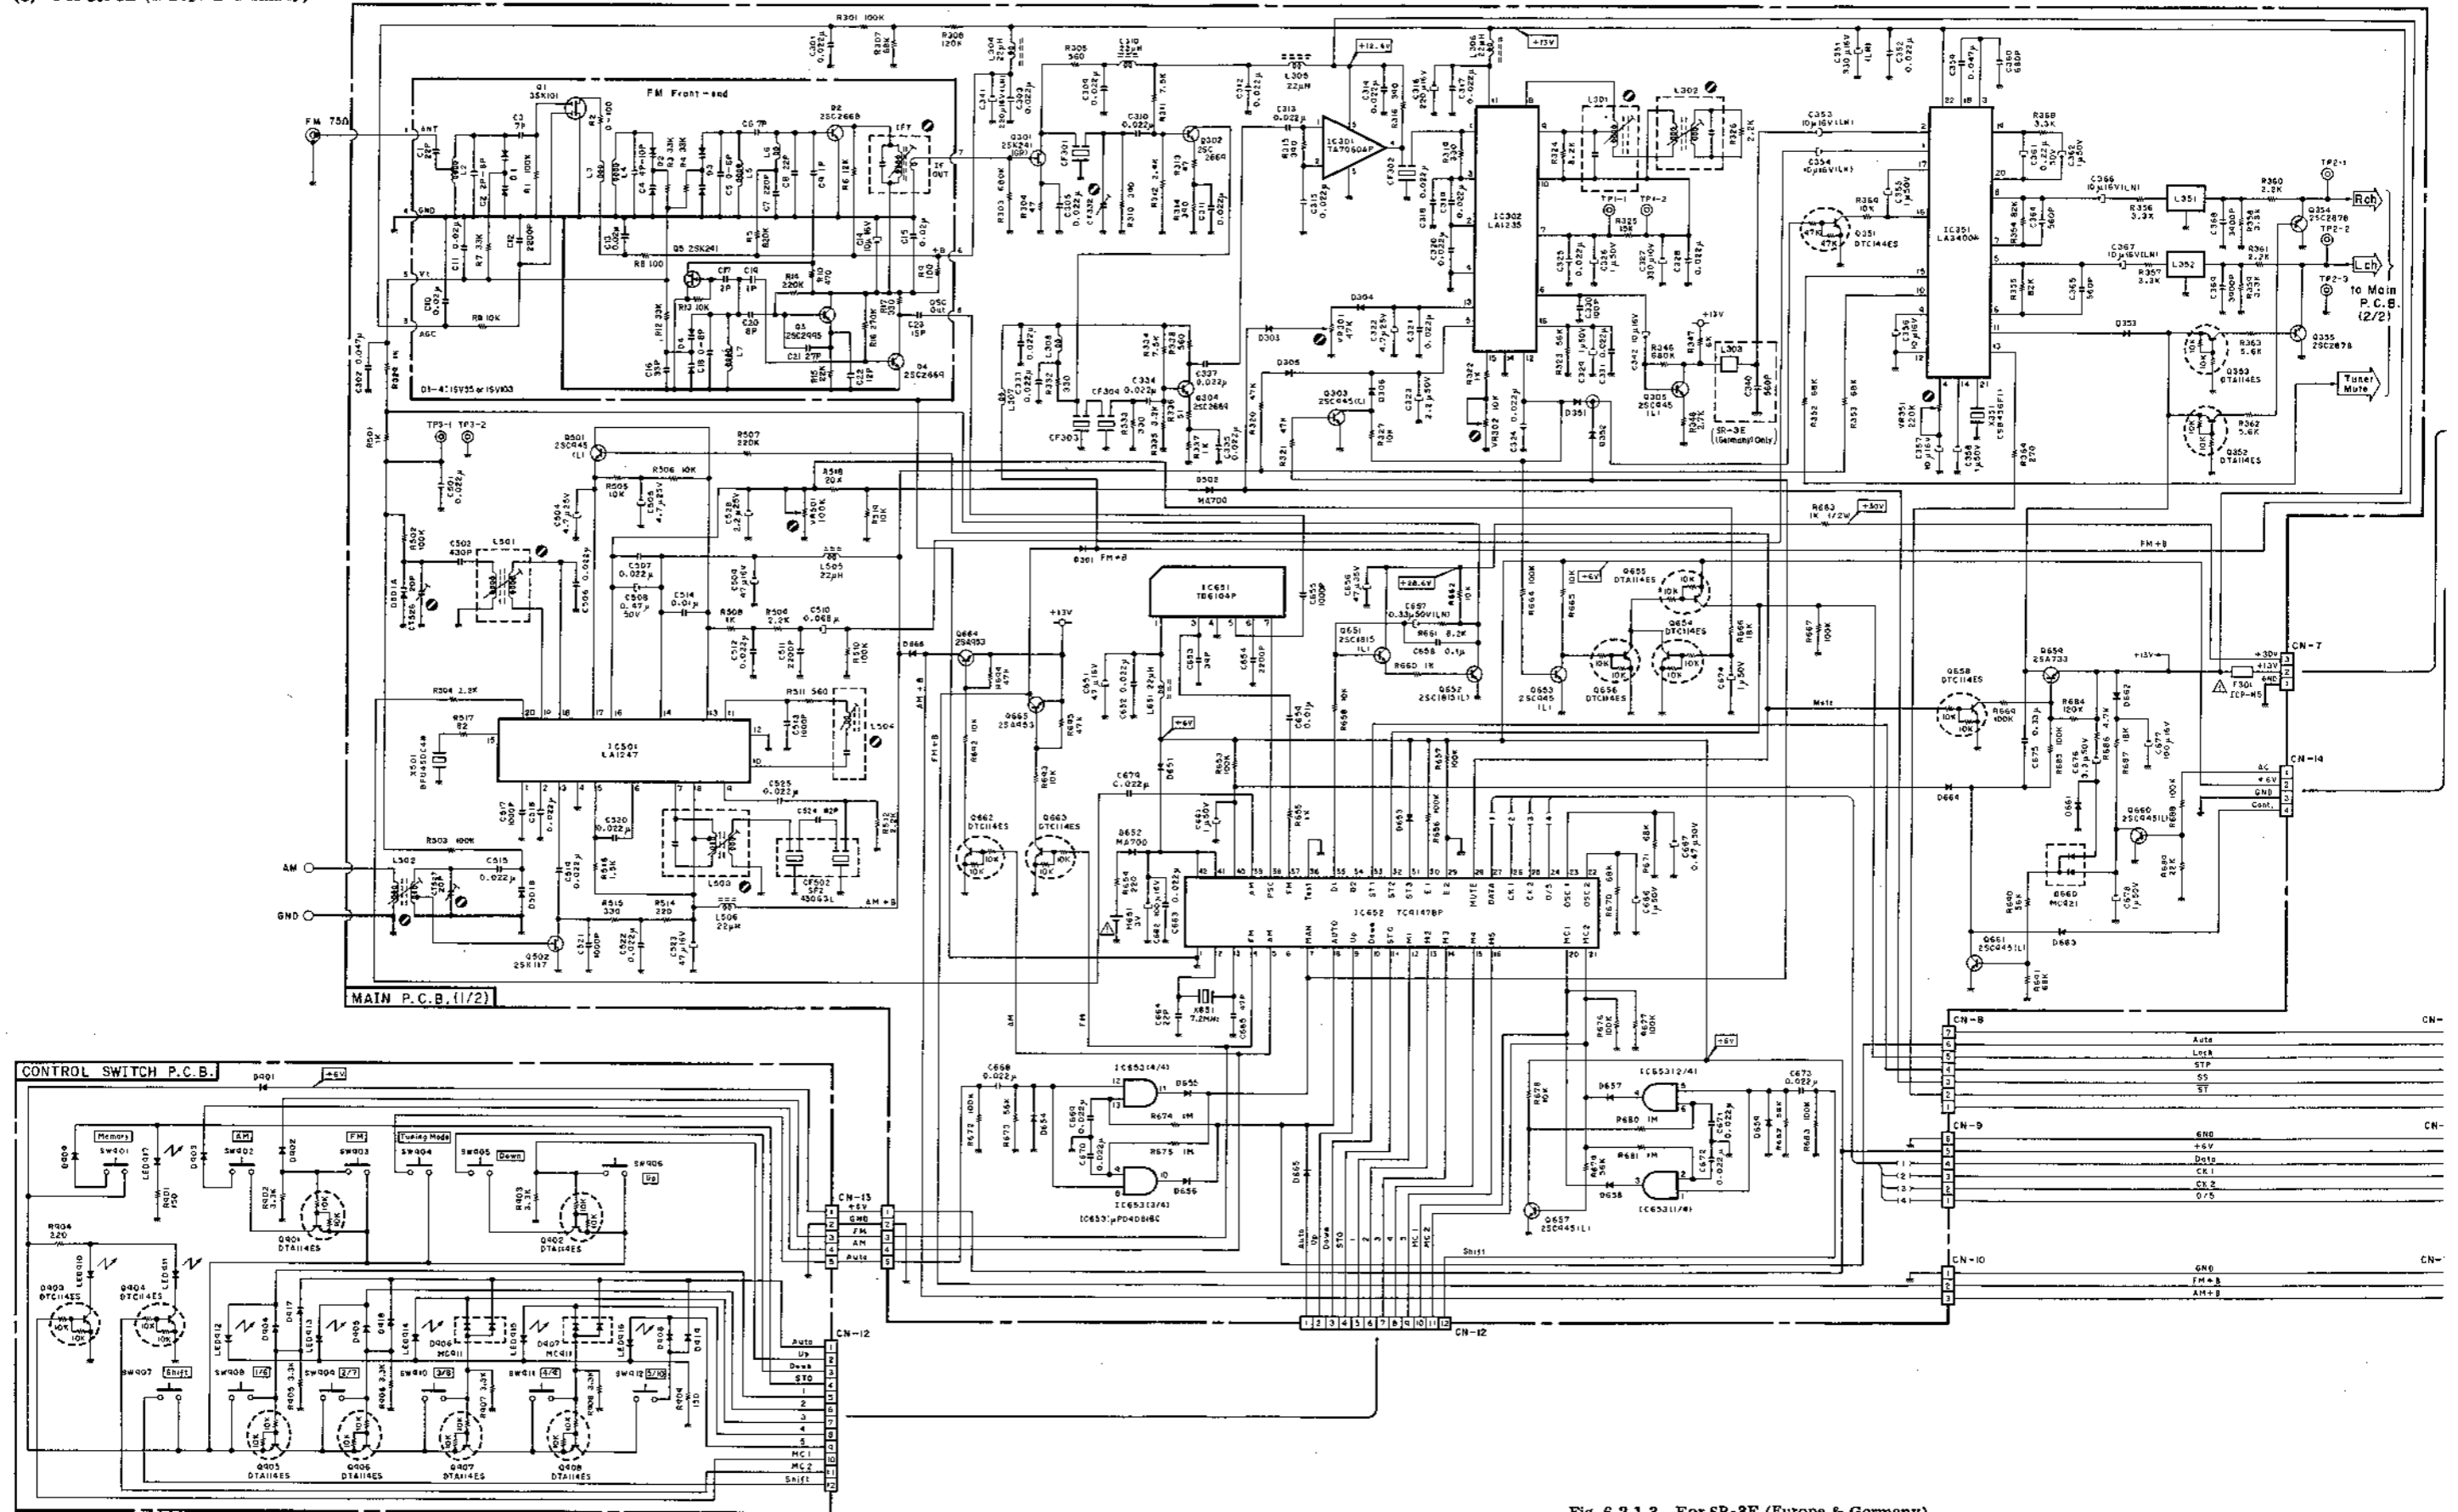


Fig. 6.2.1.3 For SR-3E (Europe & Germany)

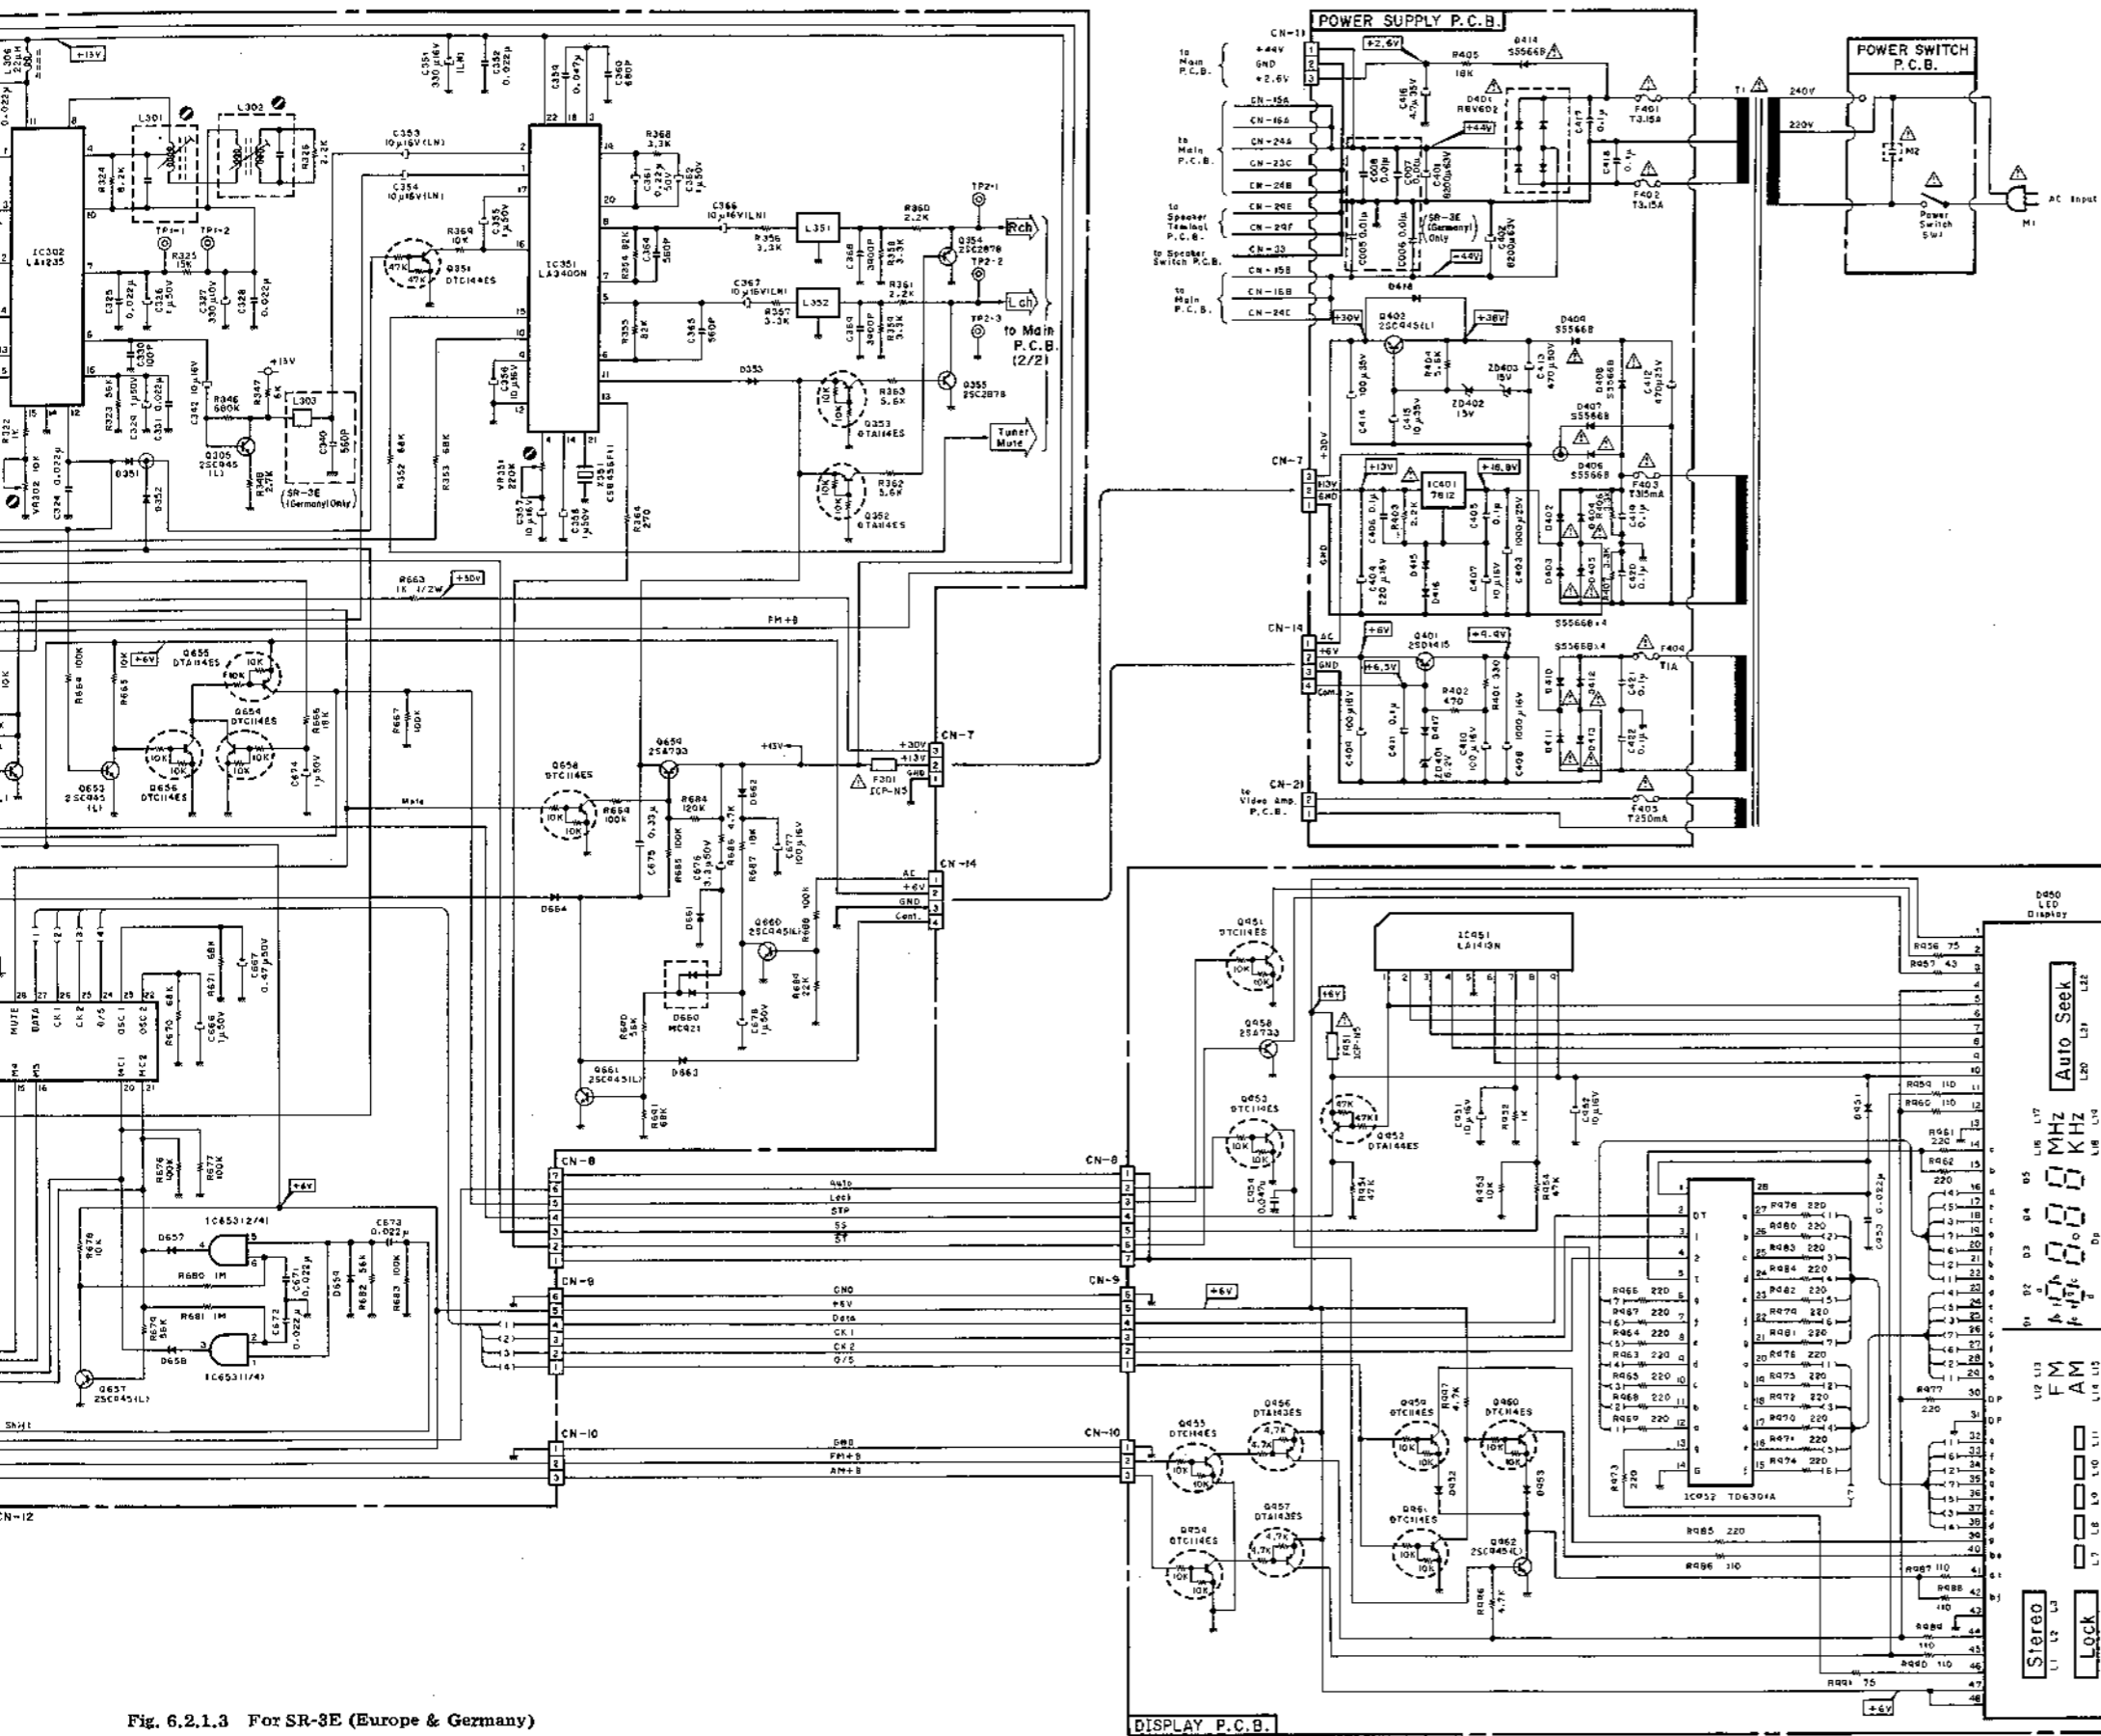



Fig. 6.2.1.3 For SR-3E (Europe & Germany)

**WARNING:**  
 Parts marked with the symbol  have critical characteristics. Use **ONLY** replacement parts recommended by the manufacturer. It is recommended that the unit be operated from a suitable DC supply or batteries during initial check-out procedures.

**CAUTION:**  
 Before returning the unit to the customer, make sure you make either (1) a leakage current check or (2) a line to chassis resistance check. If the leakage current exceeds 0.5 milliamp, or if the resistance from chassis to either side of the power cord is less than 240 k ohms, the unit is defective. **WARNING — DO NOT** return the unit to the customer until the problem is located and corrected.

**For Lithium Battery:**  
 Use **ONLY** replacement parts recommended by the manufacturer. Replacement must be done only by qualified service personnel because of risk for explosion.

- Notes:**
1. Diode is 1SS53, 1S1555, or 1SS176 unless otherwise specified.
  2. 2SA733, 2SA608SP, 2SA1048 and 2SA1175 are interchangeable with each other.
  3. 2SC945, 2SC536SP, 2SC2458 and 2SC2785 are interchangeable with each other.



6.2.2. Amplifier Section  
 (1) For SR-3 & SR-3A



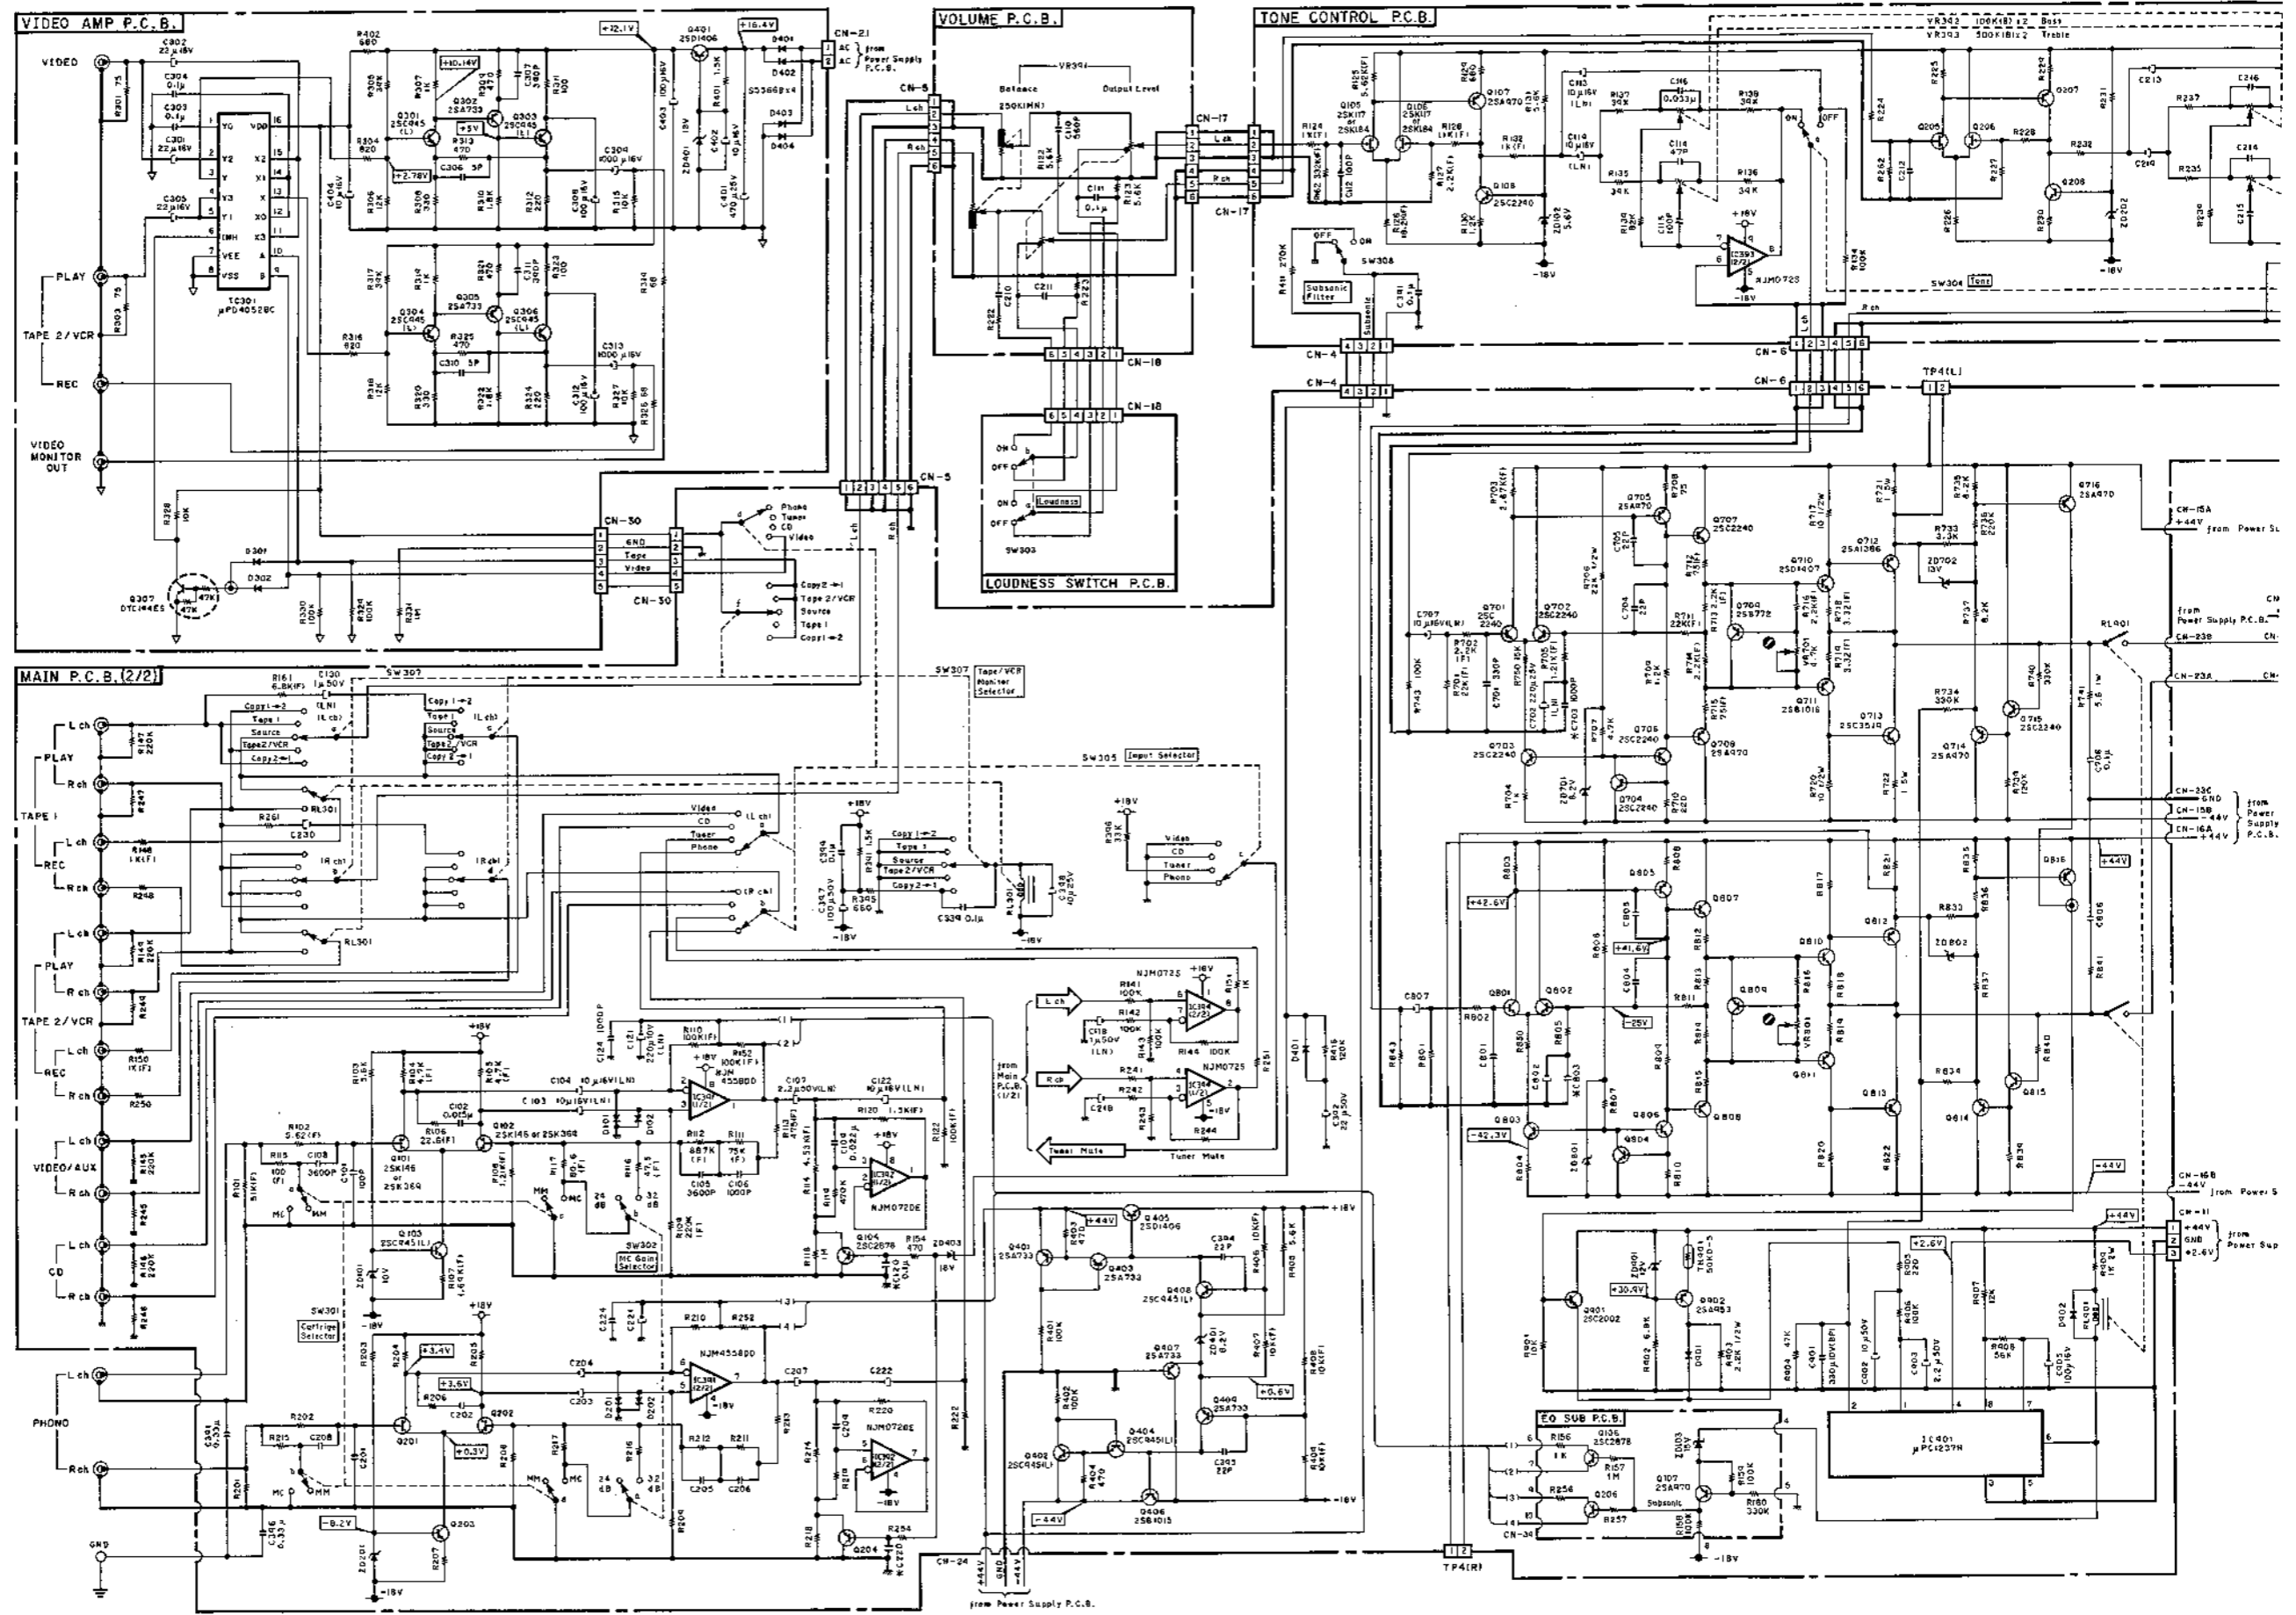


Fig. 6.2.2.1 For SR-3 & SR-3A

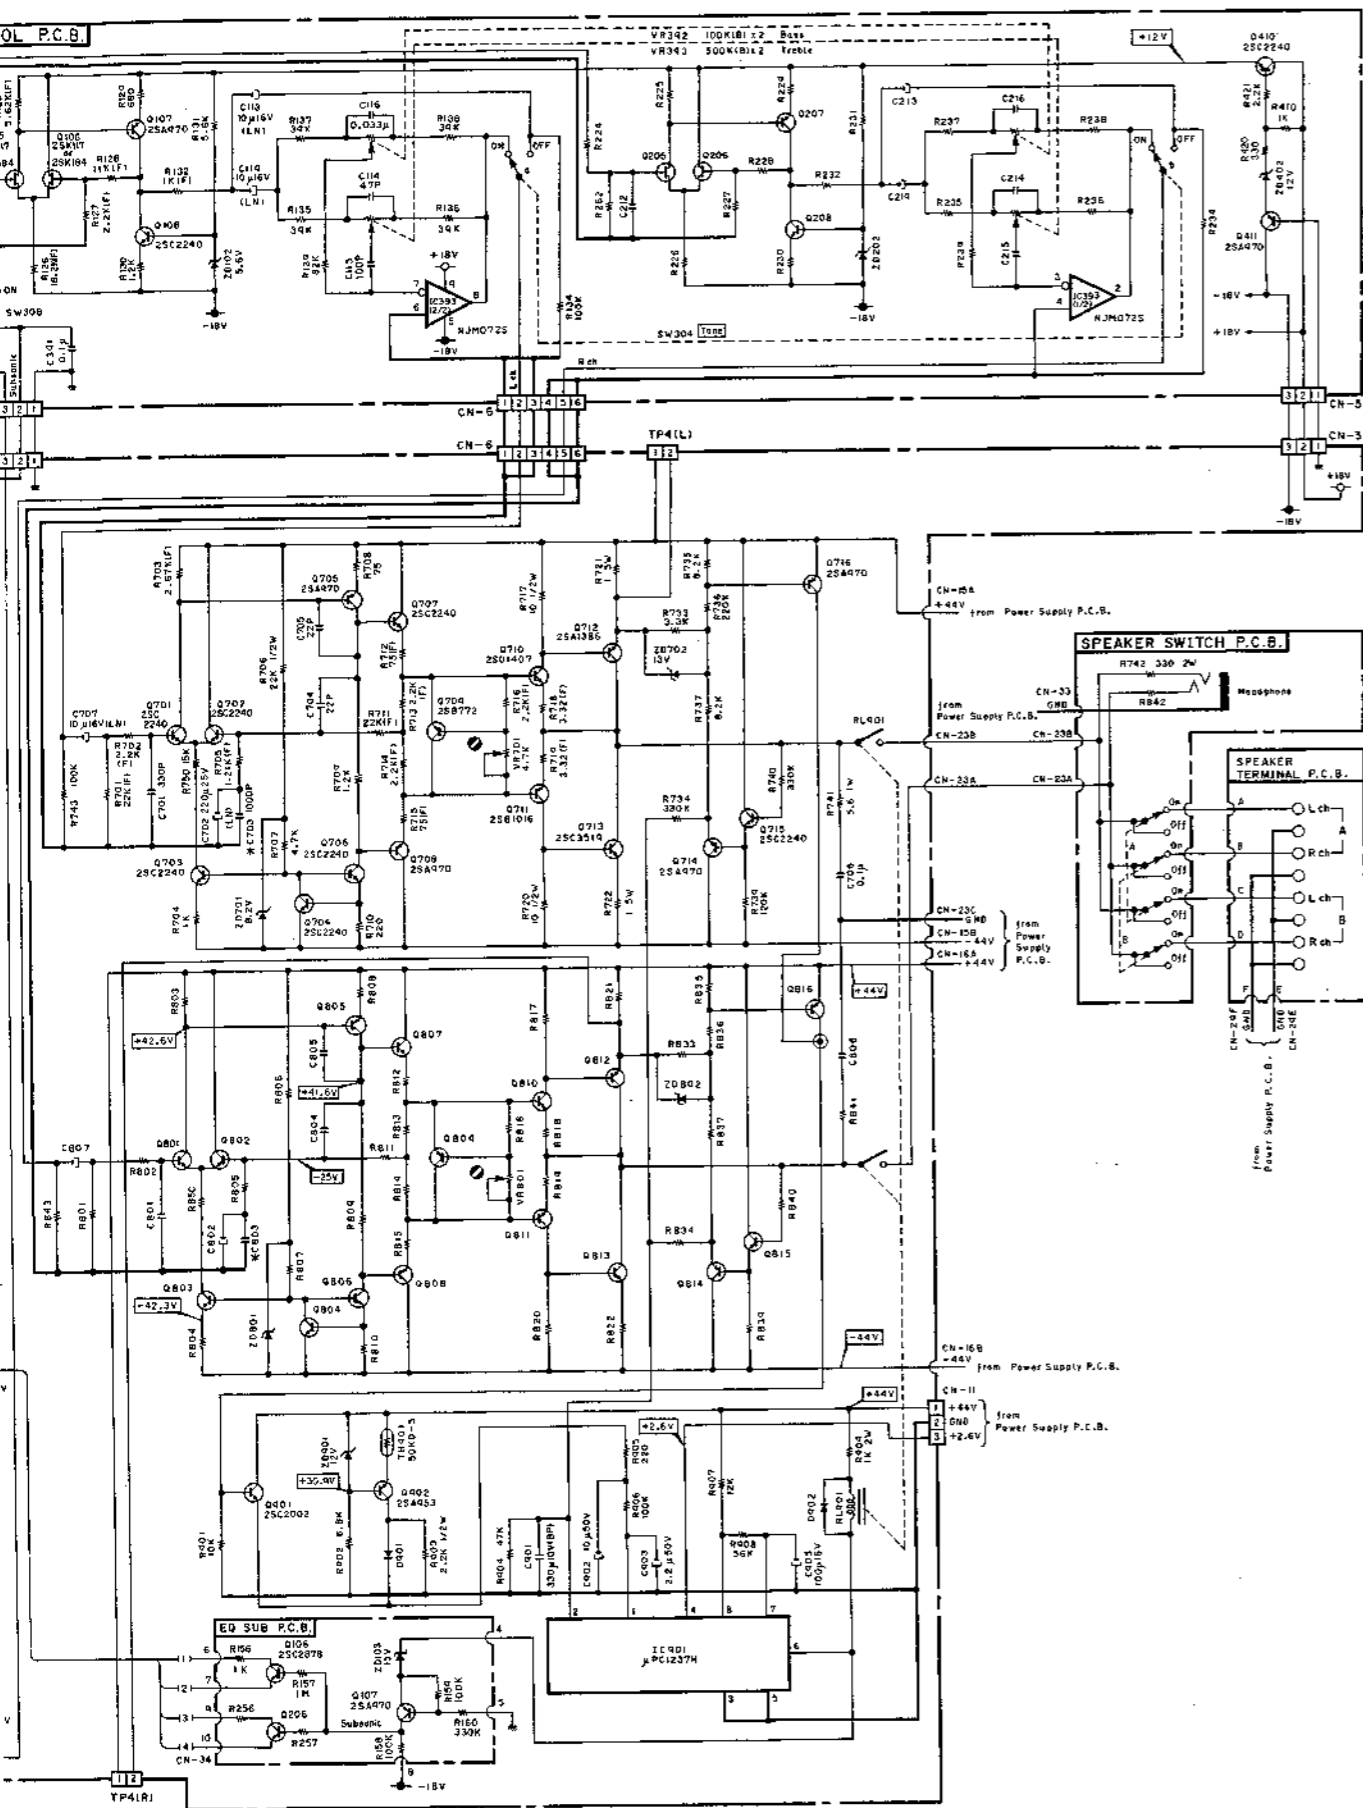


- Notes:
1. Diode is 1SS53, 1S1555, or 1SS176 unless otherwise specified.
  2. Resistor and capacitor marked with \* show typical value.
  3. 2SA733, 2SA608SP, 2SA1048 and 2SA1175 are interchangeable with each other.
  4. 2SC945, 2SC536SP, 2SC2458 and 2SC2785 are interchangeable with each other.

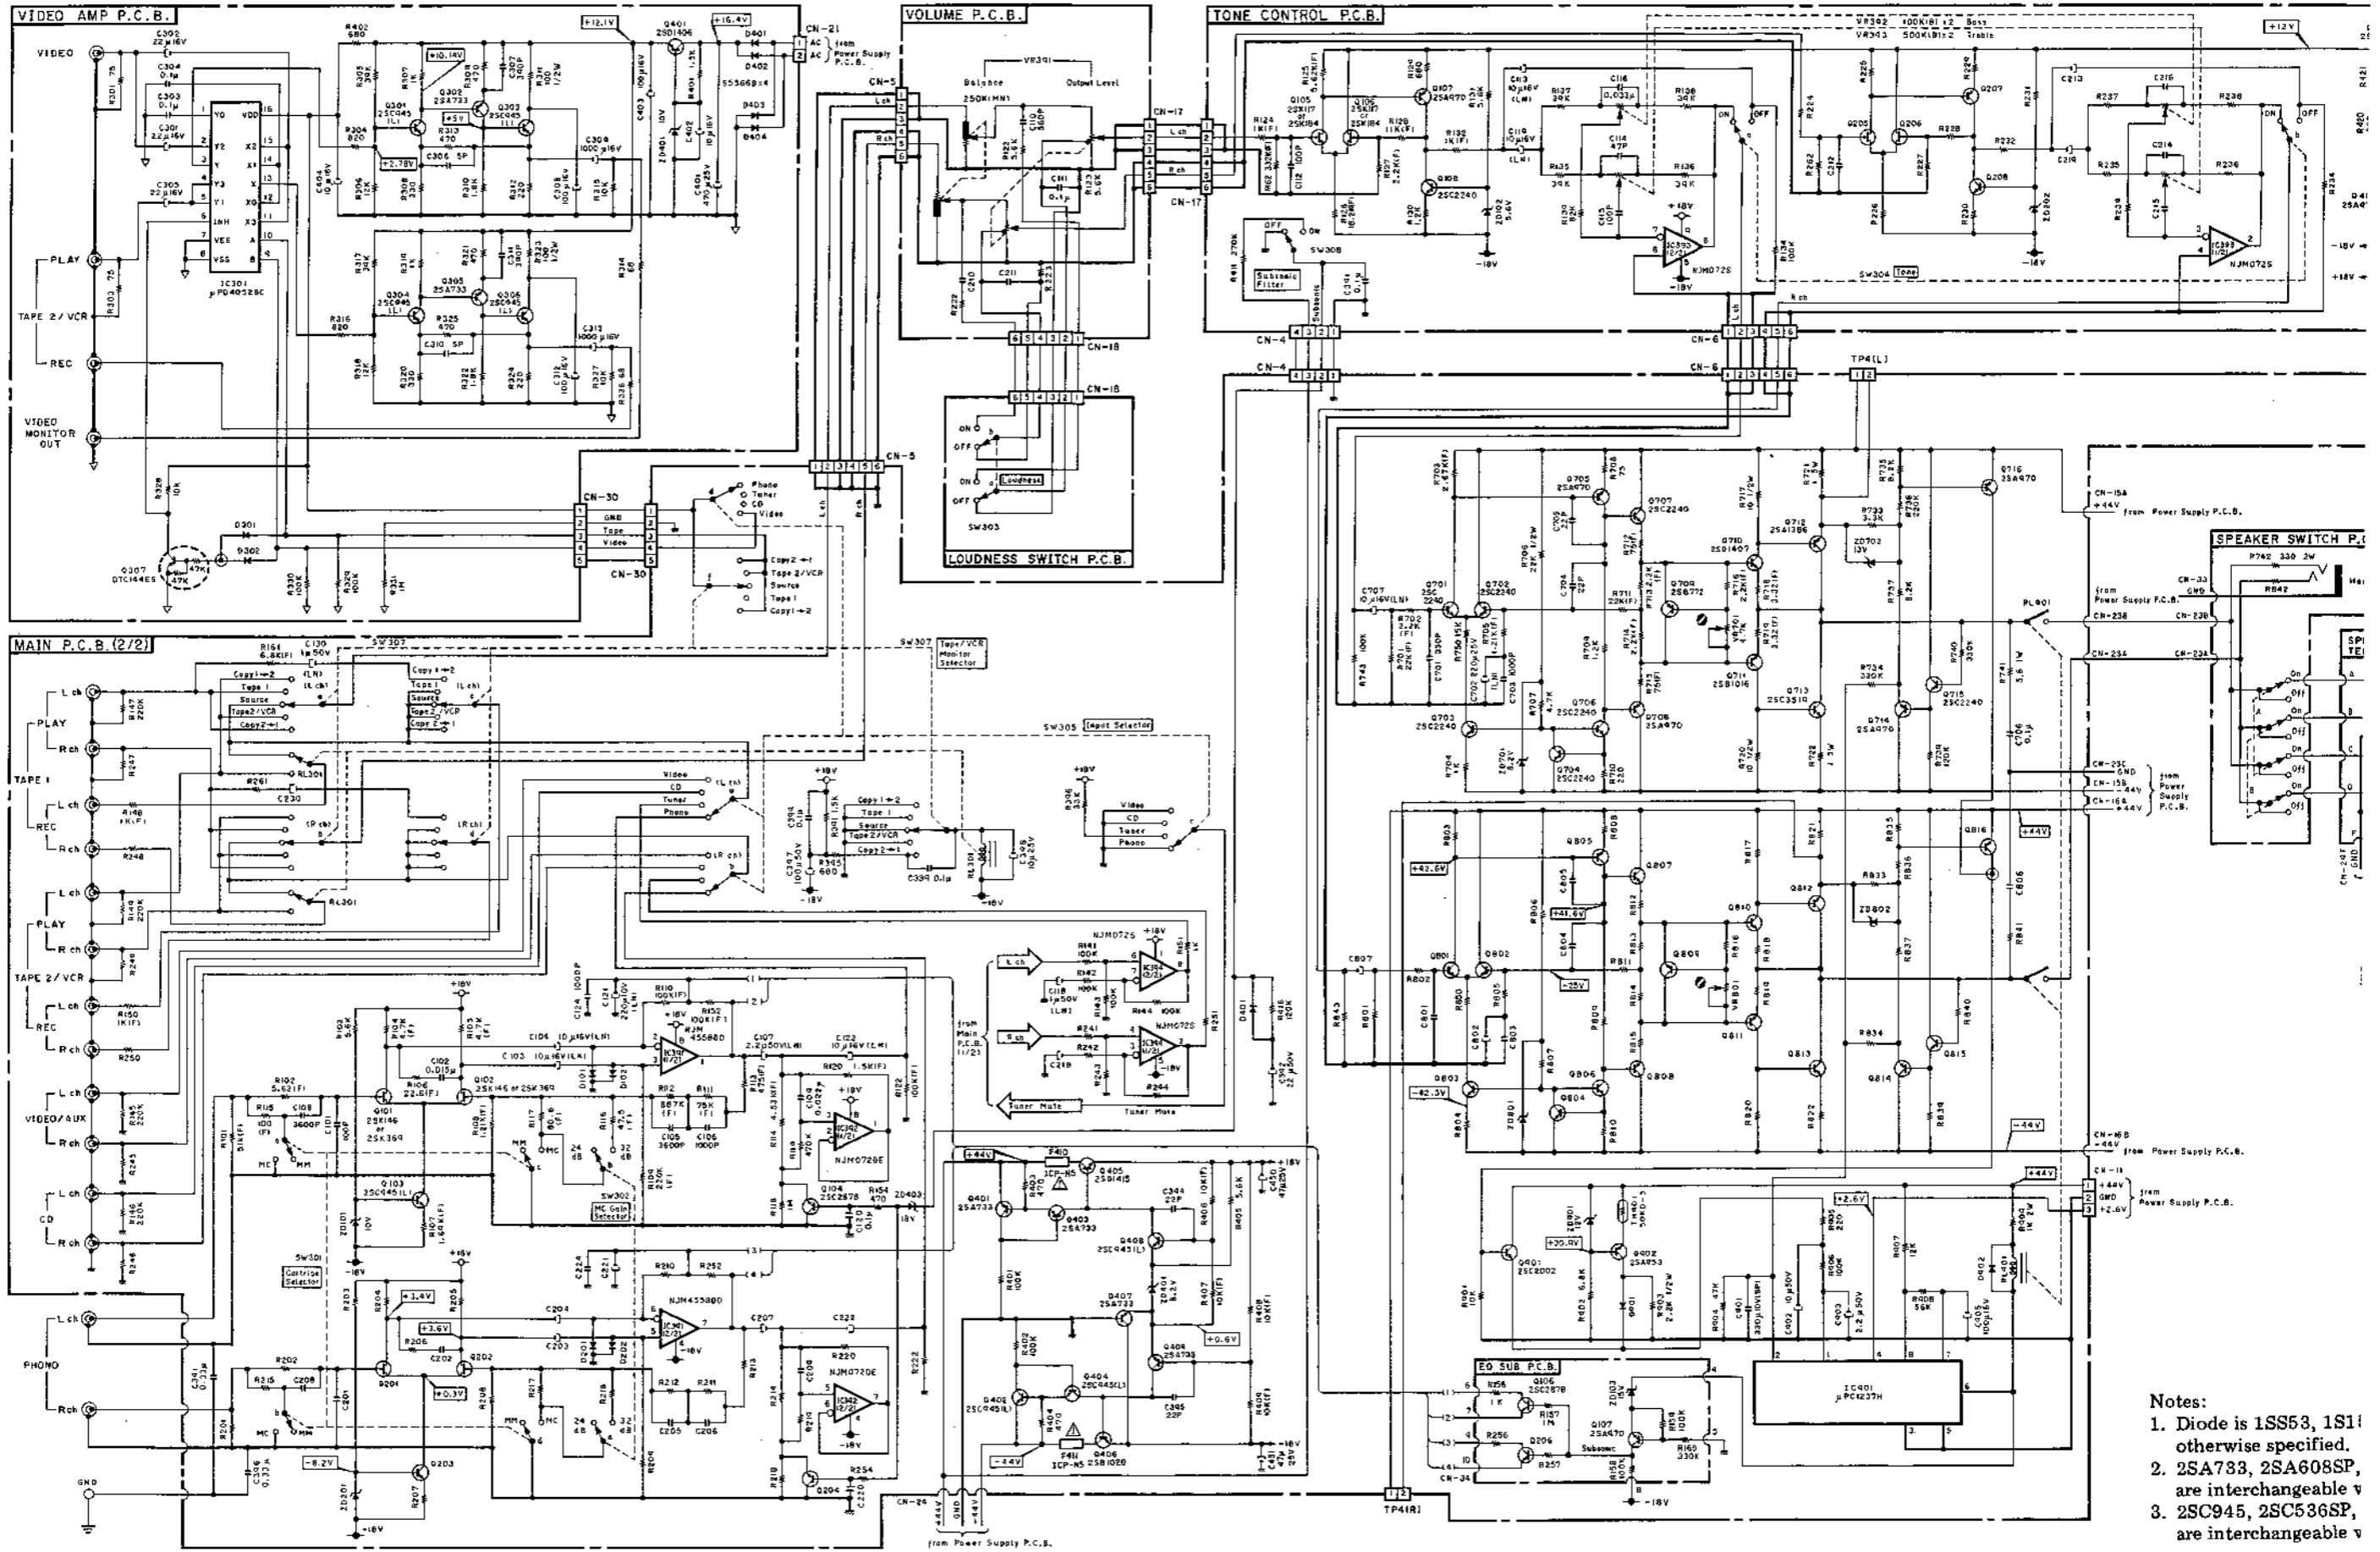


- Notes:
1. Diode is 1SS53, 1S11 otherwise specified.
  2. 2SA733, 2SA608SP, are interchangeable v
  3. 2SC945, 2SC5368P, are interchangeable v

Fig. 6.2.2.2 For SR-3E (Europe)

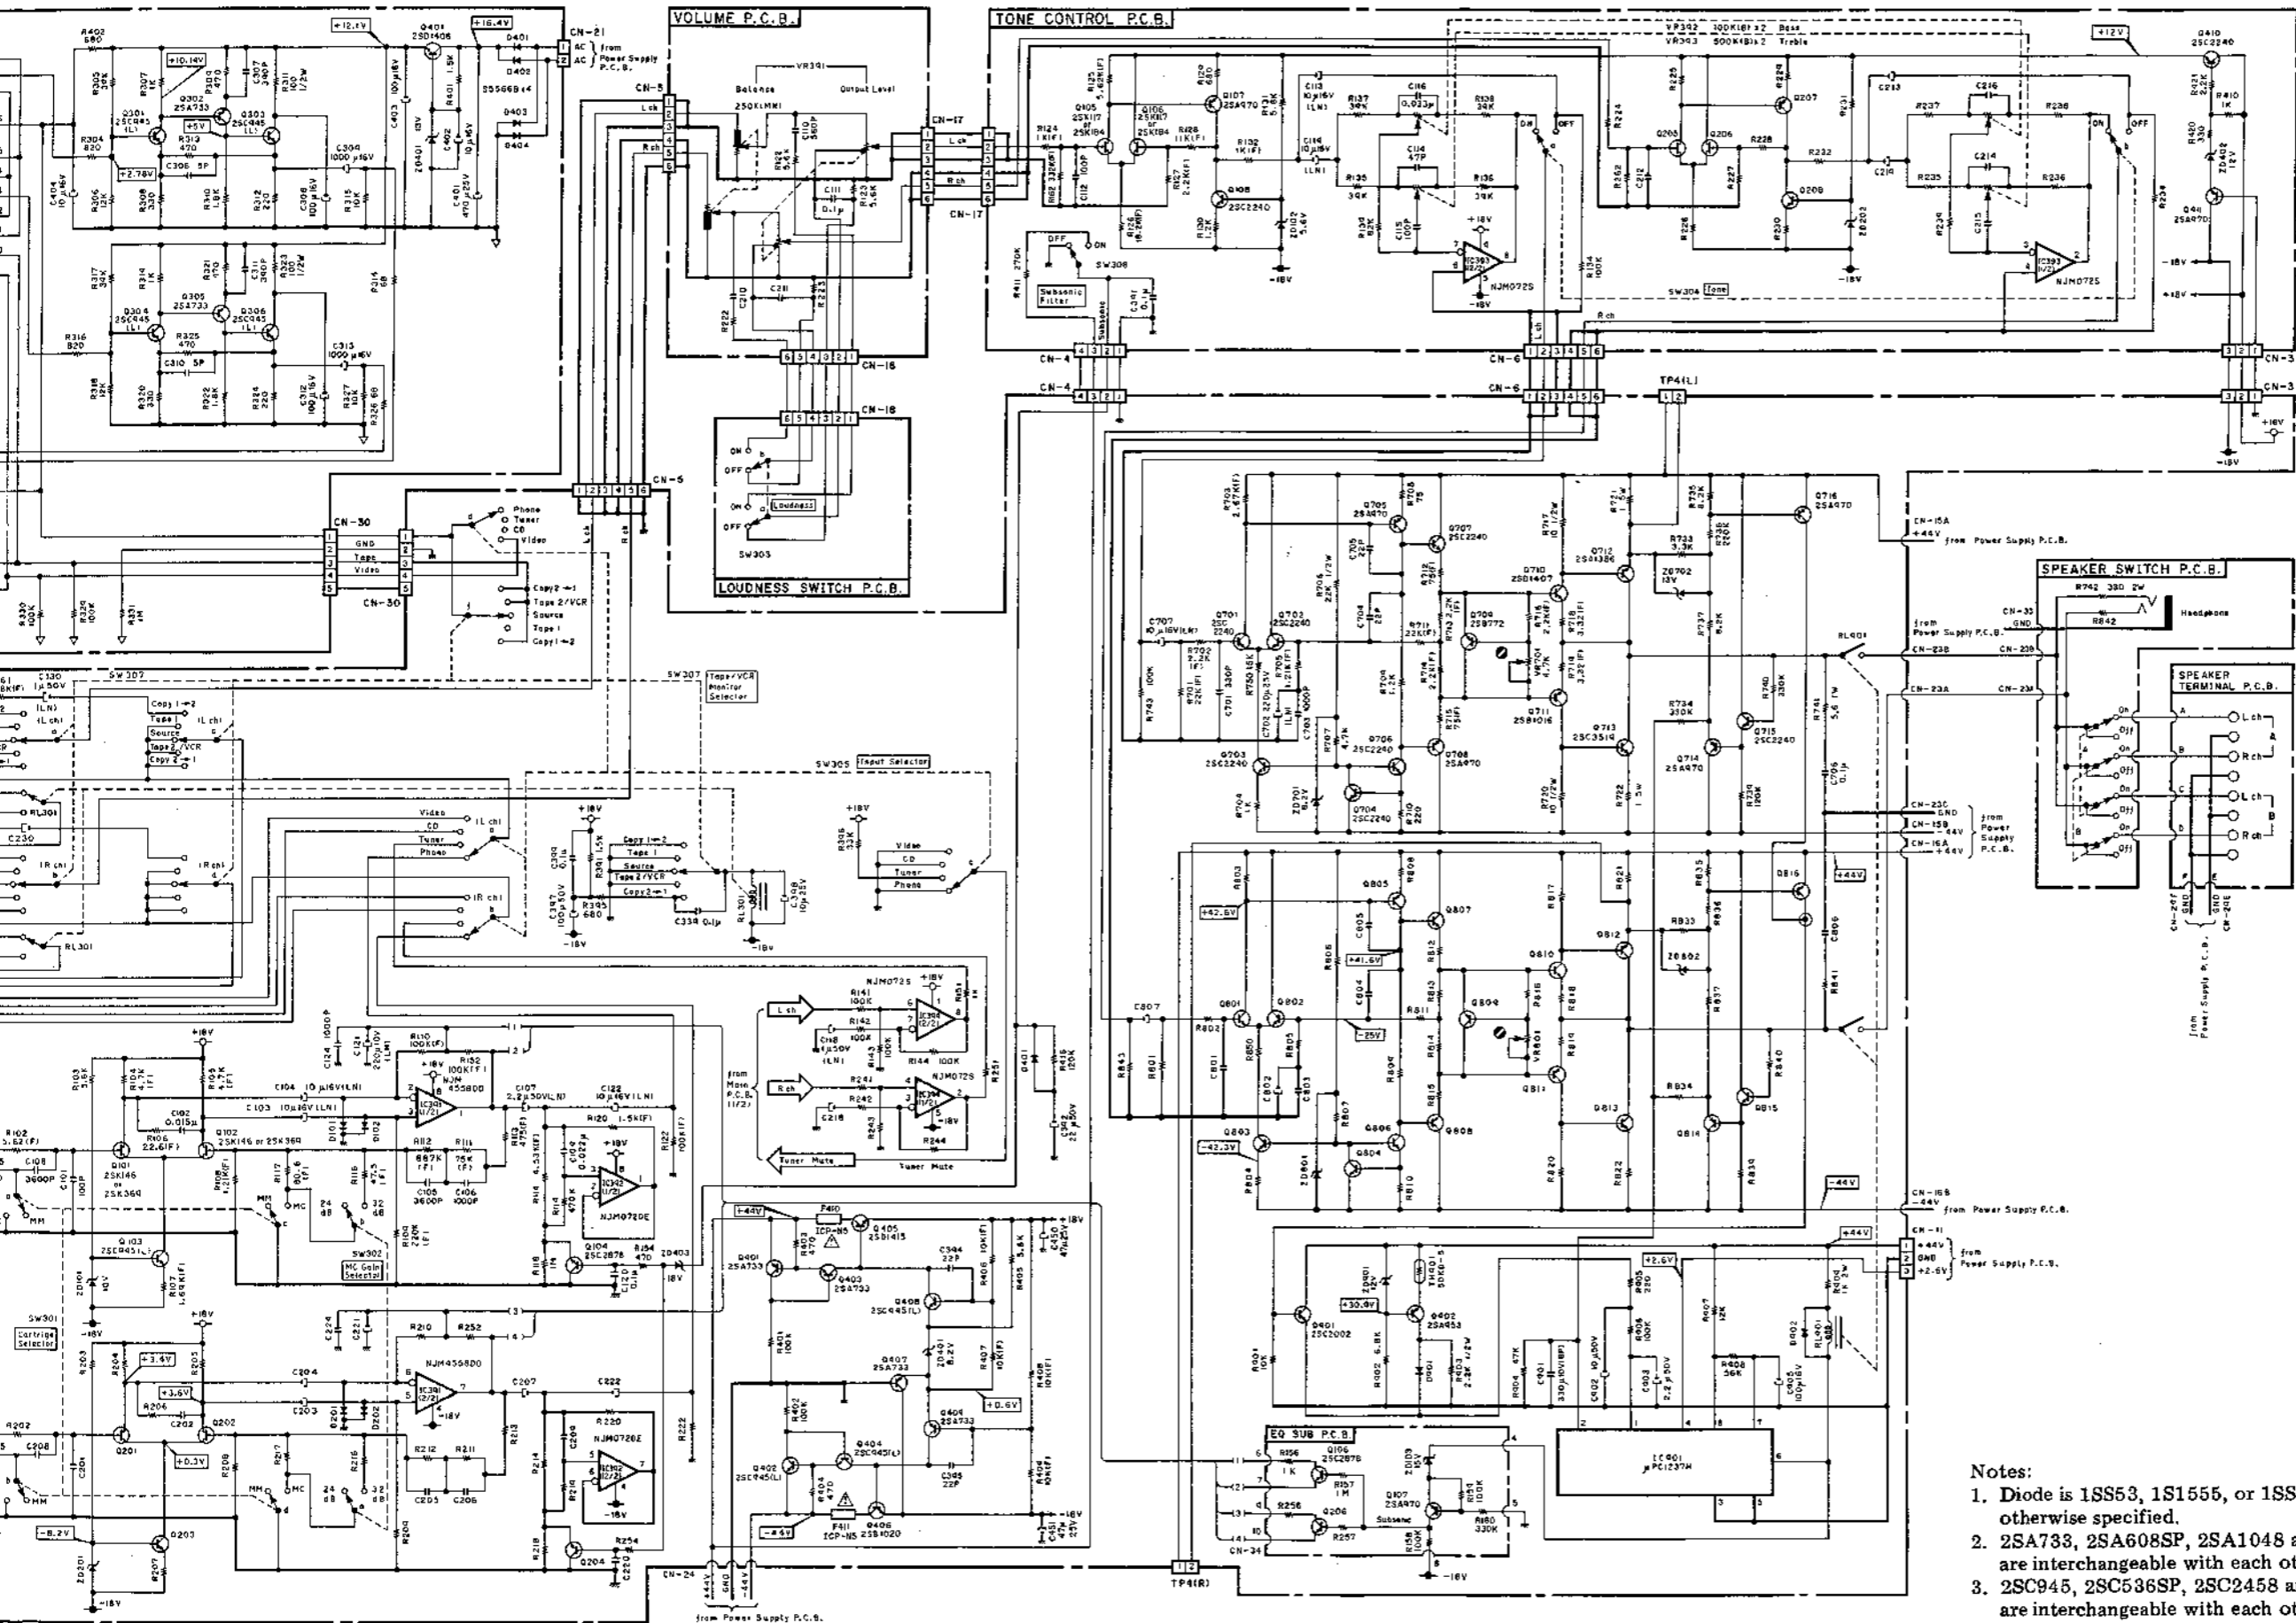


- Notes:
1. Diode is 1SS53, 1S1555, or 1SS176 unless otherwise specified.
  2. 2SA733, 2SA608SP, 2SA1048 and 2SA1175 are interchangeable with each other.
  3. 2SC945, 2SC536SP, 2SC2458 and 2SC2785 are interchangeable with each other.

Fig. 6.2.2.2 For SR-3E (Europe)

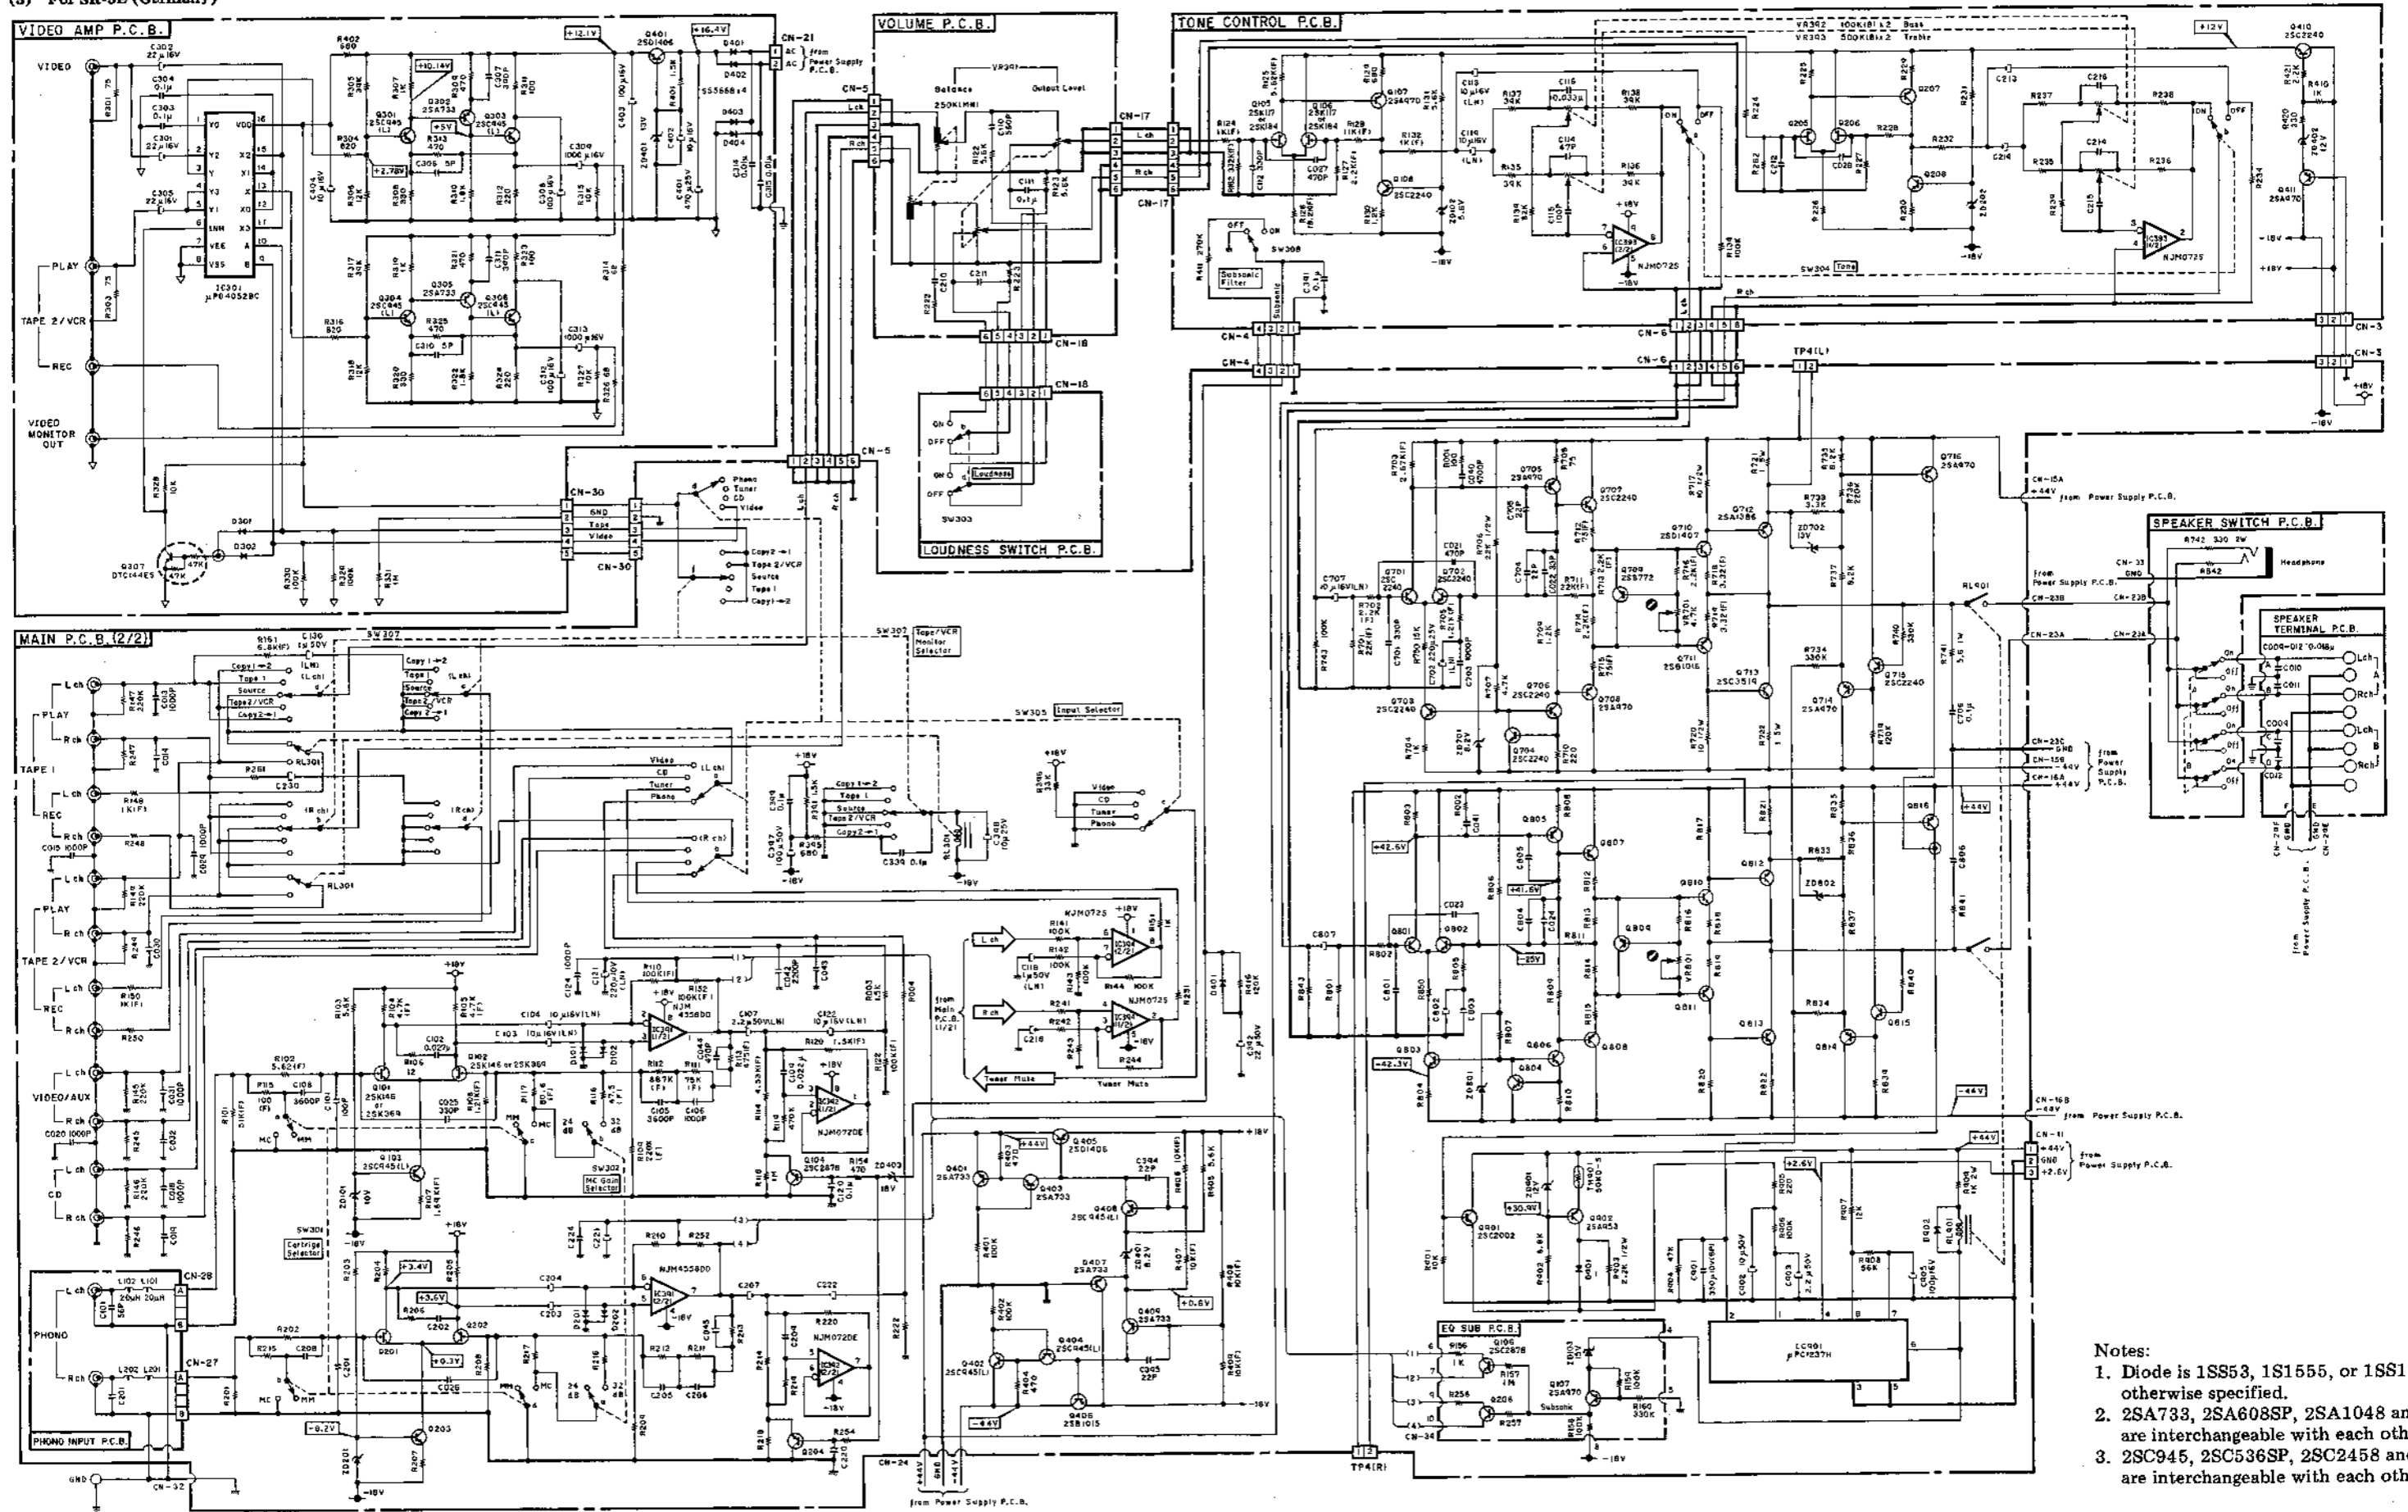

- Notes:
1. Diode is 1S853, 1S1555, or 1S817 otherwise specified.
  2. 2SA733, 2SA608SP, 2SA1048 are interchangeable with each other.
  3. 2SC945, 2SC536SP, 2SC2458 and are interchangeable with each other.

Fig. 6.2.2.3 For SR-3E (Germany)



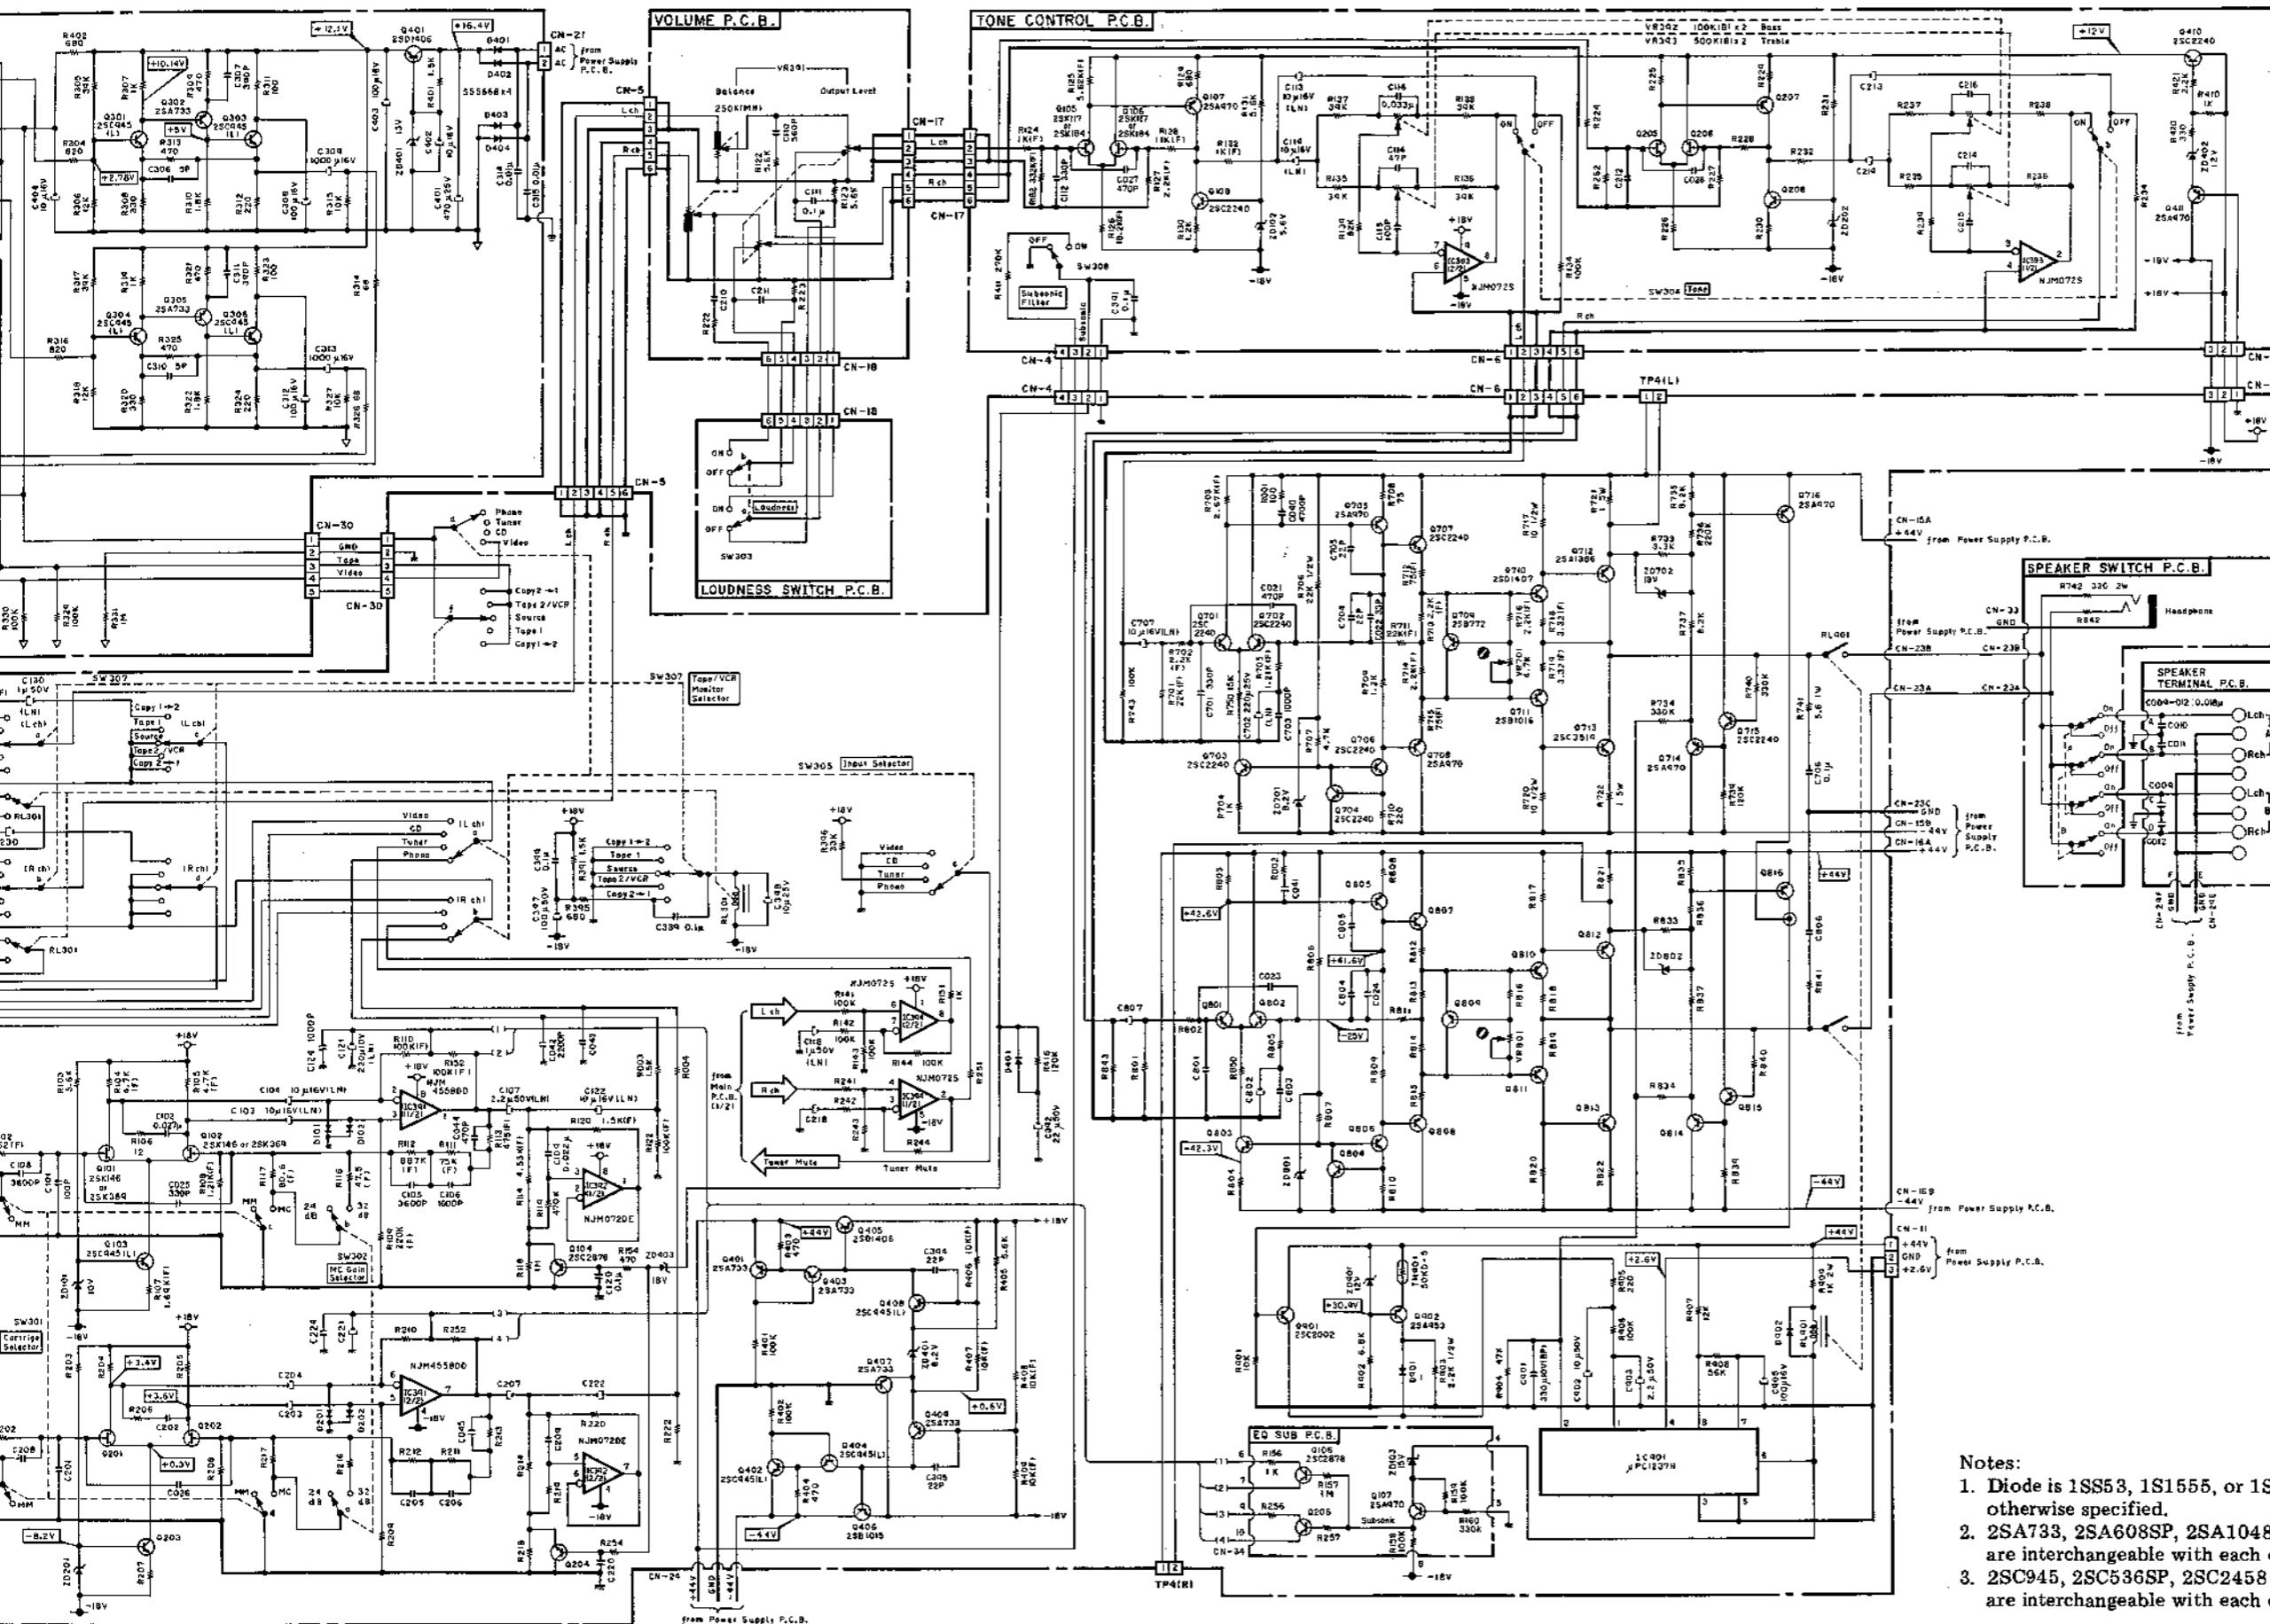


- Notes:
1. Diode is 1SS53, 1S1555, or 1SS176 unless otherwise specified.
  2. 2SA733, 2SA608SP, 2SA1048 and 2SA1175 are interchangeable with each other.
  3. 2SC945, 2SC536SP, 2SC2458 and 2SC2785 are interchangeable with each other.

Fig. 6.2.2.3 Fox SR-3E (Germany)

7. WIRING DIAGRAMS

(1) For SR-3, SR-3A & SR-3E (Europe)

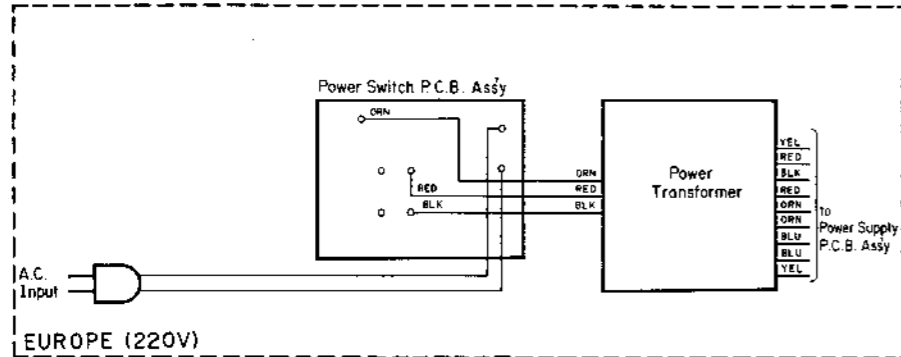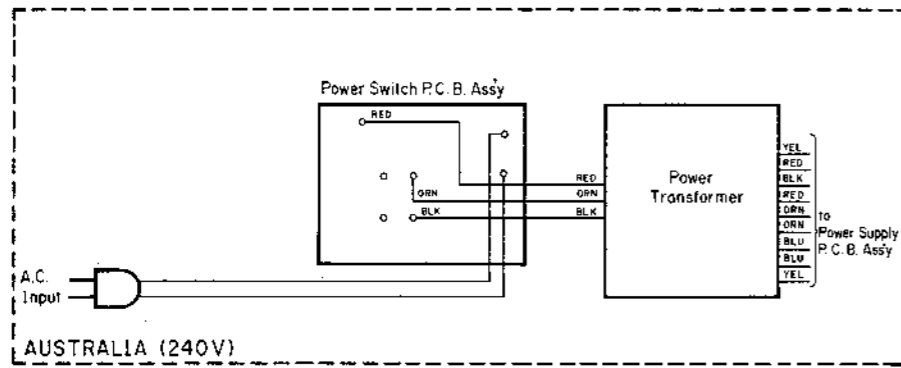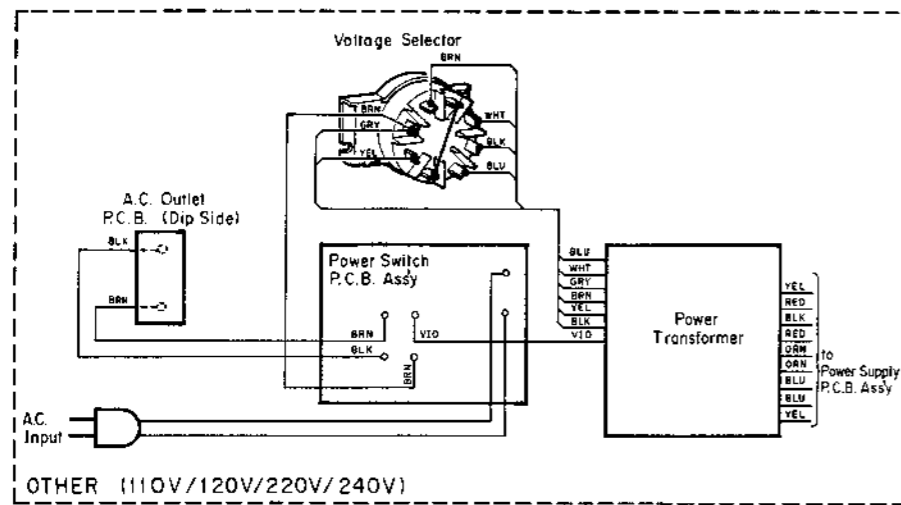

Notes: 1. Table of wire colors

BRN — Brown	BLU — Blue
RED — Red	VIO — Violet
ORN — Orange	GRY — Gray
YEL — Yellow	WHT — White
GRN — Green	BLK — Black

2. Component side view of the P.C.B. is illustrated unless otherwise specified.
3. CN-36 on the Main P.C.B. Assy and the Band Selector P.C.B. Assy are not mounted for the former Models.

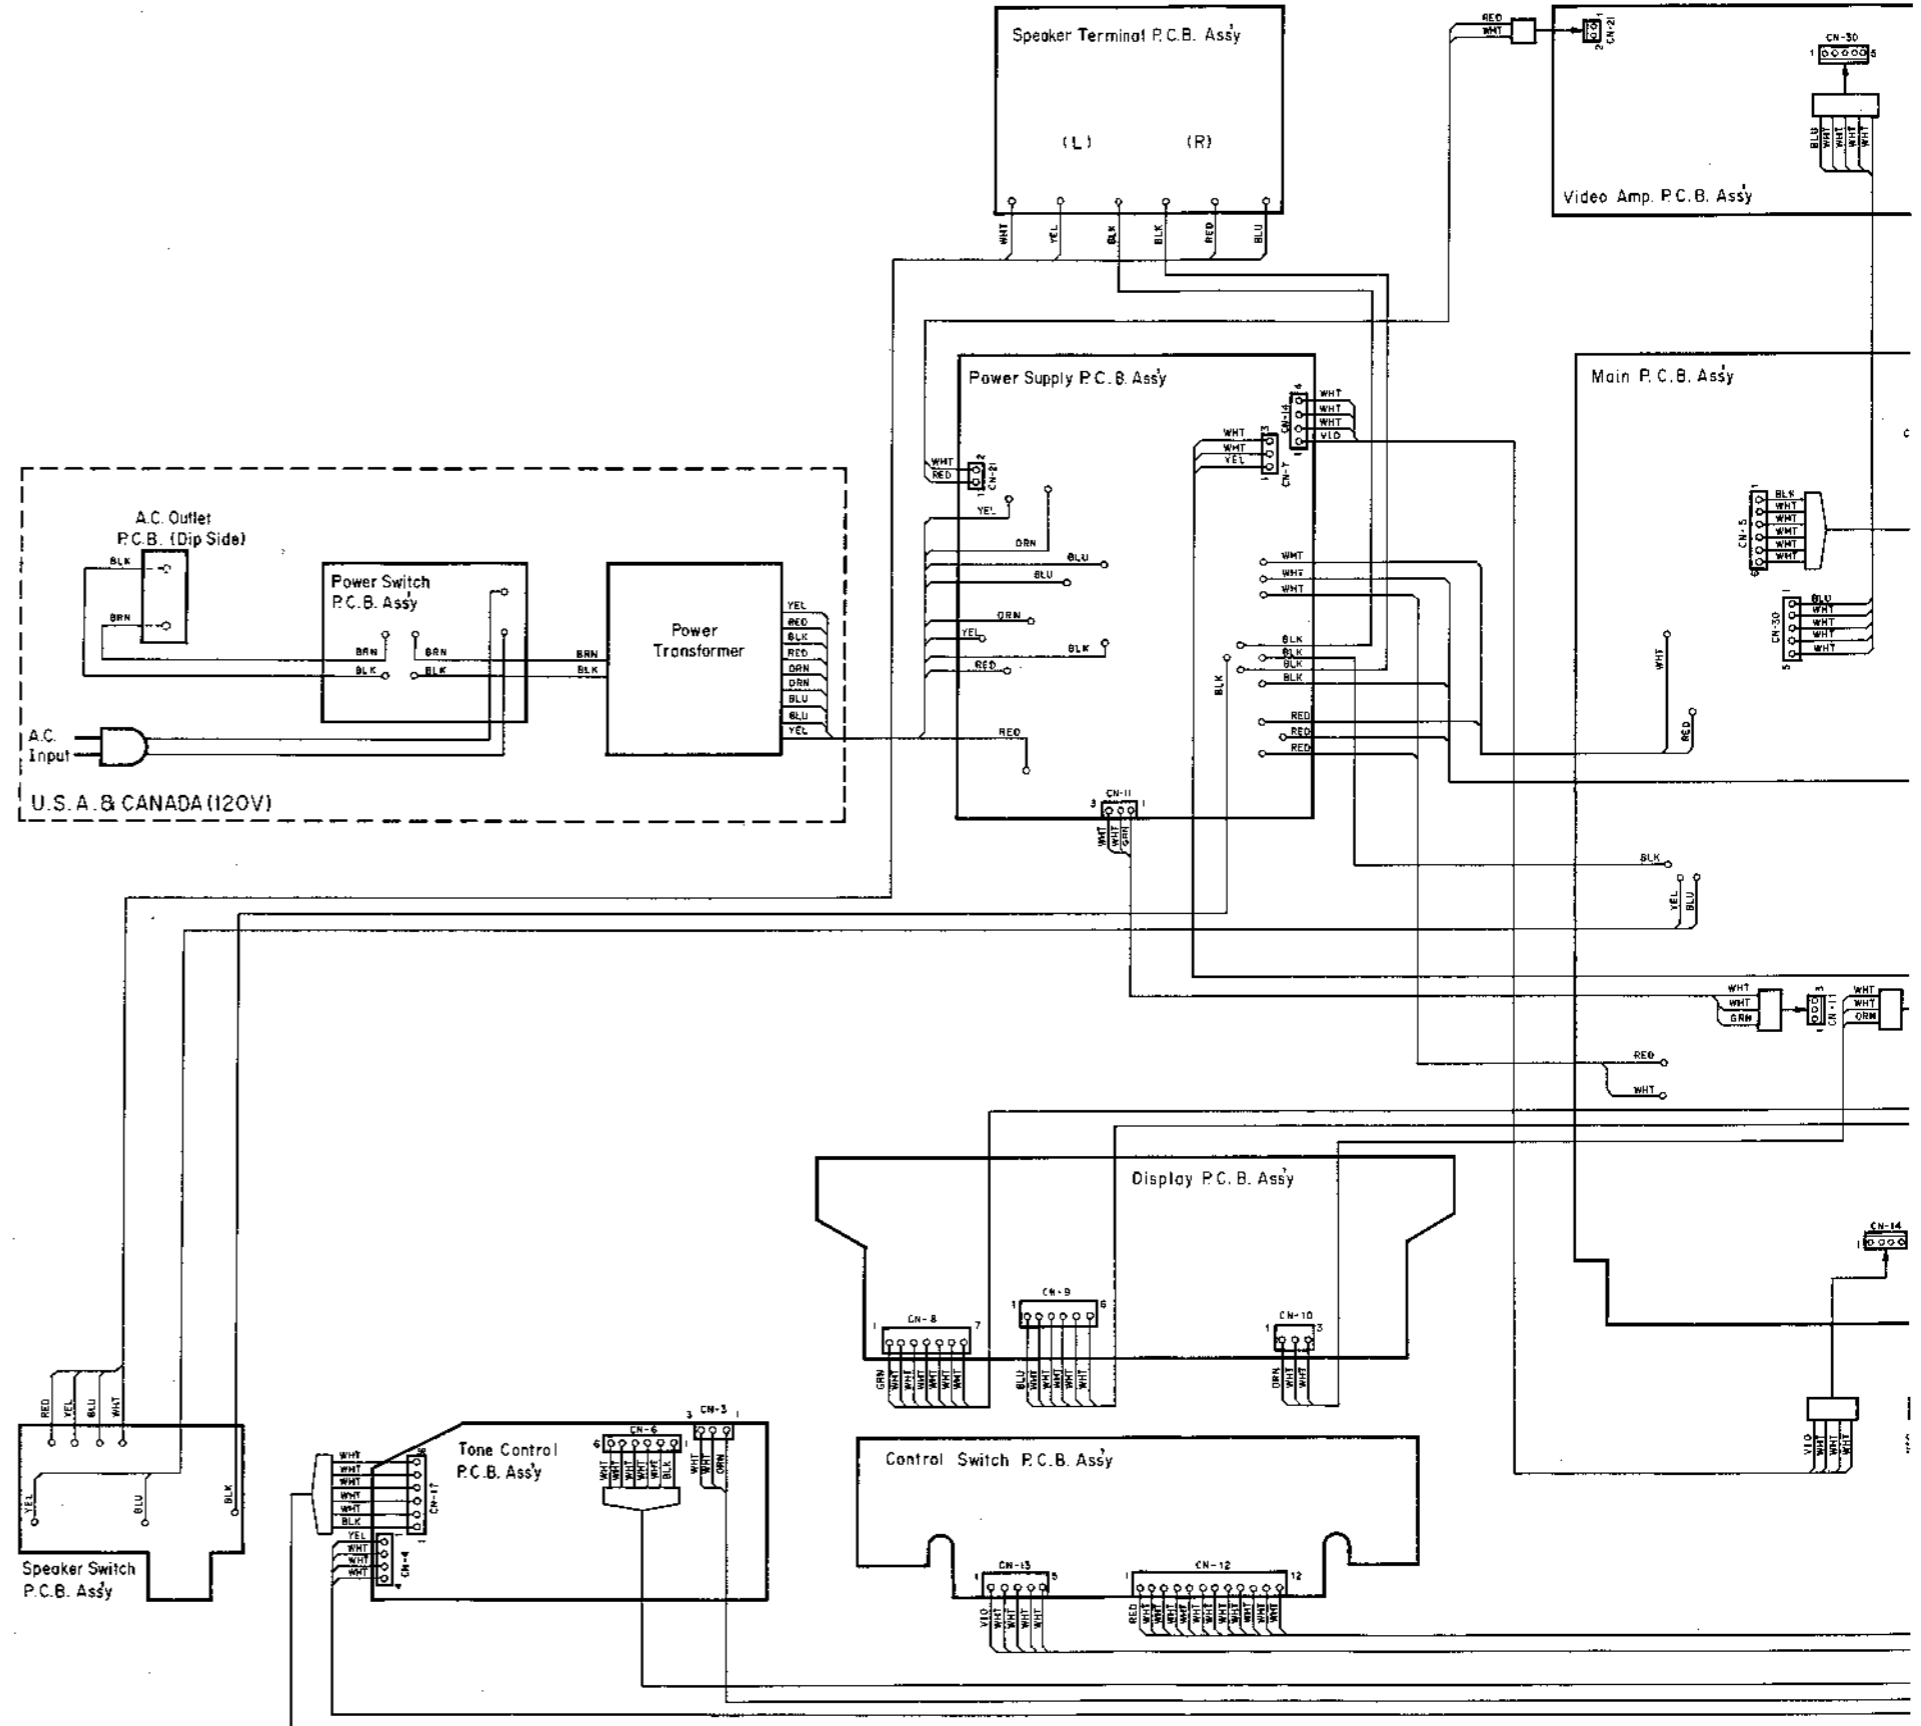


Fig. 7.1 For SR-3, SR-3A & SR-3E (Europe)

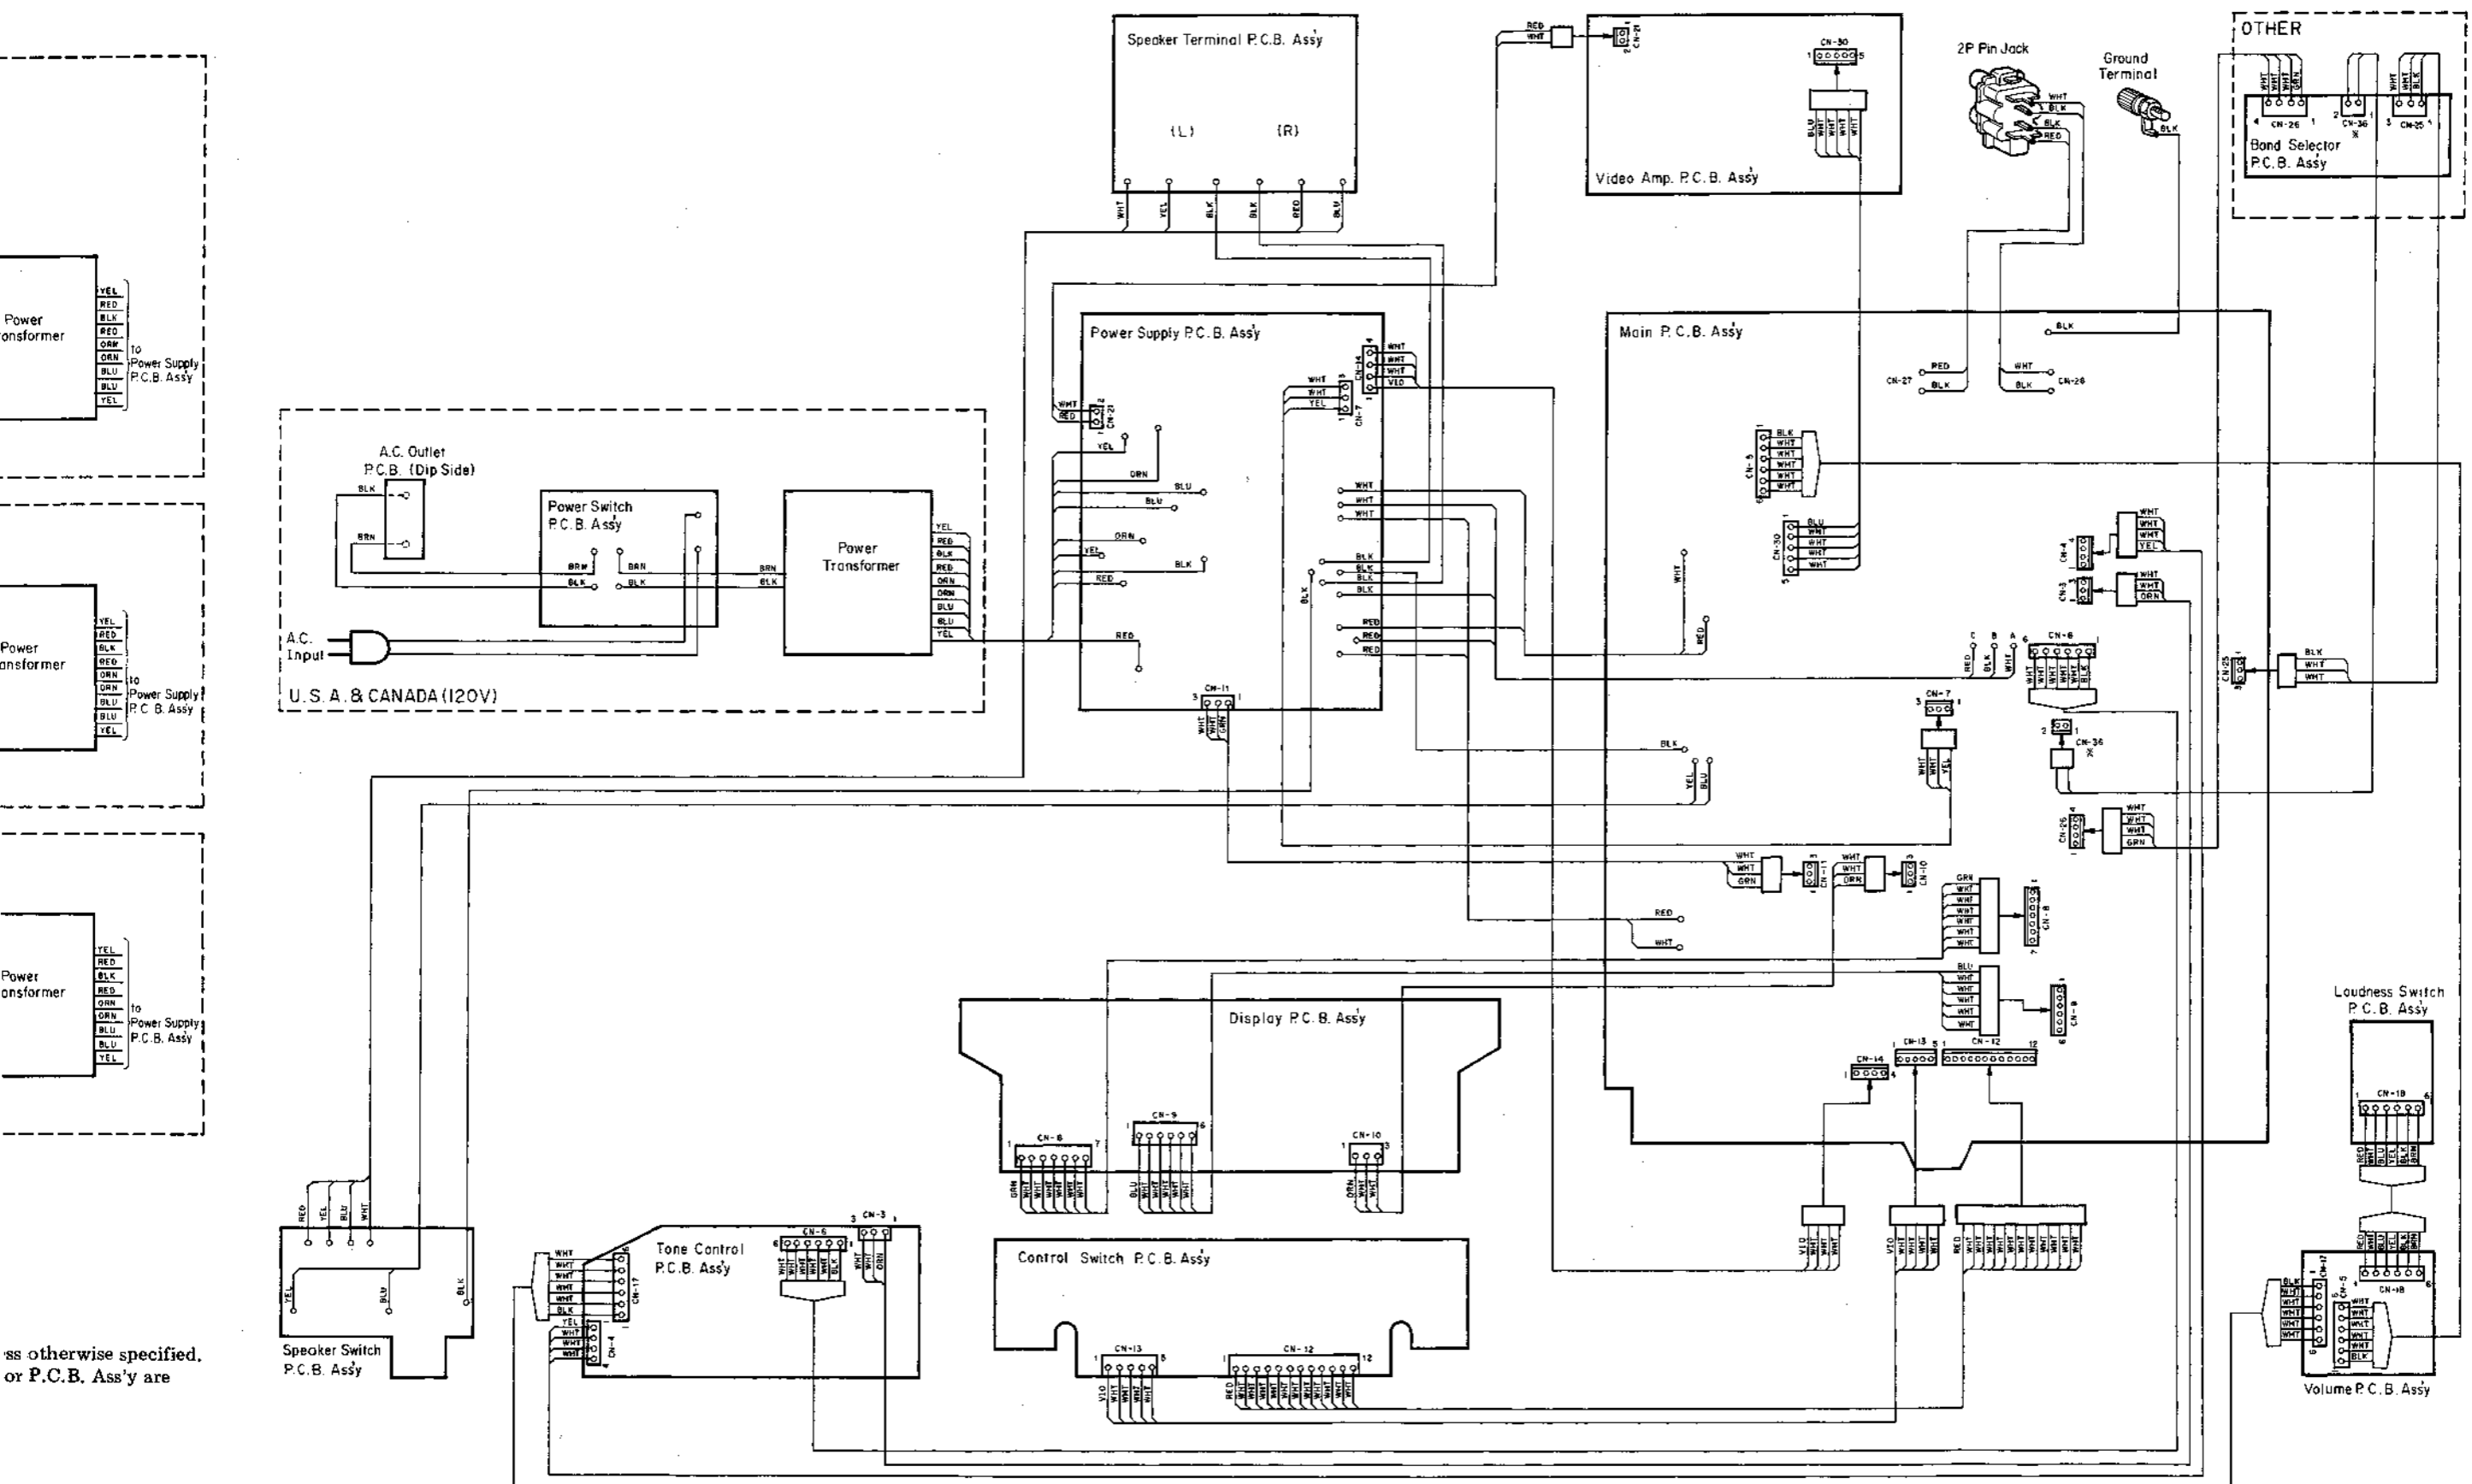


Fig. 7.1 For SR-8, SR-3A & SR-3E (Europe)



(2) For SR-3E (Germany)

Notes: 1. Table of wire colors

BRN — Brown	BLU — Blue
RED — Red	VIO — Violet
ORN — Orange	GRY — Gray
YEL — Yellow	WHT — White
GRN — Green	BLK — Black

2. Component side view of the P.C.B. is illustrated unless otherwise specified.

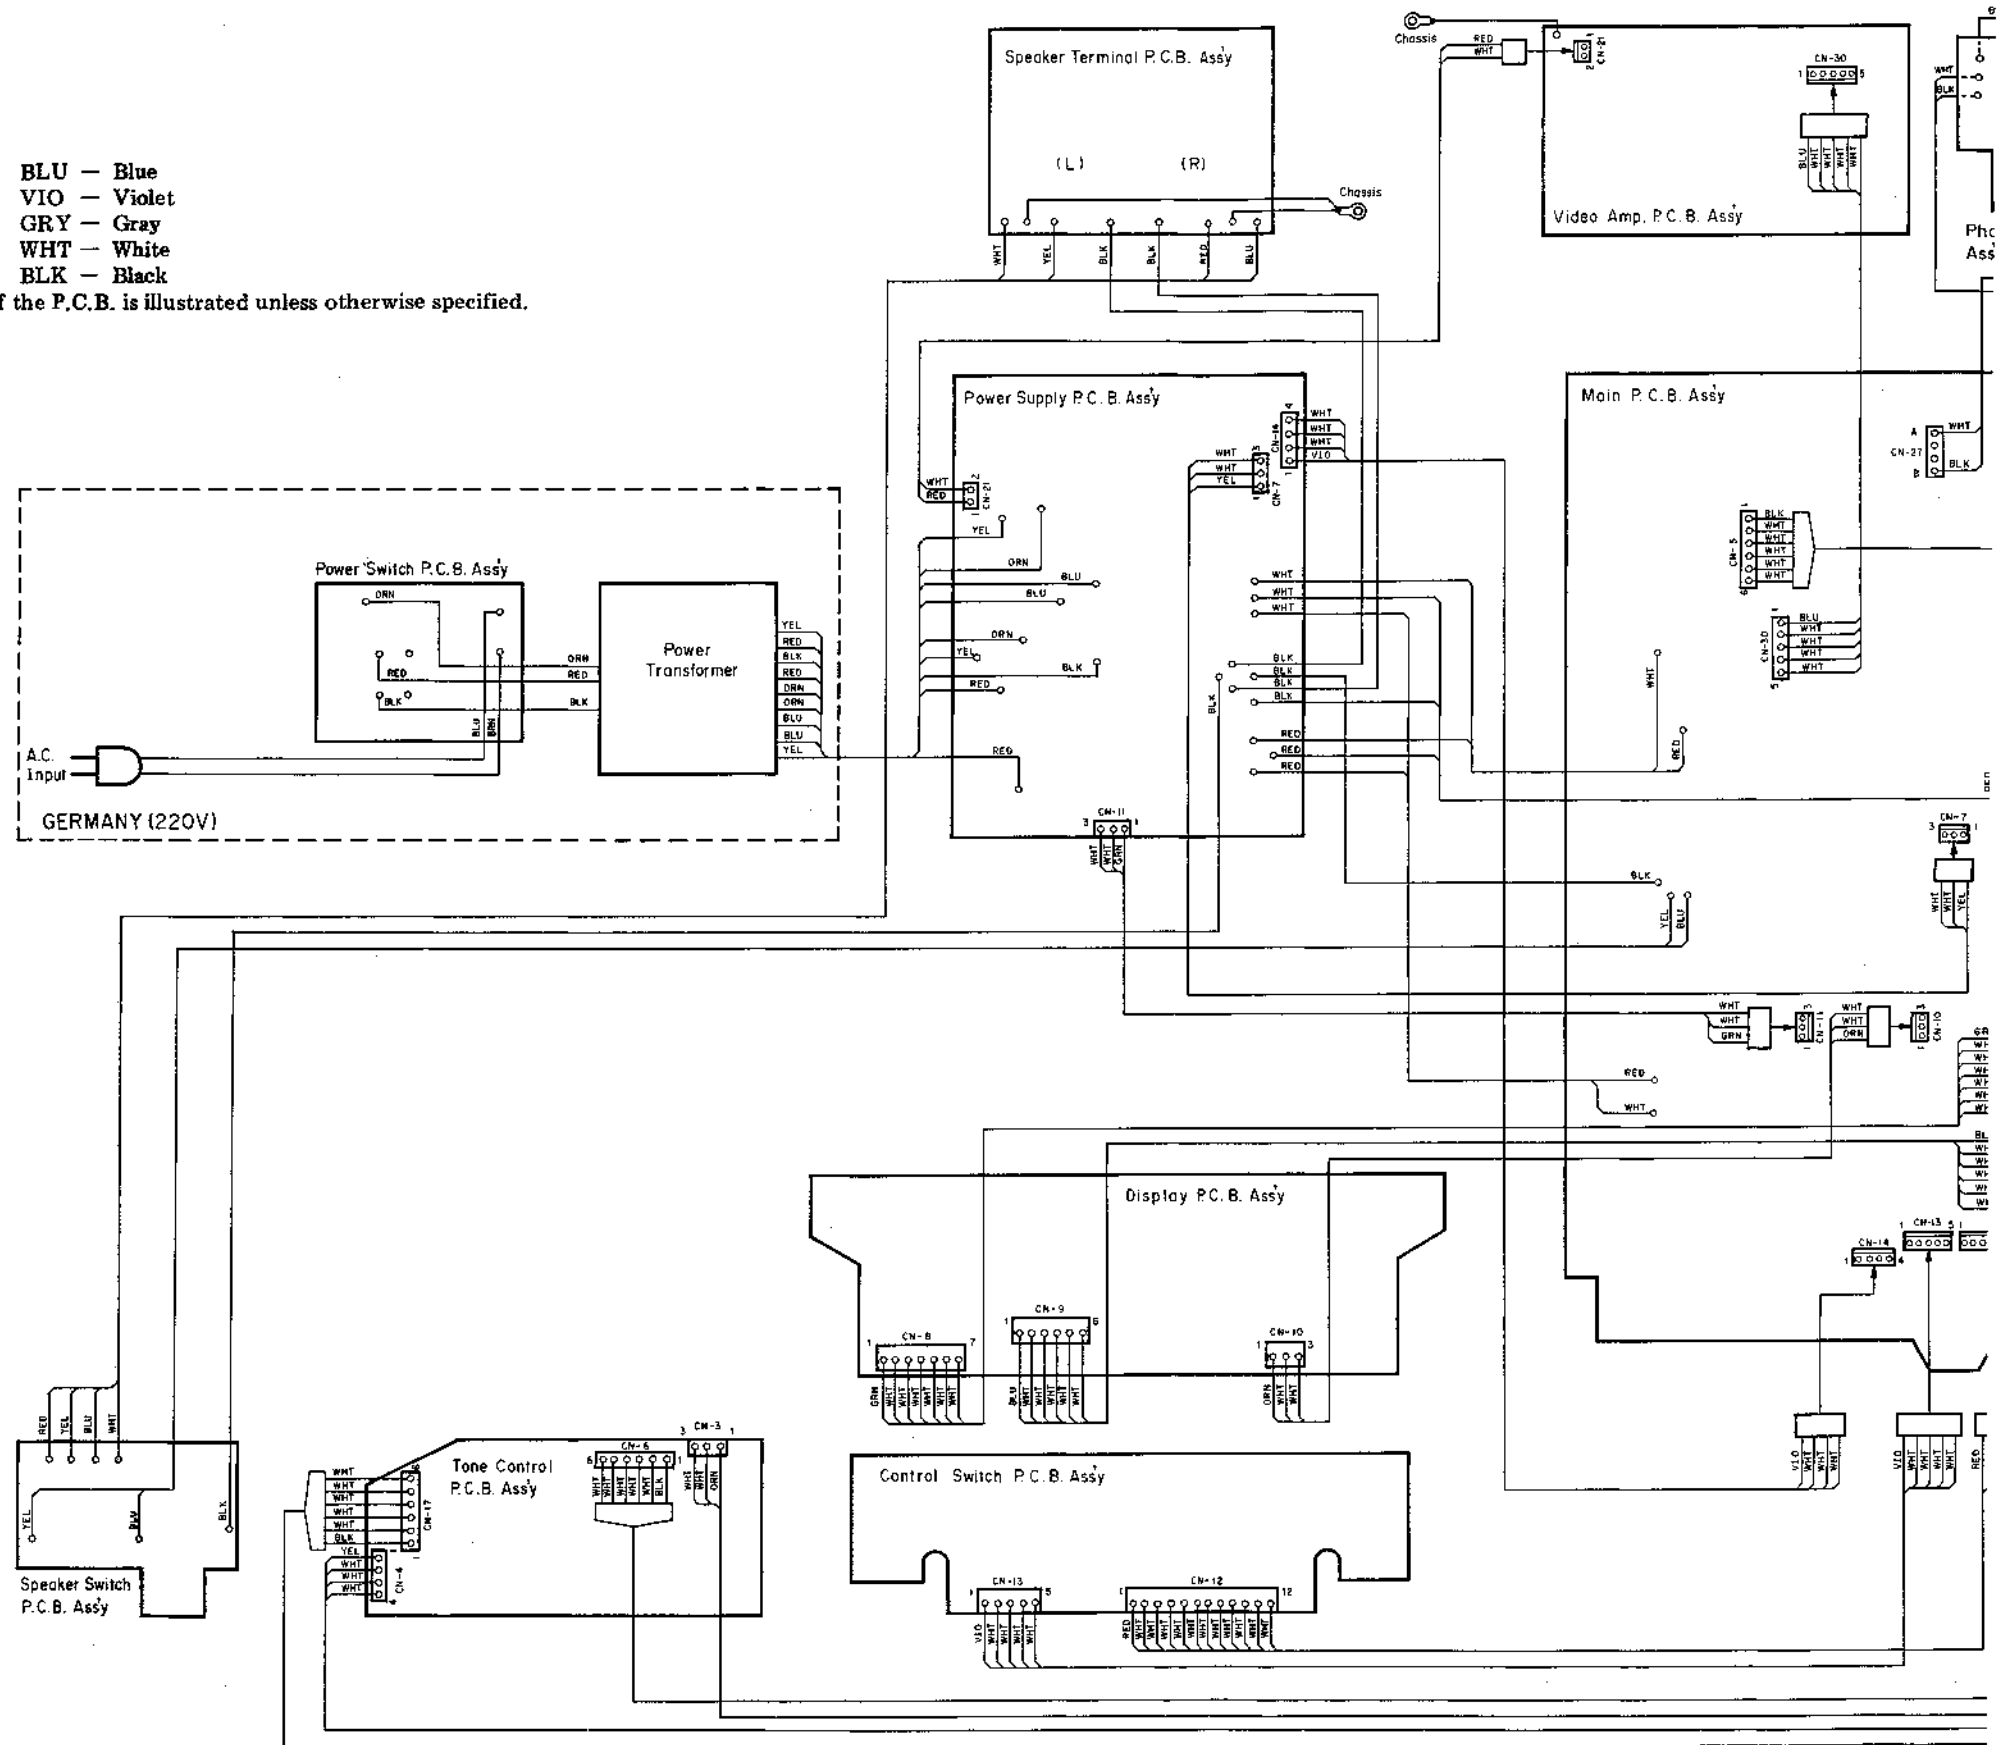


Fig. 7.2 For SR-3E (Germany)

Table of wire colors  
 BRN - Brown    BLU - Blue  
 RED - Red       VIO - Violet  
 ORN - Orange   GRY - Gray  
 YEL - Yellow    WHT - White  
 GRN - Green     BLK - Black  
 Component side view of the P.C.B. is illustrated unless otherwise specified.

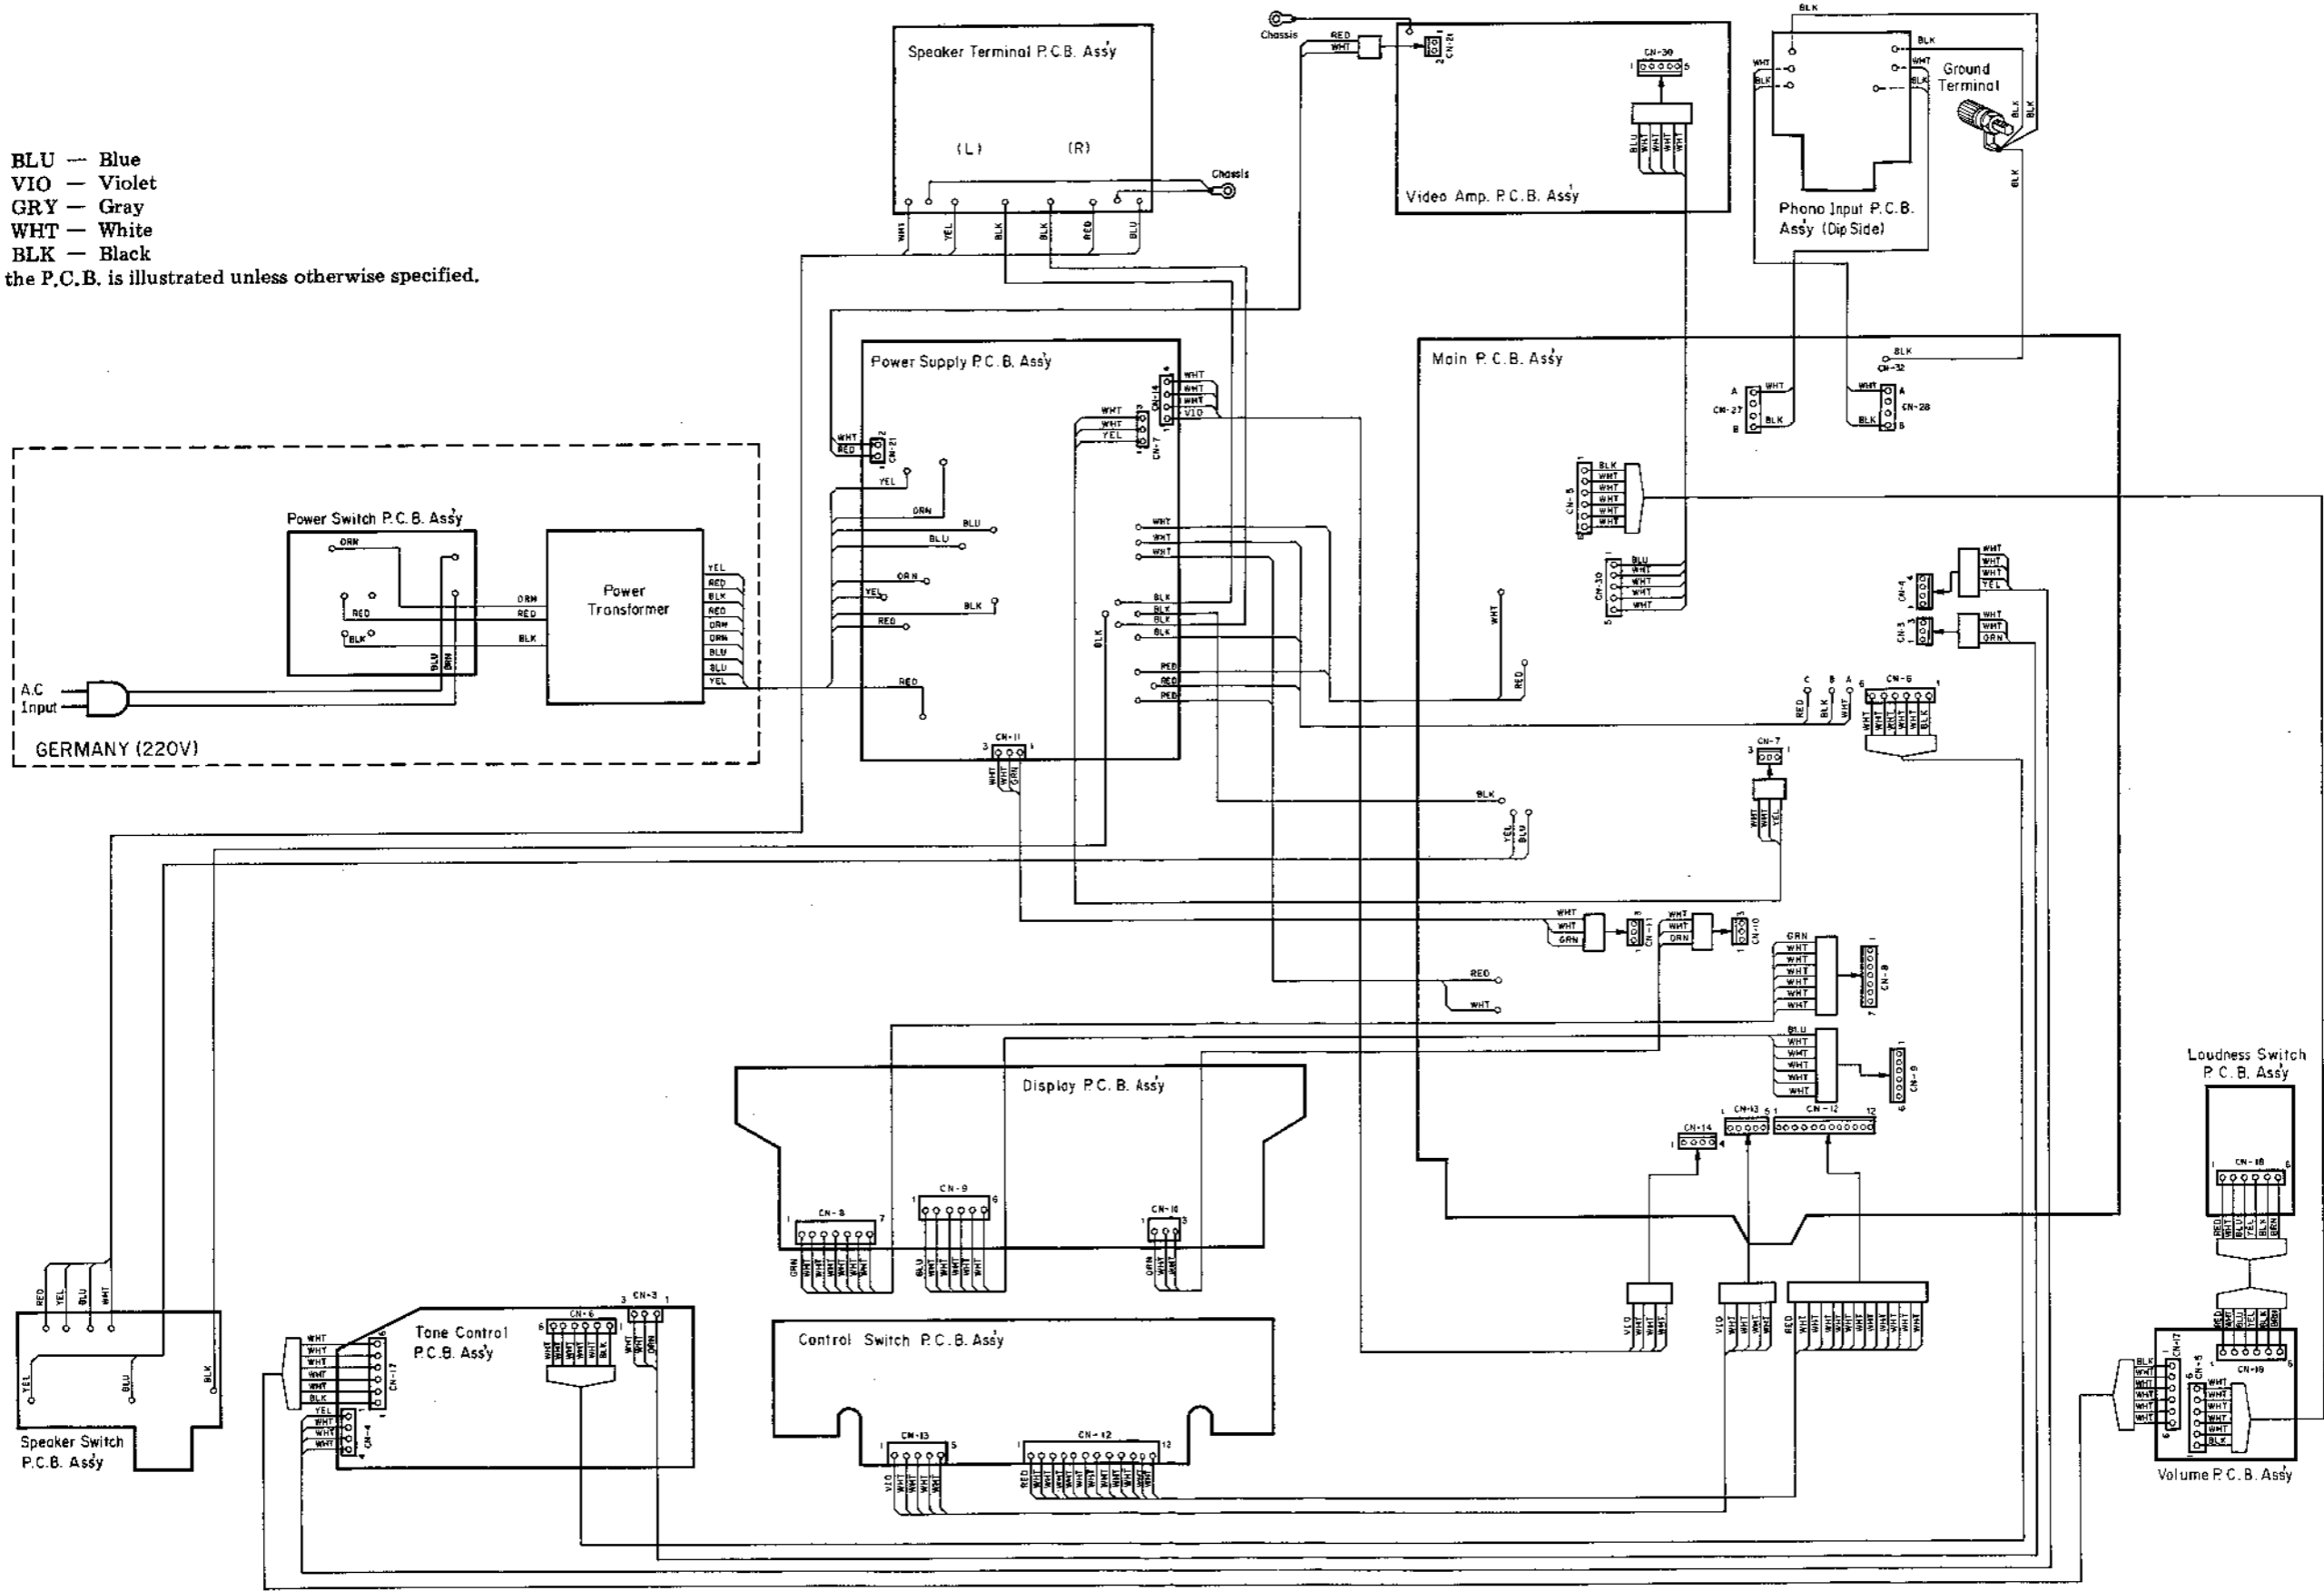


Fig. 7.2 For SR-3E (Germany)

## 8. BLOCK DIAGRAMS

### 8.1. Tuner Section

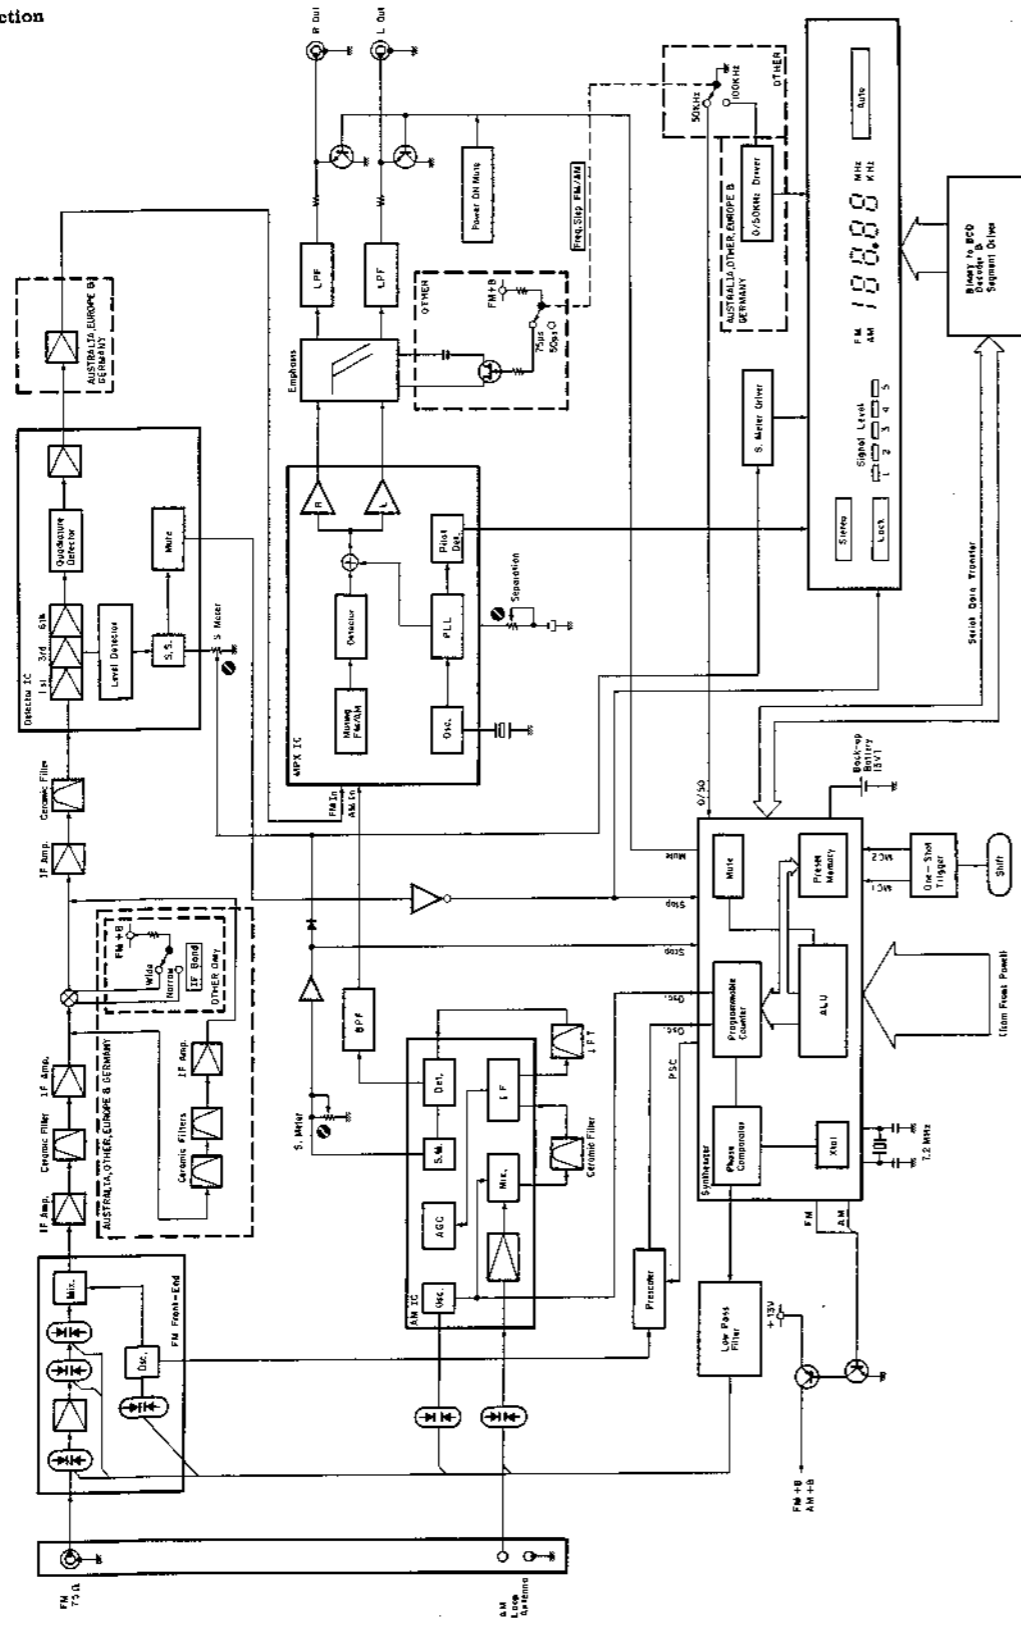


Fig. 8.1

### 8.2. Amplifier Section

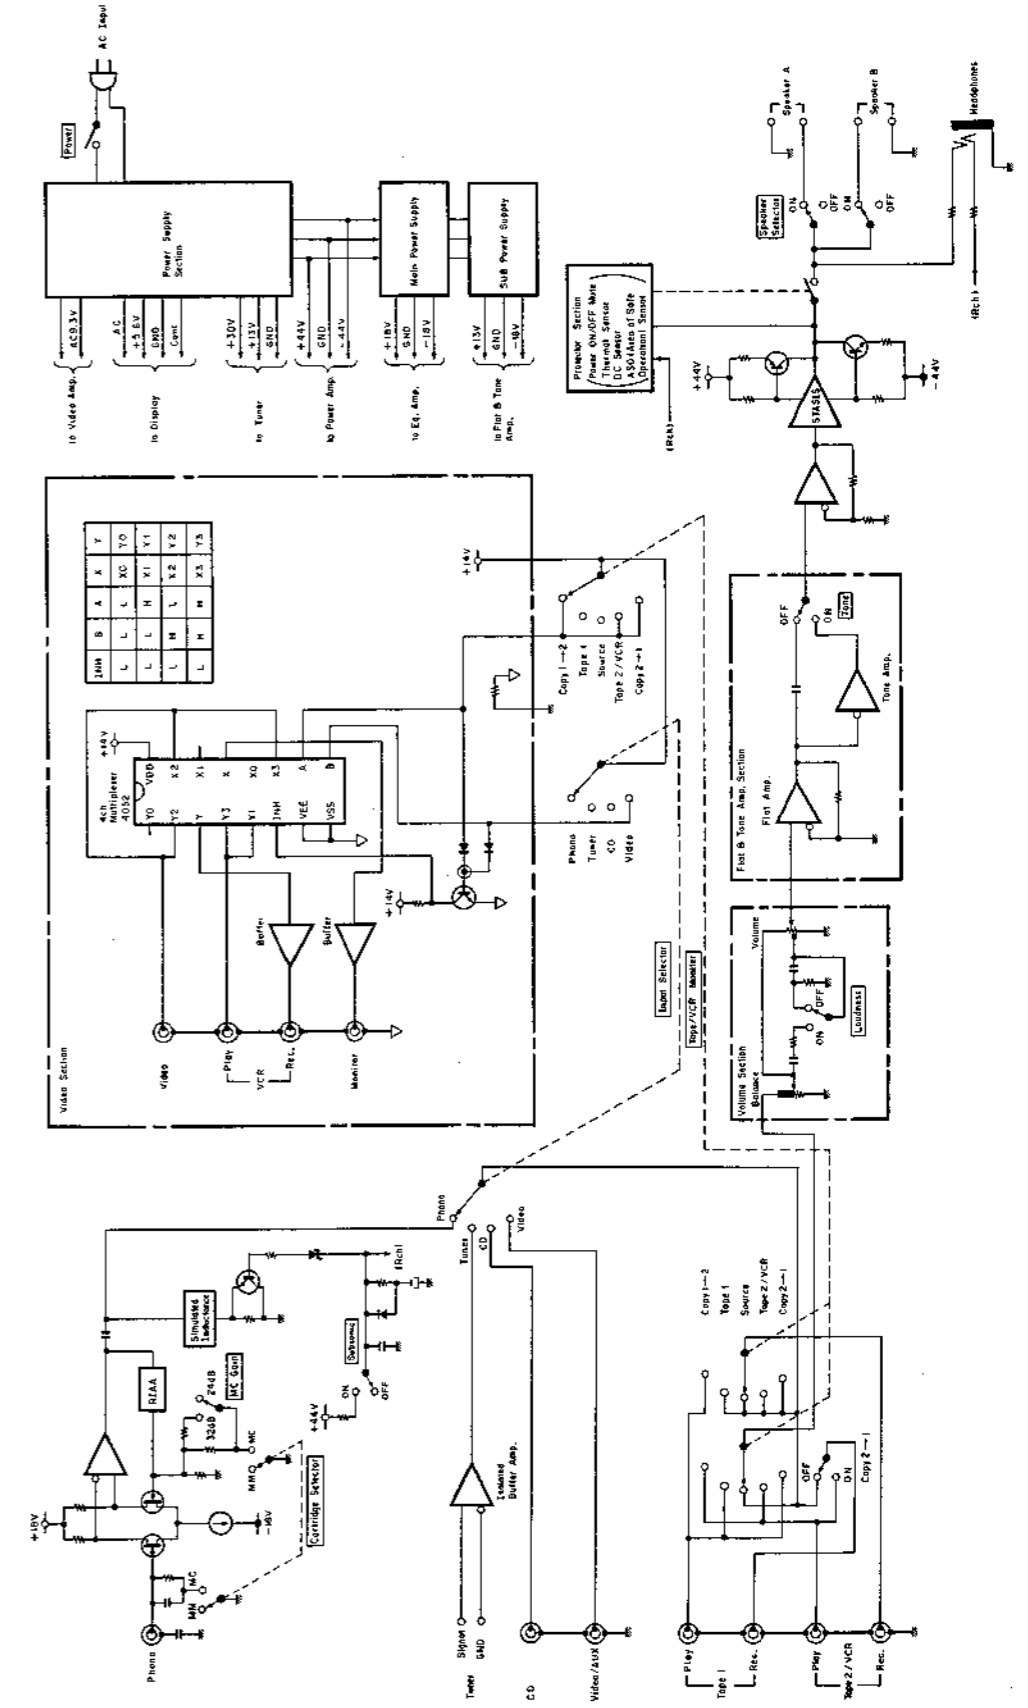


Fig. 8.2

## 9. SPECIFICATIONS

### 9.1. For SR-3 & SR-3A

#### Power Amplifier Section

Note: Unless otherwise noted specifications are in accordance with IHF-A-202 measured from any high-level input (CD/VIDEO/TAPE) to the speaker output.

Continuous Average Output Power	45 watts per channel into 8 ohms, both channels driven, 20—20,000 Hz at no greater than 0.1% THD
Dynamic Output Power	64 watts per channel into 8 ohms 80 watts per channel into 4 ohms
Dynamic Head Room (8 ohms)	1.5 dB
Power Bandwidth	5—40,000 Hz
Frequency Response	20—20,000 Hz; +0, -0.5 dB 5—75,000 Hz; +0, -3 dB
Signal to Noise Ratio (A-WTD, Input Shorted)	Better than 105 dB re Rated Power Better than 85 dB (IHF-A-202)
Total Harmonic Distortion (8 ohms, Rated Power, 20 Hz—20 kHz)	Less than 0.1%
Intermodulation Distortion (8 ohms, Rated Power, 60 Hz:7 kHz, 4:1)	Less than 0.15%
Headphone Rated Output (40 ohms)	105 mW
Output Current Capability	18A peak per channel

#### Preamplifier Section

Note: Unless otherwise noted, specifications are in accordance with IHF-A-202. Except for Sensitivity, S/N, Tone and Loudness characteristics (which are measured to the speaker outputs), measurements are made from the specified input to Rec. Out.

Sensitivity: (for rated Output)	
Phono MC	60/160 $\mu$ V (Gain: 32/24 dB)
Phono MM	2.5 mV
CD/Tape	200 mV
Video	200 mV
Sensitivity: (for 1-watt output per IHF-A-202)	
Phono MC	8.94/23.9 $\mu$ V (Gain: 32/24 dB)
Phono MM	0.37 mV
CD/Tape	29.8 mV
Video	29.8 mV
Input Impedance	
Phono MC	100 ohms
Phono MM	47 kohms
CD/Tape	22 kohms
Video	22 kohms
Maximum Input Level (1 kHz)	
Phono MC	3/8 mV (Gain: 32/24 dB)
Phono MM	140 mV
Record Output Level/Impedance	200 mV/1 kohms
Total Harmonic Distortion (1 kHz, to Rec Out, at 1 V)	
Phono MC	Less than 0.003% (either gain)
Phono MM	Less than 0.002%
RIAA Deviation	
Phono MC	30—20,000 Hz $\pm$ 0.5 dB
Phono MM	30—20,000 Hz $\pm$ 0.5 dB
Signal to Noise Ratio (to speaker output per IHF-A-202)	
Phono MC with 32 dB Gain	Better than 73 dB
24 dB Gain	Better than 72 dB
Phono MM	Better than 80 dB

#### Tone Controls

Bass	20 Hz, $\pm$ 10 dB
Treble	20 kHz, $\pm$ 10 dB
Loudness (Volume: -30 dB)	20 Hz, +10 dB; 20 kHz, +6 dB
Subsonic Filter (Phono Only)	Cutoff Frequency 20 Hz, -12 dB/octave

#### Tuner Section

(1) SR-3 (Canada & Other (see Note)) & SR-3A

Note: Selector switch settings for Other Model

Frequency Step FM/AM: 100 kHz/10 kHz, De-emphasis: 75  $\mu$ s,  
IF Band: Wide

#### [FM Section]

Note: All RF levels in microvolts given re 300-ohm antenna input. Modulation: Mono 100%, Stereo Pilot 9%, Stereo Audio Signal 91%. All measurements made at Rec Out Jack.

Frequency Range	87.5—108.0 MHz in 100 kHz steps
IHF Usable Sensitivity (Mono)	11 dBf/1.9 $\mu$ V
50-dB Quieting Sensitivity	
Mono	14.7 dBf/3.0 $\mu$ V
Stereo	37.5 dBf/41.1 $\mu$ V
Signal to Noise Ratio at 65 dBf	
Mono	Better than 79 dB
Stereo	Better than 74 dB
Muting Threshold	30 dBf/17.3 $\mu$ V
Frequency Response	20—15,000 Hz $\pm$ 1 dB
Total Harmonic Distortion (1 kHz)	
Mono	Less than 0.05%
Stereo	Less than 0.07%
Capture Ratio	2.0 dB
Alternate Channel Selectivity	55 dB ( $\pm$ 400 kHz)
Stereo Separation at 100 Hz	
at 1 kHz	Better than 46 dB
at 10 kHz	Better than 46 dB
Spurious Response Rejection	Better than 90 dB
Image Rejection	Better than 75 dB
IF Rejection	Better than 80 dB
AM Suppression	Better than 60 dB

#### [AM Section]

Note: Modulation — 400 Hz, 30%

Frequency Range	520—1,710 kHz in 10 kHz steps
Sensitivity	53 dB $\mu$ /m
Signal to Noise Ratio at 90 dB $\mu$ /m	Better than 52 dB
Total Harmonic Distortion at 90 dB $\mu$ /m	Less than 0.3%
Selectivity	Better than 20 dB ( $\pm$ 10 kHz)

(2) SR-3 (Australia & Other (see Note))

Note: Selector switch settings for Other Model

Frequency Step FM/AM: 50 kHz/9 kHz, De-emphasis: 50  $\mu$ s,  
IF Band: Narrow

#### [FM Section]

Note: All RF levels in microvolts given re 300-ohm antenna input. Modulation: Mono 60%, Stereo Pilot 9%, Stereo Audio Signal 51%. All measurements made at Rec Out jack.

Frequency Range	87.50—108.00 MHz in 50 kHz steps
IHF Usable Sensitivity (Mono)	11 dBf/1.9 $\mu$ V
50-dB Quieting Sensitivity	
Mono	21.0 dBf/6.1 $\mu$ V
Stereo	42.0 dBf/69.0 $\mu$ V

**Signal to Noise Ratio at 65 dBf**

Mono	Better than 74 dB
Stereo	Better than 69 dB
Muting Threshold	30 dBf/17.3 $\mu$ V
Frequency Response	20—15,000 Hz $\pm$ 1 dB
<b>Total Harmonic Distortion (1 kHz)</b>	
Mono	Less than 0.12% (for Australia), Less than 0.15% (for Other)
Stereo	Less than 0.20% (for Australia), Less than 0.25% (for Other)
Capture Ratio	2.0 dB
Alternate Channel Selectivity	70 dB ( $\pm$ 300 kHz)
Stereo Separation at 100 Hz	Better than 43 dB
at 1 kHz	Better than 43 dB
at 10 kHz	Better than 37 dB
Spurious Response Rejection	Better than 90 dB
Image Rejection	Better than 75 dB
IF Rejection	Better than 80 dB
AM Suppression	Better than 60 dB

**[AM Section]**

Note: Modulation: 400 Hz, 30%

Frequency Range	522—1,611 kHz in 9 kHz steps
Sensitivity	53 dB $\mu$ /m
Signal to Noise Ratio at 90 dB $\mu$ /m	Better than 52 dB
Total Harmonic Distortion at 90 dB $\mu$ /m	Less than 0.3%
Selectivity	Better than 20 dB ( $\pm$ 9 kHz)

**General**

Power Source	120, 240 or 110/120/220/240 V AC, 50/60 Hz (According to country of sale)
Power Consumption	270 watts max.
Convenience Outlets	Switched: 2 (For U.S.A., Canada & Other only)
Dimensions	430 (W) x 100 (H) x 370 (D) mm 16-15/16 (W) x 3-15/16 (H) x 14-9/16 (D) inches
Approximate Weight	8.5 kg, 18 lbs. 12 oz.

## 9.2. For SR-3E (Europe & Germany)

### Power Amplifier Section

Note: Unless otherwise noted specifications are in accordance with IHF-A-202 measured from any high-level input (CD/VIDEO/TAPE) to the speaker output.

Continuous Average Output Power	45 watts per channel into 8 ohms, both channels driven, 20–20,000 Hz at no greater than 0.1% THD
Dynamic Output Power	64 watts per channel into 8 ohms 80 watts per channel into 4 ohms
Dynamic Head Room (8 ohms)	1.5 dB
Power Bandwidth	5–30,000 Hz
Frequency Response	20–20,000 Hz; +0, –1 dB 5–45,000 Hz; +0, –3 dB
Signal to Noise Ratio (A-WTD, Input Shorted)	Better than 105 dB re Rated Power Better than 85 dB (IHF-A-202)
Total Harmonic Distortion (8 ohms, Rated Power, 20 Hz–20 kHz)	Less than 0.1%
Intermodulation Distortion (8 ohms, Rated Power, 60 Hz:7 kHz, 4:1)	Less than 0.15%
Headphone Rated Output (40 ohms)	105 mW
Output Current Capability	18A peak per channel

### Preamplifier Section

Note: Unless otherwise noted, specifications are in accordance with IHF-A-202. Except for Sensitivity, S/N, Tone and Loudness characteristics (which are measured to the speaker outputs), measurements are made from the specified input to Rec. Out.

#### Sensitivity: (for rated Output)

Phono MC	60/160 $\mu$ V (Gain: 32/24 dB)
Phono MM	2.5 mV
CD/Tape	200 mV
Video	200 mV

#### Sensitivity: (for 1-watt output per IHF-A-202)

Phono MC	8.9/24 $\mu$ V (Gain: 32/24 dB)
Phono MM	0.37 mV
CD/Tape	29.8 mV
Video	29.8 mV

#### Input Impedance

Phono MC	100 ohms
Phono MM	47 kohms
CD/Tape	20 kohms
Video	20 kohms

#### Maximum Input Level (1 kHz)

Phono MC	3/8 mV (Gain: 32/24 dB)
Phono MM	140 mV

Record Output Level/ . . . . . 200 mV/1 kohms

#### Impedance

#### Total Harmonic Distortion (1 kHz, to Rec Out, at 1 V)

Phono MC	Less than 0.003% (either gain)
Phono MM	Less than 0.002%

#### RIAA Deviation

Phono MC	30–20,000 Hz $\pm$ 0.5 dB
Phono MM	30–20,000 Hz $\pm$ 0.5 dB

#### Signal to Noise Ratio (to speaker output, IHF-A-202)

Phono MC with 32 dB Gain	Better than 71 dB
24 dB Gain	Better than 70 dB
Phono MM	Better than 78 dB

### Tone Controls

Bass . . . . . 20 Hz,  $\pm 10$  dB  
Treble . . . . . 20 kHz,  $\pm 10$  dB  
Loudness (Volume:  $-30$  dB) . . . 20 Hz,  $+10$  dB; 20 kHz,  $+6$  dB  
Subsonic Filter (Phono Only) . . . Cutoff Frequency 20 Hz,  $-12$  dB/octave

### Tuner Section

#### [FM Section]

Note: All RF levels in microvolts given re 300-ohm antenna input. Modulation: Mono 60%, Stereo Pilot 9%, Stereo Audio Signal 51%. All measurements made at Rec Out jack.

Frequency Range . . . . . 87.50—108.00 MHz in 50 kHz steps  
HF Usable Sensitivity . . . . . 11 dBf/1.9  $\mu$ V  
(Mono)  
50-dB Quieting Sensitivity  
Mono . . . . . 23.0 dBf/7.7  $\mu$ V  
Stereo . . . . . 43.0 dBf/77.4  $\mu$ V  
Signal to Noise Ratio at 65 dBf  
Mono . . . . . Better than 72 dB  
Stereo . . . . . Better than 67 dB  
Muting Threshold . . . . . 30 dBf/17.3  $\mu$ V  
Frequency Response . . . . . 20—15,000 Hz  $\pm 1$  dB  
Total Harmonic Distortion (1 kHz)  
Mono . . . . . Less than 0.20%  
Stereo . . . . . Less than 0.25%  
Capture Ratio . . . . . 2.0 dB  
Alternate Channel Selectivity . . . 70 dB ( $\pm 300$  kHz)  
Stereo Separation at 100 Hz . . . Better than 43 dB  
at 1 kHz . . . . . Better than 43 dB  
at 10 kHz . . . . . Better than 27 dB  
Spurious Response Rejection . . . Better than 90 dB  
Image Rejection . . . . . Better than 75 dB  
IF Rejection . . . . . Better than 80 dB  
AM Suppression . . . . . Better than 60 dB

#### [AM Section]

Note: Modulation — 400 Hz, 30%

Frequency Range . . . . . 522—1,611 kHz in 9 kHz steps  
Sensitivity . . . . . 53 dB $\mu$ /m  
Signal to Noise Ratio at 90 . . . . Better than 52 dB  
dB $\mu$ /m  
Total Harmonic Distortion . . . . . Less than 0.3%  
at 90 dB $\mu$ /m  
Selectivity . . . . . Better than 20 dB ( $\pm 9$  kHz)

### General

Power Source . . . . . 220 V AC, 50/60 Hz  
Power Consumption . . . . . 270 watts max.  
Dimensions . . . . . 430 (W) x 100 (H) x 370 (D) mm  
16-15/16 (W) x 3-15/16 (H) x 14-9/16 (D) inches  
Approximate Weight . . . . . 8.5 kg, 18 lbs, 12 oz.

- Specifications and design are subject to change for further improvement without notice.
- STASIS manufactured under license from Threshold Corporation.
- STASIS is a trademark of Threshold Corporation.