


DOCUMENTATION DE SERVICE

POSTE RÉCEPTEUR

PHILIPS . A . 102

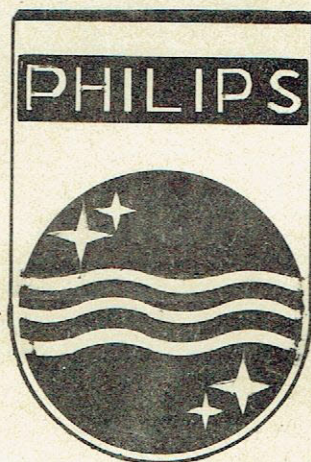

RESISTANCE

Désignation	Valeurs	N° de code
R. 1	47 Ohms	49.375.08
R. 2	47.000 "	49.375.44
R. 3	330 "	49.375.18
R. 4	1 Mégohm	49.376.60
R. 5	330 "	49.375.18
R. 6	0,1 "	49.376.48
R. 7	150 Ohms	49.376.14
R. 8	0,5 Mégohms	FK.800.18
R. 9	1,2 "	49.376.61
R. 10	10.000 Ohms	49.375.36
R. 11	1 Mégohm	49.376.60
R. 12	250 Ohms	28.770.19
R. 13	1 Mégohm	49.375.60
R. 14	27.000 Ohms	49.377.41
R. 15	33.000 "	49.377.42
R. 16	33.000 "	49.377.42
R. 17	10.000 "	49.375.36
R. 18	47.000 "	49.375.44

CONDENSATEURS

C. 1)	8 uF	FK.800.84
C. 2 (	8 uF	
C. 3	100 uuF	49.055.28
C. 4)	510 uF	FK.800.51
C. 5 (		
C. 6	47.000 uuF	49.127.22
C. 7	47 uuF	49.055.24
C. 8	470 uuF	49.055.36
C. 9	47.000 uuF	49.127.22
C. 10	47.000 uuF	49.127.22
C. 11	47.000 uuF	49.128.22
C. 12	82 uuF	49.055.27
C. 13	10.000 uuF	49.127.14
C. 14	270 uuF	49.055.33
C. 15	12 uuF	49.055.17
C. 16	25 uF	28.182.24
C. 17	4.700 uuF	49.129.82
C. 18	100 + 30 uuF	49.005.09
C. 19	30 uuF	28.212.45
C. 20	30 uuF	28.212.45
C. 22		FK.800.81
C. 23	470 uuF	28/195.79
C. 24	188 uuF	49.081.59
C. 25)		FK.800.30
C. 26 (		
C. 27)		
C. 28 (		FK.800.12
C. 29)		
C. 30 (		FK.800.81
C. 31	47.000 uuF	49.128.22

<u>Désignation</u>	<u>N° de code</u>
Coffret	FK.400.01
Panneau baffle	FK.400.13
Plaquette porte tissu	FK.400.14
-D°-	FK.400.15
Dos	FK.400.03
Bouton	FK.300.03
Ensemble écran	FK.050.04
Cadran	FK.900.60
Aiguille station	FK.900.09
Ensemble aiguille indicatrice	FK.800.21
Tissus	9.300

BOBINES

Désignation		N° de code
S. 1) S. 2 () S. 3) S. 4 ()	Ensemble tranfo. alimentation	FK.800.76
S. 5) S. 6 () S. 7) S. 8 () S. 9)	Ensemble bloc accord	FK.800.81
S.10 () S.11) S.12 () S.13) S.14 () S.15) S. 24 () C.22) C.29 () C.30)	Première Bobine MF	FK.800.30
S.16) S.17 () C.25) C.26 () S.18) S.19 () C.27) C.28 ()	Deuxième Bobine MF	FK.800.12
S.20) S.21 () S.22) S.23 ()	Haut Parleur "Véga"	FK.800.11
F.	Fusible	FK.800.43
L. 5	Lampe d'éclairage	8.045.D.00

