

STEREO PRE-AMPLIFIER
SPEC-1
KCU

Service Manual




CONTENTS

1. SPECIFICATIONS	2
2. FRONT PANEL FACILITIES	3
3. CONNECTION DIAGRAM	5
4. CIRCUIT DESCRIPTION	
4.1 Equalizer Amplifier	7
4.2 Input Buffer Amplifier	8
4.3 Tone Amplifier	8
4.4 Filter Circuit	9
4.5 Output Buffer Amplifier	10
4.6 Mic Mixing Circuit	10
4.7 Mixing Circuit	10
5. BLOCK DIAGRAM	11
6. LEVEL DIAGRAM	13
7. DISASSEMBLY	14
8. PARTS LOCATION	18
9. EXPLODED VIEWS	23
10. SCHEMATIC DIAGRAMS, P.C. BOARD PATTERNS AND PARTS LIST	
10.1 Schematic Diagram and Miscellaneous Parts	29
10.2 Input Circuit Assembly (AWP-017)	33
10.3 Power Supply Circuit Assembly (AWR-094)	38
10.4 Mixing Amplifier Assembly (AWM-083)	41
10.5 Filter Amplifier Assembly (AWM-082)	45
10.6 Fuse Board Assembly (AWX-091)	51
10.7 Tone Amplifier Assembly (AWG-035)	53
11. PACKING	60
12. PARTS LIST OF EXPLODED VIEWS	61

1. SPECIFICATIONS

Sensitivities		Finished Parts	
Tuner	50	Connection Card with pin plug	1
Diode	23	Operating Instructions	1 copy
Pre-amplifier		See search label for feature VOLUME knob	1
Circuitry		NOTE:	
Equalizer amplifier	3 stage direct coupled class A 6SP7 with 10-stage differential amplifier.	Specifications are the design subject to possible modification without notice due to improvements.	
Control amplifier	3 stage direct coupled class A 6SP7 with 10-stage differential amplifier.		
Input (Sensitivity/Impedance)			
PHONO 1	2.5mV/50kohms		
PHONO 2	2.5mV to 10mV/50kohms		
MIC	2.5mV/50kohms		
TUNER	150mV/100kohms		
AUX 1	150mV/100kohms		
AUX 2	150mV/100kohms		
TAPE PLAY 1	150mV/100kohms		
TAPE PLAY 2	150mV/100kohms		
PHONO Output Level (I.R.A.): (0.05)			
PHONO 1	500mV (1.000Hz)		
PHONO 2	500mV to 1.000mV (1.000Hz)		
Output Level (Impedance)			
TUNE REC 1	100mV/2.2kohms		
TAPE REC 2	150mV/2.2kohms		
OUTPUT 1, 2 (R _L = 50kohms)	2V/200kohms		
Total Harmonic Distortion (20Hz to 20,000Hz)			
	No more than 0.02% (TV output)		
	No more than 0.05% (TV output)		
Frequency Response			
PHONO (R.I.A.A. Equalization)	30Hz to 15,000Hz, 19.2dB		
TUNER, AUX, TAPE PLAY	30Hz to 20,000Hz, ±1.48		
Tone Control (1.5dB step)			
BASS	MAIN ±7.5dB (100Hz)		
	SUB ±4.5dB (50Hz)		
TREBLE	MAIN ±7.5dB (10,000Hz)		
	SUB ±4.5dB (20,000Hz)		
Filter			
LOW	19Hz, 30Hz (12dB/oct.)		
HIGH	52,000Hz, 60,000Hz (12dB/oct.)		
Hum and Noise (DHF, short-circuited, A Network)			
PHONO	75dB		
TUNER, AUX, TAPE PLAY	90dB		
Attenuator	75dB, 30dB		
Mechanisms			
Power Requirements	AC 120V, 60Hz		
Power Consumption	17 watts		
Dimensions	480.09 x 195.51 x 365.01 mm		
	18.78 x 7.70 x 14.38 in.		
Weight (without package)	11.2kg, 24 lb 10 oz		

3. CONNECTION DIAGRAM

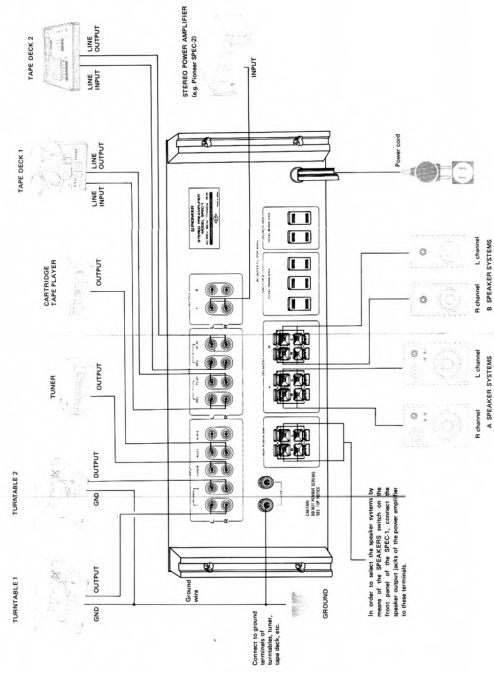

4. CIRCUIT DESCRIPTION

4.1 EQUALIZER AMPLIFIER

The equalizer amplifier circuit employs a differential amplifier first stage, SEPP (single-ended push-pull) final stage, balanced power supply, 3 stages direct-coupled NFB (negative feedback) system. Its circuit diagram is shown in Fig. 1.

Q1 and Q2 compose the differential amplifier. The input signal is fed to Q1 and NFB is applied from the output stage to Q2 base. Q1 output is voltage amplified at Q3 and Q2 drives the Q4 & Q5 SEPP circuit. Since a bootstrap circuit (R12, R21, C15) is inserted at the Q3 load, its AC load impedance is large and a large voltage gain can be obtained.

Fig. 2 shows an equivalent circuit to this AC bootstrap. In the absence of C15, the load impedance becomes the composite impedance of the Q4 & Q5 SEPP circuit and the parallel R12 & R21.

With C15 inserted, the positive feedback is nearly same as Q3 output is applied to point A from the output terminal through C15. The result is, the potential difference across the resistor R21 becomes small. The Q3 output signal then flows in the Q4 & Q5 SEPP circuit without flowing through R21. This resistor becomes effectively non-existent and consequently, the Q3 load becomes the SEPP circuit input impedance, giving a high load impedance compared to the above case. R11, R12, R13, C11, C13 and VR1a in Fig. 1

compose the NFB circuit. 100% DC NFB from the output terminal passes through R12 & R13 and is applied to Q2 base; a design which stabilizes DC balance. AC NFB, determined by R12, R13, C11, C13, R11 and VR1a, is applied to Q2 base (VR1a is included only when the FUNCTION switch is in the PHONO 2 position, and is shorted in the PHONO 1 position). The RIAA curve is derived from the AC NFB, and for the elements which govern the RIAA response is obtained (R11, R12, C11, C13). 1% tolerance metalized film resistors and 2% tolerance silver capacitor are employed. RIAA deviation in the range 200Hz to 15,000Hz is suppressed to within ± 0.5 dB of the standard value. At the same time, high reliability is obtained with respect to thermal variations and aging.

With the FUNCTION switch in the PHONO 2 position, gain adjustment is available in the range 0 to -2 dB. The first GdB adjustment is performed by varying the amount of NFB in the NFB circuit using VR1a, and the subsequent GdB by attenuating the output with VR1b in the output circuit. This method possesses the advantage of not impairing high frequency RIAA deviation or stability, while increasing the acceptable input to a maximum of 6dB. Consequently, when the gain is reduced more than 6dB, 1 Vrms (at 1kHz) acceptable input is available.




Fig. 1 Circuit Diagram of Equalizer Amplifier




Fig. 2 Equivalent Circuit of Bootstrap

4.2 INPUT BUFFER AMPLIFIER

This is a balanced power supply, pure complementary BPP Class A operational buffer amplifier. Although the circuit gain is essentially 0dB, high TUNER and AUX jack input impedance can be obtained. The low output impedance permits a low resistance VOLUME control to be employed in the following stage, eliminating observable high frequency deterioration due to VOLUME control position. Since the power supply uses an extremely high +18V push pull arrangement, inclusion of this circuit does not linear dynamic range. The circuit is shown in Fig. 3.

The input signal passes through C1 & C3 and is applied to both Q10 & Q11.

4.3 TONE AMPLIFIER

The SPECT1 tone control amplifier employs a twin control system consisting of switch selected NFB type main tone controls and CR network type sub-tone controls. The operational section is a differential amplifier and BPP circuit combination,




Fig. 3 Circuit Diagram of Input Buffer Amplifier

with a balanced power supply, 3 stage direct coupled amplifier and 1 stage buffer amplifier. The circuit is illustrated in Fig. 4.

1. Main Tone Controls

Q12 - Q16 make up the main tone control amplifier. Although the basic operation is the same as the equalizer amplifier, the NFB circuit differs. Fig. 5 shows a simplification of this circuit. S1 is for main bass control and S10 for main treble control. These perform CR selection and control the amplifier frequency response by varying the NFB frequency response.

• Bass Boost and Cut

Fig. 6a shows the equivalent circuit during bass boost. The composite impedance of R25, C6 and R6 in the equivalent circuit become high at low frequencies. NFB is therefore reduced and amplifier gain increases at low frequencies.

The equivalent circuit during bass cut is illustrated in Fig. 6b. In this case the composite impedance of R6, C6 and C7B becomes high at low frequencies, and NFB increases, thereby reducing amplifier gain.

• Treble Boost and Cut

Fig. 6c shows the equivalent circuit during treble boost. The combined impedance of R6, C6, R4 and C7B becomes low at high frequencies, reducing NFB and increasing amplifier gain.

The equivalent circuit during treble cut is shown in Fig. 6d. C6 and R4 impedance becomes low at high frequencies, increasing NFB and reducing amplifier gain.




Fig. 4 Circuit Diagram of Tone Amplifier

• **Tone Control Flat and TONE Switch OFF**
 The NFB circuit becomes the same during both tone control flat and TONE switch OFF modes. See Fig. 4, 5. It can be therefore seen that level and frequency response differences are absent in both conditions.

2. **Sub Tone Controls**
 In the sub tone control circuit, the signal passes through a CE network, where bass and treble are relatively enhanced or attenuated. Fig. 10 shows a simplification of this circuit.

S11 is for sub treble control and S12 for sub bass control, and these provide CR selection and control circuit frequency response. S13 is the TONE switch. When not in OFF, the output is determined by the dividing ratio between R131 and R133, while with the tone control flat it is decided by the ratio between R127 and R28. Since the voltage dividing resistors in both these cases have the same value, level and frequency response difference are absent.




Fig. 5 Circuit Diagram of Main Tone Control

Note: R127 and R28 indicate NFB loop during tone control flat.




Fig. 6 Equivalent Circuit of Tone Control Flat and TONE Switch OFF

4.4 **FILTER CIRCUIT**

The circuit shown in Fig. 7 has a steep characteristic of 12dB/oct, and is effective in removing noise. The low cut-off filter can be selected to the three positions of 15Hz, OFF and 30Hz. Change-over of this cut-off frequency is achieved by changing over C1 and C2. The high cut-off filter can be switched to the three positions of 120Hz, OFF and 30Hz, and this is achieved by the change-over of C3 and C4.



Fig. 7 Circuit Diagram of Filter Circuit



Fig. 8 Equivalent Circuit of Bass Boost and Cut




Fig. 9 Equivalent Circuit of Treble Boost and Cut




Fig. 10 Circuit Diagram of Sub Tone Control

4.5 OUTPUT BUFFER AMPLIFIER

The output buffer amplifier is of equivalent composition to the input buffer amplifier. As this circuit is intended to reduce output impedance, even when a 600 ohm low impedance circuit is connected, ample output with excellent frequency and distortion response can be assured.

4.6 MIC MIXING CIRCUIT

A 2 stage direct coupled RFB type MIC amplifier is employed, while the mixing amplifier uses a PNP-NPN transistor 2 stage direct coupled circuit. The MIC mixing circuit is indicated in Fig. 11. When a microphone plug is inserted into the MIC jack, and mixing switch (S2) set to ON, current flows in the mixing relay, connecting the mixing and main circuits. However, with only S2 set to ON, or MIC plug inserted (not both), circuit connection is not completed.




Fig. 11 Block Diagram of MIC Mixing Circuit




Fig. 12 Circuit Diagram of Muting Circuit

4.7 MUTING CIRCUIT

This opens the output circuit for 6 to 8 seconds after the POWER switch has been set to ON and immediately after the POWER switch is set to OFF, blocking unpleasant noise. The circuit is shown in Fig. 12.

1. POWER Switch ON Muting


Immediately after the POWER switch is set to ON, delayed operation is provided by R88 and C51 in the Q23 base circuit. The delay time is determined by the time constant of R88 and C51. When the POWER switch is turned ON Q23 is reverse biased by -R3 from D1 and it switches OFF. At this time, +E1 passes through R59 to charge C51. Therefore, point A potential rises as C51 charges.

Q33 is in the OFF state at this time. Q33 & Q24 comprise a Schmitt circuit and with Q23 OFF, current does not flow through the relay coil and the relay remains in the OFF position. When C51 is fully charged, point A potential is determined by R54 & R59 voltage dividing ratio. Forward bias is applied to Q23 base, switching Q23 ON and Q24 OFF. Therefore current flows in the relay coil, switching the relay ON to close the signal circuit and begin normal operation.


2. POWER Switch OFF Muting

During normal operation +E1 from R30 passes through R52. Since it flows to -E1, Q22 base is at cut-off potential. The small capacity of C13 in the -E2 circuit causes it to be discharged immediately by +E1 passing through R30 & R52. After discharging, +E1 passing through R30 is applied to Q22 base, switching this transistor ON. Point A potential decreases rapidly, switching Q23 OFF and Q24 ON. Bias current flows in the relay, switching the relay OFF and opening the signal output circuit.

5. BLOCK DIAGRAM

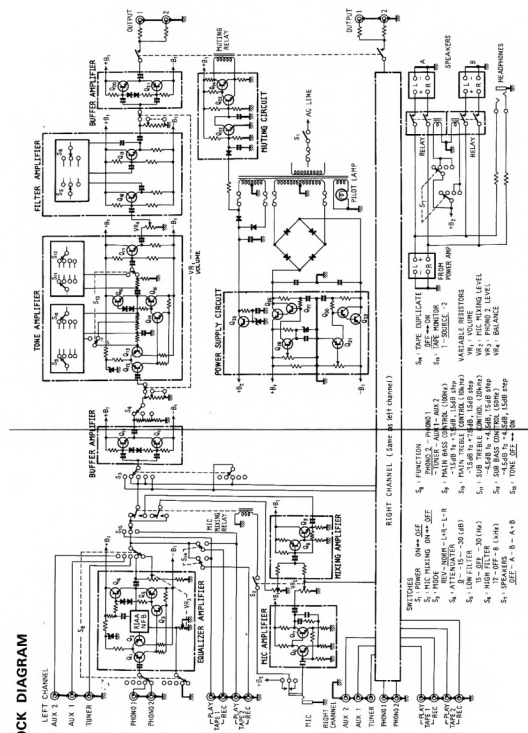


6. LEVEL DIAGRAM

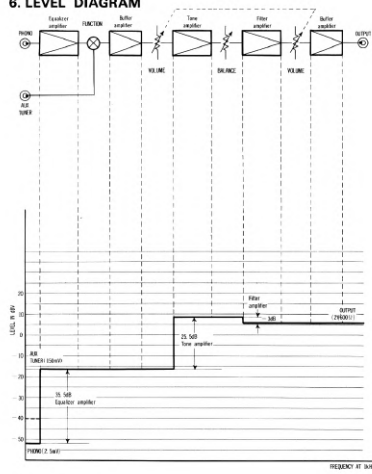

7. DISASSEMBLY


1. Removing the Top Cover

Remove the 12 screws (A) to detach the top cover.




2. Removing the Bottom Plate

Remove the 12 screws (B) to detach the bottom plate.




3. Removing the Front Panel Assembly


- (1) Remove all control knobs by pulling them out. For the VOLUME control knob, loosen the set screws with a hexagonal wrench before removing it. Remove the BASS, TREBLE, and MIDDLE switch shafts nuts and washers (C).
- (2) Remove the 8 screws (D) to detach the front panel assembly.

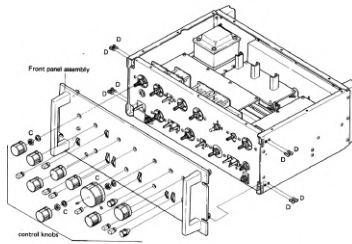


- 4. Removing the Input Circuit Assembly**
(1) Remove the top cover and front panel.
(2) Remove the 7 screws (E) which mount the printed circuit board on the chassis.




- 5. Removing the Tone Amplifier Assembly**
(1) Remove the top cover and front panel.
(2) Remove the 8 screws (F) which mount the printed circuit board on the chassis.



- 6. Removing the Filter Amplifier Assembly**
(1) Remove the bottom plate and front panel.
(2) Remove the 8 screws (G) which mount the printed circuit board on the chassis.




- 7. Removing the Mixing Amplifier Assembly**
(1) Remove the bottom plate and front panel.
(2) Remove the 5 screws (H) which mount the printed circuit board on the chassis.




8. PARTS LOCATION


1. Front Panel View

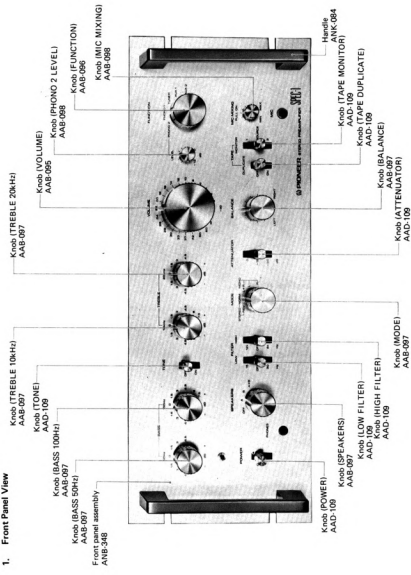


2. Front View with Panel Removed

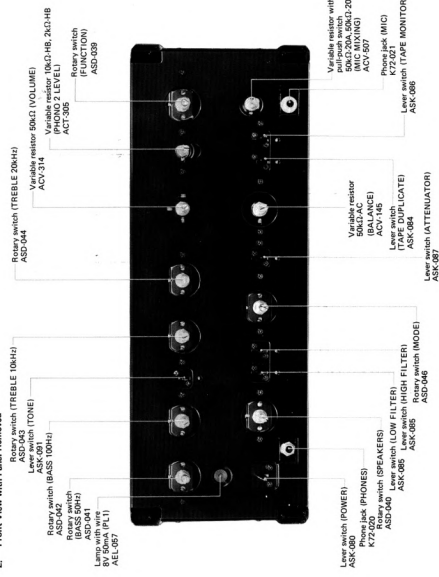


3. Top View

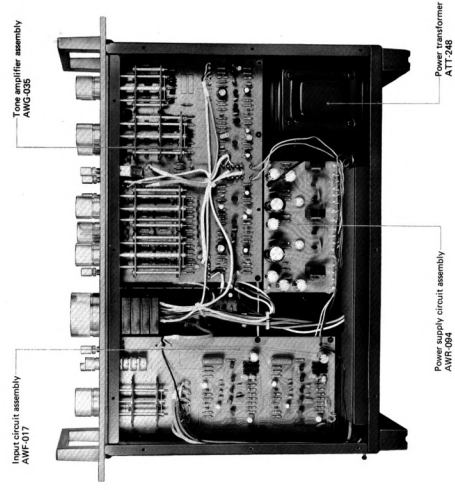



4. Bottom View

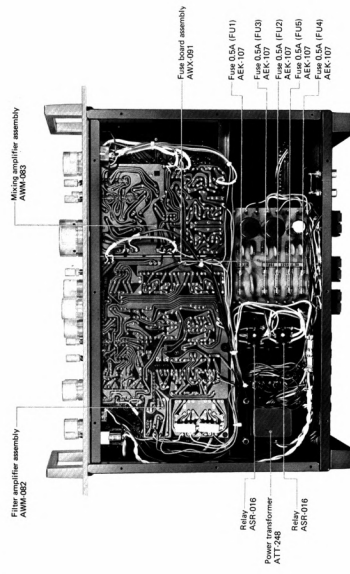


5. Rear View

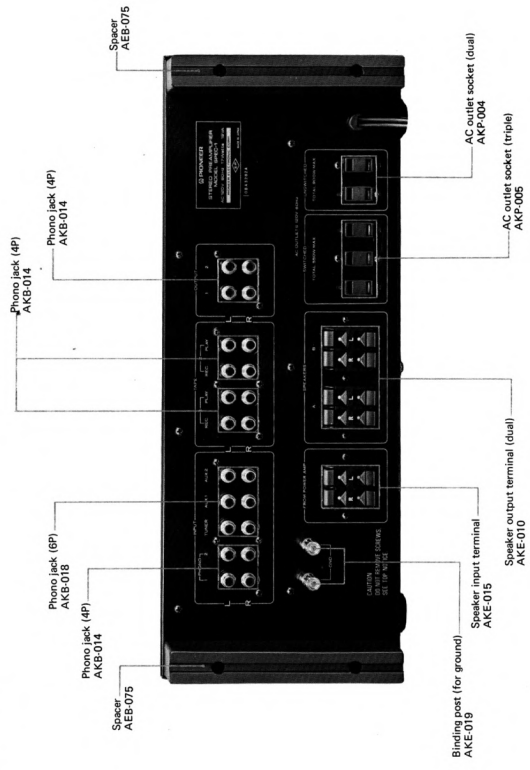

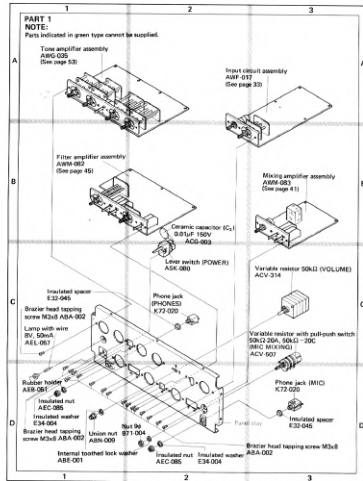

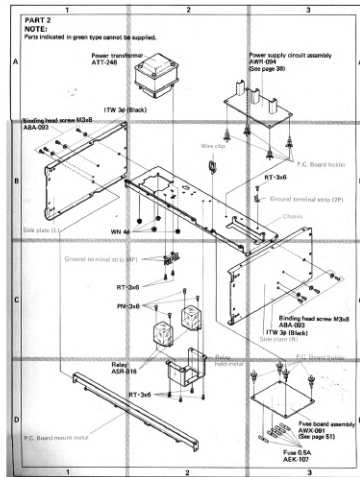

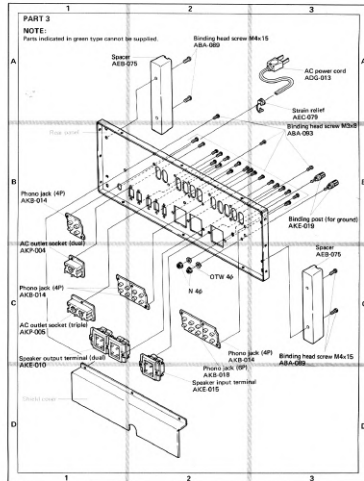


NOMENCLATURE OF SCREWS, WASHERS AND NUTS

The following symbols stand for screws, washers and nuts as shown in exploded view.

Symbol	Description	Shape	Symbol	Description	Shape
HT	Hexater head tapping screw		ER	E type washer	
FT	Flat head tapping screw		FR	Flat washer	
BT	Blind head tapping screw		DR	Spring lock washer	
CT	Counterbore head tapping screw		N	Nut	
TT	Trom head tapping screw		WN	Washer head nut	
OC1	Oral counterbore head tapping screw		ITW	Internal lockhead lock washer	
FW	Pin head machine screw		OTW	Oral lockhead lock washer	
DM	Counterbore head machine screw		SC	Slotted set screw (Cone point)	
OCM	Oral counterbore head machine screw		SP	Slotted set screw (Flat point)	
TM	Trom head machine screw		HG	Hexagon socket head/tee set screw	
BM	Blind head machine screw		OCW	Oral counter with head axial screw	
FA	Pin head screw with spring lock washer		DW	Counterbore head axial screw	
FB	Pin head screw with spring lock washer and flat washer		RW	Round head axial screw	
FW	Pin head screw with flat washer				

EXAMPLE



10. SCHEMATIC DIAGRAMS, P. C. BOARD PATTERNS AND PARTS LIST

10.1 SCHEMATIC DIAGRAM AND MISCELLANEOUS PARTS

Miscellaneous Parts List

NOTE:
 • Dimensions in µF unless otherwise noted p.p.F.
 • Resistors in Ω, K, M unless otherwise noted & R, W, M, Ω.

CAPACITORS

Symbol	Description	Part No.
C1	Capacitor 0.001 50V	CD177-4122 50
C2	Capacitor 0.01 150V	ACS-028
C3	Capacitor 0.001 50V	CD177-4122 50
C4	Electrolytic 1,000 25V	CEA-150P-25

2SA726
 2SC1313
 2SC869
 2SA028A



RESISTORS AND POTENTIOMETERS

Symbol	Description	Part No.
R1	Wire wound 150 Ω	RT18 151K
R2	Wire wound 150 Ω	RT18 151K
VR1	Variable resistor 50k (50K-100K)	ACH-314
VR2	Variable resistor with potentiometer wiper 50k-200k (50K-200K MIXING)	ACV-357

2SC1775A
 2SC845



SEMICONDUCTORS

Symbol	Description	Part No.
DR1	Diode	SD81-04
CD	Diode	SD81-04

2SC1885
 2SA912



FUSES AND LAMP

Symbol	Description	Part No.
F11	Fuse 0.5A	AEC-107
F12	Fuse 0.5A	AEC-107
F13	Fuse 0.5A	AEC-107
F14	Fuse 0.5A	AEC-107
F15	Fuse 0.5A	AEC-107
F16	Fuse 0.5A	AEC-107
FL1	Lamp with base EY 500mA	AEL-067


2SC1166
 2SD313P
 2SD507




OTHERS

Symbol	Description	Part No.
T1	Power transformer	ATT-248
B1	Power Switch (POWER)	ASB-088
B17	Relay	ASB-016
B18	Relay	ASB-016


FUNCTION (S9)




MODE (S3)





BASS 100Hz (S10)





TREBLE 10kHz (S11)





BASS 50Hz (S13)




TREBLE 20kHz (S12)




SPEAKERS (S7)




Schematic Diagram

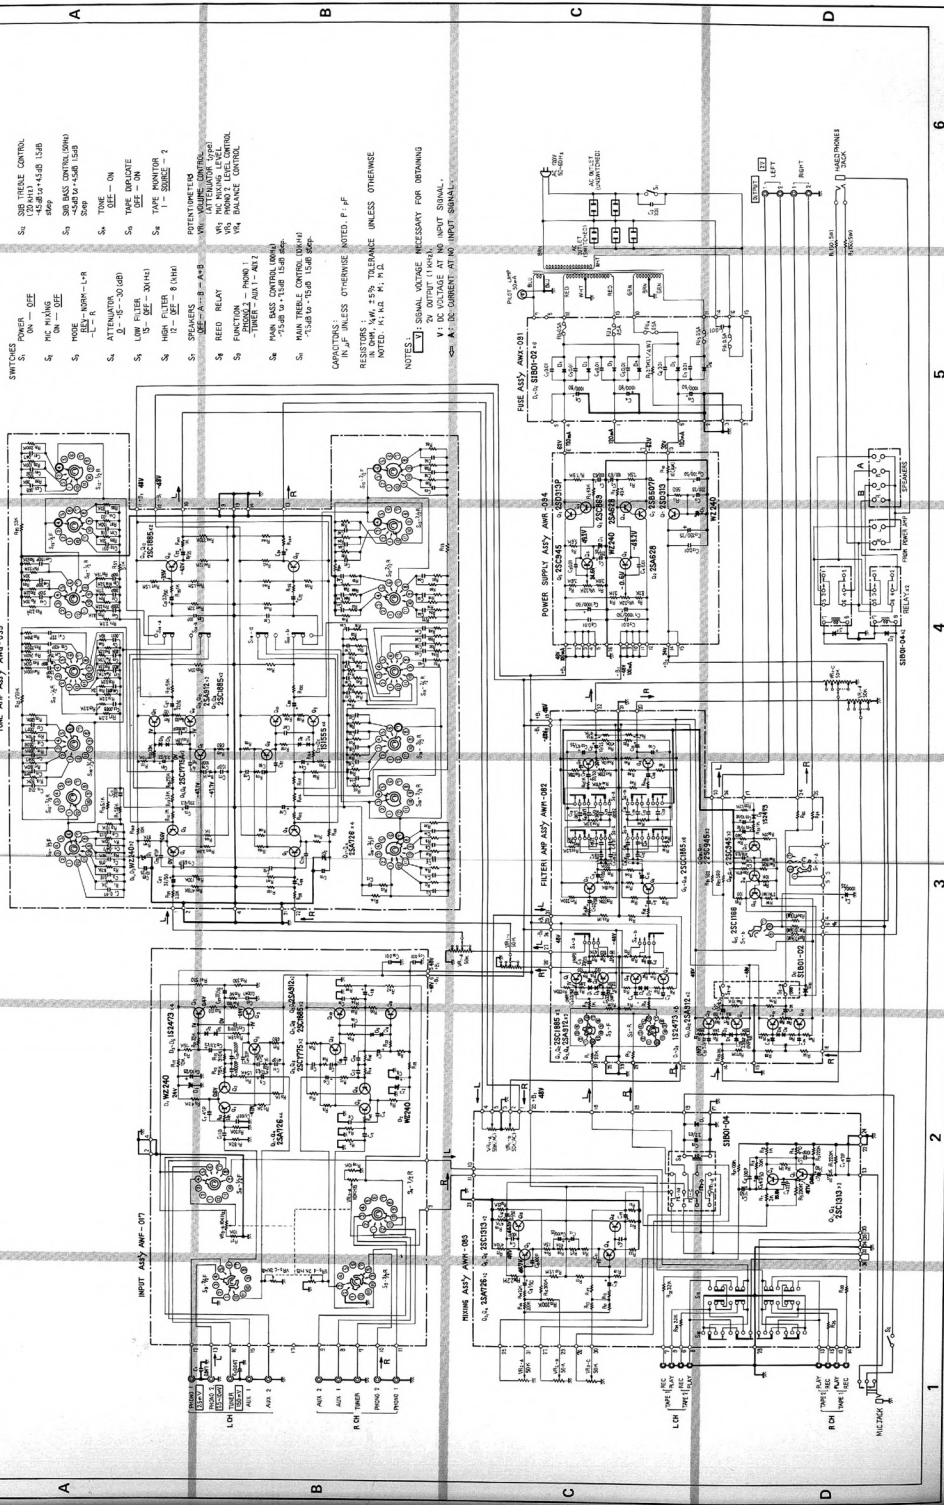

- SWITCHES**
- S1 POWER OFF
 - S2 MC RANGE
 - S3 MODE
 - S4 ATTENUATOR
 - S5 LOW FILTER
 - S6 HIGH FILTER
 - S7 REED RELAY
 - S8 FUNCTION
 - S9 TUNING
 - S10 MAIN TUNING
- CONTROLS**
- W1 MAIN TUNING
 - W2 REED RELAY
 - W3 TUNING
 - W4 MAIN TUNING
- RESISTORS**
- R1, R2, R3, R4, R5, R6, R7, R8, R9, R10, R11, R12, R13, R14, R15, R16, R17, R18, R19, R20, R21, R22, R23, R24, R25, R26, R27, R28, R29, R30, R31, R32, R33, R34, R35, R36, R37, R38, R39, R40, R41, R42, R43, R44, R45, R46, R47, R48, R49, R50, R51, R52, R53, R54, R55, R56, R57, R58, R59, R60, R61, R62, R63, R64, R65, R66, R67, R68, R69, R70, R71, R72, R73, R74, R75, R76, R77, R78, R79, R80, R81, R82, R83, R84, R85, R86, R87, R88, R89, R90, R91, R92, R93, R94, R95, R96, R97, R98, R99, R100
- NOTES**
- 1. SIGNAL VOLTAGE NECESSARY FOR DETUNING
 - 2. V1 IS VOLTAGE AT NO INPUT SIGNAL.
 - 3. A: IS CURRENT AT NO INPUT SIGNAL.

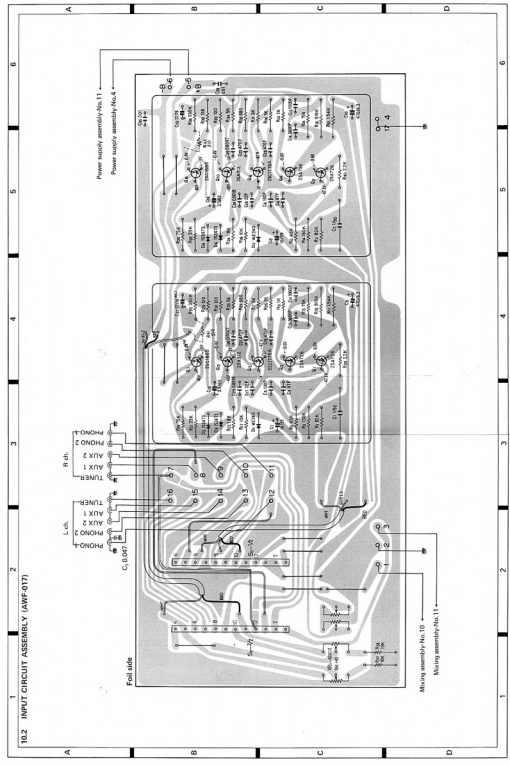

100.2 INPUT CIRCUIT ASSEMBLY (AWF-077)

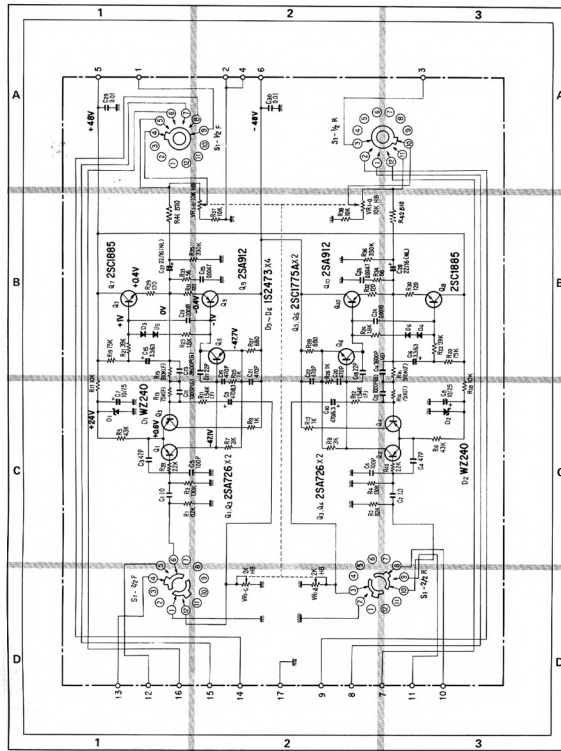

Parts List of Input Circuit Assembly (A1WF-077)

CAPACITORS

Symbol	Description	Part No.	Symbol	Description	Part No.
C1	Resistor	1 60V CGEA 100K 50	R16	Metall Film	910K 10W
C2	Resistor	1 60V CGEA 100K 50	R17	Carbon Film	10K
C3	Resistor	47k 50V CGESL 47K 50	R18	Carbon Film	10K
C4	Resistor	47k 50V CGESL 47K 50	R19	Carbon Film	75K
C5	Resistor	100k 50V CGESL 101K 50	R20	Carbon Film	75K
C6	Capacitor	100p 50V CGDSE 101K 50	R21	Carbon Film	20K
C7	Electrolytic	10 25V CEA 100P 25	R22	Carbon Film	20K
C8	Electrolytic	10 25V CEA 100P 25	R23	Carbon Film	1.5K
C9	Electrolytic	470 6.3V CEA 471P 63	R24	Carbon Film	1.5K
C10	Electrolytic	470 6.3V CEA 471P 63	R25	Carbon Film	1K
C11	Spacer	0.001 50V CGSA 100K 50	R26	Carbon Film	1K
C12	Spacer	0.001 50V CGSA 100K 50	R27	Carbon Film	800
C13	Spacer	0.0005 50V CGSA 800K 50	R28	Carbon Film	800
C14	Spacer	0.0005 50V CGSA 800K 50	R29	Carbon Film	120
C15	Electrolytic	3.3 63V CEA 333P 63	R30	Carbon Film	120
C16	Electrolytic	3.3 63V CEA 333P 63	R31	Carbon Film	120
C17	Capacitor	22 50V CGESL 220K 50	R32	Carbon Film	120
C18	Capacitor	22 50V CGESL 220K 50	R33	Carbon Film	56
C19	Capacitor	470k 50V CGDVE 471K 50	R34	Carbon Film	56
C20	Capacitor	470k 50V CGDVE 471K 50	R35	Carbon Film	330K
C21	Capacitor	470k 50V CGDVE 471K 50	R36	Carbon Film	330K
C22	Capacitor	470k 50V CGDVE 471K 50	R37	Carbon Film	10K
C23	Water	0.0018 50V CGMA 180K 50	R38	Carbon Film	10K
C24	Water	0.0012 50V CGMA 120K 50	R39	Carbon Film	2.2K
C25	Water	0.0007 50V CGMA 77K 50	R40	Carbon Film	2.2K
C26	Water	0.0007 50V CGMA 77K 50	R41	Carbon Film	612
C27	Electrolytic	22 16V CEALH 220P 16	R42	Carbon Film	512
C28	Electrolytic	22 16V CEALH 220P 16	V11	Variable resistor 10K 0.2W	ACE-365
C29	Capacitor	0.01 50V CGDVE 100K 50			
C30	Capacitor	0.01 50V CGDVE 100K 50			

RESISTORS AND POTENTIOMETERS


Symbol	Description	Part No.
R1	Carbon Film	82k RQ4P 82K
R2	Carbon Film	82k RQ4P 82K
R3	Carbon Film	150k RQ4P 15K
R4	Carbon Film	150k RQ4P 15K
R5	Carbon Film	43k RQ4P 43K
R6	Carbon Film	43k RQ4P 43K
R7	Carbon Film	3k RQ4P 30K
R8	Carbon Film	3k RQ4P 30K
R9	Carbon Film	1k RQ4P 10K
R10	Carbon Film	1k RQ4P 10K
R11	Metall Film	1.54k 10W RNS15R 1541F
R12	Metall Film	1.54k 10W RNS15R 1541F
R13	Metall Film	75k 10W RNS15R 7522F
R14	Metall Film	75k 10W RNS15R 7522F
R15	Metall Film	910k 10W RNS15R 9102F


SEMICONDUCTORS

Symbol	Description	Part No.
Q1	Transistor	2SA736-F or G
Q2	Transistor	2SA444-G or -H
Q3	Transistor	2SA444-G or -H
Q4	Transistor	2SA736-F or G
Q5	Transistor	2SC1754-A or F
Q7	Transistor	2SC1895-A or -G
Q8	Transistor	2SC1895-A or -G
Q9	Transistor	2SA736-F or G
Q10	Transistor	2SA736-F or G
Q11	Diode	1N2700
Q12	Diode	1N2700

Part No.	Description	Part No.
03	Circle	112470
04	Circle	112470
05	Circle	112470
06	Circle	112470

Part No.	Description	Part No.
07	Primary Control FUNCTIONAL	445-039

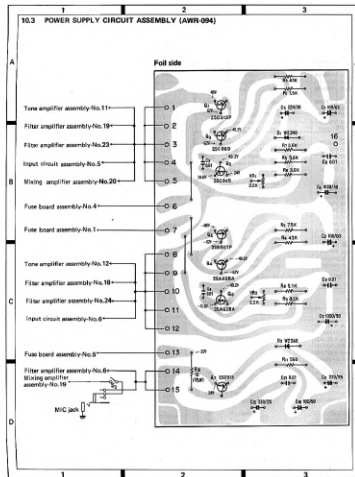

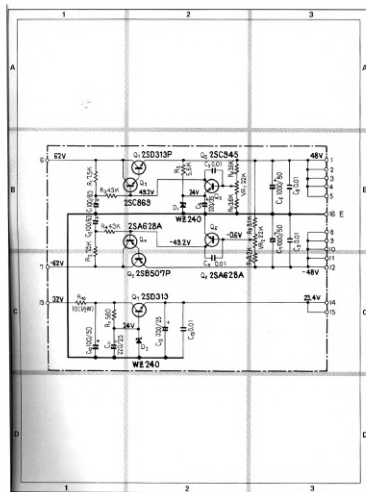

Parts List of Power Supply Circuit Assembly (AWR-004)

CAPACITORS


Symbol	Description	Part No.	Symbol	Description	Part No.
C1	Electrolytic 100 60V	CEA 101P 60	C21	Zener diode	WE240
C2	Electrolytic 100 60V	CEA 101P 60	C22	Zener diode	WE240
C3	Ceramic 0.01 50V	CKD1Y 1022 50			
C4	Ceramic 0.01 50V	CKD1Y 1022 50			
C5	Electrolytic 250 20V	CEA 221P 25			
C6	Electrolytic 1000 60V	CEA 103P 60			
C7	Electrolytic 1000 60V	CEA 103P 60			
C8	Ceramic 0.01 50V	CKD1Y 1022 50			
C9	Ceramic 0.01 50V	CKD1Y 1022 50			
C10	Electrolytic 100 50V	CEA 101P 50			
C11	Electrolytic 250 20V	CEA 221P 25			
C12	Electrolytic 350 20V	CEA 351P 25			
C13	Ceramic 0.01 50V	CKD1Y 1022 50			


RESISTORS AND POTENTIOMETERS

Symbol	Description	Part No.
R1	Carbon Film 7.5k	RDUPF 75J
R2	Carbon Film 7.5k	RDUPF 75J
R3	Carbon Film 45k	RDUPF 45J
R4	Carbon Film 45k	RDUPF 45J
R5	Carbon Film 50k	RDUPF 50J
R6	Carbon Film 3.6k	RDUPF 36J
R7	Carbon Film 3.6k	RDUPF 36J
R8	Carbon Film 9.1k	RDUPF 91J
R9	Carbon Film 0.2k	RDUPF 22J
R10	Carbon Film 10 3W	RDUPF 10G
R11	Carbon Film 550	RDUPF 561J
VR1	Slide Resist 2.2k-B	ADP 205
VR2	Slide Resist 2.2k-B	ADP 205

SEMICONDUCTORS

Symbol	Description	Part No.
Q1	Transistor 2N2033-P or E	2N2033-P or E
Q2	Transistor 2N2033-P or E	2N2033-P or E
Q3	Transistor 2N2033-P or E	2N2033-P or E
Q4	Transistor 2N2033-P or E	2N2033-P or E
Q5	Transistor 2N2033-P or E	2N2033-P or E
Q6	Transistor 2N2033-P or E	2N2033-P or E
Q7	Transistor 2N2033-P or E	2N2033-P or E

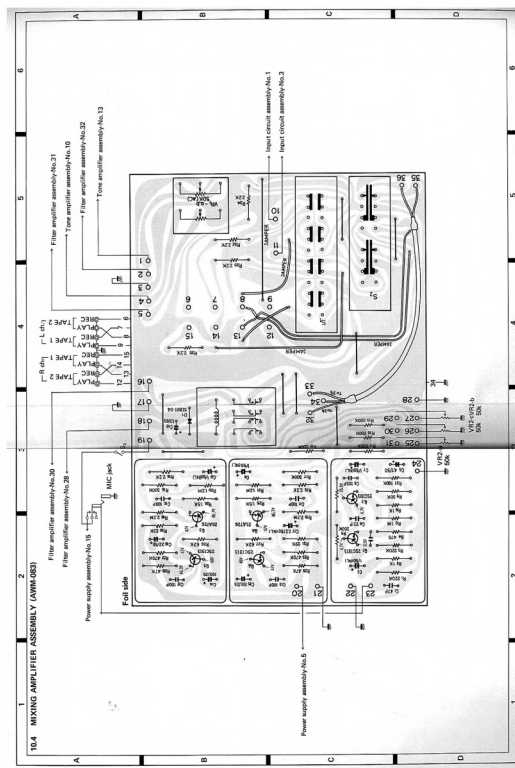

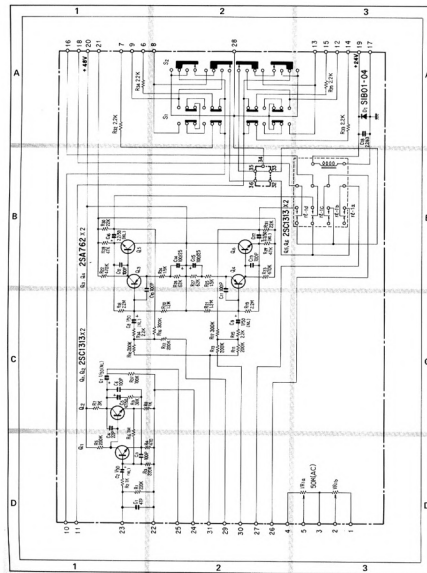

Parts List of Mixing Amplifier Assembly (AWM-083)

CAPACITORS

Symbol	Description	Part No.	Symbol	Description	Part No.			
C1	Ceramic	47µ	50V	CG20L 470K 50	R08	Carbon film	47K	RDUPS 6211
C2	Electrolytic	1µ	50V	CEANL 100P 50	R09	Carbon film	47K	RDUPS 6212
C3	Ceramic	100	50V	CG20L 101K 50	R10	Carbon film	47K	RDUPS 6213
C4	Ceramic	250	50V	CG20L 250K 50	R11	Carbon film	47K	RDUPS 6214
C5	Electrolytic	4.7	50V	CEA 401P 50	R12	Carbon film	30K	RDUPS 2211
C6	Ceramic	1000	50V	CG20L 101K 50	R13	Carbon film	27K	RDUPS 2212
C7	Electrolytic	1	50V	CEANL 010P 50	R14	Carbon film	2.2K	RDUPS 2213
C8	Electrolytic	1	50V	CEANL 010P 50	R15	Carbon film	2.2K	RDUPS 2214
C9	Electrolytic	1	50V	CEANL 010P 50	R16	Carbon film	2.2K	RDUPS 2215
C10	Ceramic	1000	50V	CG20L 101K 50	R17	Carbon film	2.2K	RDUPS 2216
C11	Ceramic	1000	50V	CG20L 101K 50	R18	Carbon film	100K	RDUPS 1041
C12	Ceramic	1000	50V	CG20L 101K 50	R19	Carbon film	100K	RDUPS 1042
C13	Ceramic	1000	50V	CG20L 101K 50	R20	Carbon film	100K	RDUPS 1043
C14	Electrolytic	100	25V	CEA 101P 25	R21	Variable resistor	50K, A, C (WALLMOUNT)	ACV-145
C15	Electrolytic	100	25V	CEA 101P 25				
C16	Electrolytic	2.2	50V	CEANL 220P 50				
C17	Electrolytic	2.2	50V	CEANL 220P 50				
C18	Electrolytic	2.2	50V	CEA 220P 50				

RESISTORS AND POTENTIOMETERS


Symbol	Description	Part No.
R1	Carbon film	220K
R2	Carbon film	1K
R3	Carbon film	220K
R4	Carbon film	470
R5	Carbon film	200K
R6	Carbon film	1M
R7	Carbon film	1K
R8	Carbon film	1K
R9	Carbon film	30K
R10	Carbon film	200K
R11	Carbon film	200K
R12	Carbon film	200K
R13	Carbon film	200
R14	Carbon film	2.2K
R15	Carbon film	2.2K
R16	Carbon film	300K
R17	Carbon film	300K
R18	Carbon film	3.2K
R19	Carbon film	2.2K
R20	Carbon film	1.2K
R21	Carbon film	1.2K
R22	Carbon film	47K
R23	Carbon film	47K
R24	Carbon film	1.5K
R25	Carbon film	1.5K


SEMICONDUCTORS

Symbol	Description	Part No.
Q1	Transistor	2SC1313 G or H (2SC1681 G or H)
Q2	Transistor	2SC1313 G or H (2SC1681 G or H)
Q3	Transistor	2SA728 P or S (2SA811 G or H)
Q4	Transistor	2SA728 P or S (2SA811 G or H)
Q5	Transistor	2SC1313 G or H (2SC1681 G or H)
Q6	Transistor	2SC1313 G or H (2SC1681 G or H)
Q7	Diode	1N91-04

OTHERS

Symbol	Description	Part No.
S1	Low-leak (FARE DUPLICATOR)	AKB-086
S2	Low-leak (FARE MONITOR)	AKB-086
	Plate	AKB-012

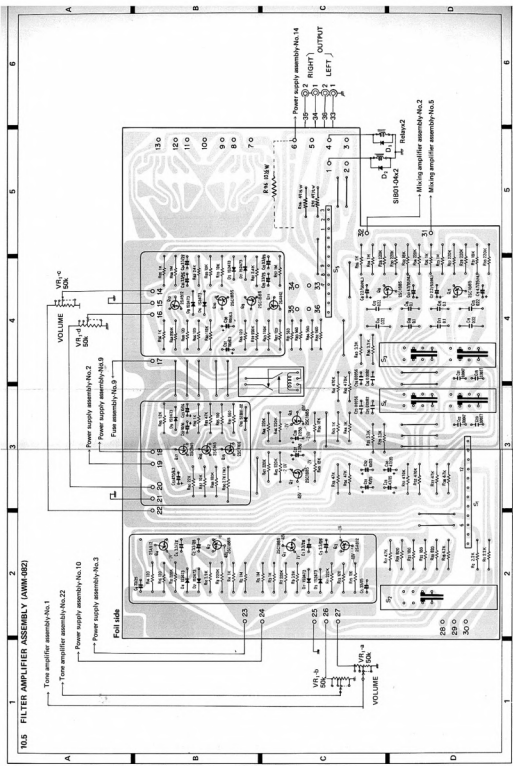

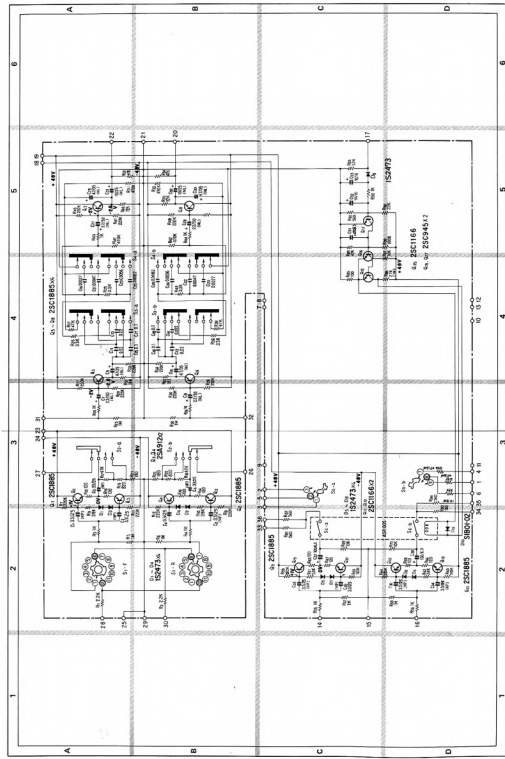

Parts List of Filter Amplifier Assembly (AWM-082)

CAPACITORS

Symbol	Description	Part No.
C1	Electrolytic 3.3 20V ACH-302	
C2	Electrolytic 3.3 20V ACH-302	
C3	Electrolytic 3.3 20V ACH-302	
C4	Electrolytic 3.3 20V ACH-302	
C5	Electrolytic 33 20V CEA 100M 200P	
C6	Electrolytic 33 20V CEA 100M 200P	
C7	Electrolytic 2.2 50V CEANL 2K2P 50	
C8	Electrolytic 2.2 50V CEANL 2K2P 50	
C9	Electrolytic 4.7 50V CEANL 4K7P 50	
C10	Electrolytic 4.7 50V CEANL 4K7P 50	
C11	Mylar 0.22 50V COMA 224J 50	
C12	Mylar 0.22 50V COMA 224J 50	
C13	Mylar 0.22 50V COMA 224J 50	
C14	Mylar 0.22 50V COMA 224J 50	
C15	Mylar 0.1 50V COMA 104J 50	
C16	Mylar 0.1 50V COMA 104J 50	
C17	Mylar 0.1 50V COMA 104J 50	
C18	Mylar 0.1 50V COMA 104J 50	
C19	Mylar 0.0027 50V COMA 27J 50	
C20	Mylar 0.0027 50V COMA 27J 50	
C21	Mylar 0.0047 50V COMA 47J 50	
C22	Mylar 0.0047 50V COMA 47J 50	
C23	Mylar 0.0008 50V COMA 82J 50	
C24	Mylar 0.0008 50V COMA 82J 50	
C25	Mylar 0.0008 50V COMA 82J 50	
C26	Mylar 0.0002 50V COMA 22J 50	
C27	Electrolytic 2.2 50V CEANL 2K2P 50	
C28	Electrolytic 2.2 50V CEANL 2K2P 50	
C29	Electrolytic 4.7 50V CEANL 4K7P 50	
C30	Electrolytic 4.7 50V CEANL 4K7P 50	
C31	Electrolytic 10 20V CEANL 100P 20	
C32	Electrolytic 10 20V CEANL 100P 20	
C33	Electrolytic 3.3 20V ACH-302	
C34	Electrolytic 3.3 20V ACH-302	
C35	Electrolytic 3.3 20V ACH-302	
C36	Electrolytic 3.3 20V ACH-302	
C37	Electrolytic 100 8.5V CEA 100F 80J	
C38	Electrolytic 100 8.5V CEA 100F 80J	
C39	
C40	
C41	
C42	
C43	
C44	
C45	
C46	
C47	
C48	


Symbol	Description	Part No.
C89	
C90	
C91	Electrolytic 400 6.2V CEA 400F 60J	
C92	Electrolytic 10 16V CEA 100P 16	
C93	Electrolytic 10 16V CEA 100P 16	


RESISTORS

Symbol	Description	Part No.
R1	Carbon film 27K	RDUPS 221J
R2	Carbon film 2.2K	RDUPS 222J
R3	Carbon film 1K	RDUPS 202J
R4	Carbon film 1K	RDUPS 202J
R5	Carbon film 1M	RDUPS 100J
R6	Carbon film 1M	RDUPS 100J
R7	Carbon film 20K	RDUPS 204J
R8	Carbon film 200K	RDUPS 204J
R9	Carbon film 2.2K	RDUPS 202J
R10	Carbon film 3.9K	RDUPS 202J
R11	Carbon film 200K	RDUPS 204J
R12	Carbon film 200K	RDUPS 204J
R13	Carbon film 100	RDUPS 121J
R14	Carbon film 100	RDUPS 121J
R15	Carbon film 120	RDUPS 121J
R16	Carbon film 100	RDUPS 121J
R17	Carbon film 4.7K	RDUPS 472J
R18	Carbon film 4.7K	RDUPS 472J
R19	Carbon film 6.7K	RDUPS 672J
R20	Carbon film 820	RDUPS 821J
R21	Carbon film 180	RDUPS 181J
R22	Carbon film 180	RDUPS 181J
R23	Carbon film 18	RDUPS 102J
R24	Carbon film 18	RDUPS 102J
R25	Carbon film 1K	RDUPS 100J
R26	Carbon film 1K	RDUPS 100J
R27	Carbon film 200K	RDUPS 204J
R28	Carbon film 200K	RDUPS 204J
R29	Carbon film 200K	RDUPS 204J
R30	Carbon film 200K	RDUPS 204J
R31	Carbon film 10K	RDUPS 100J
R32	Carbon film 10K	RDUPS 100J
R33	Carbon film 200K	RDUPS 204J
R34	Carbon film 200K	RDUPS 204J
R35	Carbon film 3.3K	RDUPS 331J
R36	Carbon film 47K	RDUPS 472J
R37	Carbon film 47K	RDUPS 472J
R38	Carbon film 2.2K	RDUPS 222J
R39	Carbon film 2.2K	RDUPS 222J
R40	Carbon film 3.3K	RDUPS 331J
R41	Carbon film 47K	RDUPS 472J
R42	Carbon film 47K	RDUPS 472J
R43	Carbon film 1K	RDUPS 100J

Symbol	Description	Part No.	Symbol	Description	Part No.
R44	Carbon film	1k	ROJPS 102J		
R45	Carbon film	220k	ROJPS 220J	G1	Transistor 2SC1885-R, S or G
R46	Carbon film	220k	ROJPS 220J	G2	Transistor 2SC1885-P, S or G
R47	Carbon film	220k	ROJPS 220J	G3	Transistor 2SA492-P, S or G
R48	Carbon film	220k	ROJPS 220J	G4	Transistor 2SA492-R, S or G
R49	Carbon film	220k	ROJPS 220J	G5	Transistor 2SC1885-R, S or G
R48	Carbon film	12k	ROJPS 120J	G6	Transistor 2SC1885-P, V or S
R52	Carbon film	12k	ROJPS 120J		
R51	Carbon film	470k	ROJPS 470J	G6	Transistor 2SC1885-R, S or G
R52	Carbon film	470k	ROJPS 470J	G7	Transistor 2SC1885-P, V or S
R53	Carbon film	47k	ROJPS 47J	G7	Transistor 2SC1885-R, S or G
R54	Carbon film	47k	ROJPS 47J	G8	Transistor 2SC1885-P, V or S
R55	Carbon film	1k	ROJPS 102J	G8	Transistor 2SC1885-R, S or G
R55	Carbon film	1k	ROJPS 102J		
R56	Carbon film	1k	ROJPS 102J	G9	Transistor 2SC1885-R, S or G
R57	Carbon film	10k	ROJPS 10KJ	G10	Transistor 2SC1885-P, V or S
R58	Carbon film	10k	ROJPS 10KJ	G11	Transistor 2SA492-P, S or G
R59	Carbon film	220k	ROJPS 220J	G12	Transistor 2SA492-R, S or G
R60	Carbon film	220k	ROJPS 220J	G13	Transistor 2SC1885-R, S or G
R61	Carbon film	2.2k	ROJPS 222J	G14	Transistor 2SC1885-P, V or S
R62	Carbon film	2.2k	ROJPS 222J	G15	Transistor 2SC1885-R, S or G
R63	Carbon film	110k	ROJPS 110J	G16	Transistor 2SC1885-P, V or S
R64	Carbon film	110k	ROJPS 110J	G16	Transistor 2SC1885-R, S or G
R65	Carbon film	30k	ROJPS 30J	G17	Transistor 2SC1885-P, V or S
R66	Carbon film	30k	ROJPS 30J		
R67	Carbon film	30k	ROJPS 30J		
R68	Carbon film	30k	ROJPS 30J		
R69	Carbon film	10k	ROJPS 10KJ	G1	Diode 15K075
R70	Carbon film	10k	ROJPS 10KJ	G2	Diode 15K050
R71		G3	Diode 15K050
R72		G4	Diode 15K075
R73		G5	Diode 15K050
R74		G6	Diode 15K075
R75		G7	Diode 15K050
R76		G8	Diode 15K075
R77		G9	Diode 15K050
R78		G10	Diode 15K075
R79		G11	Diode 15K050
R80		G12	Diode 15K075
R81	Carbon film	560	ROJPS 561J		
R82	Carbon film	560	ROJPS 561J		
R83	Carbon film	560	ROJPS 561J		
R84	Carbon film	560	ROJPS 561J		
R85	Carbon film	100	ROJPS 101J		
R86	Metal oxide	5.1k 1W	ROJSP 272K	G13	Diode 500V 02
R87	Carbon film	10k	ROJPS 10KJ		
R88	Carbon film	180k	ROJPS 180J		
R89	Carbon film	47k	ROJPS 47J		
R90	Carbon film	22k	ROJPS 222J		
R91	Carbon film	680	ROJPS 681J	S1	Resistor network (MULTIPLY)
R92	Carbon film	1k	ROJPS 102J	S2	Low level ATTENUATORS
R93	Carbon film	1.2k	ROJPS 122J	S3	Low level EQUALIZERS
R94	Carbon film	47 1W	ROJPS 470J	S4	Low level HIGH FILTERS
R95	Carbon film	47 1W	ROJPS 470J	S5	Power output SPEAKERS
R96	Carbon film	10 1W	ROJPS 100J	S6	Fixed relay (MULTIPLY)

Symbol	Description	Part No.
S1	Resistor network (MULTIPLY)	ADJ-045
S2	Low level ATTENUATORS	ADJ-081
S3	Low level EQUALIZERS	ADJ-085
S4	Low level HIGH FILTERS	ADJ-086
S5	Power output SPEAKERS	ADJ-045
S6	Fixed relay (MULTIPLY)	ADJ-008

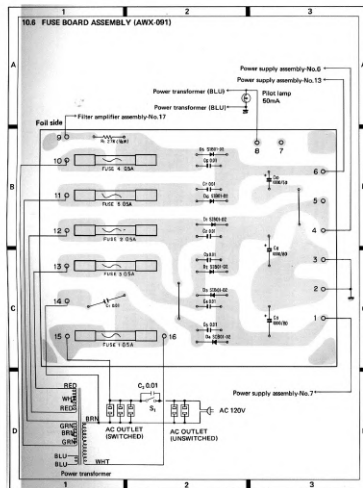



Parts List of Fuse Board Assembly (AWX-001)

CAPACITORS


Symbol	Description	Part No.
C1	Ceramic 0.01 100V ACG-003	
C2	Ceramic 0.01 100V ACG-004	
C3	Ceramic 0.01 100V ACG-004	
C4	Ceramic 0.01 100V ACG-004	
C5	Ceramic 0.01 100V ACG-004	
C6	Ceramic 0.01 100V ACG-004	
C7	Ceramic 0.01 100V ACG-004	
C8	Electrolytic 1,000 80V ACH-003	
C9	Electrolytic 1,000 80V ACH-003	
C10	Electrolytic 1,000 50V CEL-100P 55	

SEMICONDUCTORS

Symbol	Description	Part No.
D1	Diode	51001-02
D2	Diode	1101000
D3	Diode	1101000
D4	Diode	1101000
D5	Diode	1101000
D6	Diode	1101000

RESISTOR

Symbol	Description	Part No.
R1	Carbon Film 3-75	ES2-375 2733

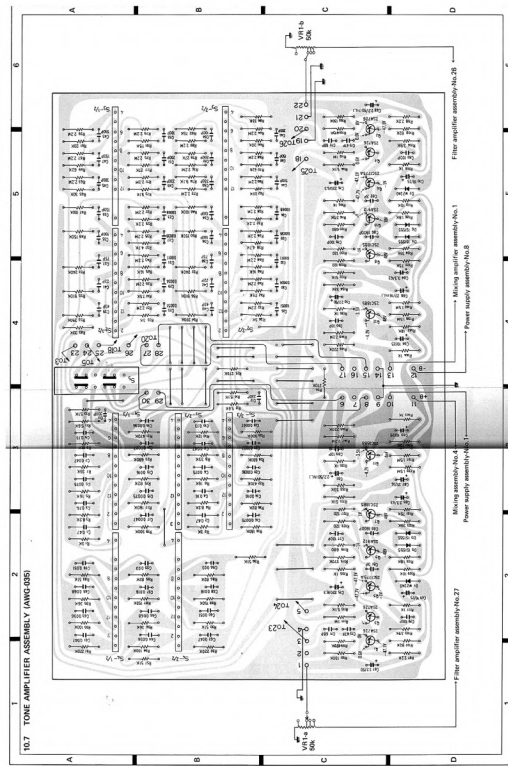


107 TONE JUMPER ASSEMBLY (ANGORS)

Filter amplifier assembly/Mod.26

Power supply assembly/Mod.1

1001, 1002, 1003, 1004
Power supply assembly/Mod.1

Filter amplifier assembly/Mod.27

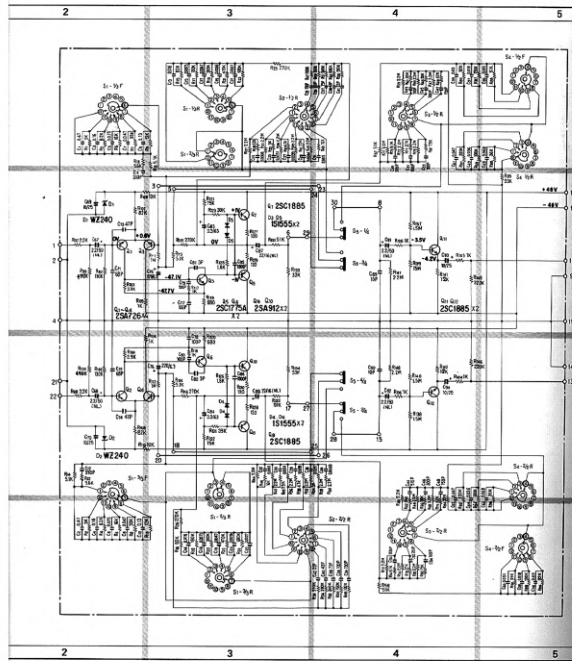

Parts List of Tone Amplifier Assembly (AWG-035)

CAPACITORS

Symbol	Description	Part No.	Symbol	Description	Part No.		
C1	Mylar	0.01	CGMA 4146 50	C48	Styrol	100u	CGSA 111 J 50
C2	Mylar	0.47	CGMA 4146 50	C49	Styrol	200u	CGSA 111 J 50
C3	Mylar	0.15	CGMA 1642 50	C50	Styrol	200u	CGSA 111 J 50
C4	Mylar	0.15	CGMA 1642 50	C51	Styrol	200u	CGSA 201 J 50
C5	Mylar	0.025	CGMA 1642 50	C52	Styrol	200u	CGSA 201 J 50
C6	Mylar	0.015	CGMA 1631 50	C53	Styrol	100u	CGSA 101 J 50
C7	Mylar	0.025	CGMA 1631 50	C54	Styrol	100u	CGSA 101 J 50
C8	Mylar	0.047	CGMA 4731 50	C55	Mylar	0.03	CGMA 3031 50
C9	Mylar	0.13	CGMA 1341 50	C56	Mylar	0.03	CGMA 3031 50
C10	Mylar	0.13	CGMA 1341 50	C57	Mylar	0.018	CGMA 181 J 50
C11	Styrol	390u	CGSA 391 J 50	C58	Mylar	0.018	CGMA 181 J 50
C12	Styrol	390u	CGSA 391 J 50	C59	Mylar	0.025	CGMA 251 J 50
C13	Mylar	0.015	CGMA 1631 50	C60	Mylar	0.025	CGMA 251 J 50
C14	Mylar	0.015	CGMA 1631 50	C61	Mylar	0.047	CGMA 471 J 50
C15	Mylar	0.015	CGMA 1631 50	C62	Mylar	0.047	CGMA 471 J 50
C16	Mylar	0.0075	CGMA 7521 50	C63	Mylar	0.025	CGMA 251 J 50
C17	Mylar	0.0047	CGMA 4721 50	C64	Mylar	0.025	CGMA 251 J 50
C18	Mylar	0.0047	CGMA 4721 50	C65	Mylar	0.068	CGMA 681 J 50
C19	Mylar	0.0036	CGMA 3621 50	C66	Mylar	0.068	CGMA 681 J 50
C20	Mylar	0.0036	CGMA 3621 50	C67	Electrolytic	2.2	CEAL 202P 50
C21	Mylar	0.0027	CGMA 2721 50	C68	Electrolytic	2.2	CEAL 202P 50
C22	Mylar	0.0027	CGMA 2721 50	C69	Electrolytic	10	CEA 100P 25
C23	Mylar	0.0088	CGMA 8821 50	C70	Electrolytic	10	CEA 100P 25
C24	Mylar	0.0088	CGMA 8821 50	C71	Ceramic	40p	CCCL 400K 50
C25	Mylar	0.0051	CGMA 5121 50	C72	Ceramic	40p	CCCL 400K 50
C26	Mylar	0.0039	CGMA 3921 50	C73	Ceramic	47p	CCCL 470K 50
C27	Mylar	0.0039	CGMA 3921 50	C74	Ceramic	47p	CCCL 470K 50
C28	Mylar	0.0028	CGMA 2821 50	C75	Electrolytic	220	CEA 221P 6.3
C29	Mylar	0.0028	CGMA 2821 50	C76	Electrolytic	220	CEA 221P 6.3
C30	Mylar	0.0024	CGMA 2421 50	C77	Ceramic	100u	CCCL 100K 50
C31	Mylar	0.0024	CGMA 2421 50	C78	Ceramic	100u	CCCL 100K 50
C32	Mylar	0.0011	CGMA 1121 50	C79	Ceramic	100u	CCCL 100K 50
C33	Mylar	0.0011	CGMA 1121 50	C80	Ceramic	100u	CCCL 100K 50
C34	Styrol	120u	CGSA 121 J 50	C81	Ceramic	2p	CCCL 200K 50
C35	Styrol	120u	CGSA 121 J 50	C82	Ceramic	2p	CCCL 200K 50
C36	Styrol	100u	CGSA 101 J 50	C83	Electrolytic	2.2	CEA 202P 50
C37	Styrol	76u	CGSA 761 J 50	C84	Electrolytic	2.2	CEA 202P 50
C38	Styrol	76u	CGSA 761 J 50	C85	Ceramic	0.0018	CKV18 102K 50
C39	Styrol	43u	CGSA 431 J 50	C86	Ceramic	0.0018	CKV18 102K 50
C40	Styrol	43u	CGSA 431 J 50	C87	Electrolytic	22	CEAL 220P 16
C41	Styrol	43u	CGSA 431 J 50	C88	Electrolytic	22	CEAL 220P 16
C42	Styrol	43u	CGSA 431 J 50	C89	Ceramic	10p	CCCL 100K 50
C43	Styrol	61u	CGSA 611 J 50	C90	Ceramic	10p	CCCL 100K 50
C44	Styrol	61u	CGSA 611 J 50	C91	Electrolytic	2.2	CEAL 202P 50
C45	Styrol	76u	CGSA 761 J 50	C92	Electrolytic	2.2	CEAL 202P 50
C46	Styrol	300u	CGSA 301 J 50	C93	Electrolytic	10	CEA 100P 25
C47	Styrol	300u	CGSA 301 J 50	C94	Electrolytic	10	CEA 100P 25

RESISTORS

Part No.	Description	Part No.	Part No.	Description	Part No.
R01	Carbon Film 2k	RDUPS 3022	R61	Carbon Film 240k	RDUPS 2440
R02	Carbon Film 2k	RDUPS 3022	R62	Carbon Film 200k	RDUPS 2040
R03	Carbon Film 8.2k	RDUPS 8221	R63	Carbon Film 200k	RDUPS 2040
R04	Carbon Film 8.2k	RDUPS 8221	R64	Carbon Film 200k	RDUPS 2040
R05	Carbon Film 10k	RDUPS 1021	R65	Carbon Film 910k	RDUPS 9140
R06	Carbon Film 10k	RDUPS 1021	R66	Carbon Film 910k	RDUPS 9140
R07	Carbon Film 12k	RDUPS 1221	R67	Carbon Film 57k	RDUPS 5730
R08	Carbon Film 12k	RDUPS 1221	R68	Carbon Film 57k	RDUPS 5730
R09	Carbon Film 12k	RDUPS 1221	R69	Carbon Film 2.2M	RDUPS 2220
R10	Carbon Film 12k	RDUPS 1221	R70	Carbon Film 2.2M	RDUPS 2220
R11	Carbon Film 5.6k	RDUPS 5621	R81	Carbon Film 20k	RDUPS 2020
R12	Carbon Film 5.6k	RDUPS 5621	R82	Carbon Film 20k	RDUPS 2020
R13	Carbon Film 5.1k	RDUPS 5121	R83	Carbon Film 2.2M	RDUPS 2220
R14	Carbon Film 5.1k	RDUPS 5121	R84	Carbon Film 2.2M	RDUPS 2220
R15	Carbon Film 5.1k	RDUPS 5121	R85	Carbon Film 20k	RDUPS 2020
R16	Carbon Film 82k	RDUPS 8221	R86	Carbon Film 30k	RDUPS 3020
R17	Carbon Film 180k	RDUPS 1841	R87	Carbon Film 2.2M	RDUPS 2220
R18	Carbon Film 180k	RDUPS 1841	R88	Carbon Film 2.2M	RDUPS 2220
R19	Carbon Film 300k	RDUPS 3041	R89	Carbon Film 62k	RDUPS 6220
R20	Carbon Film 300k	RDUPS 3041	R90	Carbon Film 62k	RDUPS 6220
R21	Carbon Film 470k	RDUPS 4741	R91	Carbon Film 2.2M	RDUPS 2220
R22	Carbon Film 470k	RDUPS 4741	R92	Carbon Film 2.2M	RDUPS 2220
R23	Carbon Film 680k	RDUPS 6841	R93	Carbon Film 9.1k	RDUPS 9120
R24	Carbon Film 680k	RDUPS 6841	R94	Carbon Film 9.1k	RDUPS 9120
R25	Carbon Film 770k	RDUPS 7741	R95	Carbon Film 2.2M	RDUPS 2220
R26	Carbon Film 27k	RDUPS 2741	R96	Carbon Film 2.2M	RDUPS 2220
R27	Carbon Film 2.2M	RDUPS 2221	R97	Carbon Film 27k	RDUPS 2720
R28	Carbon Film 2.2M	RDUPS 2221	R98	Carbon Film 27k	RDUPS 2720
R29	Carbon Film 2.2k	RDUPS 2221	R99	Carbon Film 2.2M	RDUPS 2220
R30	Carbon Film 2.2k	RDUPS 2221	R100	Carbon Film 2.2M	RDUPS 2220
R31	Carbon Film 2.2M	RDUPS 2221	R81	Carbon Film 75k	RDUPS 7520
R32	Carbon Film 2.2M	RDUPS 2221	R82	Carbon Film 75k	RDUPS 7520
R33	Carbon Film 2k	RDUPS 2021	R83	Carbon Film 22k	RDUPS 2220
R34	Carbon Film 2k	RDUPS 2021	R84	Carbon Film 22k	RDUPS 2220
R35	Carbon Film 2.2M	RDUPS 2221	R85	Carbon Film 82k	RDUPS 8220
R36	Carbon Film 2.2M	RDUPS 2221	R86	Carbon Film 82k	RDUPS 8220
R37	Carbon Film 4.7k	RDUPS 4721	R87	Carbon Film 100k	RDUPS 1040
R38	Carbon Film 4.7k	RDUPS 4721	R88	Carbon Film 100k	RDUPS 1040
R39	Carbon Film 2.2M	RDUPS 2221	R89	Carbon Film 51k	RDUPS 5120
R40	Carbon Film 2.2M	RDUPS 2221	R90	Carbon Film 51k	RDUPS 5120
R41	Carbon Film 7.5k	RDUPS 7521	R91	Carbon Film 200k	RDUPS 2040
R42	Carbon Film 7.5k	RDUPS 7521	R92	Carbon Film 200k	RDUPS 2040
R43	Carbon Film 2.2M	RDUPS 2221	R93	Carbon Film 100k	RDUPS 1040
R44	Carbon Film 2.2M	RDUPS 2221	R94	Carbon Film 100k	RDUPS 1040
R45	Carbon Film 10k	RDUPS 1021	R95	Carbon Film 30k	RDUPS 3020
R46	Carbon Film 10k	RDUPS 1021	R96	Carbon Film 30k	RDUPS 3020
R47	Carbon Film 100k	RDUPS 1041	R97	Carbon Film 2.2k	RDUPS 2220
R48	Carbon Film 100k	RDUPS 1041	R98	Carbon Film 2.2k	RDUPS 2220
R49	Carbon Film 10k	RDUPS 1041	R99	Carbon Film 47k	RDUPS 4720
R50	Carbon Film 100k	RDUPS 1041	R100	Carbon Film 47k	RDUPS 4720

Symbol	Description	Part No.
R101	Carbon film 150k	RD4PS 134J
R102	Carbon film 150k	RD4PS 134J
R103	Carbon film 3.9k	RD4PS 382J
R104	Carbon film 2.2k	RD4PS 202J
R105	Carbon film 1k	RD4PS 102J
R106	Carbon film 1k	RD4PS 102J
R107	Carbon film 65k	RD4PS 62J
R108	Carbon film 65k	RD4PS 62J
R109	Carbon film 10k	RD4PS 102J
R110	Carbon film 10k	RD4PS 102J
R111	Carbon film 1M	RD4PS 104J
R112	Carbon film 1M	RD4PS 104J
R113	Carbon film 5.1k	RD4PS 512J
R114	Carbon film 5.1k	RD4PS 512J
R115	Carbon film 270k	RD4PS 274J
R116	Carbon film 1k	RD4PS 102J
R117	Carbon film 1k	RD4PS 102J
R118	Carbon film 680	RD4PS 681J
R119	Carbon film 680	RD4PS 681J
R120	Carbon film 75k	RD4PS 751J
R121	Carbon film 75k	RD4PS 751J
R122	Carbon film 39k	RD4PS 392J
R123	Carbon film 39k	RD4PS 392J
R124	Carbon film 2.2k	RD4PS 222J
R125	Carbon film 2.2k	RD4PS 222J
R126	Carbon film 120	RD4PS 121J
R127	Carbon film 120	RD4PS 121J
R128	Carbon film 120	RD4PS 121J
R129	Carbon film 120	RD4PS 121J
R130	Carbon film 120	RD4PS 121J
R131	Carbon film 51k	RD4PS 511J
R132	Carbon film 51k	RD4PS 511J
R133	Carbon film 33k	RD4PS 331J
R134	Carbon film 33k	RD4PS 331J
R135	Carbon film 1k	RD4PS 102J
R136	Carbon film 1.5M	RD4PS 150J
R137	Carbon film 1.5M	RD4PS 150J
R138	Carbon film 1.5M	RD4PS 150J
R139	Carbon film 1.5M	RD4PS 150J
R140	Carbon film 1.5M	RD4PS 150J
R141	Carbon film 15k	RD4PS 151J
R142	Carbon film 15k	RD4PS 151J
R143	Carbon film 1k	RD4PS 102J
R144	Carbon film 1k	RD4PS 102J
R145	Carbon film 220k	RD4PS 224J
R146	Carbon film 220k	RD4PS 224J
R147	Carbon film 2.2M	RD4PS 225J
R148	Carbon film 2.2M	RD4PS 225J
R149	Carbon film 2.2M	RD4PS 225J

SEMICONDUCTORS

Symbol	Description	Part No.
Q1	Transistor	2SA75A-F, G
Q2	Transistor	2SA75A-F, G or B-L
Q3	Transistor	2SA75A-F, G
Q4	Transistor	2SA75A-F, G
Q5	Transistor	2SA75A-F, G
Q6	Transistor	2SC773A-E, F
Q7	Transistor	2SC1885-B, S or G
Q8	Transistor	2SC1885-B, S or G
Q9	Transistor	2SA412A, S or G
Q10	Transistor	2SA412A, S or G
Q11	Transistor	2SC1885-B, S or G
Q12	Transistor	2SC1819V, S or G
Q1	Zener diode	WE240
Q2	Zener diode	WE240
Q3	Diode	15D43
Q4	Diode	15D43
Q5	Diode	15D43
Q6	Diode	15D43

SWITCHES

Symbol	Description	Part No.
S1	Rotary switch (NO/NC/NO/NC)	ASD-040
S2	Rotary switch (7P/8L/8/10A/10)	ASD-040
S3	Rotary switch (7P/8L/8/10A/10)	ASD-040
S4	Rotary switch (NO/NC/NO/NC)	ASD-041
S5	Rotary switch (7P/8L)	ASD-041

Number	Description	Part No.
R101	Carbon film	100k
R102	Carbon film	1.2k
R103	Carbon film	3.3k
R104	Carbon film	3.9k
R105	Carbon film	1k
R106	Carbon film	1k
R107	Carbon film	82k
R108	Carbon film	82k
R109	Carbon film	10k
R110	Carbon film	10k
R111	Carbon film	1M
R112	Carbon film	1M
R113	Carbon film	5.1k
R114	Carbon film	5.1k
R115	Carbon film	270k
R116	Carbon film	270k
R117	Carbon film	1k
R118	Carbon film	1k
R119	Carbon film	680
R120	Carbon film	680
R121	Carbon film	75k
R122	Carbon film	75k
R123	Carbon film	20k
R124	Carbon film	20k
R125	Carbon film	2.2k
R126	Carbon film	2.2k
R127	Carbon film	120
R128	Carbon film	120
R129	Carbon film	120
R130	Carbon film	120
R131	Carbon film	120
R132	Carbon film	51k
R133	Carbon film	51k
R134	Carbon film	23k
R135	Carbon film	23k
R136	Carbon film	1k
R137	Carbon film	1.5M
R138	Carbon film	1.5M
R139	Carbon film	1.5M
R140	Carbon film	1.5M
R141	Carbon film	15k
R142	Carbon film	15k
R143	Carbon film	1k
R144	Carbon film	20k
R145	Carbon film	20k
R146	Carbon film	200k
R147	Carbon film	2.2M
R148	Carbon film	2.2M

SEMICONDUCTORS

Number	Description	Part No.
Q1	Transistor	2N426 P, G
Q2	Transistor	2N426 P, G
Q3	Transistor	2N426 P, G
Q4	Transistor	2N426 P, G
Q5	Transistor	2N426 P, G
Q6	Transistor	2N426 P, G
Q7	Transistor	2N426 P, G
Q8	Transistor	2N426 P, G
Q9	Transistor	2N426 P, G
Q10	Transistor	2N426 P, G
Q11	Transistor	2N426 P, G
Q12	Transistor	2N426 P, G
Q13	Transistor	2N426 P, G
Q14	Transistor	2N426 P, G
Q15	Transistor	2N426 P, G
Q16	Transistor	2N426 P, G
Q17	Transistor	2N426 P, G
Q18	Transistor	2N426 P, G
Q19	Transistor	2N426 P, G
Q20	Transistor	2N426 P, G
Q21	Transistor	2N426 P, G
Q22	Transistor	2N426 P, G
Q23	Transistor	2N426 P, G
Q24	Transistor	2N426 P, G
Q25	Transistor	2N426 P, G
Q26	Transistor	2N426 P, G
Q27	Transistor	2N426 P, G
Q28	Transistor	2N426 P, G
Q29	Transistor	2N426 P, G
Q30	Transistor	2N426 P, G
Q31	Transistor	2N426 P, G
Q32	Transistor	2N426 P, G
Q33	Transistor	2N426 P, G
Q34	Transistor	2N426 P, G
Q35	Transistor	2N426 P, G
Q36	Transistor	2N426 P, G
Q37	Transistor	2N426 P, G
Q38	Transistor	2N426 P, G
Q39	Transistor	2N426 P, G
Q40	Transistor	2N426 P, G
Q41	Transistor	2N426 P, G
Q42	Transistor	2N426 P, G
Q43	Transistor	2N426 P, G
Q44	Transistor	2N426 P, G
Q45	Transistor	2N426 P, G
Q46	Transistor	2N426 P, G
Q47	Transistor	2N426 P, G
Q48	Transistor	2N426 P, G
Q49	Transistor	2N426 P, G
Q50	Transistor	2N426 P, G
Q51	Transistor	2N426 P, G
Q52	Transistor	2N426 P, G
Q53	Transistor	2N426 P, G
Q54	Transistor	2N426 P, G
Q55	Transistor	2N426 P, G
Q56	Transistor	2N426 P, G
Q57	Transistor	2N426 P, G
Q58	Transistor	2N426 P, G
Q59	Transistor	2N426 P, G
Q60	Transistor	2N426 P, G
Q61	Transistor	2N426 P, G
Q62	Transistor	2N426 P, G
Q63	Transistor	2N426 P, G
Q64	Transistor	2N426 P, G
Q65	Transistor	2N426 P, G
Q66	Transistor	2N426 P, G
Q67	Transistor	2N426 P, G
Q68	Transistor	2N426 P, G
Q69	Transistor	2N426 P, G
Q70	Transistor	2N426 P, G
Q71	Transistor	2N426 P, G
Q72	Transistor	2N426 P, G
Q73	Transistor	2N426 P, G
Q74	Transistor	2N426 P, G
Q75	Transistor	2N426 P, G
Q76	Transistor	2N426 P, G
Q77	Transistor	2N426 P, G
Q78	Transistor	2N426 P, G
Q79	Transistor	2N426 P, G
Q80	Transistor	2N426 P, G
Q81	Transistor	2N426 P, G
Q82	Transistor	2N426 P, G
Q83	Transistor	2N426 P, G
Q84	Transistor	2N426 P, G
Q85	Transistor	2N426 P, G
Q86	Transistor	2N426 P, G
Q87	Transistor	2N426 P, G
Q88	Transistor	2N426 P, G
Q89	Transistor	2N426 P, G
Q90	Transistor	2N426 P, G
Q91	Transistor	2N426 P, G
Q92	Transistor	2N426 P, G
Q93	Transistor	2N426 P, G
Q94	Transistor	2N426 P, G
Q95	Transistor	2N426 P, G
Q96	Transistor	2N426 P, G
Q97	Transistor	2N426 P, G
Q98	Transistor	2N426 P, G
Q99	Transistor	2N426 P, G
Q100	Transistor	2N426 P, G

SWITCHES

Number	Description	Part No.
S1	Slide	115M33
S2	Slide	115M33
S3	Slide	115M33
S4	Slide	115M33
S5	Slide	115M33
S6	Slide	115M33
S7	Slide	115M33
S8	Slide	115M33
S9	Slide	115M33
S10	Slide	115M33
S11	Slide	115M33
S12	Slide	115M33
S13	Slide	115M33
S14	Slide	115M33
S15	Slide	115M33
S16	Slide	115M33
S17	Slide	115M33
S18	Slide	115M33
S19	Slide	115M33
S20	Slide	115M33
S21	Slide	115M33
S22	Slide	115M33
S23	Slide	115M33
S24	Slide	115M33
S25	Slide	115M33
S26	Slide	115M33
S27	Slide	115M33
S28	Slide	115M33
S29	Slide	115M33
S30	Slide	115M33
S31	Slide	115M33
S32	Slide	115M33
S33	Slide	115M33
S34	Slide	115M33
S35	Slide	115M33
S36	Slide	115M33
S37	Slide	115M33
S38	Slide	115M33
S39	Slide	115M33
S40	Slide	115M33
S41	Slide	115M33
S42	Slide	115M33
S43	Slide	115M33
S44	Slide	115M33
S45	Slide	115M33
S46	Slide	115M33
S47	Slide	115M33
S48	Slide	115M33
S49	Slide	115M33
S50	Slide	115M33
S51	Slide	115M33
S52	Slide	115M33
S53	Slide	115M33
S54	Slide	115M33
S55	Slide	115M33
S56	Slide	115M33
S57	Slide	115M33
S58	Slide	115M33
S59	Slide	115M33
S60	Slide	115M33
S61	Slide	115M33
S62	Slide	115M33
S63	Slide	115M33
S64	Slide	115M33
S65	Slide	115M33
S66	Slide	115M33
S67	Slide	115M33
S68	Slide	115M33
S69	Slide	115M33
S70	Slide	115M33
S71	Slide	115M33
S72	Slide	115M33
S73	Slide	115M33
S74	Slide	115M33
S75	Slide	115M33
S76	Slide	115M33
S77	Slide	115M33
S78	Slide	115M33
S79	Slide	115M33
S80	Slide	115M33
S81	Slide	115M33
S82	Slide	115M33
S83	Slide	115M33
S84	Slide	115M33
S85	Slide	115M33
S86	Slide	115M33
S87	Slide	115M33
S88	Slide	115M33
S89	Slide	115M33
S90	Slide	115M33
S91	Slide	115M33
S92	Slide	115M33
S93	Slide	115M33
S94	Slide	115M33
S95	Slide	115M33
S96	Slide	115M33
S97	Slide	115M33
S98	Slide	115M33
S99	Slide	115M33
S100	Slide	115M33