

ELECTRONIC CROSSOVER NETWORK

D-23

SERVICE MANUAL



PIONEER®

CONTENTS

1.	SPECIFICATIONS	2
2.	CONNECTION DIAGRAM	3
3.	FRONT PANEL FACILITIES	4
4.	BLOCK DIAGRAM	6
5.	CIRCUIT DESCRIPTIONS	
5.1	Filter Circuit	7
5.2	Muting Circuit	9
5.3	Power Supply Circuit	10
5.4	Crossover Frequency Response	10
6.	DISASSEMBLY	12
7.	PARTS LOCATION	
7.1	Front Panel View	14
7.2	Front View with Panel Removed	15
7.3	Top View	16
7.4	Bottom View	17
7.5	Rear Panel View	18
8.	EXPLODED VIEW	
8.1	External Parts	19
8.2	Internal Parts	21
9.	SCHEMATIC DIAGRAMS, P.C. BOARD PATTERNS AND PARTS LIST	
9.1	Schematic Diagram and Miscellaneous Parts List	27
9.2	L.P.F. Amplifier Assembly (AWM-095)	30
9.3	L.P.F. Amplifier Assembly (AWM-096)	34
9.4	L.P.F. Amplifier Assembly (AWM-097)	38
9.5	H.P.F. Amplifier Assembly (AWM-098)	42
9.6	H.P.F. Amplifier Assembly (AWM-099)	46
9.7	H.P.F. Amplifier Assembly (AWM-100)	50
9.8	Power Supply Assembly (AWR-114)	54
9.9	Relay Assembly (AWX-105)	58
10.	PACKING	61

1. SPECIFICATIONS

Semiconductors

Transistors	71
Diodes	18

Amplifier Section

Circuitry

Buffer Amplifier	Pure complimentary SEPP.
Filter	RC passive filter (6dB/oct., 12dB/oct.)
	RC activer filter + RC passive filter (18dB/oct.)
	2-way, 3-way, 4-way

Cut-off Frequency

LOW (HIGH CUT)	
MID-LOW (LOW CUT) .	63, 80, 100, 125, 160, 200, 250, 320, 400, 500, 630Hz
MID-LOW (HIGH CUT)	
MID-HIGH (LOW CUT) .	320, 400, 500, 630, 800, 1k, 1.25k, 1.6k, 2k, 2.5k, 3.2kHz
MID-HIGH (HIGH CUT)	
HIGH (LOW CUT)	1.6k, 2k, 2.5k, 3.2k, 4k, 5k, 6.3k, 8k, 10k, 12.5k, 16kHz
Slope	6dB/oct, 12dB/oct, 18dB/oct.
LEVEL Control	0 to -30dB (1dB step), ∞ left and right channel individual controls
Insertion Loss	0 to -2dB
Input Impedance	50k Ω
Output Impedance	4k Ω (Max.)
Output (R _L : 50k)	1V, 10V (Max.)
Total Harmonic Distortion	20Hz to 20,000Hz

1V output

10V output

Frequency Response

(LOW END, HIGH END) 10Hz, 100,000Hz $^{+0dB}_{-1dB}$

Hum and Noise (IHF, short-circuited, A network)

1V output

Miscellaneous

Power Requirements	110V, 120V, 220V and 240V (Switchable), 50/60Hz
Power Consumption	14 watts (UL)
Dimensions	420(W) x 150(H) x 352(D)mm 16-9/16 x 5-29/33 x 13-7/8in.
Weight	Without package: 8.7kg (19lb 3oz) With package: 9.7kg (21lb 6oz)
AC outlets	1 (UNSWITCHED)

Furnished Parts


Connection Cord with Pin Plugs	4
Operating Instructions	1
Hex. Wrench (used for fastening knob)	1

NOTE:

Specifications and the design subject to possible modification without notice due to improvements.

2. CONNECTION DIAGRAM

(FOR 4-WAY AMPLIFIER SYSTEM)

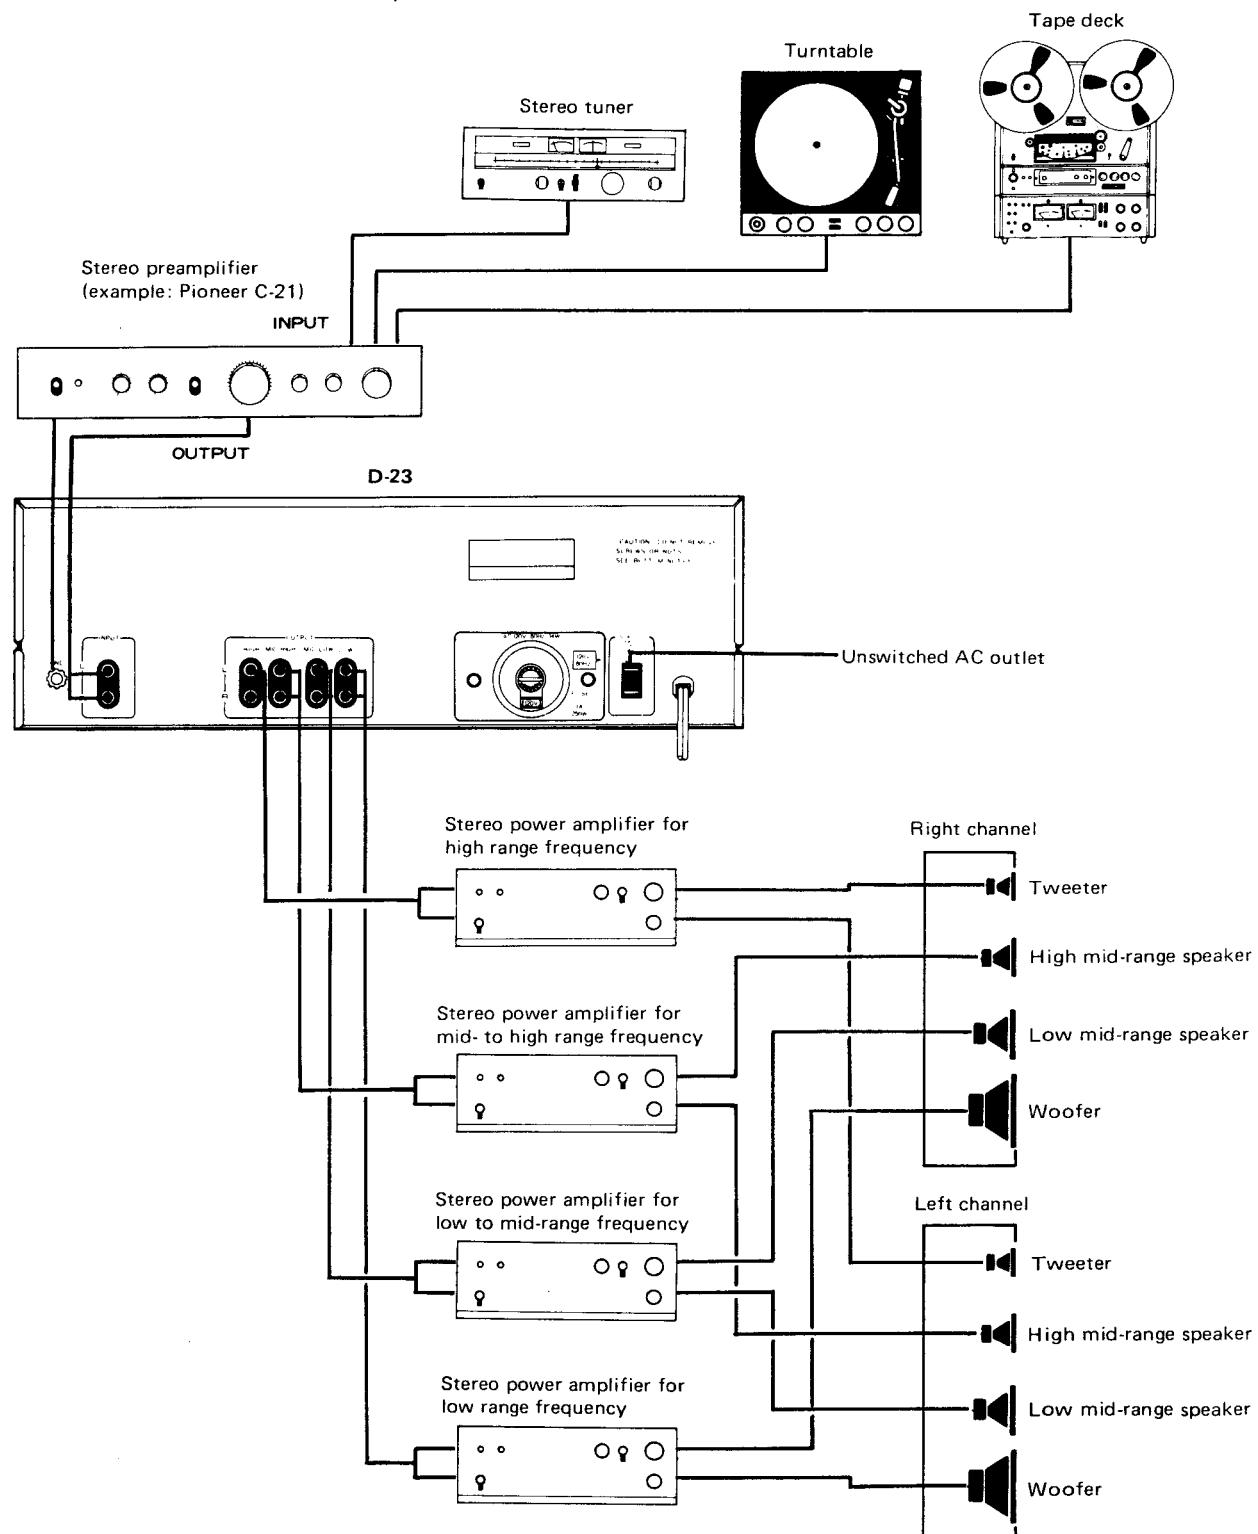


3. FRONT PANEL FACILITIES

POWER SWITCH (WITH PILOT LAMP)

The push ON power switch incorporates a built-in muting circuit to suppress the generation of any noise during the switching action. Consequently, no sound will be heard during the first few seconds after turning the power ON.

FREQUENCY SELECTOR CONTROLS (See below)

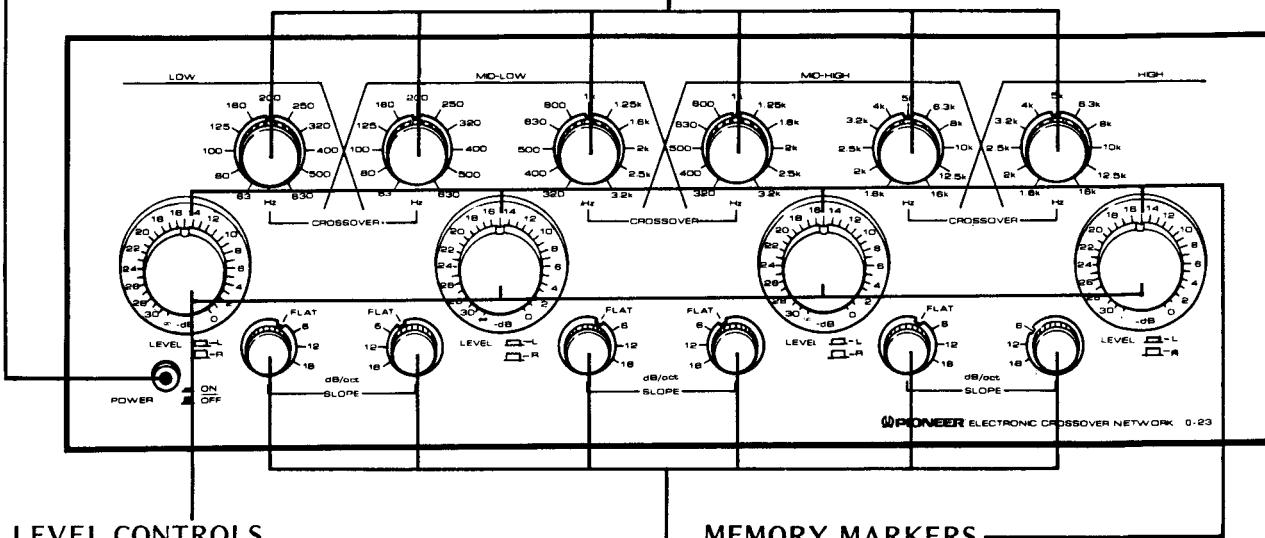

LEVEL CONTROLS

(LOW, MID-LOW, MID-HIGH, HIGH)

These controls are for adjusting output levels of each frequency range. Left and right channels are adjusted independently.

MEMORY MARKERS

These markers will prove very useful in marking pre-selected levels for comparison purposes and other fine adjustments.

SLOPE SELECTOR CONTROLS (See below)

FREQUENCY SELECTOR AND SLOPE SELECTOR CONTROLS

Crossover frequencies between each frequency range are determined by the cut-off frequencies in each range and the selected slope for each of these frequencies. Cut-off frequencies are selected by the frequency selector controls along the top row, while slope characteristics are selected by the slope selector controls along the bottom row. But if any slope selector control is set to FLAT, the cut-off frequency selected by the corresponding frequency selector control will become irrelevant, resulting in a flat frequency response across all frequency ranges.

LOW LP*: Control for selection of slope and cut-off frequency at upper limit of low range frequency (LOW). (See Fig. A).

MID-LOW HP*: Control for selection of slope and cut-off frequency at lower limit of low to mid-range frequency (MID-LOW). (See Fig. B).

MID-LOW LP: Control for selection of slope and cut-off frequency at upper limit of low to mid-range frequency (MID-LOW). (See Fig. C).

MID-HIGH HP: Control for selection of slope and cut-off frequency at lower limit of mid-to high range frequency (MID-HIGH). (See Fig. D).

MID-HIGH LP: Control for selection of slope and cut-off frequency at upper limit of mid-to high range frequency (MID-HIGH). (See Fig. E).

HIGH HP: Control for selection of slope and cut-off frequency at lower limit of high range frequency (HIGH). (See Fig. F). Note that this slope selector control has no FLAT position.

*LP: Low-pass filter

HP: High-pass filter

NOTE:

If the tweeter and mid-range speakers receive signals whose frequencies are below their respective lower limits, rupture of those speakers may result. Therefore, be especially careful when switching the slope selector controls, particularly when selecting the FLAT position.

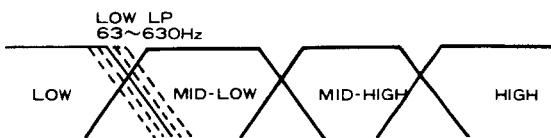


Fig. A

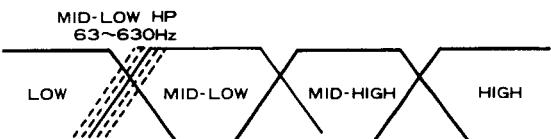


Fig. B

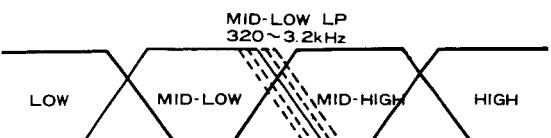


Fig. C

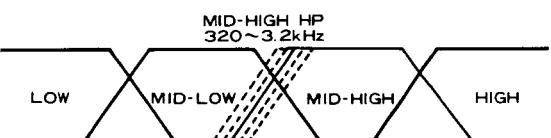


Fig. D

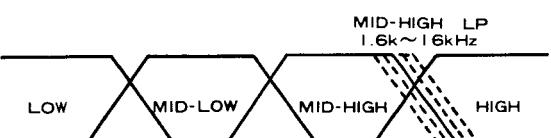


Fig. E

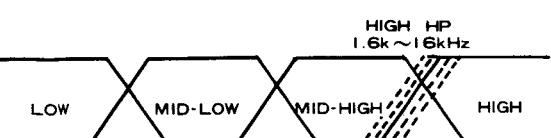


Fig. F

CUT-OFF FREQUENCY

Theoretically, the cut-off frequency is the point at the start of the two finely drawn lines in Fig. G.

In the D-23, the actual characteristics are shown by the dotted line (Fig. H) and the broken line (Fig. G). So the cut-off frequency corresponds to -3dB when the slope selector is set to -6, or -18dB/oct, and -6dB when it is set to -12dB/oct.

SLOPE

Slope refers to the amount of attenuation in the frequency response curve per octave (1 octave corresponds to a doubling, or halving of the frequency).

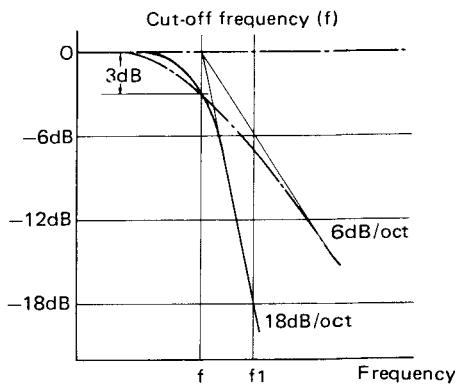


Fig. G


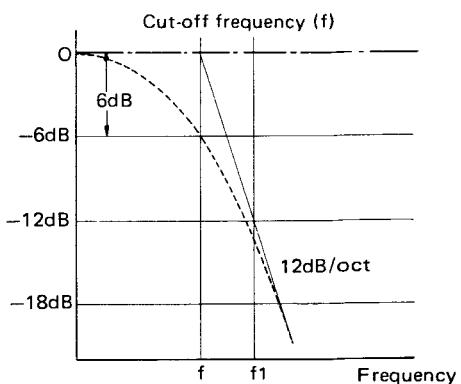


Fig. H

4. BLOCK DIAGRAM

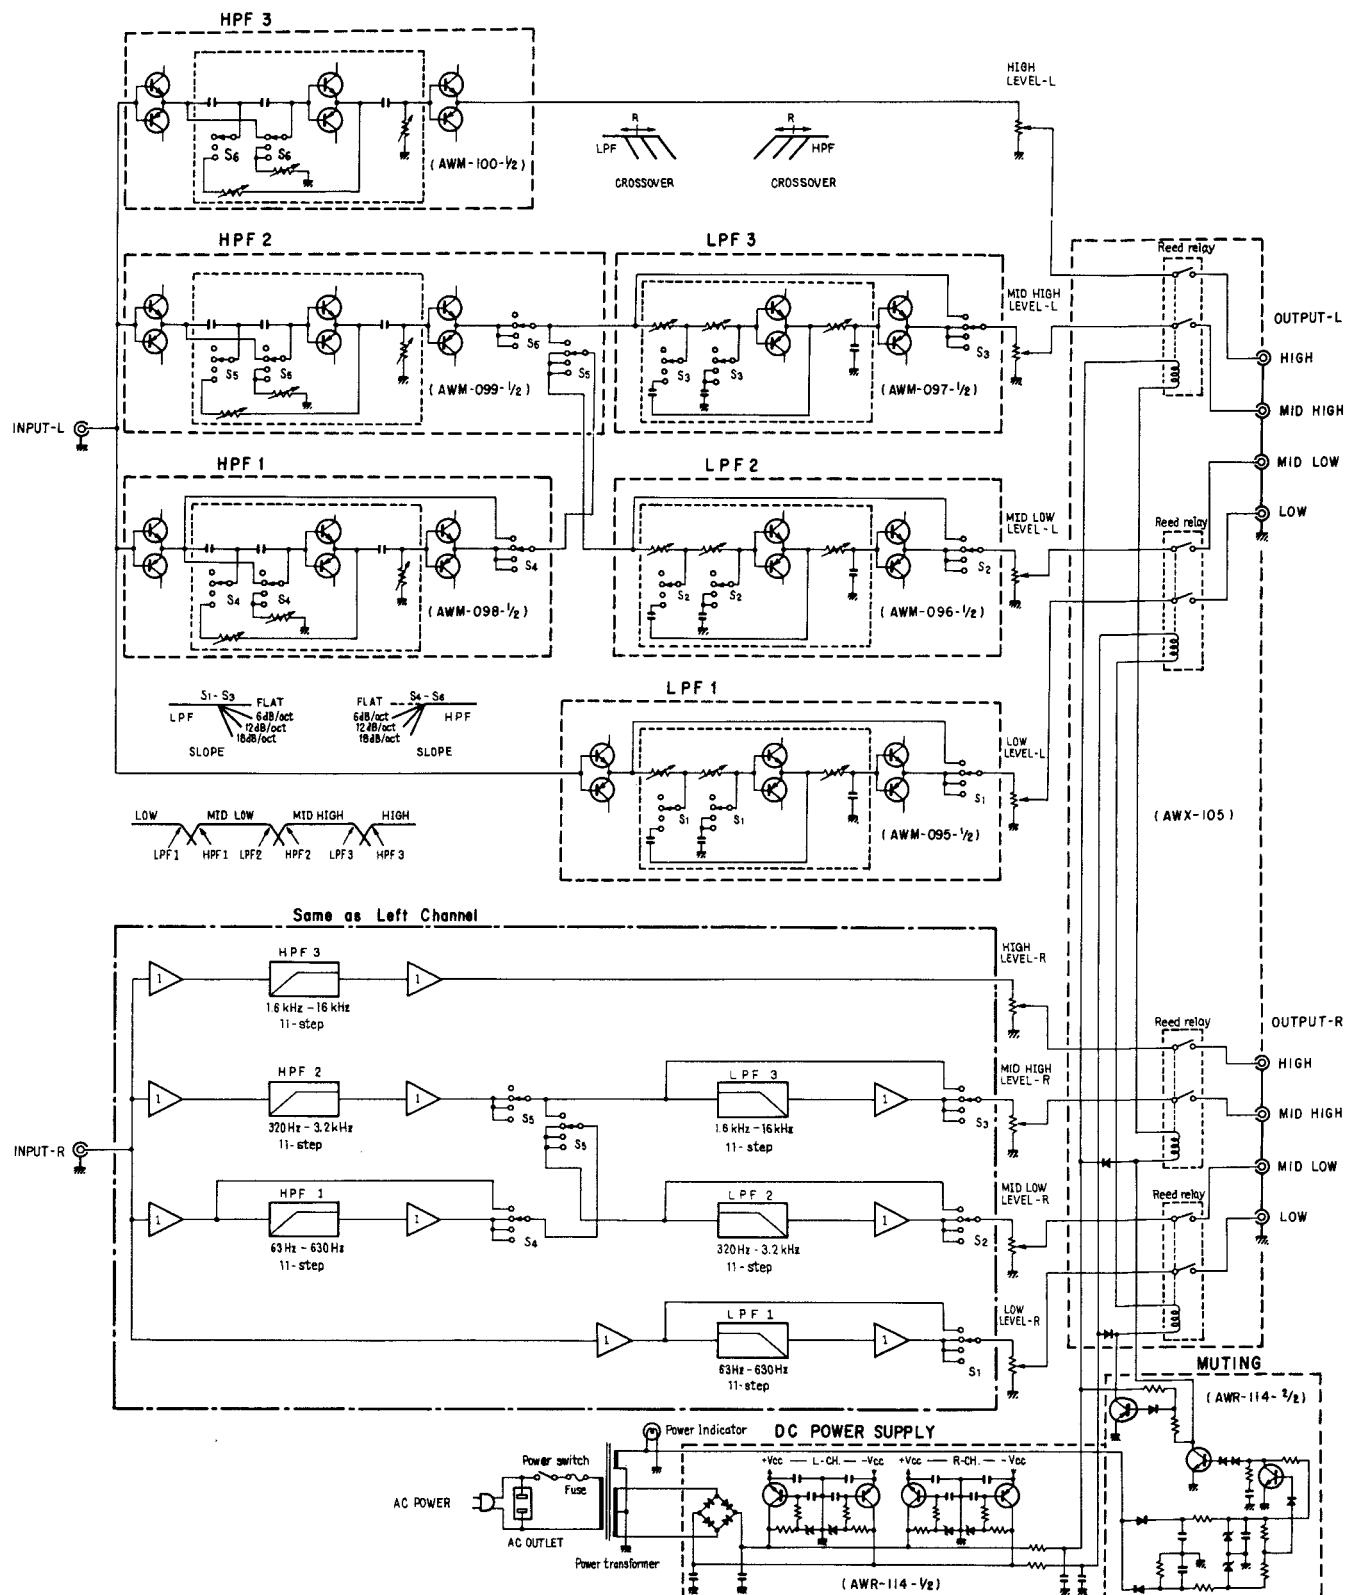

5. CIRCUIT DESCRIPTIONS

D-23 is an electronic crossover network which divides the audio frequencies for a multi-channel amplifier system. Its block diagram is given on page 6.

The filter circuits have the same construction for both the L and R channels.

The SLOPE switch and CROSSOVER switch are ganged for both the L and R channels.

The LEVEL control can be independently operated for the L channel and R channel.

5.1 FILTER CIRCUIT

Buffer Amplifier

An NPN transistor and PNP transistor Class A pure complementary SEPP circuit such as that illustrated in Fig. 1 is employed.

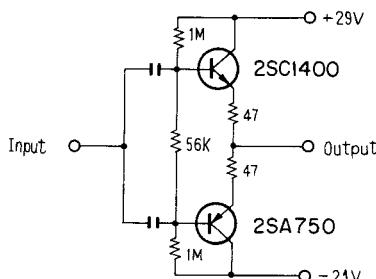


Fig. 1 Buffer amplifier

This circuit is used as the filter input/output buffer and as a feedback type filter amplifier (gain = 1). Since an emitter-follower circuit is used, its input impedance is high and output impedance is low. Consequently, the impedance is not disturbed by the front and back stages so the external equipment connected and the filter characteristic is not effected.

High Pass Filter (H.P.F.)

The H.P.F. is shown in Fig. 2. BA1 — BA3 in the figure are the previously mentioned buffer amplifiers. VR1 is an 11 steps attenuator which switch the roll-off frequency and S1 is the slope characteristic selector switch.

The MID-LOW, MID-HIGH and HIGH frequency channels H.P.F.s. have different C₁, C₂ and C₃ capacitances and different wiring at FLAT, but are otherwise basically the same.

When S1 is set to the FLAT position at the MID-LOW channel, the signal only passes through BA1 and bypasses the filter element.

Since the MID-HIGH channel H.P.F. is not connected at FLAT, the signal does not pass through

this H.P.F. In this case, the output of the MID-LOW channel H.P.F. is connected to the MID-HIGH channel L.P.F. and the signal is not applied to the MID-LOW channel L.P.F. (See the block diagram on page 6.).

The HIGH channel does not have a FLAT position. When S1 has been set to the 6dB/oct position, An RC 1-stage attenuation-type H.P.F. such as that illustrated in Fig. 3 is formed. In this case, the slope characteristic is attenuated 3dB at fc (roll-off frequency) and 6dB at 1/2fc.

When the switch has been set to the 12dB/oct position, an RC 2-stages attenuation-type H.P.F. such as that shown in Fig. 4 is formed and the slope characteristic is attenuated 6dB at fc and 12dB at 1/2fc.

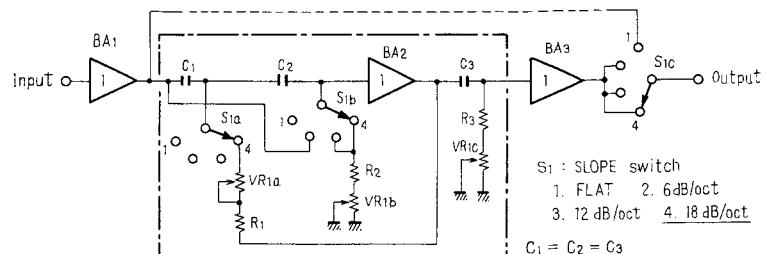


Fig. 2 High pass filter

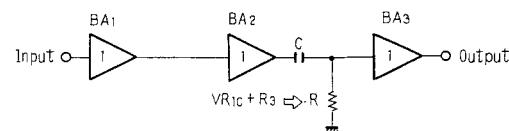


Fig. 3 6dB/oct H.P.F.

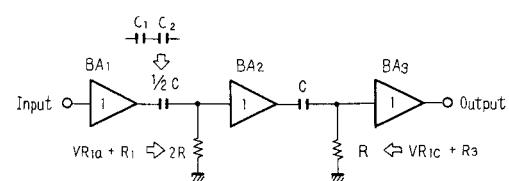


Fig. 4 12dB/oct H.P.F.

When S_1 is set to the 18dB/oct position, an RC feedback-type H.P.F. such as that shown in Fig. 5 is formed and the slope characteristic is attenuated 3dB at f_c and 18dB at 1/2 f_c .

This circuit is composed of an emitter-follower circuit to which an RC feedback circuit has been added and positive feedback applied near f_c . This improves the knee characteristic of the RC attenuation-type filter by producing a peak at the frequency response near f_c .

The slope characteristic is given in Fig. 6.

NOTE:

The ratio of R and C of Figs 2 ~ 5 is the theoretical ratio. Actually, the values of R and C differ somewhat from the theoretical ratio because of the effect of the input and output impedances before and after the filter element.

Low Pass Filter (L.P.F.)

The construction of the L.P.F. is shown in Fig. 7. BA1 — BA3 in the figure are the buffer amplifiers previously mentioned. VR1 is an 11-steps attenuator which switch the roll-off frequency. S_1 is the slope characteristic selector switch.

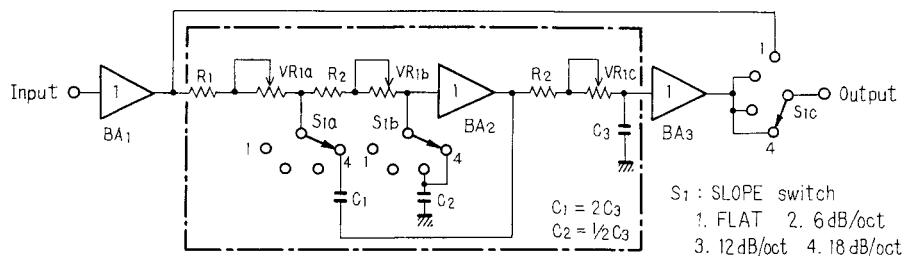


Fig. 7 Low pass filter

The capacitances of C_1 , C_2 , and C_3 of the LOW, MID-LOW and MID-HIGH frequency channels L.P.F.s. are different. Otherwise, the filters are fundamentally the same.

The H.P.F. input or output buffer amplifier in the MID-LOW and MID-HIGH channels L.P.F.s. corresponds to BA1.

When S_1 is set to the FLAT position, the signal only passes through BA1 and bypasses the filter element.

When S_1 is set to the 6dB/oct position, an RC 1-stage attenuation type L.P.F. such as that illustrated in Fig. 8 is formed. In this case, the slope characteristic is attenuated 3dB at f_c and 6dB at 2 f_c .

When the switch is set to the 12dB/oct position, an RC 2-stages attenuation-type L.P.F. such as that shown in Fig. 9 is formed and the slope characteristic is attenuated 6dB at f_c and 12dB at 2 f_c .

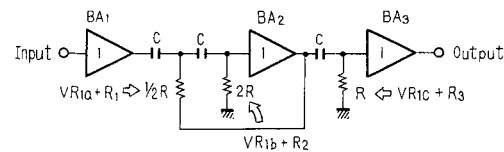


Fig. 5 18dB/oct H.P.F.

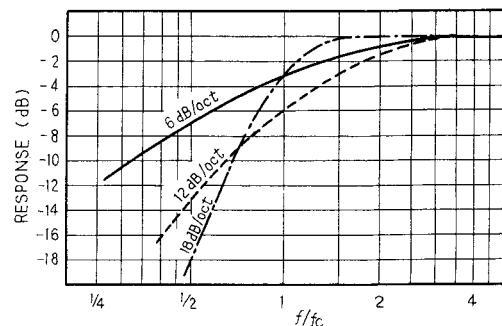


Fig. 6 Slope characteristics for 6, 12 and 18dB/oct H.P.F.

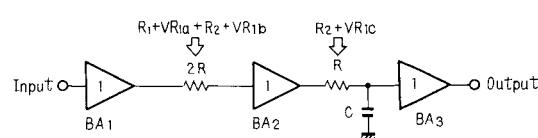


Fig. 8 6dB/oct L.P.F




Fig. 9 12dB/oct L.P.F.

At the 18dB/oct position, the RC feedback-type L.P.F. shown in Fig. 10 is formed and the slope characteristic is attenuated 3dB at f_c and 18dB at $2f_c$.

The slope characteristic is given in Fig. 11.

NOTE:

The ratio of R and C of Figs. 7 ~ 10 is the theoretical ratio. Actually, the values of R and C differ somewhat from the theoretical ratio because of the effect of the input and output impedances before and after the filter element.

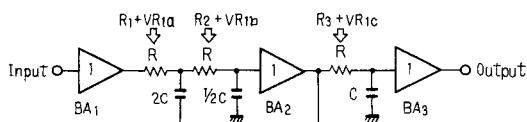


Fig. 10 18dB/oct L.P.F.

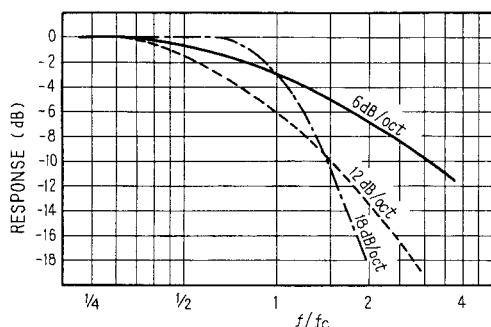


Fig. 11 Slope characteristics for 6, 12 and 18dB/oct L.P.F.

5.2 MUTING CIRCUIT

This circuit cuts the unnecessary sound by opening the output circuit by means of reed relays for several seconds after the power switch has been set to the ON position and immediately after the power switch has been set to the OFF position. Its circuit construction is shown in Fig. 12.

- Muting when power switch is turned ON

When the power switch has been set to the ON position, the resistance divider (R_4 , R_5) between the positive power supply (+6V) and negative power supply (-6V) divided the voltage at point (A) to -1V. Since Q_1 is, therefore unbiased, it remains in the OFF state. Because Q_1 is in the OFF state, the voltage of point (B) slowly rises according to the time constant of R_6 , R_7 and C_3 . When the voltage of point (B) reaches +1.8V, base current flows in Q_2 via D_6 , D_7 and Q_2 is turned ON. The base of Q_3 is biased by the divider R_8 , R_9 between -46V and the collector of Q_2 via D_8 . When Q_2 is in the OFF state, the voltage of point (C) becomes +4V, base bias is not applied to Q_3 and Q_3 is therefore turned OFF.

When Q_2 is turned ON, the voltage of point (C) becomes -1.2V, base current flows in Q_3 and Q_3 is also turned ON.

When both Q_2 and Q_3 are ON, current flows in RL_1 — RL_4 , the output circuit is closed and normal operation begins.

- Muting immediately after power switch is turned OFF

Since the time constant of the negative power supply (-6V) is shorter than that of the positive power supply (+6V), the negative power supply becomes 0V before the positive power supply immediately after the power switch has been set to the OFF position. Consequently, Q_1 is forward biased by the positive power supply (+6V) and is turned ON.

Since this causes the Q_1 collector voltage to drop to about 0V, Q_2 , Q_3 are turned OFF, current no longer flows in RL_1 — RL_4 and the output is opened.

Moreover, since the charge across C_3 is instantaneously discharged when Q_1 is turned ON, the muting operation is performed even if the power switch is again set to the ON position.

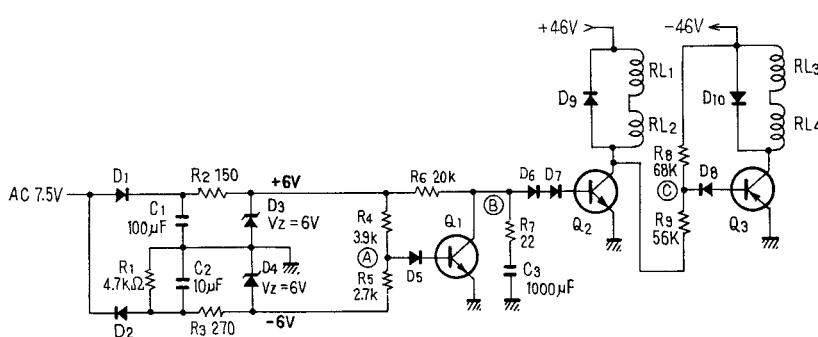


Fig. 12 Muting circuit.

5.3 POWER SUPPLY CIRCUIT

A bridge rectifier circuit is used to produce $\pm 52V$ DC voltages. These DC voltages are passed through an RC ripple filter and used to drive the muting relay and are also dropped to $+29V$, $-21V$ through a constant voltage circuit and supplied to the buffer amplifiers. A separate constant voltage circuit is provided for the L channel and R channel.

The $\pm 6V$ for muting control is supplied by rectifying the voltage from the pilot lamp winding and regulating it with a Zener diode.

5.4 CROSSOVER FREQUENCY RESPONSE

A filter circuit which varies the frequency response not only changes the response, but also changes the phase.

A network having a 6dB/oct slope characteristic shows a phase change such as that illustrated in Fig. 13. At the crossover frequency ($f = f_c$), the L.P.F. side lags 45° and the H.P.F. side leads 45° . This is shown as a vector diagram in Fig. 14a~e. In order to make the frequency response flat when the L.P.F. and H.P.F. outputs are combined, the vector sum at each frequency should be constant. At the crossover frequency, from Fig. 14c, the L.P.F. output and H.P.F. output are $1/\sqrt{2}$ and this becomes -3dB .

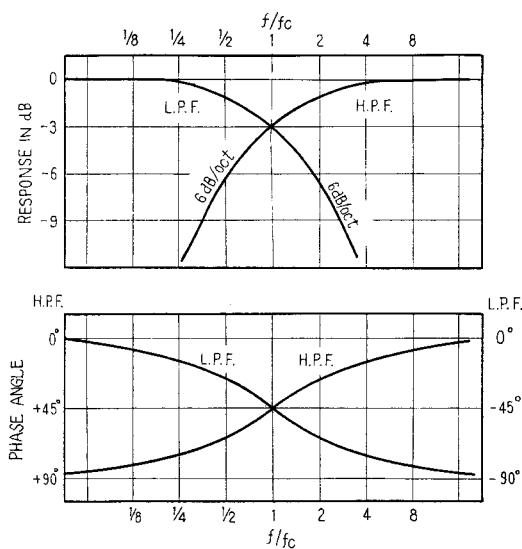


Fig. 13 Phase characteristic for 6dB/oct filter

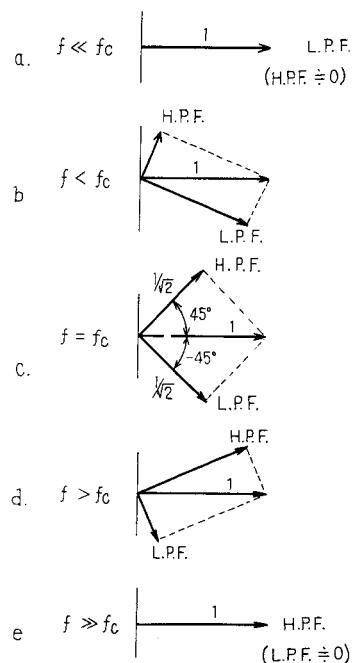


Fig. 14 Vector diagram for 6dB/oct filter

A network having a slope characteristic of 12dB/oct shows a phase change such as that illustrated in Fig. 15. This is shown as a vector diagram in Fig. 16a~e.

At the crossover frequency ($f = f_c$), the L.P.F. lags 90° and the H.P.F. side leads 90° . In this case, if the L.P.F. side or H.P.F. side is made the opposite phase, the respective output levels will become $1/2$. In short, the L.P.F. output and H.P.F. output at the crossover frequency will become -6dB .

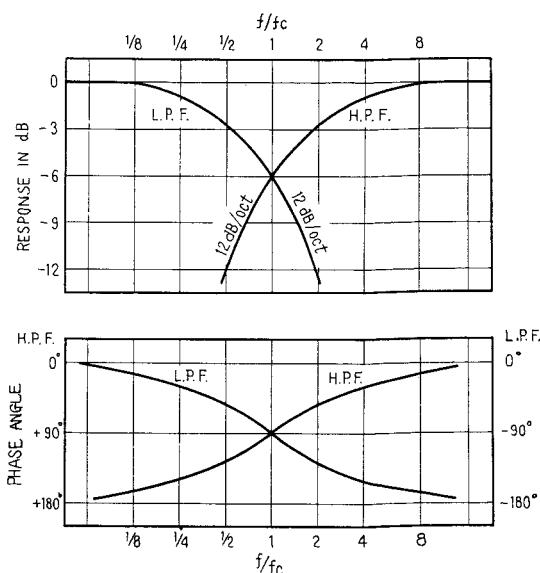


Fig. 15 Phase characteristic for 12dB/oct filter

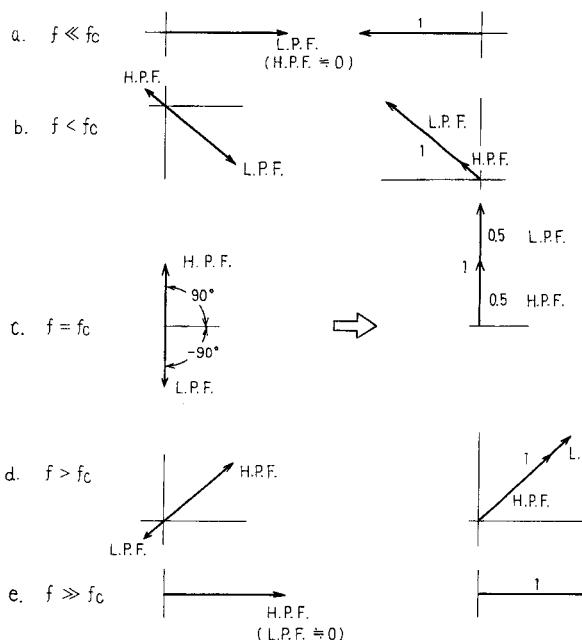


Fig. 16 Vector diagram for 12dB/oct filter

In an 18dB/oct network, the phase changes further and becomes as shown in Fig. 17. This is shown as a vector diagram in Fig. 18a~e.

At the crossover frequency ($f = f_c$), the L.P.F. side is lagging 135° and the H.P.F. side is leading 135° . From Fig. 18c, the L.P.F. output and H.P.F. output at the crossover frequency should be $1/\sqrt{2}$. This is -3dB .

However, the above is for when the two outputs are combined electrically. Actually, since the sound pressure is synthesized by a speaker, the phases are not necessarily matched in space.

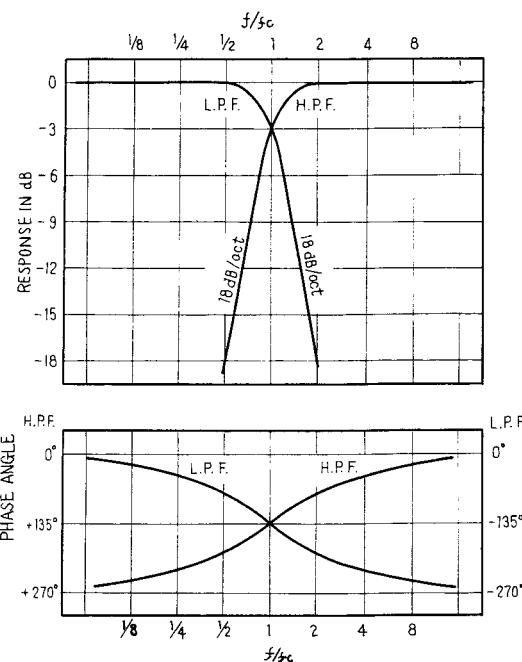


Fig. 17 Phase characteristic for 18dB/oct filter

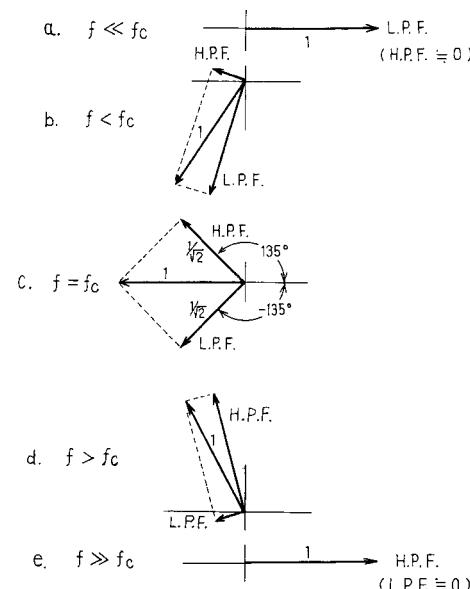


Fig. 18 Vector diagram for 18dB/oct filter

6. DISASSEMBLY

Bonnet case

Remove the 2 screws (A) at both sides of the bonnet case and lift off the case. (See Fig. 19)

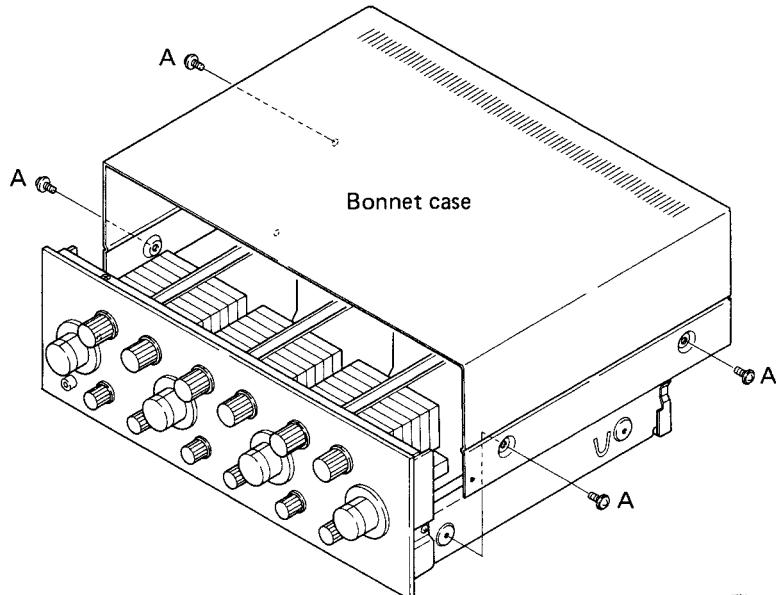


Fig. 19

Bottom plate

Remove the 8 screws (B) at the bottom plate and lift off the bottom plate. (See Fig. 20)

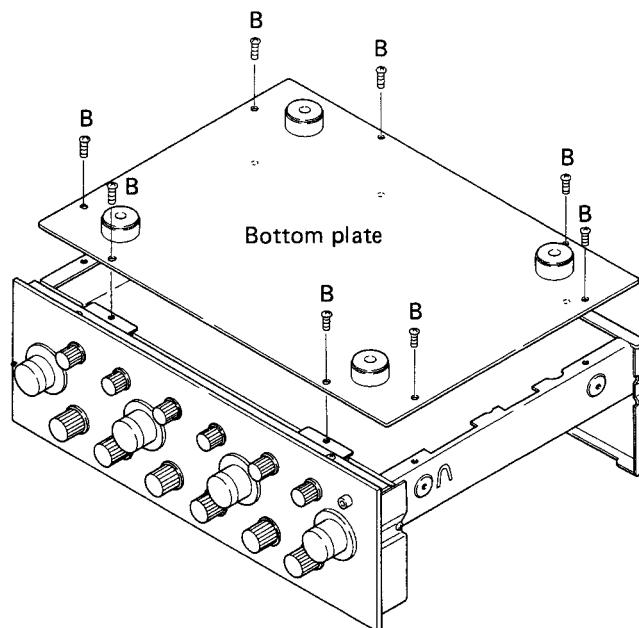


Fig. 20

Front panel

Loosen the set screws of the eight LEVEL knobs (C) with an hexagonal wrench and remove all the knobs, except the POWER switch knob.

Remove the four screws (D) at the top and bottom of the front panel. (See Fig. 21)

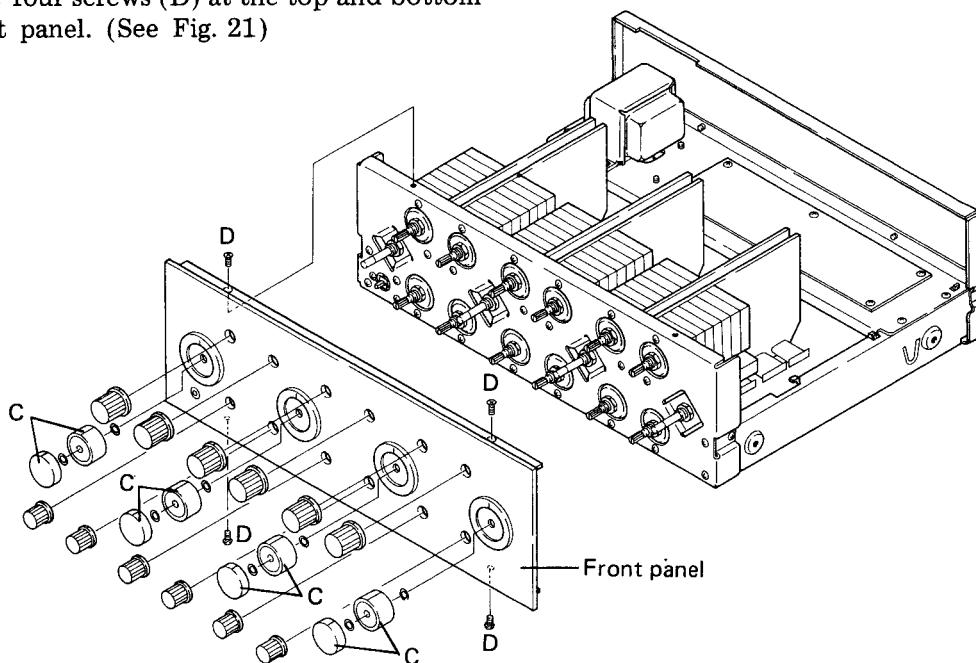


Fig. 21

Filter Assembly

Disconnect the connection cord, remove the 3 screws (E) fastening the filter assembly to the panel stay and remove the assembly (See Fig. 22).


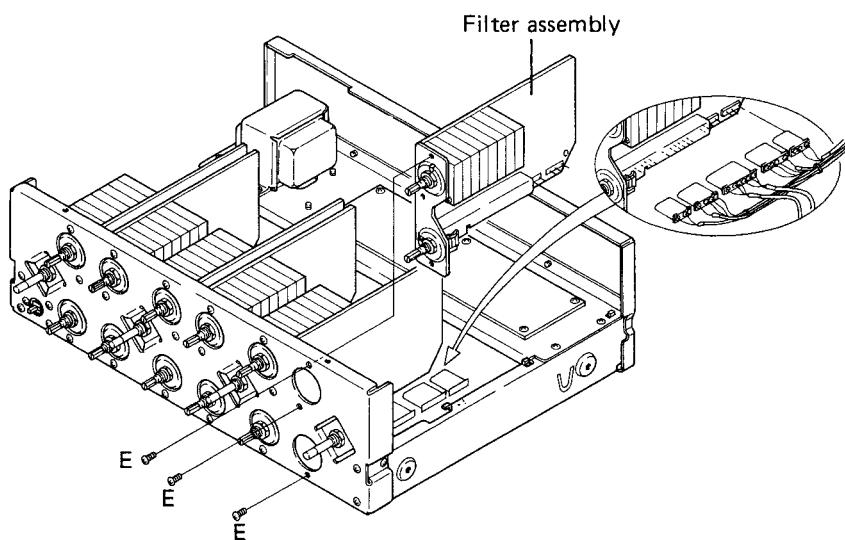



Fig. 22

7. PARTS LOCATION

7.1 FRONT PANEL VIEW

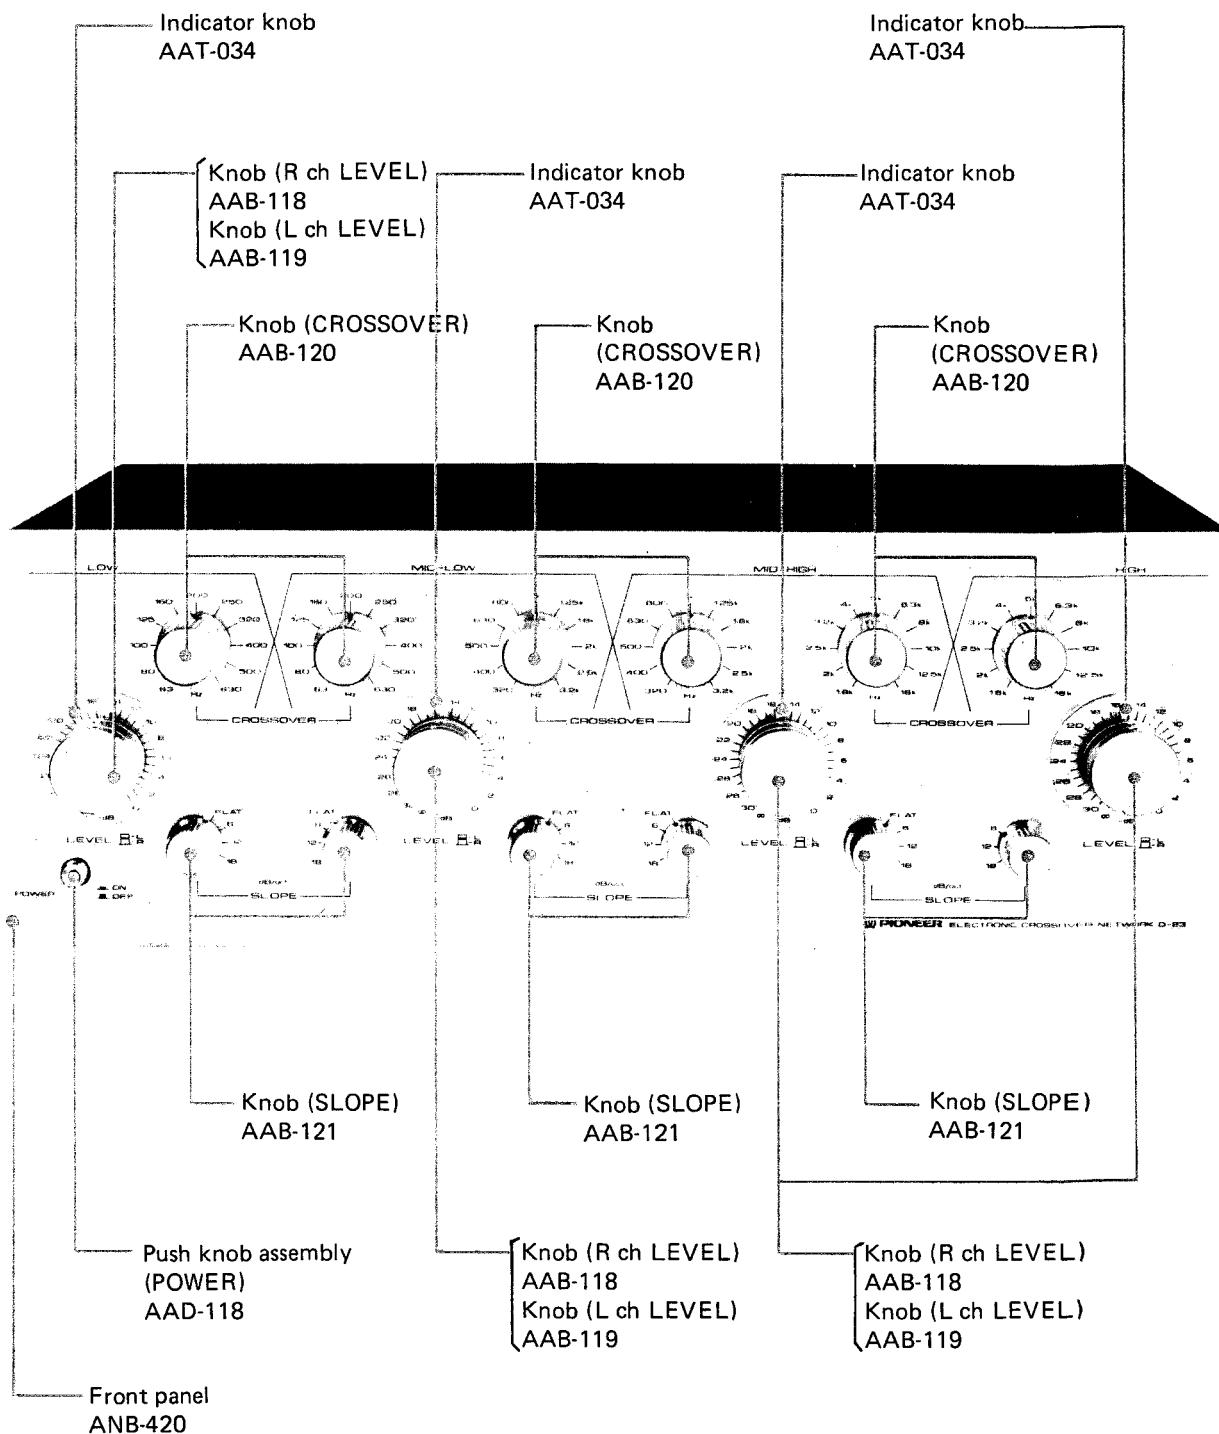

7.2 FRONT VIEW WITH PANEL REMOVED

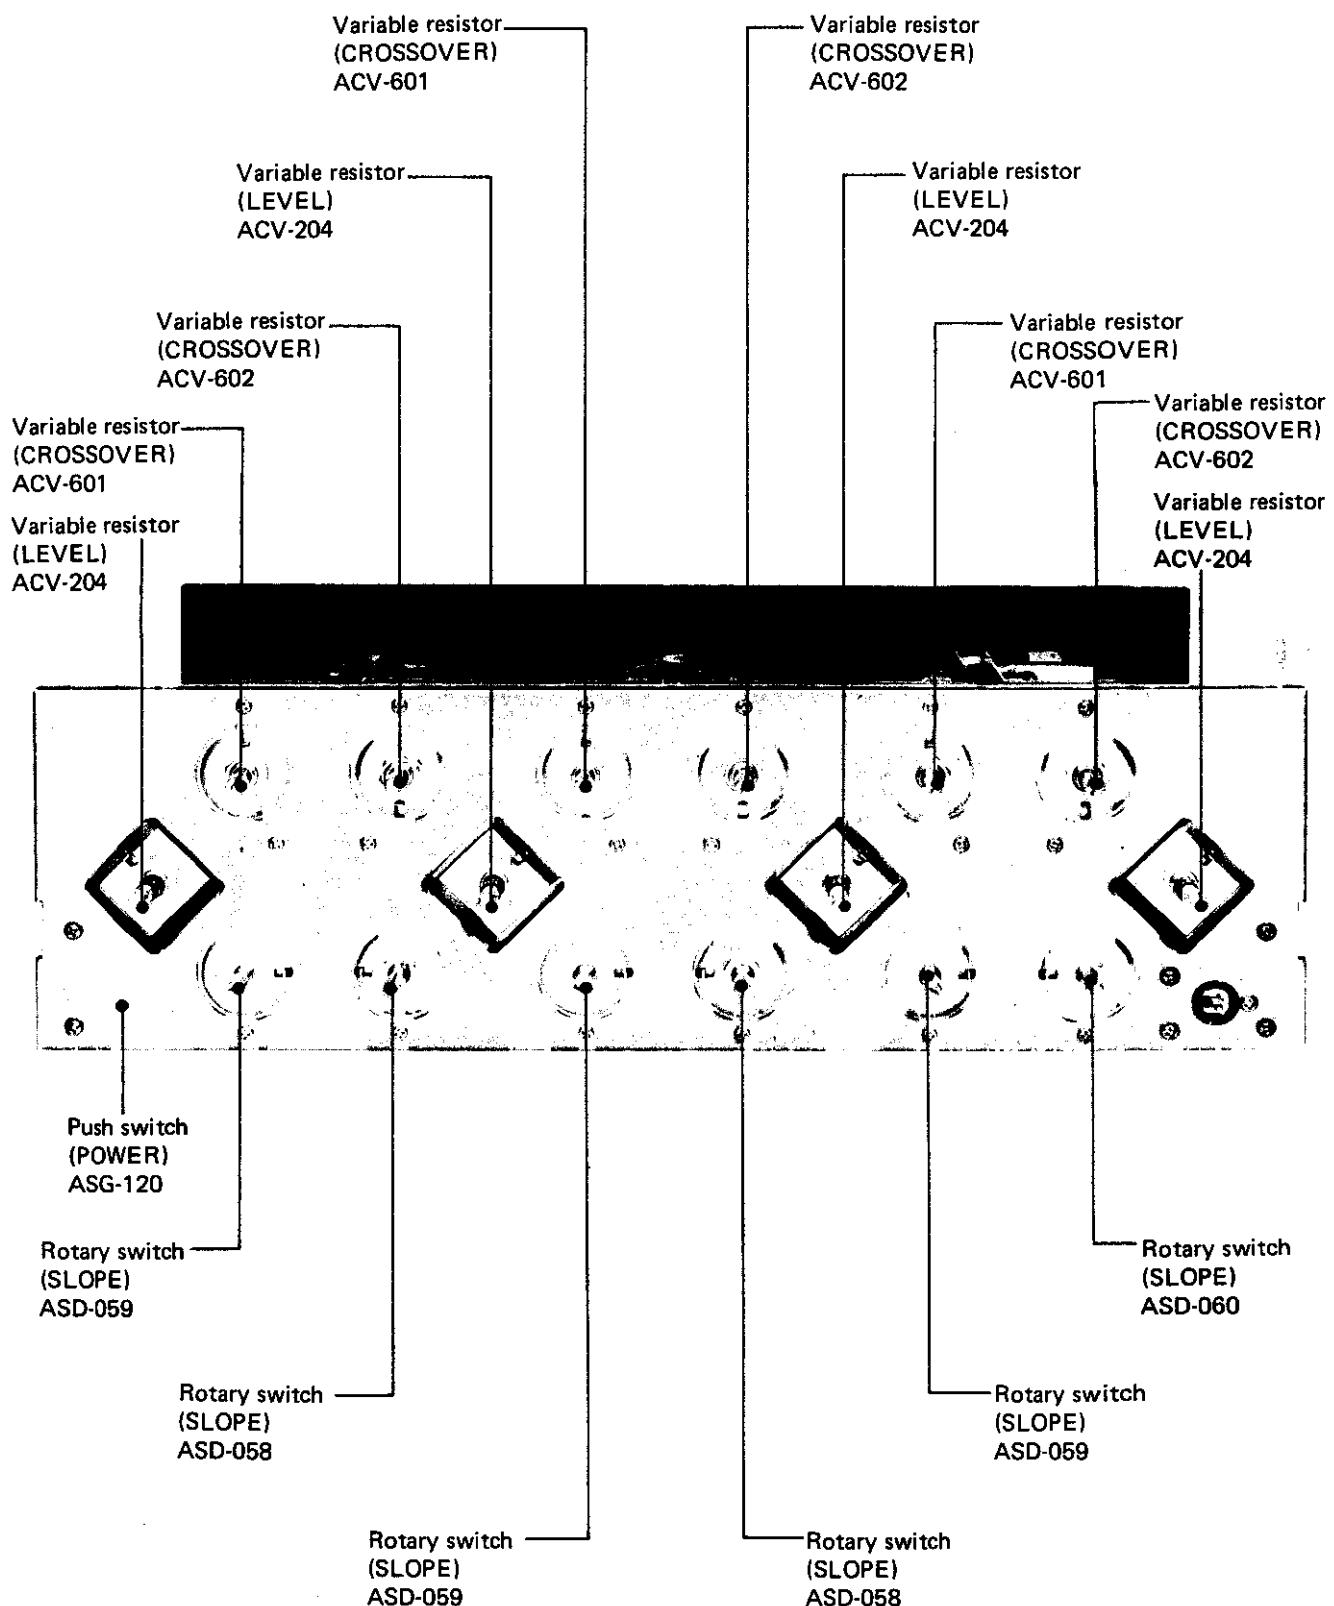

7.3 TOP VIEW

H.P.F. amplifier
assembly
AWM-099


L.P.F. amplifier
assembly
AWM-096

L.P.F. amplifier
assembly
AWM-097

H.P.F. amplifier
assembly
AWM-098

H.P.F. amplifier
assembly
AWM-100


L.P.F. amplifier
assembly
AWM-095

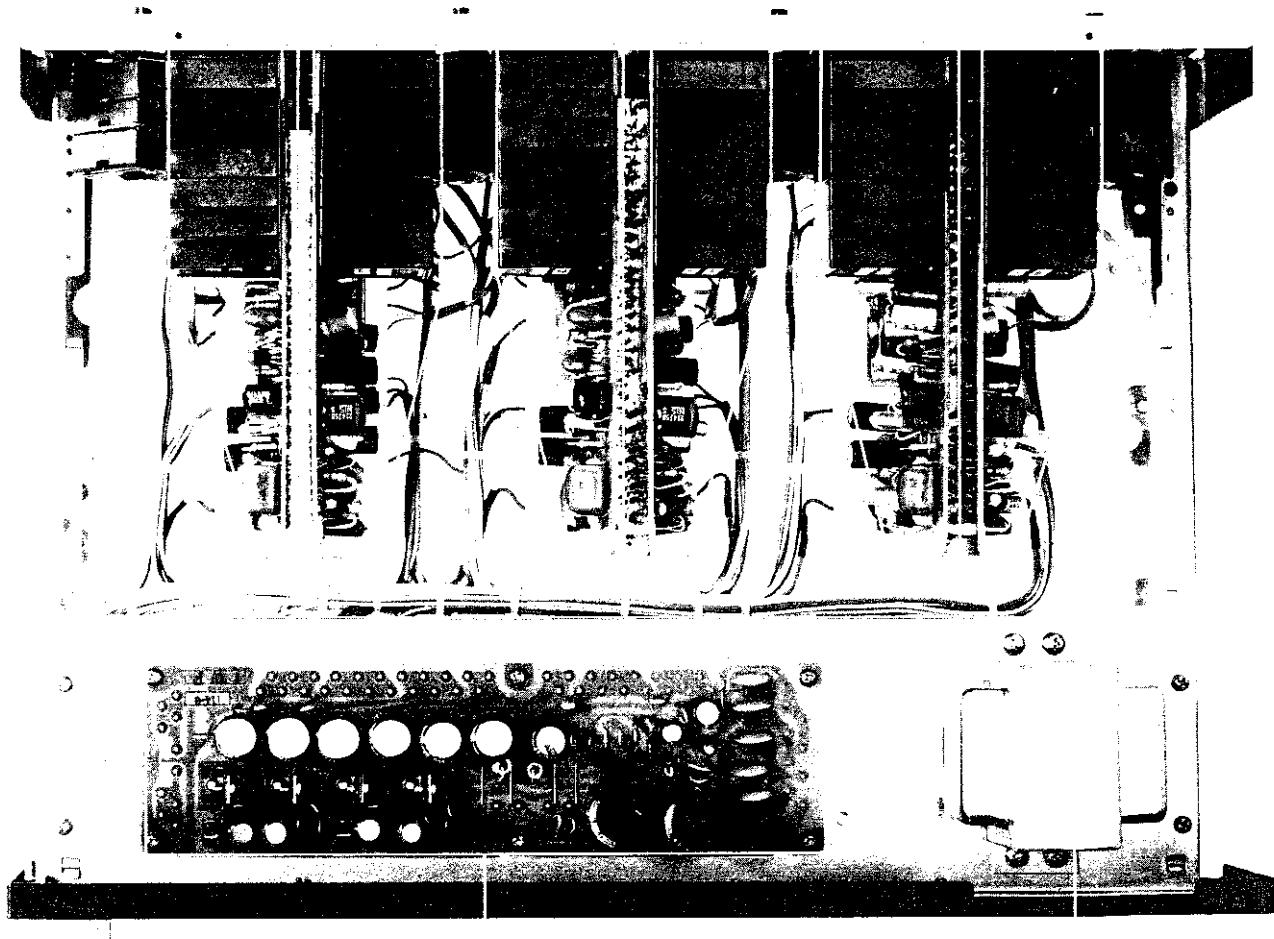


Power supply assembly
AWR-114

Power transformer
ATT-404

7.4 BOTTOM VIEW

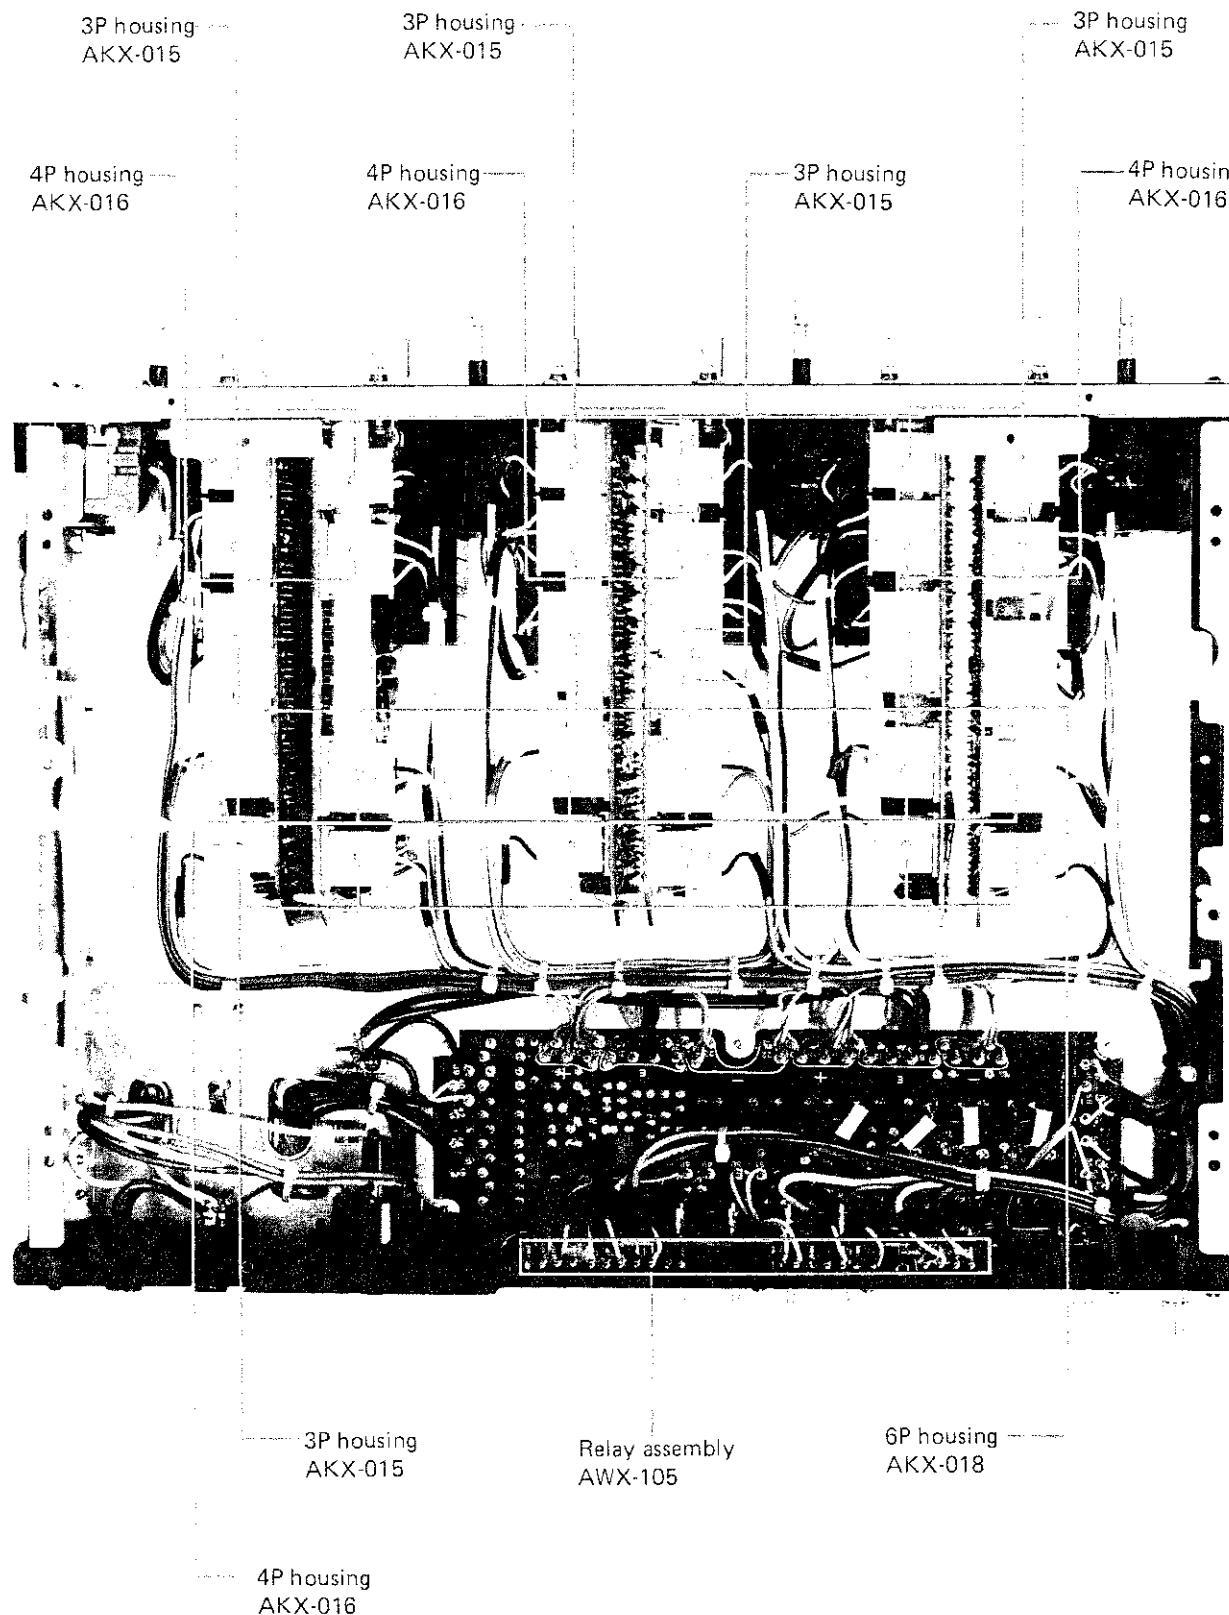



7.5 REAR PANEL VIEW

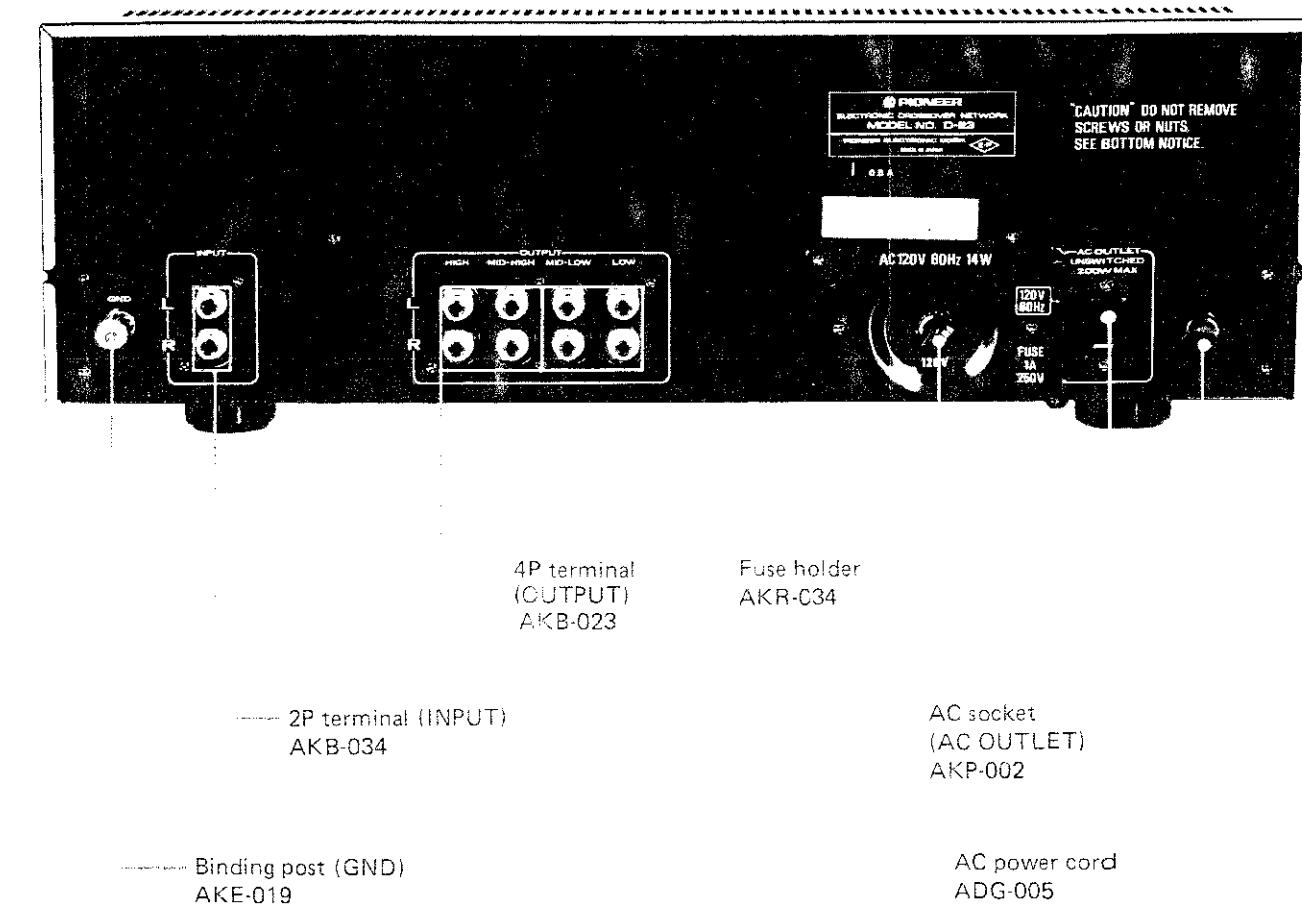



8. EXPLODED VIEWS

8.1 EXTERNAL PARTS

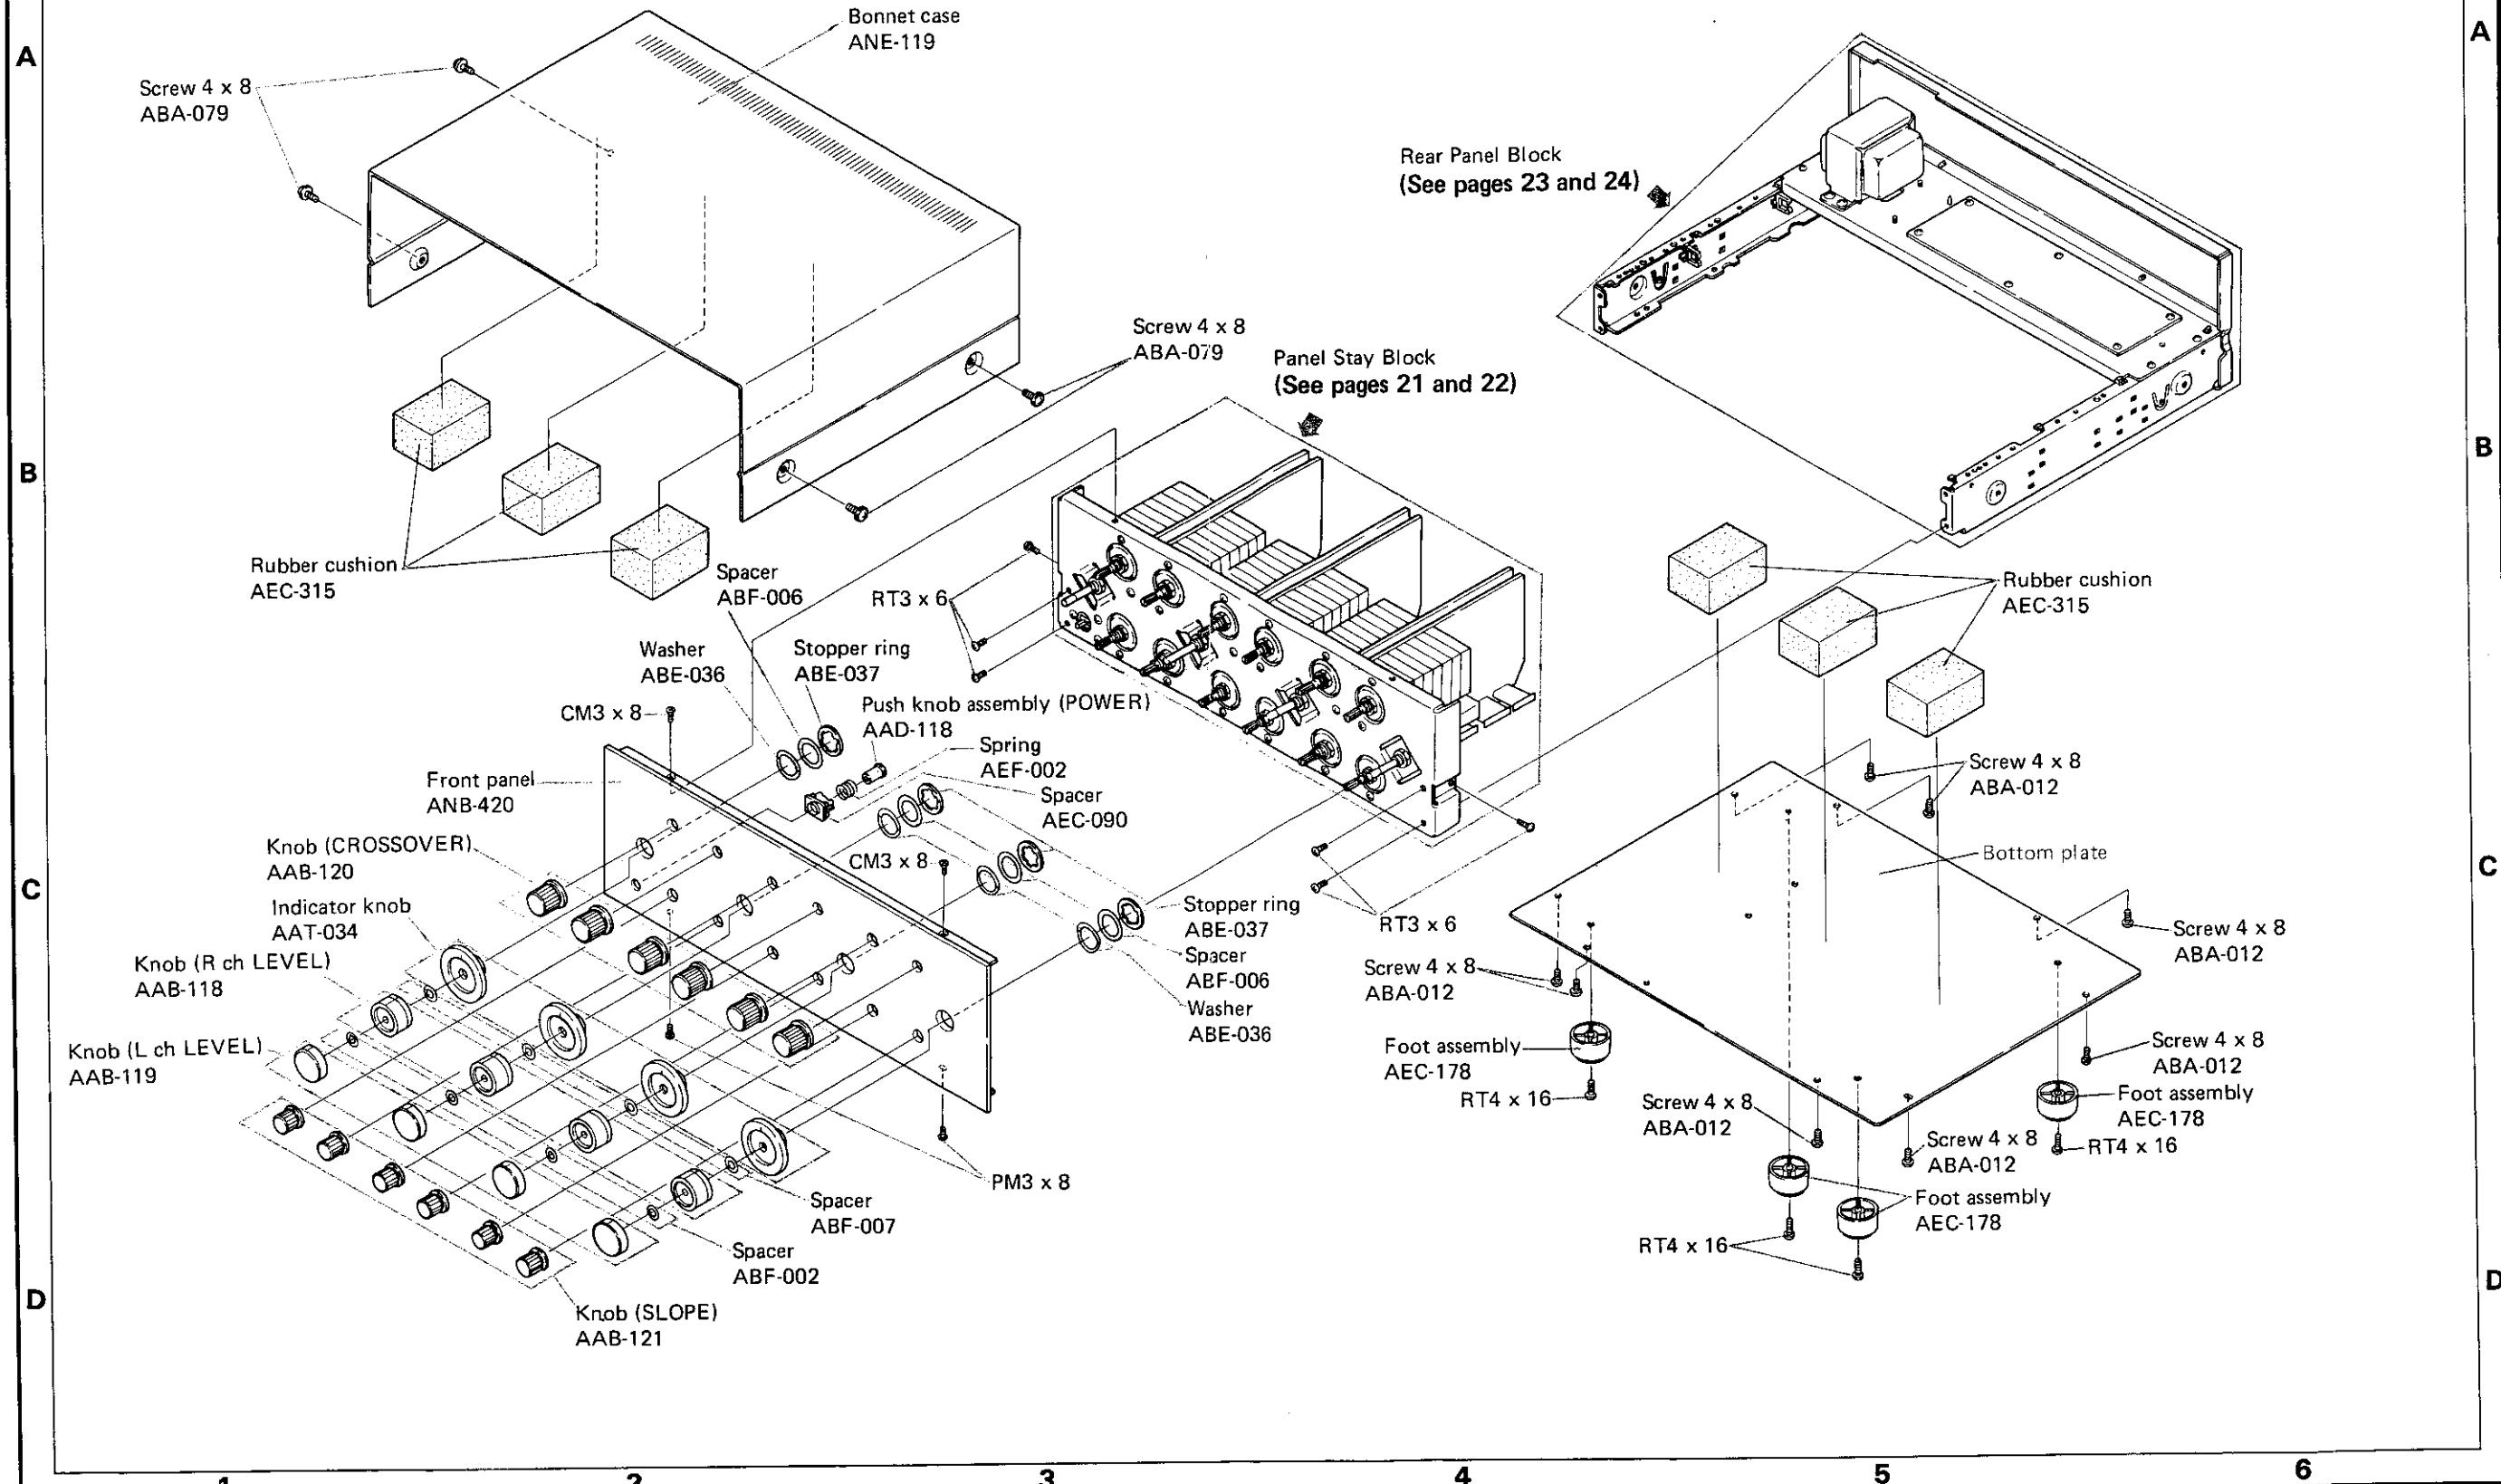

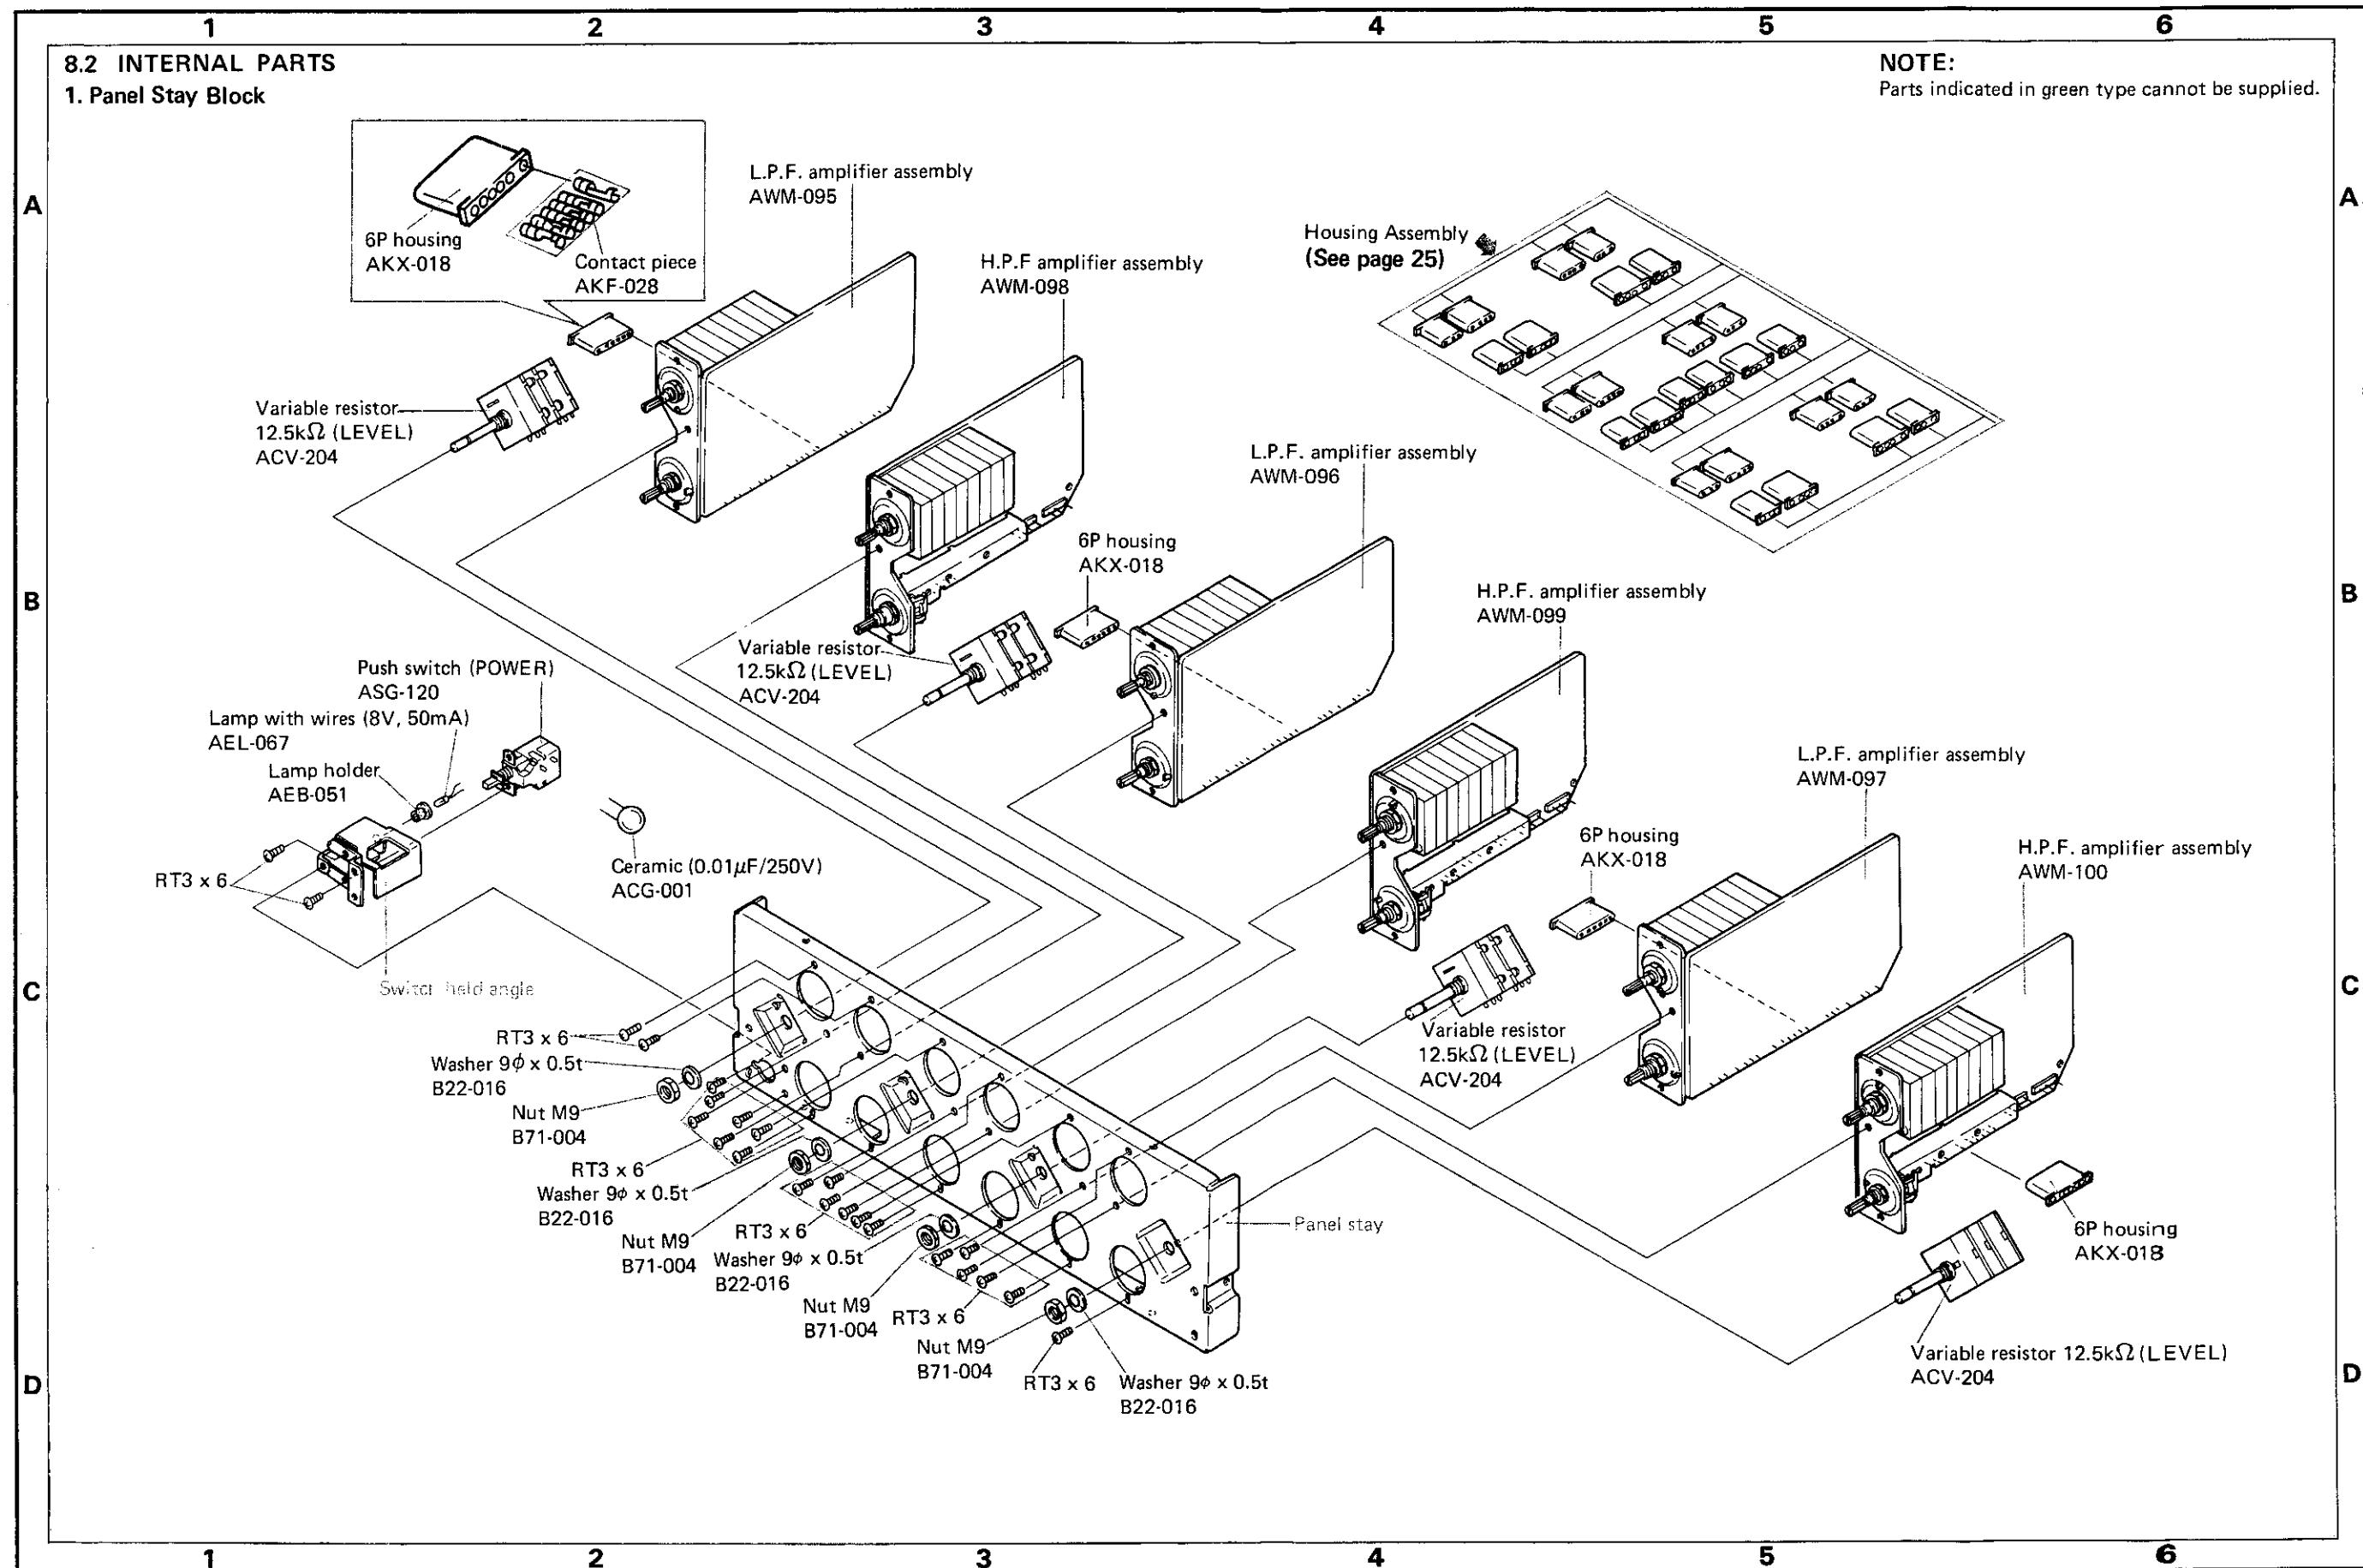

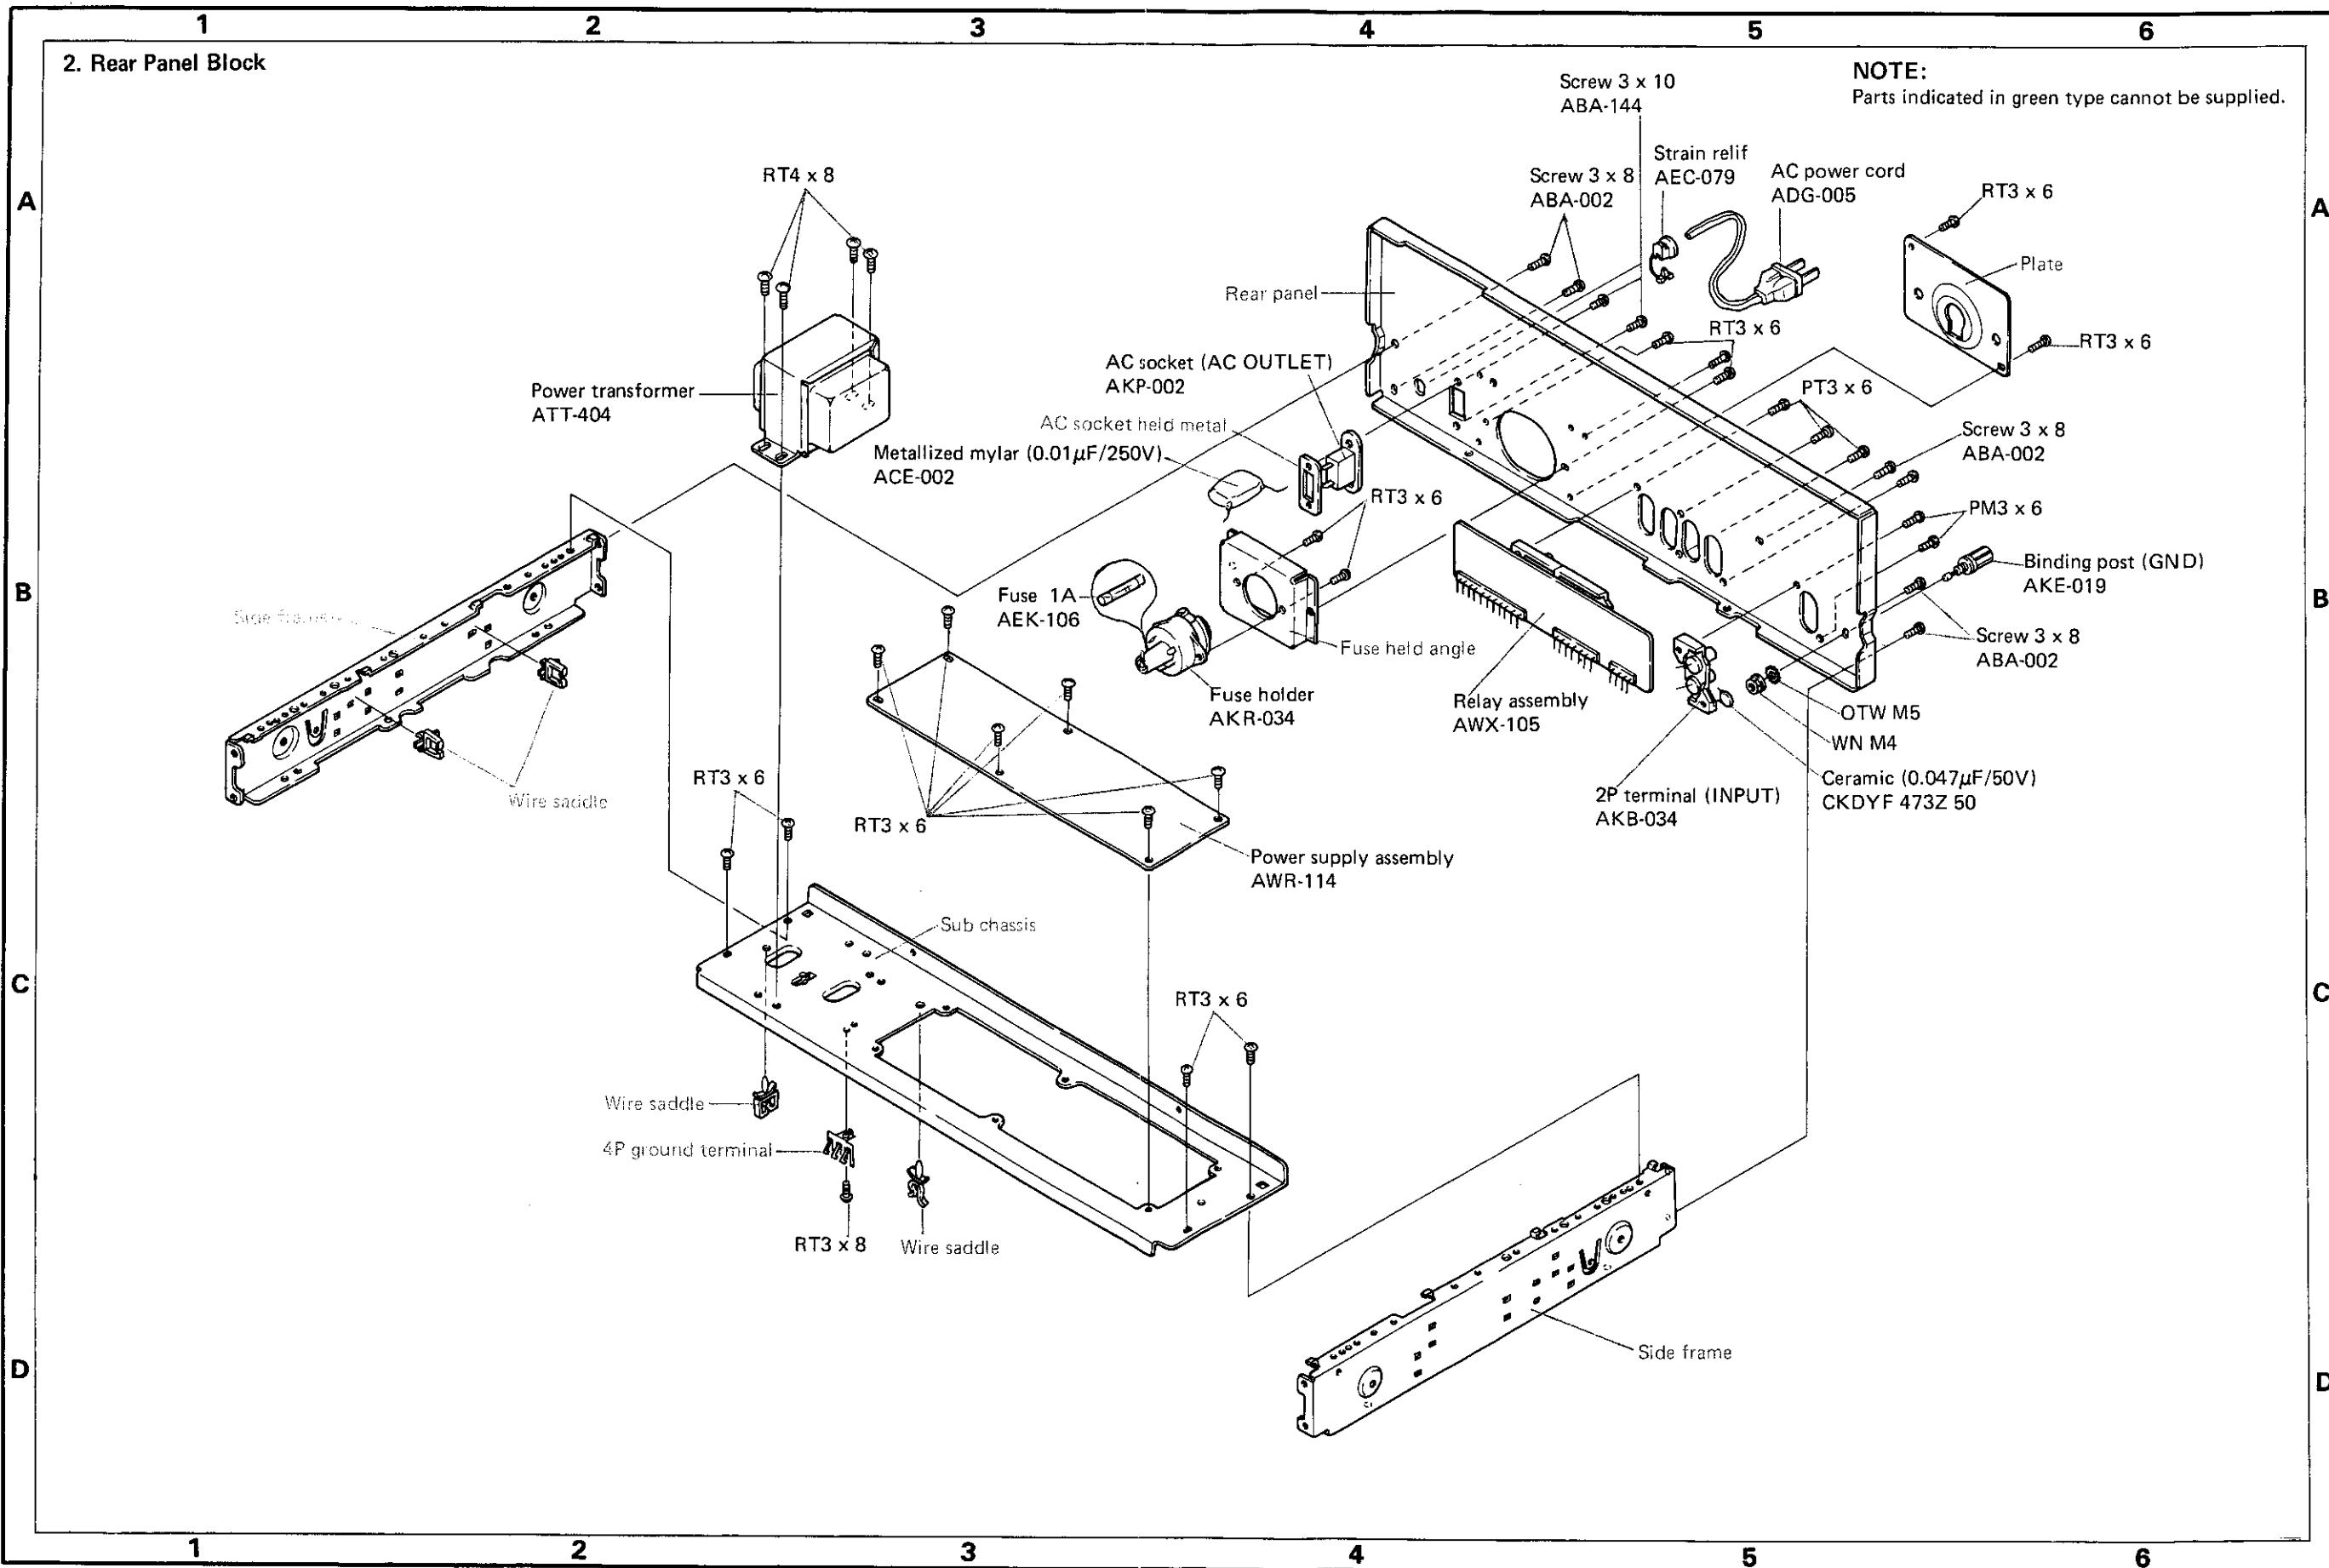

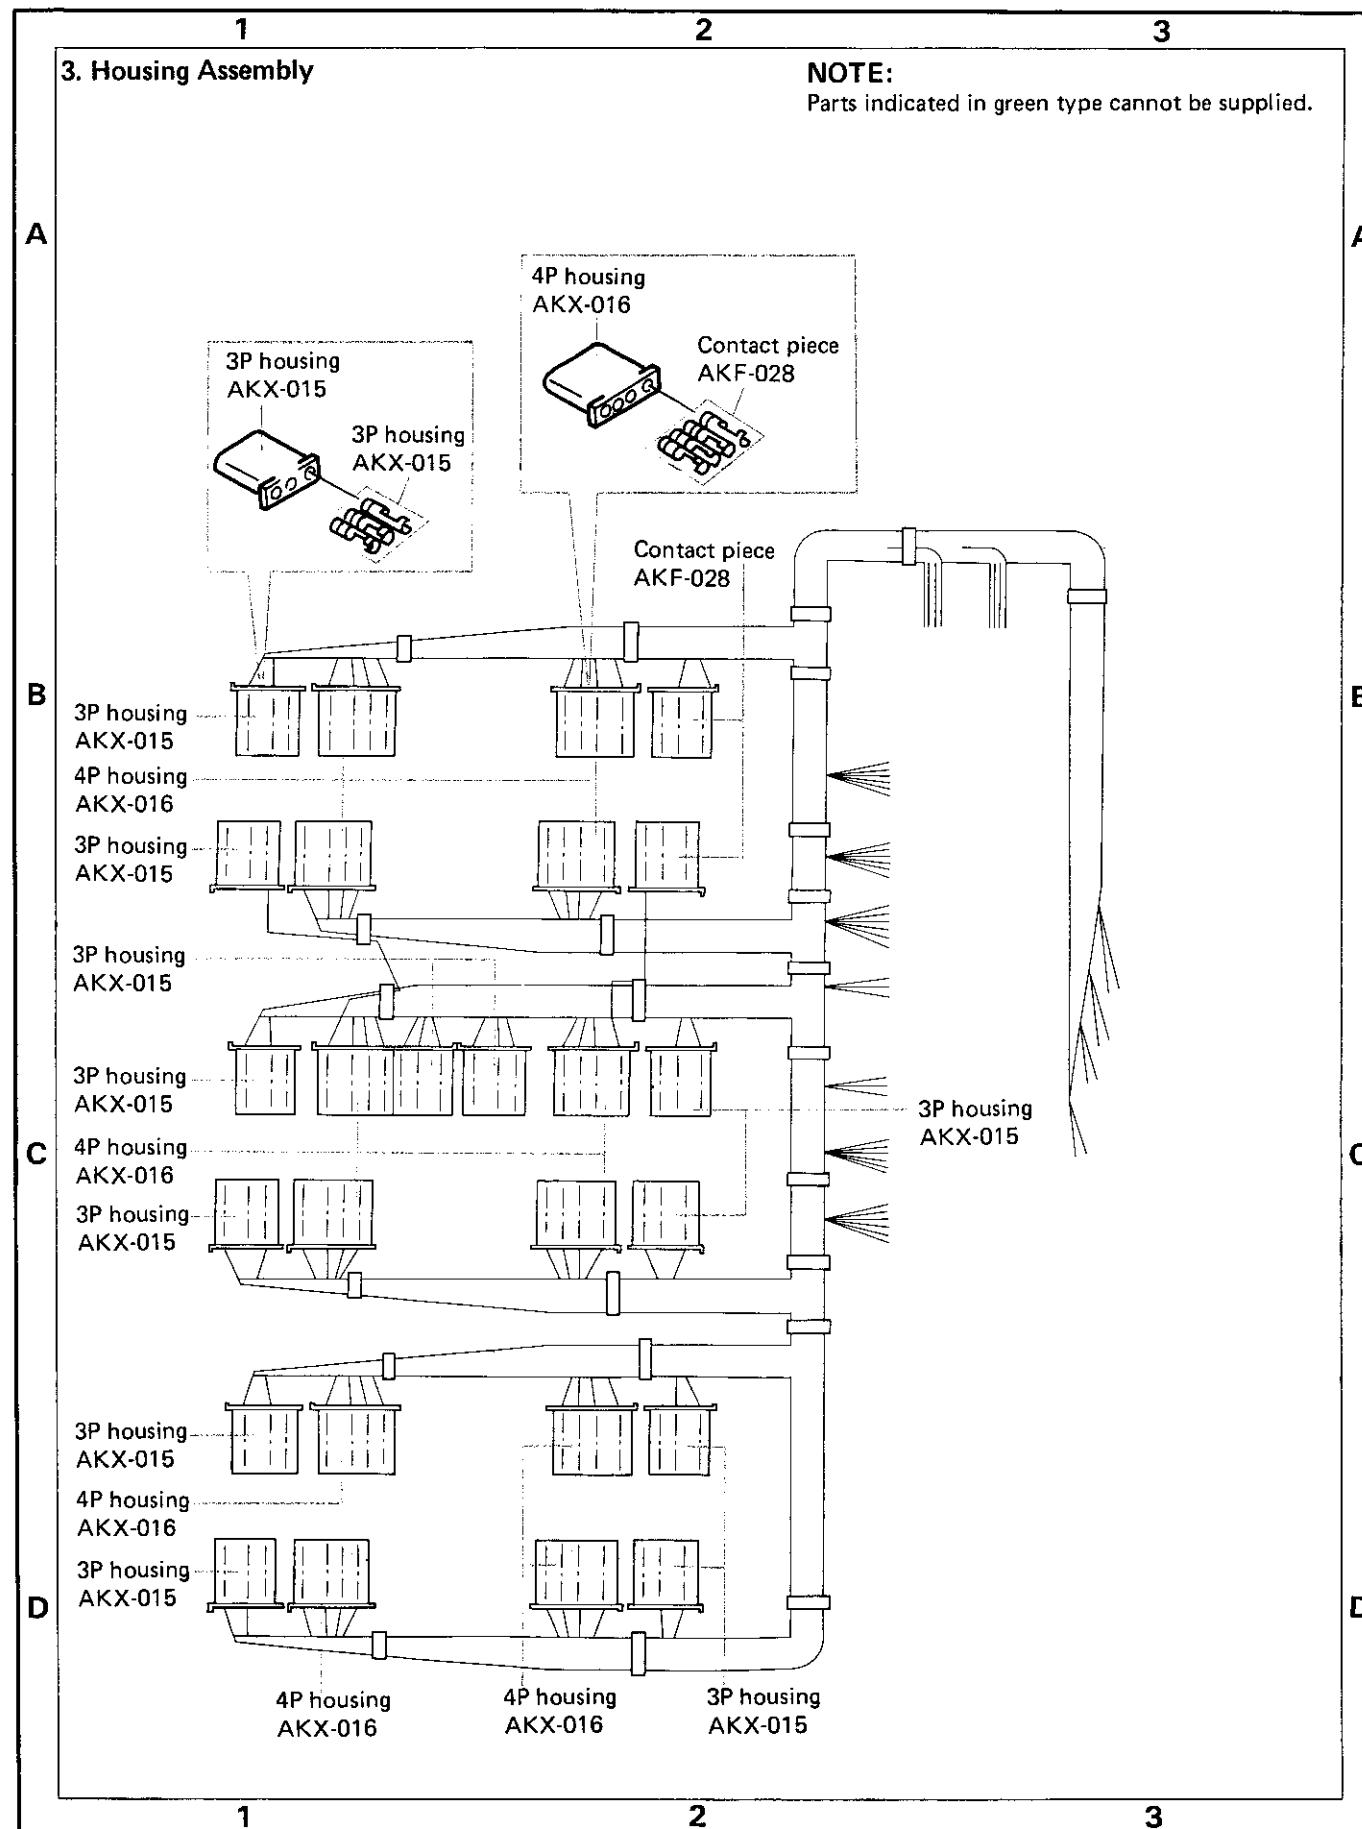

The following symbols stand for screws, washers and nuts as shown in exploded view.

Symbol	Description	Shape
RT	Brazier head tapping screw	
PT	Pan head tapping screw	
BT	Binding head tapping screw	
CT	Countersunk head tapping screw	
TT	Truss head tapping screw	
OCT	Oval countersunk head tapping screw	
PM	Pan head machine screw	
CM	Countersunk head machine screw	
OCM	Oval countersunk head machine screw	
TM	Truss head machine screw	
BM	Binding head machine screw	
PSA	Pan head screw with spring lock washer	
PSB	Pan head screw with spring lock washer and flat washer	
PSF	Pan head screw with flat washer	

Symbol	Description	Shape
EW	E type washer	
FW	Flat washer	
SW	Spring lock washer	
N	Nut	
WN	Washer faced nut	
ITW	Internal toothed lock washer	
OTW	External toothed lock washer	
SC	Slotted set screw (Cone point)	
SF	Slotted set screw (Flat point)	
HS	Hexagon socket headless set screw	
OCW	Oval countersunk head wood screw	
CW	Countersunk head wood screw	
RW	Round head wood screw	


EXAMPLE

PM · 3x8

length in mm (*l*)

diameter in mm (*d*)

Symbol




FW · 9φx1^t

thickness in mm (*t*)

diameter in mm (*d*)

Symbol



1

2

3

4

5


6

9. SCHEMATIC DIAGRAMS, P.C. BOARD PATTERNS AND PARTS LIST

9.1 SCHEMATIC DIAGRAM AND MISCELLANEOUS PARTS LIST


NOTE:

The indicated semiconductors are representative ones only. Other alternative semiconductors may be used and are listed in the parts list.

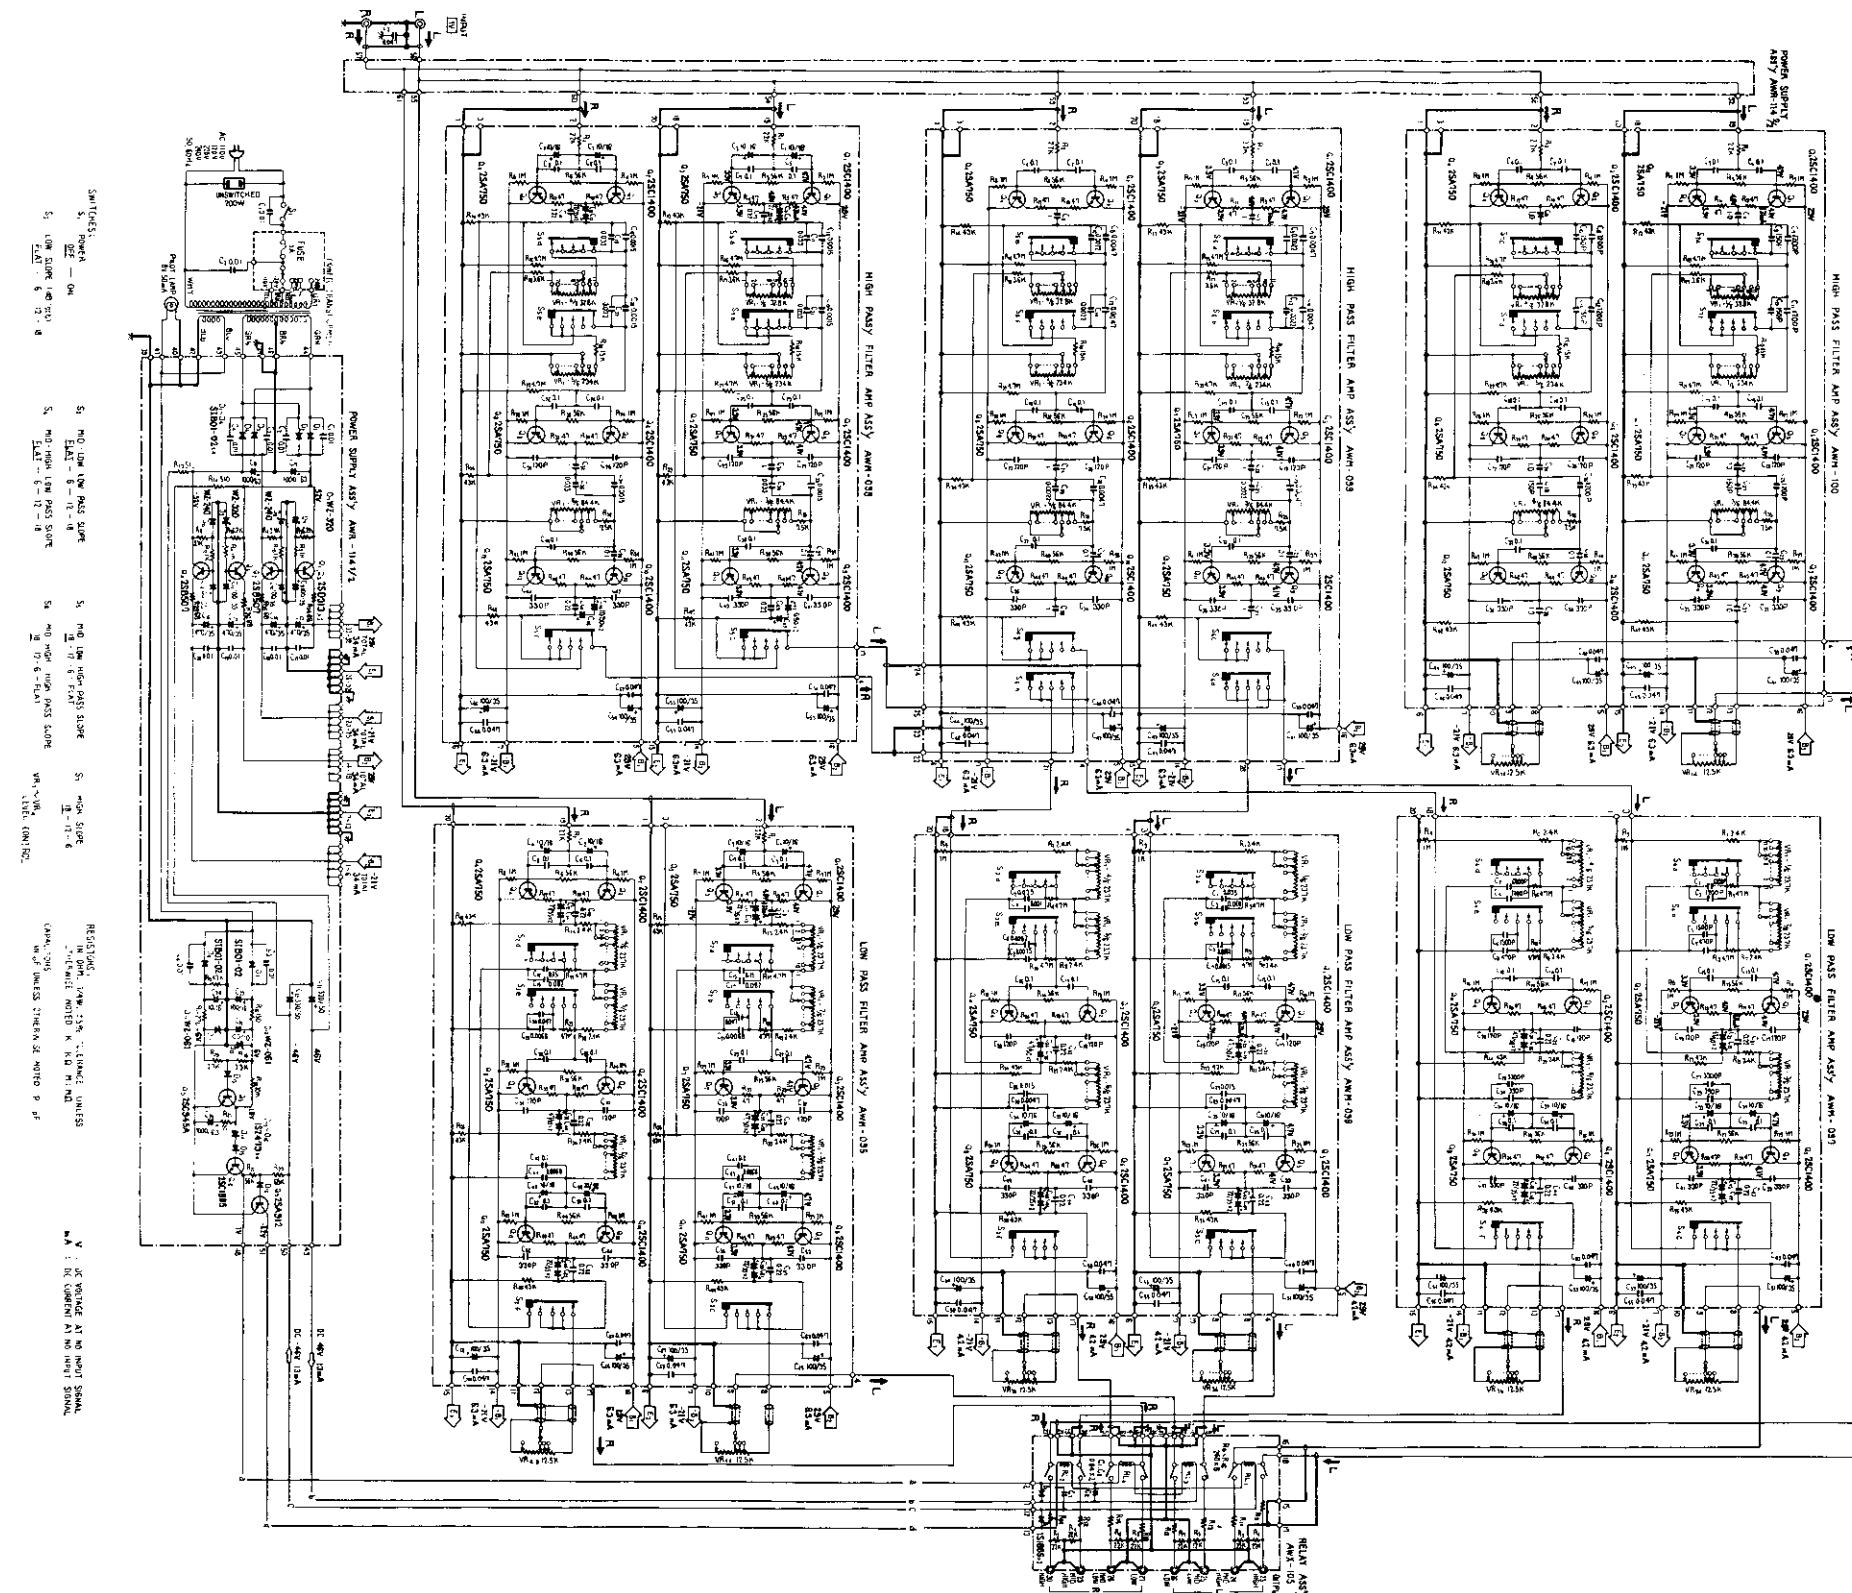


External Appearances of Transistors


2SC1400
2SA750
2SC945A



2SD313
2SD526
2SB507
2SB596



2SC1885
2SA912



A

B

C

D

A

B

C

D

NOTE:

- Capacitors: in μF unless otherwise noted p:pF
- Resistors: in Ω , $\frac{1}{4} W$ unless otherwise noted k:k Ω , M:M Ω

Miscellaneous Parts List**SWITCH**

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>
S1	Push switch (POWER)	ASG-120

LAMP AND FUSE

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>
PL1	Lamp with wires 8V 50mA	AEL-067
FU1	Fuse 1A	AEK-106

TRANSFORMER

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>
T1	Power transformer	ATT-404

CAPACITORS

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>
C1	Ceramic 0.01 250V	ACG-001
C2	Metallized mylar 0.01 250V	ACE-002
C3	Ceramic 0.047 50V	CKDYF 473Z 50

RESISTORS

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>
VR1	Variable resistor 12.5k (LEVEL)	ACV-204
VR2	Variable resistor 12.5k (LEVEL)	ACV-204
VR3	Variable resistor 12.5k (LEVEL)	ACV-204
VR4	Variable resistor 12.5k (LEVEL)	ACV-204

OTHERS


<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>
	L.P.F. amplifier assembly	AWM-095
	L.P.F. amplifier assembly	AWM-096
	L.P.F. amplifier assembly	AWM-097
	H.P.F. amplifier assembly	AWM-098
	H.P.F. amplifier assembly	AWM-099
	H.P.F. amplifier assembly	AWM-100
	Power supply assembly	AWR-114
	Relay assembly	AWX-105
	AC socket (AC OUTLET)	AKP-002
	AC power cord	ADG-005
	Contact piece	AKF-028
	3P housing	AKX-015
	4P housing	AKX-016
	6P housing	AKX-018

List of Changed Parts for Factory Modification

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>

9.2 L.P.F. AMPLIFIER ASSEMBLY (AWM-095)

A

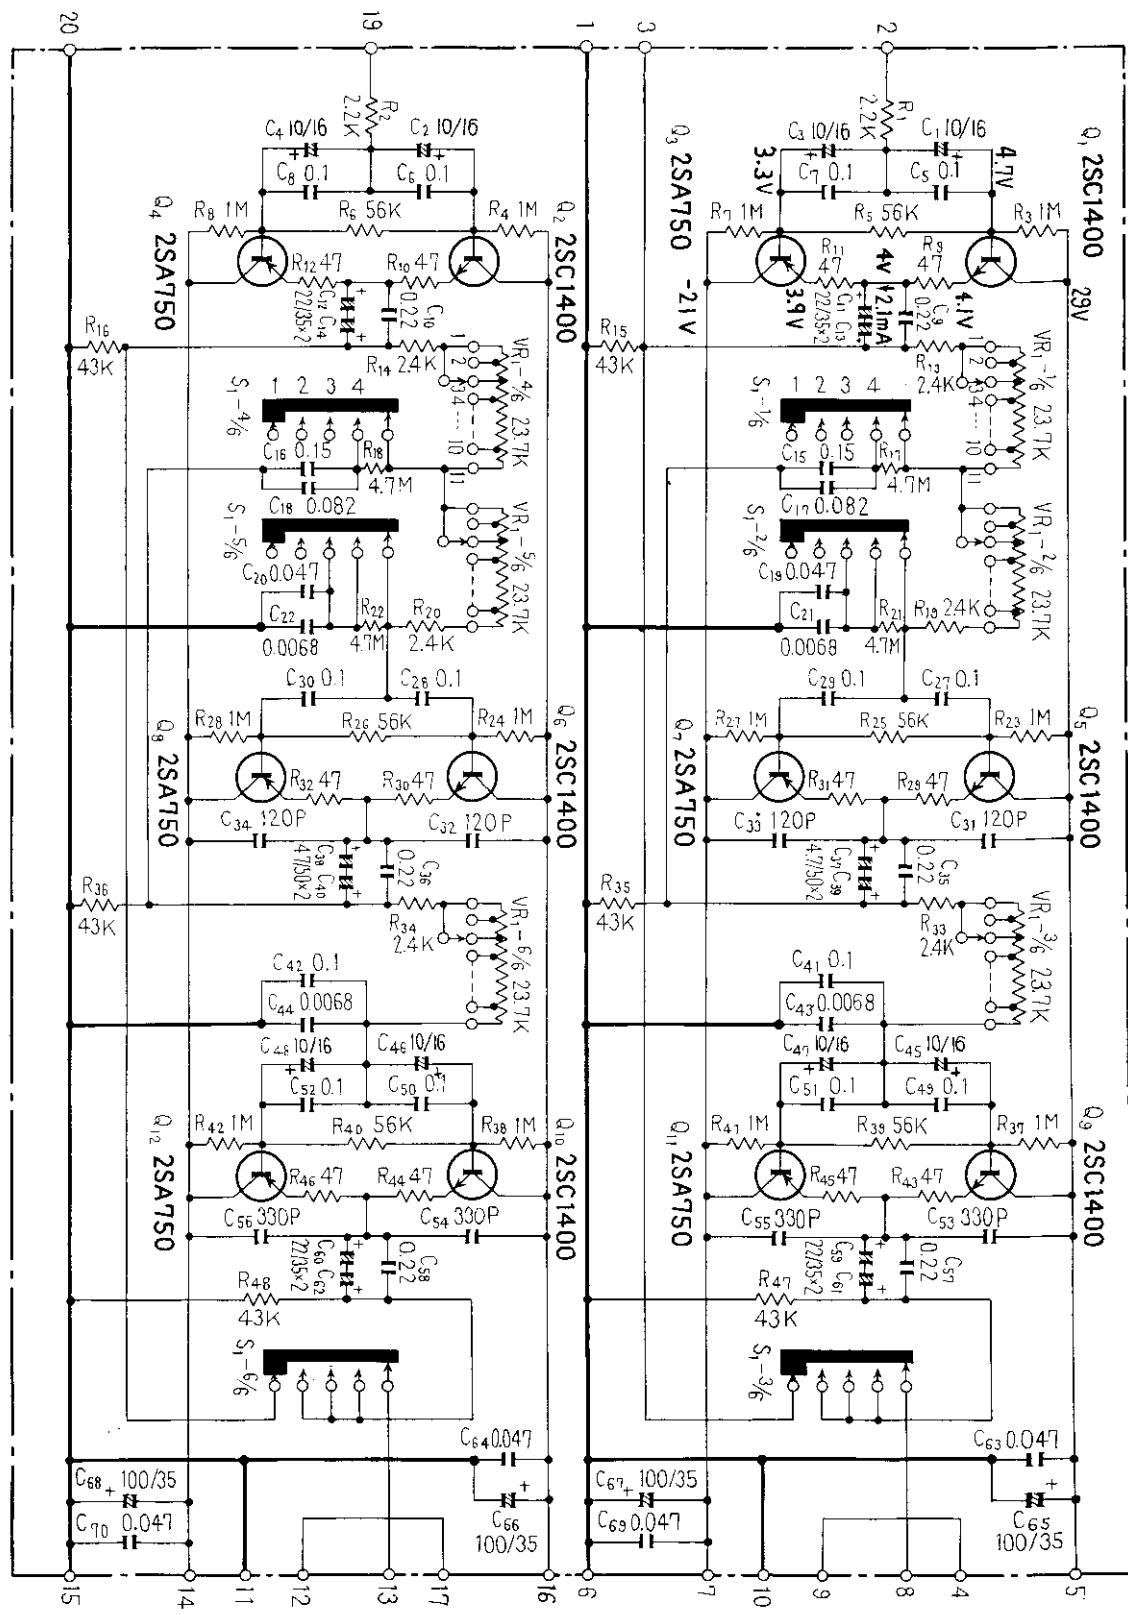

A

B

C

D


1

2

3

A

Foil side

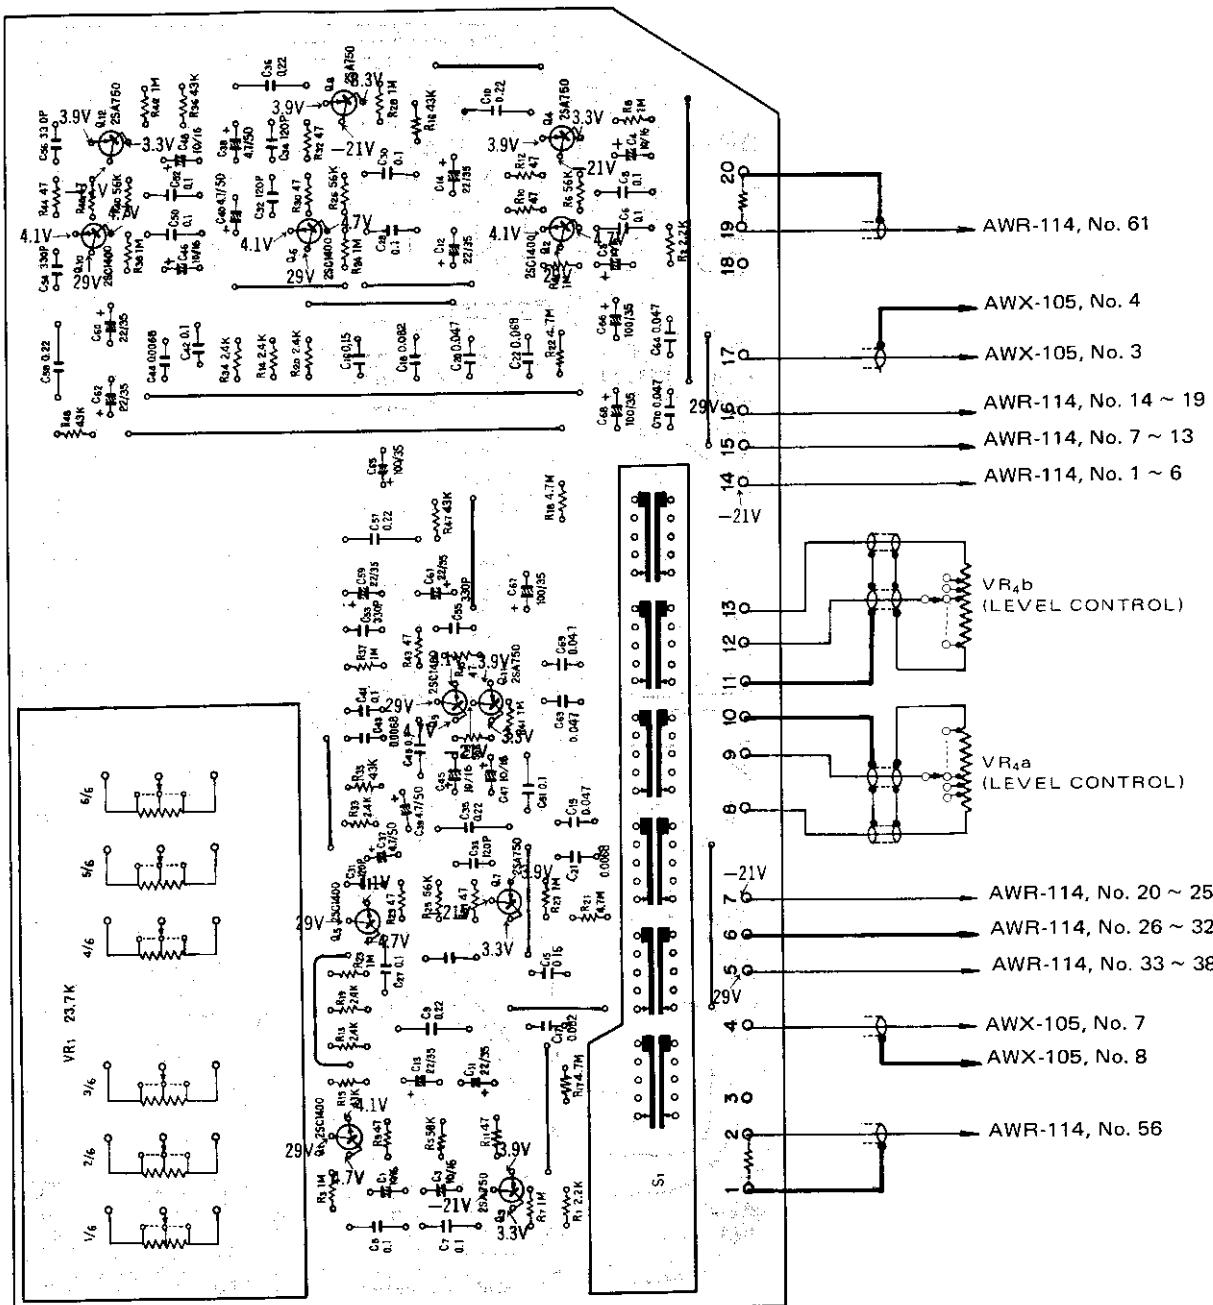

1

2

3

Parts List of L.P.F. Amplifier Assembly (AWM-095)

SWITCH

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>	<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>
S1	Rotary switch (SLOPE)	ASD-059	R41	Carbon film 1M	RD1/4VS 105J NL
			R42	Carbon film 1M	RD1/4VS 105J NL
			R43	Carbon film 47	RD1/4VS 470J
			R44	Carbon film 47	RD1/4VS 470J
			R45	Carbon film 47	RD1/4VS 470J
RESISTORS			R46	Carbon film 47	RD1/4VS 470J
VR1			R47	Carbon film 43k	RD1/4VS 433J
R1	Carbon film 2.2k	RD1/4VS 222J	R48	Carbon film 43k	RD1/4VS 433J
R2	Carbon film 2.2k	RD1/4VS 222J	CAPACITORS		
R3	Carbon film 1M	RD1/4VS 105J NL	C1	Electrolytic 10	CEANL 100P 16
R4	Carbon film 1M	RD1/4VS 105J NL	C2	Electrolytic 10	CEANL 100P 16
R5	Carbon film 56k	RD1/4VS 563J	C3	Electrolytic 10	CEANL 100P 16
R6	Carbon film 56k	RD1/4VS 563J	C4	Electrolytic 10	CEANL 100P 16
R7	Carbon film 1M	RD1/4VS 105J NL	C5	Mylar 0.1	CQMA 104J 50
R8	Carbon film 1M	RD1/4VS 105J NL	C6	Mylar 0.1	CQMA 104J 50
R9	Carbon film 47	RD1/4VS 470J	C7	Mylar 0.1	CQMA 104J 50
R10	Carbon film 47	RD1/4VS 470J	C8	Mylar 0.1	CQMA 104J 50
R11	Carbon film 47	RD1/4VS 470J	C9	Mylar 0.22	CQMA 224J 50
R12	Carbon film 47	RD1/4VS 470J	C10	Mylar 0.22	CQMA 224J 50
R13	Carbon film 2.4k	RD1/4VS 242J	C11	Electrolytic 22	CEANL 220P 35
R14	Carbon film 2.4k	RD1/4VS 242J	C12	Electrolytic 22	CEANL 220P 35
R15	Carbon film 43k	RD1/4VS 433J	C13	Electrolytic 22	CEANL 220P 35
R16	Carbon film 43k	RD1/4VS 433J	C14	Electrolytic 22	CEANL 220P 35
R17	Carbon film 4.7M	RD1/4VS 475J	C15	Polypropylene 0.15	CQPA 154G 50
R18	Carbon film 4.7M	RD1/4VS 475J	C16	Polypropylene 0.15	CQPA 154G 50
R19	Carbon film 2.4k	RD1/4VS 242J	C17	Mylar 0.082	CQMA 823J 50
R20	Carbon film 2.4k	RD1/4VS 242J	C18	Mylar 0.082	CQMA 823J 50
R21	Carbon film 4.7M	RD1/4VS 475J	C19	Polypropylene 0.047	CQPA 473G 50
R22	Carbon film 4.7M	RD1/4VS 475J	C20	Polypropylene 0.047	CQPA 473G 50
R23	Carbon film 1M	RD1/4VS 105J NL	C21	Mylar 6800p	CQMA 682J 50
R24	Carbon film 1M	RD1/4VS 105J NL	C22	Mylar 6800p	CQMA 682J 50
R25	Carbon film 56k	RD1/4VS 563J	C23
R26	Carbon film 56k	RD1/4VS 563J	C24
R27	Carbon film 1M	RD1/4VS 105J NL	C25
R28	Carbon film 1M	RD1/4VS 105J NL	C26
R29	Carbon film 47	RD1/4VS 470J	C27	Mylar 0.1	CQMA 104J 50
R30	Carbon film 47	RD1/4VS 470J	C28	Mylar 0.1	CQMA 104J 50
R31	Carbon film 47	RD1/4VS 470J	C29	Mylar 0.1	CQMA 104J 50
R32	Carbon film 47	RD1/4VS 470J	C30	Mylar 0.1	CQMA 104J 50
R33	Carbon film 2.4k	RD1/4VS 242J	C31	Polystyrene 120p	CQSA 121J 50
R34	Carbon film 2.4k	RD1/4VS 242J	C32	Polystyrene 120p	CQSA 121J 50
R35	Carbon film 43k	RD1/4VS 433J	C33	Polystyrene 120p	CQSA 121J 50
R36	Carbon film 43k	RD1/4VS 433J	C34	Polystyrene 120p	CQSA 121J 50
R37	Carbon film 1M	RD1/4VS 105J NL	C35	Mylar 0.22	CQMA 224J 50
R38	Carbon film 1M	RD1/4VS 105J NL			
R39	Carbon film 56k	RD1/4VS 563J			
R40	Carbon film 56k	RD1/4VS 563J			

<u>Symbol</u>	<u>Description</u>		<u>Part No.</u>
C36	Mylar	0.22	50V CQMA 224J 50
C37	Electrolytic	4.7	50V CEANL 4R7P 50
C38	Electrolytic	4.7	50V CEANL 4R7P 50
C39	Electrolytic	4.7	50V CEANL 4R7P 50
C40	Electrolytic	4.7	50V CEANL 4R7P 50
C41	Polypropylene	0.1	50V COPA 104G 50
C42	Polypropylene	0.1	50V COPA 104G 50
C43	Mylar	6800p	50V CQMA 682J 50
C44	Mylar	6800p	50V CQMA 682J 50
C45	Electrolytic	10	16V CEANL 100P 16
C46	Electrolytic	10	16V CEANL 100P 16
C47	Electrolytic	10	16V CEANL 100P 16
C48	Electrolytic	10	16V CEANL 100P 16
C49	Mylar	0.1	50V CQMA 104J 50
C50	Mylar	0.1	50V CQMA 104J 50
C51	Mylar	0.1	50V CQMA 104J 50
C52	Mylar	0.1	50V CQMA 104J 50
C53	Ceramic	330p	50V CKDYF 331Z 50
C54	Ceramic	330p	50V CKDYF 331Z 50
C55	Ceramic	330p	50V CKDYF 331Z 50
C56	Ceramic	330p	50V CKDYF 331Z 50
C57	Mylar	0.22	50V CQMA 224J 50
C58	Mylar	0.22	50V CQMA 224J 50
C59	Electrolytic	22	35V CEANL 220P 35
C60	Electrolytic	22	35V CEANL 220P 35
C61	Electrolytic	22	35V CEANL 220P 35
C62	Electrolytic	22	35V CEANL 220P 35
C63	Mylar	0.047	50V CQMA 473J 50
C64	Mylar	0.047	50V CQMA 473J 50
C65	Electrolytic	100	35V CEA 101P 35
C66	Electrolytic	100	35V CEA 101P 35
C67	Electrolytic	100	35V CEA 101P 35
C68	Electrolytic	100	35V CEA 101P 35
C69	Mylar	0.047	50V CQMA 473J 50
C70	Mylar	0.047	50V CQMA 473J 50

SEMICONDUCTORS

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>
Q1	Transistor	2SC1400-E
Q2	Transistor	2SC1400-E
Q3	Transistor	2SA750-E
Q4	Transistor	2SA750-E
Q5	Transistor	2SC1400-E
Q6	Transistor	2SC1400-E
Q7	Transistor	2SA750-E
Q8	Transistor	2SA750-E
Q9	Transistor	2SC1400-E
Q10	Transistor	2SC1400-E
Q11	Transistor	2SA750-E
Q12	Transistor	2SA750-E

OTHERS

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>
	3P Plug	AKM-033
	4P Plug	AKM-034
	6P Plug	AKM-036
	Nut M9	ABN-024
	Nut M7	B71-010
	Washer M7	B22-018
	Clip	AEC-311

List of Changed Parts for Factory Modification

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>

9.3 L.P.F. AMPLIFIER ASSEMBLY (AWM-096)

A

A

B

B

C

C

D

D

1


2


3

1

2

3

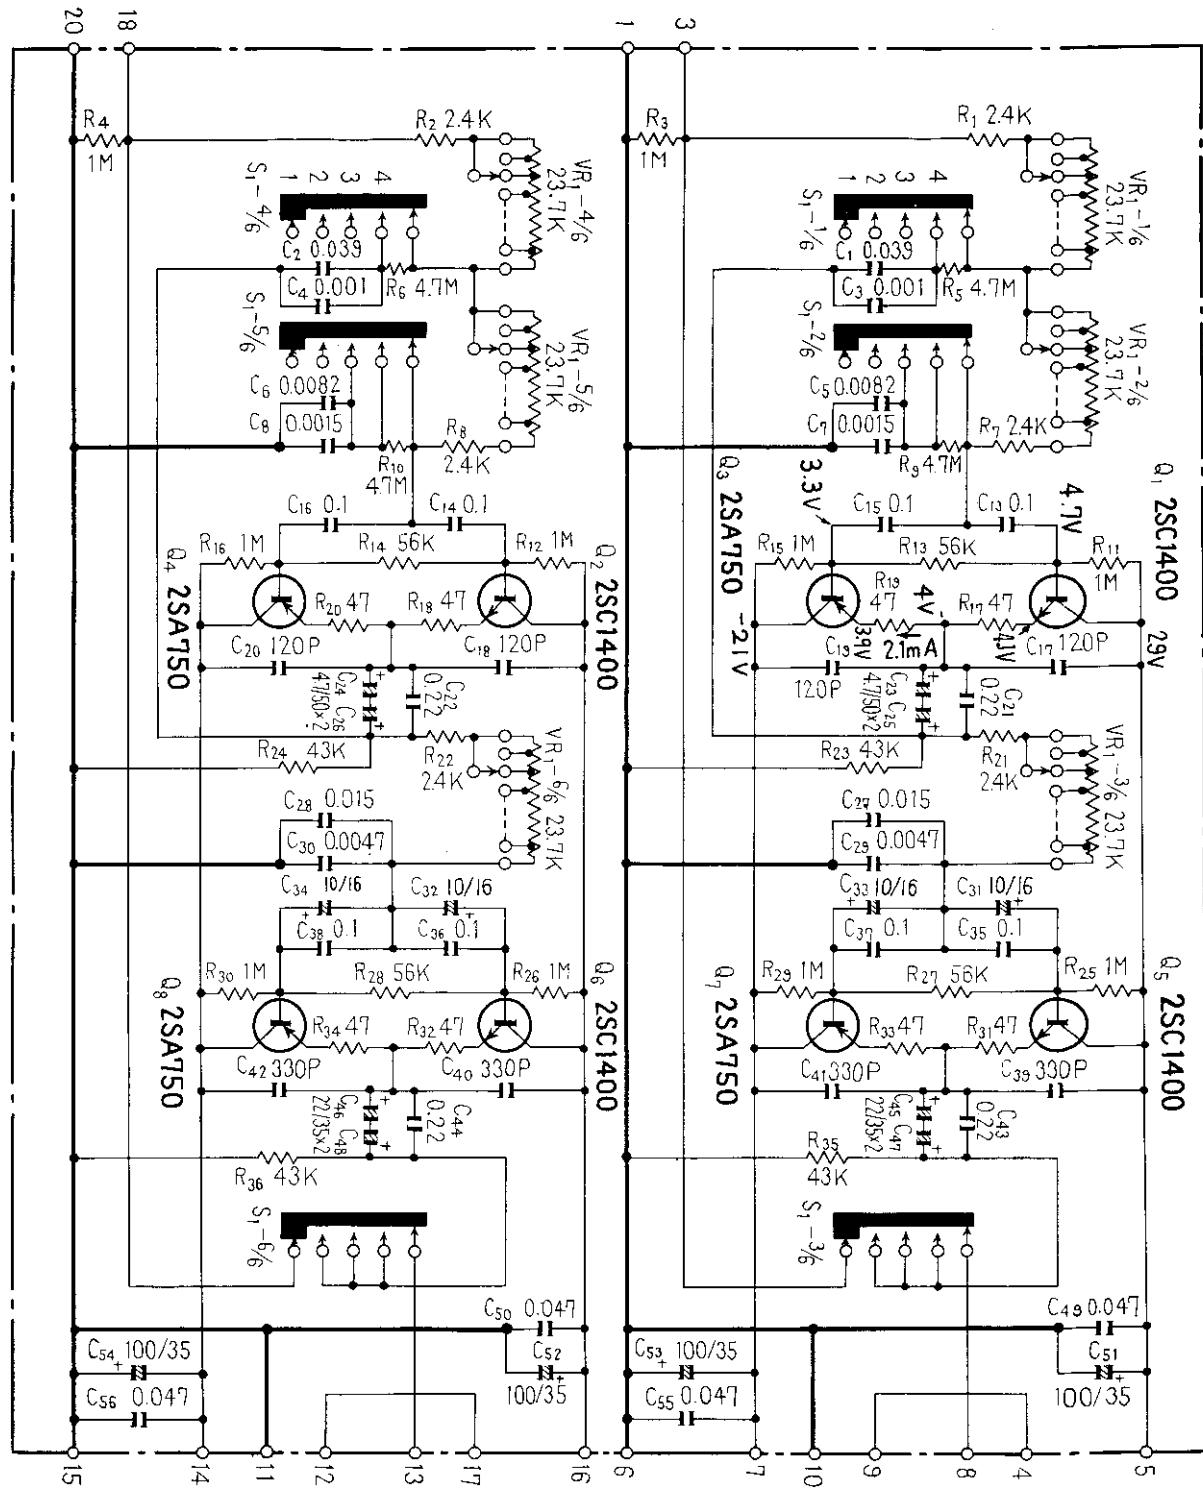

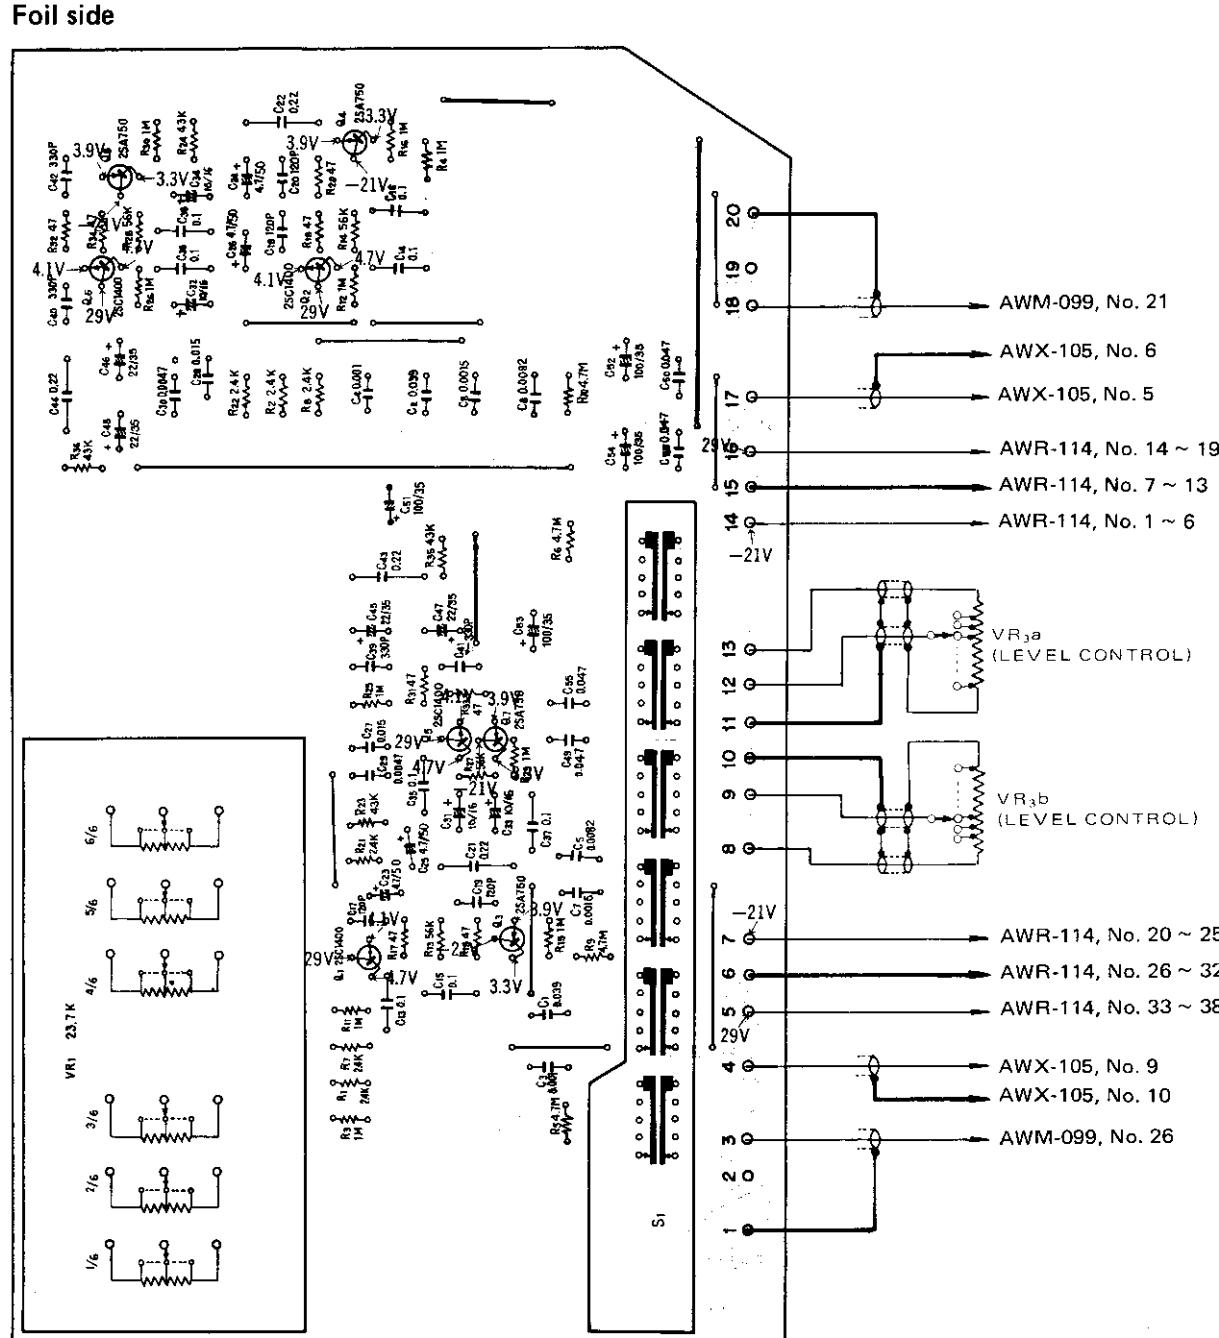

Parts List of L.P.F. Amplifier Assembly (AWM-096)

SWITCH

CAPACITORS

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>	<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>
S1	Rotary switch (SLOPE)	ASD-059	C1	Polypropylene	0.039 50V
			C2	Polypropylene	0.039 50V
			C3	Mylar	1000p 50V
			C4	Mylar	1000p 50V
			C5	Polypropylene	8200p 50V
RESISTORS			C6	Polypropylene	8200p 50V
			C7	Mylar	1500p 50V
			C8	Mylar	1500p 50V
R1	Carbon film	2.4k	C9
R2	Carbon film	2.4k	C10
R3	Carbon film	1M	RD1VS 105J		
R4	Carbon film	1M	RD1VS 105J		
R5	Carbon film	4.7M	RD1VS 475J		
R6	Carbon film	4.7M	RD1VS 475J		
R7	Carbon film	2.4k	RD1VS 242J		
R8	Carbon film	2.4k	RD1VS 242J		
R9	Carbon film	4.7M	RD1VS 475J		
R10	Carbon film	4.7M	RD1VS 475J		
R11	Carbon film	1M	RD1VS 105J NL		
R12	Carbon film	1M	RD1VS 105J NL		
R13	Carbon film	56k	RD1VS 563J		
R14	Carbon film	56k	RD1VS 563J		
R15	Carbon film	1M	RD1VS 105J NL		
R16	Carbon film	1M	RD1VS 105J NL		
R17	Carbon film	47	RD1VS 470J		
R18	Carbon film	47	RD1VS 470J		
R19	Carbon film	47	RD1VS 470J		
R20	Carbon film	47	RD1VS 470J		
R21	Carbon film	2.4k	RD1VS 242J		
R22	Carbon film	2.4k	RD1VS 242J		
R23	Carbon film	43k	RD1VS 433J		
R24	Carbon film	43k	RD1VS 433J		
R25	Carbon film	1M	RD1VS 105J NL		
R26	Carbon film	1M	RD1VS 105J NL		
R27	Carbon film	56k	RD1VS 563J		
R28	Carbon film	56k	RD1VS 563J		
R29	Carbon film	1M	RD1VS 105J NL		
R30	Carbon film	1M	RD1VS 105J NL		
R31	Carbon film	47	RD1VS 470J		
R32	Carbon film	47	RD1VS 470J		
R33	Carbon film	47	RD1VS 470J		
R34	Carbon film	47	RD1VS 470J		
R35	Carbon film	43k	RD1VS 433J		
R36	Carbon film	43k	RD1VS 433J		
			C46	Electrolytic	22 35V
			C47	Electrolytic	22 35V
			C48	Electrolytic	22 35V
			C49	Mylar	0.047 50V
			C50	Mylar	0.047 50V

List of Changed Parts for Factory Modification

<u>Symbol</u>	<u>Description</u>			<u>Part No.</u>
C51	Electrolytic	100	35V	CEA 101P 35
C52	Electrolytic	100	35V	CEA 101P 35
C53	Electrolytic	100	35V	CEA 101P 35
C54	Electrolytic	100	35V	CEA 101P 35
C55	Mylar	0.047	50V	CQMA 473J 50
C56	Mylar	0.047	50V	CQMA 473J 50

SEMICONDUCTORS

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>
Q1	Transistor	2SC1400-E
Q2	Transistor	2SC1400-E
Q3	Transistor	2SA750-E
Q4	Transistor	2SA750-E
Q5	Transistor	2SC1400-E
Q6	Transistor	2SC1400-E
Q7	Transistor	2SA750-E
Q8	Transistor	2SA750-E


OTHERS

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>
	3P plug	AKM-033
	4P Plug	AKM-034
	6P Plug	AKM-036
	Nut M9	ABN-024
	Nut M7	B71-010
	Washer M7	B22-018
	Clip	AEC-311

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>

9.4 L.P.F. AMPLIFIER ASSEMBLY (AWM-097)

A

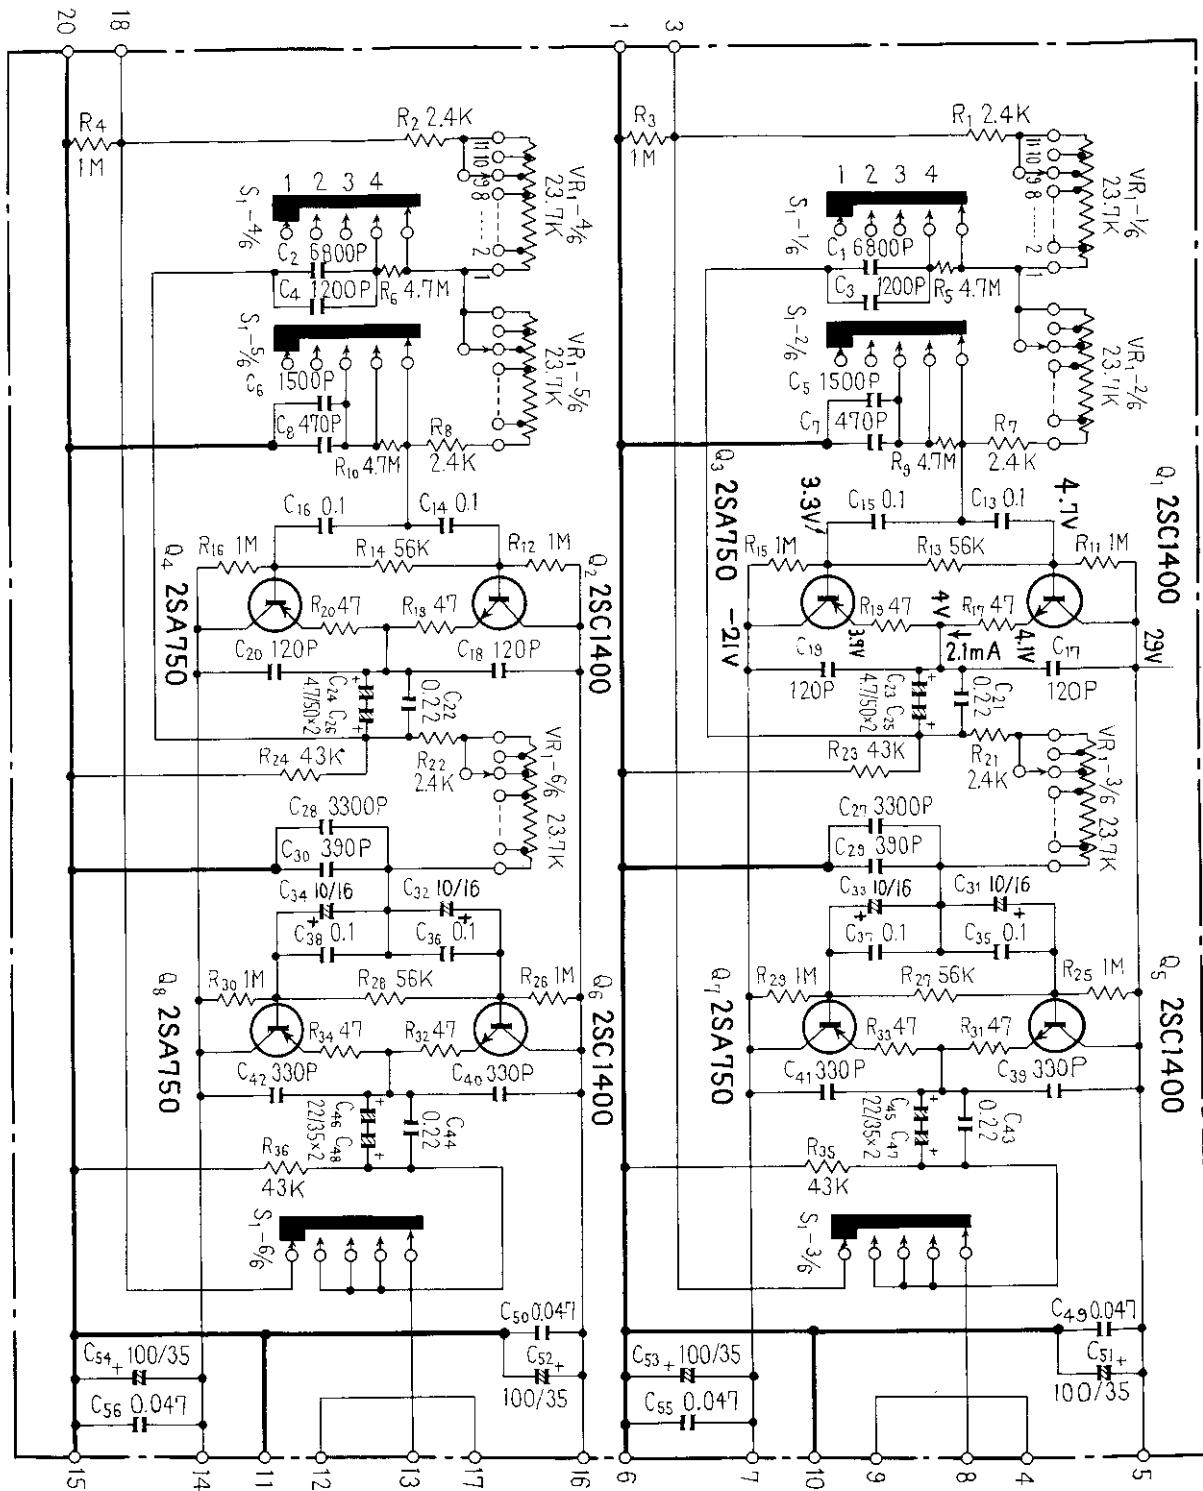


A

B

C

D

D

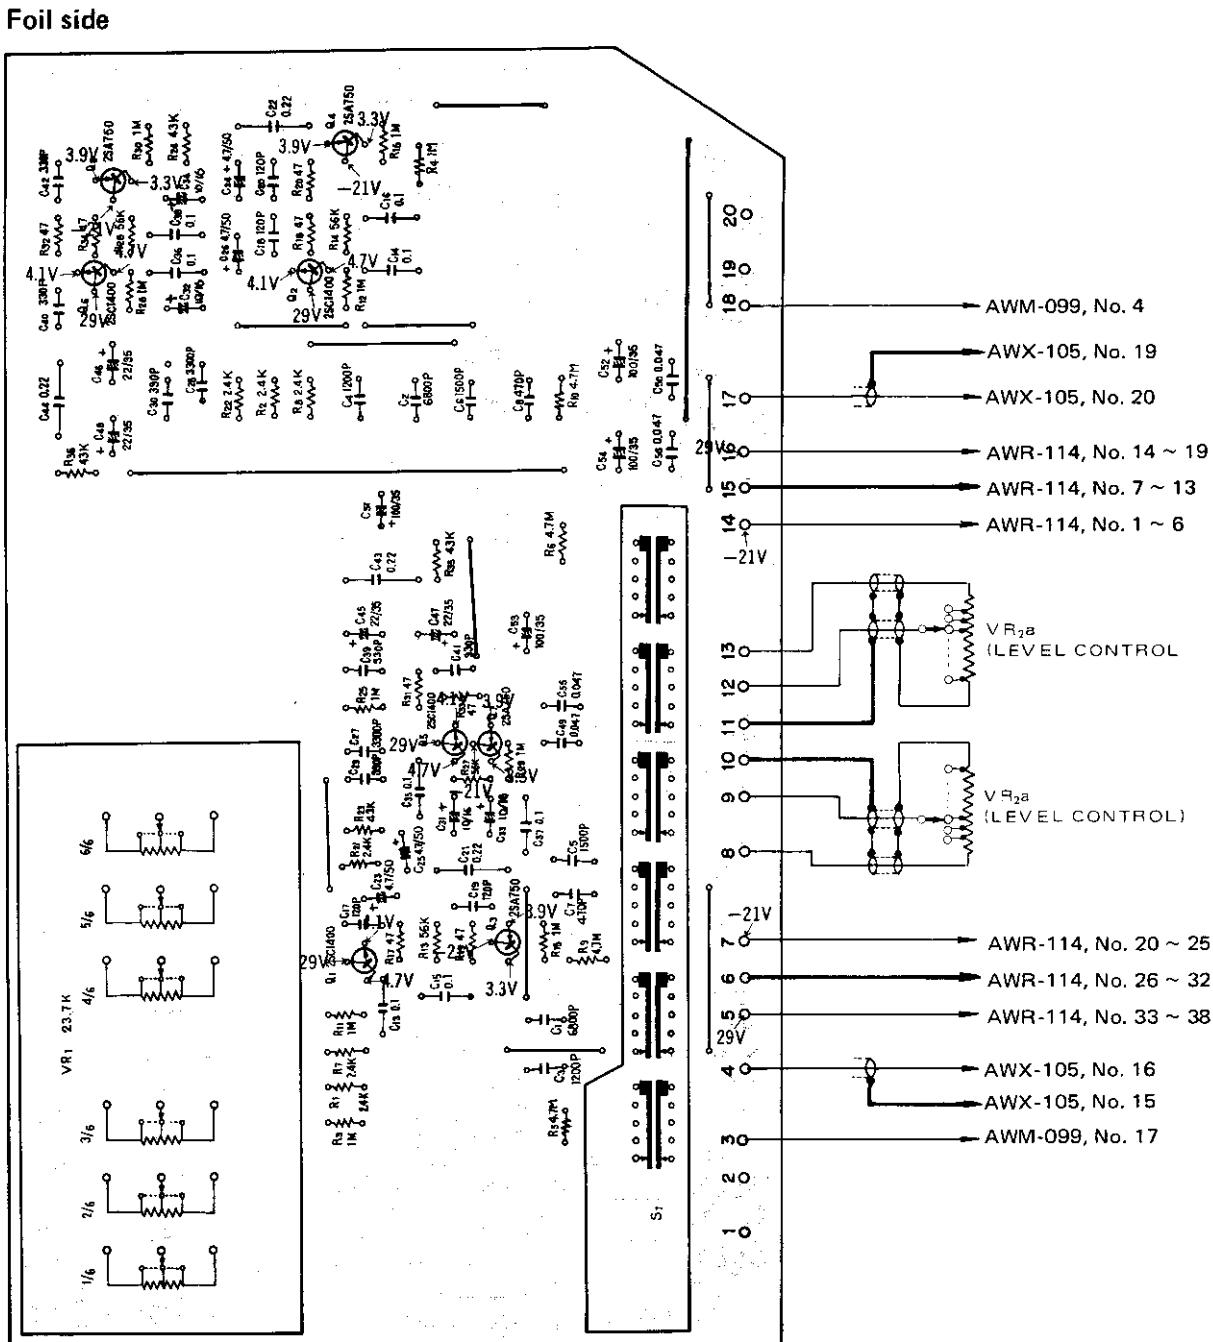

Parts List of L.P.F. Amplifier Assembly (AWM-097)

SWITCH

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>
S1	Rotary switch (SLOPE)	ASD-059

RESISTORS

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>
VR1	Variable resistor (CROSSOVER)	ACV-601

SWITCH			CAPACITORS				
<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>	<u>Symbol</u>	<u>Description</u>	<u>Value</u>	<u>Voltage</u>	<u>Part No.</u>
S1	Rotary switch (SLOPE)	ASD-059	C1	Polypropylene	6800p	50V	CQPA 682G 50
			C2	Polypropylene	6800p	50V	CQPA 682G 50
			C3	Mylar	1200p	50V	CQMA 122J 50
			C4	Mylar	1200p	50V	CQMA 122J 50
			C5	Polypropylene	1500p	50V	CQPA 152G 50
RESISTORS			C6	Polypropylene	1500p	50V	CQPA 152G 50
VR1	Variable resistor (CROSSOVER)	ACV-601	C7	Polystyrene	470p	50V	CQSA 471J 50
R1	Carbon film	2.4k	C8	Polystyrene	470p	50V	CQSA 471J 50
R2	Carbon film	2.4k	C9
R3	Carbon film	1M	C10
R4	Carbon film	1M	C11
R5	Carbon film	4.7M	C12
R6	Carbon film	4.7M	C13	Mylar	0.1	50V	CQMA 104J 50
R7	Carbon film	2.4k	C14	Mylar	0.1	50V	CQMA 104J 50
R8	Carbon film	2.4k	C15	Mylar	0.1	50V	CQMA 104J 50
R9	Carbon film	4.7M	C16	Mylar	0.1	50V	CQMA 104J 50
R10	Carbon film	4.7M	C17	Polystyrene	120p	50V	CQSA 121J 50
R11	Carbon film	1M	C18	Polystyrene	120p	50V	CQSA 121J 50
R12	Carbon film	1M	C19	Polystyrene	120p	50V	CQSA 121J 50
R13	Carbon film	56k	C20	Polystyrene	120p	50V	CQSA 121J 50
R14	Carbon film	56k	C21	Mylar	0.22	50V	CQMA 224J 50
R15	Carbon film	1M	C22	Mylar	0.22	50V	CQMA 224J 50
R16	Carbon film	1M	C23	Electrolytic	4.7	50V	CEANL 4R7P 50
R17	Carbon film	47	C24	Electrolytic	4.7	50V	CEANL 4R7P 50
R18	Carbon film	47	C25	Electrolytic	4.7	50V	CEANL 4R7P 50
R19	Carbon film	47	C26	Electrolytic	4.7	50V	CEANL 4R7P 50
R20	Carbon film	47	C27	Polypropylene	3300p	50V	CQPA 332G 50
R21	Carbon film	2.4k	C28	Polypropylene	3300p	50V	CQPA 332G 50
R22	Carbon film	2.4k	C29	Polystyrene	390p	50V	CQSA 391J 50
R23	Carbon film	43k	C30	Polystyrene	390p	50V	CQSA 391J 50
R24	Carbon film	43k	C31	Electrolytic	10	16V	CEANL 100P 16
R25	Carbon film	1M	C32	Electrolytic	10	16V	CEANL 100P 16
R26	Carbon film	1M	C33	Electrolytic	10	16V	CEANL 100P 16
R27	Carbon film	56k	C34	Electrolytic	10	16V	CEANL 100P 16
R28	Carbon film	56k	C35	Mylar	0.1	50V	CQMA 104J 50
R29	Carbon film	1M	C36	Mylar	0.1	50V	CQMA 104J 50
R30	Carbon film	1M	C37	Mylar	0.1	50V	CQMA 104J 50
R31	Carbon film	47	C38	Mylar	0.1	50V	CQMA 104J 50
R32	Carbon film	47	C39	Polystyrene	330p	50V	CQSA 331J 50
R33	Carbon film	47	C40	Polystyrene	330p	50V	CQSA 331J 50
R34	Carbon film	47	C41	Polystyrene	330p	50V	CQSA 331J 50
R35	Carbon film	43k	C42	Polystyrene	330p	50V	CQSA 331J 50
R36	Carbon film	43k	C43	Mylar	0.22	50V	CQMA 224J 50
			C44	Mylar	0.22	50V	CQMA 224J 50
			C45	Electrolytic	22	35V	CEANL 220P 35
			C46	Electrolytic	22	35V	CEANL 220P 35
			C47	Electrolytic	22	35V	CEANL 220P 35
			C48	Electrolytic	22	35V	CEANL 220P 35
			C49	Mylar	0.047	50V	CQMA 473J 50
			C50	Mylar	0.047	50V	CQMA 473J 50

List of Changed Parts for Factory Modification

<u>Symbol</u>	<u>Description</u>		<u>Part No.</u>
C51	Electrolytic	100	35V CEA 101P 35
C52	Electrolytic	100	35V CEA 101P 35
C53	Electrolytic	100	35V CEA 101P 35
C54	Electrolytic	100	35V CEA 101P 35
C55	Mylar	0.047	50V CQMA 473J 50
C56	Mylar	0.047	50V CQMA 473J 50

SEMICONDUCTORS

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>
Q1	Transistor	2SC1400-E
Q2	Transistor	2SC1400-E
Q3	Transistor	2SA750-E
Q4	Transistor	2SA750-E
Q5	Transistor	2SC1400-E
Q6	Transistor	2SC1400-E
Q7	Transistor	2SA750-E
Q8	Transistor	2SA750-E

OTHERS

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>
	3P Plug	AKM-033
	4P Plug	AKM-034
	6P Plug	AKM-036
	Nut M9	ABN-024
	Nut M7	B71-010
	Washer M7	B22-018
	Clip M7	AEC-311

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>

1

2

3

9.5 H.P.F. AMPLIFIER ASSEMBLY (AWM-098)

A

A

B


B

C

C

D

D

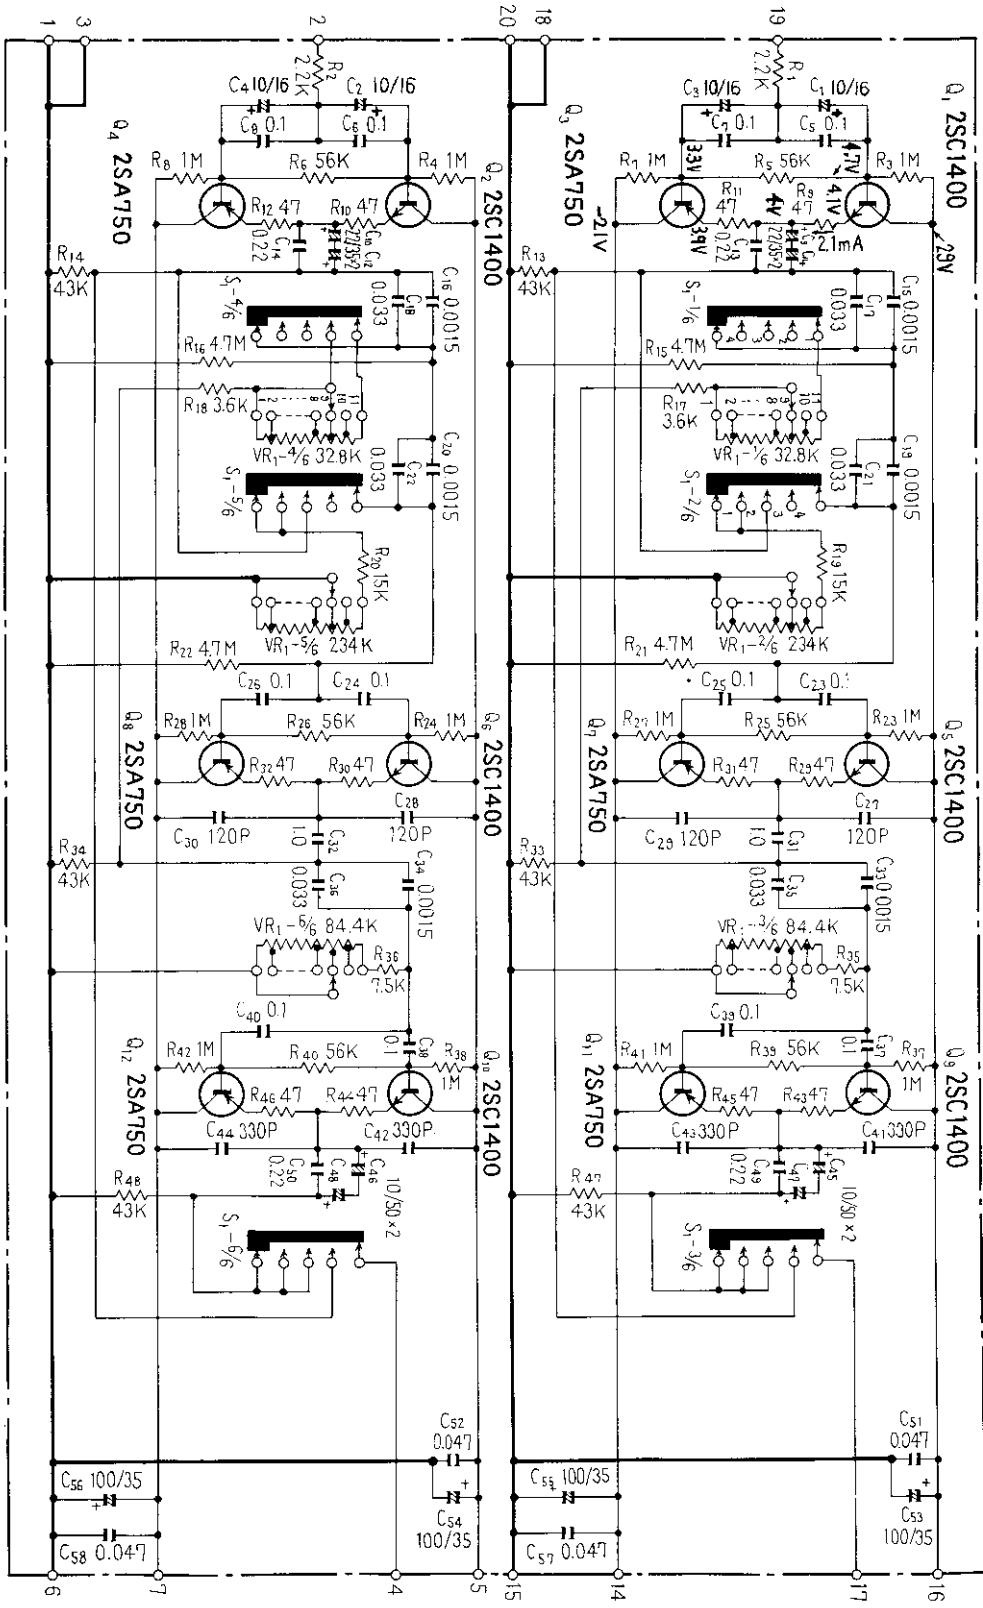

1

2

3






1

2

3

A

Foil side

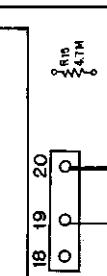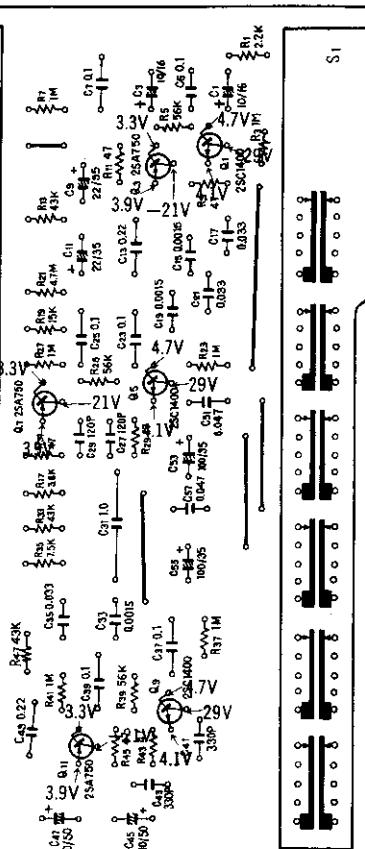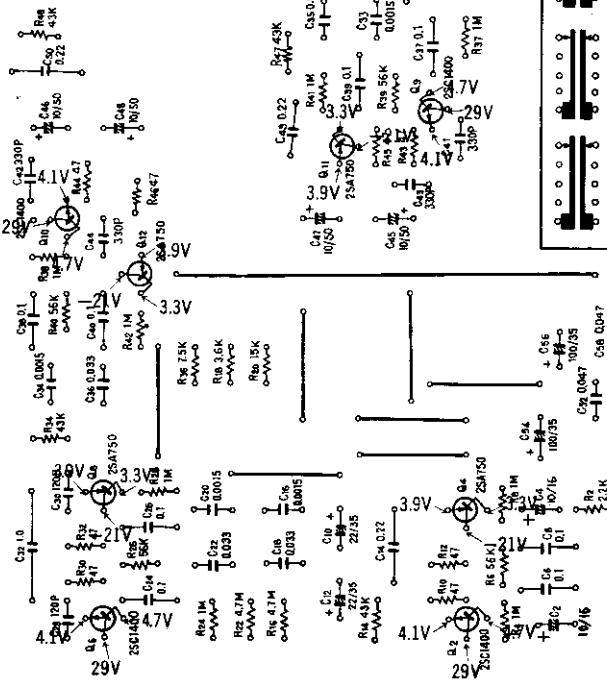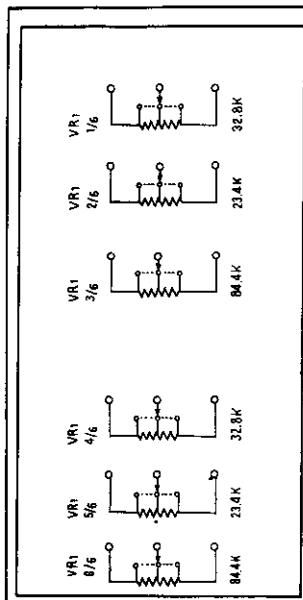

29

-21V

4.7V

29V

Parts List of H.P.F. Amplifier Assembly (AWM-098)

SWITCH

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>	<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>
S1	Rotary switch (SLOPE)	ASD-058	R41	Carbon film 1M	RD1VS 105J NL
			R42	Carbon film 1M	RD1VS 105J NL
			R43	Carbon film 47	RD1VS 470J
			R44	Carbon film 47	RD1VS 470J
			R45	Carbon film 47	RD1VS 470J
RESISTORS			R46	Carbon film 47	RD1VS 470J
			R47	Carbon film 43k	RD1VS 433J
			R48	Carbon film 43k	RD1VS 433J
<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>	CAPACITORS		
VR1	Variable resistor (CROSSOVER)	ACV-605	R6	Carbon film 56k	RD1VS 563J
R1	Carbon film 2.2k	RD1VS 222J	C1	Electrolytic 10	16V CEANL 100P 16
R2	Carbon film 2.2k	RD1VS 222J	C2	Electrolytic 10	16V CEANL 100P 16
R3	Carbon film 1M	RD1VS 105J NL	C3	Electrolytic 10	16V CEANL 100P 16
R4	Carbon film 1M	RD1VS 105J NL	C4	Electrolytic 10	16V CEANL 100P 16
R5	Carbon film 56k	RD1VS 563J	C5	Mylar 0.1	50V CQMA 104J 50
R6	Carbon film 56k	RD1VS 563J	C6	Mylar 0.1	50V CQMA 104J 50
R7	Carbon film 1M	RD1VS 105J NL	C7	Mylar 0.1	50V CQMA 104J 50
R8	Carbon film 1M	RD1VS 105J NL	C8	Mylar 0.1	50V CQMA 104J 50
R9	Carbon film 47	RD1VS 470J	C9	Electrolytic 22	35V CEANL 220P 35
R10	Carbon film 47	RD1VS 470J	C10	Electrolytic 22	35V CEANL 220P 35
R11	Carbon film 47	RD1VS 470J	C11	Electrolytic 22	35V CEANL 220P 35
R12	Carbon film 47	RD1VS 470J	C12	Electrolytic 22	35V CEANL 220P 35
R13	Carbon film 43k	RD1VS 433J	C13	Mylar 0.22	50V CQMA 224J 50
R14	Carbon film 43k	RD1VS 433J	C14	Mylar 0.22	50V CQMA 224J 50
R15	Carbon film 4.7M	RD1VS 475J	C15	Mylar 1500p	50V CQMA 152J 50
R16	Carbon film 4.7M	RD1VS 475J	C16	Mylar 1500p	50V CQMA 152J 50
R17	Carbon film 3.6k	RD1VS 362J	C17	Polypropylene 0.033	50V CQPA 333G 50
R18	Carbon film 3.6k	RD1VS 362J	C18	Polypropylene 0.033	50V CQPA 333G 50
R19	Carbon film 15k	RD1VS 153J	C19	Mylar 1500p	50V CQMA 152J 50
R20	Carbon film 15k	RD1VS 153J	C20	Mylar 1500p	50V CQMA 152J 50
R21	Carbon film 4.7M	RD1VS 475J	C21	Polypropylene 0.033	50V CQPA 333G 50
R22	Carbon film 4.7M	RD1VS 475J	C22	Polypropylene 0.033	50V CQPA 333G 50
R23	Carbon film 1M	RD1VS 105J NL	C23	Mylar 0.1	50V CQMA 104J 50
R24	Carbon film 1M	RD1VS 105J NL	C24	Mylar 0.1	50V CQMA 104J 50
R25	Carbon film 56k	RD1VS 563J	C25	Mylar 0.1	50V CQMA 104J 50
R26	Carbon film 56k	RD1VS 563J	C26	Mylar 0.1	50V CQMA 104J 50
R27	Carbon film 1M	RD1VS 105J NL	C27	Polystyrene 120p	50V CQSA 121J 50
R28	Carbon film 1M	RD1VS 105J NL	C28	Polystyrene 120p	50V CQSA 121J 50
R29	Carbon film 47	RD1VS 470J	C29	Polystyrene 120p	50V CQSA 121J 50
R30	Carbon film 47	RD1VS 470J	C30	Polystyrene 120p	50V CQSA 121J 50
R31	Carbon film 47	RD1VS 470J	C31	Metallized mylar 1	100V ACE-008
R32	Carbon film 47	RD1VS 470J	C32	Metallized mylar 1	100V ACE-008
R33	Carbon film 43k	RD1VS 433J	C33	Mylar 1500p	50V CQMA 152J 50
R34	Carbon film 43k	RD1VS 433J	C34	Mylar 1500p	50V CQMA 152J 50
R35	Carbon film 7.5k	RD1VS 752J	C35	Polypropylene 0.033	50V CQPA 333G 50
R36	Carbon film 7.5k	RD1VS 752J			
R37	Carbon film 1M	RD1VS 105J NL			
R38	Carbon film 1M	RD1VS 105J NL			
R39	Carbon film 56k	RD1VS 563J			
R40	Carbon film 56k	RD1VS 563J			

List of Changed Parts for Factory Modification

<u>Symbol</u>	<u>Description</u>		<u>Part No.</u>
C36	Polypropylene	0.033	50V CQPA 333G 50
C37	Mylar	0.1	50V CQMA 104J 50
C38	Mylar	0.1	50V CQMA 104J 50
C39	Mylar	0.1	50V CQMA 104J 50
C40	Mylar	0.1	50V CQMA 104J 50
C41	Polystyrene	330p	50V CQSA 331K 50
C42	Polystyrene	330p	50V CQSA 331K 50
C43	Polystyrene	330p	50V CQSA 331K 50
C44	Polystyrene	330p	50V CQSA 331K 50
C45	Electrolytic	10	50V CEANL 100P 50
C46	Electrolytic	10	50V CEANL 100P 50
C47	Electrolytic	10	50V CEANL 100P 50
C48	Electrolytic	10	50V CEANL 100P 50
C49	Mylar	0.22	50V CQMA 224J 50
C50	Mylar	0.22	50V CQMA 224J 50
C51	Mylar	0.047	50V CQMA 473J 50
C52	Mylar	0.047	50V CQMA 473J 50
C53	Electrolytic	100	35V CEA 101P 35
C54	Electrolytic	100	35V CEA 101P 35
C55	Electrolytic	100	35V CEA 101P 35
C56	Electrolytic	100	35V CEA 101P 35
C57	Mylar	0.047	50V CQMA 473J 50
C58	Mylar	0.047	50V CQMA 473J 50

SEMICONDUCTORS

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>
Q1	Transistor	2SC1400-E
Q2	Transistor	2SC1400-E
Q3	Transistor	2SA750-E
Q4	Transistor	2SA750-E
Q5	Transistor	2SC1400-E
Q6	Transistor	2SC1400-E
Q7	Transistor	2SA750-E
Q8	Transistor	2SA750-E
Q9	Transistor	2SC1400-E
Q10	Transistor	2SC1400-E
Q11	Transistor	2SA750-E
Q12	Transistor	2SA750-E

OTHERS

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>
	3P Plug	AKM-033
	4P Plug	AKM-034
	Nut M9	ABN-024
	Nut M7	B71-010
	Washer M7	B22-018
	Clip	AEC-311

9.6 H.P.F. AMPLIFIER ASSEMBLY (AWM-099)

A

A

B


B

C

C

D


D

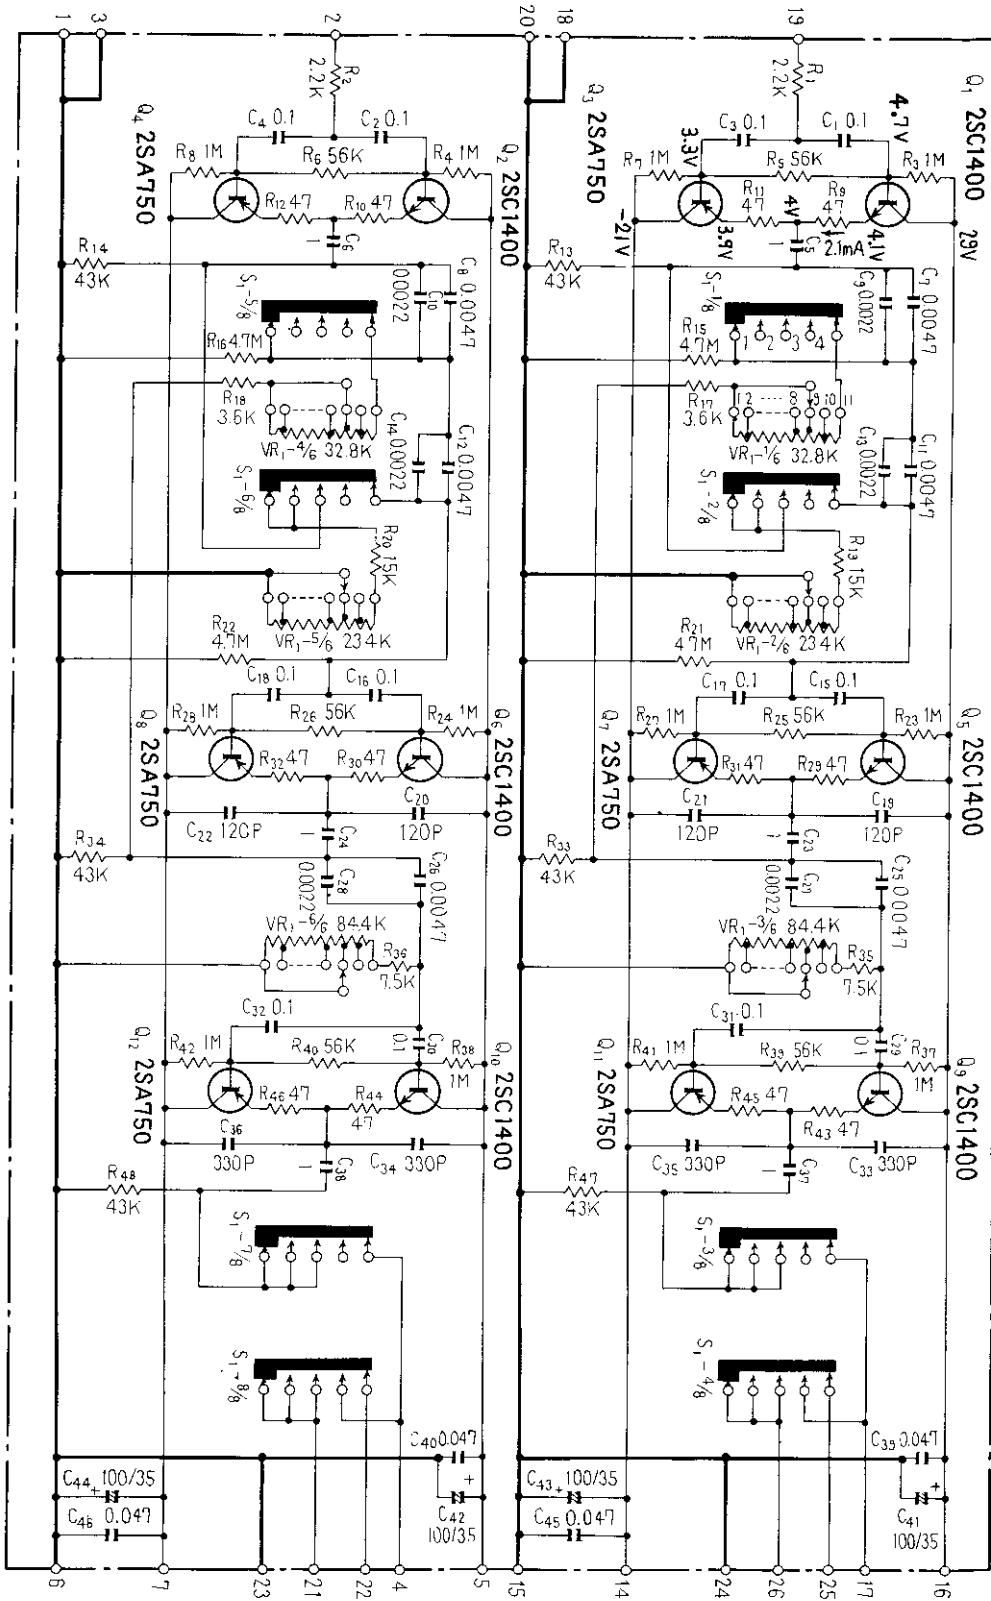

1

2

3

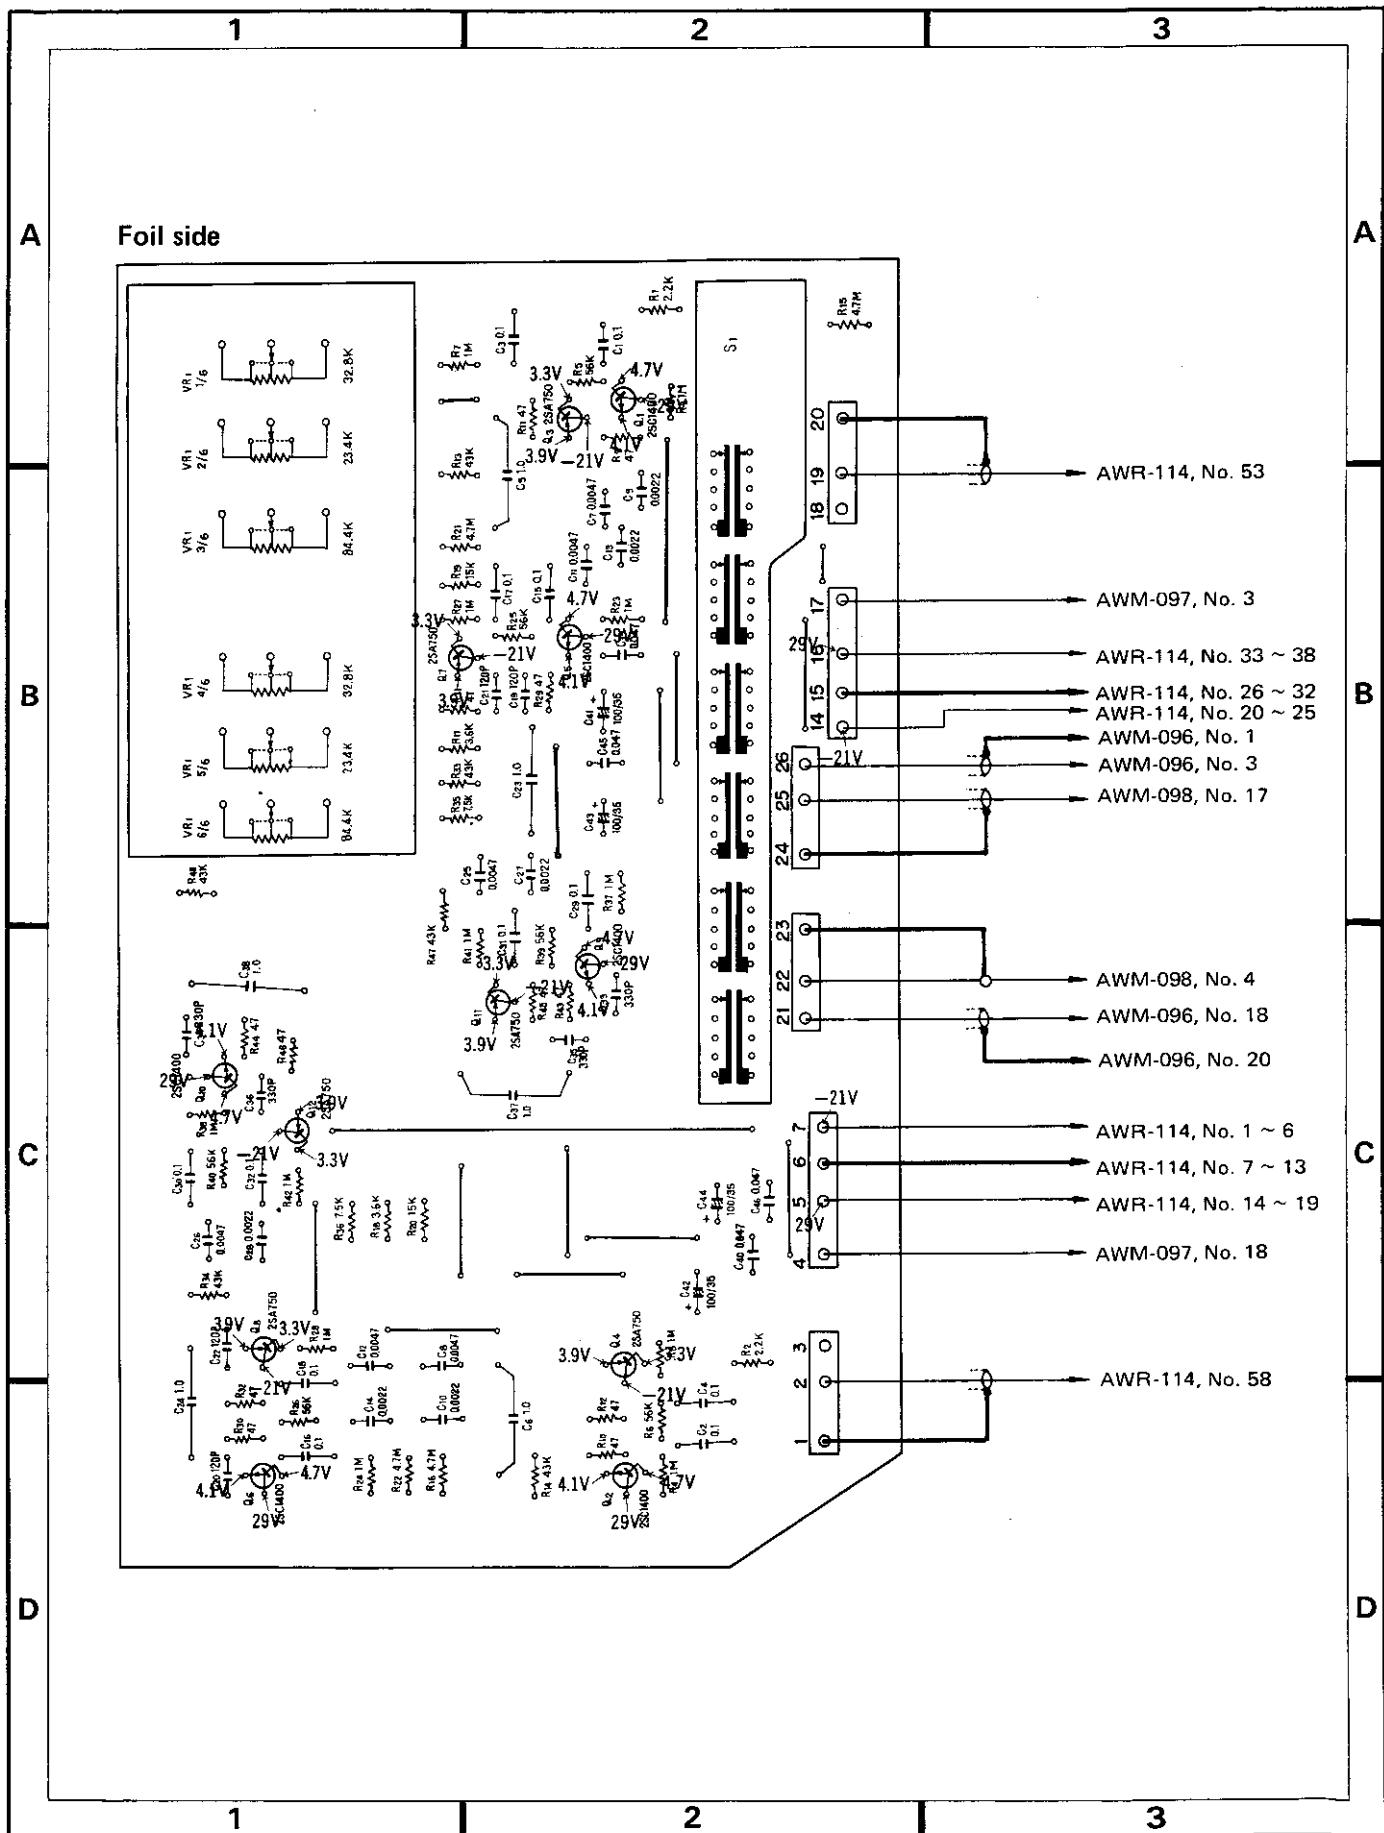

Part List of H.P.F. Amplifier Assembly (AWM-099)

SWITCH

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>	<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>
S1	Rotary switch (SLOPE)	ASD-058	R41	Carbon film 1M	RD1/PS 105J NL
			R42	Carbon film 1M	RD1/PS 105J NL
			R43	Carbon film 47	RD1/VS 470J
			R44	Carbon film 47	RD1/VS 470J
			R45	Carbon film 47	RD1/VS 470J

RESISTORS

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>	<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>		
VR1	Variable resistor (CROSSOVER)	ACV-605	R46	Carbon film 47	RD1/VS 470J		
R1	Carbon film 2.2k	RD1/VS 222J	R47	Carbon film 43k	RD1/VS 433J		
R2	Carbon film 2.2k	RD1/VS 222J	R48	Carbon film 43k	RD1/VS 433J		
R3	Carbon film 1M	RD1/PS 105J NL	CAPACITORS				
R4	Carbon film 1M	RD1/PS 105J NL					
R5	Carbon film 56k	RD1/VS 563J					
R6	Carbon film 56k	RD1/VS 563J	C1	Mylar 0.1	50V	CQMA 104J 50	
R7	Carbon film 1M	RD1/PS 105J NL	C2	Mylar 0.1	50V	CQMA 104J 50	
R8	Carbon film 1M	RD1/PS 105J NL	C3	Mylar 0.1	50V	CQMA 104J 50	
R9	Carbon film 47	RD1/VS 470J	C4	Mylar 0.1	50V	CQMA 104J 50	
R10	Carbon film 47	RD1/VS 470J	C5	Metallized mylar 1	100V	AEC-008	
R11	Carbon film 47	RD1/VS 470J	C6	Metallized mylar 1	100V	AEC-008	
R12	Carbon film 47	RD1/VS 470J	C7	Polypropylene 4700p	50V	CQPA 472G 50	
R13	Carbon film 43k	RD1/VS 433J	C8	Polypropylene 4700p	50V	CQPA 472G 50	
R14	Carbon film 43k	RD1/VS 433J	C9	Mylar 2200p	50V	CQMA 222J 50	
R15	Carbon film 4.7M	RD1/VS 475J	C10	Mylar 2200p	50V	CQMA 222J 50	
R16	Carbon film 4.7M	RD1/VS 475J	C11	Polypropylene 4700p	50V	CQPA 472G 50	
R17	Carbon film 3.6k	RD1/VS 362J	C12	Polypropylene 4700p	50V	CQPA 472G 50	
R18	Carbon film 3.6k	RD1/VS 362J	C13	Mylar 2200p	50V	CQMA 222J 50	
R19	Carbon film 15k	RD1/VS 153J	C14	Mylar 2200p	50V	CQMA 222J 50	
R20	Carbon film 15k	RD1/VS 153J	C15	Mylar 0.1	50V	CQMA 104J 50	
R21	Carbon film 4.7M	RD1/VS 475J	C16	Mylar 0.1	50V	CQMA 104J 50	
R22	Carbon film 4.7M	RD1/VS 475J	C17	Mylar 0.1	50V	CQMA 104J 50	
R23	Carbon film 1M	RD1/PS 105J NL	C18	Mylar 0.1	50V	CQMA 104J 50	
R24	Carbon film 1M	RD1/PS 105J NL	C19	Polystyrene 120p	50V	CQSA 121J 50	
R25	Carbon film 56k	RD1/VS 563J	C20	Polystyrene 120p	50V	CQSA 121J 50	
R26	Carbon film 56k	RD1/VS 563J	C21	Polystyrene 120p	50V	CQSA 121J 50	
R27	Carbon film 1M	RD1/PS 105J NL	C22	Polystyrene 120p	50V	CQSA 121J 50	
R28	Carbon film 1M	RD1/PS 105J NL	C23	Metallized mylar 1	100V	AEC-008	
R29	Carbon film 47	RD1/VS 470J	C24	Metallized mylar 1	100V	AEC-008	
R30	Carbon film 47	RD1/VS 470J	C25	Polypropylene 4700p	50V	CQPA 472G 50	
R31	Carbon film 47	RD1/VS 470J	C26	Polypropylene 4700p	50V	CQPA 472G 50	
R32	Carbon film 47	RD1/VS 470J	C27	Mylar 2200p	50V	CQMA 222J 50	
R33	Carbon film 43k	RD1/VS 433J	C28	Mylar 2200p	50V	CQMA 222J 50	
R34	Carbon film 43k	RD1/VS 433J	C29	Mylar 0.1	50V	CQMA 104J 50	
R35	Carbon film 7.5k	RD1/VS 752J	C30	Mylar 0.1	50V	CQMA 104J 50	
R36	Carbon film 7.5k	RD1/VS 752J	C31	Mylar 0.1	50V	CQMA 104J 50	
R37	Carbon film 1M	RD1/PS 105J NL	C32	Mylar 0.1	50V	CQMA 104J 50	
R38	Carbon film 1M	RD1/PS 105J NL	C33	Polystyrene 330p	50V	CQSA 331J 50	
R39	Carbon film 56k	RD1/VS 563J	C34	Polystyrene 330p	50V	CQSA 331J 50	
R40	Carbon film 56k	RD1/VS 563J	C35	Polystyrene 330p	50V	CQSA 331J 50	

List of Changed Parts for Factory Modification

<u>Symbol</u>	<u>Description</u>		<u>Part No.</u>
C36	Polystyrene	330p	50V
C37	Metalized mylar	1	100V
C38	Metalized mylar	1	100V
C39	Mylar	0.047	50V
C40	Mylar	0.047	50V
C41	Electrolytic	100	35V
C42	Electrolytic	100	35V
C43	Electrolytic	100	35V
C44	Electrolytic	100	35V
C45	Mylar	0.047	50V
C46	Mylar	0.047	50V

SEMICONDUCTORS

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>
Q1	Transistor	2SC1400-E
Q2	Transistor	2SC1400-E
Q3	Transistor	2SA750-E
Q4	Transistor	2SA750-E
Q5	Transistor	2SC1400-E
Q6	Transistor	2SC1400-E
Q7	Transistor	2SA750-E
Q8	Transistor	2SA750-E
Q9	Transistor	2SC1400-E
Q10	Transistor	2SC1400-E
Q11	Transistor	2SA750-E
Q12	Transistor	2SA750-E


OTHERS

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>
	3P Plug	AKM-033
	4P Plug	AKM-034
	Nut M9	ABN-024
	Nut M7	B71-010
	Washer M7	B22-018
	Clip	AEC-311

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>

9.7 H.P.F. AMPLIFIER ASSEMBLY (AWM-100)

A

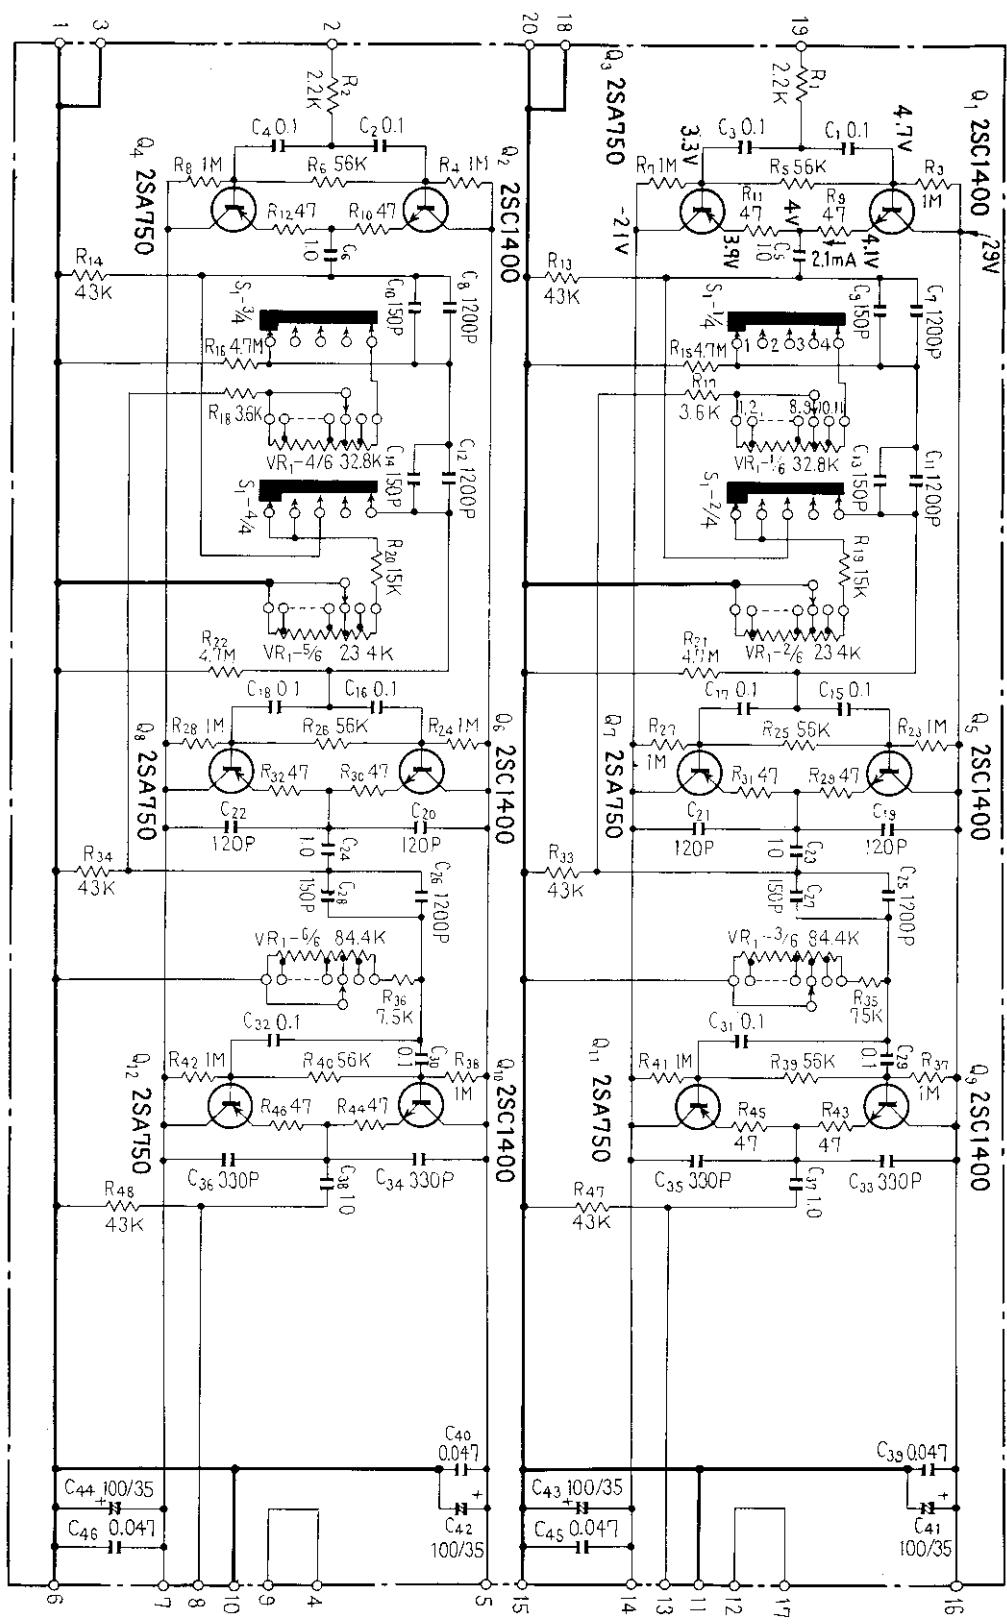

B

A

B

C

C

D

D


1

2

3

A

Foil side

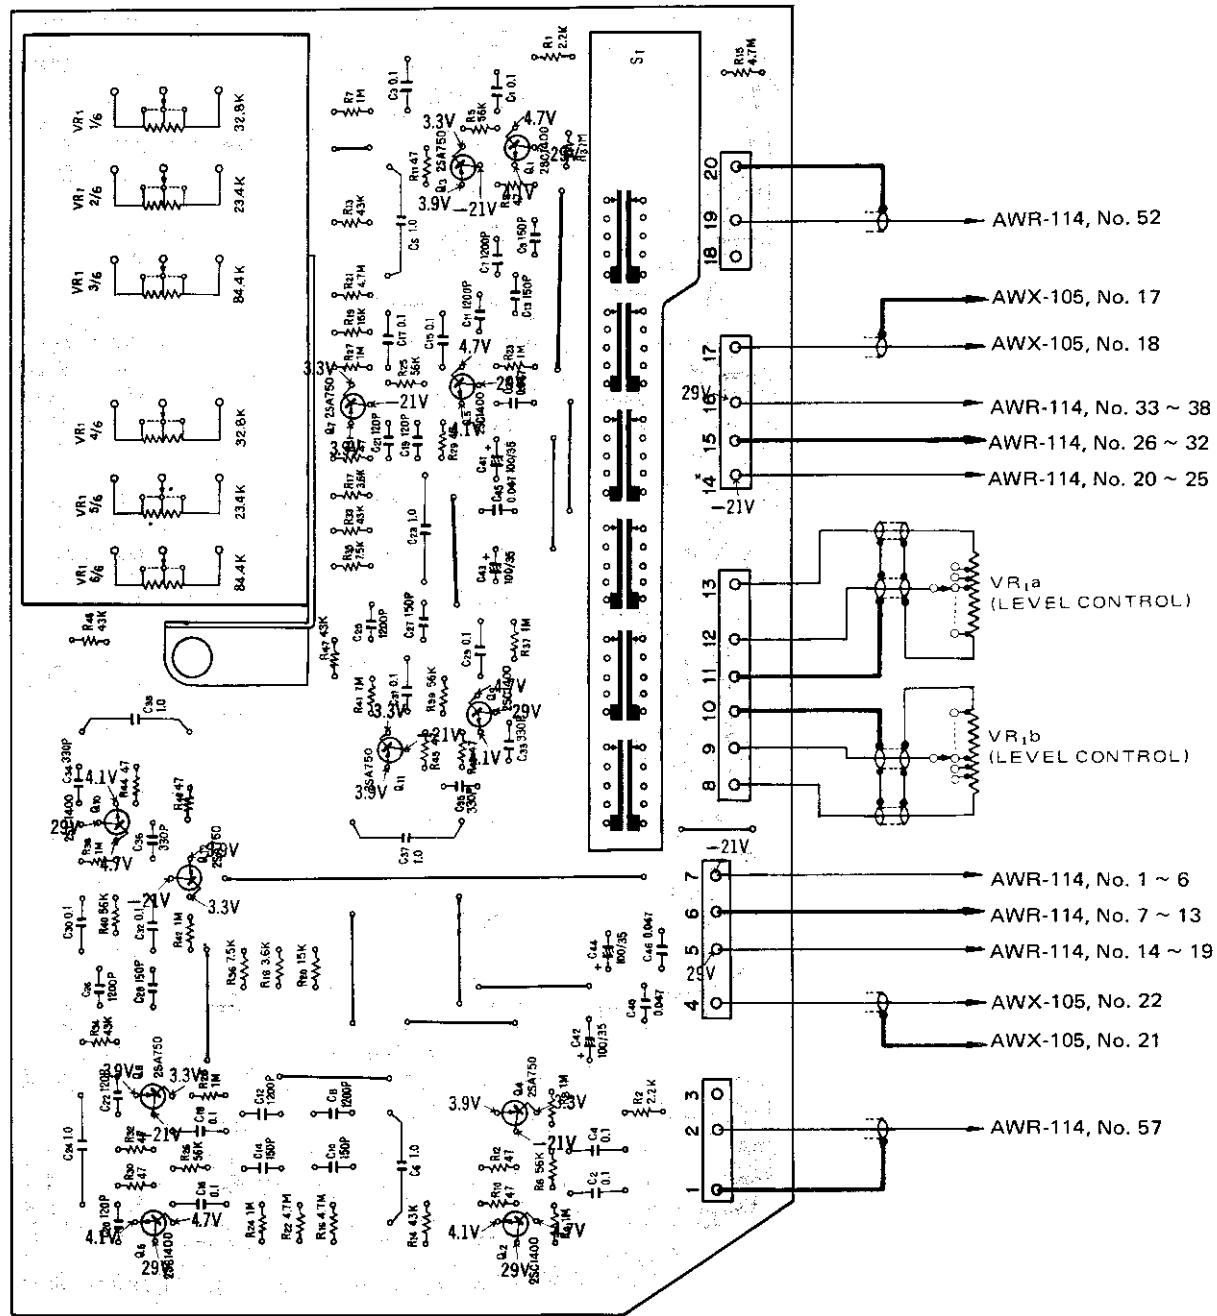

1

2

3

Parts List of H.P.F. Amplifier Assembly (AWM-100)

SWITCH

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>	<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>
S1	Rotary switch (SLOPE)	ASD-060	R41	Carbon film 1M	RD1/4PS 105J NL
			R42	Carbon film 1M	RD1/4PS 105J NL
			R43	Carbon film 47	RD1/4VS 470J
			R44	Carbon film 47	RD1/4VS 470J
			R45	Carbon film 47	RD1/4VS 470J
RESISTORS			R46	Carbon film 47	RD1/4VS 470J
VR1 Variable resistor (CROSSOVER)			R47	Carbon film 43k	RD1/4VS 433J
R1	Carbon film 2.2k	RD1/4VS 222J	R48	Carbon film 43k	RD1/4VS 433J
R2	Carbon film 2.2k	RD1/4VS 222J	CAPACITORS		
R3	Carbon film 1M	RD1/4PS 105J NL	<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>
R4	Carbon film 1M	RD1/4PS 105J NL	C1	Mylar 0.1	50V CQMA 104J 50
R5	Carbon film 56k	RD1/4VS 563J	C2	Mylar 0.1	50V CQMA 104J 50
R6	Carbon film 56k	RD1/4VS 563J	C3	Mylar 0.1	50V CQMA 104J 50
R7	Carbon film 1M	RD1/4PS 105J NL	C5	Mylar 0.1	50V CQMA 104J 50
R8	Carbon film 1M	RD1/4PS 105J NL	C5	Metallized mylar 1	100V AEC-008
R9	Carbon film 47	RD1/4VS 470J	C6	Metallized mylar 1	100V AEC-008
R10	Carbon film 47	RD1/4VS 470J	C7	Polypropylene 1200p	50V CQPA 122G 50
R11	Carbon film 47	RD1/4VS 470J	C8	Polypropylene 1200p	50V CQPA 122G 50
R12	Carbon film 47	RD1/4VS 470J	C9	Polystyrene 150p	50V CQSA 151J 50
R13	Carbon film 43k	RD1/4VS 433J	C10	Polystyrene 150p	50V CQSA 151J 50
R14	Carbon film 43k	RD1/4VS 433J	C11	Polypropylene 1200p	50V CQPA 122G 50
R15	Carbon film 4.7M	RD1/4VS 475J	C12	Polypropylene 1200p	50V CQPA 122G 50
R16	Carbon film 4.7M	RD1/4VS 475J	C13	Polystyrene 150p	50V CQSA 151J 50
R17	Carbon film 3.6k	RD1/4VS 362J	C14	Polystyrene 150p	50V CQSA 151J 50
R18	Carbon film 3.6k	RD1/4VS 362J	C15	Mylar 0.1	50V CQMA 104J 50
R19	Carbon film 15k	RD1/4VS 153J	C16	Mylar 0.1	50V CQMA 104J 50
R20	Carbon film 15k	RD1/4VS 153J	C17	Mylar 0.1	50V CQMA 104J 50
R21	Carbon film 4.7M	RD1/4VS 475J	C18	Mylar 0.1	50V CQMA 104J 50
R22	Carbon film 4.7M	RD1/4VS 475J	C19	Polystyrene 120p	50V CQSA 121K 50
R23	Carbon film 1M	RD1/4PS 105J NL	C20	Polystyrene 120p	50V CQSA 121K 50
R24	Carbon film 1M	RD1/4PS 105J NL	C21	Polystyrene 120p	50V CQSA 121K 50
R25	Carbon film 56k	RD1/4VS 563J	C22	Polystyrene 120p	50V CQSA 121K 50
R26	Carbon film 56k	RD1/4VS 563J	C23	Metallized mylar 1	100V AEC-008
R27	Carbon film 1M	RD1/4PS 105J NL	C24	Metallized mylar 1	100V AEC-008
R28	Carbon film 1M	RD1/4PS 105J NL	C25	Polypropylene 1200p	50V CQPA 122G 50
R29	Carbon film 47	RD1/4VS 470J	C26	Polypropylene 1200p	50V CQPA 122G 50
R30	Carbon film 47	RD1/4VS 470J	C27	Polystyrene 150p	50V CQSA 151J 50
R31	Carbon film 47	RD1/4VS 470J	C28	Polystyrene 150p	50V CQSA 151J 50
R32	Carbon film 47	RD1/4VS 470J	C29	Mylar 0.1	50V CQMA 104J 50
R33	Carbon film 43k	RD1/4VS 433J	C30	Mylar 0.1	50V CQMA 104J 50
R34	Carbon film 43k	RD1/4VS 433J	C31	Mylar 0.1	50V CQMA 104J 50
R35	Carbon film 7.5k	RD1/4VS 752J	C32	Mylar 0.1	50V CQMA 104J 50
R36	Carbon film 7.5k	RD1/4VS 752J	C33	Polystyrene 330p	50V CQSA 331J 50
R37	Carbon film 1M	RD1/4PS 105J NL	C34	Polystyrene 330p	50V CQSA 331J 50
R38	Carbon film 1M	RD1/4PS 105J NL	C35	Polystyrene 330p	50V CQSA 331J 50
R39	Carbon film 56k	RD1/4VS 563J			
R40	Carbon film 56k	RD1/4VS 563J			

List of Changed Parts for Factory Modification

<u>Symbol</u>	<u>Description</u>		<u>Part No.</u>
C36	Polystyrene	330p	50V CQSA 331J 50
C37	Metallized mylar	1	100V AEC-008
C38	Metallized mylar	1	100V AEC-008
C39	Mylar	0.047	50V CQMA 473J 50
C40	Mylar	0.047	50V CQMA 473J 50
C41	Electrolytic	100	35V CEA 101P 35
C42	Electrolytic	100	35V CEA 101P 35
C43	Electrolytic	100	35V CEA 101P 35
C44	Electrolytic	100	35V CEA 101P 35
C45	Mylar	0.047	50V CQMA 473J 50
C46	Mylar	0.047	50V CQMA 473J 50

SEMICONDUCTORS

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>
Q1	Transistor	2SC1400-E
Q2	Transistor	2SC1400-E
Q3	Transistor	2SA750-E
Q4	Transistor	2SA750-E
Q5	Transistor	2SC1400-E
Q6	Transistor	2SC1400-E
Q7	Transistor	2SA750-E
Q8	Transistor	2SA750-E
Q9	Transistor	2SC1400-E
Q10	Transistor	2SC1400-E
Q11	Transistor	2SA750-E
Q12	Transistor	2SA750-E

OTHERS

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>
	3P Plug	AKM-033
	4P Plug	AKM-034
	6P Plug	AKM-036
	Clip	AEC-311
	Nut M9	ABN-024
	Nut M7	B71-010
	Washer M7	B22-018

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>

1

2

3

9.8 POWER SUPPLY ASSEMBLY (AWR-114)

A

A

B


B

C

C

D


D

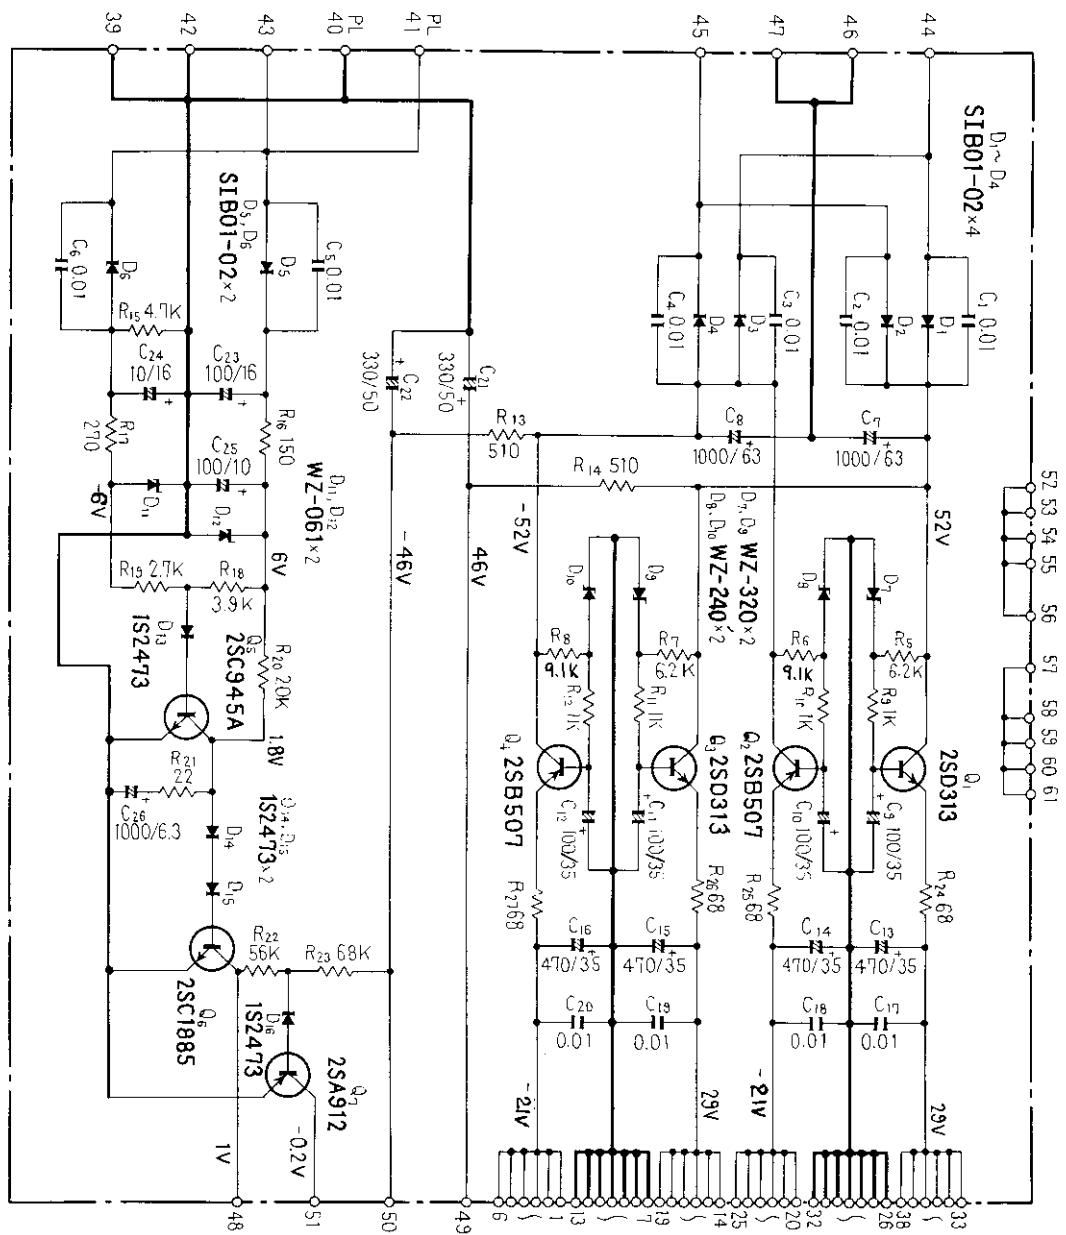

1

2

3

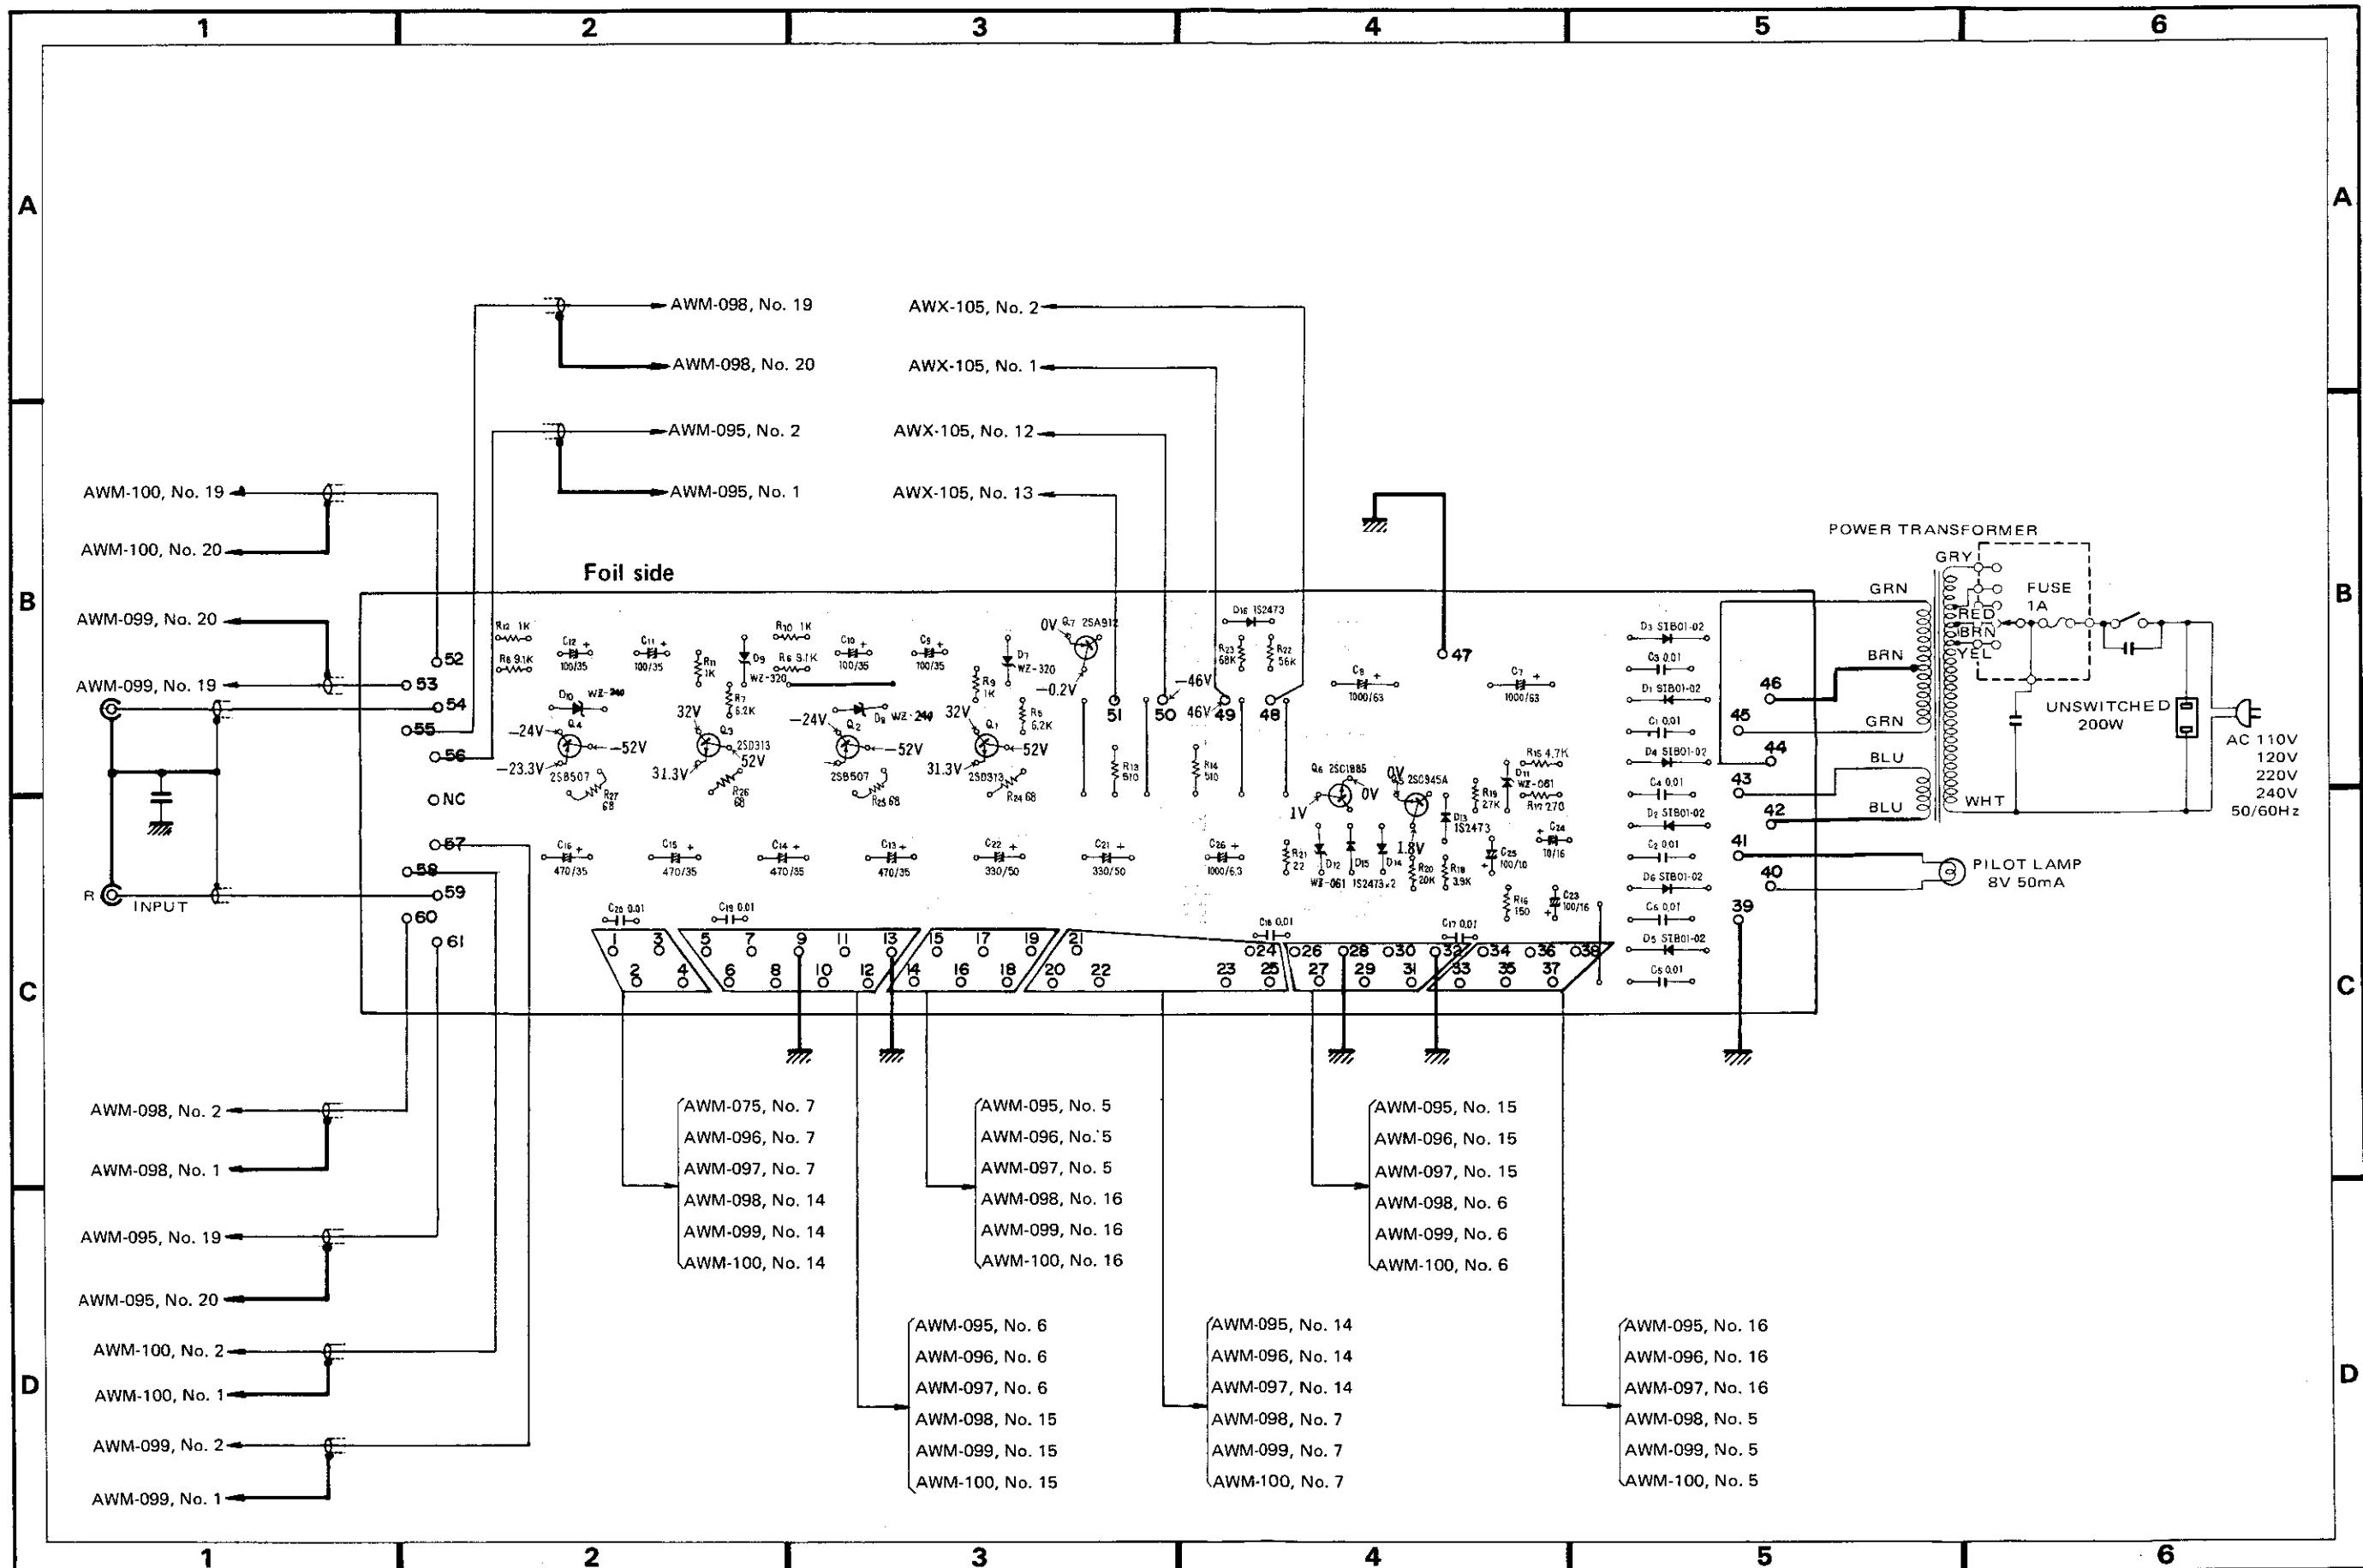

Parts List of Power Supply Assembly (AWR-114)

RESISTORS

Symbol	Description	Part No.	Symbol	Description	Part No.
R1	C21	Electrolytic	330 50V CEA 331P 50
R2	C22	Electrolytic	330 50V CEA 331P 50
R3	C23	Electrolytic	100 16V CEA 101P 16
R4	C24	Electrolytic	10 16V CEA 100P 16
R5	Carbon film	6.2k RD4VS 622J	C25	Electrolytic	100 10V CEA 101P 10
R6	Carbon film	9.1k RD4VS 922J	C26	Electrolytic	1,000 6.3V CEA 102P 6R3
R7	Carbon film	6.2k RD4VS 622J			
R8	Carbon film	9.1k RD4VS 922J			
R9	Carbon film	1k RD4VS 102J			
R10	Carbon film	1k RD4VS 102J			

SEMICONDUCTORS

Symbol	Description	Part No.
Q1	Transistor	2SD313-D or E (2SD526-O or R)
Q2	Transistor	2SB507-O or E (2SB596-O or R)
Q3	Transistor	2SD313-D or E (2SD526-O or R)
Q4	Transistor	2SB507-O or E (2SB596-O or R)
Q5	Transistor	2SC945A-Q or P


Symbol	Description	Part No.
Q6	Transistor	2SC1885-S
Q7	Transistor	2SA912-R or S
D1	Diode	SIB01-02 (1S1886)
D2	Diode	SIB01-02 (1S1886)
D3	Diode	SIB01-02 (1S1886)
D4	Diode	SIB01-02 (1S1886)
D5	Diode	SIB01-02 (1S1886)


CAPACITORS

Symbol	Description	Part No.	Symbol	Description	Part No.
C1	Ceramic 0.01 150V	ACG-004	D6	Diode	SIB01-02 (1S1886)
C2	Ceramic 0.01 150V	ACG-004	D7	Zener diode	WZ-320
C3	Ceramic 0.01 150V	ACG-004	D8	Zener diode	WZ-240
C4	Ceramic 0.01 150V	ACG-004	D9	Zener diode	WZ-320
C5	Ceramic 0.01 150V	ACG-004	D10	Zener diode	WZ-240
C6	Ceramic 0.01 150V	ACG-004	D11	Zener diode	WZ-061
C7	Electrolytic 1,000 63V	ACH-066	D12	Zener diode	WZ-061
C8	Electrolytic 1,000 63V	ACH-066	D13	Diode	1S2473 (1S1555)
C9	Electrolytic 100 35V	CEA 101P 35	D14	Diode	1S2473 (1S1555)
C10	Electrolytic 100 35V	CEA 101P 35	D15	Diode	1S2473 (1S1555)
C11	Electrolytic 100 35V	CEA 101P 35	D16	Diode	1S2473 (1S1555)
C12	Electrolytic 100 35V	CEA 101P 35			
C13	Electrolytic 470 35V	CEA 471P 35			
C14	Electrolytic 470 35V	CEA 471P 35			
C15	Electrolytic 470 35V	CEA 471P 35			
C16	Electrolytic 470 35V	CEA 471P 35			
C17	Ceramic 0.01 50V	CKDYF 103Z 50			
C18	Ceramic 0.01 50V	CKDYF 103Z 50			
C19	Ceramic 0.01 50V	CKDYF 103Z 50			
C20	Ceramic 0.01 50V	CKDYF 103Z 50			

OTHER

Symbol	Description	Part No.
	Heat sink	ANH-117

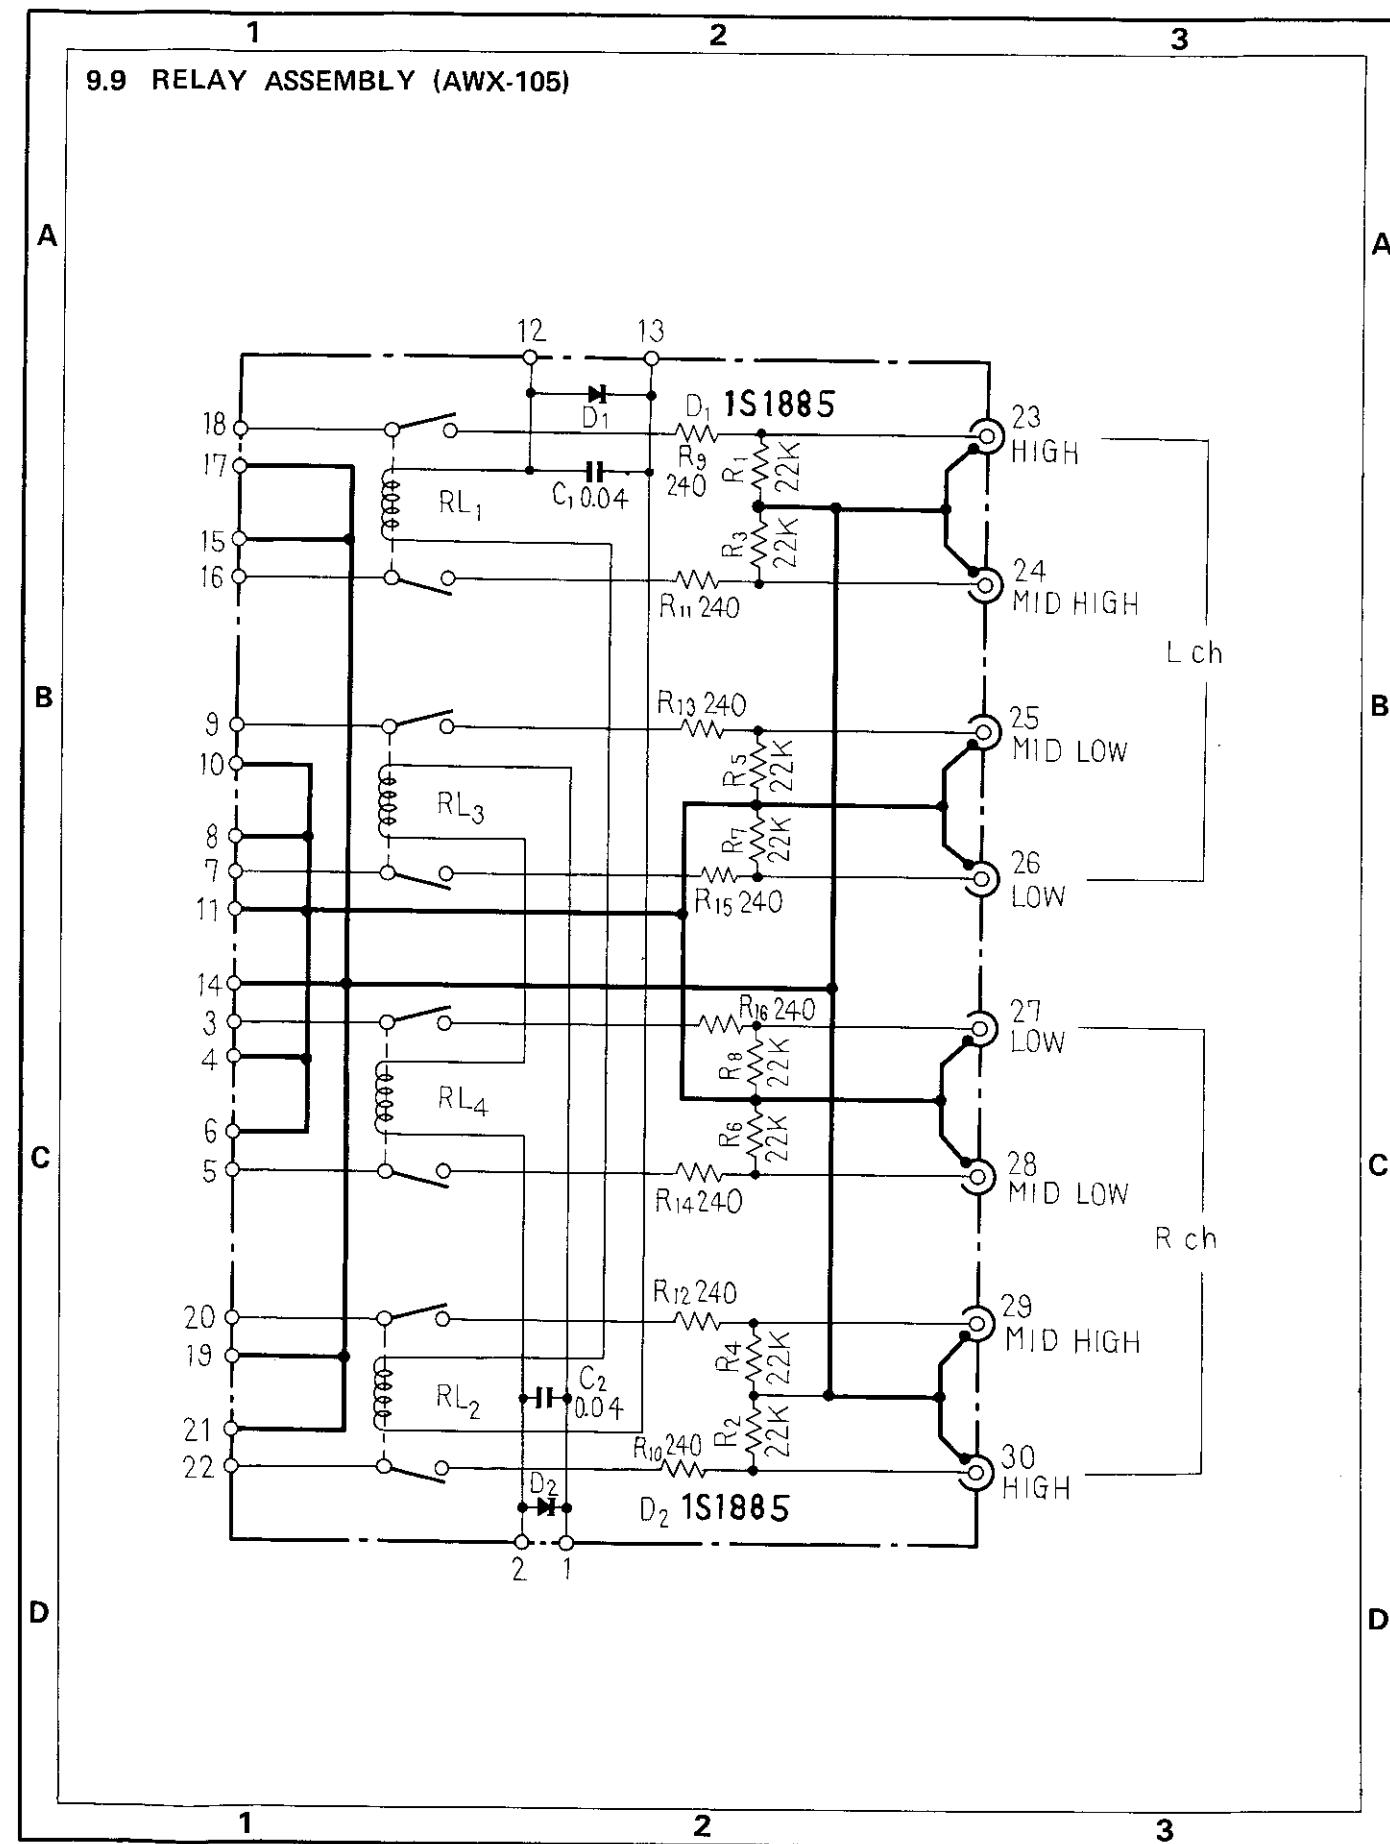

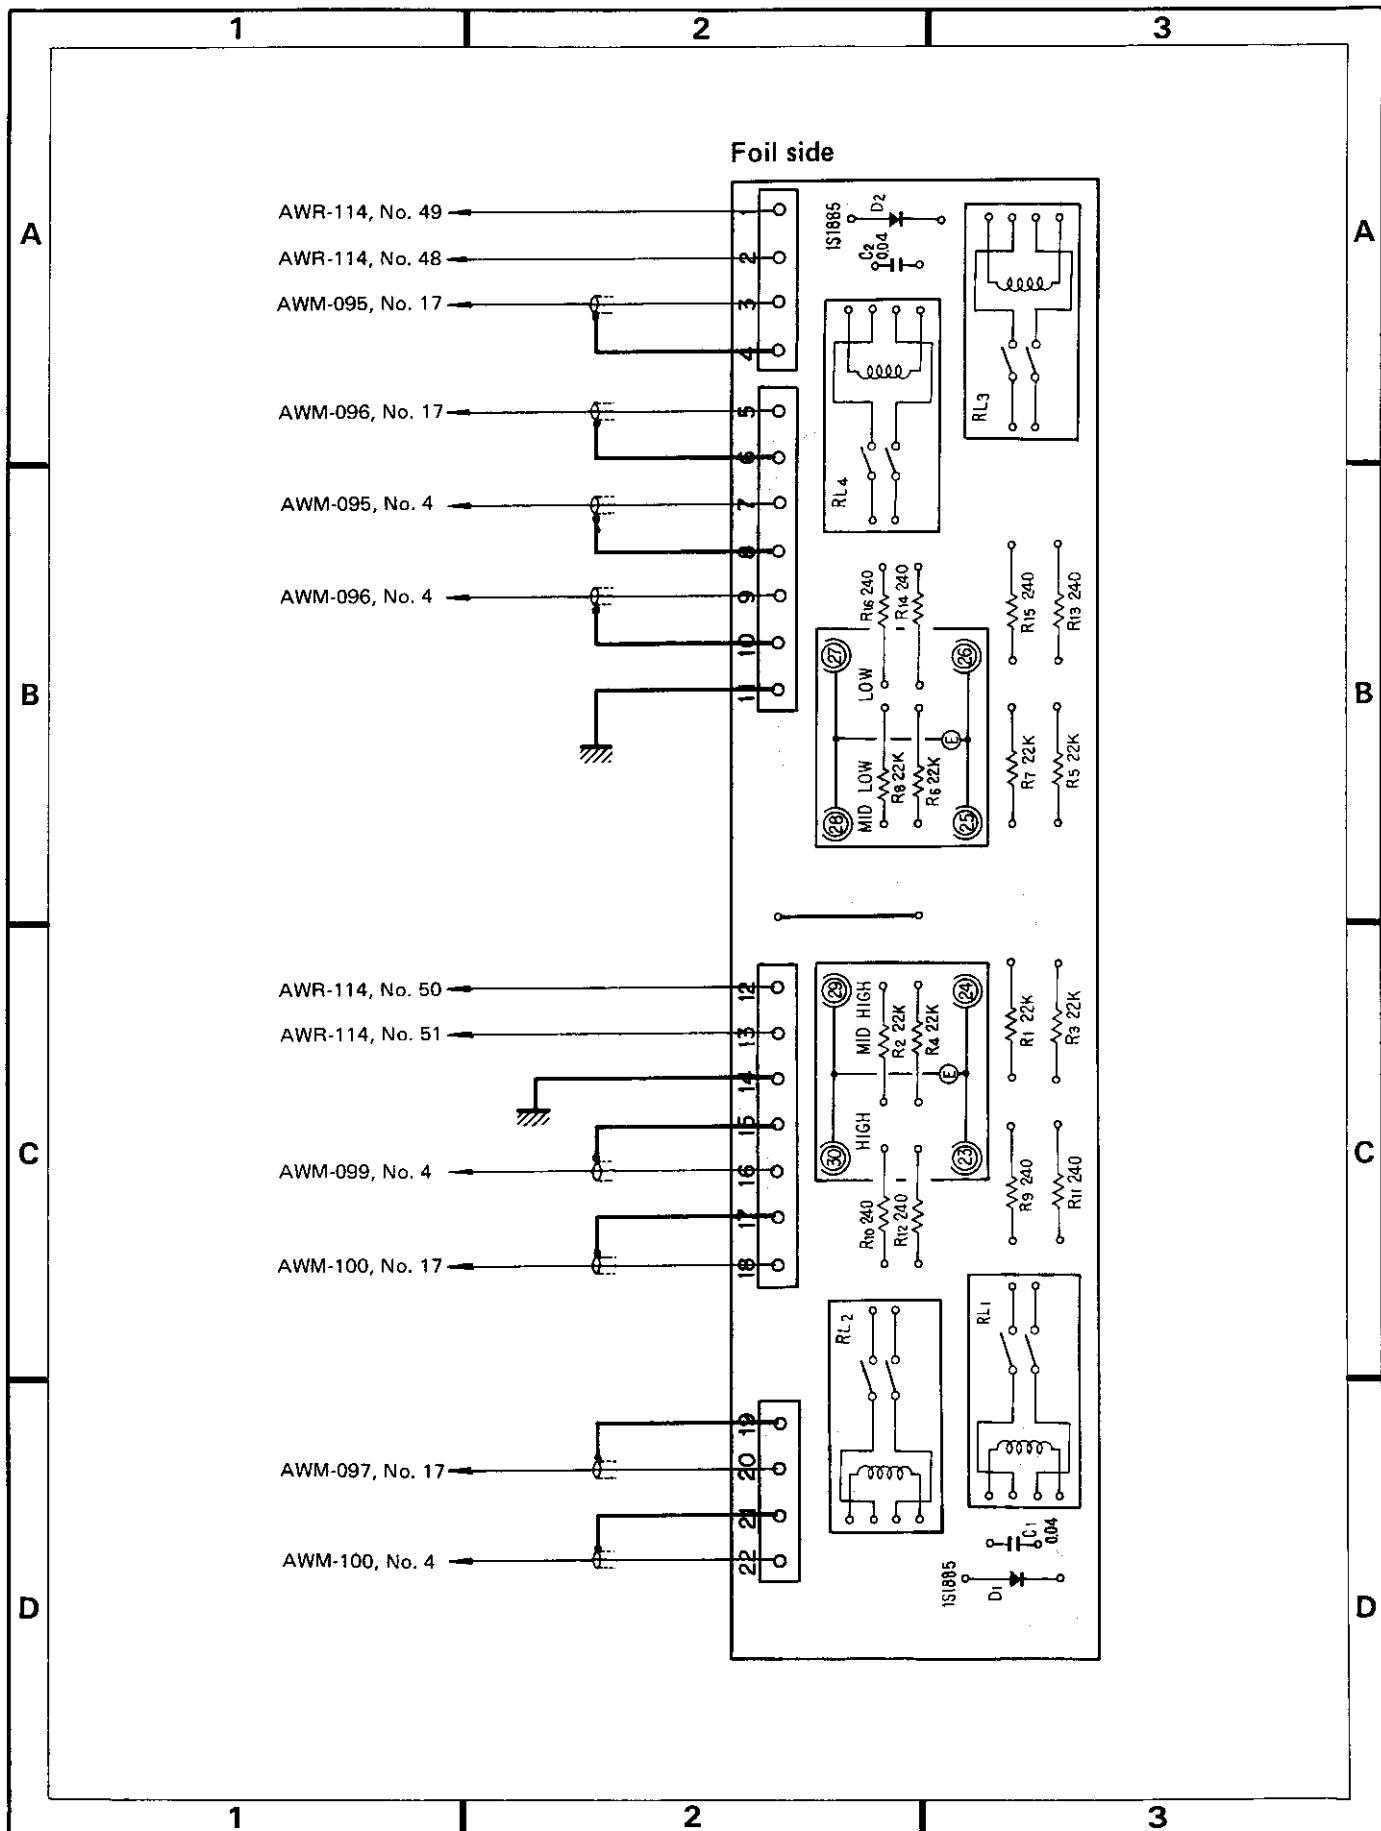

Parts List of Relay Assembly (AWX-105)

SWITCHES

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>
RL1	Reed relay	ASR-005
RL2	Reed relay	ASR-005
RL3	Reed relay	ASR-005
RL4	Reed relay	ASR-005

RESISTORS

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>
R1	Carbon film	22k RD%PS 223J
R2	Carbon film	22k RD%PS 223J
R3	Carbon film	22k RD%PS 223J
R4	Carbon film	22k RD%PS 223J
R5	Carbon film	22k RD%PS 223J
R6	Carbon film	22k RD%PS 223J
R7	Carbon film	22k RD%PS 223J
R8	Carbon film	22k RD%PS 223J
R9	Carbon film	240 RD%PS 241J
R10	Carbon film	240 RD%PS 241J
R11	Carbon film	240 RD%PS 241J
R12	Carbon film	240 RD%PS 241J
R13	Carbon film	240 RD%PS 241J
R14	Carbon film	240 RD%PS 241J
R15	Carbon film	240 RD%PS 241J
R16	Carbon film	240 RD%PS 241J

CAPACITORS

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>
C1	Ceramic	0.04 50V CKDYF 403Z 50
C2	Ceramic	0.04 50V CKDYF 403Z 50

SEMICONDUCTORS

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>
D1	Diode	1S1885
D2	Diode	1S1885


OTHER

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>
	4P terminal (OUTPUT)	AKB-023

List of Changed Parts for Factory Modification

<u>Symbol</u>	<u>Description</u>	<u>Part No.</u>

10. PACKING

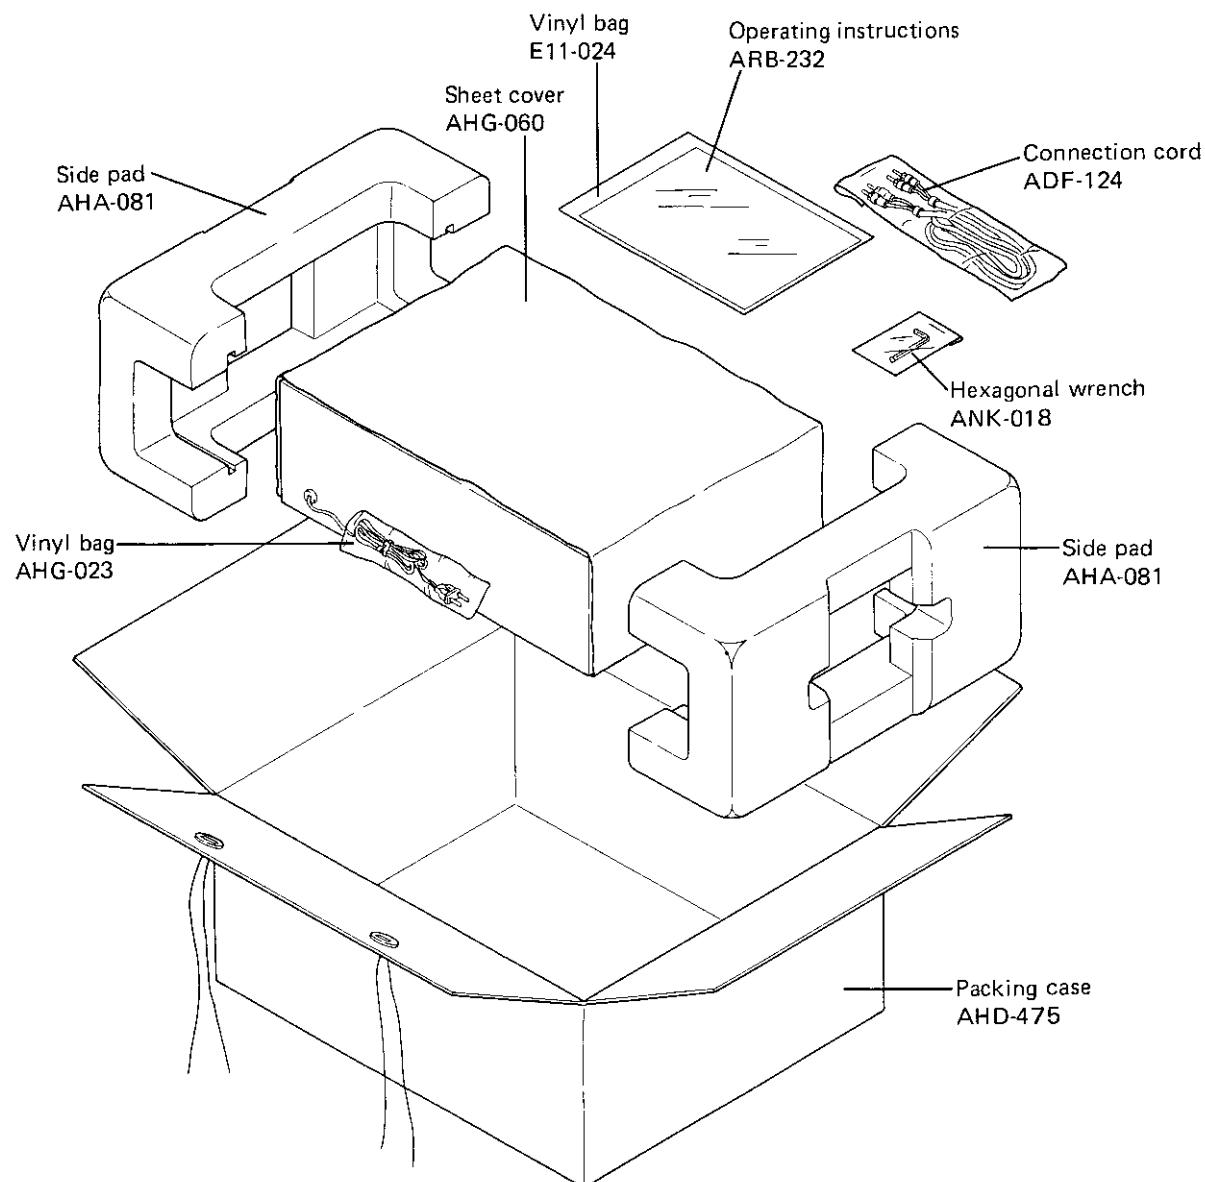

ELECTRONIC CROSSOVER NETWORK

D-23

SL

1

2

3

1

A

B

C

D

E

