

TEAC®**SERVICE MANUAL**

CX-350/CX-351**Stereo Cassette Deck**

1 SPECIFICATIONS AND SERVICE DATA

SPECIFICATIONS

Track System 4-track, 2-channel stereo

2 Heads Erase, record/playback

Type of Tape Cassette tape, C-60 and C-90 (Philips type)

Tape Speed 4.8 cm/s (1-7/8 ips)

Input (level and impedance)

MIC: Specified input level; -57 dB (1.09 mV)/10 kohms
Min. input level; -67 dB (346 μ V)

LINE IN: Specified input level; -9 dB (275 mV)/50 kohms
Min. input level; -19 dB (86.9 mV)

DIN*: Min. input level; -45 dB (4.36 mV)
*Pursuant to DIN standards

Output (level and load impedance)

OUTPUT: Spec. output level; -5 dB (438 mV)/50 kohms
Max. output level; -3 dB (548 mV)

PHONES: Spec. output level; -16 dB (123 mV)/8 ohms

Equalization

METAL: 3180 μ s + 70 μ s

Co (CrO₂): 3180 μ s + 70 μ s

NORMAL: 3180 μ s + 120 μ s

Head Configuration

1/2-track, 1-channel erase head

1/4-track, 2-channel record/playback head

Motor Bridge servo DC motor

Bias Frequency 100 kHz

Operation Position Horizontal

Power Requirements

100/117/220/240V AC, 50/60 Hz, 11W (General Export Model)

117V AC, 60 Hz, 11W (U.S.A./Canada Model)

220V AC, 50 Hz, 11W (Europe Model)

240V AC, 50 Hz, 11W (U.K./Australia Model)

Weight 6.0 kg (13-4/16 lbs.) net

Dimensions See page 3.

SERVICE DATA

MECHANICAL

Tape Speed Deviation 3,000 Hz $\pm$ 60 Hz

Tape Speed Drift 50 Hz

Wow and Flutter

Playback: 0.10% (WRMS)

Record/Playback: 0.25% (RMS)

Pinch Roller Pressure 350 g to 450 g (12.3 oz to 15.9 oz)

Reel Torque

Take-up: 40 to 60 g-cm (0.56 to 0.83 oz-inch)

Supply: 2 to 6 g-cm (0.028 to 0.083 oz-inch)

F.F.: 80 to 150 g-cm (1.1 to 2.1 oz-inch)

REW.: 90 to 150 g-cm (1.2 to 2.1 oz-inch)

Fast Wind Time

110 sec. or less for MTT-501 (C-00)

Auto End-stop Time 6 sec. or less

ELECTRICAL

Frequency Response

Playback	(Co (CrO ₂))	40 Hz	+2, -4 dB
	(METAL)	63 Hz	+2, -2 dB
		315 Hz	0 dB (Ref.)
		2 kHz	+2, -2 dB
		4 kHz	+4, -2 dB
		6.3 kHz	+4, -2 dB
		10 kHz	+4, -5 dB

Overall		40 Hz	+4, -4 dB
		63 Hz	+4, -4 dB
		125 Hz	+4, -2 dB
		250 Hz	+2, -2 dB
		400 Hz	0 dB (Ref.)
		6.3 kHz	+2, -2 dB
		8 kHz	+3, -2.5 dB
		12.5 kHz	+3, -4 dB
		8 kHz	+3, -3 dB
		10 kHz	+3, -4 dB

METAL,
Ce (CrO₂)
NORMAL

Signal-to-noise Ratio

Playback NORMAL; 46 dB min.

Record/Playback

METAL, Co (CrO₂); 45 dB min.

NORMAL; 44 dB min.

S/N is improved by 5 dB at 1 kHz and 10 dB above 5 kHz
when Dolby NR* is used.

Erase Efficiency 65 dB min. at 1 kHz (measured with input 10 dB
higher than the specified input level).

Channel Separation 30 dB min. at 1 kHz

Adjacent Track Crosstalk 40 dB min. at 125 Hz

Total Harmonic Distortion 2.0% or less with 3 types of tapes

* Noise reduction circuit made under license from Dolby Laboratories. The word "Dolby" and the Double-D symbol are trademarks of Dolby Laboratories.

CAUTION

△Parts marked with this sign are safety critical components. They must always be replaced with identical components — refer to the TEAC parts list and ensure exact replacement.

NOTES:

- Improvements may result in SPECIFICATIONS AND SERVICE DATA changes.
- Value of "dB" in the data refers to 0 dB (0.775 V), except where specified.

2 REMOVAL OF EXTERNAL COMPONENTS

Disassemble in number-order

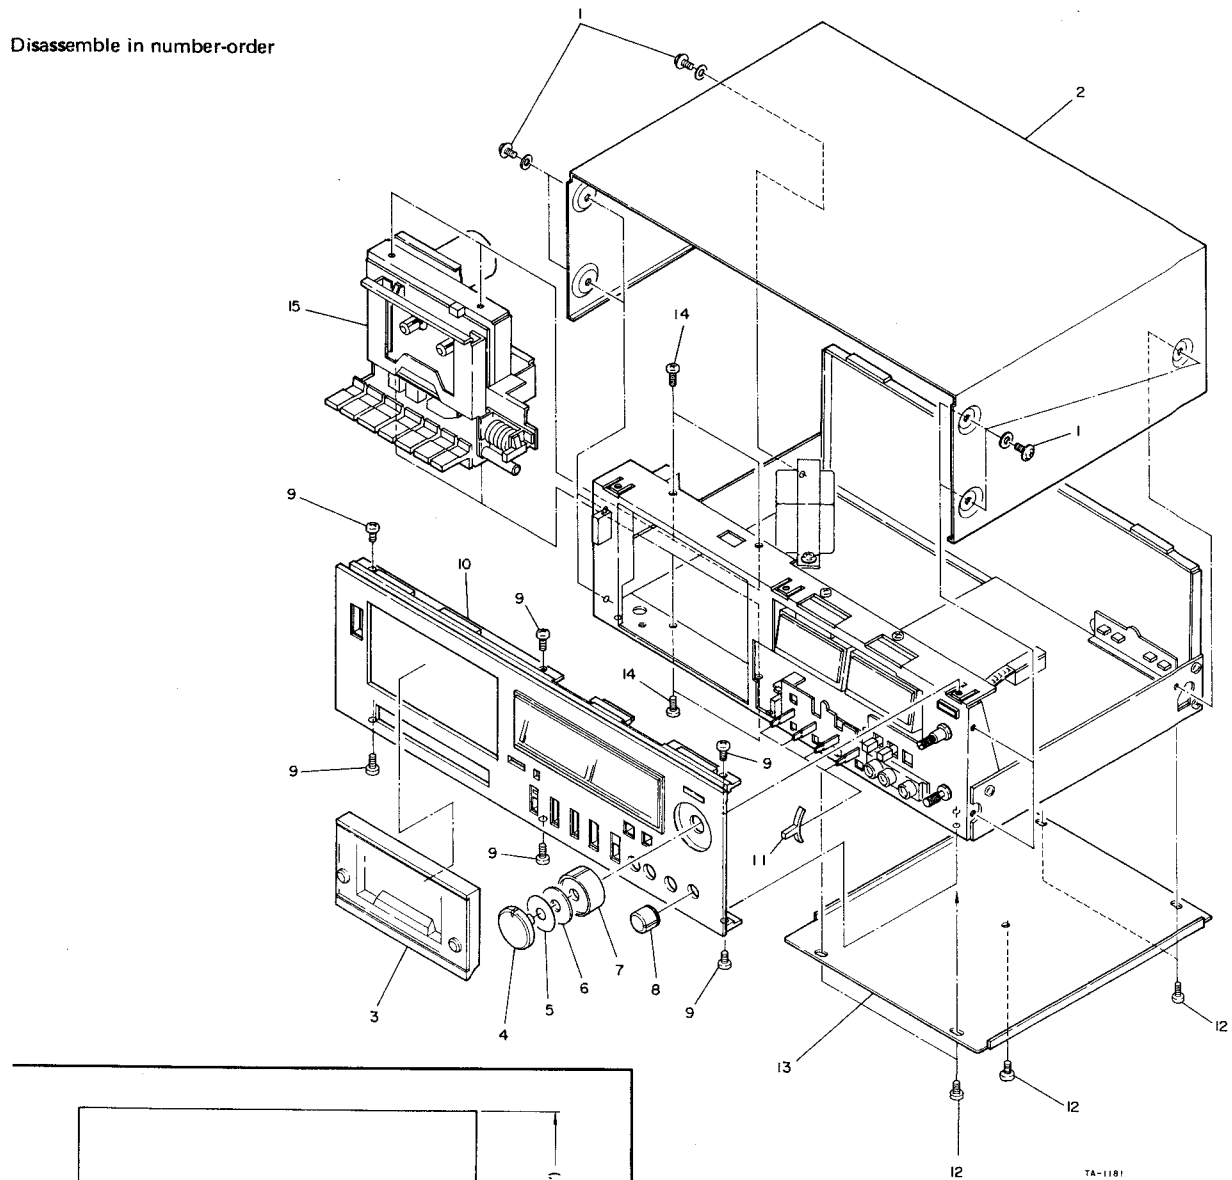


Fig. 2-1

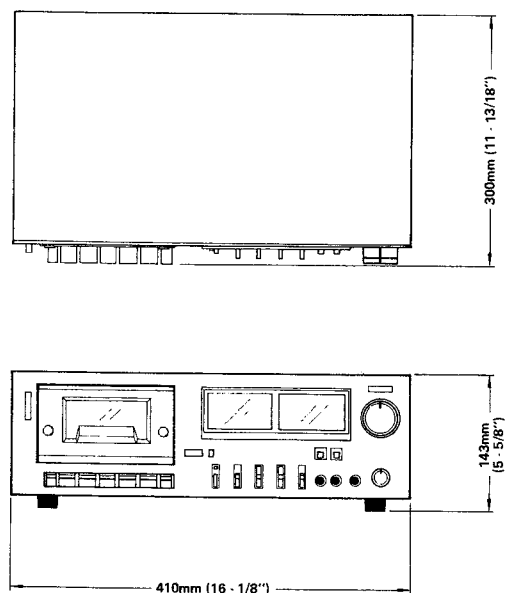


Fig. 1-1 Dimensions

TA-1179

3 PARTS LOCATION

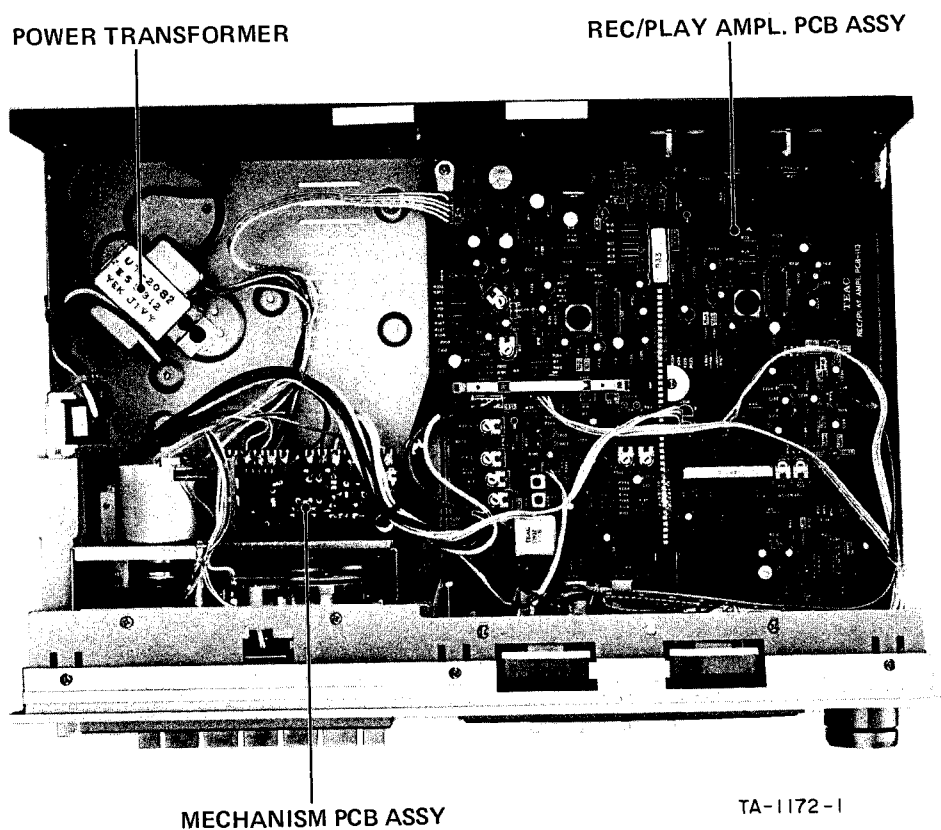


Fig. 3-1

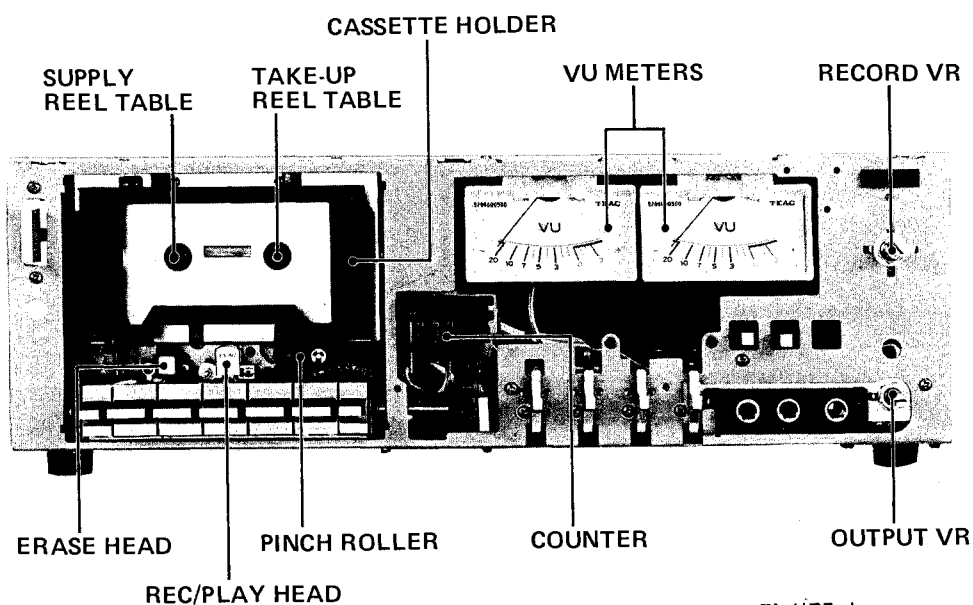


Fig. 3-2

4 MECHANICAL ADJUSTMENTS AND CHECKS

4-1 CAPSTAN ASSEMBLY THRUST

Capstan shaft thrust value: 0.05 mm to 6.15 mm

4-2 PINCH ROLLER PRESSURE

1. Set in the play mode with no tape.
2. Measure the pinch roller pressure when the pinch roller just begins rotation after it is separated from the capstan shaft.

Pinch roller pressure: 350 g to 450 g (12.3 oz to 15.9 oz)

4-3 REEL TORQUE

1. Load a cassette torque meter and read the pointer indication on the dial scale for each tape movement operation.

Take-up: 40 to 60 g-cm (0.56 to 0.83 oz-inch)

Supply: 2 to 6 g-cm (0.028 to 0.083 oz-inch)

F.F.: 80 to 150 g-cm (1.1 to 2.1 oz-inch)

REW.: 90 to 150 g-cm (1.2 to 2.1 oz-inch)

4-4 TAPE SPEED

1. Load and play a TEAC MTT-111 test tape.
2. Using a common slotted screwdriver with a handle completely insulated from the screwdriver blade, adjust the control on the motor (as far as possible) for a reading of 3,000 Hz (Spec.: 3,000 Hz $\pm$ 5 Hz).

NOTE: This tape speed setting should be done after about 20 seconds of operating time.

3. Check the following at any portion of the tape run.

Tape speed deviation 3,000 Hz $\pm$ 60 Hz

Tape speed drift 60 Hz

4-6 MUTING SWITCH


1. When the PLAY key is pressed then locked, the muting switch should be pushed positively.
2. When in the STOP mode, the switch should return to the original released condition.

4-6 MDTDR SWITCH

1. When the PLAY, F.F. or REW. keys are depressed, the motor switch should become ON to start motor rotation.
2. When in the STOP condition, the switch should be off to stop motor rotation.

4-7 LOCK PLATE RELEASE SOLENOID

1. Adjust the lock plate release solenoid position so that when its plunger is pushed into the solenoid housing (bottomed) by hand, the solenoid is positioned as far from the keys as possible but be sure that the lock plate does not foul the flywheel.

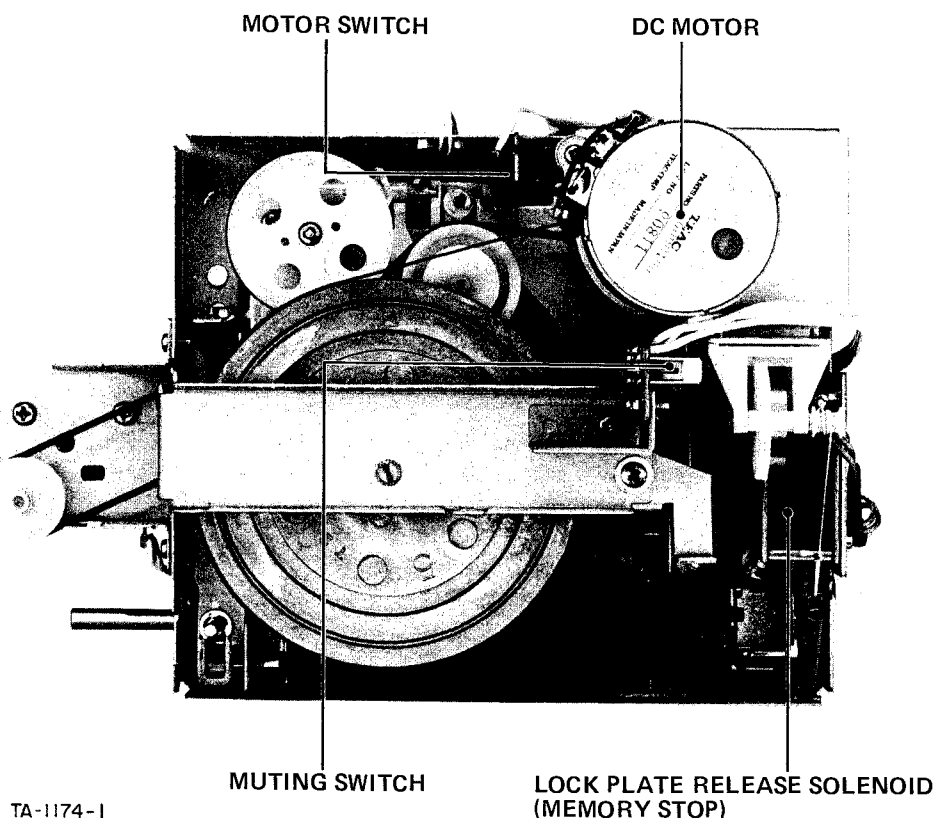

TA-1174-1

Fig. 3-3

4-B LUBRICATION

Lubrication is only required when parts are replaced. For this purpose, use the oil and grease specified below.

Oil: TEAC spindle oil (from TEAC TZ-255 oil kit),
Mobil D.T.E. Oil (Light, or equivalent)

Grease: ORE-LUBE G1/3 or equivalent

1. Apply a drop of oil with an oil applicator to a point about 1/3 the way down the shaft (from the free end) of the flywheel, then insert the shaft into the capstan housing.
2. Apply a suitable amount of light grease to the well of the flywheel bearing.

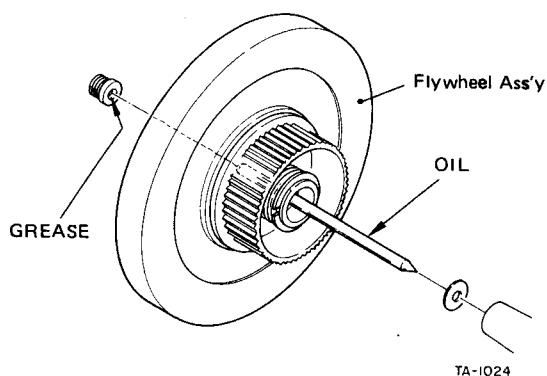


Fig. 4-1

4-9 VOLTAGE CONVERSION (GENERAL EXPORT MODEL ONLY)

ALWAYS DISCONNECT THE POWER LINE CORD BEFORE MAKING THESE ADJUSTMENTS.

1. Remove the top cover of the deck by removing the screws from the sides.
2. Locate the voltage selector, shown in the illustration, near the power transformer.
3. Loosen the two screws in the shorting bar and move the bar so that it shorts across the terminals marked with the required voltage (100, 117, 220 or 240).
4. Retighten the screws.
5. Replace the top cover.

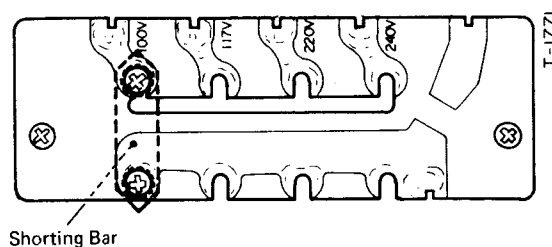


Fig. 4-2

5 ELECTRICAL ADJUSTMENTS AND CHECKS

PRECAUTIONS

1. Before performing adjustments and checks, clean and demagnetize the entire tape path.
2. Make sure the deck is properly set for the voltage in your locality.
3. In general, adjustments and checks are done in the order of L-ch then R-ch. Double REF. NOs. and test point designations indicate L-ch/R-ch. (Example: R11/R21)
4. The value of "dB" refers to 0 dB (0.775 V). If an AC voltmeter calibrated to 0 dB (1 V) is to be used, appropriate compensation should be made.
5. The AC voltmeter used in the procedures must have an input impedance of 1 M-ohms or more.
6. Note the "Deck settings" at the top of each chart. The settings must be used for all the checks or the chart unless explicitly stated otherwise.

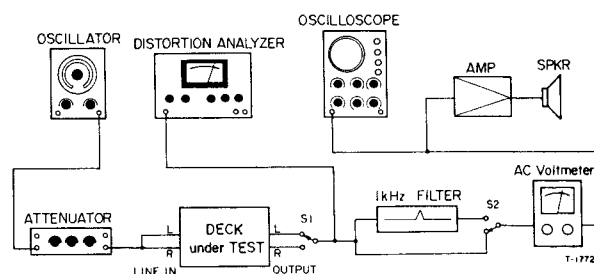


Fig. 5-1 Basic test setup

5-1. PLAYBACK PERFORMANCE

Deck settings:

EQ sw.—METAL
Oolby NR sw.—OUT

TEAC test tapes:

MTT-150: For Oolby level calibration
MTT-316: For playback frequency response check for METAL, Co (CrO₂)
MTT-216: For playback frequency response check for NORMAL

ITEM	INSTRUCTION	INPUT SIGNAL	ADJUST (or CHECK)	MEASURING POINT RESULT	REMARKS
1. Head azimuth	Conn. — Fig. 5-2 OUTPUT cont. — convenient output level position	MTT-150	Check	OUTPUT • Phase: 45° max. on 'scope (Fig. 5-4)	
		MTT-316 (10 kHz)	Azimuth nut of R/P head (Fig. 5-3)	OUTPUT • Phase: about 0° • Max. output at L-& R-ch's on VTVM	
2. Output level	—	MTT-150	R11/R21	DOLBY TP 580 mV (−2.5 dB)	
	OUTPUT cont. — Max.	MTT-150	Check	OUTPUT −3 dB ± 2 dB (436 mV ~ 690 mV)	Max. output level
	—	MTT-150	OUTPUT cont.	OUTPUT L-ch −5 dB (436 mV)	• Spec. setting of OUTPUT cont. • Spec. output level
	—	MTT-150	Check	OUTPUT R-ch −5 dB ± 1 dB (388 mV ~ 489 mV)	
	IMPORTANT: Do not move OUTPUT cont. during any later process.				
3. VU meter	—	MTT-150	R13/R23	VU meter +3 VU	

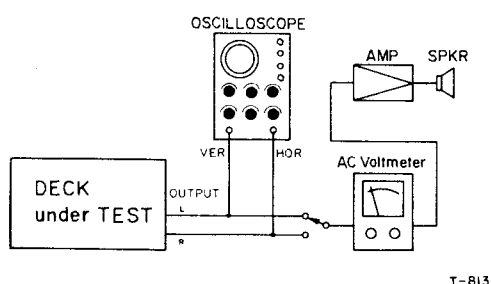


Fig. 5-2 Test setup for azimuth check



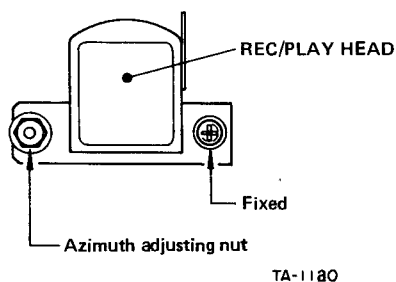


Fig. 5-3 Azimuth nut location


0° (IN PHASE)



45°



90°



180°




Fig. 5-4 Confirming phase relationship

ITEM	INSTRUCTION	INPUT SIGNAL	ADJUST (or CHECK)	MEASURING POINT RESULT	REMARKS
4. Frequency response	If 10 kHz output is low, adjust by cutting R137/R237.	MTT-315	Resistors R137/R237.	OUTPUT 40 Hz +2, -4 dB 53 Hz +2, -2 dB 315 Hz 0 dB (Ref.) 2 kHz +2, -2 dB 4 kHz +4, -2 dB 5.3 kHz +4, -2 dB 10 kHz +4, -5 dB	
	EQ sw. — NORMAL	MTT-316	Check	10 kHz output should be about 4 dB higher than in the step above.	
5. Signal-to-noise ratio	EQ sw. — NORMAL	Fully erased MTT-501 tape (Use bulk tape eraser)	Check	OUTPUT 45 dB min. ratio	Ratio of spec. output -5 dB to noise
6. Headphone output level	Conn. — Fig. 5-5	MTT-150	Check	PHONES -15 dB $\pm$ 3 dB (86.9 mV $\sim$ 173 mV)	8 ohm load

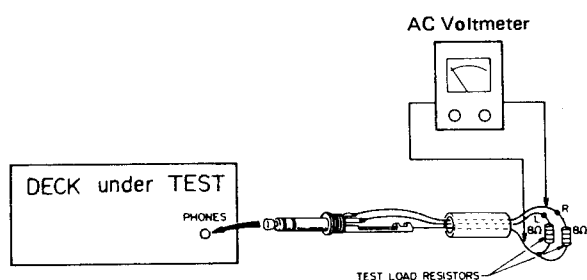


Fig. 5-5 Test setup for headphone check

Deck settings:

REC/PAUSE mode

OOLRY NR sw.—OUT

INPUT sw.—LINE

OUTPUT cont.—Spec. position (item 2)

5-2. MONITOR PERFORMANCE

ITEM	INSTRUCTION	INPUT SIGNAL	ADJUST (or CHECK)	MEASURING POINT RESULT	REMARKS
7. Min. input level	RECORD cont. — Max. INPUT sw. — MIC	MIC 400 Hz/-57 dB (346 μ V)	Check	OUTPUT -5 dB $\pm$ 3 dB (308 mV $\sim$ 515 mV)	MIC min. input level
	INPUT sw. — MIC	DIN IN 400 Hz/-45 dB (4.35 mV)	Check	OUTPUT -5 dB $\pm$ 3 dB (308 mV $\sim$ 615 mV)	DIN min. input level (For General Export Models)
	INPUT sw. — LINE	LINE IN 400 Hz/-19 dB (86.9 mV)	Check	OUTPUT -5 dB $\pm$ 2 dB (346 mV $\sim$ 548 mV)	LINE min. input level
8. LINE spec. input level	—	LINE IN 400 Hz/-9 dB (275 mV)	Record cont.	DOLBY TP 580 mV (-2.5 dB)	Spec. setting of RECORD cont.
	—	LINE IN 400 Hz/-9 dB (275 mV)	Check	OUTPUT -5 dB $\pm$ 1 dB (388 mV $\sim$ 489 mV)	
	IMPORTANT: Do not move RECORD or, OUTPUT controls during any later process.				
9. VU meter	—	LINE IN 400 Hz/-9 dB (275 mV)	Check	VU meter +3 VU $\pm$ 1 VU	

5.3. RECORDING PERFORMANCE

Deck settings:

DOLBY NR sw.—OUT

INPUT sw.—LINE

OUTPUT cont.—Spec. position (item 2)

RECORD cont.—Spec. position (item 8)

TEAC test tapes:

MTT-506: For record test with Co (CrO₂)

MTT-561: For record test with NORMAL

METAL: For record test with METAL

ITEM	INSTRUCTION	INPUT SIGNAL	ADJUST (or CHECK)	MEASURING POINT RESULT	REMARKS
10. Bias trap	Record-pause mode	LINE IN No signal	U106/U206	BIAS TRAP TP Min. reading	
11. Record bias	① METAL/METAL tape	LINE IN 400 Hz & 6.3 kHz alternately/—42 dB (6.15 mV)	R14/R24	OUTPUT Nearly equal level at both freq.	Adjust in the order of ①→②→③
	② Co (CrO ₂)/MTT-506		R17		
	③ NORMAL/MTT-501		R18		
12. Record level	BIAS/EO — METAL METAL tape	LINE IN 400 Hz/—12 dB (195 mV)	R12/R22	OUTPUT —8 dB (308 mV)	
	Co (CrO ₂)/MTT-506 tape NORMAL/MTT-501	LINE IN 400 Hz/—12 dB (195 mV)	Check	OUTPUT —8 dB ±1.5 dB (259 mV ~ 367 mV)	
13. Total harmonic distortion	METAL/METAL tape Co (CrO ₂)/MTT-506 NORMAL/MTT-501	LINE IN 400 Hz/—12 dB (195 mV)	Check	OUTPUT 2.0% or less distortion	
14. Frequency response	METAL/METAL tape Co (CrO ₂)/MTT-506 NORMAL/MTT-501	LINE IN Required signal/ —42 dB (6.15 mV)	Check	OUTPUT 40 Hz +4, —4 dB 63 Hz +4, —4 dB 125 Hz +4, —2 dB 250 Hz +2, —2 dB 400 Hz 0 dB (Ref.) 6.3 kHz +2, —2 dB 8 kHz +3, —2.5 dB 12.5 kHz +3, —4 dB	} METAL, } Co (CrO ₂) } NORMAL
				8 kHz +3, —3 dB 10 kHz +3, —4 dB	
If frequency response is wrong, recheck steps 11 and 13.					
15. Signal-to-noise ratio	METAL/METAL tape } Co (CrO ₂)/MTT-506 } NORMAL/MTT-501...	LINE IN 1 kHz/—9 dB (275 mV) ↓ no signal	Check	OUTPUT } ... 45 dB min. ratio } ... 44 dB min. ratio	Ratio of spec. output —5 dB to noise
16. Erase efficiency	• Connection — Fig. 5-1. But switch ON 1 kHz filter. • Record 1 kHz. Rewind tape to mid point of recorded portion. Do "no signal" recording. Get difference between 1 kHz portion and its erased portion.				
	METAL/METAL tape	LINE IN 1 kHz/+1 dB (0.869V) ↓ no signal	Check	OUTPUT 65 dB min. ratio	Ref. output level: +5 dB (1.38V)
17. REC MUTE function	• Connection — Fig. 5-1. But switch ON 1 kHz filter. • Record 1 kHz. Then push REC MUTE button for several sec. Rewind end play tape. Get difference between 1 kHz portion and the "no signal" portion.				
	Co (CrO ₂)/MTT-506	LINE IN 1 kHz/+1 dB (0.869V) ↓ no signal	Check	OUTPUT 65 dB min. ratio	Ref. output level: +5 dB (1.38V)
18. Channel separation	• Connection — Fig. 5-1. But do not connect LINE IN (R), switch ON 1 kHz filter. • Set deck in record mode. Find differences between 1 kHz recorded portion (L-ch) and "no signal" portion (R-ch).				
	Co (CrO ₂)/MTT-506	LINE IN L-ch 1 kHz/—9 dB (275 mV) R-ch No signal	Check	OUTPUT 30 dB min. ratio	

ITEM	INSTRUCTION	INPUT SIGNAL	ADJUST (or CHECK)	MEASURING POINT RESULT	REMARKS
19. Adjacent track crosstalk	• Connection — Fig. 5-1. But do not connect LINE IN (L) and OUTPUT (L). • Record 125 Hz on R-ch. Note output level of its recorded portion. • Invert tape and play R-ch track. Check leakage level against the output reference of previously recorded portion.				
	Co (CrO ₂)/MTT-506	LINE IN L-ch No signal R-ch 125 Hz/−9 dB (275 mV)	Check	OUTPUT 40 dB min. ratio	
20. Dolby NR effect	• Record 1 kHz with Dolby NR switch to OUT. Play its portion with switch, OUT and IN. Get the output level difference between OUT and IN positions. • Repeat the above process for 10 kHz.				
	Co (CrO ₂)/MTT-506	LINE IN 1 kHz/−29 dB (27.5 mV)	Check	OUTPUT Variation 3 dB ~ 8 dB	
	Co (CrO ₂)/MTT-506	LINE IN 10 kHz/−39 dB (8.69 mV)	Check	OUTPUT Variation 8 dB ~ 12 dB	

5-4. ADJUSTMENT AND TEST POINT LOCATIONS


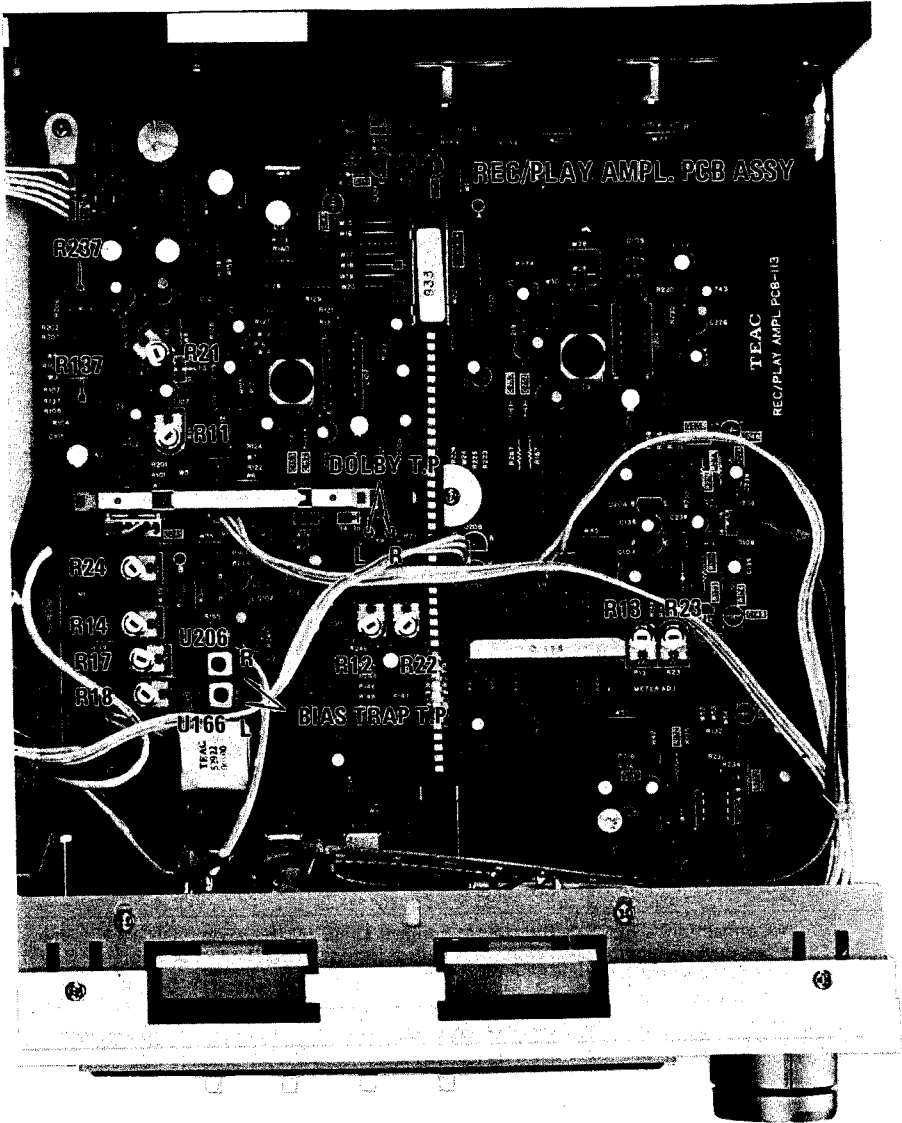


Fig. 5-6


ASSEMBLING HARDWARE CODING LIST

All screws conform to ISO standards, and have crossrecessed heads, unless otherwise noted.
ISO screws have the head inscribed with a point as in the figure to the right.



FOR EXAMPLE:

B M 3 x 6
 ----- Length in mm (L)
 ----- Diameter in mm (D) *
 ----- Metric System
 ----- Nomenclature



* Inner dia. for washers and nuts

	Code	Name	Type		Code	Name	Type
MACHINE SCREW	R	Round Head Screw		TAPPING SCREW	BTA	Binding Head Tapping Screw(A Type)	
	P	Pan Head Screw			BTB	Binding Head Tapping Screw(B Type)	
	T	Stove Head Screw (Truss)			RTA	Round Head Tapping Screw(A Type)	
	B	Binding Head Screw			RTB	Round Head Tapping Screw(B Type)	
	F	Flat Countersunk Head Screw		SETSCREW	SF	Hex Socket Setscrew(Flat Point)	
	O	Oval Countersunk Head Screw			SC	Hex Socket Setscrew(Cup Point)	
WOOD SCREW	RW	Round Head Wood Screw			SS	Slotted Socket Setscrew(Flat Point)	
TAPTITE SCREW	PTT	Pan Head Taptite Screw		WASHER	E	E-Ring (Retaining Washer)	
	WTT	Washer Head Taptite Screw			W	Flat Washer (Plain)	
SEMS SCREW	BSA	Binding Head SEMS Screw(A Type)			SW	Lock Washer (Spring)	
	BSB	Binding Head SEMS Screw(B Type)			LWI	Lock Washer (Internal Teeth)	
	BSF	Binding Head SEMS Screw(F Type)			LWE	Lock Washer (External Teeth)	
	PSA	Pan Head SEMS Screw(A Type)			TW	Trim Washer (Countersunk)	
	PSB	Pan Head SEMS Screw(B Type)					
				NUT	N	Hex Nut	


Parts marked with *require longer delivery time than regular parts.

REF. NO.	PARTS NO.	DESCRIPTION	REMARKS
1 - 1	*5800009900	Cover, Top	CX-350
	*5552438000	Cover, Top	CX-351
1 - 2	*5640001710	Panel Assy, Front; C	CX-350
	*5640001720	Panel Assy, Front; E	CX-351
1 - 3	*5800018100	Knob, VR	
1 - 4	*5800018400	Knob, REC; B	
1 - 5	*5800025400	Washer, Felt	
1 - 6	*5800018200	Knob, REC; A	
1 - 7	*5640002100	Cover Assy, Cassette	CX-350
	*5800005400	Cover Assy, Cassette; C	CX-351
1 - 8	*5800010900	Escutcheon Assy, Meter	CX-350
	*5800018700	Escutcheon Assy, Meter	CX-351
1 - 9	*5800018300	Knob, Lever SW	
1 - 10	*5800010400	Cover, Bottom	
1 - 11	5534432000	Foot	
1 - 12	5555570000	Cushion, Top Cover	

INCLUDED ACCESSORIES

REF. NO.	PARTS NO.	DESCRIPTION	REMARKS
	5128107000	Cord, Input-output Connection	
	5534580000	Belt, C	
	5101345000	Information Supplement, Cassette	U.S.A.
	5101495000	Information Supplement, Cassette	All except U.S.A.
	5700001600	CX-350/CX-351 Owner's Manual	U.S.A.
	5700001800	CX-350/CX-351 Owner's Manual	All except U.S.A.

EXPLODED VIEW - 2

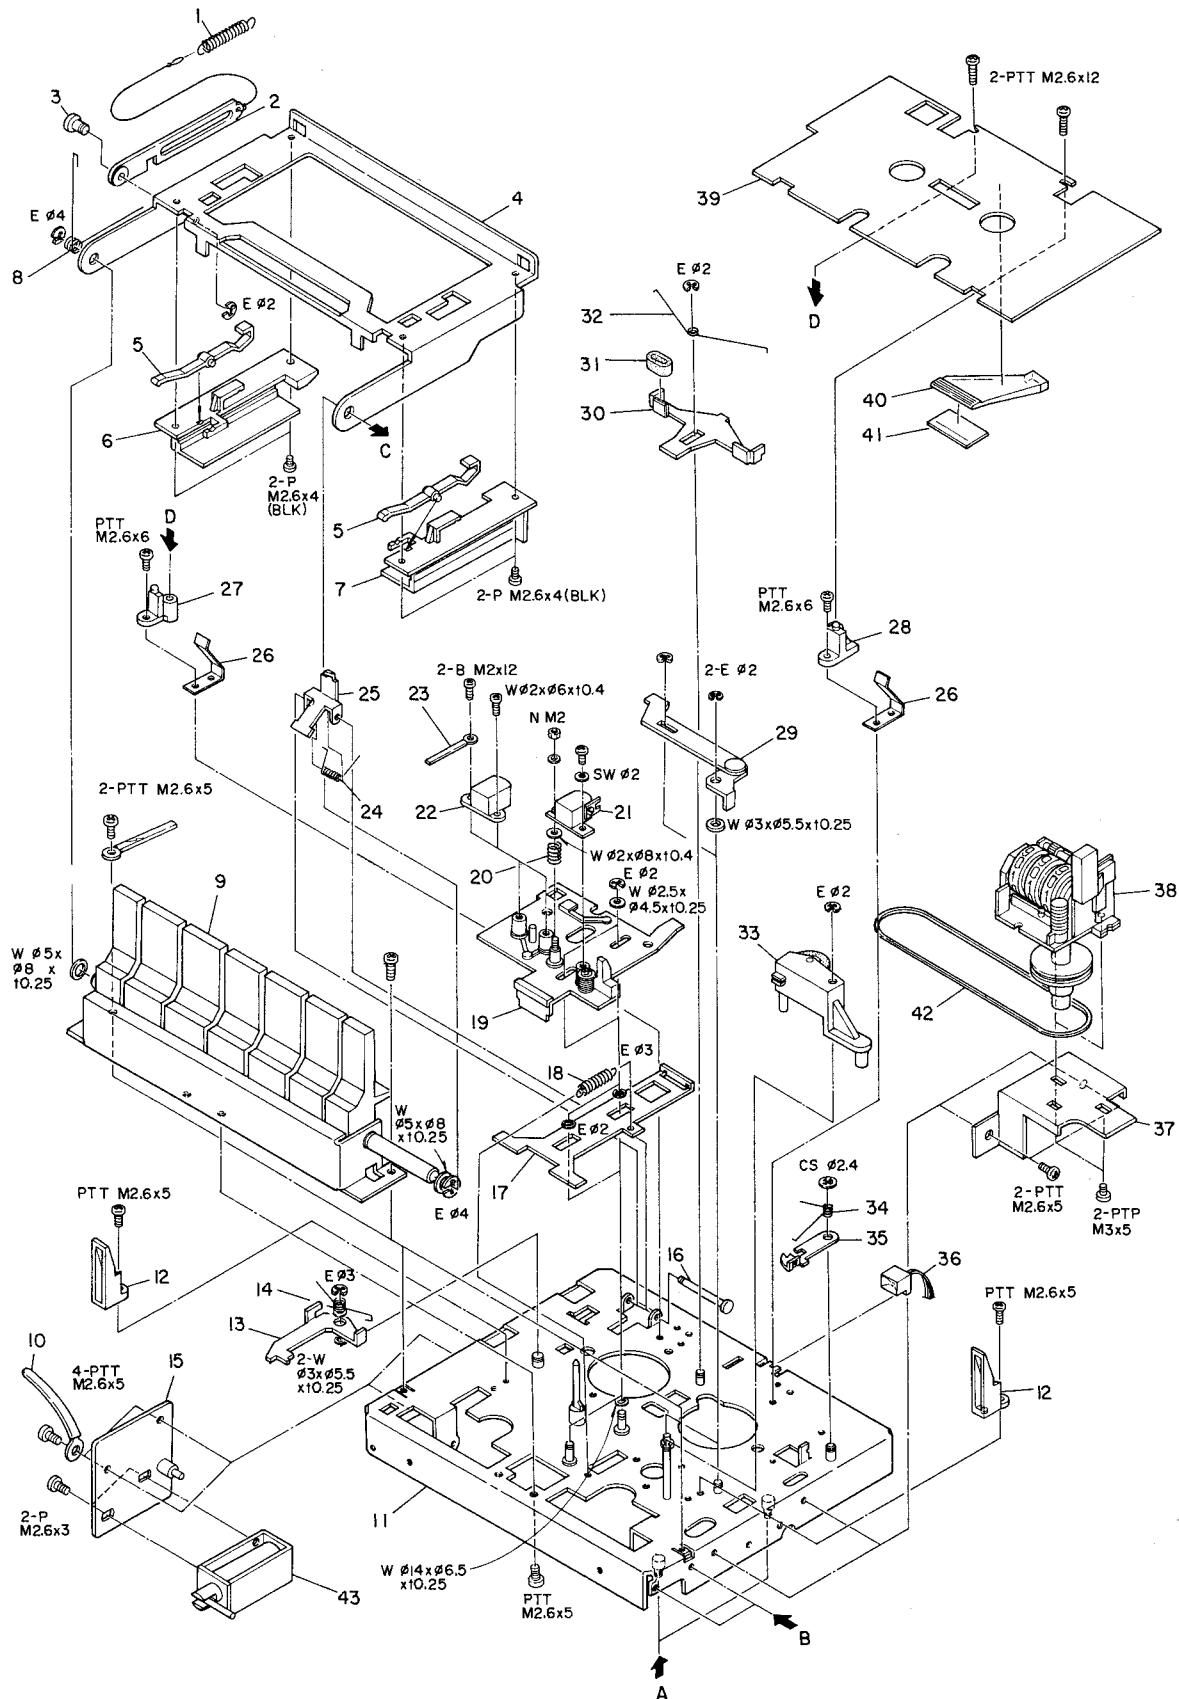


Parts marked with *require longer delivery time than regular parts.

REF. NO.	PARTS NO.	DESCRIPTION	REMARKS
2 - 1	*5524203000	Spring, Damper	All except CX-351 CX-351
2 - 2	*5534612000	Plate, Lock	
2 - 3	*5545089000	Shaft, Lock Plate	
2 - 4	5553323000	Holder, Cassette	
2 - 5	5534615000	Spring, Cassette Pressure	
2 - 6	5534613000	Guide, Cassette; L	
2 - 7	5534614000	Guide, Cassette; R	
2 - 8	*5524247000	Spring, Holder	
2 - 9	*5800025000	Button Assy	
	*5800025100	Button Assy	
2 - 10	*5581038000	Clamper, Cord; A	
2 - 11	*5502239004	Chassis, Mechanism	
2 - 12	*5534444200	Guide, Cassette	
2 - 13	*5555762000	Arm, Eject Preventing	
2 - 14	*5800025500	Spring, Arm; B	
2 - 15	*5800013300	Plate Assy, Solenoid	
2 - 16	*5544655000	Shaft, Record Preventing	
2 - 17	*5555755000	Plate, Brake Actuating	
2 - 18	*5524240000	Spring, Brake Actuating Plate	
2 - 19	5504755002	Plate Assy, Head Base	
2 - 20	*5524120000	Spring, Head	
2 - 21	*5378600100	Head, REC/PLAY	
2 - 22	*5569613000	Head, Erase	
2 - 23	*5581062000	Clamper, Cord; E	
2 - 24	*5520349000	Spring, Safety Lever	
2 - 25	*5555081100	Lever, Safety; C	
2 - 26	*5555773000	Plate, Cassette Pressure	
2 - 27	*5534765000	Cassette Guide, L	
2 - 28	*5534765000	Cassette Guide, R	
2 - 29	5504773000	Arm Assy, Pause	
2 - 30	*5555759000	Plate, Brake	
2 - 31	*5534844000	Shoe, Brake	
2 - 32	*5524241000	Spring, Brake	
2 - 33	5504760002	Pinch Roller Assy	
2 - 34	*5084550200	Spring, Lock	
2 - 35	*5084643200	Plate, Lock	
2 - 36	*5310005000	Lamp, w/Holder	
2 - 37	*5800015100	Bracket, Counter	
2 - 38	*5800017400	Counter Assy	
2 - 39	*5555770001	Plate, Cassette Holder	
2 - 40	*5534751000	Lens, Cassette	
2 - 41	*5555771000	Plate, Reflective	
2 - 42	5534759000	Belt, Counter	
2 - 43	*5813000200	Solenoid	

Parts marked with *require longer delivery time than regular parts.

REF. NO.	PARTS NO.	DESCRIPTION	REMARKS
3 - 1	*5200003600	PCB Assy, SWITCH	
	*5210003600	PCB, SWITCH; A	Part of 3 - 1
	5131030000	Switch, Slide	Part of 3 - 1
3 - 2	*5555754000	Bracket, Switch; A	
3 - 3	*5555753000	Lever, Slide Switch	
3 - 4	*5504758000	Plate Assy, Thrust	
3 - 5	*5524251001	Spring, Thrust	
3 - 6	*5534744000	Screw, Thrust	
3 - 7	5504756002	Capstan Assy	
3 - 8	5534767000	Belt, Capstan Drive	
3 - 9	*5550031000	Washer, Thrust	
3 - 10	5504091000	Housing Assy, Capstan	
3 - 11	*5502239004	Chassis, Mechanism	
3 - 12	*5555755000	Bracket, Switch; B	
3 - 13	5135003000	Switch, Leaf	
3 - 14	*5504772000	Lever Assy, Pause; A	
3 - 15	*5555766001	Lever, Pause; B	
3 - 16	*5524244001	Spring, Pause	
3 - 17	*5524235000	Spring, Lever Return	
3 - 18	5534130000	Washer, Oil Retaining	
3 - 19	*5800017100	Lever Assy, FF; B	
3 - 20	*5524250000	Spring, Head Base Plate	
3 - 21	*5800012300	Bracket, Switch; D	
3 - 22	*5301752600	Switch, Leaf	
3 - 23	*5370000100	Motor Assy, Capstan	
3 - 24	*5555761000	Bracket, Motor Assy	
3 - 25	*5504777000	Damper Assy, C	
3 - 26	5534768000	Belt, Relay	
3 - 27	*5524246000	Spring, Stop Lever	
3 - 28	*5504774000	Lever Assy, Stop	
3 - 29	*5581038000	Clamper, Cord; A	
3 - 30	*5524243000	Spring, Record	
3 - 31	*5555764000	Arm, Record Actuating	
3 - 32	5502240005	Gear Assy, Sub Base	
3 - 33	*5504771000	Lever Assy, Eject	
3 - 34	*5555763000	Lever, Record	
3 - 35	*5524293000	Lever, Lock Actuating	
3 - 36	5533221001	Plate, Button Lock	
3 - 37	*5800037501	Spring, Plate; B	
3 - 38	*5210003401	PCB Assy, MECHANISM	

EXPLODED VIEW - 4

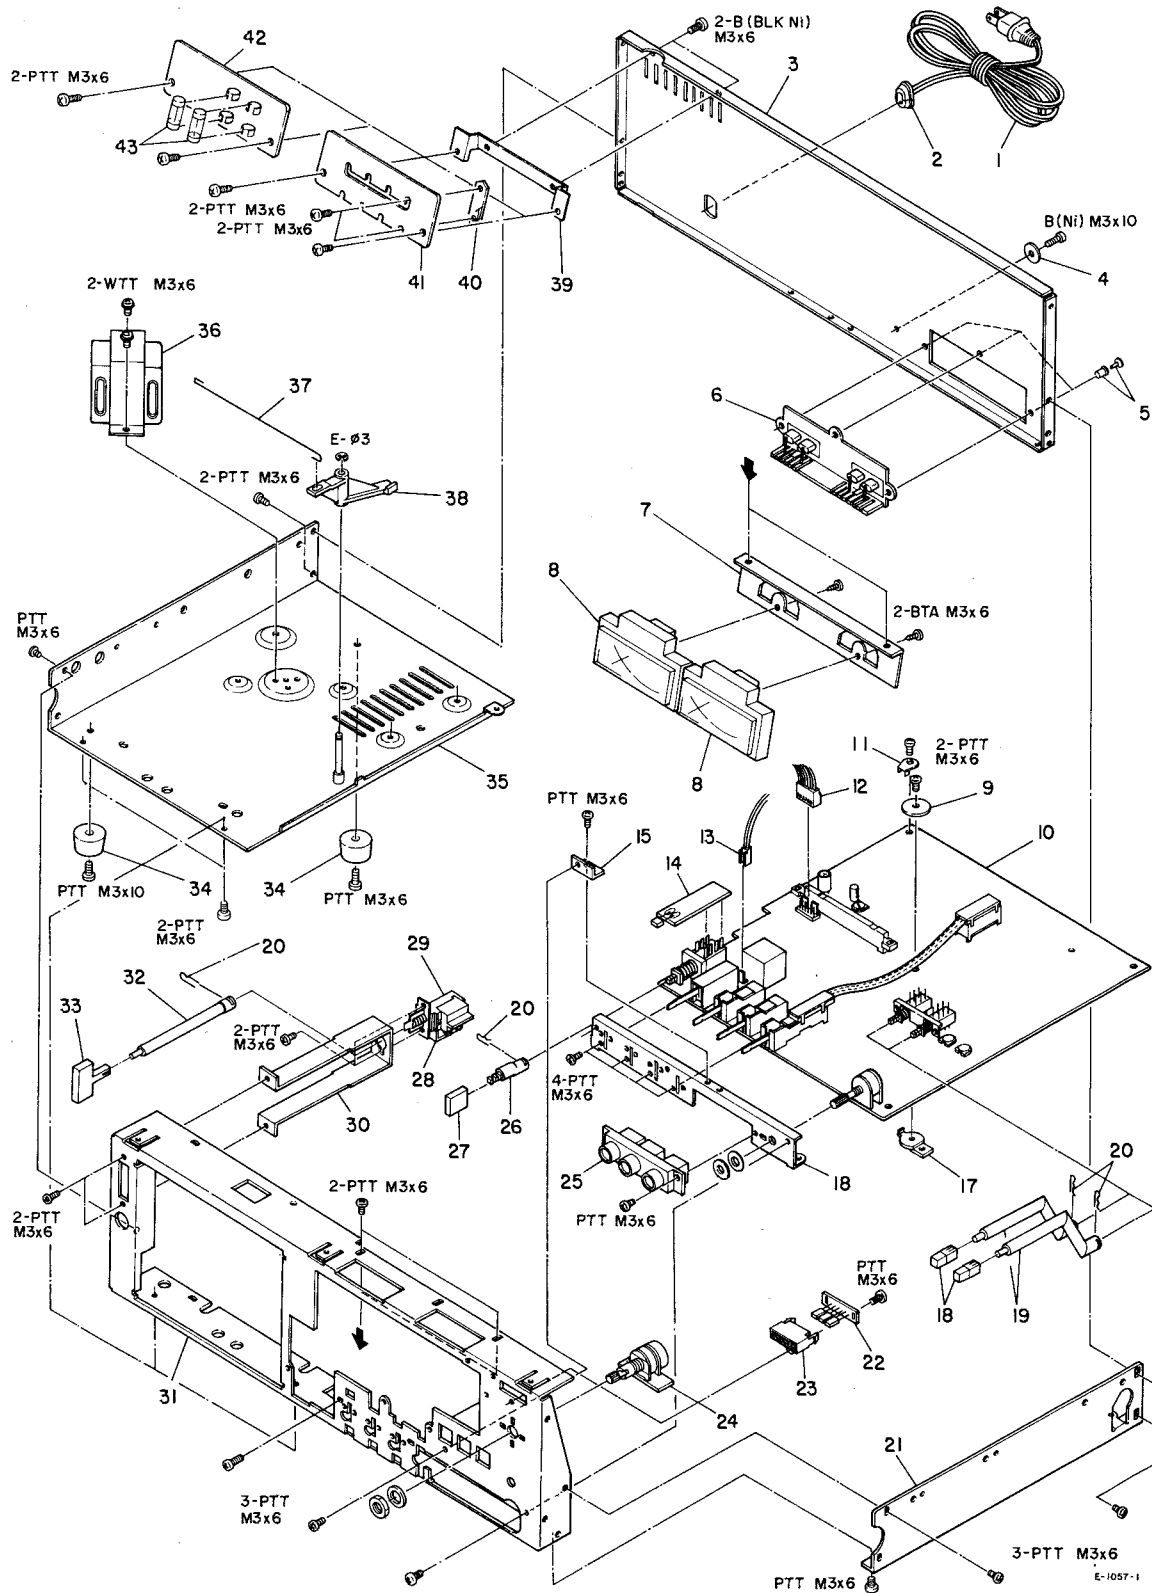


Parts marked with *require longer delivery time than regular parts.

REF. NO.	PARTS NO.	DESCRIPTION	REMARKS
4 - 1	△*5128034000	Cord, AC Power	GENERAL EXPORT U.S.A., CANADA EUROPE U.K. AUSTRALIA
	△*5128075000	Cord, AC Power	
	△*5128017000	Cord, AC Power	
	△*5128036000	Cord, AC Power	
	△*5128031000	Cord, AC Power	
4 - 2	*5534660000	Strain Relief, AC Power Cord	All except U.K., EUROPE U.K. AUSTRALIA
	*5534661000	Strain Relief, AC Power Cord	
	*5534663000	Strain Relief, AC Power Cord	
4 - 3	*5800010300	Panel, Rear	Part of 4 - 10
4 - 4	*5555063000	Washer, GND	
4 - 5	*5534118000	Rivet, Push	
4 - 6	*5126038000	Terminal Assy, IN/OUTPUT	
4 - 7	*5800008700	Bracket, Meter	
4 - 8	*5296000500	Meter, VU	
4 - 9	*5580007000	Washer	
4 - 10	*5200002703	PCB Assy, REC/PLAY AMPL.	
4 - 11	*5555590000	Plate, GND; A	
4 - 12	*5122168000	Connector, Socket; 6P	
4 - 13	*5122164000	Connector, Socket; 2P	
4 - 14	*5200002900	PCB Assy, LED; A	
	*5210002900	PCB, LED; A	
	5225005100	LED (Red)	
4 - 15	*5800008900	Plate, Reinforcing; B	GENERAL EXPORT, AUSTRALIA U.S.A. CANADA EUROPE, U.K. AUSTRALIA U.S.A. CANADA EUROPE, U.K. GENERAL EXPORT
4 - 16	*5800009400	Bracket, Switch	
4 - 17	*5800009000	Bracket, PCB	
4 - 18	*5800004500	Button, C	
4 - 19	*5534652000	Rod, Switch; C	
4 - 20	*5786360500	R Pin, φ5	
4 - 21	*5800009500	Chassis, Right; B	
4 - 22	*5200003000	PCB Assy, LED; B	
	*5210003000	PCB, LED; B	
	5225005100	LED (Red)	
4 - 23	*5800010600	Holder, LED	
4 - 24	*5200003100	PCB Assy, VR	
	*5210003100	PCB, VR	
	5282705002	Var. Res., 100 k ohm (A) x 2	
4 - 25	*5124063000	Jack Assy, 3-gang	U.S.A. CANADA GENERAL EXPORT EUROPE, U.K., AUSTRALIA
4 - 26	*5800008400	Shaft, Joint; C	
4 - 27	*5800017900	Button	
4 - 28	△*5052907000	Spark Killer, 0.01 mfd + 300 ohm 400V	
	△*5052910000	Spark Killer, 0.033 mfd + 120 ohm 125V	
	△*5052911000	Spark Killer, 0.033 mfd + 120 ohm 250V	
	△*5180001000	Spark Killer, 0.047 mfd 250V	
4 - 29	△*5134036000	Switch, Push; Power	
	△*5134037000	Switch, Push; Power	
	△*5134018000	Switch, Push; Power	
	△*5134044000	Switch, Push; Power	
	△*5300017800	Switch, Push; Power	
4 - 30	*5800008800	Bracket, Power Switch	
4 - 31	*5800010500	Chassis, Front	
4 - 32	*5800008300	Rod, Power Switch	GENERAL EXPORT GENERAL EXPORT GENERAL EXPORT EUROPE, U.K. Part of 4 - 42 EUROPE, U.K.
4 - 33	*5800017700	Button, Push; A	
4 - 34	5534432000	Poot	
4 - 35	*5800011200	Chassis, Left	
4 - 36	△*5320000500	Transformer, Power	
	△*5320000600	Transformer, Power	
	△*5320000700	Transformer, Power	
	△*5320000800	Transformer, Power	
4 - 37	*5800008600	Link, Record	
4 - 38	*5800008100	Lever, Record	
4 - 39	*5800009300	Bracket	
4 - 40	*5555062000	Plate, Shorting Bar	
4 - 41	*5167548100	PCB, VOLTAGE SELECTOR	
4 - 42	*5210002400	PCB, FUSE	
	*5142087000	Holder, Fuse	Part of 4 - 42 EUROPE, U.K.
4 - 43	*5041138000	Fuse, T 500 mA 250V	


7 PC BOARDS AND PARTS LIST

PC Boards shown viewed from foil side.

REC/PLAY AMPL. PCB ASSY

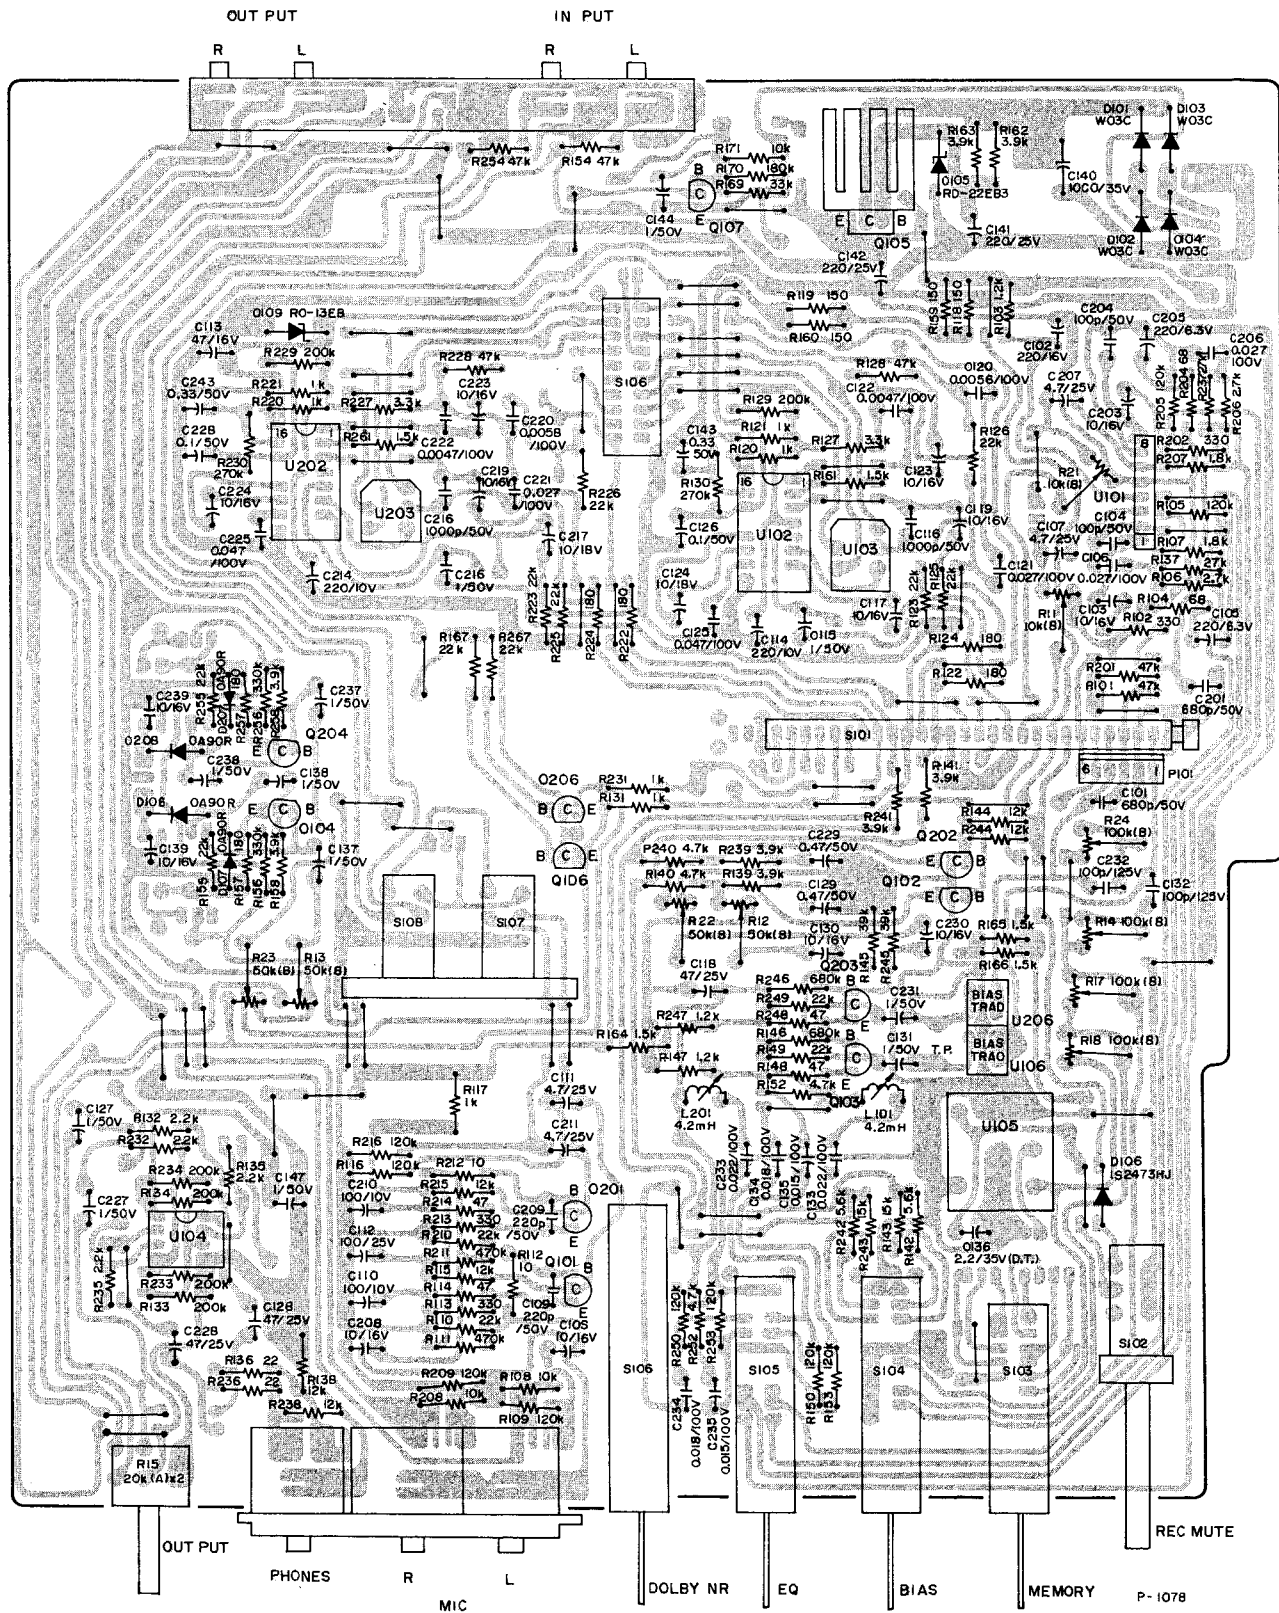

MECHANISM PCB ASSY

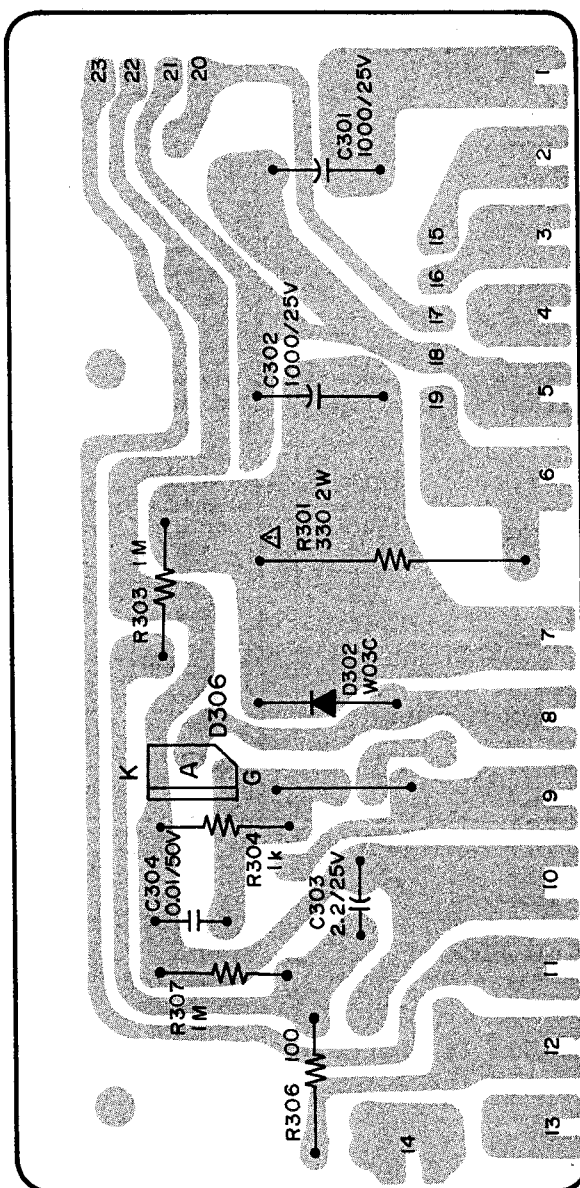

P-1079

REC/PLAY AMPL. PCB ASSY

REF. NO.	PARTS NO.	DESCRIPTION
	5200002703	PCB Assy, REC/PLAY AMPL. (All except EUROPE)
	5200002713	PCB Assy, REC/PLAY AMPL. (EUROPE)
	5210002701	PCB, REC/PLAY AMPL.
ICs		
U101	5147061000	μ PC-1032H
U102, U202	5147046000	NE-646B
U104	5220405000	μ PC-4557C
TRANSISTORS		
Q101, Q201	5042495000	2SC-1222E
Q102, Q202	5145185000	2SD-655E
Q103, Q203	5145091000	2SC-945AK
Q104, Q204	5145091000	2SC-045AK
Q105	5145087000	2SD-313E
DIODES		
D101 ~ D104	5143315000	W03C
D105	5224517500	Zener, RD22EB3
D106	5143118000	1S2473HJ
D107, D207	5224012800	OA90R
D108, D208	5224012800	OA90R
D109	5143108000	Zener, RD13EB3
CARBON RESISTORS		
All resistors are rated $\pm 5\%$ tolerance and $\frac{1}{4}$ watt.		
R101, R201	5183122000	47 k ohm
R102, R202	5183070000	330 ohm
R103	5183084000	1.2 k ohm
R104, R204	5183054000	68 ohm
R105, R205	5183132000	120 k ohm
R106, R206	5183092000	2.7 k ohm
R107, R207	5183088000	1.8 k ohm
R108, R208	5183106000	10 k ohm (EUROPE)
R109, R209	5183132000	120 k ohm
R110, R210	5183114000	22 k ohm
R111, R211	5183146000	470 k ohm
R112, R212	5183034000	10 ohm
R113, R213	5183070000	330 ohm
R114, R214	5183050000	47 ohm
R115, R215	5183108000	12 k ohm
R116, R216	5183132000	120 k ohm
R117	5183082000	1 k ohm
R118	5183062000	150 ohm
R119	5183062000	150 ohm
R120, R220	5183082000	1 k ohm
R121, R221	5183082000	1 k ohm
R122, R222	5183064000	180 ohm
R123, R223	5183114000	22 k ohm
R124, R224	5183004000	180 ohm
R125, R225	5183114000	22 k ohm
R126, R226	5183114000	22 k ohm
R127, R227	5183004000	3.3 k ohm
R128, R228	5183122000	47 k ohm
R129, R229	5183137000	200 k ohm
R130, R230	5183140000	270 k ohm

REF. NO.	PARTS NO.	DESCRIPTION
R131, R231	5183082000	1 k ohm
R132, R232	5183090000	2.2 k ohm
R133, R233	5183137000	200 k ohm
R134, R234	5183137000	200 k ohm
R135, R235	5183090000	2.2 k ohm
R136, R236	5183042000	22 ohm
R137, R237	5183116000	27 k ohm
R138, R238	5183108000	12 k ohm
R139, R239	5183096000	3.9 k ohm
R140, R240	5183098000	4.7 k ohm
R141, R241	5183096000	3.9 k ohm
R142, R242	5183100000	5.6 k ohm
R143, R243	5183110000	15 k ohm
R144, R244	5183108000	12 k ohm
R145, R245	5183120000	39 k ohm
R146, R246	5183150000	680 k ohm
R147, R247	5183084000	1.2 k ohm
R148, R248	5183050000	47 ohm
R149, R249	5183114000	22 k ohm
R150, R250	5183132000	120 k ohm
R152, R252	5183098000	4.7 k ohm
R153, R253	5183132000	120 k ohm
R154, R254	5183122000	47 k ohm
R155, R255	5183114000	22 k ohm
R156, R256	5183142000	330 k ohm
R157, R257	5183064000	180 ohm
R158, R258	5183096000	3.9 k ohm
R159	5183062000	150 ohm
R160	5183062000	150 ohm
R161, R261	5183086000	1.5 k ohm
R162	5183096000	3.9 k ohm
R163	5183096000	3.9 k ohm
R164	5183086000	1.5 k ohm
R165	5183086000	1.5 k ohm
R166	5183086000	1.5 k ohm
R168	5183090000	2.2 k ohm
CAPACITORS		
C101, C201	5172322000	Ceramic 680 pfd 50V 10%
C102	5173054000	Elec. 220 mfd 16V
C103, C203	5173571800	Elec. 10 mfd 16V
C104, C204	5172312000	Ceramic 100 pfd 50V 10%
C105, C205	5173052000	Elec. 220 mfd 6.3V
C106, C206	5170435000	Mylar 0.027 mfd 100V 5%
C107, C207	5173004000	Elec. 4.7 mfd 25V
C108, C208	5173571800	Elec. 10 mfd 16V
C109, C209	5172316000	Ceramic 220 pfd 50V 10%
C110, C210	5173044000	Elec. 100 mfd 10V
C111, C211	5173004000	Elec. 4.7 mfd 25V
C112	5173046000	Elec. 100 mfd 25V
C113	5173036000	Elec. 47 mfd 16V
C114	5173053000	Elec. 220 mfd 10V
C115, C215	5173556800	Elec. 1 mfd 50V
C116, C216	5172324000	Ceramic 0.001 mfd 50V 10%
C117, C217	5173010000	Elec. 10 mfd 16V
C118	5173037000	Elec. 47 mfd 25V
C119, C219	5173010000	Elec. 10 mfd 16V
C120, C220	5170419000	Mylar 0.0056 mfd 100V 5%
C121, C221	5170435000	Mylar 0.027 mfd 100V 5%
C122, C222	5170417000	Mylar 0.0047 mfd 100V 5%
C123, C223	5173010000	Elec. 10 mfd 16V
C124, C224	5173010000	Elec. 10 mfd 16V

MECHANISM PCB ASSY

REF. NO.	PARTS NO.	DESCRIPTION
C125, C225	5170441000	Mylar 0.047 mfd 100V 50%
C126, C226	5173550800	Elec. 0.1 mfd 50V
C127, C227	5172992000	Elec. 1 mfd 50V
C128, C228	5173037000	Elec. 47 mfd 20V
C129, C229	5173554800	Elec. 0.47 mfd 50V
C130, C230	5173010000	Elec. 10 mfd 16V
C131, C231	5173556800	Elec. 1 mfd 50V
C132, C232	5265041000	Polyst. 100 pfd 125V 5%
C133, C233	5170433000	Mylar 0.022 mfd 100V 5%
C134, C234	5170431000	Mylar 0.018 mfd 100V 5%
C135, C235	5170429000	Mylar 0.015 mfd 100V 5%
C136	5054672000	Dip. Tant. 2.2 mfd 35V 20%
C137, C237	5172992000	Elec. 1 mfd 50V
C138, C238	5172992000	Elec. 1 mfd 50V
C139, C239	5173018000	Elec. 22 mfd 16V
C140	5173083000	Elec. 1000 mfd 35V
C141	5173055000	Elec. 220 mfd 25V
C142	5173055000	Elec. 220 mfd 25V
C143, C243	5173553800	Elec. 0.33 mfd 50V

VARIABLE RESISTORS

R11, R21	5280003502	10 k ohm B Semi-fixed
R12, R22	5280004002	50 k ohm B Semi-fixed
R13, R23	5280004002	50 k ohm B Semi-fixed
R14, R24	5280004202	100 k ohm B Semi-fixed
R15	5282405502	20 k ohm A x 2
R17	5280004202	100 k ohm B Semi-fixed
R18	5280004202	100 k ohm B Semi-fixed

COILS

L101, L201	5286000100	Choke, 4.2 mH
L102	5160151000	Choke, 1.2 mH
U106, U206	5286000200	Trap

MISCELLANEOUS

S101	5131043000	Switch, Slide; 9PDT
S102	5300017600	Switch, Push; DPDT
S103	5132037000	Switch, Lever; DPDT
S104	5132034000	Switch, Lever; 4P3T
S105	5132034000	Switch, Lever; 4P3T
S106	5300510000	Switch, Lever; Actuator
	5300907500	Switch, Lever; Switching Section
	5302100000	Switch, Lever; Wire
S107, S108	5300017700	Switch, Push; DPDT (2-gang)
	5126038000	Terminal Assy, IN/OUTPUT
	5126037000	Terminal Assy, IN/OUTPUT (EUROPE)
	5124063000	Jack, 3-gang
P101	5122130000	Connector Plug, 6P
P102	5122126000	Connector Plug, 2P
U103, U203	5292802500	Filter, Low-pass
U105	5292200100	OSC Unit, 100 kHz
	5844750000	Pin, TP
	5553132000	Heat Sink
	5555590000	Plate, GND; A

MECHANISM PCB ASSY

REF. NO.	PARTS NO.	DESCRIPTION
	5200003401	PCB Assy, MECHANISM
	5210003400	PCB, MECHANISM
THYRISTOR		
D306	5143090000	SCR2P1M
DIOOE		
D302	5143315000	W03C
RESISTORS		
All resistors are rated $\pm 5\%$ tolerance, $\frac{1}{4}$ watt and of carbon type unless otherwise noted.		
R301	△ 5184803000	330 ohm 2W Metal Film
R303	5183154000	1 M ohm
R304	5183082000	1 k ohm
R306	5183058000	100 ohm
R307	5183154000	1 M ohm

CAPACITORS

C301	5173082000	Elec.	1000 mfd	25V
C302	5173082000	Elec.	1000 mfd	25V
C303	5172996000	Elec.	2.2 mfd	50V
C304	5170425000	Mylar	0.01 mfd	100V

CX-350/CX-351

TEAC®

TEAC CORPORATION

3-7-3 NAKA-CHO MUSASHINO TOKYO PHONE (0422) 63-1111

TEAC CORPORATION OF AMERICA


7733 TELEGRAPH ROAD MONTEBELLO CALIFORNIA 90640 PHONE (213) 726-0303

TEAC AUSTRALIA PTY., LTD.

166-167 GLADSTONE STREET SOUTH MELBOURNE VICTORIA 3206 PHONE 699-6000

PRINTED IN JAPAN 0582H0.1D-3373B


TEAC SCHEMATIC DIAGRAM

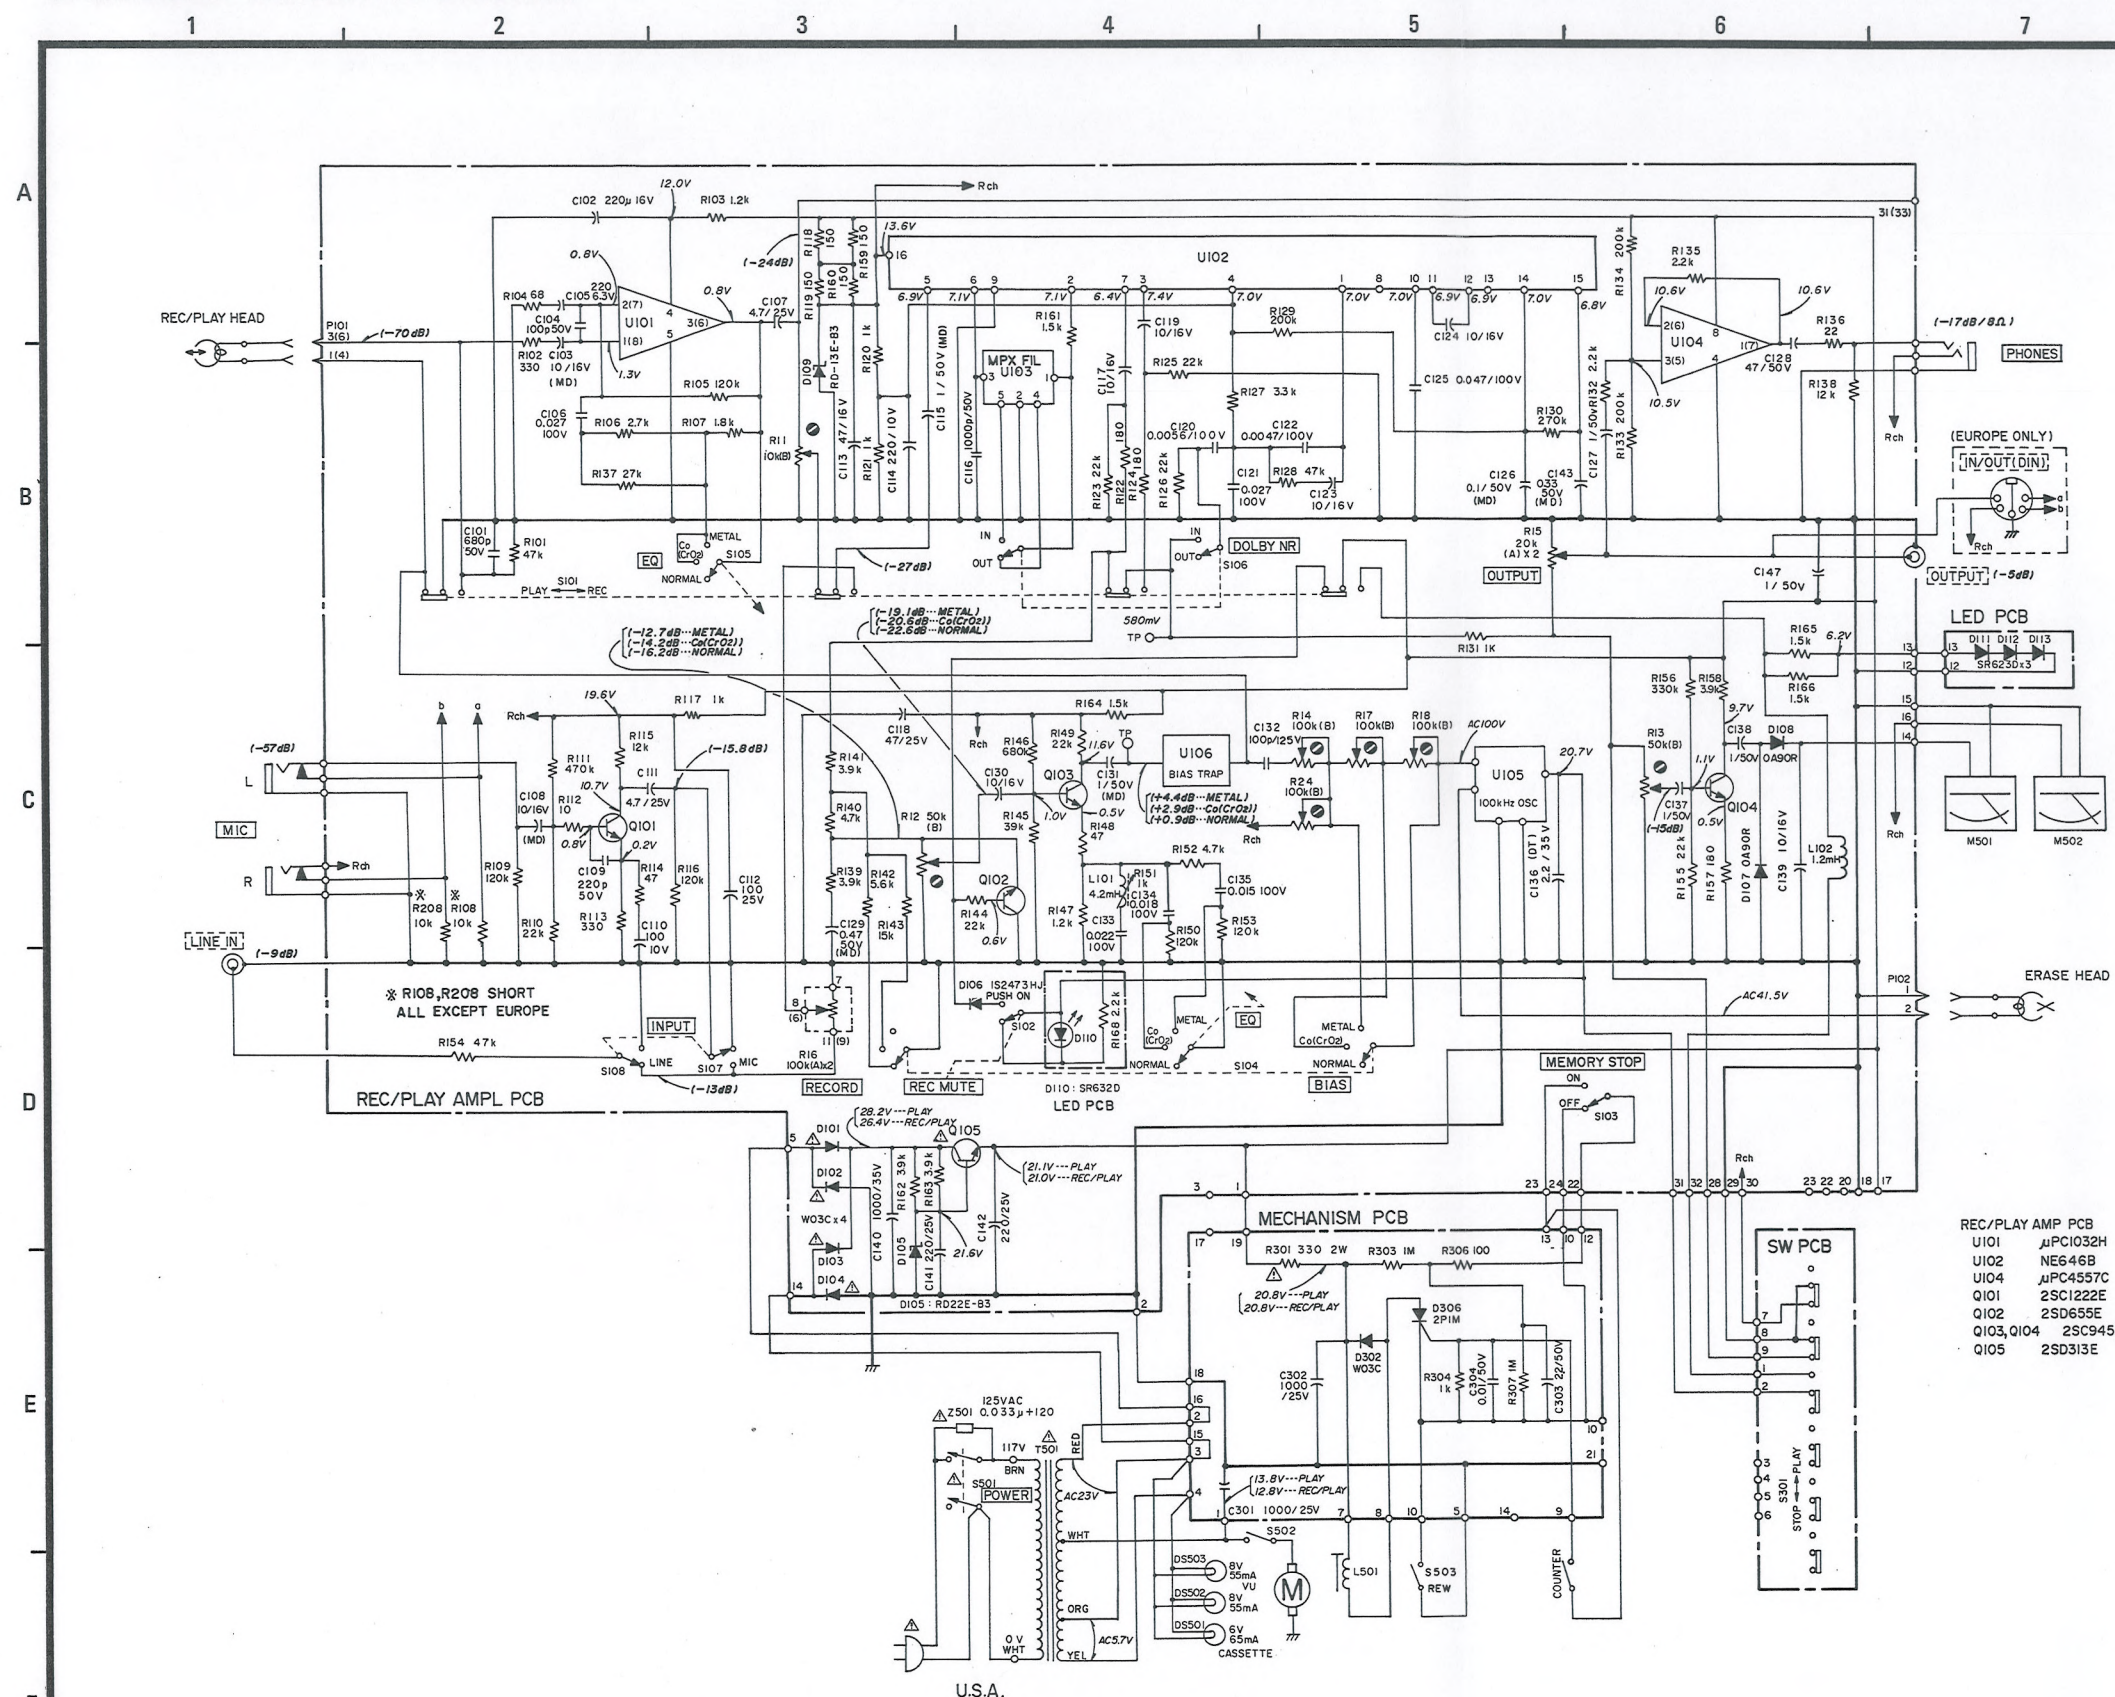

REC/PLAY AMP PCB
 U101 μ PC1032H
 U102 NE6458
 U104 μ PC4557C
 Q101 2SC1222E
 Q102 2SD655E
 Q103, Q104 2SC945AK
 Q105 2SD313E

NOTES

1. ALL RESISTORS ARE 1/4 WATT, 5%, UNLESS MARKED OTHERWISE. RESISTOR VALUES ARE IN OHMS (k = 1,000 OHMS, M = 1,000,000 OHMS).
2. ALL CAPACITOR VALUES ARE IN MICROFARADS (p = PICO FARADS).
3. SCHEMATIC DIAGRAM SHOWN FOR LEFT CHANNEL EXCEPT FOR SOME OF THE COMPONENTS.
4. DC VOLTAGES WERE MEASURED DURING RECORD PAUSE MODE UNLESS OTHERWISE NOTED.
5. Δ PARTS MARKED WITH THIS SIGN ARE SAFETY CRITICAL COMPONENTS. THEY MUST ALWAYS BE REPLACED WITH IDENTICAL COMPONENTS - REFER TO THE TEAC PARTS LIST AND ENSURE EXACT REPLACEMENT.

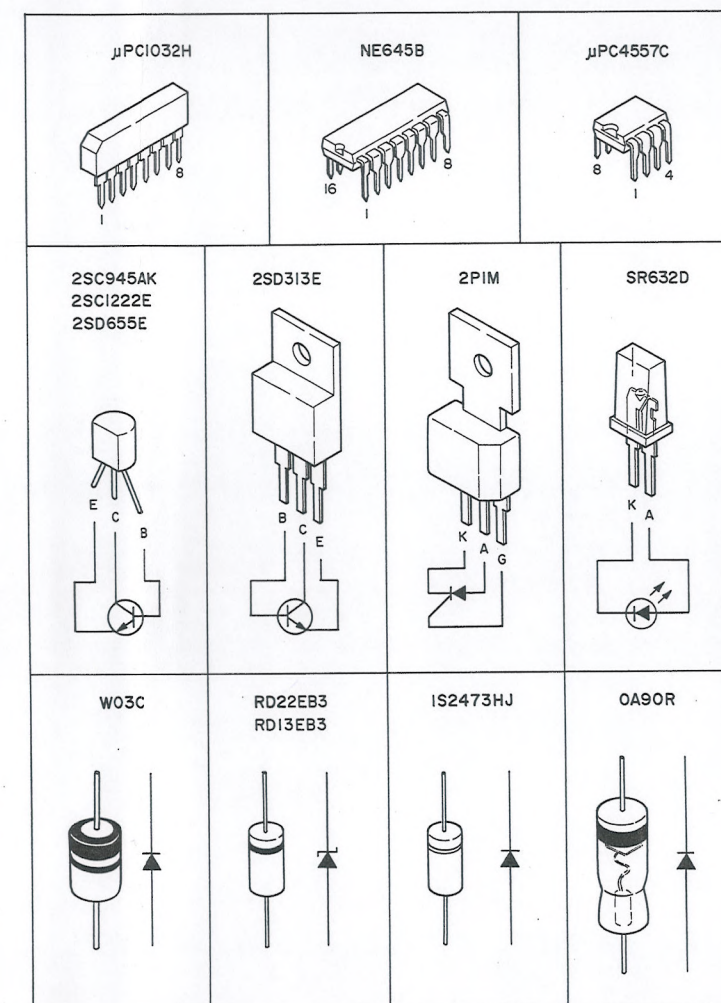

CX-350/CX-351

Stereo Cassette Deck