

# PHILIPS

## 39" LCD TV chassis PL13.11

# Service Manual

### Contents

#### TYPE A

|              |         |                        |
|--------------|---------|------------------------|
| 39PFL2608/F7 | PHILIPS | (Serial No.: DS1, DS2) |
| 39PFL2908/F7 | PHILIPS | (Serial No.: DS1)      |
| 39PFL4408/F8 | PHILIPS | (Serial No.: XA1)      |

#### TYPE B

|              |         |                   |
|--------------|---------|-------------------|
| 39PFL2708/F7 | PHILIPS | (Serial No.: DS2) |
|--------------|---------|-------------------|

#### TYPE C

|              |         |                   |
|--------------|---------|-------------------|
| 39PFL2708/F7 | PHILIPS | (Serial No.: DS1) |
| 39PFL4208/F8 | PHILIPS | (Serial No.: XA1) |

This service manual contains information of different types of models.  
Make sure to refer to the section describing your model.

© 2013 Funai Electric Co., Ltd.

All rights reserved. No part of this manual may be reproduced, copied, transmitted, disseminated, transcribed, downloaded or stored in any storage medium, in any form or for any purpose without the express prior written consent of Funai. Furthermore, any unauthorized commercial distribution of this manual or any revision hereto is strictly prohibited.

Information in this document is subject to change without notice. Funai reserves the right to change the content herein without the obligation to notify any person or organization of such changes.

**FUNAI** with the  design is a registered trademark of Funai Electric Co., Ltd and may not be used in any way without the express written consent of Funai. All other trademarks used herein remain the exclusive property of their respective owners. Nothing contained in this manual should be construed as granting, by implication or otherwise, any license or right to use any of the trademarks displayed herein. Misuse of any trademarks or any other content in this manual is strictly prohibited. Funai shall aggressively enforce its intellectual property rights to the fullest extent of the law.

## **IMPORTANT SAFETY NOTICE**

**Proper service and repair is important to the safe, reliable operation of all P&F Equipment. The service procedures recommended by P&F and described in this service manual are effective methods of performing service operations. Some of these service special tools should be used when and as recommended.**

**It is important to note that this service manual contains various CAUTIONS and NOTICES which should be carefully read in order to minimize the risk of personal injury to service personnel. The possibility exists that improper service methods may damage the equipment. It also is important to understand that these CAUTIONS and NOTICES ARE NOT EXHAUSTIVE. P&F could not possibly know, evaluate and advise the service trade of all conceivable ways in which service might be done or of the possible hazardous consequences of each way. Consequently, P&F has not undertaken any such broad evaluation. Accordingly, a servicer who uses a service procedure or tool which is not recommended by P&F must first use all precautions thoroughly so that neither his safety nor the safe operation of the equipment will be jeopardized by the service method selected.**

|                                                                                                                                                                                                                     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>The LCD panel is manufactured to provide many years of useful life. Occasionally a few non active pixels may appear as a tiny spec of color. This is not to be considered a defect in the LCD screen.</b></p> |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

# TABLE OF CONTENTS

|                                             |      |
|---------------------------------------------|------|
| Specifications                              | 1-1  |
| Important Safety Precautions                | 2-1  |
| Standard Notes for Servicing                | 3-1  |
| Cabinet Disassembly Instructions            | 4-1  |
| Electrical Adjustment Instructions [TYPE A] | 5-1  |
| [TYPE B, C]                                 | 5-4  |
| How to Initialize the LCD TV                | 6-1  |
| Firmware Renewal Mode [TYPE A]              | 7-1  |
| [TYPE B, C]                                 | 7-2  |
| Troubleshooting                             | 8-1  |
| Block Diagrams [TYPE A]                     | 9-1  |
| [TYPE B]                                    | 9-6  |
| [TYPE C]                                    | 9-11 |
| Schematic Diagrams / CBA and Test Points    | 10-1 |
| Wiring Diagrams[TYPE A]                     | 11-1 |
| [TYPE B]                                    | 11-2 |
| [TYPE C]                                    | 11-3 |
| Exploded Views [TYPE A]                     | 12-1 |
| [TYPE B, C]                                 | 12-2 |
| Parts List                                  | 13-1 |
| Revision History                            | 14-1 |

# SPECIFICATIONS

## < TUNER / NTSC >

| Description            | Condition | Unit | Nominal | Limit |
|------------------------|-----------|------|---------|-------|
| 1. AFT Pull-In Range   | TV.ch.4   | MHz  | ±2.3    | ±2.1  |
| 2. Synchronizing Sens. | TV.ch.4   | dBμV | 18      | 20    |
|                        | CA.ch.31  | dBμV | 18      | 20    |
|                        | CA.ch.87  | dBμV | 18      | 23    |

## < TUNER / ATSC >

| Description                       | Condition | Unit | Nominal | Limit  |
|-----------------------------------|-----------|------|---------|--------|
| 1. Received Freq. Range (-28dBm)  | ---       | kHz  | ---     | ±100   |
| 2. ATSC Dynamic Range (min / max) | ch.4      | dBm  | ---     | -76/0  |
|                                   | ch.10     | dBm  | ---     | -76/0  |
|                                   | ch.41     | dBm  | ---     | -76/+4 |

## < LCD PANEL >

| Description                | Condition  | Unit              | Nominal   | Limit |
|----------------------------|------------|-------------------|-----------|-------|
| 1. Native Pixel Resolution | Horizontal | pixels            | 1920      | ---   |
|                            | Vertical   | pixels            | 1080      | ---   |
| 2. Brightness (w / filter) | ---        | cd/m <sup>2</sup> | 300       | ---   |
| 3. Viewing Angle           | Horizontal | °                 | -88 to 88 | ---   |
|                            | Vertical   | °                 | -88 to 88 | ---   |

## < VIDEO >

| Description                     | Condition                                                                                                                                                                                                                                                                                                                                   | Unit | Nominal | Limit |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------|-------|
| 1. Over Scan                    | Horizontal                                                                                                                                                                                                                                                                                                                                  | %    | 5       | 5±5   |
|                                 | Vertical                                                                                                                                                                                                                                                                                                                                    | %    | 5       | 5±5   |
| 2. Color Temperature            | ---                                                                                                                                                                                                                                                                                                                                         | °K   | 12000   | ---   |
|                                 | x                                                                                                                                                                                                                                                                                                                                           |      | 0.272   | ±5%   |
|                                 | y                                                                                                                                                                                                                                                                                                                                           |      | 0.278   | ±5%   |
|                                 | <Measurement Condition><br>Input signal: HDMI1 Raster (40/80IRE) 1080i@60<br>Measurement point: Screen Center<br>Measuring instrument: Made of KONICA MINOLTA Luminance meter CA-310<br>Aging Time: 60min. (Retail MODE/100IRE Raster HDMI 1080i@60)<br>MODE setting of TV: Shipment setting/Retail MODE<br>Ambient temperature: 25°C ± 5°C |      |         |       |
| 3. Resolution (composite video) | Horizontal                                                                                                                                                                                                                                                                                                                                  | line | 400     | ---   |
|                                 | Vertical                                                                                                                                                                                                                                                                                                                                    | line | 350     | ---   |

## < AUDIO >

All items are measured across 8 Ω load at speaker output terminal with L.P.F.

| Description                                 | Condition      | Unit | Nominal | Limit   |
|---------------------------------------------|----------------|------|---------|---------|
| 1. Audio Output 10% Distortion (ATSC 0dBfs) | Lch/Rch        | W    | 8.0/8.0 | 7.0/7.0 |
| 2. Audio Distortion (NTSC)                  | 500mW: Lch/Rch | %    | 0.5/0.5 | 2.0/2.0 |

# IMPORTANT SAFETY PRECAUTIONS

Prior to shipment from the factory, our products are strictly inspected for recognized product safety and electrical codes of the countries in which they are to be sold. However, in order to maintain such compliance, it is equally important to implement the following precautions when a set is being serviced.


## Safety Precautions for LCD TV Circuit

1. **Before returning an instrument to the customer**, always make a safety check of the entire instrument, including, but not limited to, the following items:

- a. Be sure that no built-in protective devices are defective and have been defeated during servicing. (1) Protective shields are provided on this chassis to protect both the technician and the customer. Correctly replace all missing protective shields, including any removed for servicing convenience. (2) When reinstalling the chassis and/or other assembly in the cabinet, be sure to put back in place all protective devices, including but not limited to, nonmetallic control knobs, insulating fishpapers, adjustment and compartment covers/shields, and isolation resistor/capacitor networks. **Do not operate this instrument or permit it to be operated without all protective devices correctly installed and functioning. Servicers who defeat safety features or fail to perform safety checks may be liable for any resulting damage.**
- b. Be sure that there are no cabinet openings through which an adult or child might be able to insert their fingers and contact a hazardous voltage. Such openings include, but are not limited to, (1) spacing between the Liquid Crystal Panel and the cabinet mask, (2) excessively wide cabinet ventilation slots, and (3) an improperly fitted and/or incorrectly secured cabinet back cover.

- c. **Antenna Cold Check** - With the instrument AC plug removed from any AC source, connect an electrical jumper across the two AC plug prongs. Place the instrument AC switch in the on position. Connect one lead of an ohmmeter to the AC plug prongs tied together and touch the other ohmmeter lead in turn to each tuner antenna input exposed terminal screw and, if applicable, to the coaxial connector. If the measured resistance is less than 1.0 megohm or greater than 5.2 megohm, an abnormality exists that must be corrected before the instrument is returned to the customer. Repeat this test with the instrument AC switch in the off position.

- d. **Leakage Current Hot Check** - With the instrument completely reassembled, plug the AC line cord directly into a 120 V AC outlet. (Do not use an isolation transformer during this test.) Use a leakage current tester or a metering system that complies with American National Standards Institute (ANSI) C101.1 Leakage Current for Appliances and Underwriters Laboratories (UL) 1410, (50.7). With the instrument AC switch first in the on position and then in the off position, measure from a known earth ground (metal water pipe, conduit, etc.) to all exposed metal parts of the instrument (antennas, handle brackets, metal cabinet, screw heads, metallic overlays, control shafts, etc.), especially any exposed metal parts that offer an electrical return path to the chassis. Any current measured must not exceed 0.5 milli-ampere. Reverse the instrument power cord plug in the outlet and repeat the test.

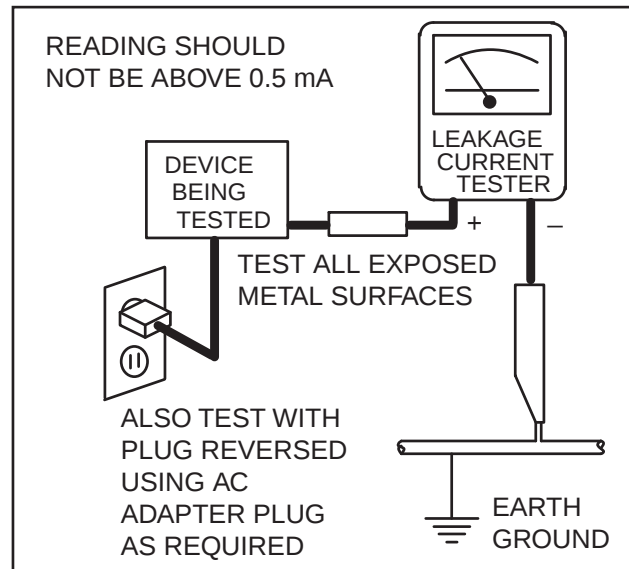

**ANY MEASUREMENTS NOT WITHIN THE LIMITS SPECIFIED HEREIN INDICATE A POTENTIAL SHOCK HAZARD THAT MUST BE ELIMINATED BEFORE RETURNING THE INSTRUMENT TO THE CUSTOMER OR BEFORE CONNECTING THE ANTENNA OR ACCESSORIES.**

2. Read and comply with all caution and safety-related notes on or inside the receiver cabinet, on the receiver chassis, or on the Liquid Crystal Panel.

3. **Design Alteration Warning** - Do not alter or add to the mechanical or electrical design of this TV receiver. Design alterations and additions, including, but not limited to circuit modifications and the addition of items such as auxiliary audio and/or video output connections, might alter the safety characteristics of this receiver and create a hazard to the user. Any design alterations or additions will void the manufacturer's warranty and may make you, the servicer, responsible for personal injury or property damage resulting therefrom.
4. **Hot Chassis Warning** -
  - a. Some TV receiver chassis are electrically connected directly to one conductor of the AC power cord and maybe safety-serviced without an isolation transformer only if the AC power plug is inserted so that the chassis is connected to the ground side of the AC power source. To confirm that the AC power plug is inserted correctly, with an AC voltmeter, measure between the chassis and a known earth ground. If a voltage reading in excess of 1.0 V is obtained, remove and reinsert the AC power plug in the opposite polarity and again measure the voltage potential between the chassis and a known earth ground.
  - b. Some TV receiver chassis normally have 85V AC(RMS) between chassis and earth ground regardless of the AC plug polarity. This chassis can be safety-serviced only with an isolation transformer inserted in the power line between the receiver and the AC power source, for both personnel and test equipment protection.
  - c. Some TV receiver chassis have a secondary ground system in addition to the main chassis ground. This secondary ground system is not isolated from the AC power line. The two ground systems are electrically separated by insulation material that must not be defeated or altered.
5. Observe original lead dress. Take extra care to assure correct lead dress in the following areas: a. near sharp edges, b. near thermally hot parts-be sure that leads and components do not touch thermally hot parts, c. the AC supply, d. high voltage, and, e. antenna wiring. Always inspect in all areas for pinched, out of place, or frayed wiring. Check AC power cord for damage.
6. Components, parts, and/or wiring that appear to have overheated or are otherwise damaged should be replaced with components, parts, or wiring that meet original specifications. Additionally, determine the cause of overheating and/or damage and, if necessary, take corrective action to remove any potential safety hazard.
7. **Product Safety Notice** - Some electrical and mechanical parts have special safety-related characteristics which are often not evident from visual inspection, nor can the protection they give necessarily be obtained by replacing them with components rated for higher voltage, wattage, etc. Parts that have special safety characteristics are identified by a  on schematics and in parts lists. Use of a substitute replacement that does not have the same safety characteristics as the recommended replacement part might create shock, fire, and/or other hazards. The product's safety is under review continuously and new instructions are issued whenever appropriate. Prior to shipment from the factory, our products are strictly inspected to confirm they comply with the recognized product safety and electrical codes of the countries in which they are to be sold. However, in order to maintain such compliance, it is equally important to implement the following precautions when a set is being serviced.

## Precautions during Servicing

- A.** Parts identified by the **▲** symbol are critical for safety.  
Replace only with part number specified.
- B.** In addition to safety, other parts and assemblies are specified for conformance with regulations applying to spurious radiation. These must also be replaced only with specified replacements.  
Examples: RF converters, RF cables, noise blocking capacitors, and noise blocking filters, etc.
- C.** Use specified internal wiring. Note especially:
  - 1) Wires covered with PVC tubing
  - 2) Double insulated wires
  - 3) High voltage leads
- D.** Use specified insulating materials for hazardous live parts. Note especially:
  - 1) Insulation Tape
  - 2) PVC tubing
  - 3) Spacers
  - 4) Insulators for transistors.
- E.** When replacing AC primary side components (transformers, power cord, etc.), wrap ends of wires securely about the terminals before soldering.
- F.** Observe that the wires do not contact heat producing parts (heat sinks, oxide metal film resistors, fusible resistors, etc.)
- G.** Check that replaced wires do not contact sharp edged or pointed parts.
- H.** When a power cord has been replaced, check that 11~13 lb (5~6 kg) of force in any direction will not loosen it.
- I.** Also check areas surrounding repaired locations.
- J.** Use care that foreign objects (screws, solder droplets, etc.) do not remain inside the set.
- K.** When connecting or disconnecting the internal connectors, first, disconnect the AC plug from the AC supply outlet.
- L.** When installing parts or assembling the cabinet parts, be sure to use the proper screws and tighten certainly.

## Safety Check after Servicing

Examine the area surrounding the repaired location for damage or deterioration. Observe that screws, parts and wires have been returned to original positions. Afterwards, perform the following tests and confirm the specified values in order to verify compliance with safety standards.


### 1. Clearance Distance

When replacing primary circuit components, confirm specified clearance distance ( $d$ ) and ( $d'$ ) between soldered terminals, and between terminals and surrounding metallic parts. (See Fig. 1)

**Table 1: Ratings for selected area**

| AC Line Voltage | Region           | Clearance Distance ( $d$ ), ( $d'$ ) |
|-----------------|------------------|--------------------------------------|
| 110 to 130 V    | U.S.A. or Canada | $\geq 3.2$ mm<br>(0.126 inches)      |

**Note:** This table is unofficial and for reference only. Be sure to confirm the precise values.

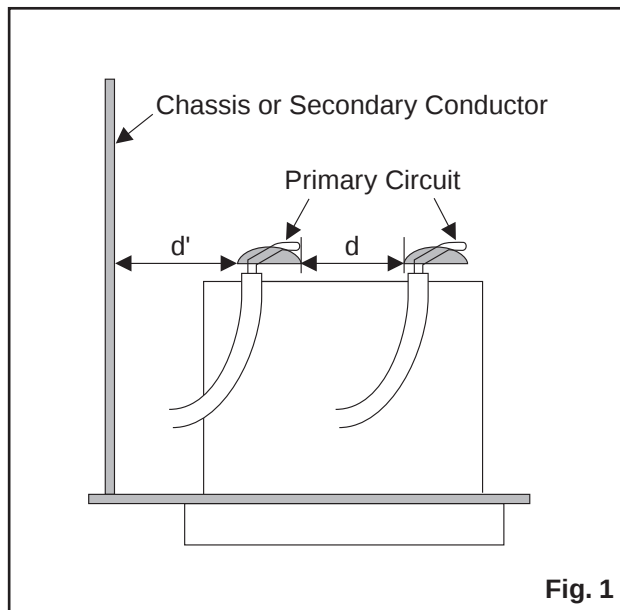


**Fig. 1**

### 2. Leakage Current Test

Confirm the specified (or lower) leakage current between B (earth ground, power cord plug prongs) and externally exposed accessible parts (RF terminals, antenna terminals, video and audio input and output terminals, microphone jacks, earphone jacks, etc.) is lower than or equal to the specified value in the table below.

#### Measuring Method: (Power ON)

Insert load  $Z$  between B (earth ground, power cord plug prongs) and exposed accessible parts. Use an AC voltmeter to measure across both terminals of load  $Z$ . See Fig. 2 and following table.

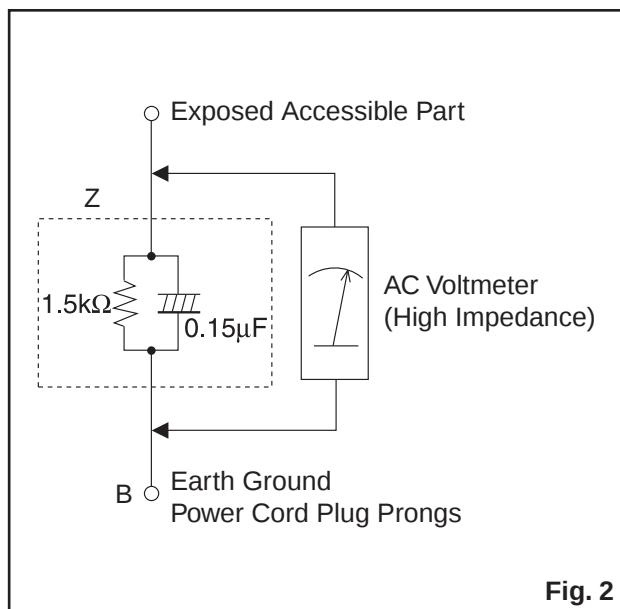

**Fig. 2**

**Table 2: Leakage current ratings for selected areas**


| AC Line Voltage | Region           | Load $Z$                                                        | Leakage Current ( $i$ ) | Earth Ground (B) to:     |
|-----------------|------------------|-----------------------------------------------------------------|-------------------------|--------------------------|
| 110 to 130 V    | U.S.A. or Canada | $0.15 \mu F$ CAP. & $1.5 k\Omega$ RES.<br>Connected in parallel | $i \leq 0.5$ mA rms     | Exposed accessible parts |

**Note:** This table is unofficial and for reference only. Be sure to confirm the precise values.


# STANDARD NOTES FOR SERVICING

## Circuit Board Indications


1. The output pin of the 3 pin Regulator ICs is indicated as shown.

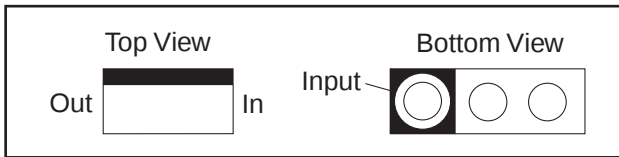

2. For other ICs, pin 1 and every fifth pin are indicated as shown.

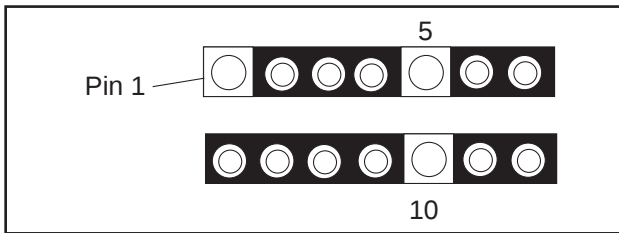


3. The 1st pin of every male connector is indicated as shown.



## Pb (Lead) Free Solder

Pb free mark will be found on PCBs which use Pb free solder. (Refer to figure.) For PCBs with Pb free mark, be sure to use Pb free solder. For PCBs without Pb free mark, use standard solder.



Pb free mark

## How to Remove / Install Flat Pack-IC

### 1. Removal

**With Hot-Air Flat Pack-IC Desoldering Machine:**

1. Prepare the hot-air flat pack-IC desoldering machine, then apply hot air to the Flat Pack-IC (about 5 to 6 seconds). (Fig. S-1-1)

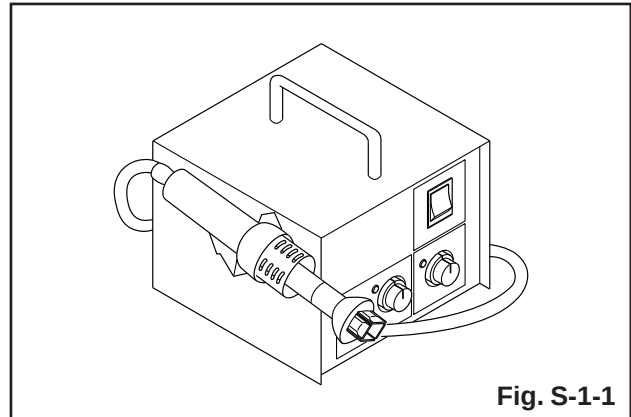



Fig. S-1-1

2. Remove the flat pack-IC with tweezers while applying the hot air.
3. Bottom of the flat pack-IC is fixed with glue to the CBA; when removing entire flat pack-IC, first apply soldering iron to center of the flat pack-IC and heat up. Then remove (glue will be melted). (Fig. S-1-6)
4. Release the flat pack-IC from the CBA using tweezers. (Fig. S-1-6)

### CAUTION:


1. The Flat Pack-IC shape may differ by models. Use an appropriate hot-air flat pack-IC desoldering machine, whose shape matches that of the Flat Pack-IC.
2. Do not supply hot air to the chip parts around the flat pack-IC for over 6 seconds because damage to the chip parts may occur. Put masking tape around the flat pack-IC to protect other parts from damage. (Fig. S-1-2)

3. The flat pack-IC on the CBA is affixed with glue, so be careful not to break or damage the foil of each pin or the solder lands under the IC when removing it.

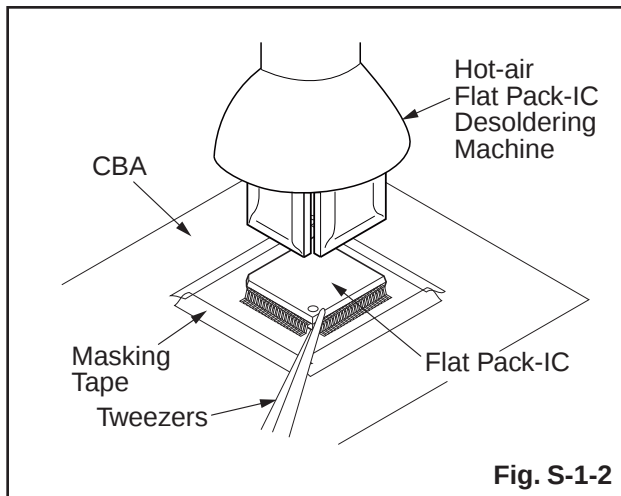


#### With Soldering Iron:

1. Using desoldering braid, remove the solder from all pins of the flat pack-IC. When you use solder flux which is applied to all pins of the flat pack-IC, you can remove it easily. (Fig. S-1-3)

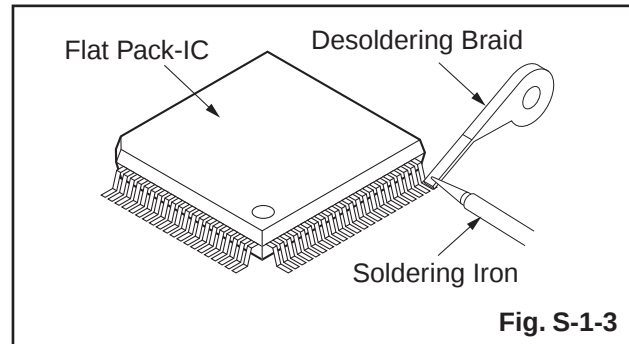

2. Lift each lead of the flat pack-IC upward one by one, using a sharp pin or wire to which solder will not adhere (iron wire). When heating the pins, use a fine tip soldering iron or a hot air desoldering machine. (Fig. S-1-4)


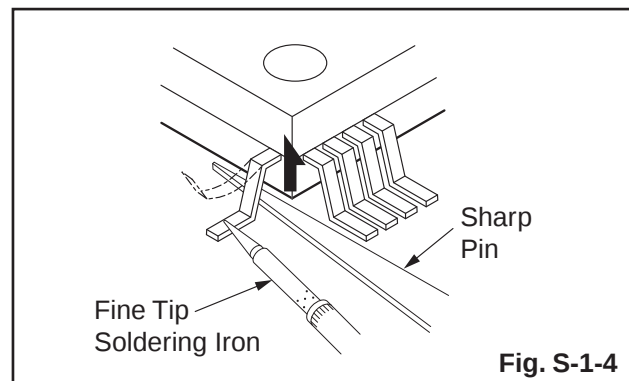


3. Bottom of the flat pack-IC is fixed with glue to the CBA; when removing entire flat pack-IC, first apply soldering iron to center of the flat pack-IC and heat up. Then remove (glue will be melted). (Fig. S-1-6)
4. Release the flat pack-IC from the CBA using tweezers. (Fig. S-1-6)

### With Iron Wire:



1. Using desoldering braid, remove the solder from all pins of the flat pack-IC. When you use solder flux which is applied to all pins of the flat pack-IC, you can remove it easily. (Fig. S-1-3)
2. Affix the wire to a workbench or solid mounting point, as shown in Fig. S-1-5.
3. While heating the pins using a fine tip soldering iron or hot air blower, pull up the wire as the solder melts so as to lift the IC leads from the CBA contact pads as shown in Fig. S-1-5.
4. Bottom of the flat pack-IC is fixed with glue to the CBA; when removing entire flat pack-IC, first apply soldering iron to center of the flat pack-IC and heat up. Then remove (glue will be melted). (Fig. S-1-6)
5. Release the flat pack-IC from the CBA using tweezers. (Fig. S-1-6)

**Note:** When using a soldering iron, care must be taken to ensure that the flat pack-IC is not being held by glue. When the flat pack-IC is removed from the CBA, handle it gently because it may be damaged if force is applied.

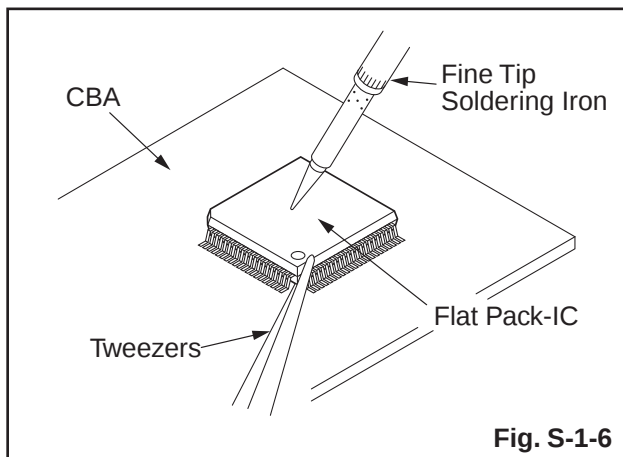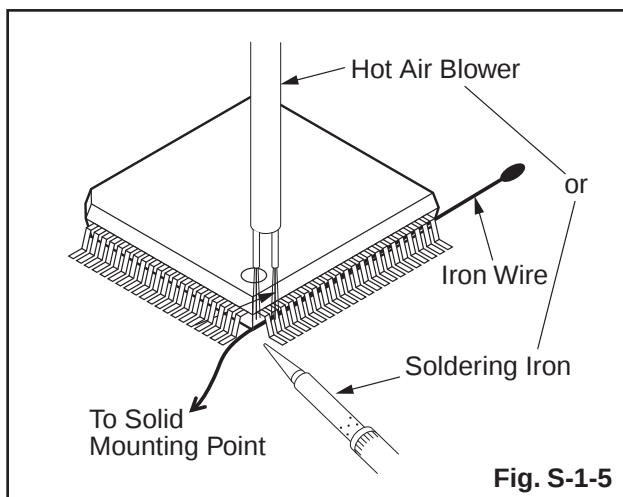

## 2. Installation

1. Using desoldering braid, remove the solder from the foil of each pin of the flat pack-IC on the CBA so you can install a replacement flat pack-IC more easily.
2. The "●" mark on the flat pack-IC indicates pin 1. (See Fig. S-1-7.) Be sure this mark matches the pin 1 on the PCB when positioning for installation. Then presolder the four corners of the flat pack-IC. (See Fig. S-1-8.)
3. Solder all pins of the flat pack-IC. Be sure that none of the pins have solder bridges.

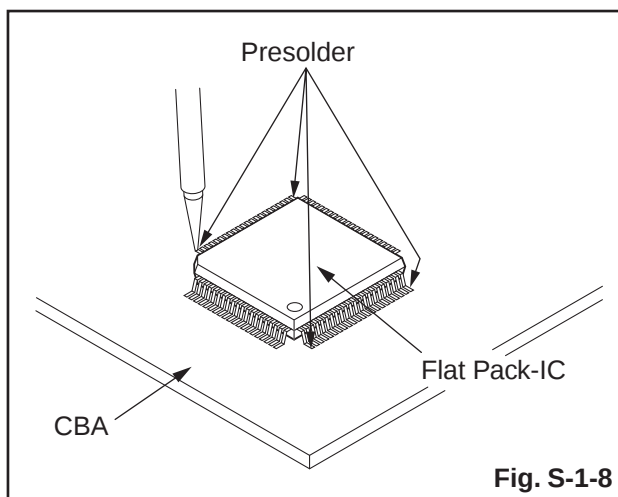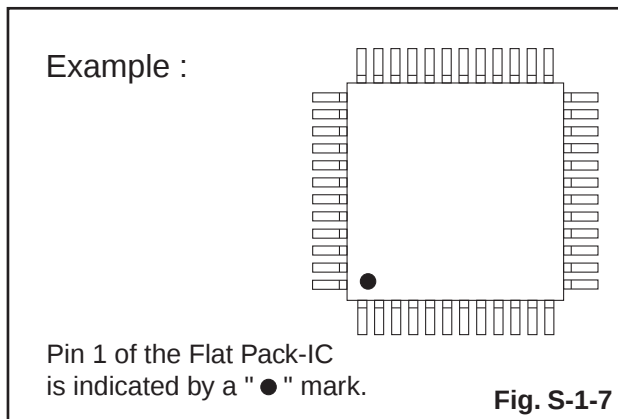

# Instructions for Handling Semi-conductors



Electrostatic breakdown of the semi-conductors may occur due to a potential difference caused by electrostatic charge during unpacking or repair work.

## 1. Ground for Human Body

Be sure to wear a grounding band ( $1\text{ M}\Omega$ ) that is properly grounded to remove any static electricity that may be charged on the body.

## 2. Ground for Workbench

Be sure to place a conductive sheet or copper plate with proper grounding ( $1\text{ M}\Omega$ ) on the workbench or other surface, where the semi-conductors are to be placed. Because the static electricity charge on clothing will not escape through the body grounding band, be careful to avoid contacting semi-conductors with your clothing.

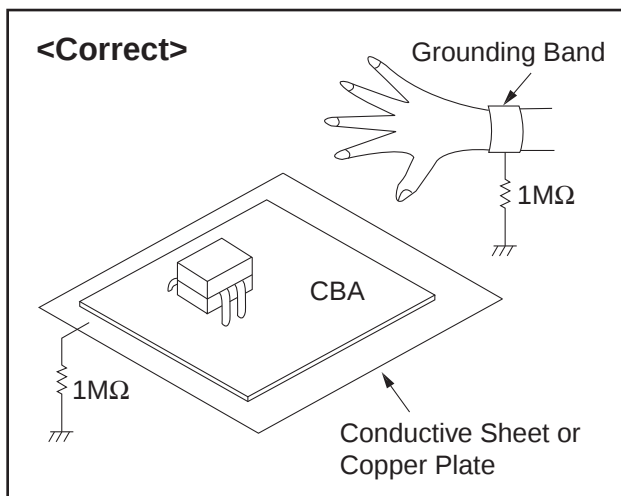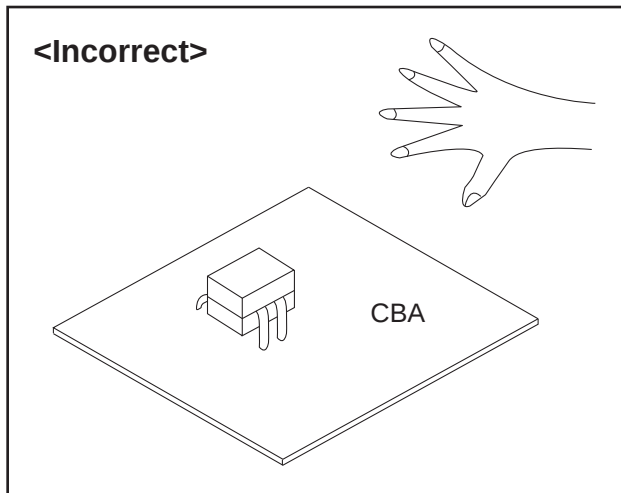

# CABINET DISASSEMBLY INSTRUCTIONS


## Screw Torque Specification

| Ref. No. | Part Number | Part Name                                       | Tightening Torque       |
|----------|-------------|-------------------------------------------------|-------------------------|
| L9       | GBHP3120    | SCREW P-TIGHT (3X12 BIND HEAD + BLK)            | 5.2±0.9lb·in            |
| L23      | GBJS3060    | SCREW S-TIGHT (M3X6 BIND HEAD+)                 | 6.1±0.9lb·in            |
| L27      | GBHS3080    | SCREW S-TIGHT (M3X8 BIND HEAD+)                 | 5.2±0.9lb·in            |
| L35      | GBJB3080    | SCREW B-TIGHT (D3X8 BIND HEAD+)                 | 6.1±0.9lb·in            |
| L67      | GBJS3100    | SCREW S-TIGHT (M3X10 BIND HEAD+)                |                         |
| SSK1     | 1ESA34647   | STAND SCREW KIT (DOUBLE SEMS SCREW M4X20 + BLK) | (approx. 8.7±0.9lb·in)* |
| SSK2     | 1ESA34648   | STAND SCREW KIT (DOUBLE SEMS SCREW M4X10 + BLK) |                         |

\* For reference

## 1. Disassembly Flowchart

This flowchart indicates the disassembly steps for the cabinet parts and the CBA in order to gain access to items to be serviced. When reassembling, follow the steps in reverse order. Bend, route and dress the cables as they were.

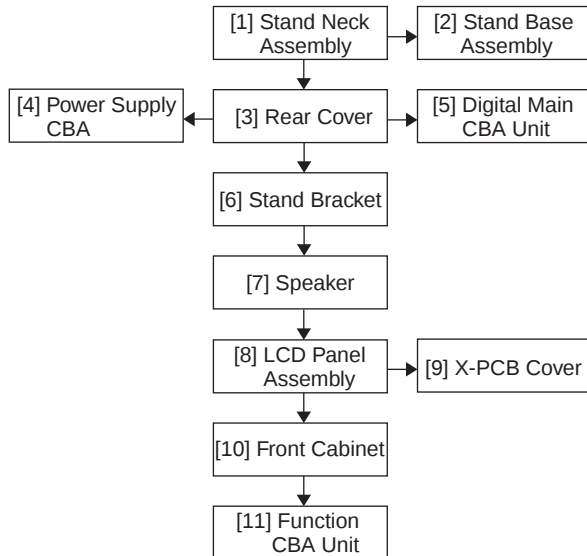

## 2. Disassembly Method

| Step/ Loc. No. | Part                | Fig. No. | Removal        | Note |
|----------------|---------------------|----------|----------------|------|
| [1]            | Stand Neck Assembly | D1       | 4(S-1), 3(S-2) | ---  |

| Step/ Loc. No. | Part                  | Fig. No. | Removal                                                             | Note |
|----------------|-----------------------|----------|---------------------------------------------------------------------|------|
| [2]            | Stand Base Assembly   | D1       | -----                                                               | ---  |
| [3]            | Rear Cover            | D1       | 2(S-3), 10(S-4)                                                     | ---  |
| [4]            | Power Supply CBA      | D2<br>D5 | 5(S-5), CN601, CN501, CN1001                                        | ---  |
| [5]            | Digital Main CBA Unit | D2<br>D5 | 4(S-6), CN3906*1, CN3013*2, CN3105*1, CN3101*2, CN3801, Jack Holder | ---  |
| [6]            | Stand Bracket         | D3       | 2(S-7)                                                              | ---  |
| [7]            | Speaker               | D3       | -----                                                               | ---  |
| [8]            | LCD Panel Assembly    | D3       | -----                                                               | ---  |
| [9]            | X-PCB Cover           | D4       | 3(S-8)                                                              | 1    |
| [10]           | Front Cabinet         | D4       | 4(S-9)                                                              | 2    |
| [11]           | Function CBA Unit     | D4       | Sensor Lens, Shield Plate, Control Plate                            | 2    |

↓                      ↓                      ↓                      ↓                      ↓  
 (1)                      (2)                      (3)                      (4)                      (5)

\*1: TYPE A

\*2: TYPE B, C

**Note:**

- (1) Order of steps in procedure. When reassembling, follow the steps in reverse order. These numbers are also used as the Identification (location) No. of parts in figures.
- (2) Parts to be removed or installed.
- (3) Fig. No. showing procedure of part location
- (4) Identification of parts to be removed, unhooked, unlocked, released, unplugged, unclamped, or desoldered.  
P = Spring, L = Locking Tab, S = Screw,  
H = Hex Screw, CN = Connector  
e.g. 2(S-2) = two Screws of (S-2),  
2(L-2) = two Locking Tabs of (L-2)
- (5) Refer to the following "Reference Notes in the Table."

## Important precautions concerning the LCD Panel Assembly:

### 1. When you disassemble/re-assemble the X-PCB Cover

- Be careful not to break the hooks. If you pull with too much force, the hooks may be damaged.
- When disassembling, first hold the top and bottom of the X-PCB Cover on both ends and then moving toward the center, lift up the top side to detach the hooks.
- When assembling, be careful not to damage the X-PCB Board or the COF(Chip On Film).
- Make sure the hooks are securely in place when re-assembling.
- The screw tightening torque must be 5.2lb-in (6kgf-cm).

### 2. When you disassemble/re-assemble the Front Cabinet or Function CBA Unit

- Be careful not to break the hooks. If you pull with too much force, the hooks may be damaged.

- When disassembling, first detach the hooks on each end on the bottom side, then detach the remaining hooks moving toward the center.
- Make sure the hooks are securely in place when assembling.
- Be careful not to scratch the display panel when assembling.
- The Function CBA Unit and Sensor Lens are fixed in place by the hooks. Make sure these hooks are not damaged. Make sure the Function CBA Unit and Sensor Lens are securely in place when re-assembling.
- The screw tightening torque must be 5.2lb-in (6kgf-cm).
- After replacing the Front Cabinet or Function CBA Unit, make sure the tact switches operate normally.
- Make sure to replace the Control Plate to a new one when replacing the Front Cabinet.




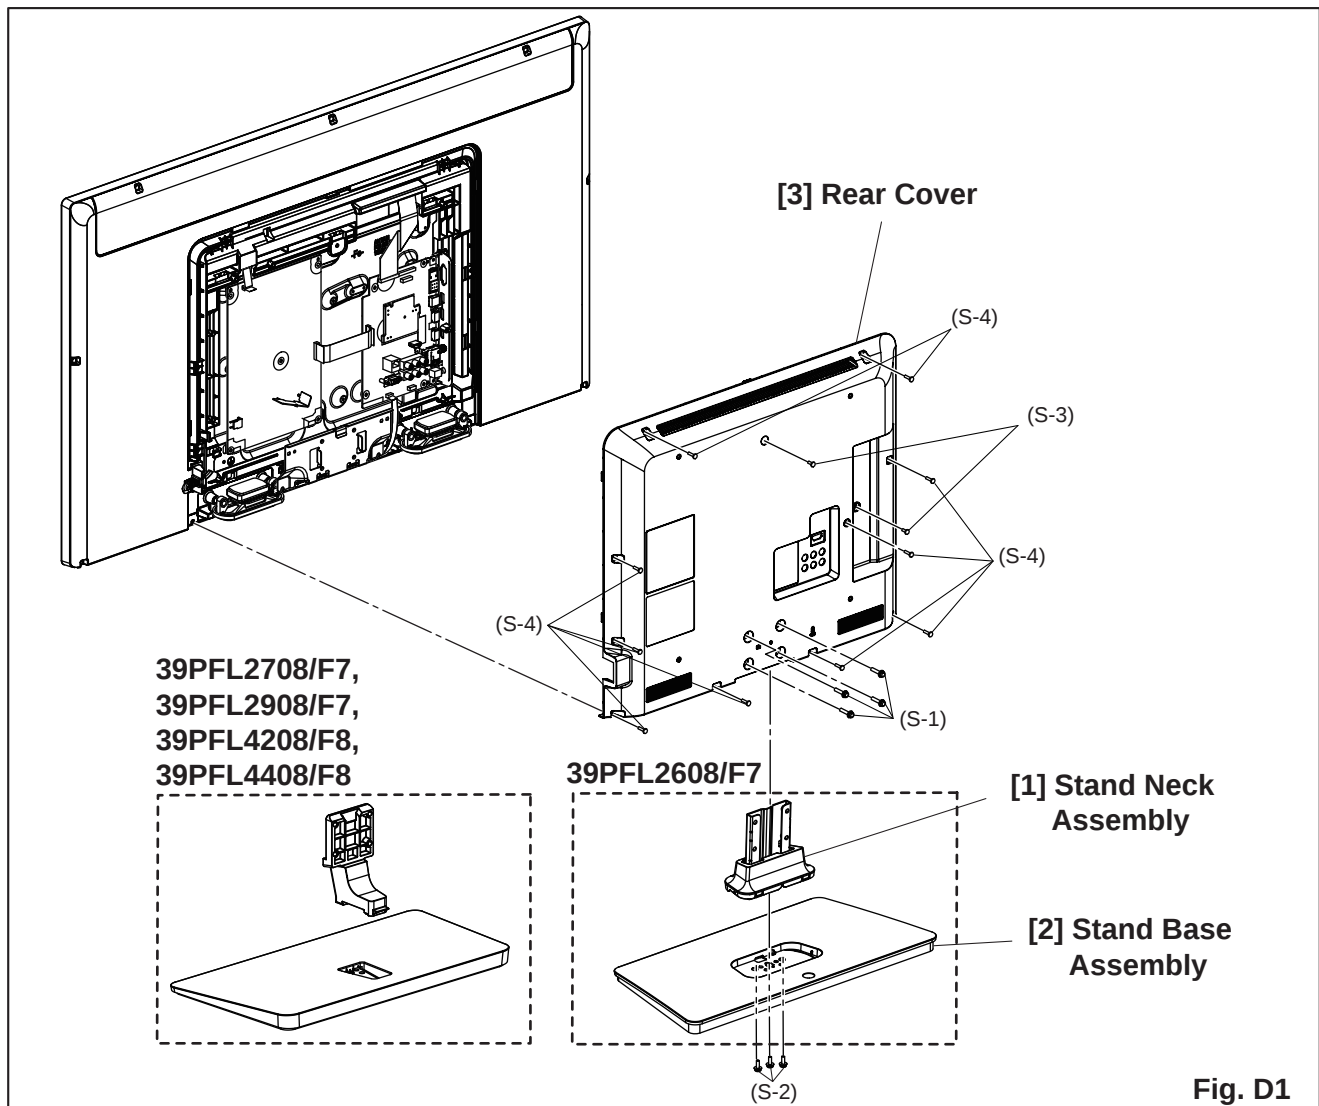


Fig. D1

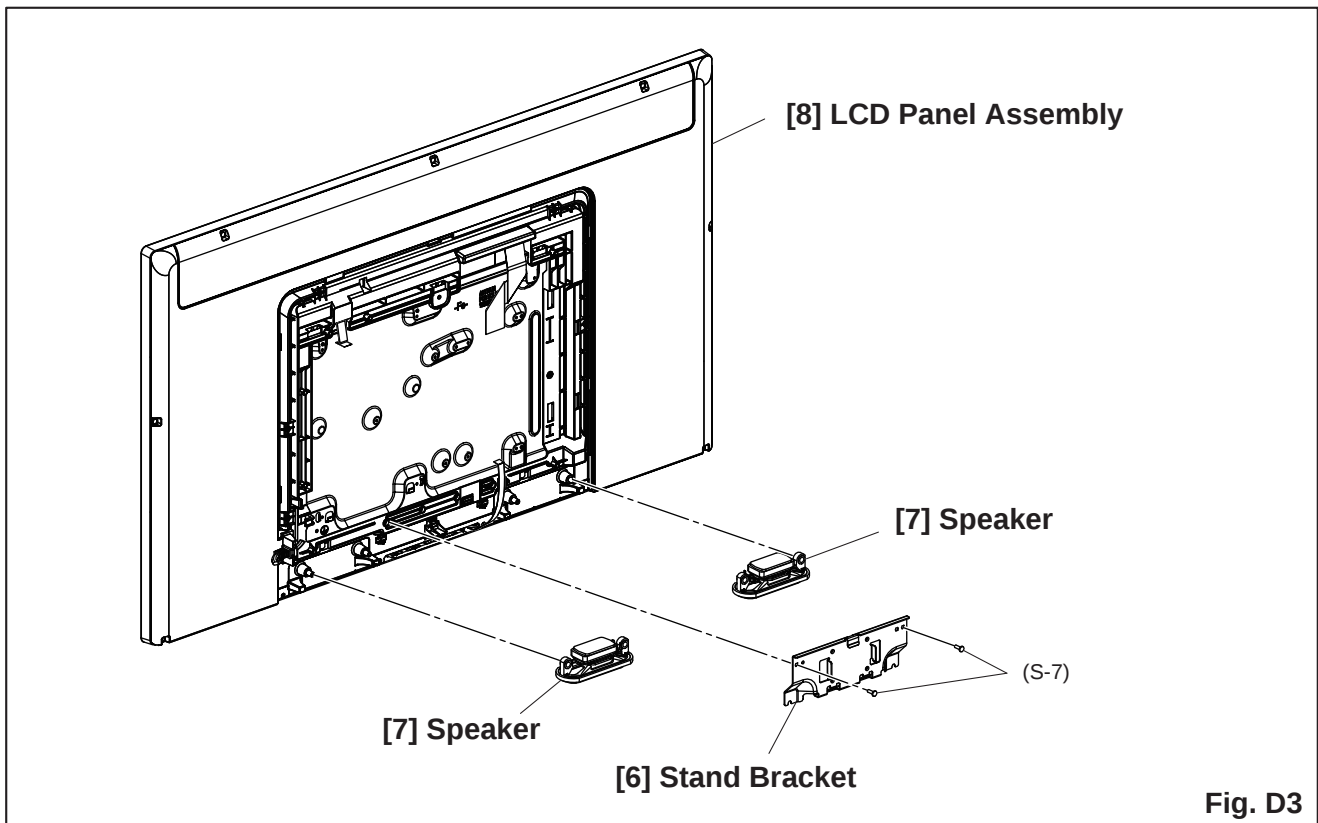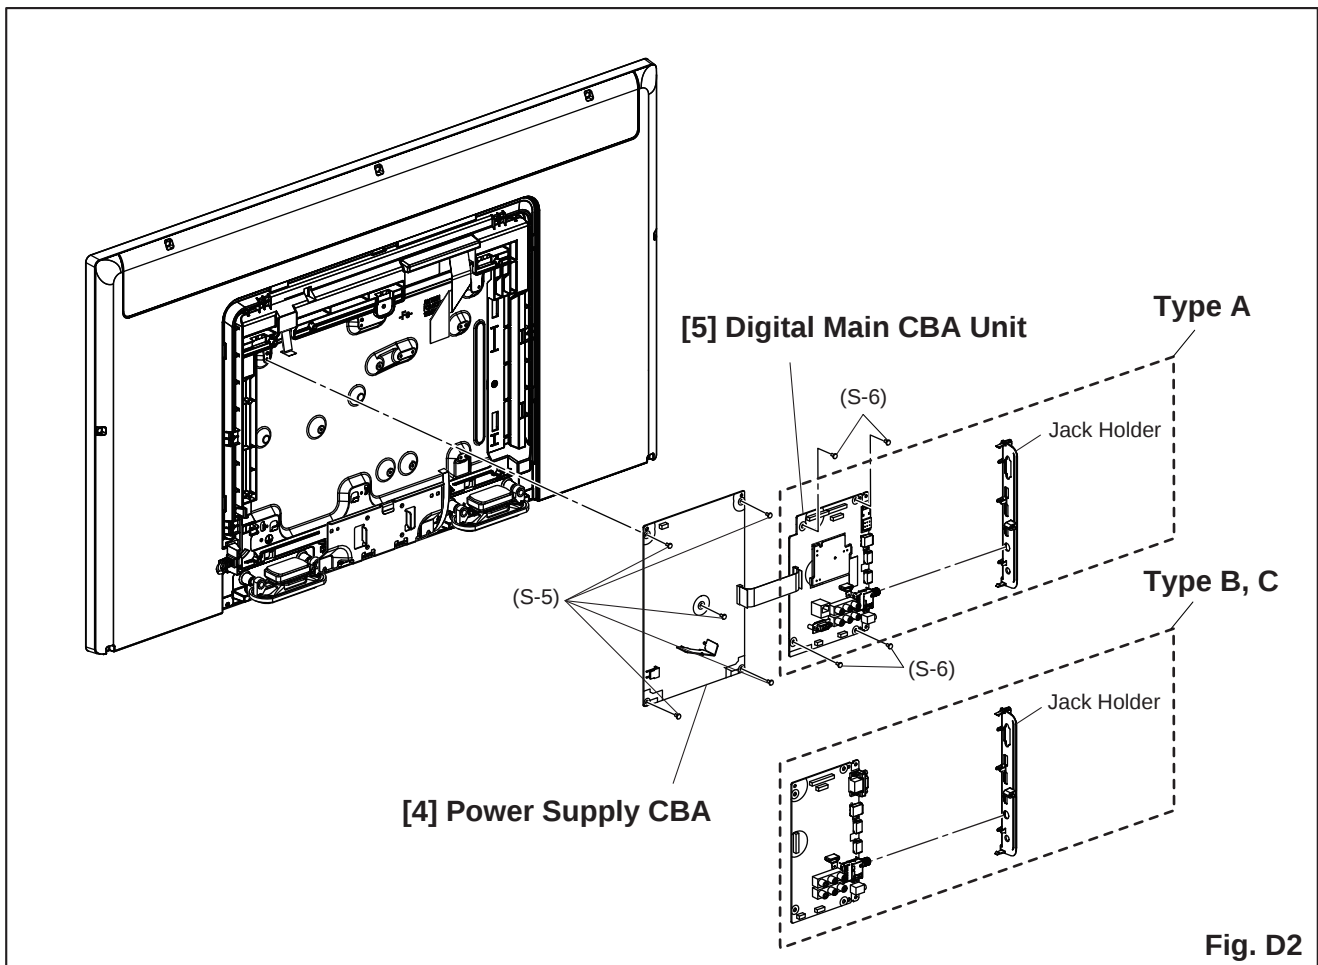

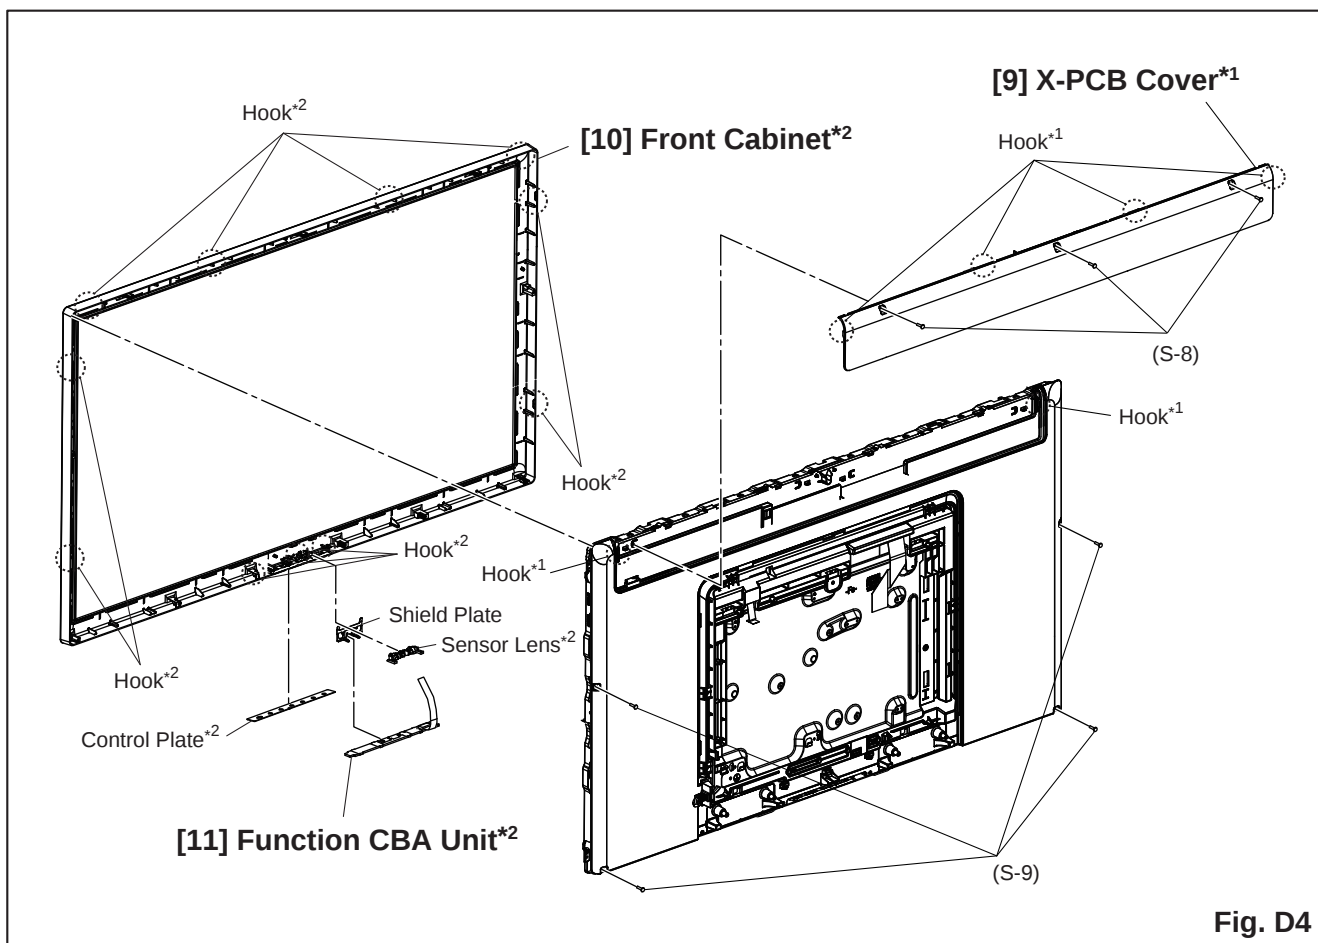


**Fig. D4**

**\*1:** Make sure to read all the precautions on page 4-2 when you disassemble/re-assemble the X-PCB Cover.


**\*2:** Make sure to read all the precautions on page 4-2 when you disassemble/re-assemble the Front Cabinet or Function CBA Unit.

# TV Cable Wiring Diagram

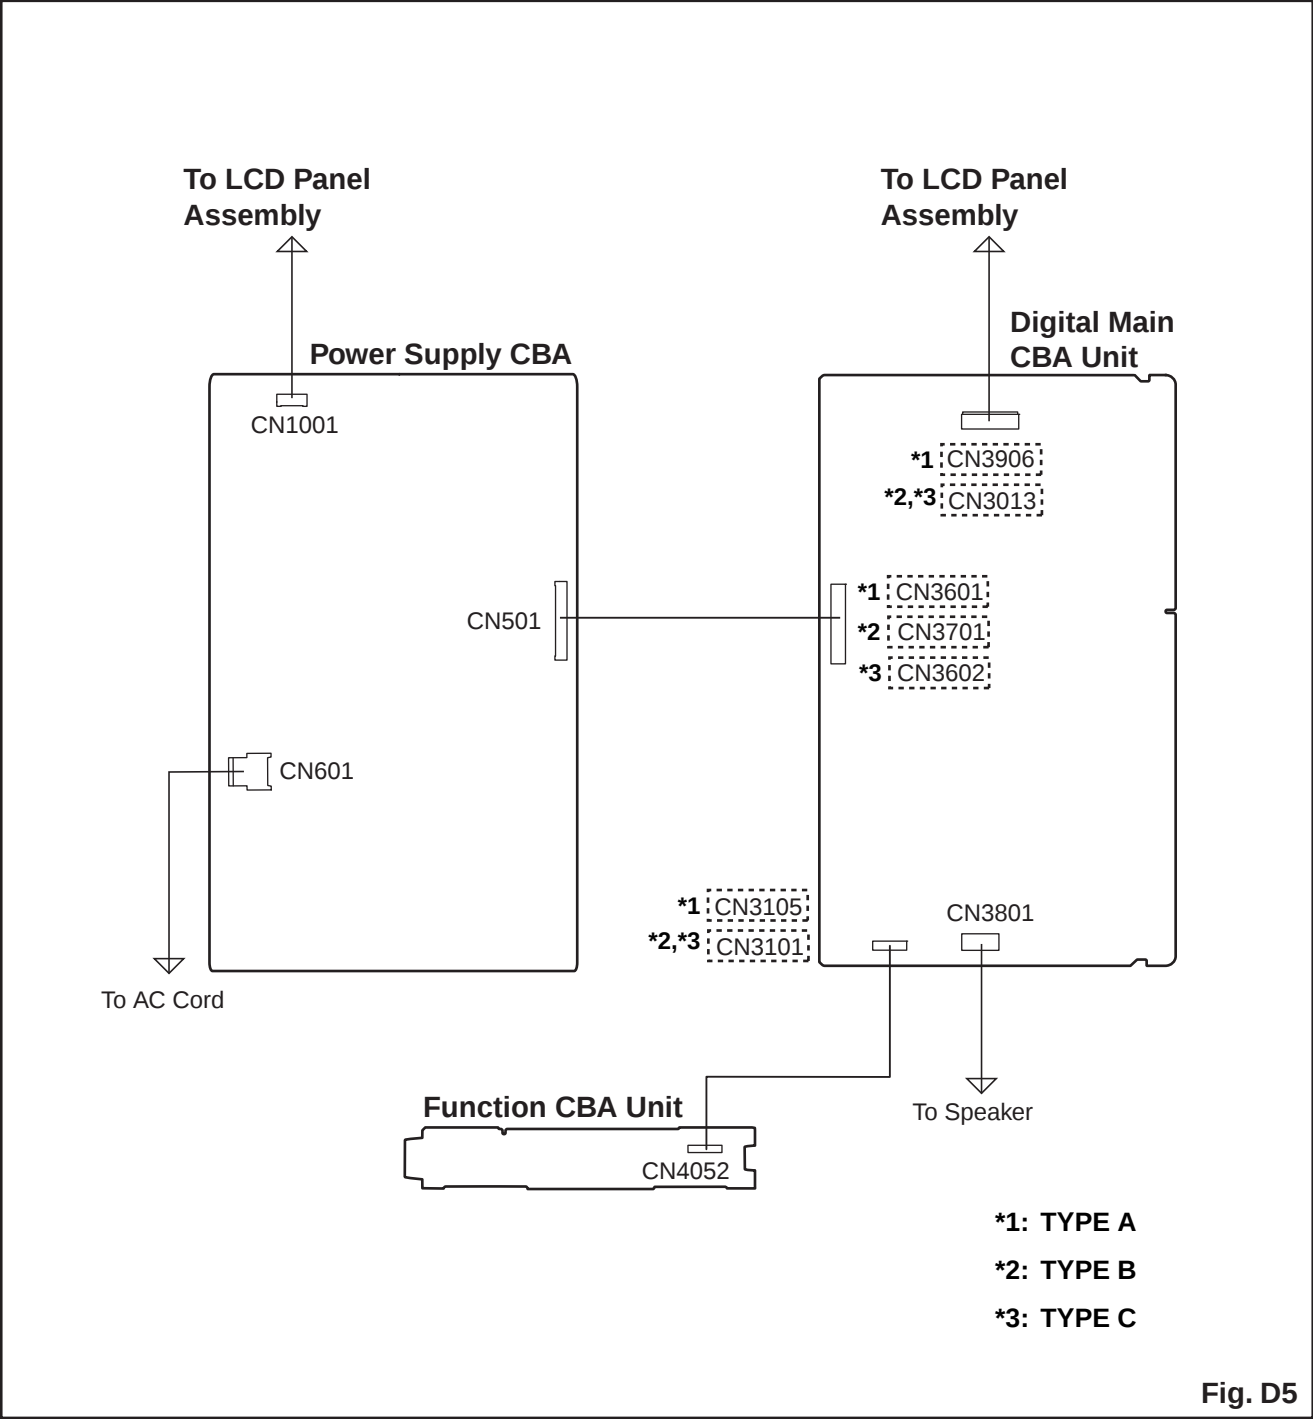



## 2. VCOM Adjustment
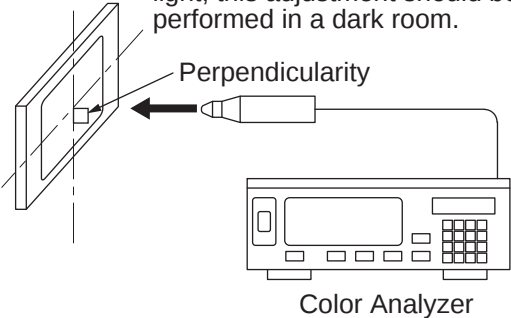
| Test Point                                                                                                                                                                                                                           | Adj. Point                |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
| Screen                                                                                                                                                                                                                               | [CHANNEL UP/DOWN] buttons |
| M. EQ.                                                                                                                                                                                                                               | Spec.                     |
| Color analyzer                                                                                                                                                                                                                       | See below                 |
| <b>Figure</b>                                                                                                                                                                                                                        |                           |
| <p>To avoid interference from ambient light, this adjustment should be performed in a dark room.</p>  <p>Perpendicularity</p> <p>Color Analyzer</p> |                           |

1. Operate the unit for more than 60 minutes.
2. Set the color analyzer at the zero point calibration and bring the optical receptor pointing at the center of the LCD-Panel.  
**Note:** The optical receptor must be set perpendicular to the LCD Panel surface.
3. Enter the service mode.
4. Press [2] button on the remote control unit.
5. Press [CHANNEL UP/DOWN] buttons on the remote control unit so that the color analyzer value becomes minimum.
6. To cancel or to exit from the VCOM Adjustment, press [CH RETURN] or [PREV CH] button.

The White Balance Adjustment should be performed when replacing the LCD Panel or Digital Main CBA.


## 3. White Balance Adjustment

**Purpose:** To mix red and blue beams correctly for pure white.

**Symptom of Misadjustment:** White becomes bluish or reddish.


| ITEM                       | SPECIFICATION                                                                      |
|----------------------------|------------------------------------------------------------------------------------|
| <b>Color temperature</b>   | $x = 0.272 \pm 0.005$<br>$y = 0.278 \pm 0.005$                                     |
| <b>Input Signal</b>        | Internal pattern<br>(30/50/80% raster)                                             |
| <b>Measurement point</b>   | Screen center                                                                      |
| <b>M. EQ.</b>              | CA-310 (KONICA MINOLTA Luminance meter) or measuring instrument as good as CA-310. |
| <b>Aging time</b>          | 60min.<br>(Retail MODE/100IRE Raster HDMI 1080i@60)                                |
| <b>MODE setting of TV</b>  | Shipment setting/<br>Retail MODE                                                   |
| <b>Ambient temperature</b> | $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$                                         |

1. Operate the unit for more than 60 minutes.
2. Enter the service mode.
3. Press [VOLUME DOWN] button three times on the remote control unit to select "Drive setting" mode. "Drive" appears in the screen.
4. Set the color analyzer at the CHROMA mode and zero point calibration. Bring the optical receptor pointing at the center of the LCD-Panel.

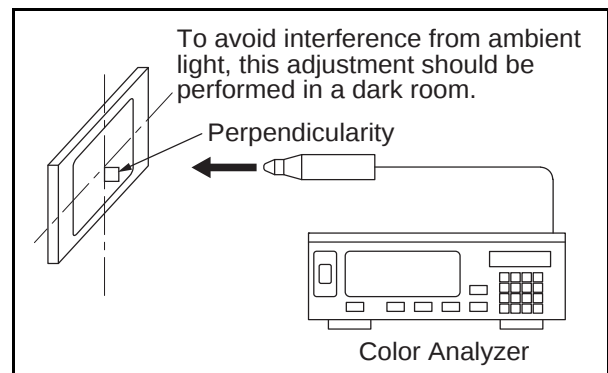


**Note:** The optical receptor must be set perpendicularly to the LCD Panel surface.

5. Press [3] button to select the “HDB” for High Drive Blue adjustment. (“HDB” appears in the screen.)
6. Press [MENU] button. The internal Raster signal appears in the screen. (“Internal (Single)” appears in the upper right of the screen as shown below.)

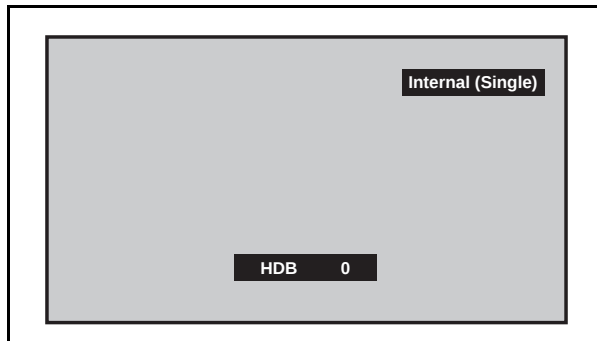


7. Press [CHANNEL UP/DOWN] buttons to adjust the color temperature becomes 12000°K ( $x=0.272 / y=0.278 \pm 0.005$ ).
8. Press [1] button to select the “HDR” for High Drive Red adjustment (“HDR” appears in the screen.) and press [CHANNEL UP/DOWN] buttons to adjust the color temperature.
9. If necessary, adjust the “HDB” or “HDR” again.
10. Press [6] button to select the “MDB” for Middle Drive Blue adjustment (“MDB” appears in the screen.) and press [CHANNEL UP/DOWN] buttons to adjust the color temperature.

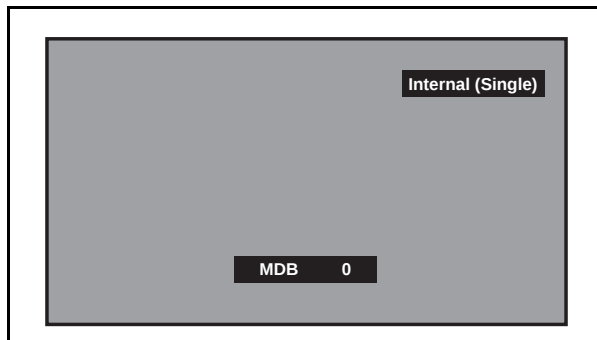

11. Press [4] button to select the “MDR” for Middle Drive Red adjustment (“MDR” appears in the screen.) and press [CHANNEL UP/DOWN] buttons to adjust the color temperature.
12. If necessary, adjust the “MDB” or “MDR” again.

13. Press [9] button to select the “LDB” for Low Drive Blue adjustment (“LDB” appears in the screen.) and press [CHANNEL UP/DOWN] buttons to adjust the color temperature.

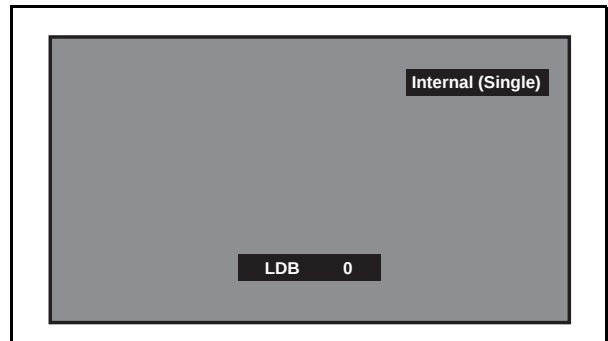

14. Press [7] button to select the “LDR” for Low Drive Red adjustment (“LDR” appears in the screen.) and press [CHANNEL UP/DOWN] buttons to adjust the color temperature.
15. If necessary, adjust the “LDB” or “LDR” again.
16. Press [CH RETURN] or [PREV CH] to shift to the initial screen in the service mode.  
If [White Balance] message with a green color is displayed on the upper right of the screen, this adjustment completes.  
If [White Balance] message with a red color is displayed, repeat above steps from 5. to 15. Then check the initial screen in the service mode again.  
If [White Balance] message with a red color is displayed, replace the LCD Panel or Digital Main CBA.
17. To cancel or to exit from the White Balance Adjustment, press [CH RETURN] or [PREV CH] button.

## [TYPE B, C]

**General Note:** “CBA” is abbreviation for “Circuit Board Assembly.”

**Note:** Electrical adjustments are required after replacing circuit components and certain mechanical parts. It is important to perform these adjustments only after all repairs and replacements have been completed. Also, do not attempt these adjustments unless the proper equipment is available.

### Test Equipment Required

1. Remote control unit
2. Color Analyzer,  
CA-310 (KONICA MINOLTA Luminance meter) or  
measuring instrument as good as CA-310.

## How to set up the service mode:

### Service mode:

1. Turn the power on.
2. Press [MENU] button to display Setup menu.
3. Select “Features”.
4. Select “Software Upgrade”.
5. Select “Current Software Info”.
6. Press [0], [6], [2], [5], [9], [6] and [INFO] buttons on the remote control unit in this order. The following screen appears.


“\*” differs depending on the models.

|                            |                                    |
|----------------------------|------------------------------------|
| Code:                      | *****_**_*_*_*_*_*_**              |
| Pic code:                  | ***_*****_***_***_*_**             |
| Panel-Option code:         | **_*_*_*_*_*_*_*_*_*_*_*_*_*_*_*_* |
| MIPS:                      | Push 0 key                         |
| Press "POWER" key to exit. |                                    |
| Safety:                    | Safety_Non                         |
| HDMI EDID:                 | **                                 |
| HDMI UART:                 | OFF                                |
| Touch Sensor Ver:          | -.-- / ---                         |
| Total Watch Time:          | *****                              |
| Lightsensor:               | **                                 |

## 1. Purity Check Mode

This mode cycles through full-screen displays of red, green, blue, and white to check for non-active pixels.


1. Enter the service mode.
2. Each time the [7] button on the remote control unit is pressed, the display changes as follows.

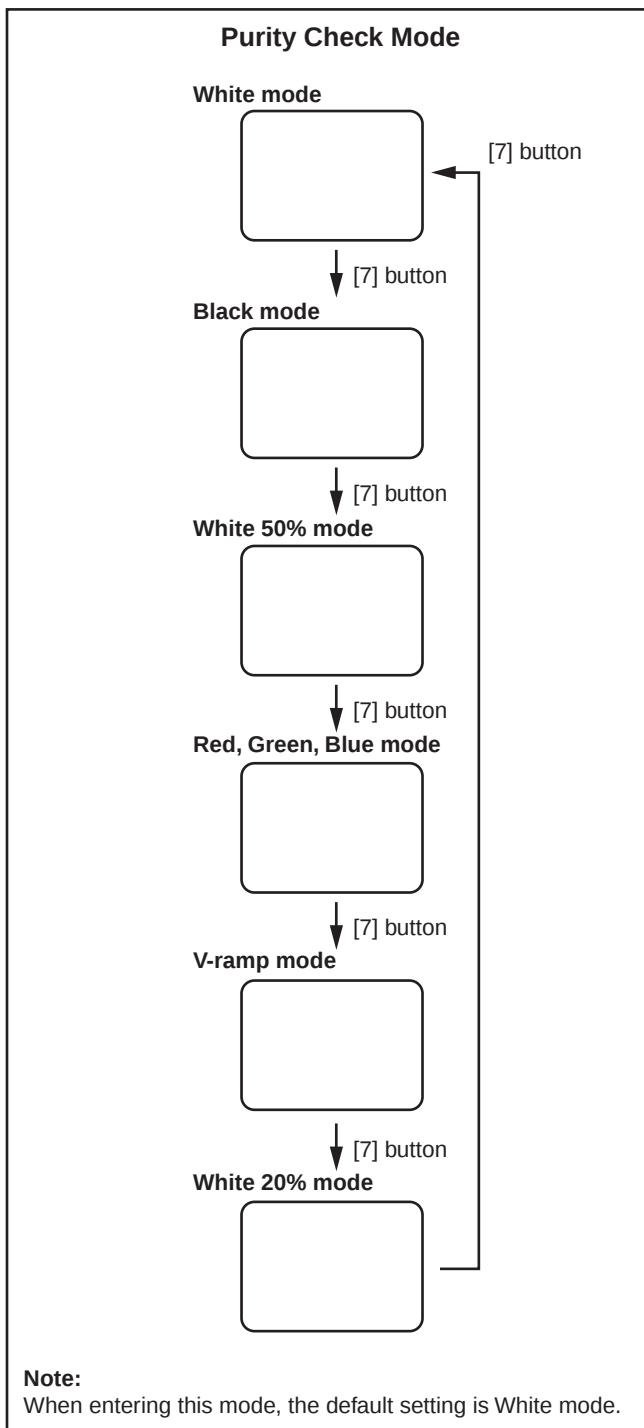

3. To cancel or to exit from the Purity Check Mode, press [CH RETURN] or [PREV CH] button.

## 2. VCOM Adjustment

| Test Point     | Adj. Point                |
|----------------|---------------------------|
| Screen         | [CHANNEL UP/DOWN] buttons |
| M. EQ.         | Spec.                     |
| Color analyzer | See below                 |

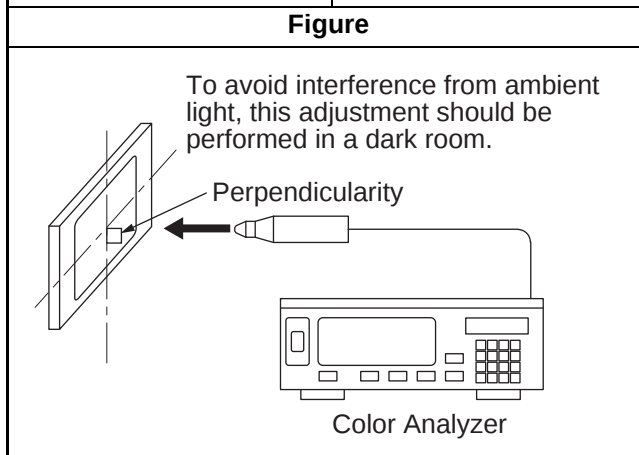

1. Operate the unit for more than 60 minutes.
2. Set the color analyzer at the zero point calibration and bring the optical receptor pointing at the center of the LCD-Panel.  
**Note:** The optical receptor must be set perpendicular to the LCD Panel surface.
3. Enter the service mode.
4. Press [2] button on the remote control unit.
5. Press [CHANNEL UP/DOWN] buttons on the remote control unit so that the color analyzer value becomes minimum.
6. To cancel or to exit from the VCOM Adjustment, press [CH RETURN] or [PREV CH] button.

**The White Balance Adjustment should be performed when replacing the LCD Panel or Digital Main CBA.**


### 3. White Balance Adjustment

**Purpose:** To mix red and blue beams correctly for pure white.

**Symptom of Misadjustment:** White becomes bluish or reddish.

| ITEM                | SPECIFICATION                                                                      |
|---------------------|------------------------------------------------------------------------------------|
| Color temperature   | $x = 0.272 \pm 0.005$<br>$y = 0.278 \pm 0.005$                                     |
| Input Signal        | Internal pattern<br>(40/80% raster)                                                |
| Measurement point   | Screen center                                                                      |
| M. EQ.              | CA-310 (KONICA MINOLTA Luminance meter) or measuring instrument as good as CA-310. |
| Aging time          | 60min.<br>(Retail MODE/100IRE Raster HDMI 1080i@60)                                |
| MODE setting of TV  | Shipment setting/<br>Retail MODE                                                   |
| Ambient temperature | $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$                                         |


1. Operate the unit for more than 60 minutes.
2. Enter the service mode.
3. Press [VOLUME DOWN] button three times on the remote control unit to select "Drive setting" mode. "Drive" appears in the screen.
4. Set the color analyzer at the CHROMA mode and zero point calibration. Bring the optical receptor pointing at the center of the LCD-Panel.

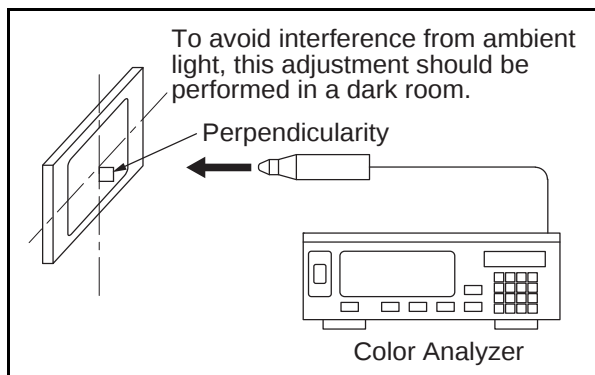


**Note:** The optical receptor must be set perpendicularly to the LCD Panel surface.

5. Press [3] button to select the "HDB" for High Drive Blue adjustment. ("HDB" appears in the screen.)

6. Press [MENU] button. The internal Raster signal appears in the screen. ("Internal (Single)" appears in the upper right of the screen as shown below.)

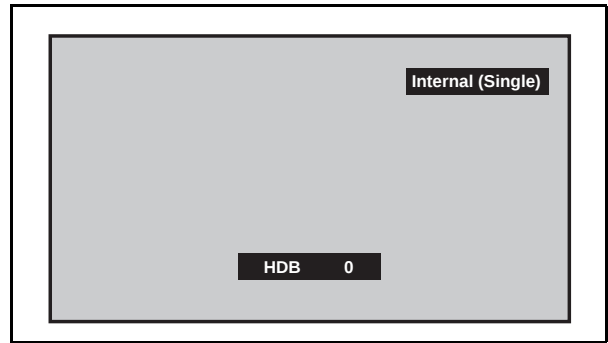

7. Press [CHANNEL UP/DOWN] buttons to adjust the color temperature becomes  $12000^{\circ}\text{K}$  ( $x = 0.272 / y = 0.278 \pm 0.005$ ).
8. Press [1] button to select the "HDR" for High Drive Red adjustment ("HDR" appears in the screen.) and press [CHANNEL UP/DOWN] buttons to adjust the color temperature.
9. If necessary, adjust the "HDB" or "HDR" again.
10. Press [6] button to select the "LDB" for Low Drive Blue adjustment ("LDB" appears in the screen.) and press [CHANNEL UP/DOWN] buttons to adjust the color temperature.

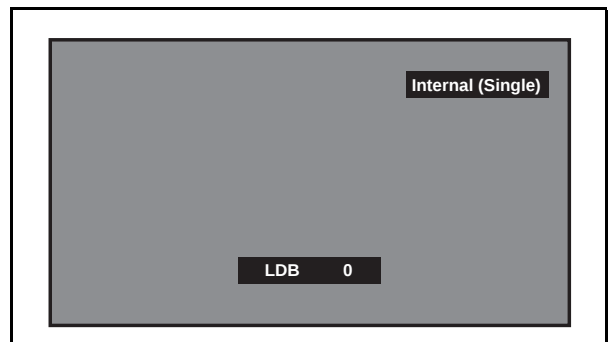

11. Press [4] button to select the "LDR" for Low Drive Red adjustment ("LDR" appears in the screen.) and press [CHANNEL UP/DOWN] buttons to adjust the color temperature.
12. If necessary, adjust the "LDB" or "LDR" again.
13. Press [VOLUME DOWN] button to shift to the "Debugging Message" mode.  
If there is no message under "[WB]" section, this adjustment completes.  
If "Drive settings are NG. Retry again." is displayed, repeat above steps from 5. to 12. Then check "Debugging Message" again. If "Drive settings are NG. Retry again." is displayed, replace the LCD Panel or Digital Main CBA.
14. To cancel or to exit from the White Balance Adjustment, press [CH RETURN] or [PREV CH] button.

# HOW TO INITIALIZE THE LCD TV

The purpose of initialization is to place the set in a new out of box condition. The customer will be prompted to select a language and program channels after the set has been initialized.

To put the program back at the factory-default, initialize the LCD TV using the following procedure.

**NOTE:** Disconnect any device from the USB Port before you conduct on this procedure.

## [TYPE A]

1. Turn the power on.
2. Enter the service mode.
  - To cancel the service mode, press [ $\phi$ ] button on the remote control unit.
3. Press [BACK] button to enter the Control Panel Key Confirmation Menu.
4. Press any button on the control panel.
5. Press [INFO] button to proceed with the self check mode.
6. Make sure to confirm the "INITIALIZED : OK" appears in the green screen.
7. Unplug the AC Cord and plug it back on again.

## [TYPE B, C]

1. Turn the power on.
2. Enter the service mode.
  - To cancel the service mode, press [ $\phi$ ] button on the remote control unit.
3. Press [BACK] button to enter the Panel Key Confirmation Menu.
4. Press any button on the control panel.
5. Press [INFO] button to proceed with the self check mode.
6. Make sure to confirm the "INITIALIZED FINISH" appears in the green screen.
7. Unplug the AC Cord and plug it back on again.

# FIRMWARE RENEWAL MODE

## [TYPE A]


### Equipment Required

1. USB storage device
2. Remote Control Unit

### Firmware Update Procedure

1. Turn the power off and unplug the AC Cord.
2. Insert the USB storage device to the USB port as shown below.

Rear Cabinet  
(example)

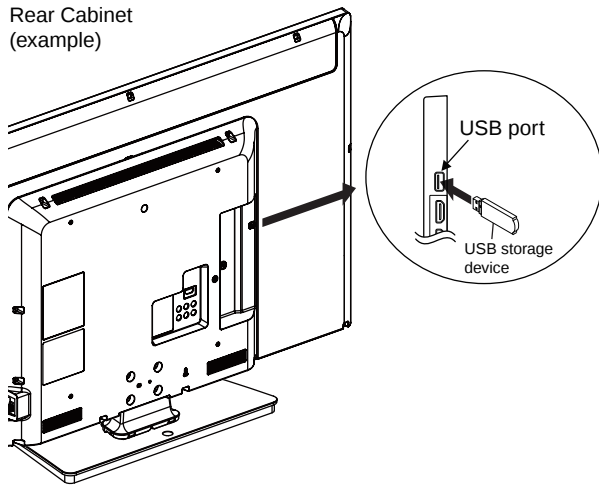

3. Plug the AC Cord and turn the power on.
4. After few seconds, the menu mode will appear in the screen.

#### Note:

After 30 seconds without an operation, the menu mode will disappear automatically.  
To display the menu mode again, press the [MENU] button on the remote control unit.

5. Select "Setup" and press the [OK] button to display the setup menu.
6. Select "Software".
7. Select "Software update".
8. Select "USB".
9. Press the [OK] button on the remote control unit to enter the update mode.

Update file selection screen appears as follows.  
(Files included in the USB storage device are displayed.)

"\*" differs depending on the models.

|                        |            |       |
|------------------------|------------|-------|
| Select an upgrade file | **** *.upg |       |
|                        | **** *.upg |       |
|                        | **** *.upg |       |
|                        |            |       |
|                        |            |       |
|                        |            |       |
|                        |            |       |
| Cancel                 |            | 1 2 3 |

#### Note:

To cancel the update mode, select "Cancel" and press the [OK] button.

10. Select the file and press [OK] button.
11. The update will start and the following will appear in the screen.

"\*" differs depending on the models.

Current Version: \*\*\*.\*\*\*.\*\*\*

New Version: \*\*\*.\*\*\*.\*\*\*

Are you sure you want to update?

No

Yes

#### Note:

If the above screen isn't displayed, repeat from step 1.

12. Select "Yes" and press the [OK] button to update.

#### Note:

Do not remove the USB storage device or turn the TV off while update is in progress.

13. When the firmware update is completed, the following will appear in the screen.

Update your TV with new software:  Done

Software update is successful.

Please remove the USB storage device and restart the TV set.

Remove the USB storage device from the USB port.  
Turn the power off and turn the power on again.

# [TYPE B, C]

## Equipment Required

- a. USB storage device
- b. Remote Control Unit

## Firmware Update Procedure

**User Upgrade** (Filename example: TVNB012\_00\_PF\_XX91\_BC.ecc or TVNB1012\_00\_PG\_XX91\_BA0.bin)  
Upgrade the firmware only. The setting values will not be initialized.


The User Upgrade and the Firmware Upgrade (Factory Upgrade) will be done by the same file. If you want to upgrade the firmware and initialize the setting values also, add "FACT\_" at the beginning of the filename.

If you want to upgrade the firmware only and leave the setting values as they are, eliminate the "FACT\_" from the filename.

### Update procedure

1. Turn the power on.
2. Press [MENU] button to display Menu.
3. Select "Features".
4. Select "Software Upgrade".
5. Select "Upgrade" to display Upgrade screen.
6. Press [OK] button to display Software Upgrade screen.
7. Select "USB" and press [OK] button.
8. Insert the USB storage device to the USB port as shown below.


Rear Cabinet  
(example)

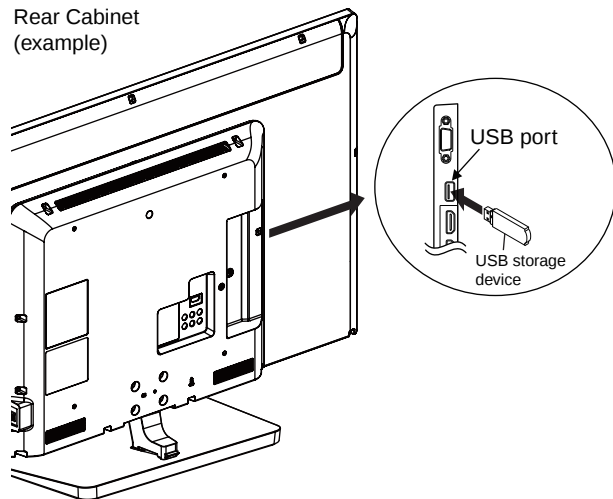

9. Select "Check" and press [OK] button.
10. Select "Upgrade" and press [OK] button to start software upgrade.

11. The update will start and the following will appear in the screen.

"\*" differs depending on the models.

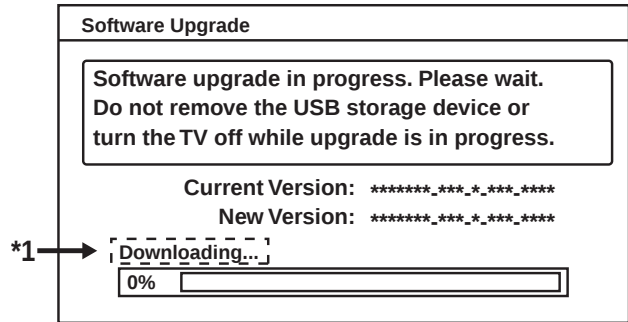


**Note:** If the above screen isn't displayed, repeat from step 1.

The appearance shown in \*1 is described as follows.

| Appearance     | State                                                 |
|----------------|-------------------------------------------------------|
| Downloading... | Downloading the firmware from the USB storage device. |
| Writing...     | Writing the downloaded firmware in flash memory.      |
| Checking...    | Checking the new firmware.                            |

12. When the firmware update is completed, the following will appear in the screen.

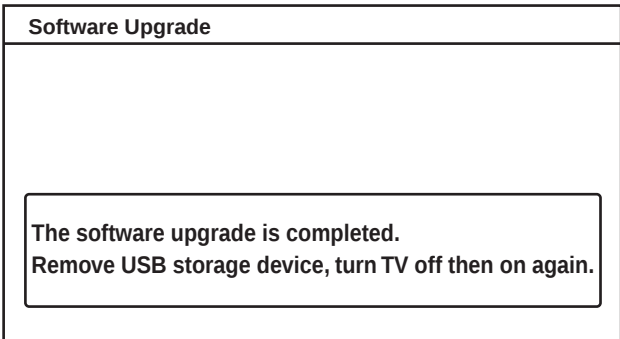

Remove the USB storage device from the USB port.  
Turn the power off and turn the power on again.

# Factory Upgrade (Firmware Upgrade/Flash Upgrade)

## Firmware Upgrade

(Filename example: FACT\_TVNB012\_00\_PF\_XX91\_BC.ecc or FACT\_TVNB1012\_00\_PG\_XX91\_BA0.bin)

Upgrade the firmware and initialize the setting values.

The User Upgrade and the Firmware Upgrade (Factory Upgrade) will be done by the same file. If you want to upgrade the firmware and initialize the setting values also, add "FACT\_" at the beginning of the filename.

If you want to upgrade the firmware only and leave the setting values as they are, eliminate the "FACT\_" from the filename.

## Flash Upgrade

(Filename example: ALL\_TVNB012\_00\_PF\_XX91\_BC.ecc or ALL\_TVNB1012\_00\_PG\_XX91\_BA0.bin)

Upgrade the firmware and initialize the setting values along with the factory default such as White Balance, etc.


Before the upgrade, you will need to make a note of all the factory default so you will be able to set it back on the TV after the initialization.

The Flash Upgrade will be done by it's unique file.

The User Upgrade/Firmware Upgrade (Factory Upgrade) file cannot be used for this upgrade.


## Update procedure

1. Turn the power off.
2. Insert the USB storage device to the USB port as shown below.

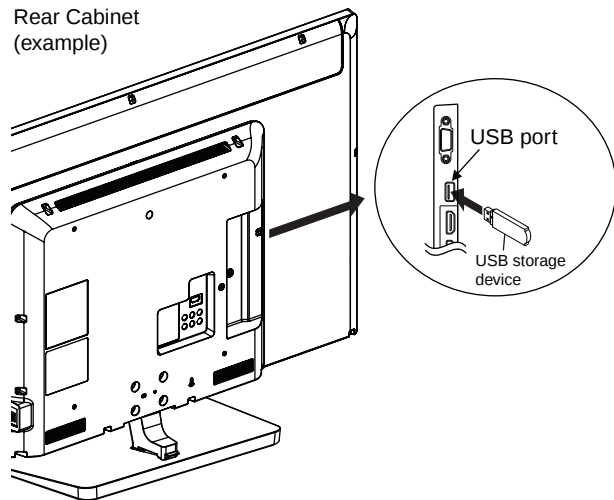

3. Turn the power on.
4. The update will start and the following will appear in the screen.

"\*" differs depending on the models.

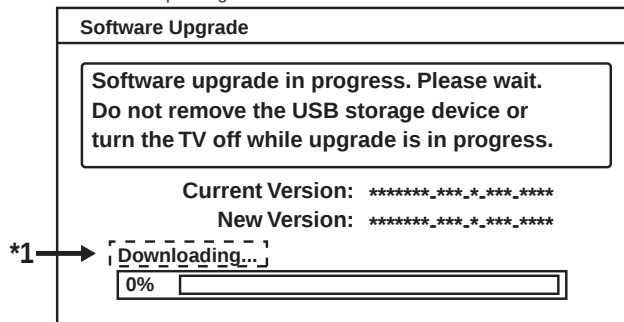


**Note:** If the above screen isn't displayed, repeat from step 1.

The appearance shown in \*1 is described as follows.

| Appearance     | State                                                 |
|----------------|-------------------------------------------------------|
| Downloading... | Downloading the firmware from the USB storage device. |
| Writing...     | Writing the downloaded firmware in flash memory.      |
| Checking...    | Checking the new firmware.                            |

5. When the firmware update is completed, the following will appear in the screen.

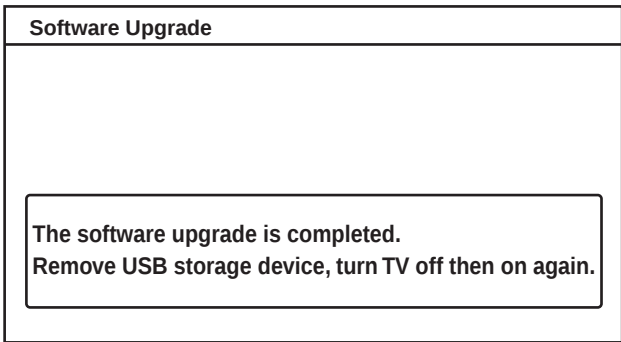

Remove the USB storage device from the USB port.


Turn the power off and turn the power on again.

Service mode initial screen with a word "INITIALIZED" will appear in the screen. The color of the word "INITIALIZED" will change from red to green when initialization is completed.


# TROUBLESHOOTING

## [Power Supply Section]


### FLOW CHART NO.1

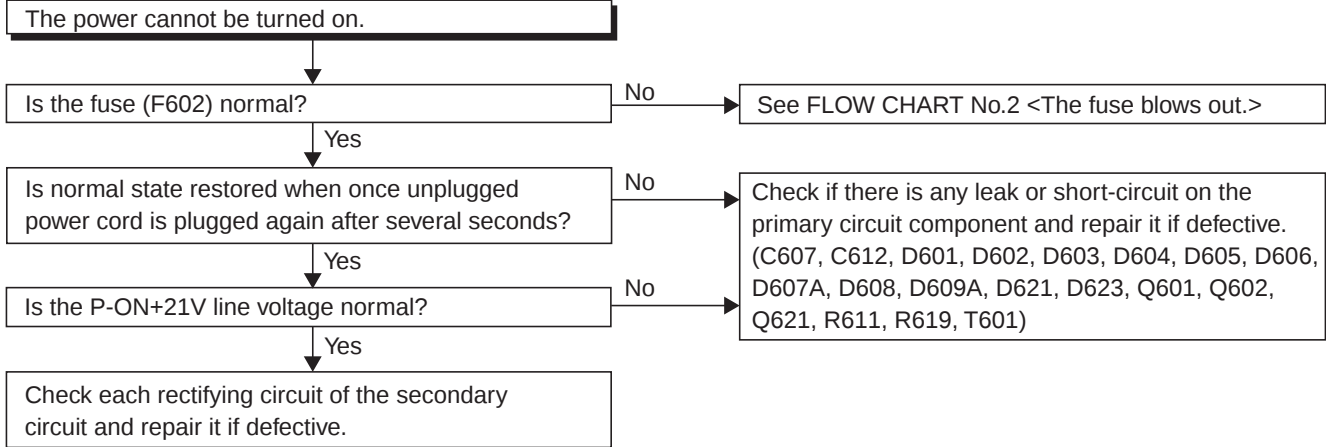


### FLOW CHART NO.2

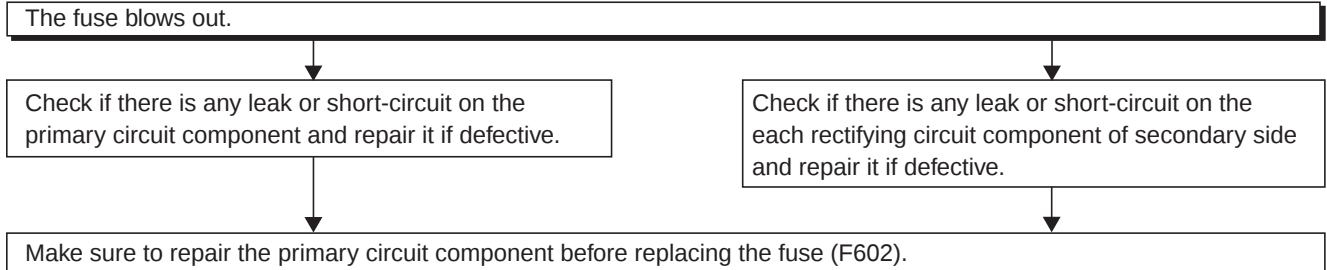


### FLOW CHART NO.3

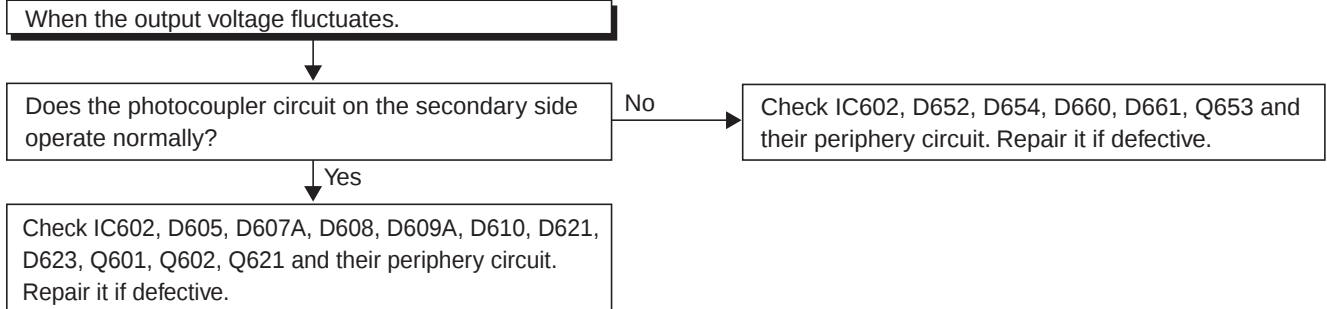


### FLOW CHART NO.4

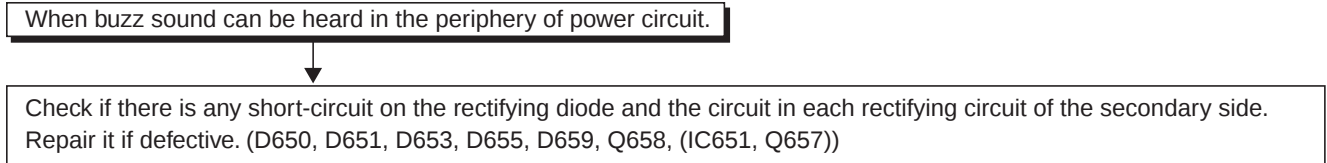

#### FLOW CHART NO.5

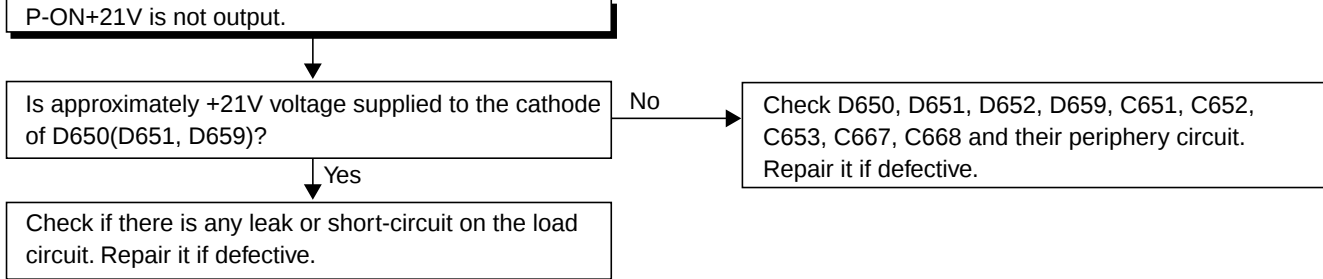


#### FLOW CHART NO.6

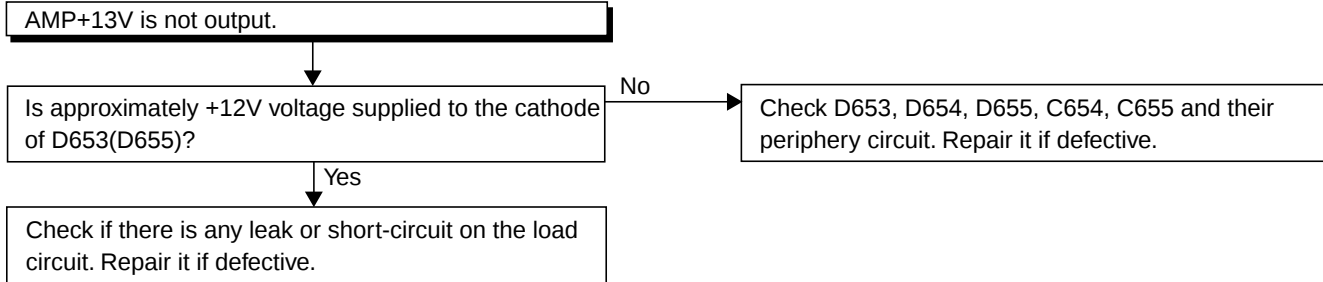


#### FLOW CHART NO.7


##### [TYPE A]

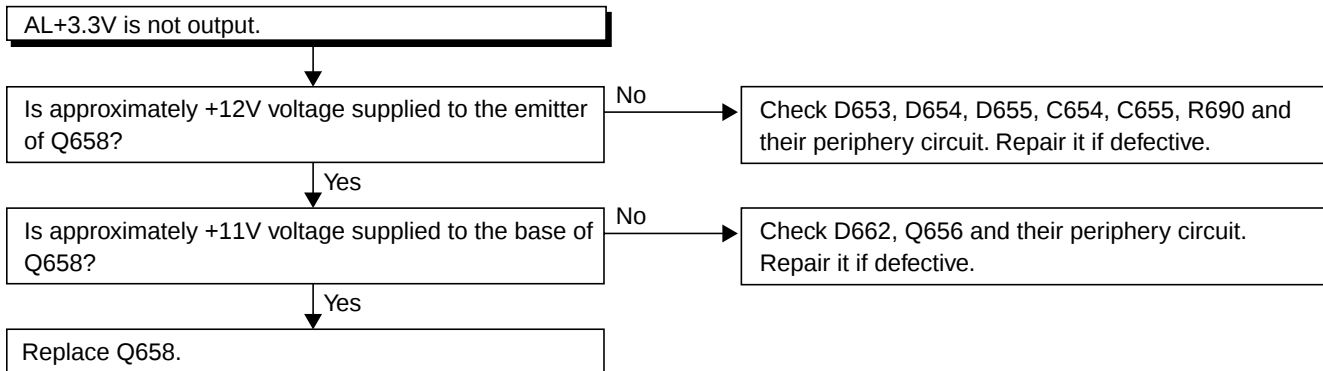

##### [TYPE B]

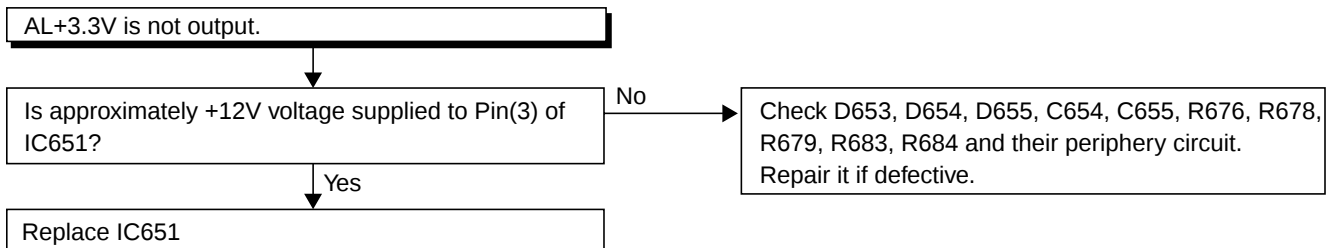


##### [TYPE C]

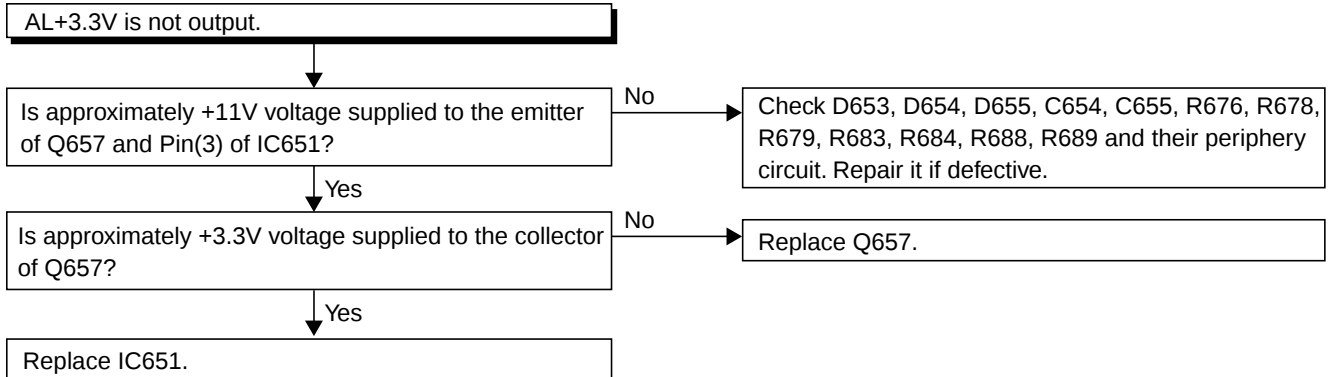


## [Video Signal Section]


### FLOW CHART NO.1

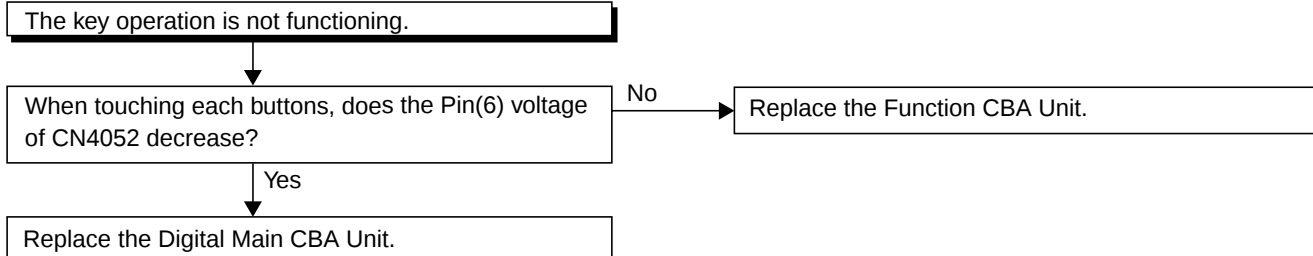

### FLOW CHART NO.2

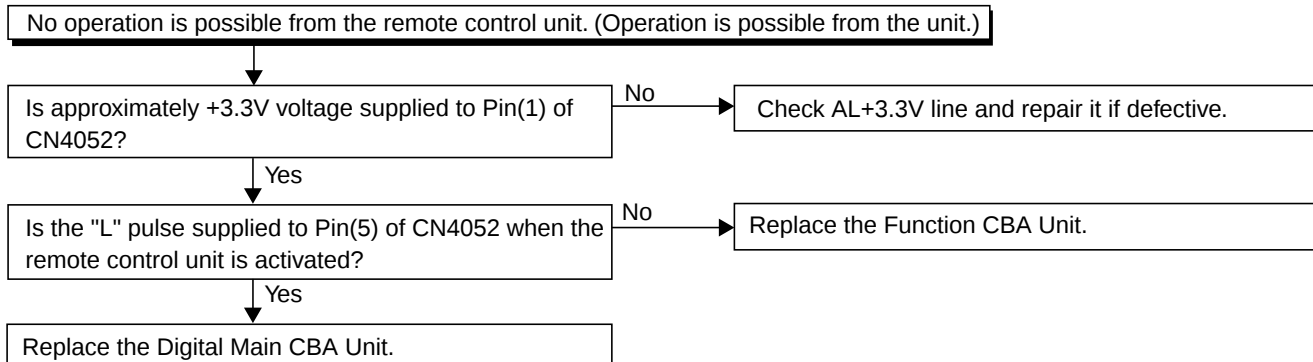


### FLOW CHART NO.3

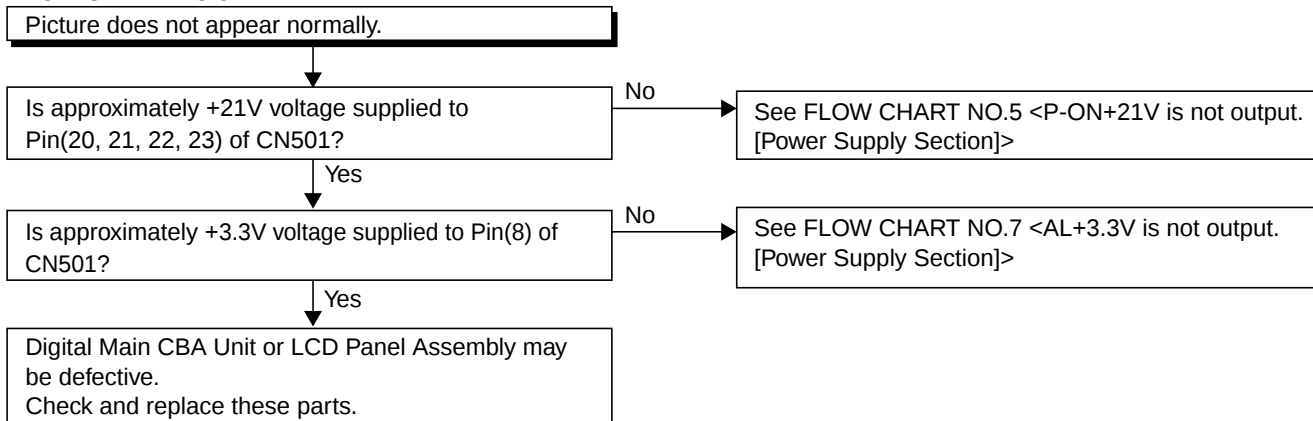

## [Audio Signal Section]


### FLOW CHART NO.1

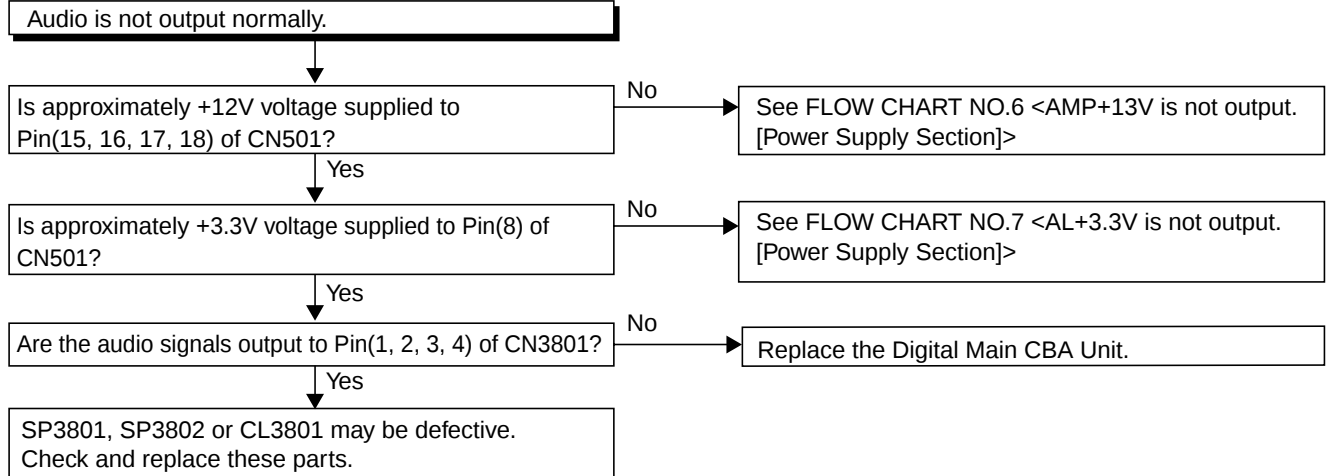


# BLOCK DIAGRAMS

[TYPE A]


## 1. System Control Block Diagram

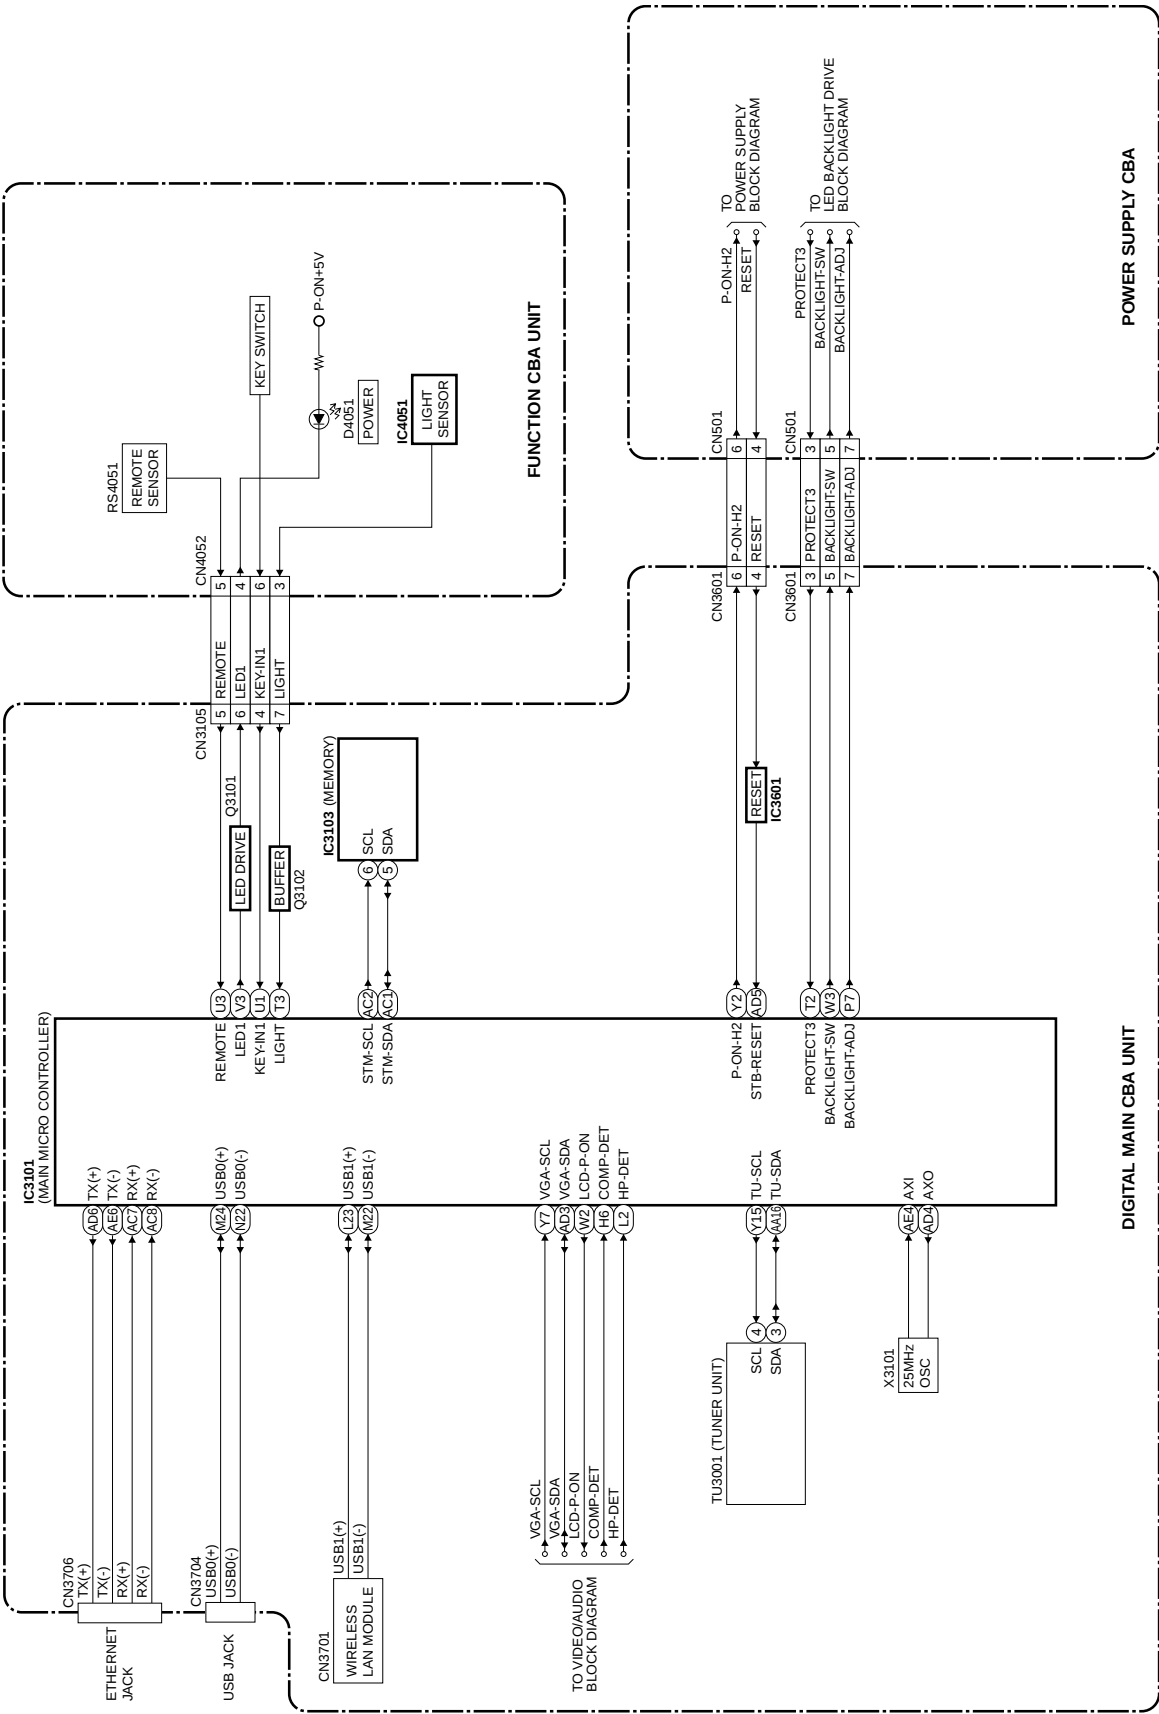


## 2. Video/Audio Block Diagram

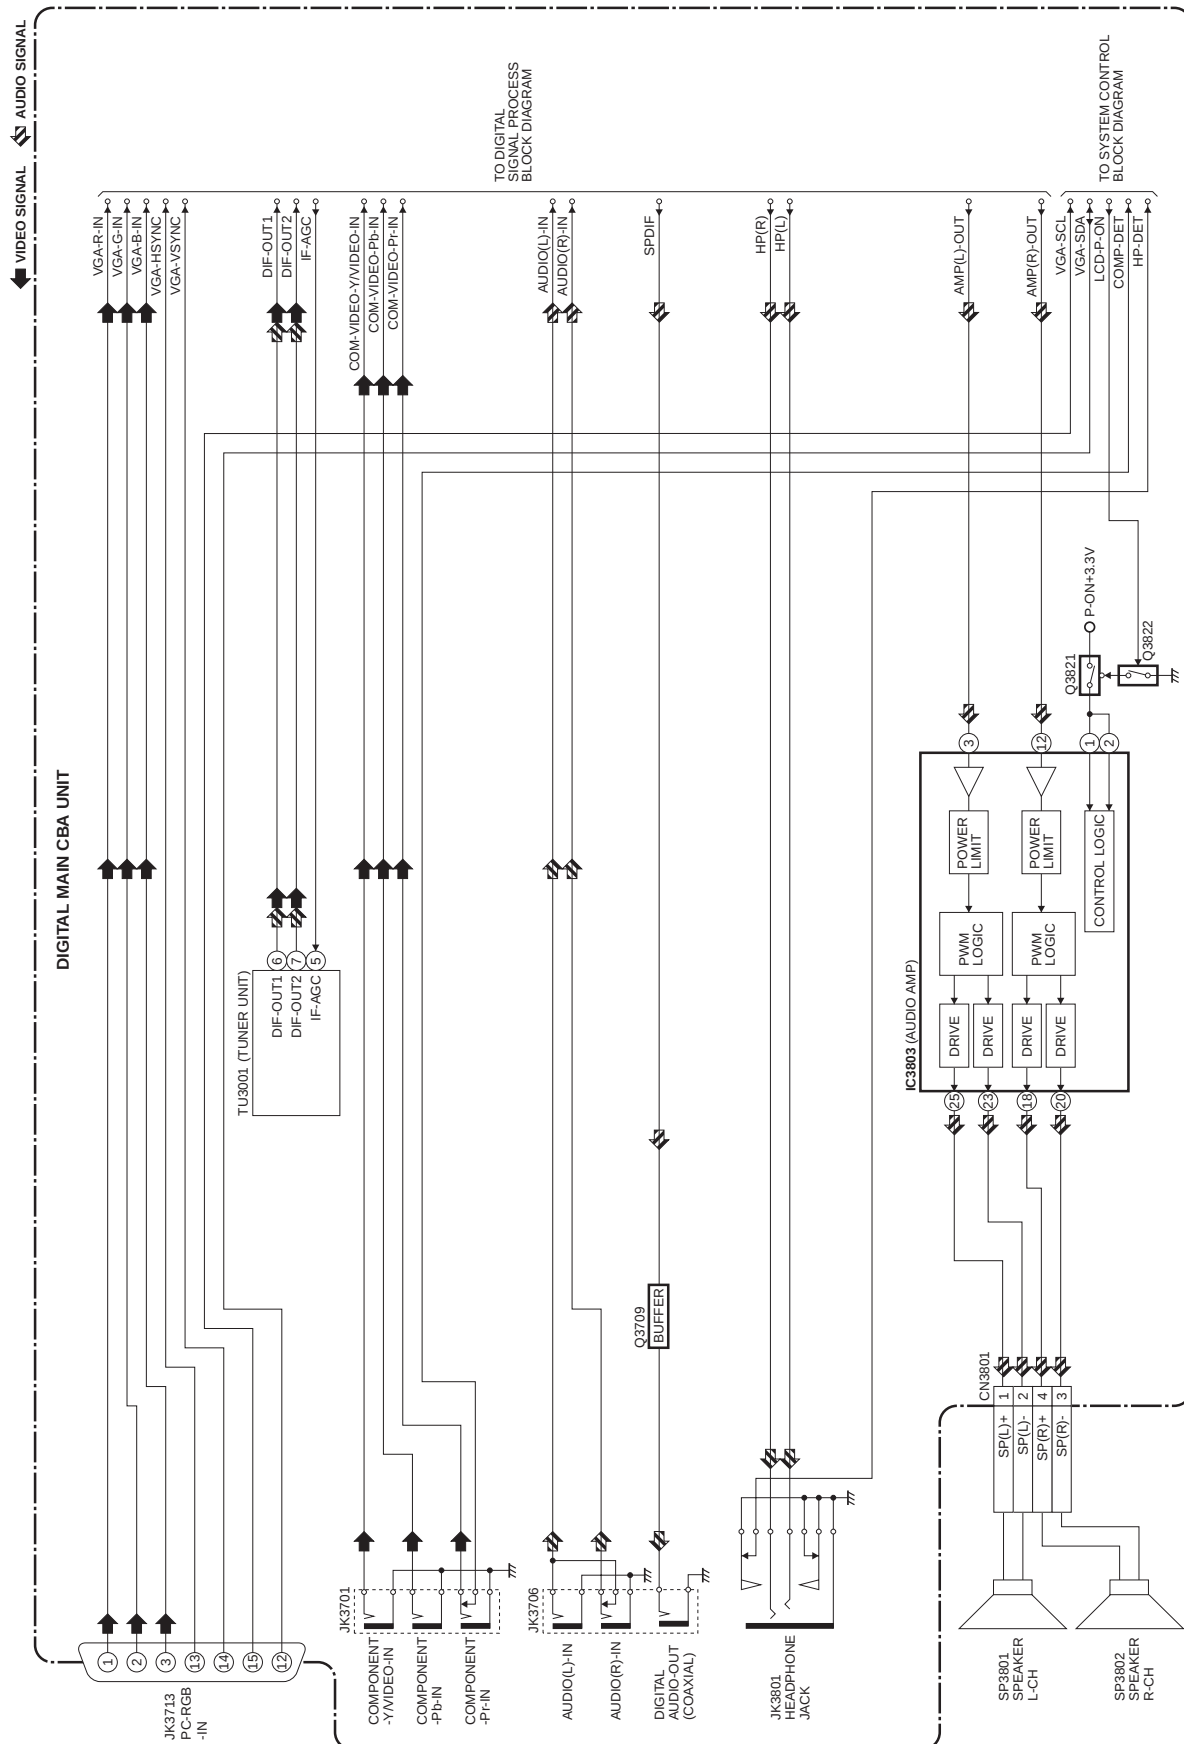


### 3. Digital Signal Process Block Diagram

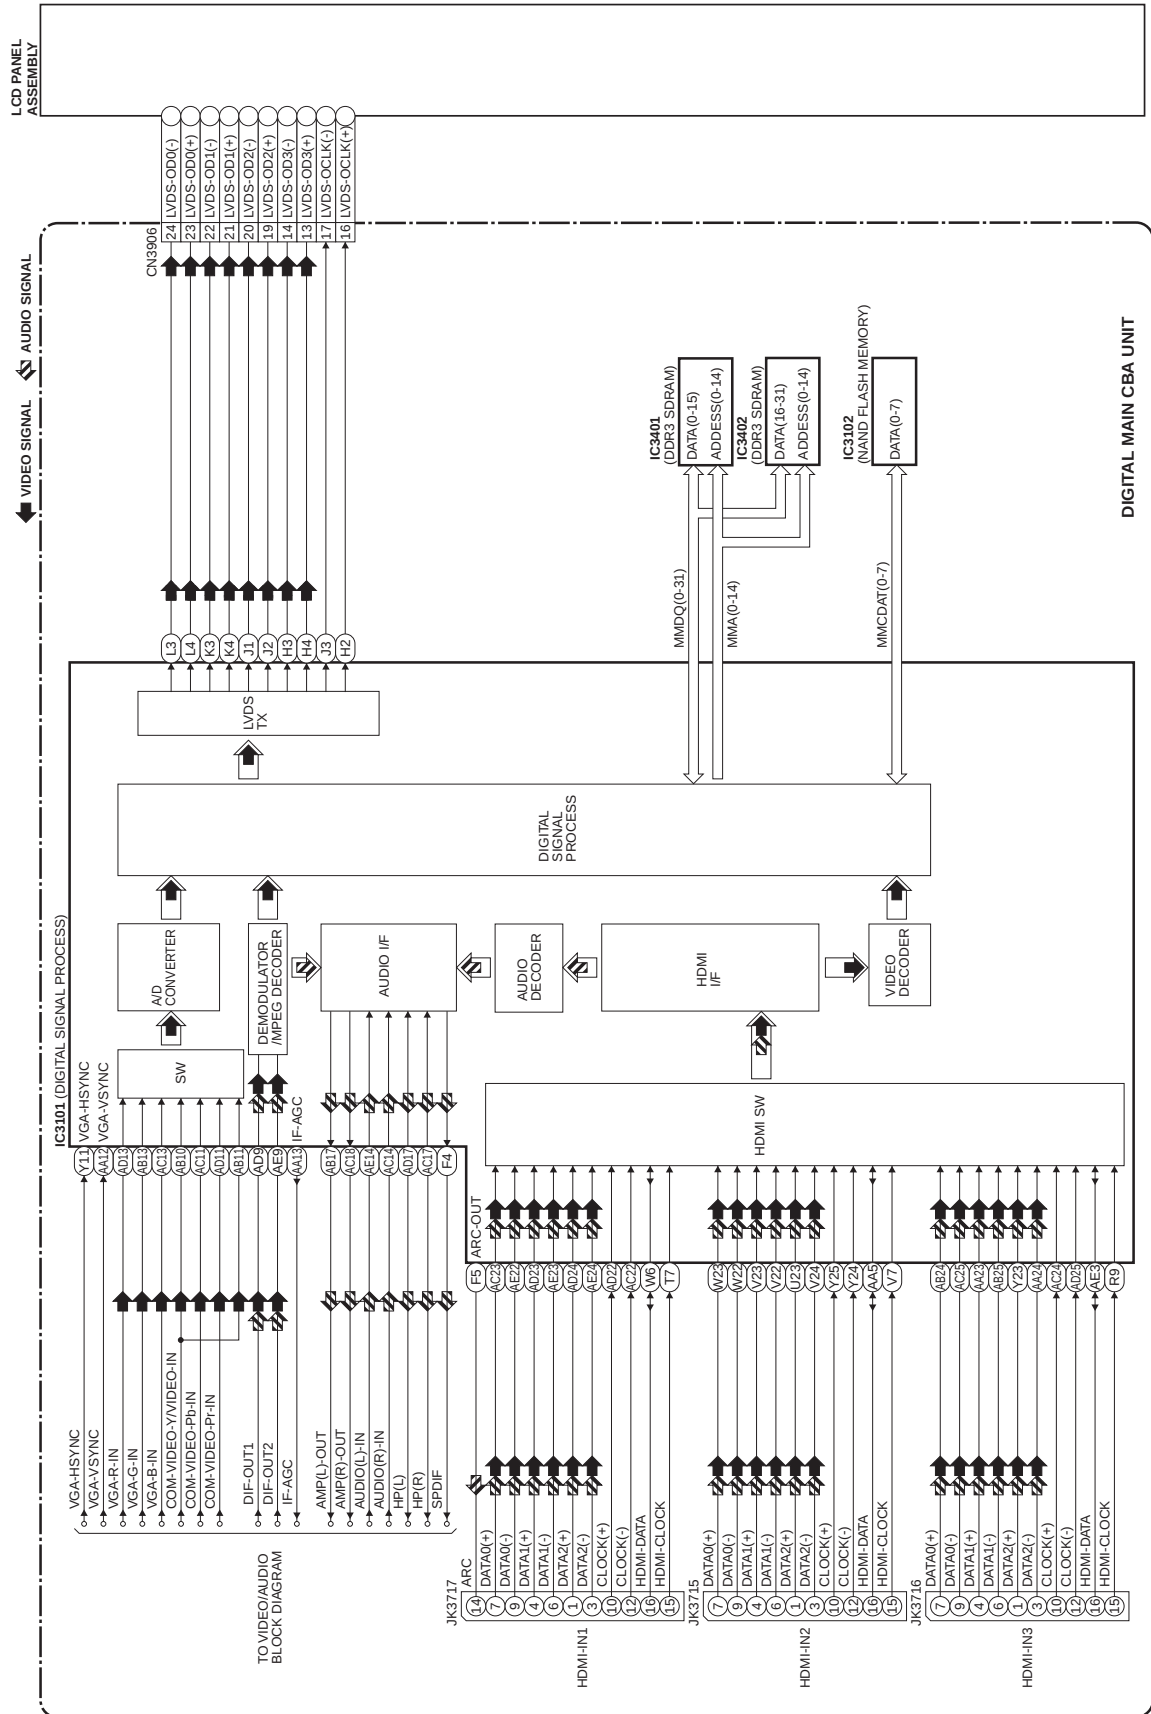

## 4. LED Backlight Drive Block Diagram

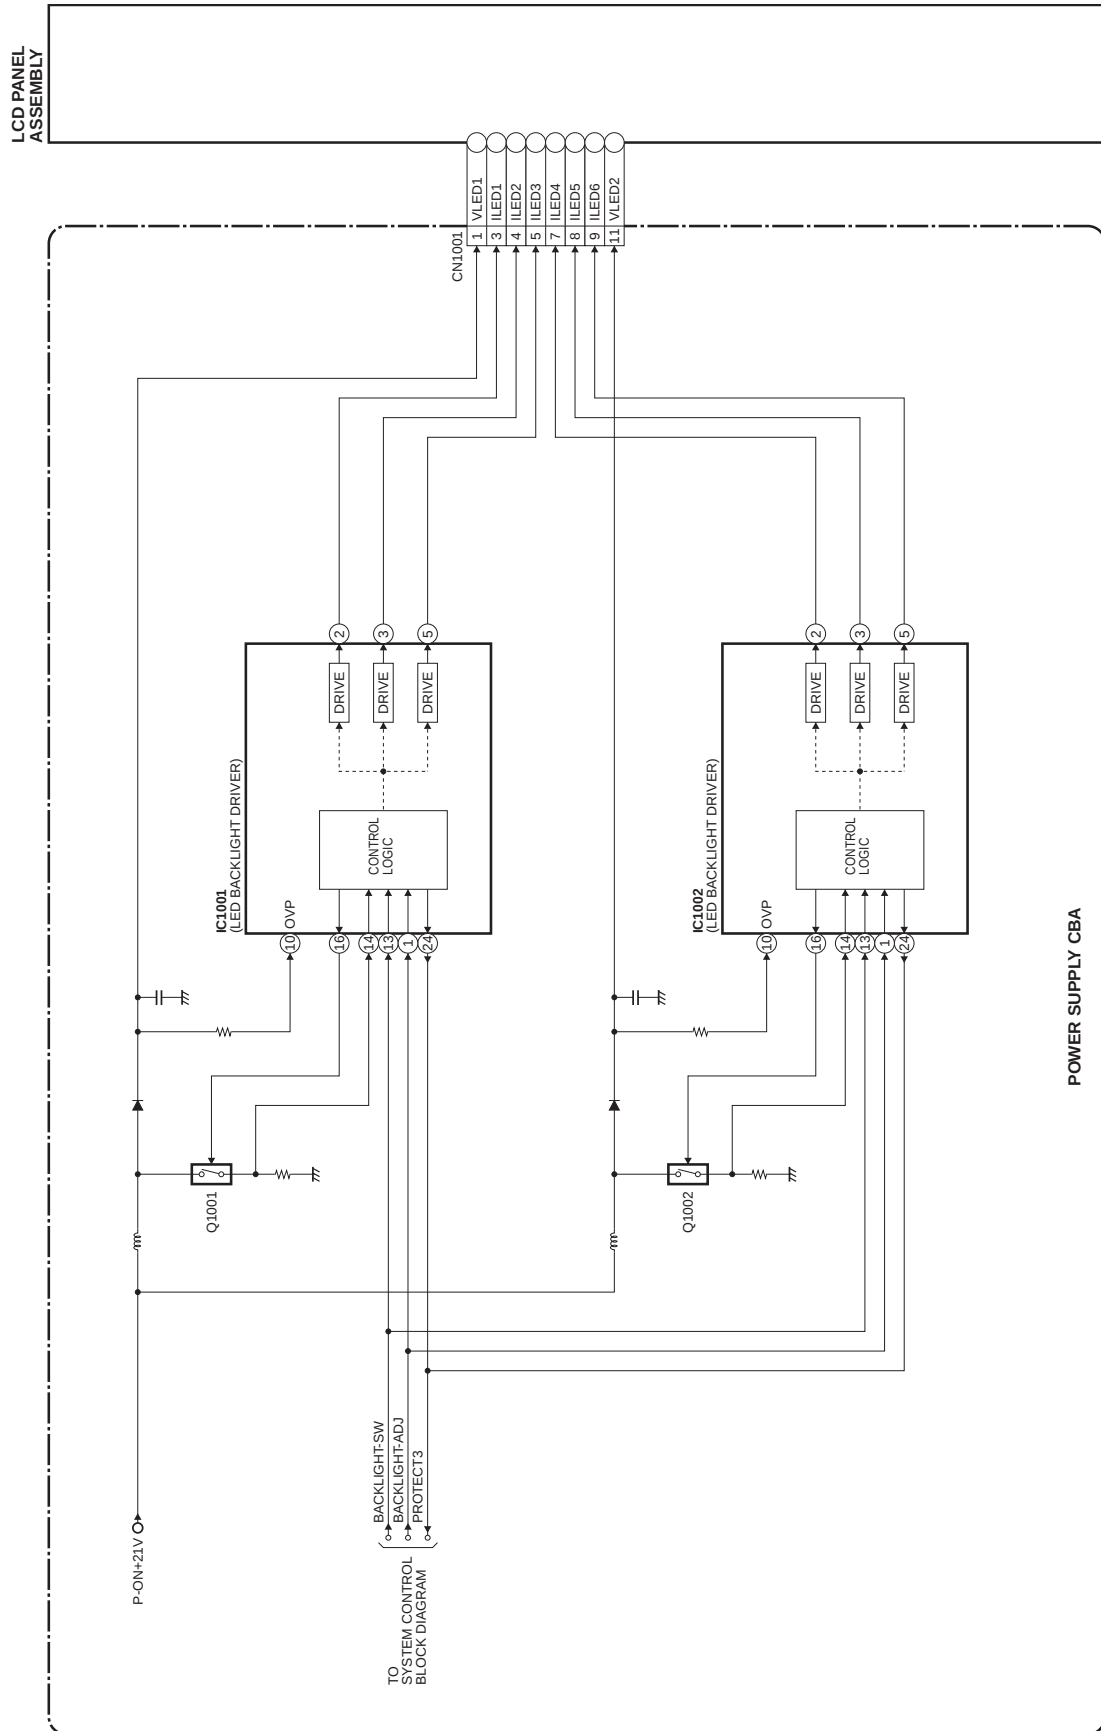


## 5. Power Supply Block Diagram

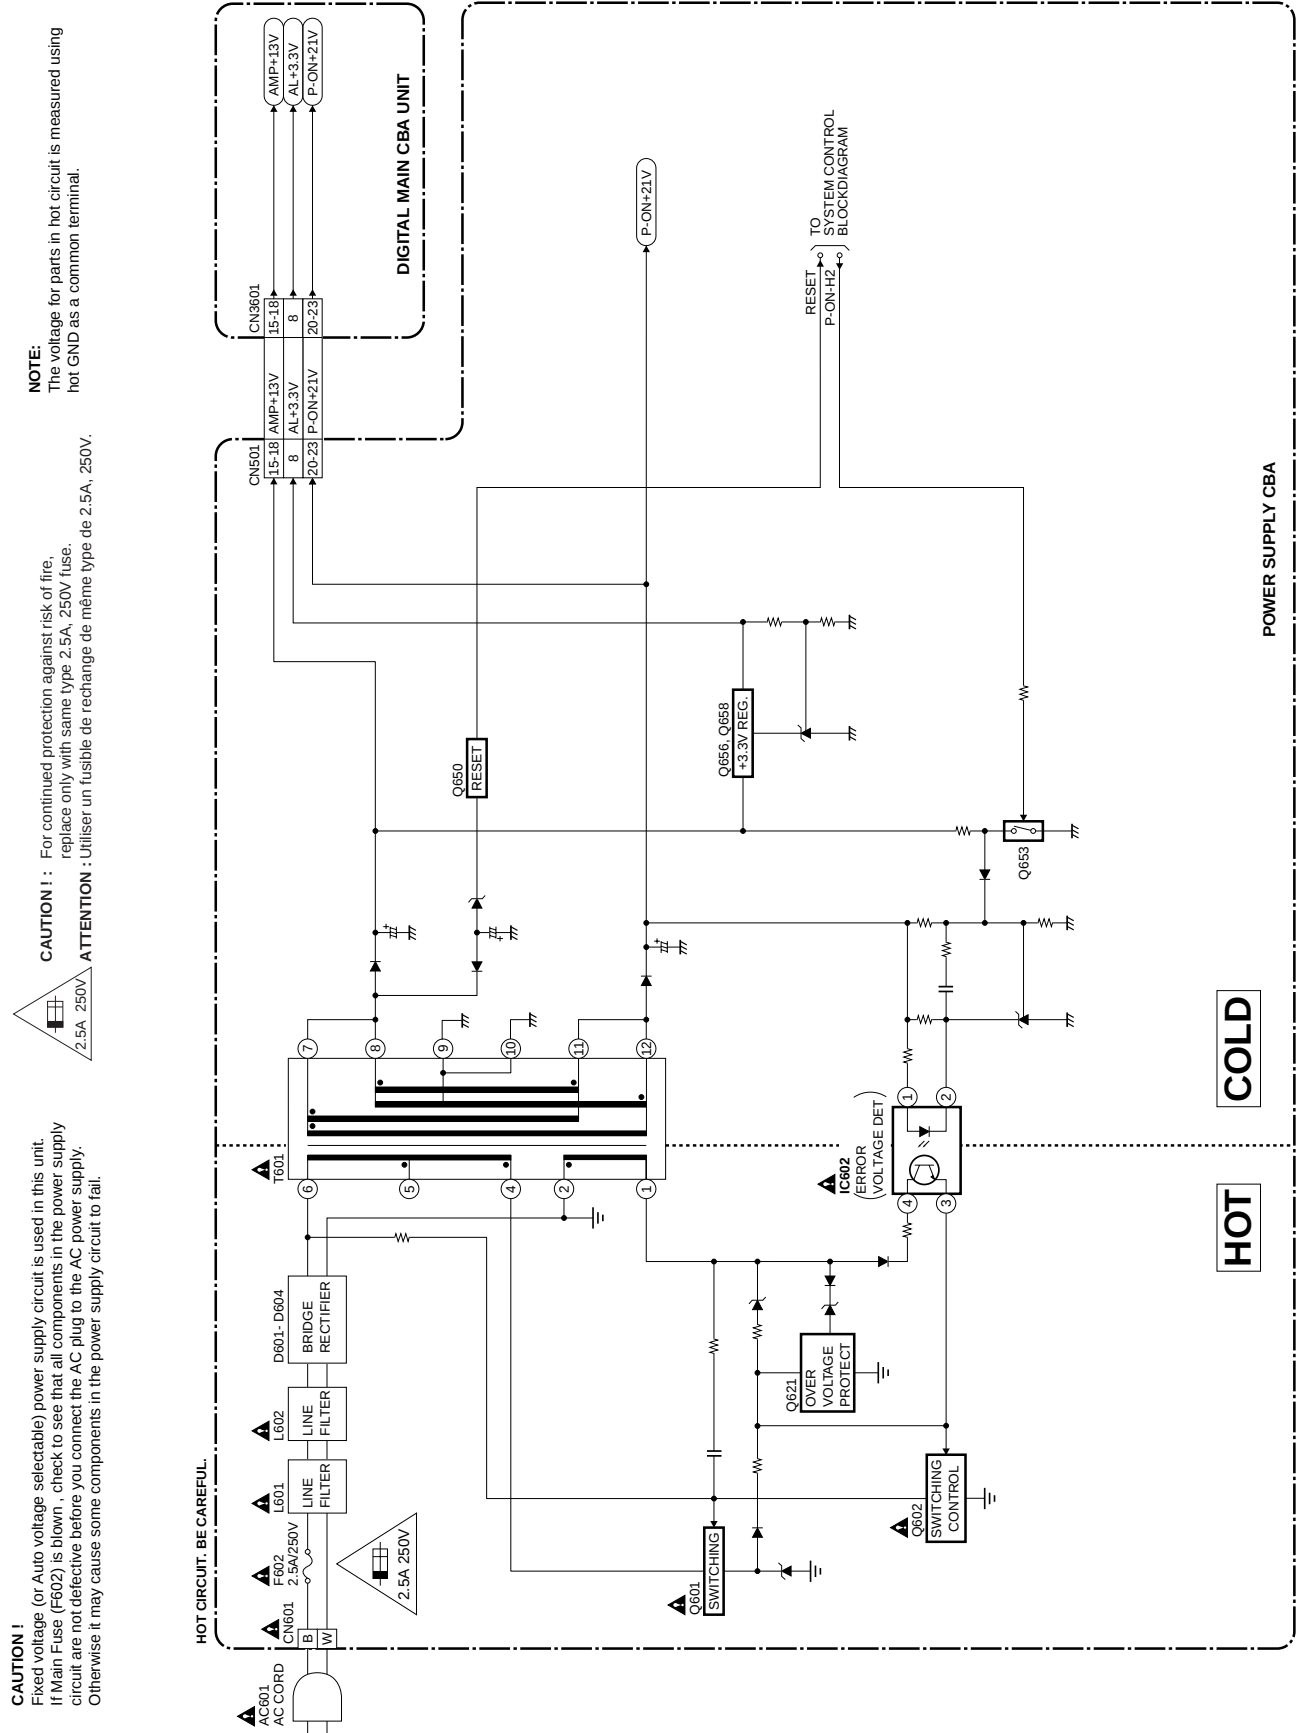


[TYPE B]


## 1. System Control Block Diagram

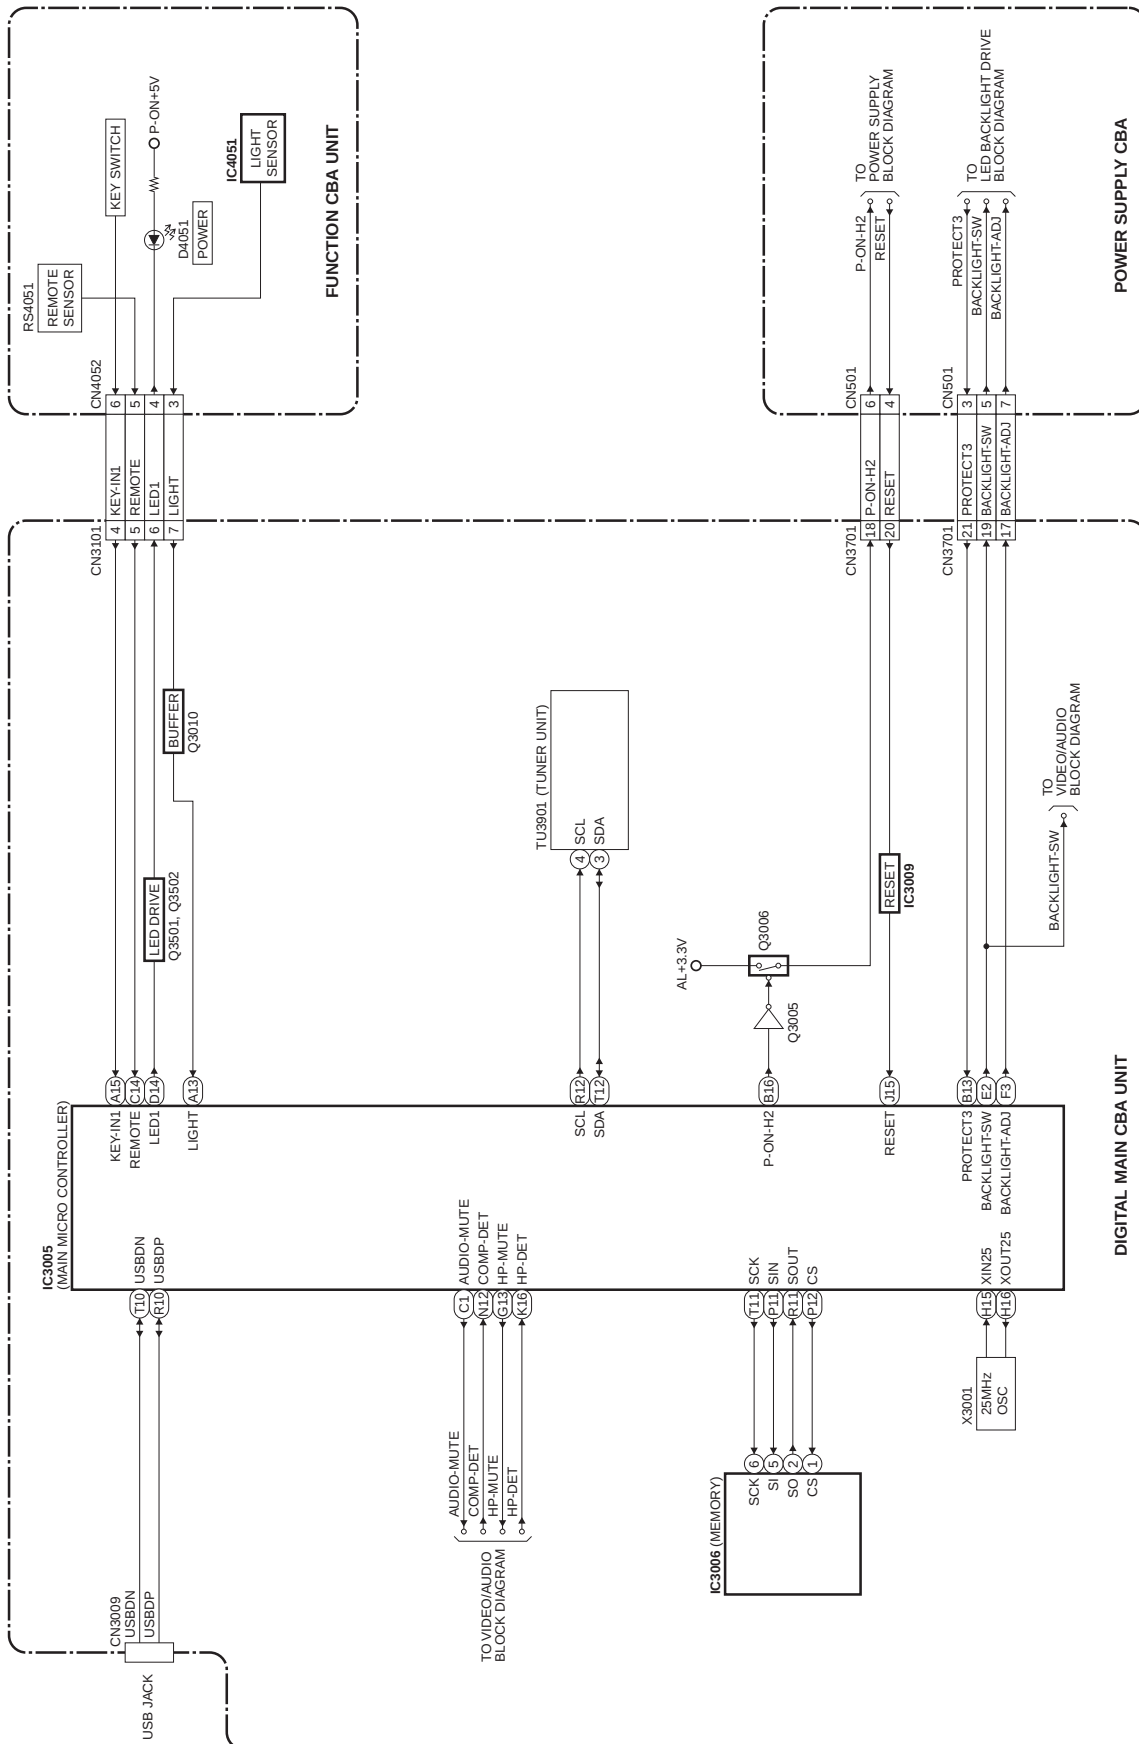


## 2. Video/Audio Block Diagram

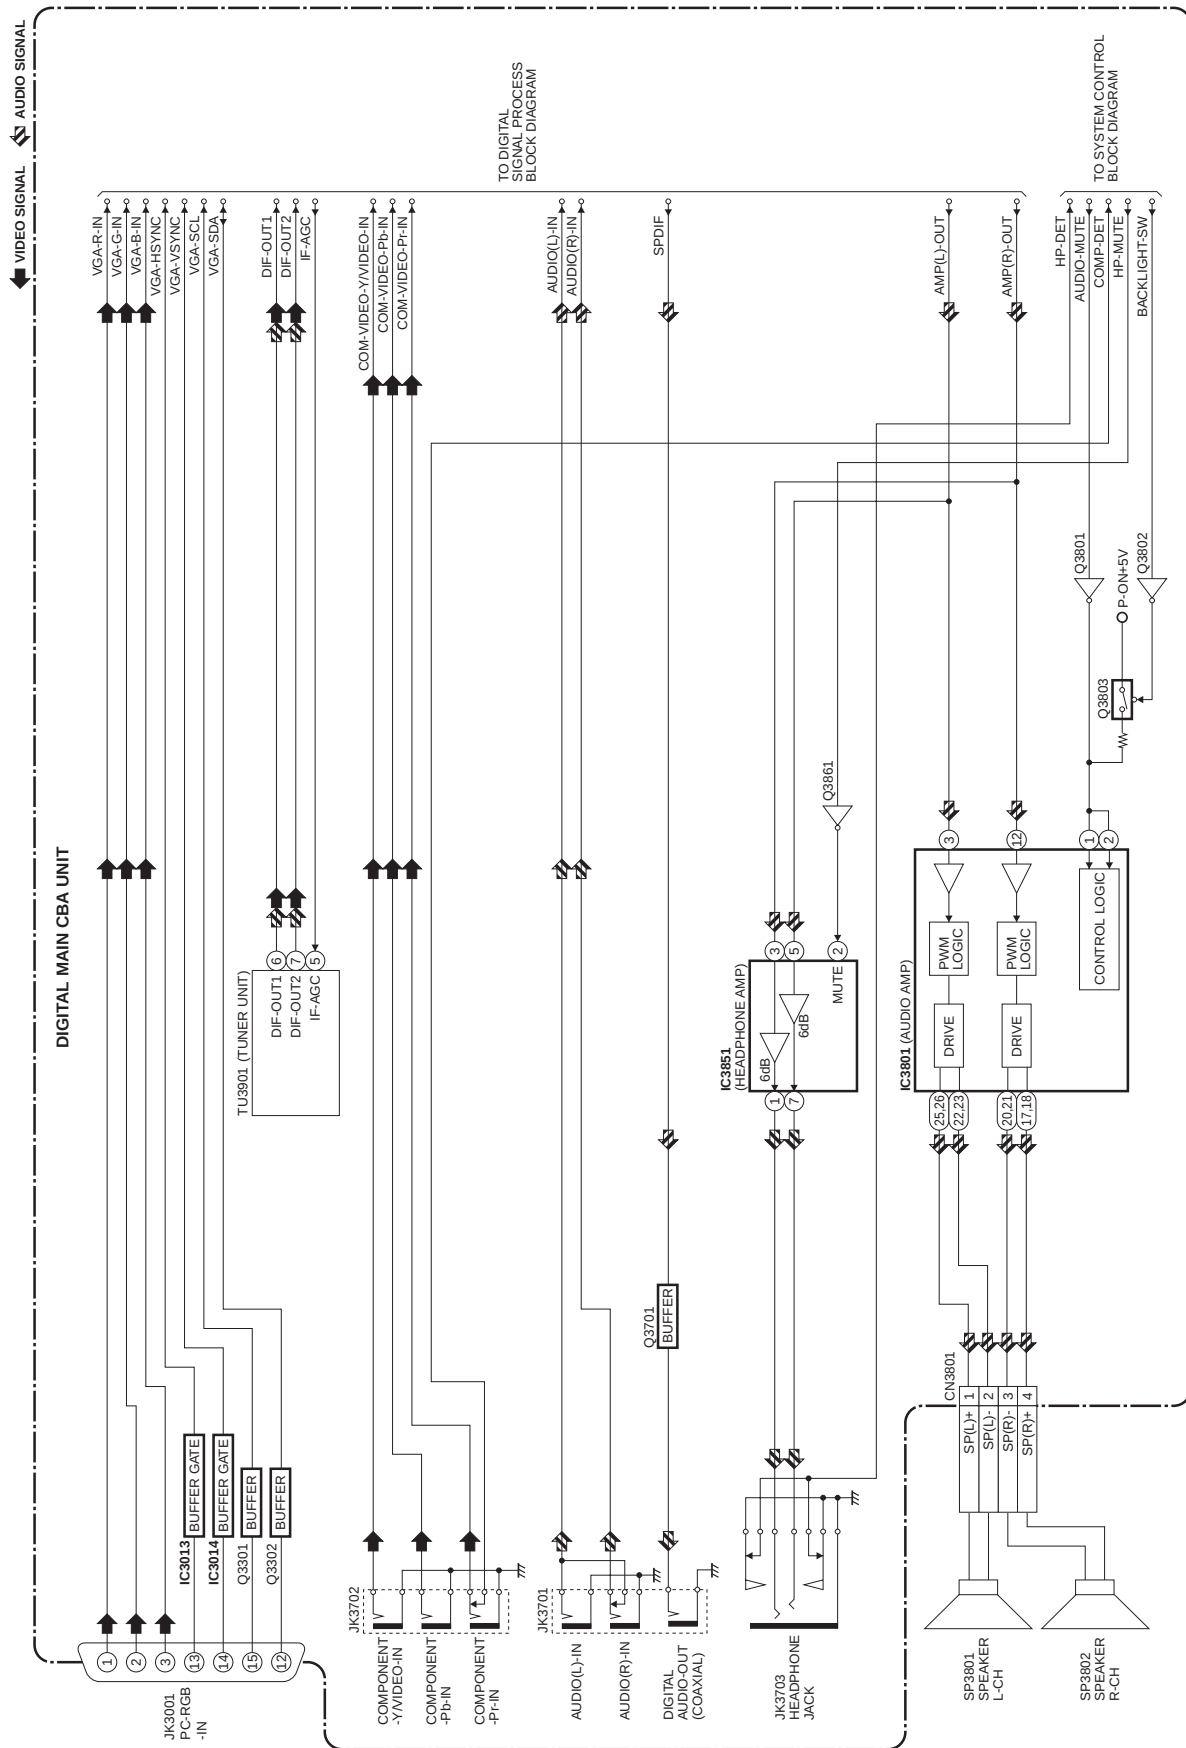

### 3. Digital Signal Process Block Diagram

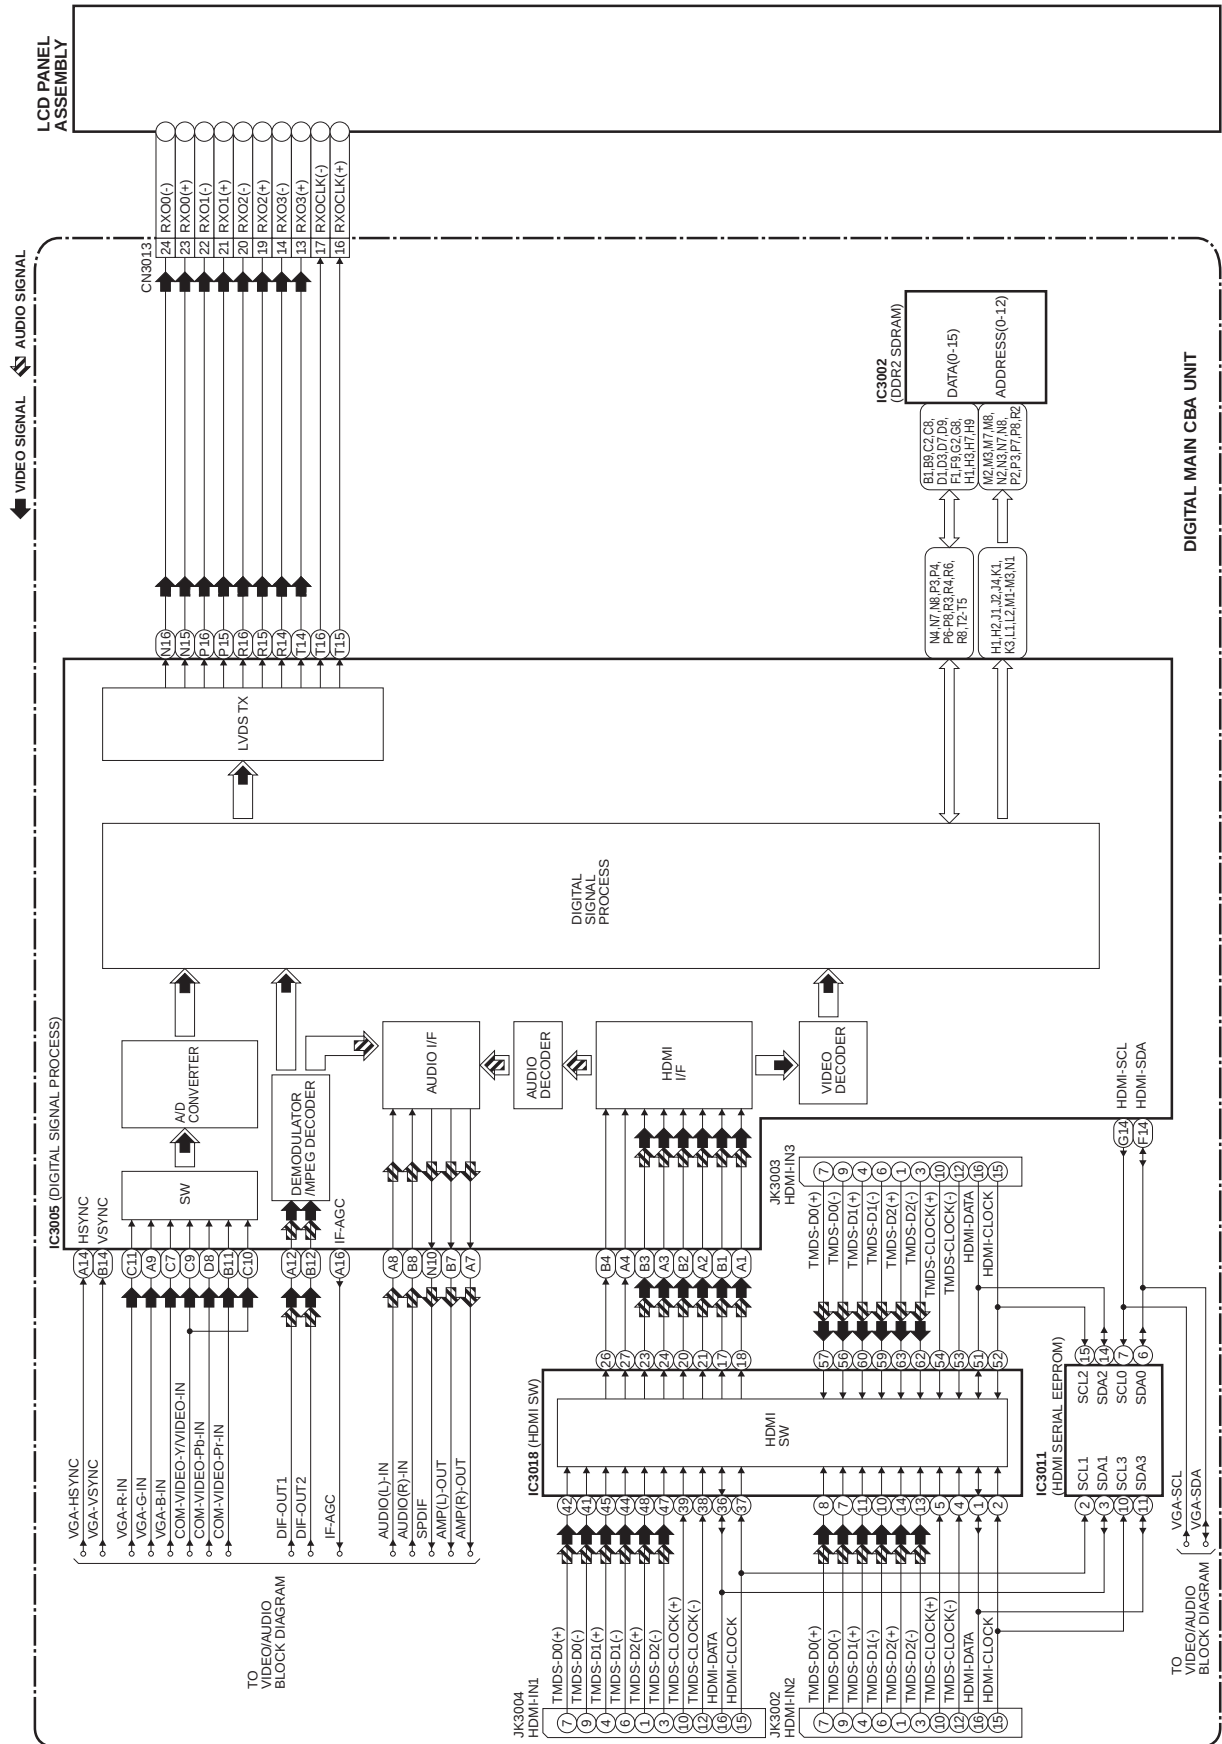

## 4. LED Backlight Drive Block Diagram

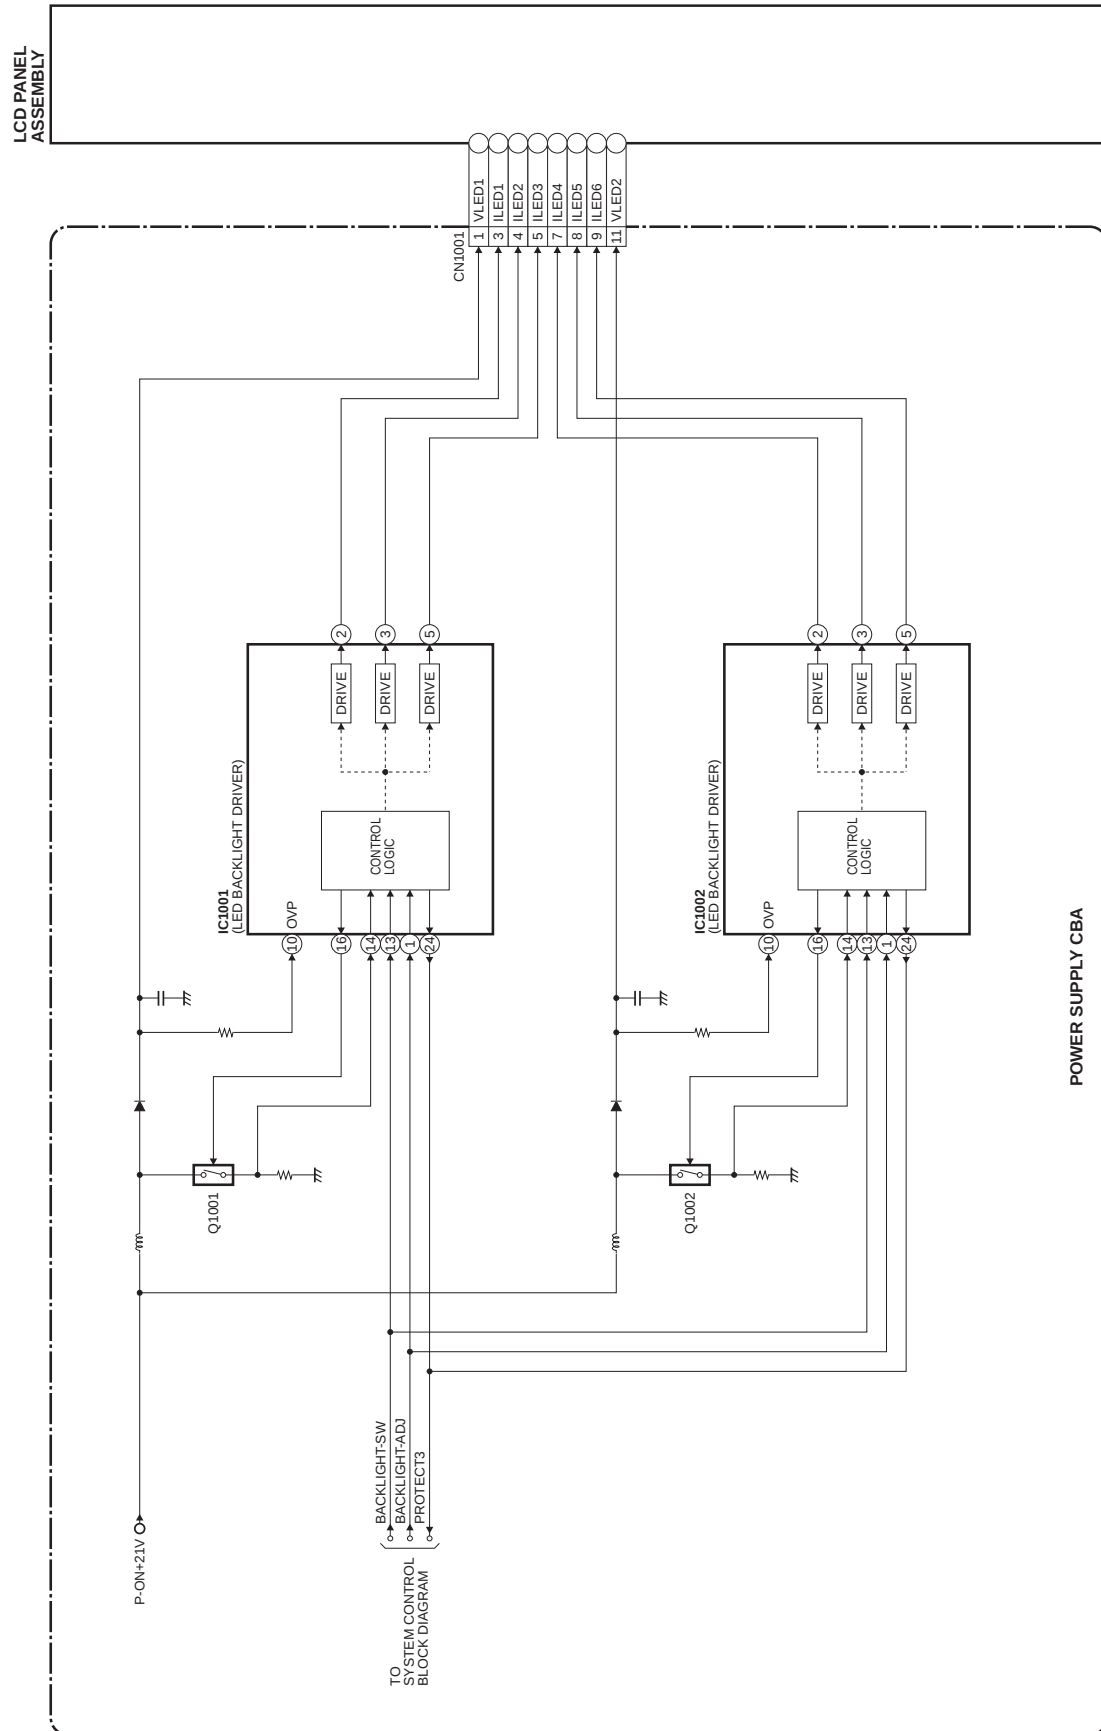


## 5. Power Supply Block Diagram

**CAUTION !** Fixed voltage (or Auto voltage selectable) power supply circuit is used in this unit.  
If Main Fuse (F602) is blown, check to see that all components in the power supply circuit are not defective before you connect the AC plug to the AC power supply.  
Otherwise it may cause some components in the power supply circuit to fail.


**CAUTION ! :** For continued protection against risk of fire, replace only with same type 2.5A, 250V fuse.  
**ATTENTION :** Utiliser un fusible de rechange de même type de 2.5A, 250V.

**NOTE:**  
The voltage for parts in hot circuit is measured using hot GND as a common terminal.

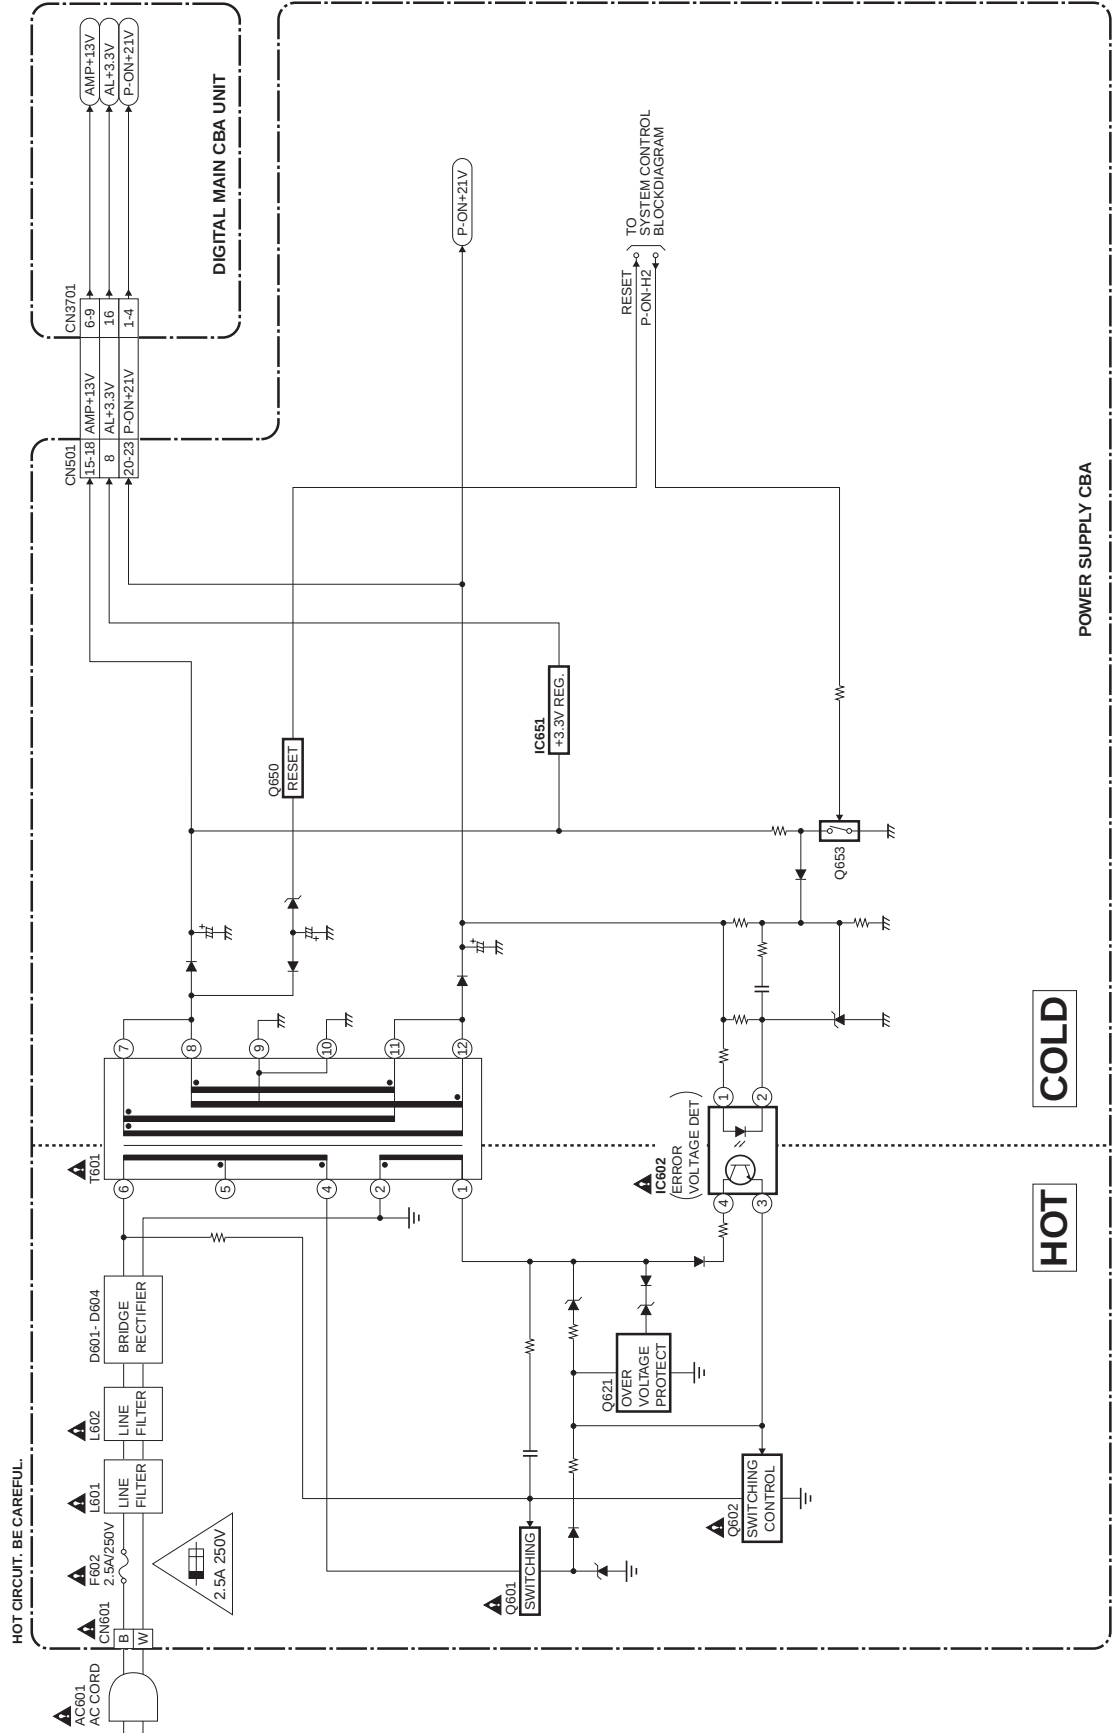


[TYPE C]


## 1. System Control Block Diagram

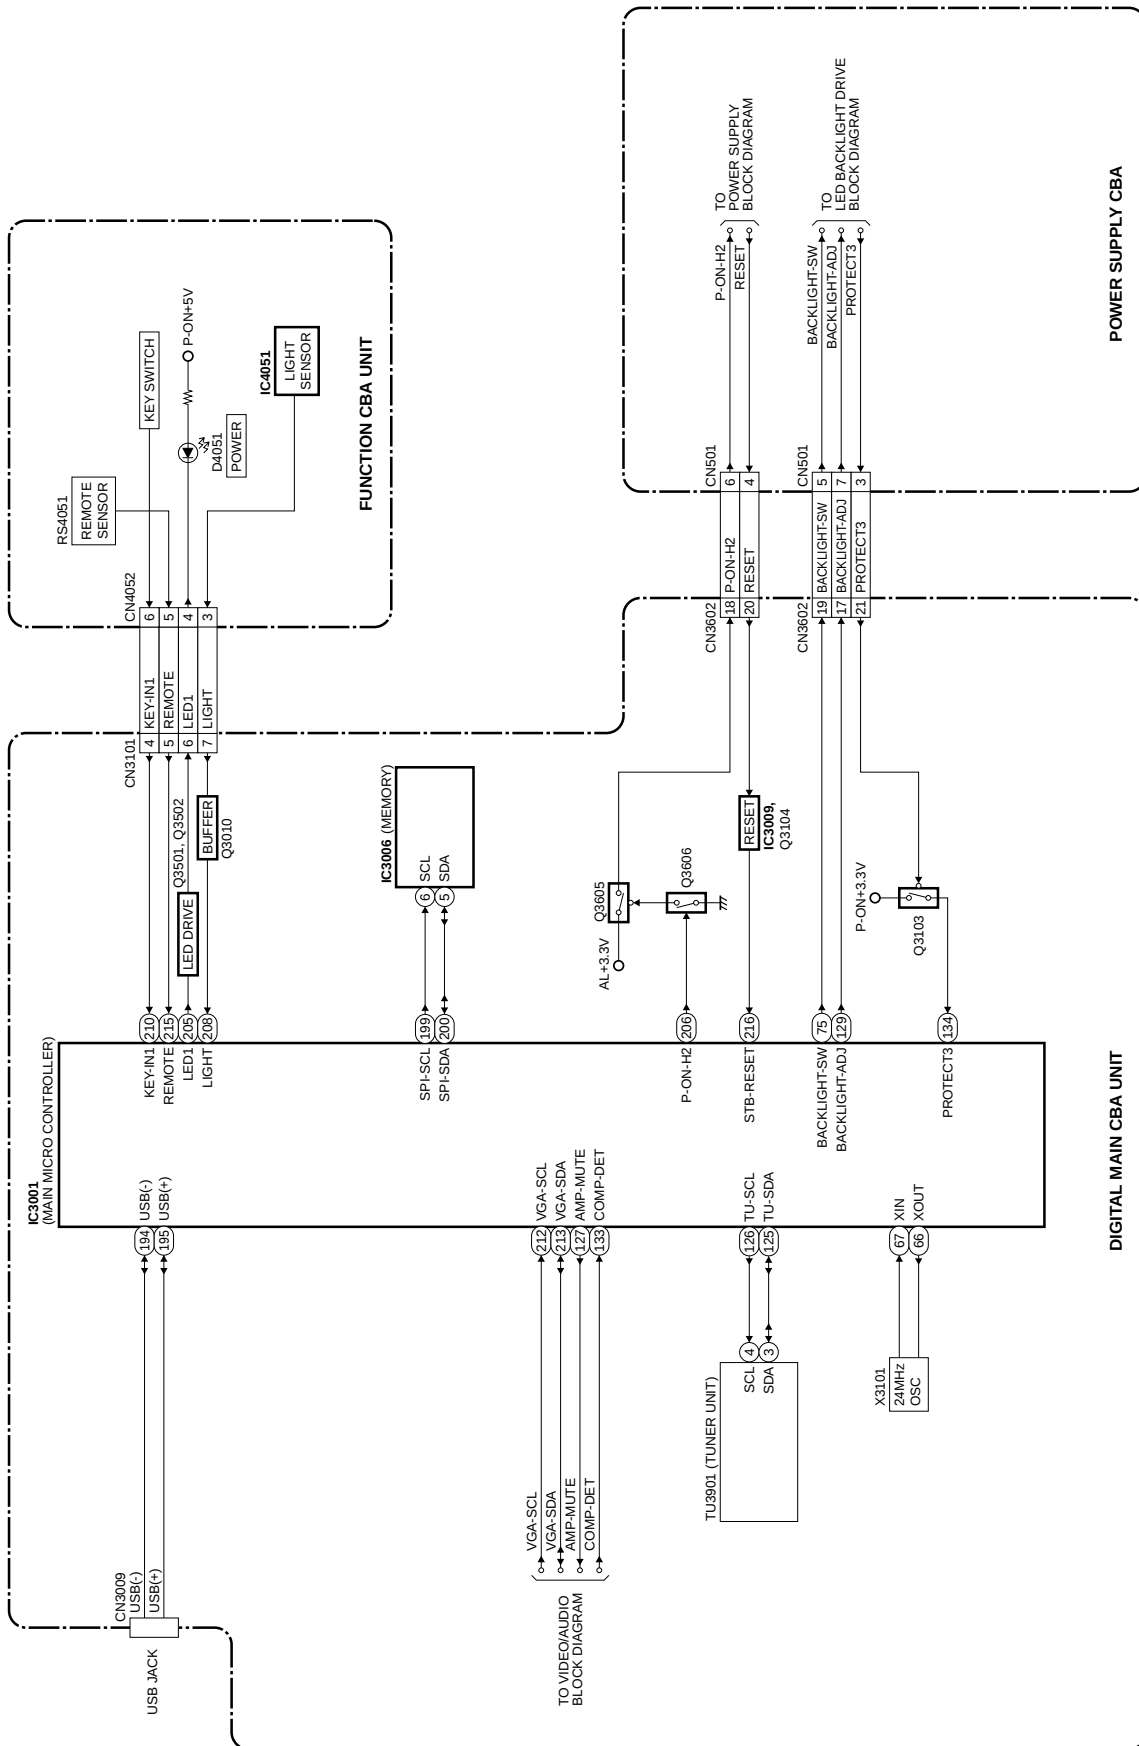


## 2. Video/Audio Block Diagram

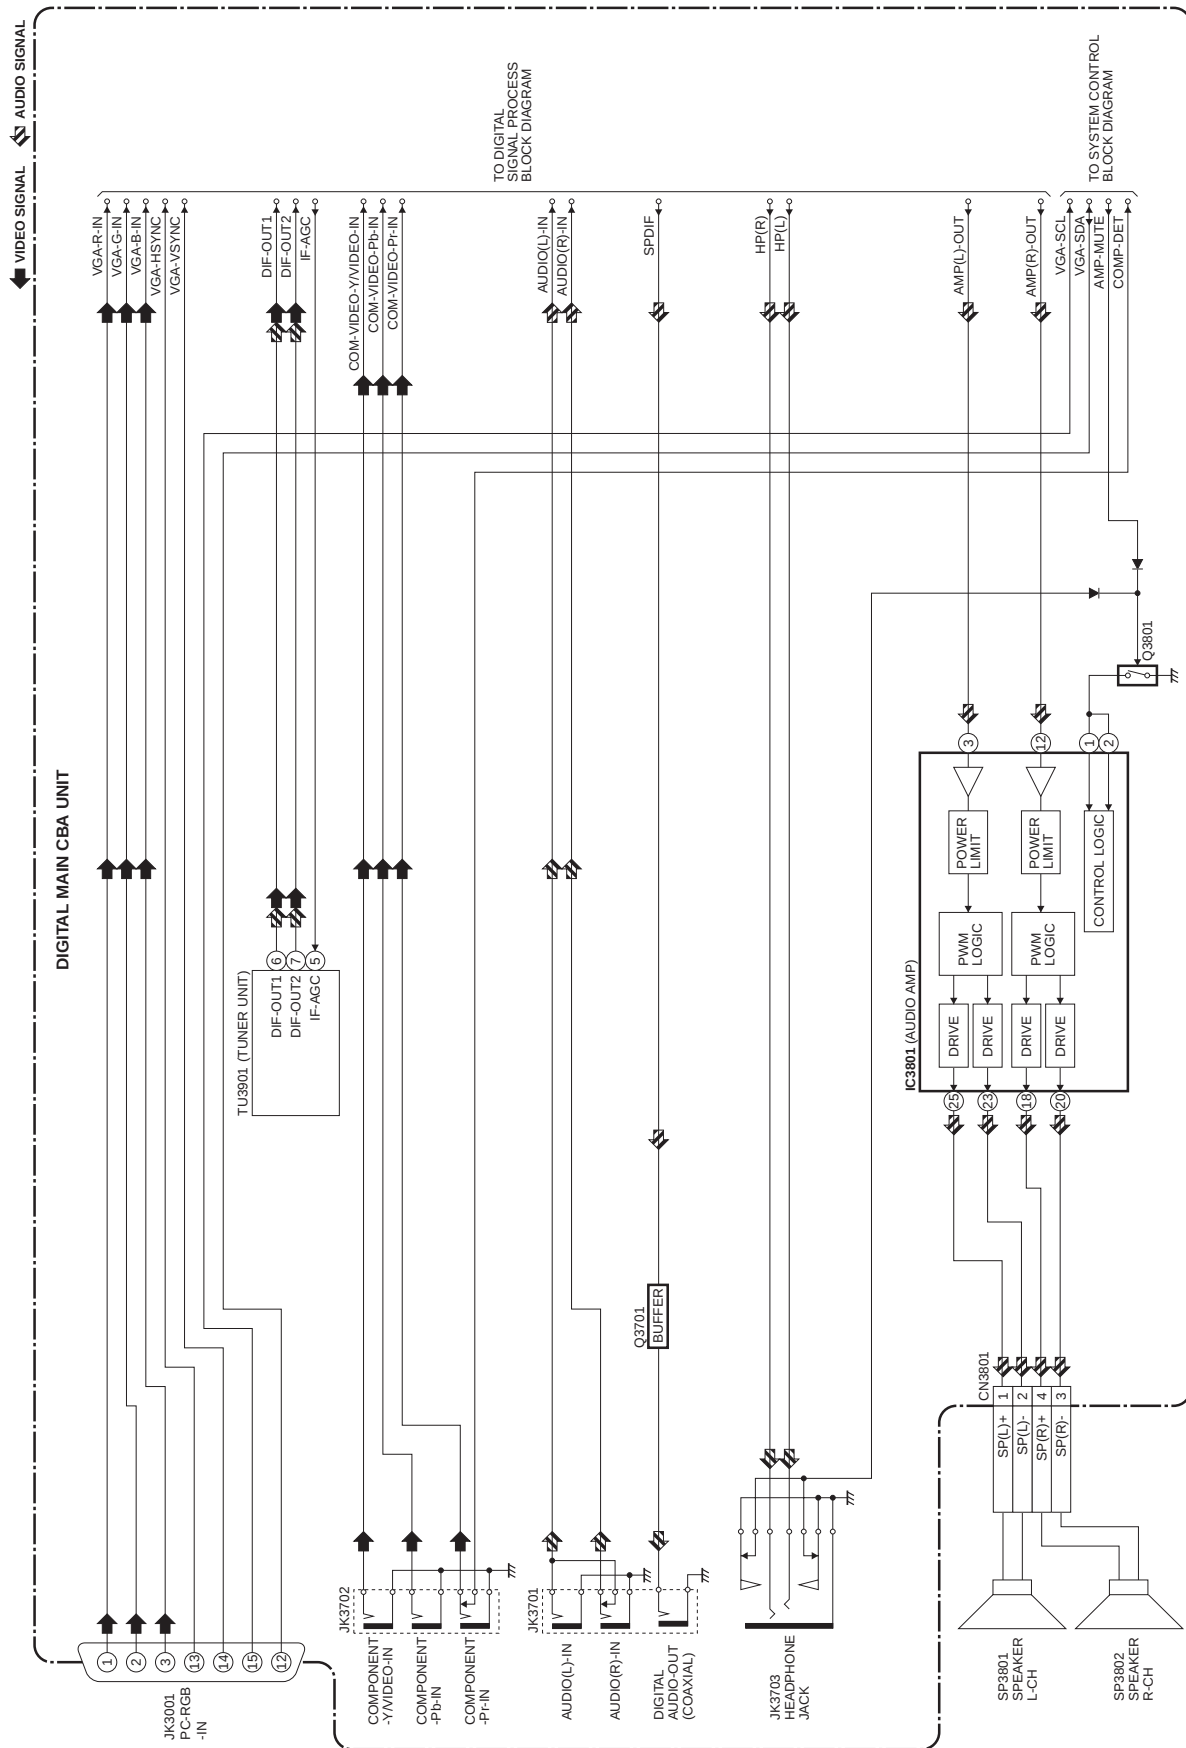

### 3. Digital Signal Process Block Diagram

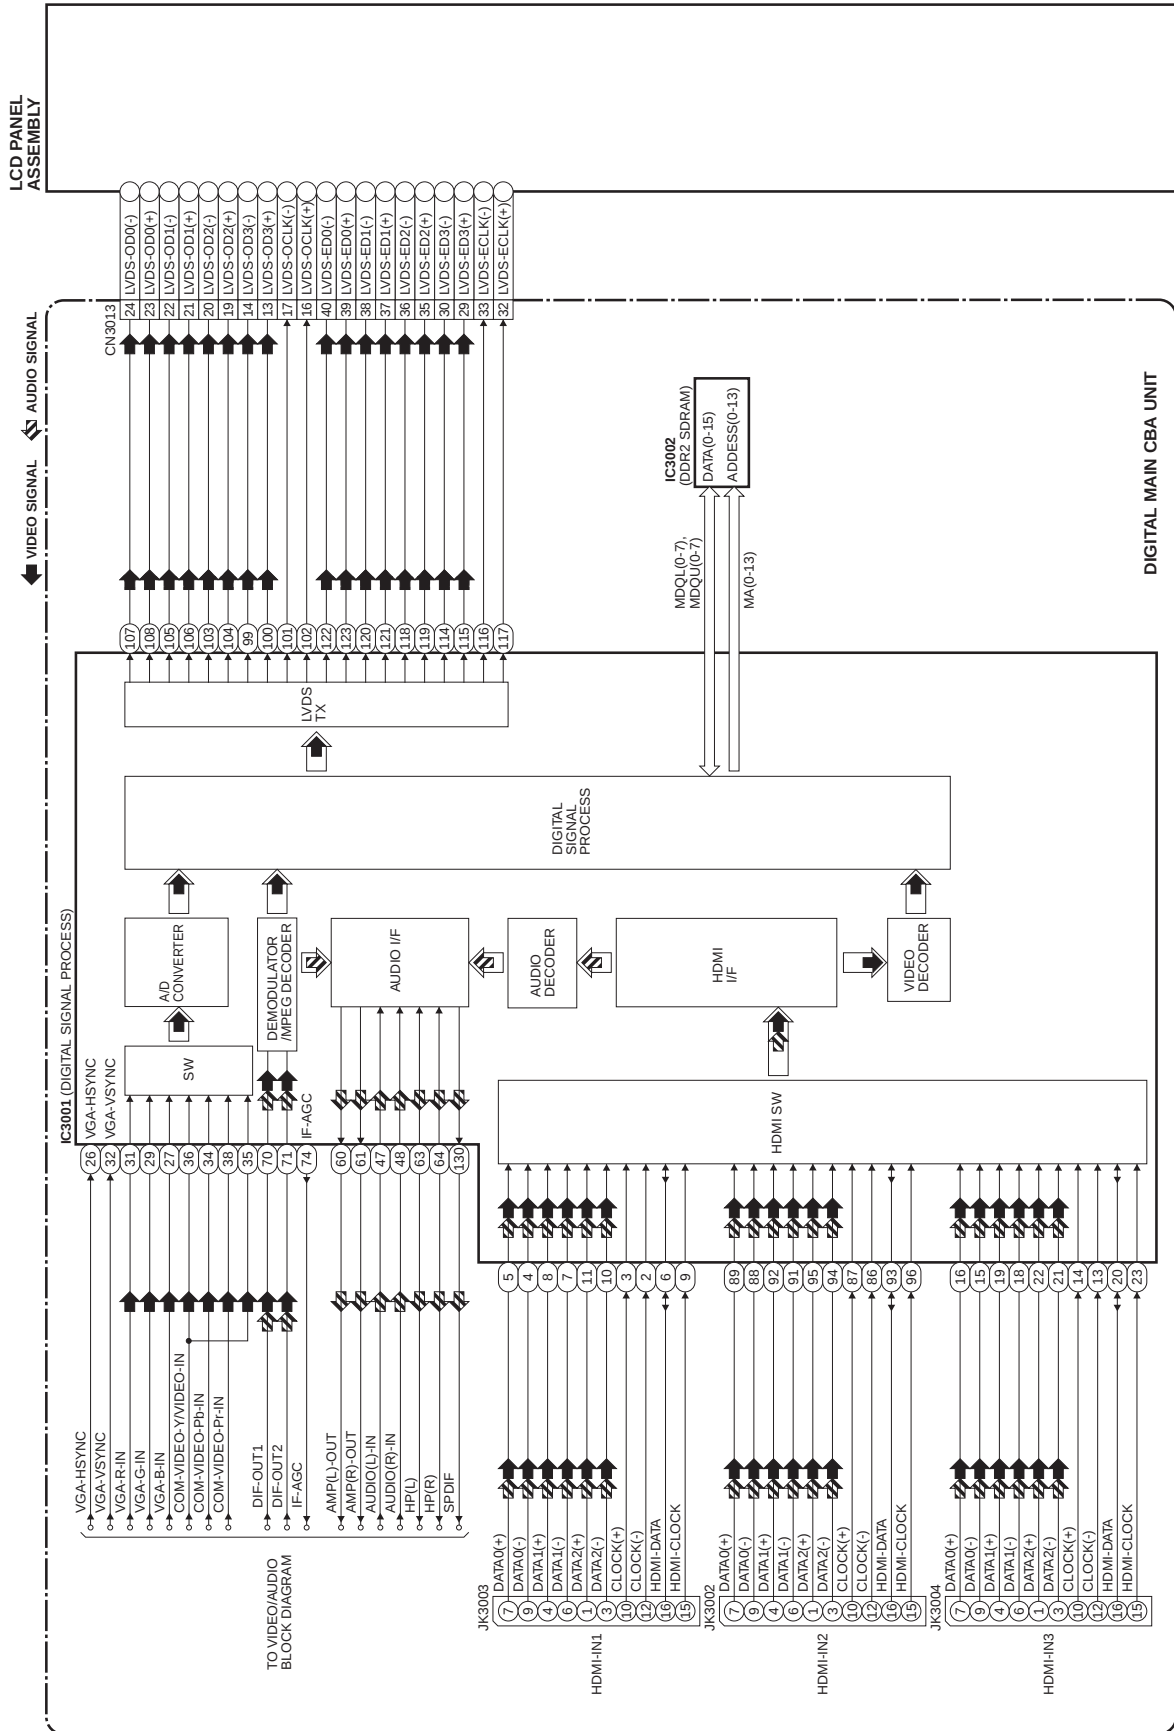

## 4. LED Backlight Drive Block Diagram

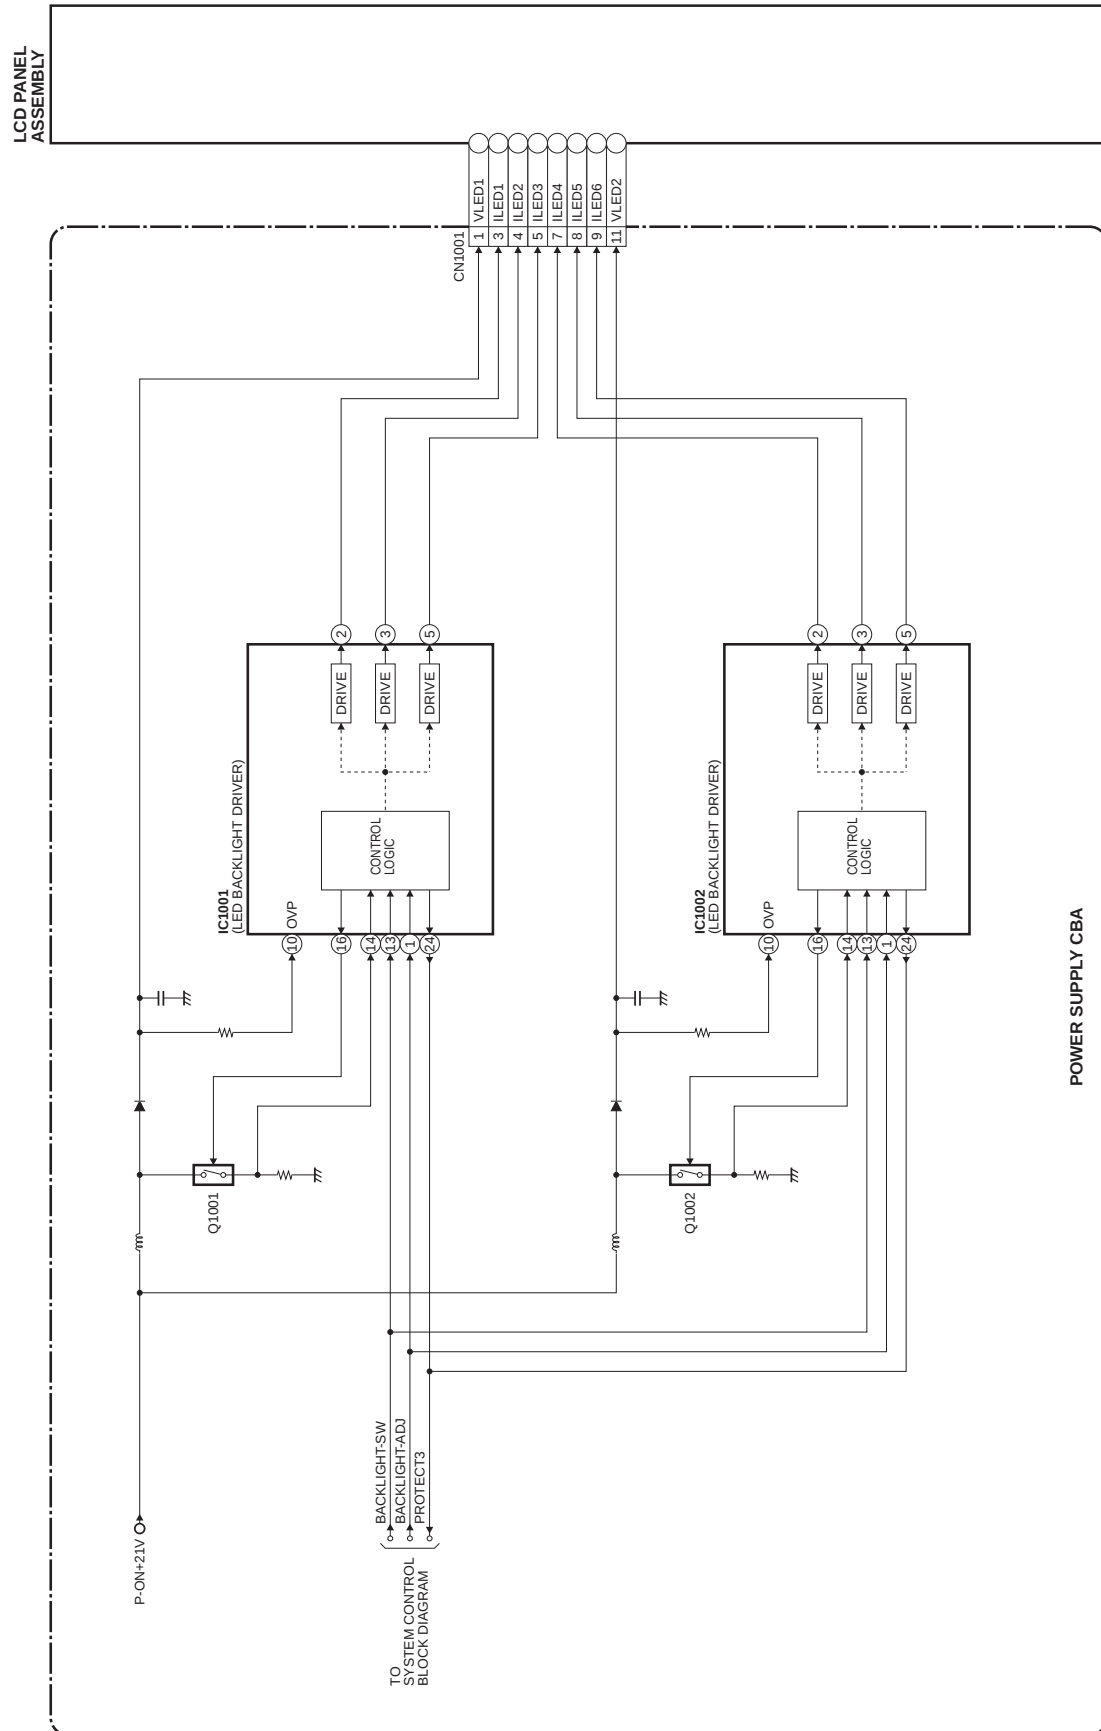


## 5. Power Supply Block Diagram

**CAUTION !** Fixed voltage (or Auto voltage selectable) power supply circuit is used in this unit.  
If Main Fuse (F602) is blown, check to see that all components in the power supply circuit are not defective before you connect the AC plug to the AC power supply.  
Otherwise it may cause some components in the power supply circuit to fail.

**CAUTION ! :** For continued protection against risk of fire, replace only with same type 2.5A, 250V fuse.  
**ATTENTION :** Utiliser un fusible de rechange de même type de 2.5A, 250V.

**NOTE:** The voltage for parts in hot circuit is measured using hot GND as a common terminal.

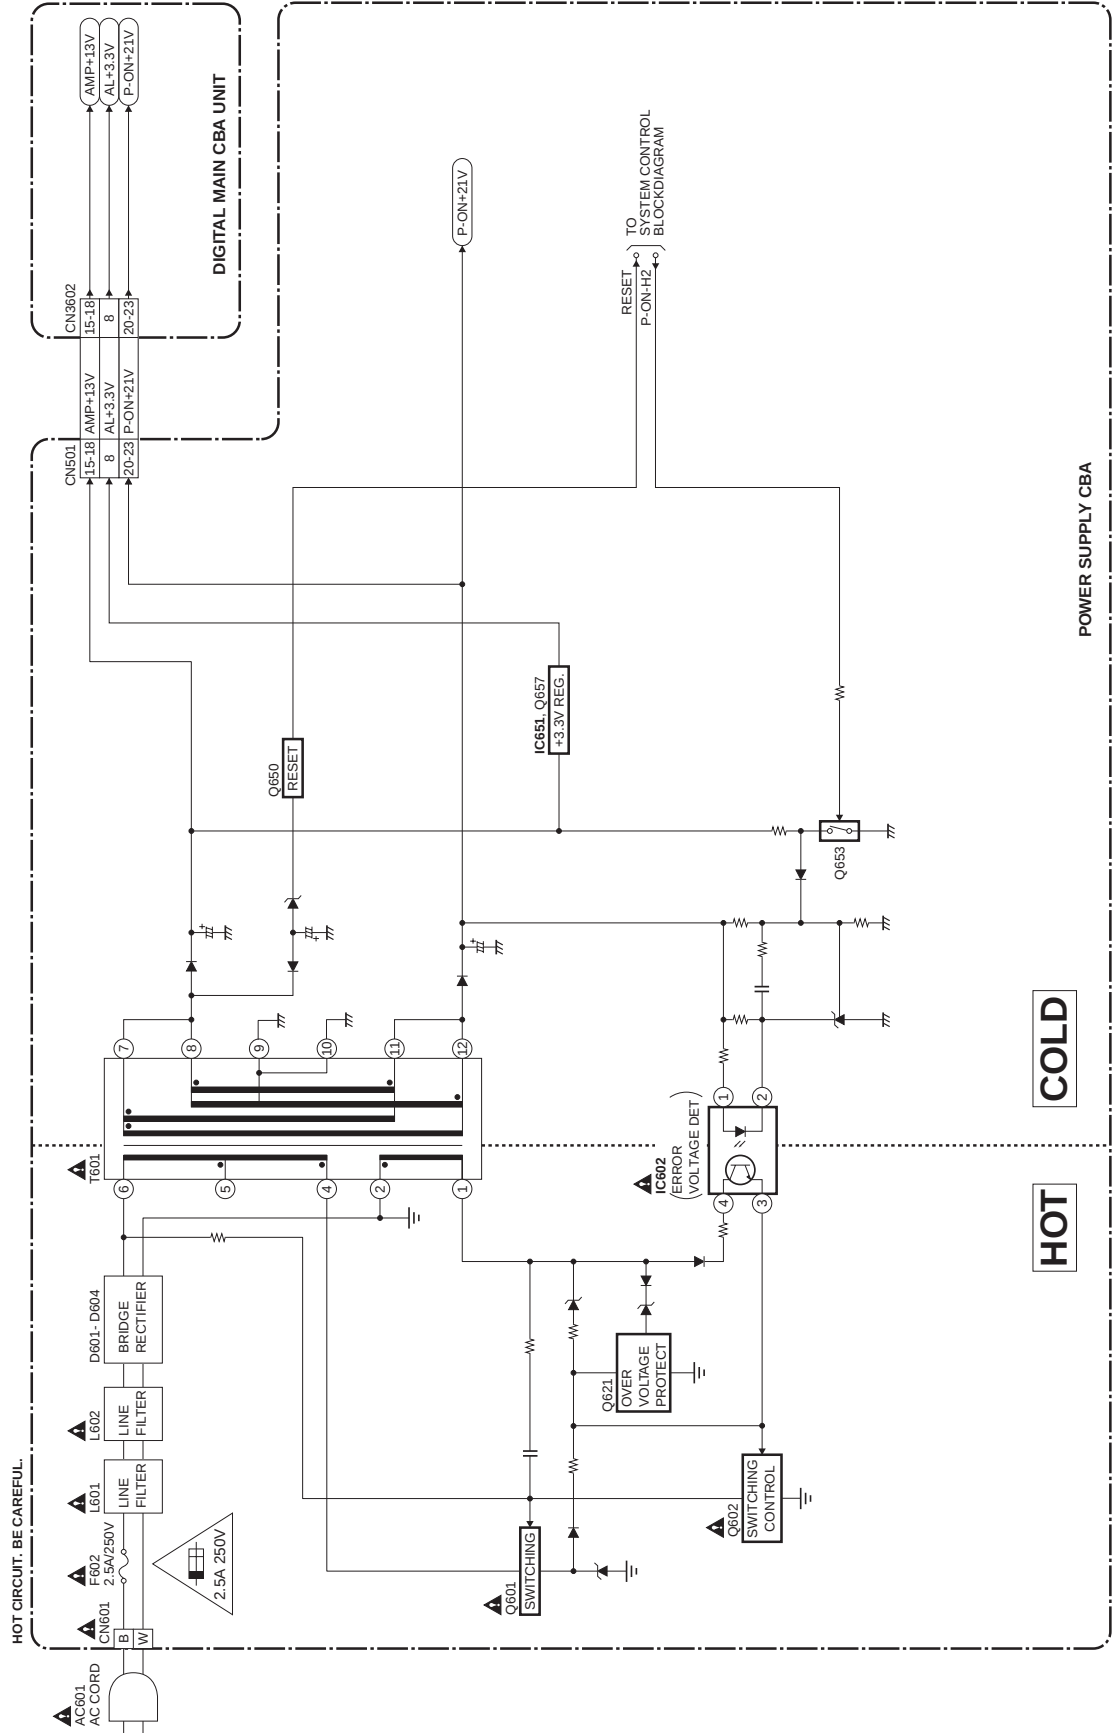

# SCHEMATIC DIAGRAMS / CBA AND TEST POINTS

## Standard Notes

### WARNING

Many electrical and mechanical parts in this chassis have special characteristics. These characteristics often pass unnoticed and the protection afforded by them cannot necessarily be obtained by using replacement components rated for higher voltage, wattage, etc. Replacement parts that have these special safety characteristics are identified in this manual and its supplements; electrical components having such features are identified by the mark "▲" in the schematic diagram and the parts list. Before replacing any of these components, read the parts list in this manual carefully. The use of substitute replacement parts that do not have the same safety characteristics as specified in the parts list may create shock, fire, or other hazards.

### Notes:

1. Do not use the part number shown on these drawings for ordering. The correct part number is shown in the parts list, and may be slightly different or amended since these drawings were prepared.
2. All resistance values are indicated in ohms ( $K = 10^3$ ,  $M = 10^6$ ).
3. Resistor wattages are 1/4W or 1/6W unless otherwise specified.
4. All capacitance values are indicated in  $\mu F$  ( $P = 10^{-6} \mu F$ ).
5. All voltages are DC voltages unless otherwise specified.
6. This schematic diagrams are masterized version that should cover the entire PL13.11 chassis models.  
Thus some parts in detail illustrated on this schematic diagrams may vary depend on the model within the PL13.11 chassis.  
Please refer to the parts lists for each models.
7. The Circuit Board layout illustrated on this service manual is the latest version for this chassis at the moment of making this service manual.  
Depend on the mass production date of each model, the actual layout of each Board may differ slightly from this version.

## LIST OF CAUTION, NOTES, AND SYMBOLS USED IN THE SCHEMATIC DIAGRAMS ON THE FOLLOWING PAGES:

### 1. CAUTION:

**CAUTION:** FOR CONTINUED PROTECTION AGAINST RISK OF FIRE, REPLACE ONLY WITH SAME TYPE\_A,\_V FUSE.

**ATTENTION:** UTILISER UN FUSIBLE DE RECHANGE DE MÊME TYPE DE\_A,\_V.

### 2. CAUTION:

Fixed Voltage (or Auto voltage selectable) power supply circuit is used in this unit.


If Main Fuse (F602) is blown, first check to see that all components in the power supply circuit are not defective before you connect the AC plug to the AC power supply. Otherwise it may cause some components in the power supply circuit to fail.

### 3. Note:

1. Do not use the part number shown on the drawings for ordering. The correct part number is shown in the parts list, and may be slightly different or amended since the drawings were prepared.
2. To maintain original function and reliability of repaired units, use only original replacement parts which are listed with their part numbers in the parts list section of the service manual.

### 4. Voltage indications on the schematics are as shown below:

Plug the TV power cord into a standard AC outlet.:

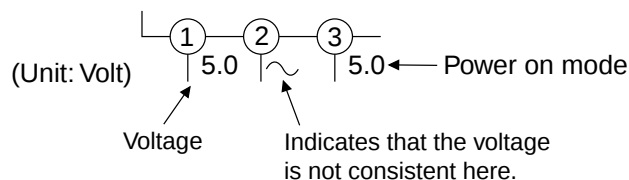


### 5. How to read converged lines

1-D3  
 ↑ Distinction Area  
 Line Number  
 (1 to 3 digits)

Examples:

1. "1-D3" means that line number "1" goes to the line number "1" of the area "D3".
2. "1-B1" means that line number "1" goes to the line number "1" of the area "B1".

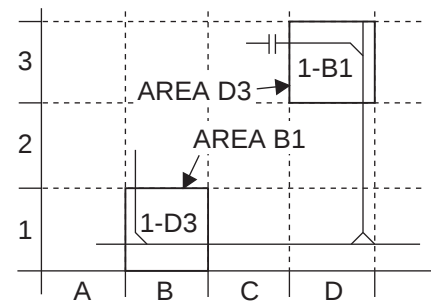

### 6. Test Point Information

⊕ : Indicates a test point with a jumper wire across a hole in the PCB.

□→ : Used to indicate a test point with a component lead on foil side.

⊗ : Used to indicate a test point with no test pin.


● : Used to indicate a test point with a test pin.

The reference number of parts on Schematic Diagrams/CBA can be retrieved by application search function.

# Power Supply 1 Schematic Diagram

**CAUTION !**


Fixed voltage (or Auto voltage selectable) power supply circuit is used in this unit.  
If Main Fuse (F602) is blown , check to see that all components in the power supply circuit are not defective before you connect the AC plug to the AC power supply.  
Otherwise it may cause some components in the power supply circuit to fail.




**CAUTION ! :** For continued protection against risk of fire,  
replace only with same type 2.5A, 250V fuse.  
**ATTENTION :** Utiliser un fusible de rechange de même type de 2.5A, 250V.

**NOTE:**


The voltage for parts in hot circuit is measured using  
hot GND as a common terminal.

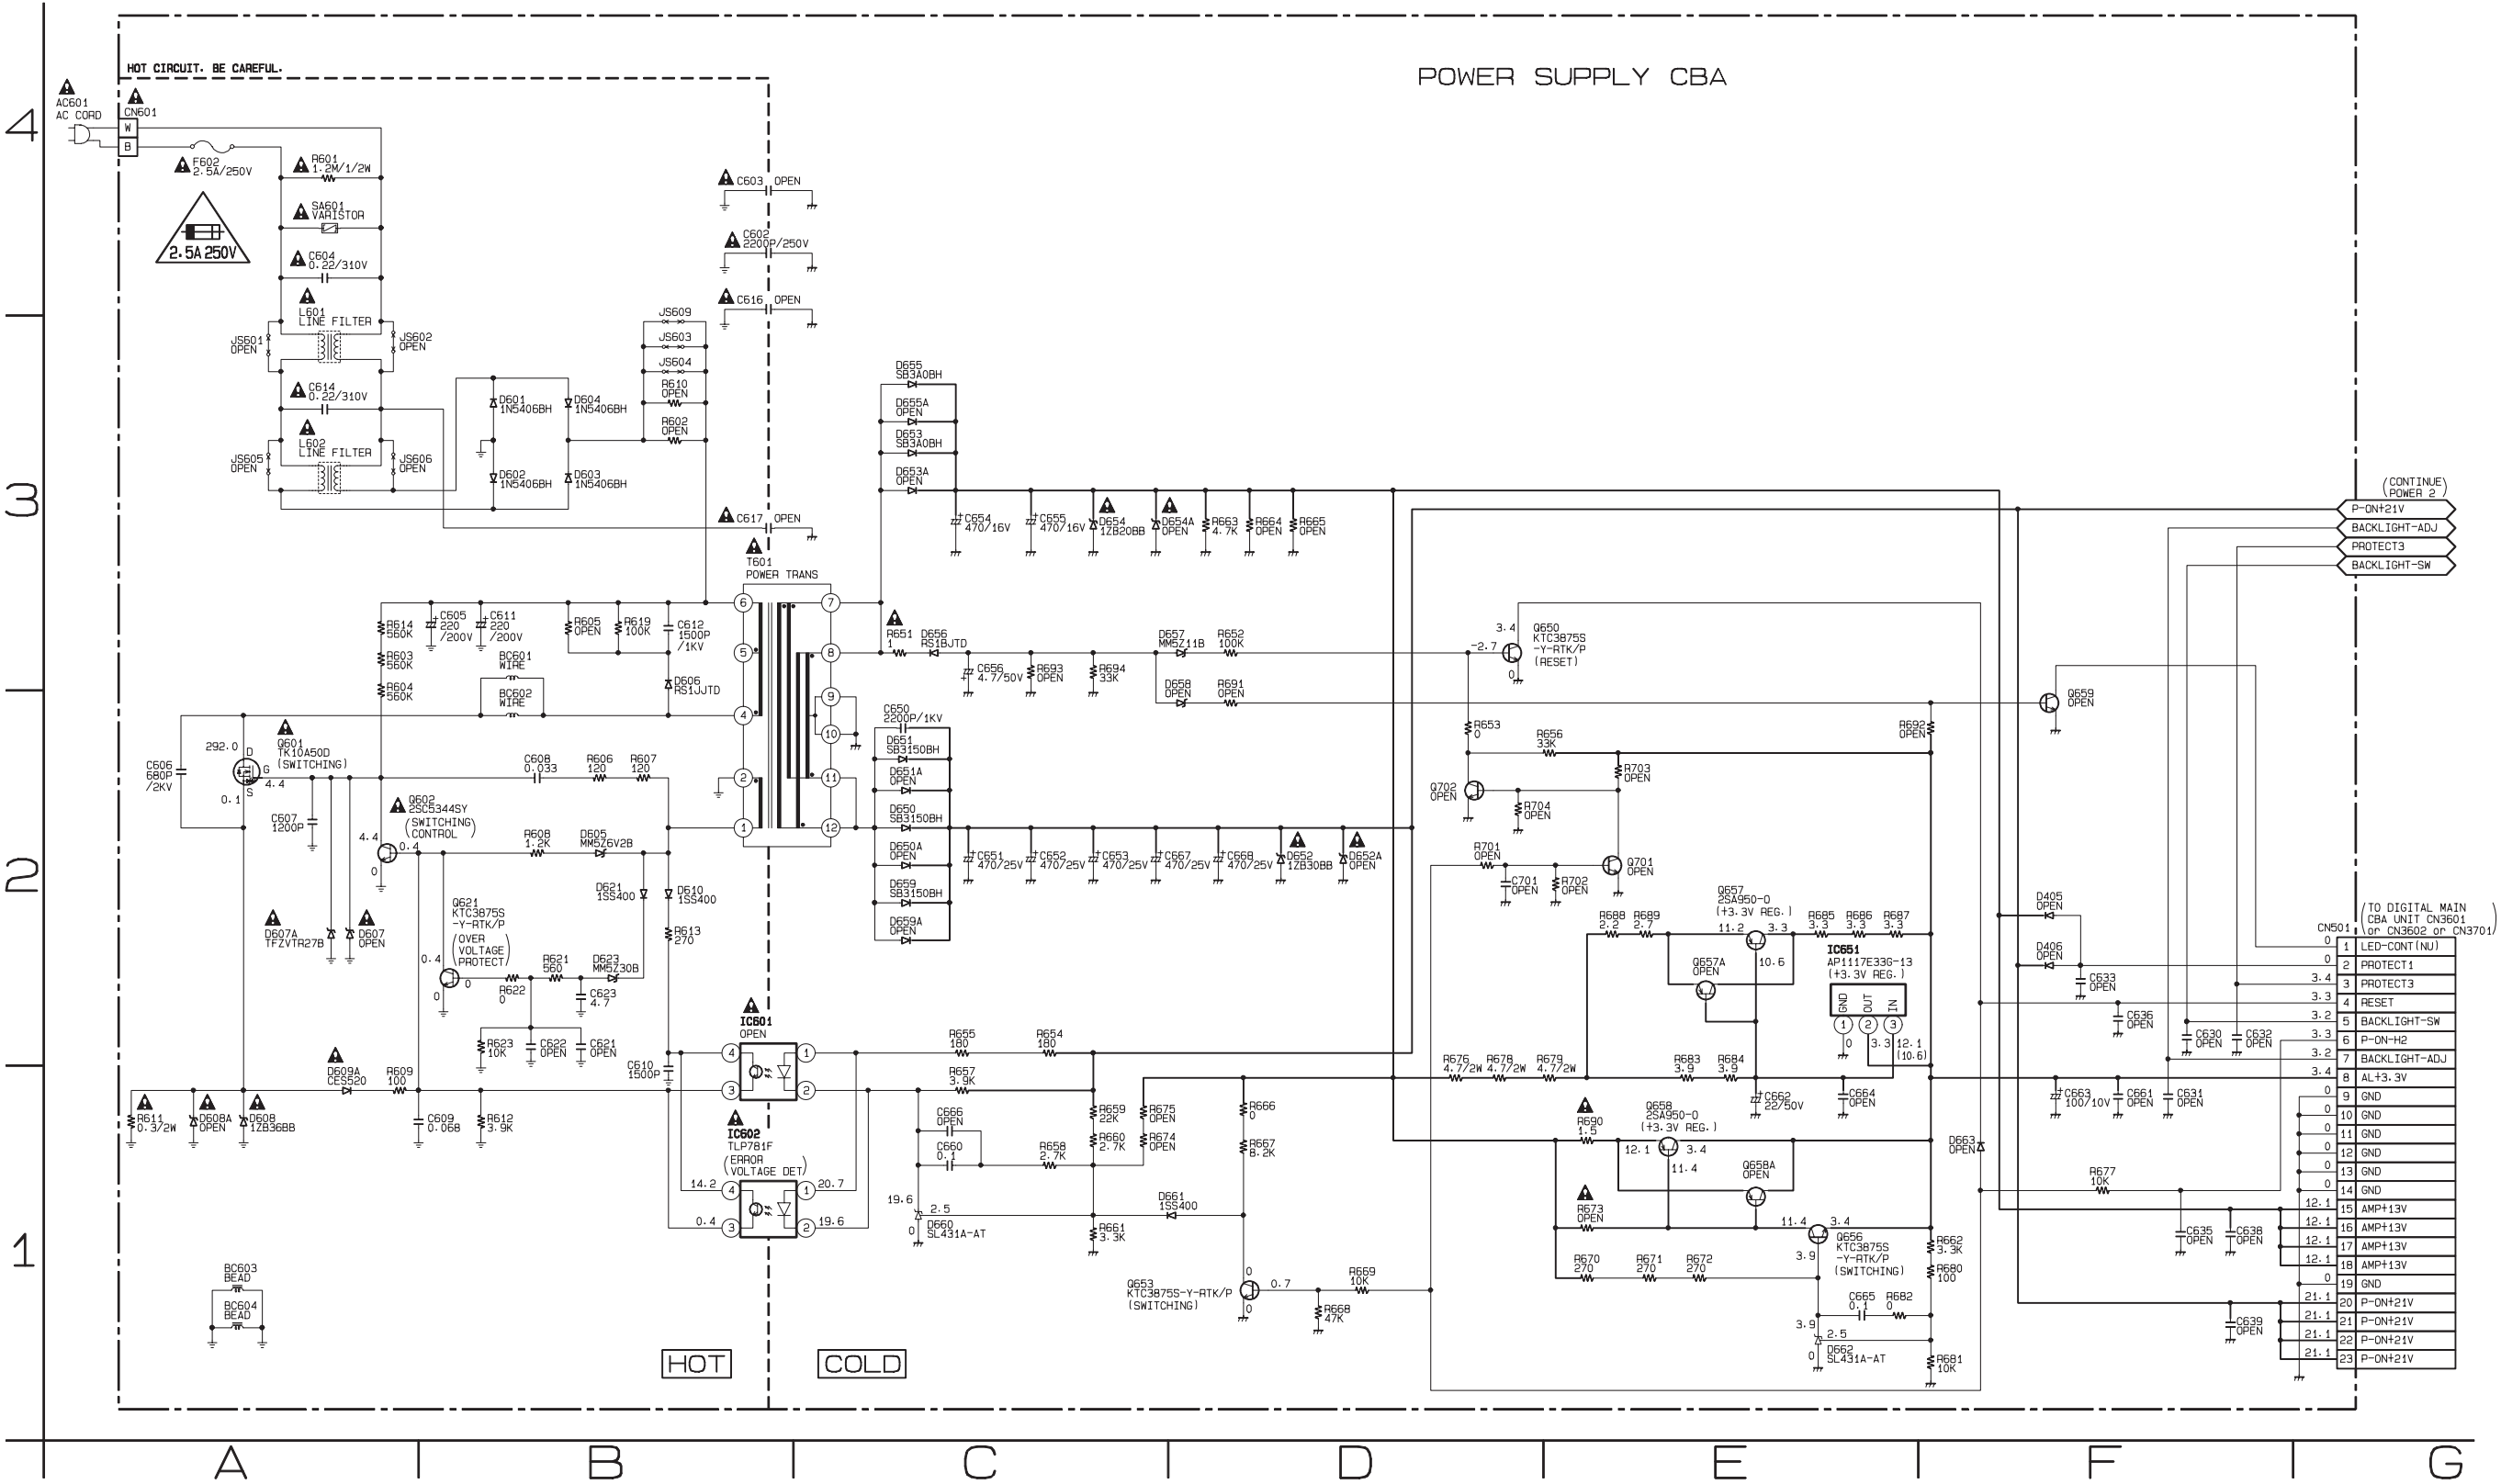

Power Supply 2 Schematic Diagram

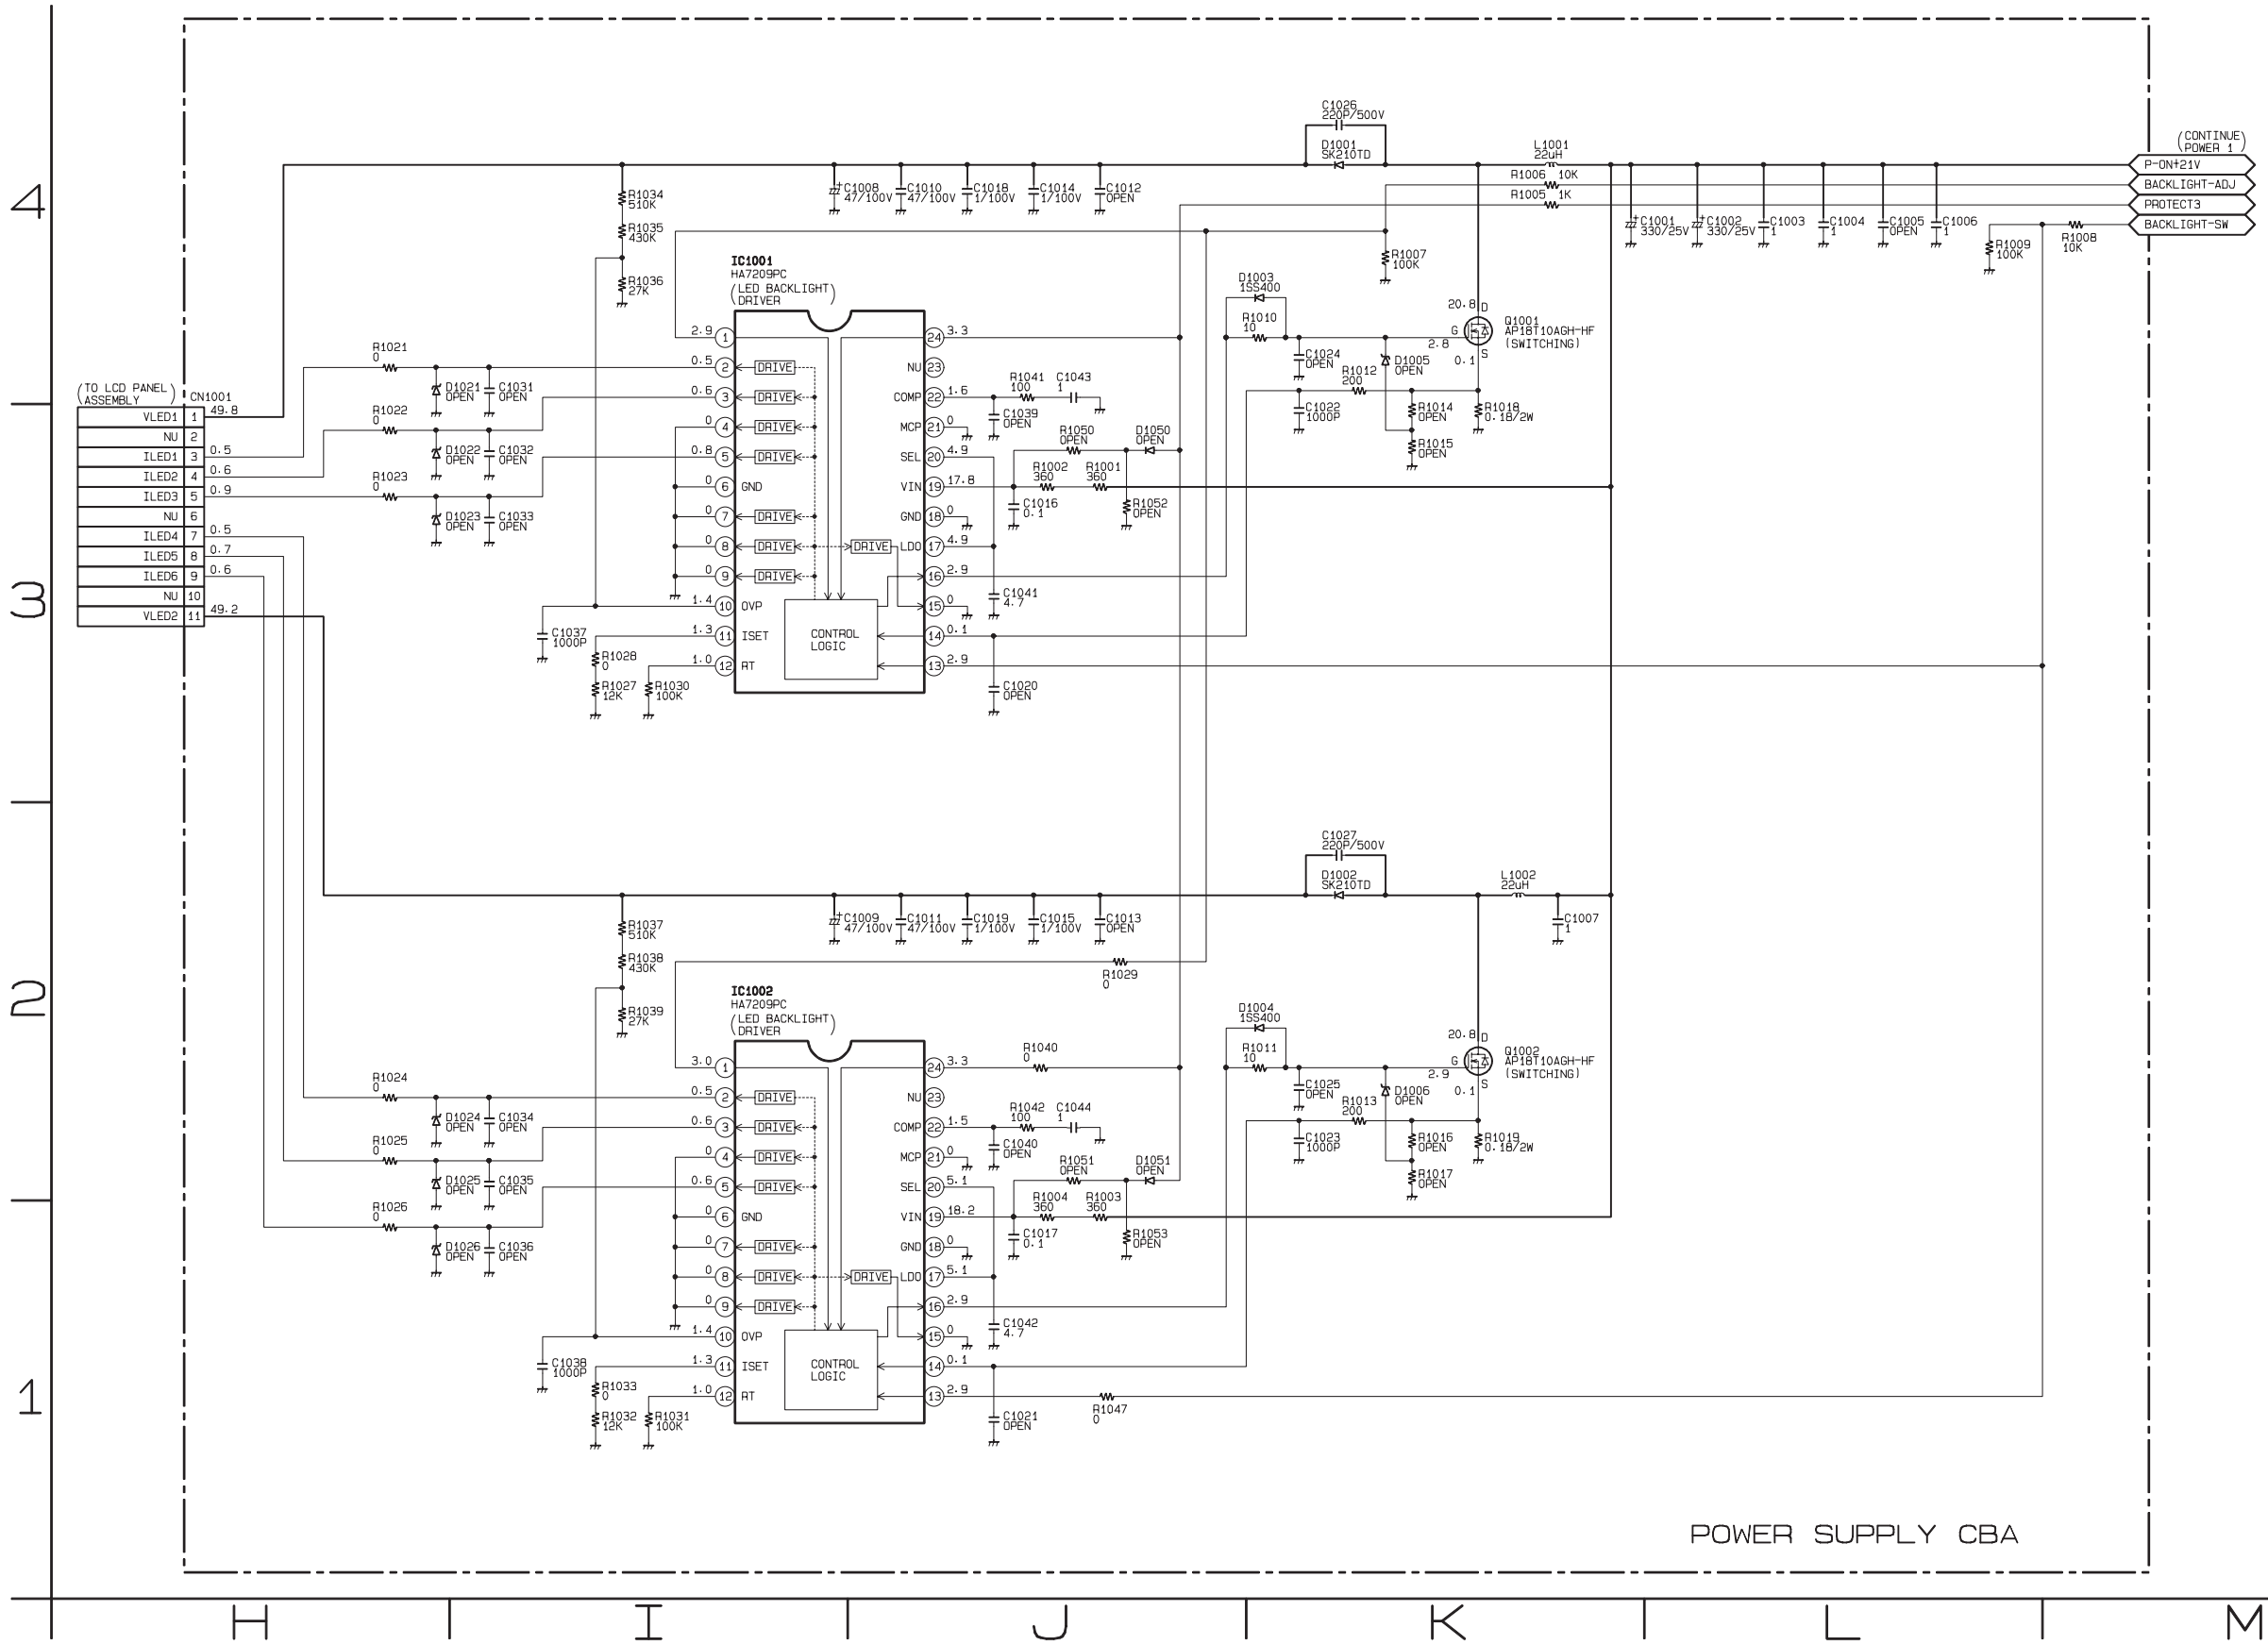

Function Schematic Diagram

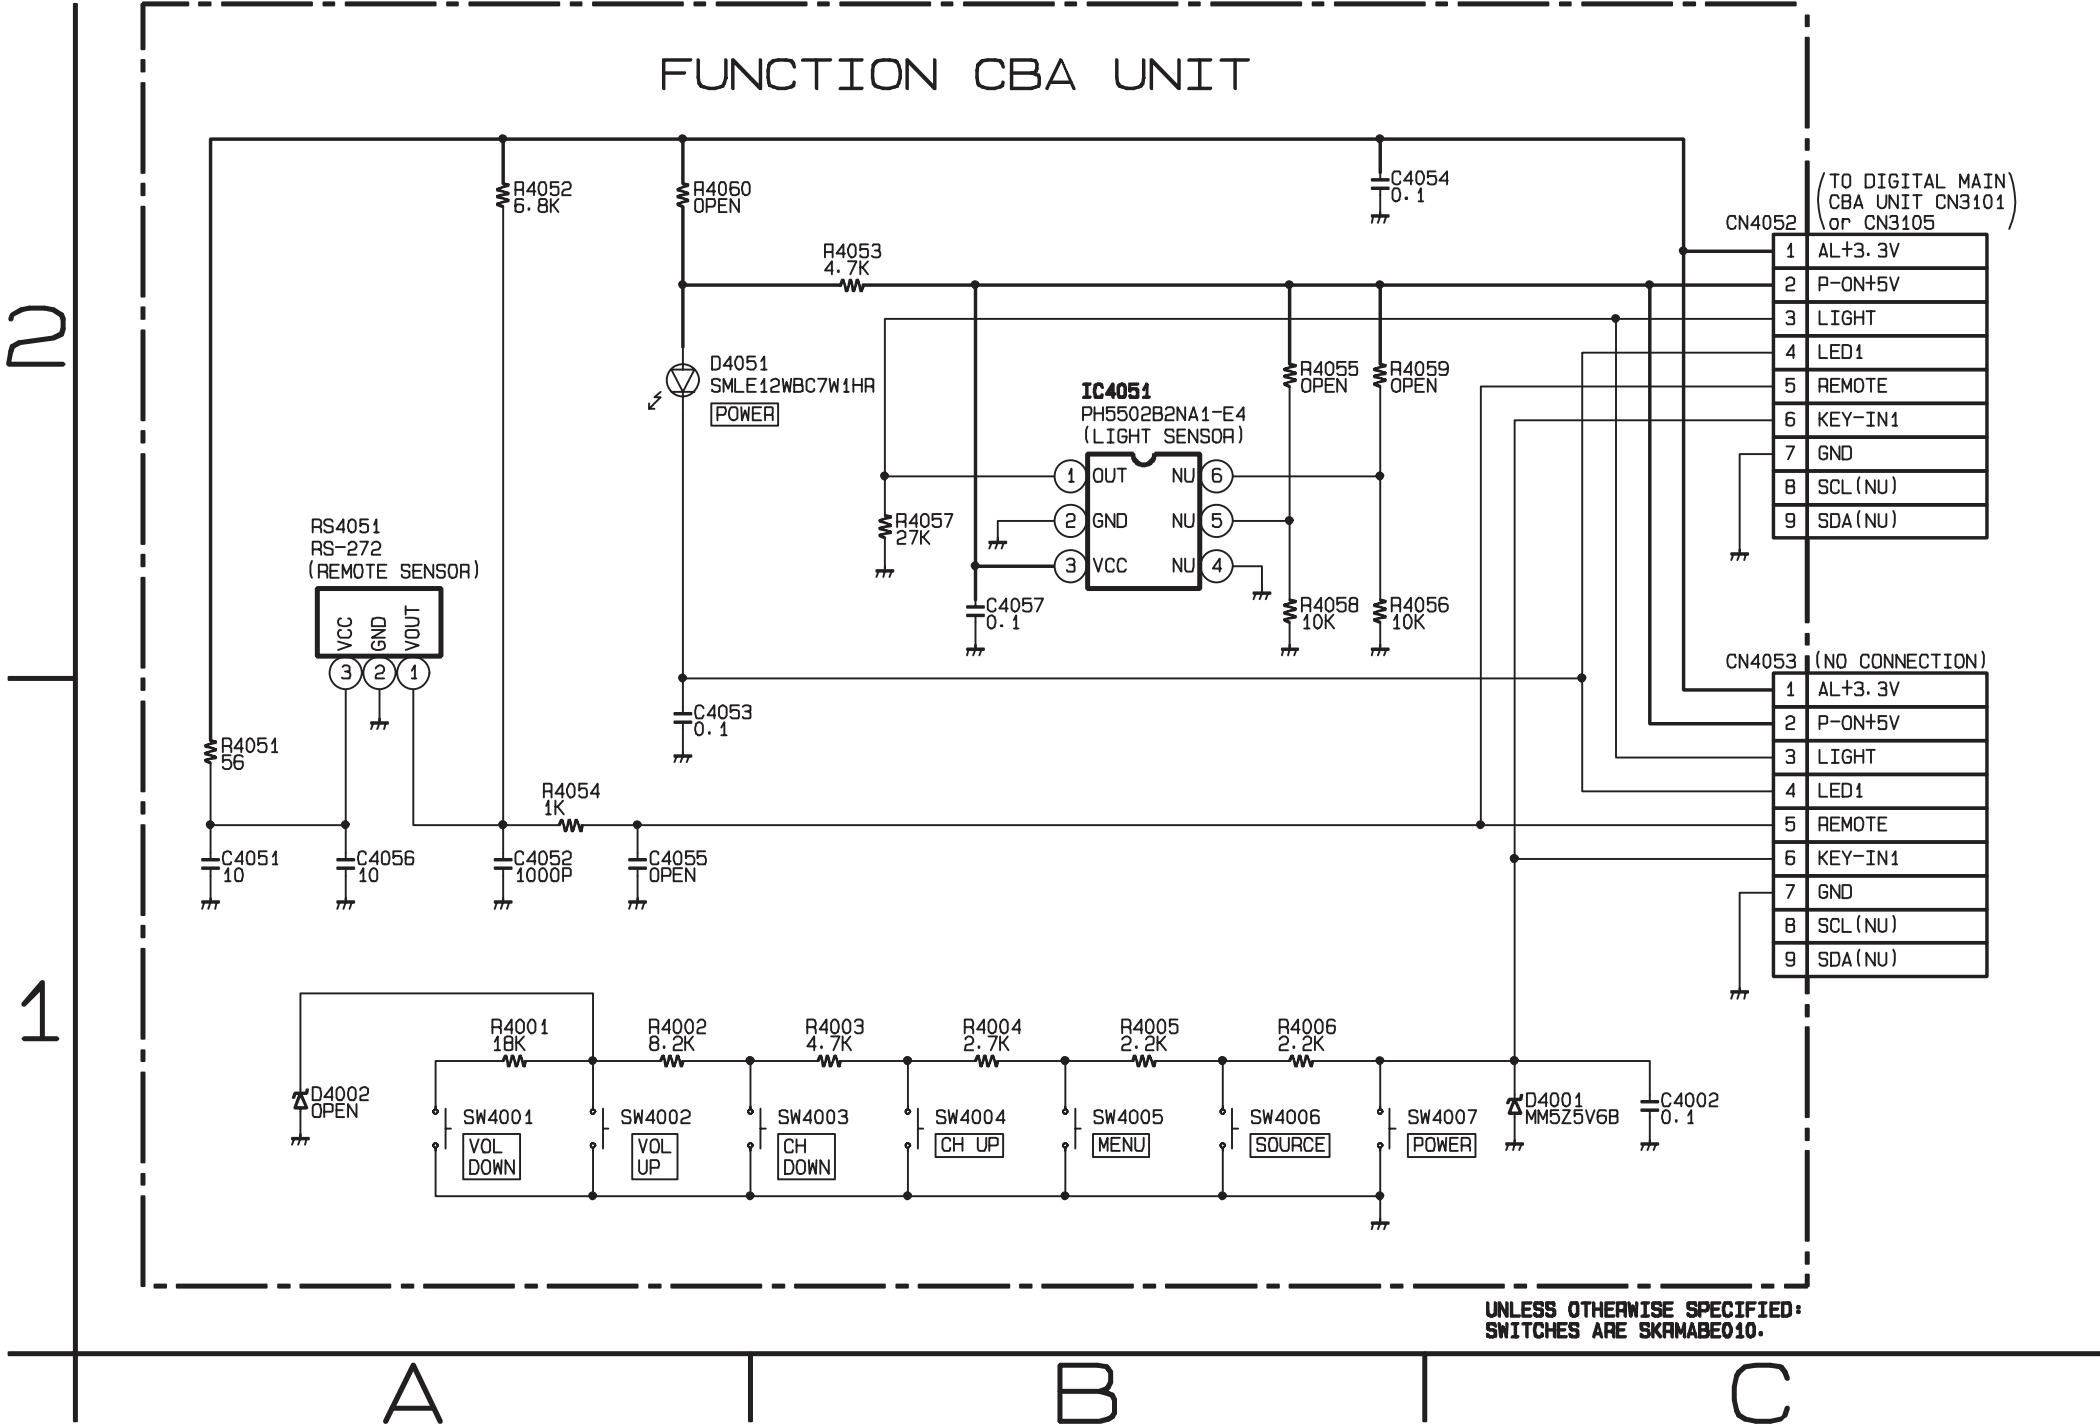


### Digital Main 1 Schematic Diagram [TYPE A]


**\*1 NOTE:**

The order of pins shown in this diagram is different from that of actual IC3101.

IC3101 is divided into seven and shown as IC3101 (1/7) ~ IC3101 (7/7) in this Digital Main Schematic Diagram Section.

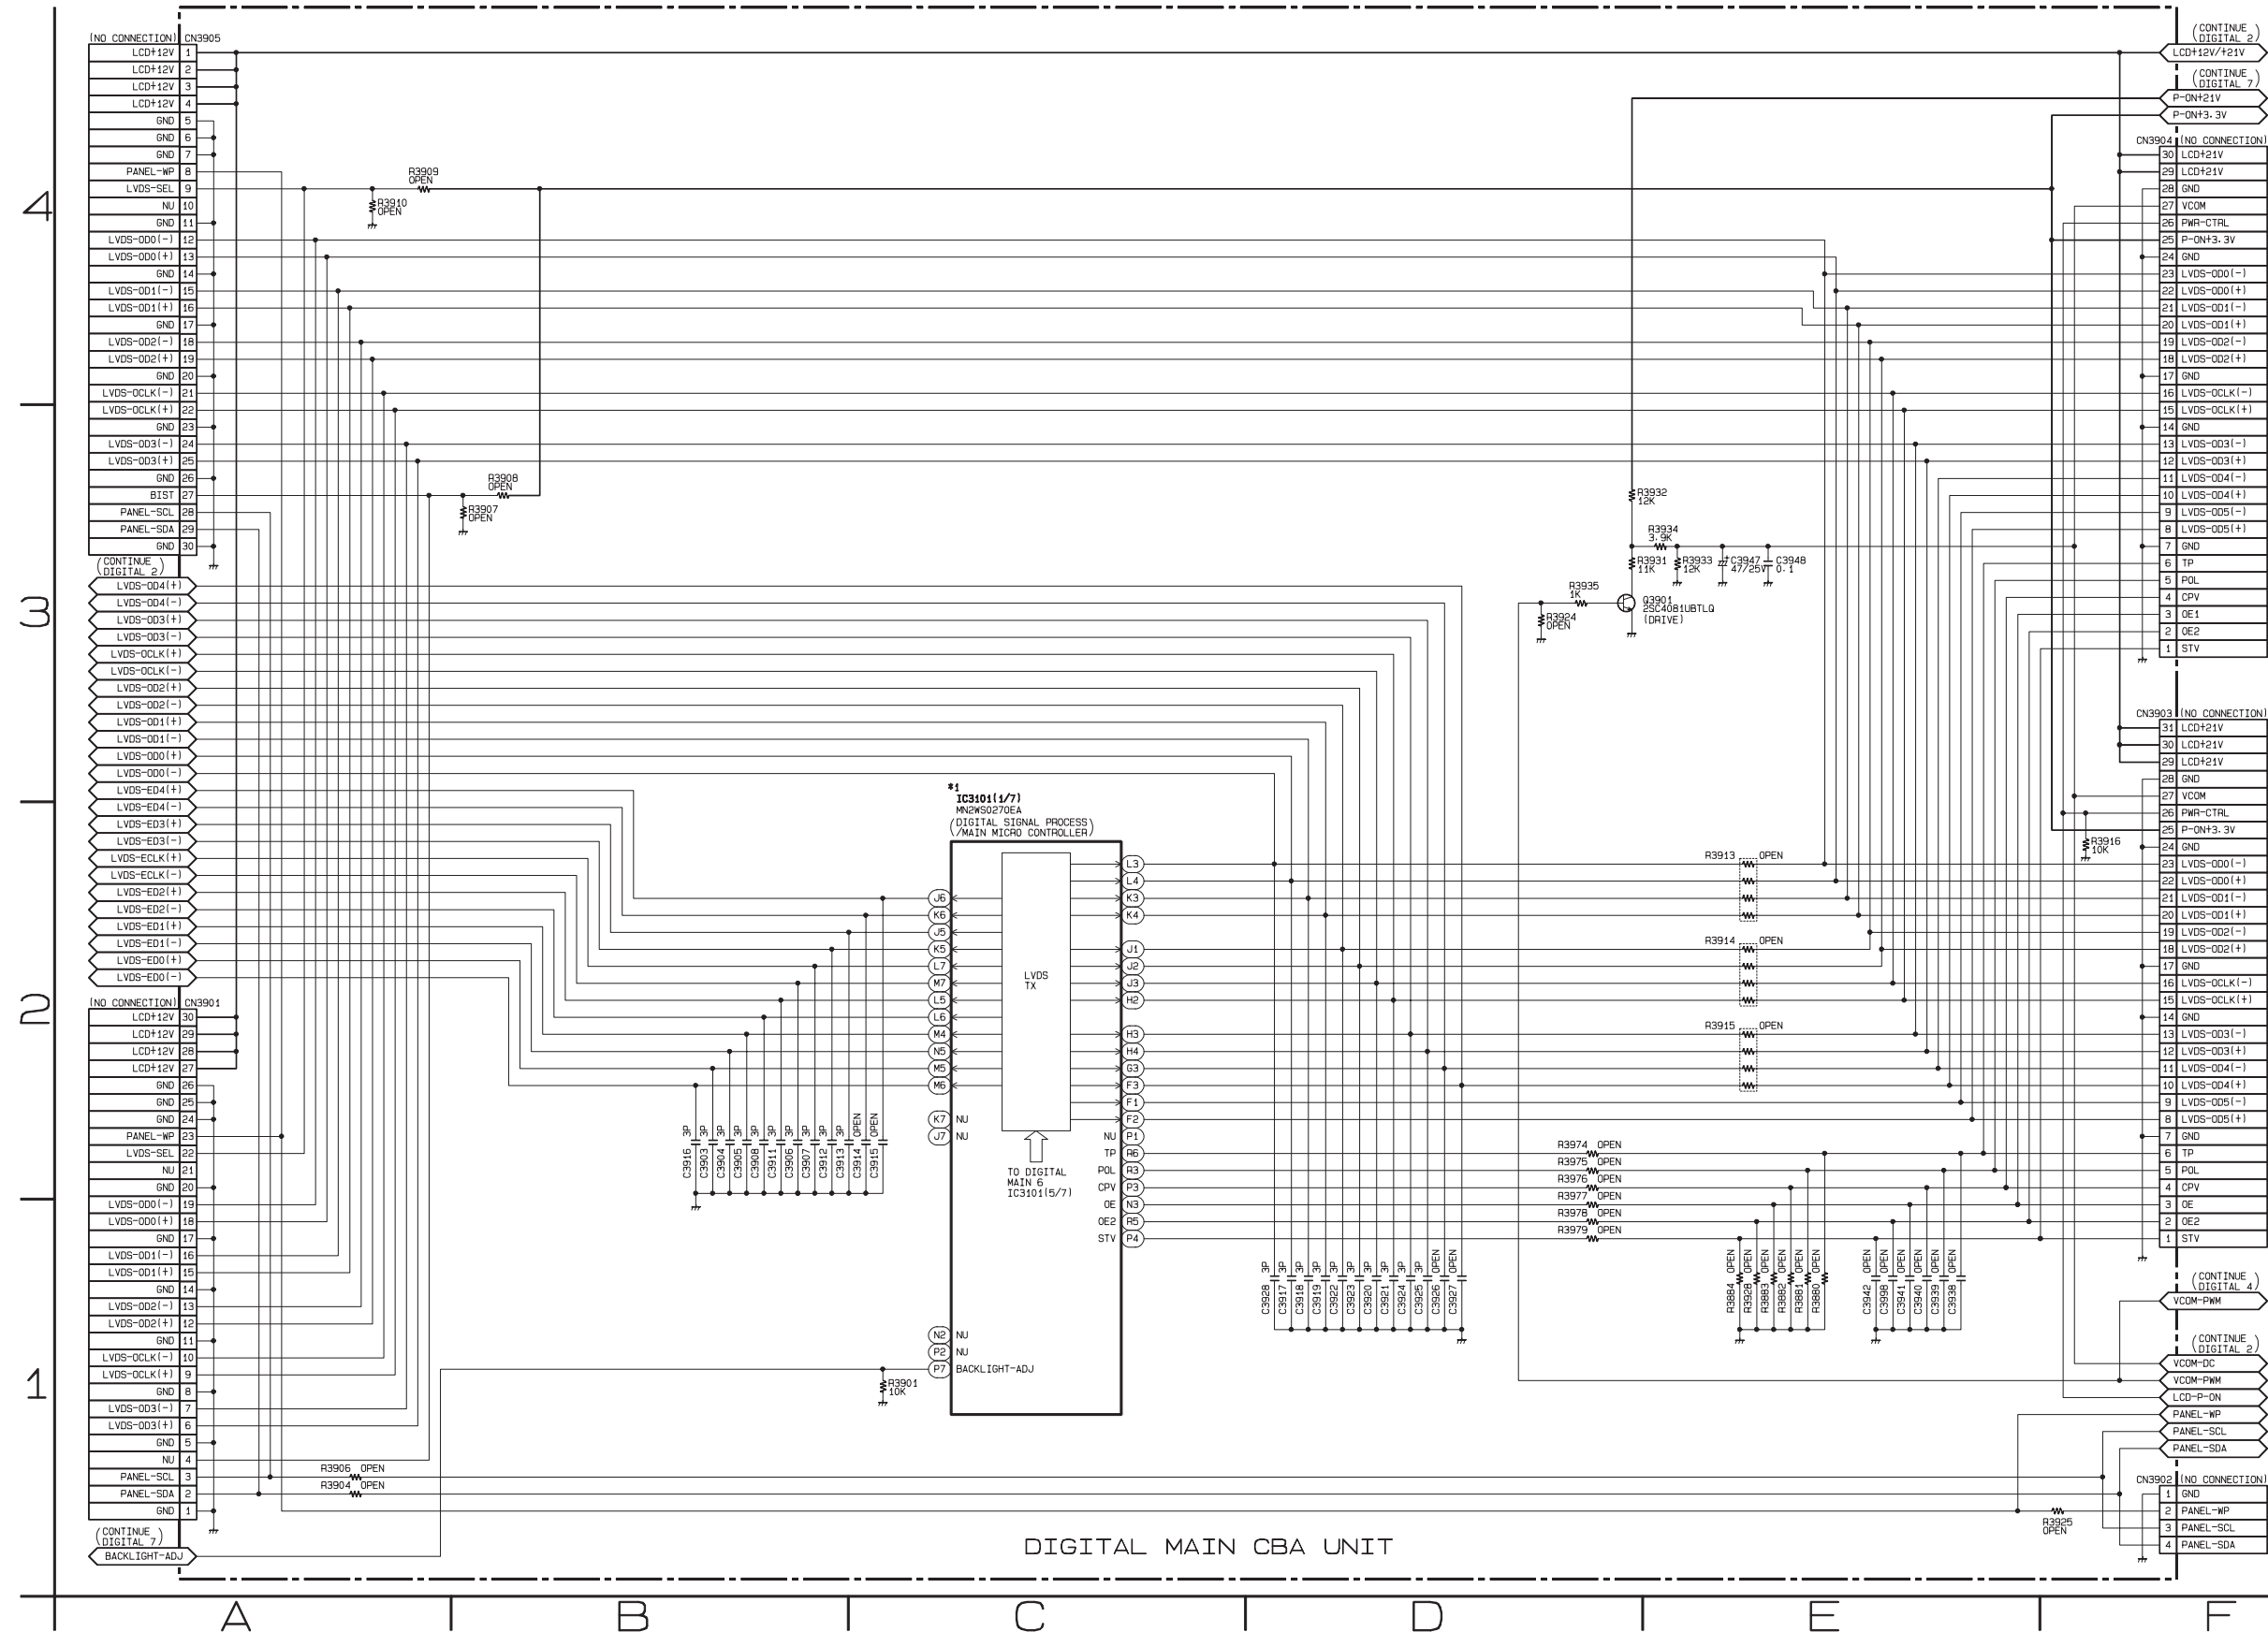


Digital Main 2 Schematic Diagram [TYPE A]

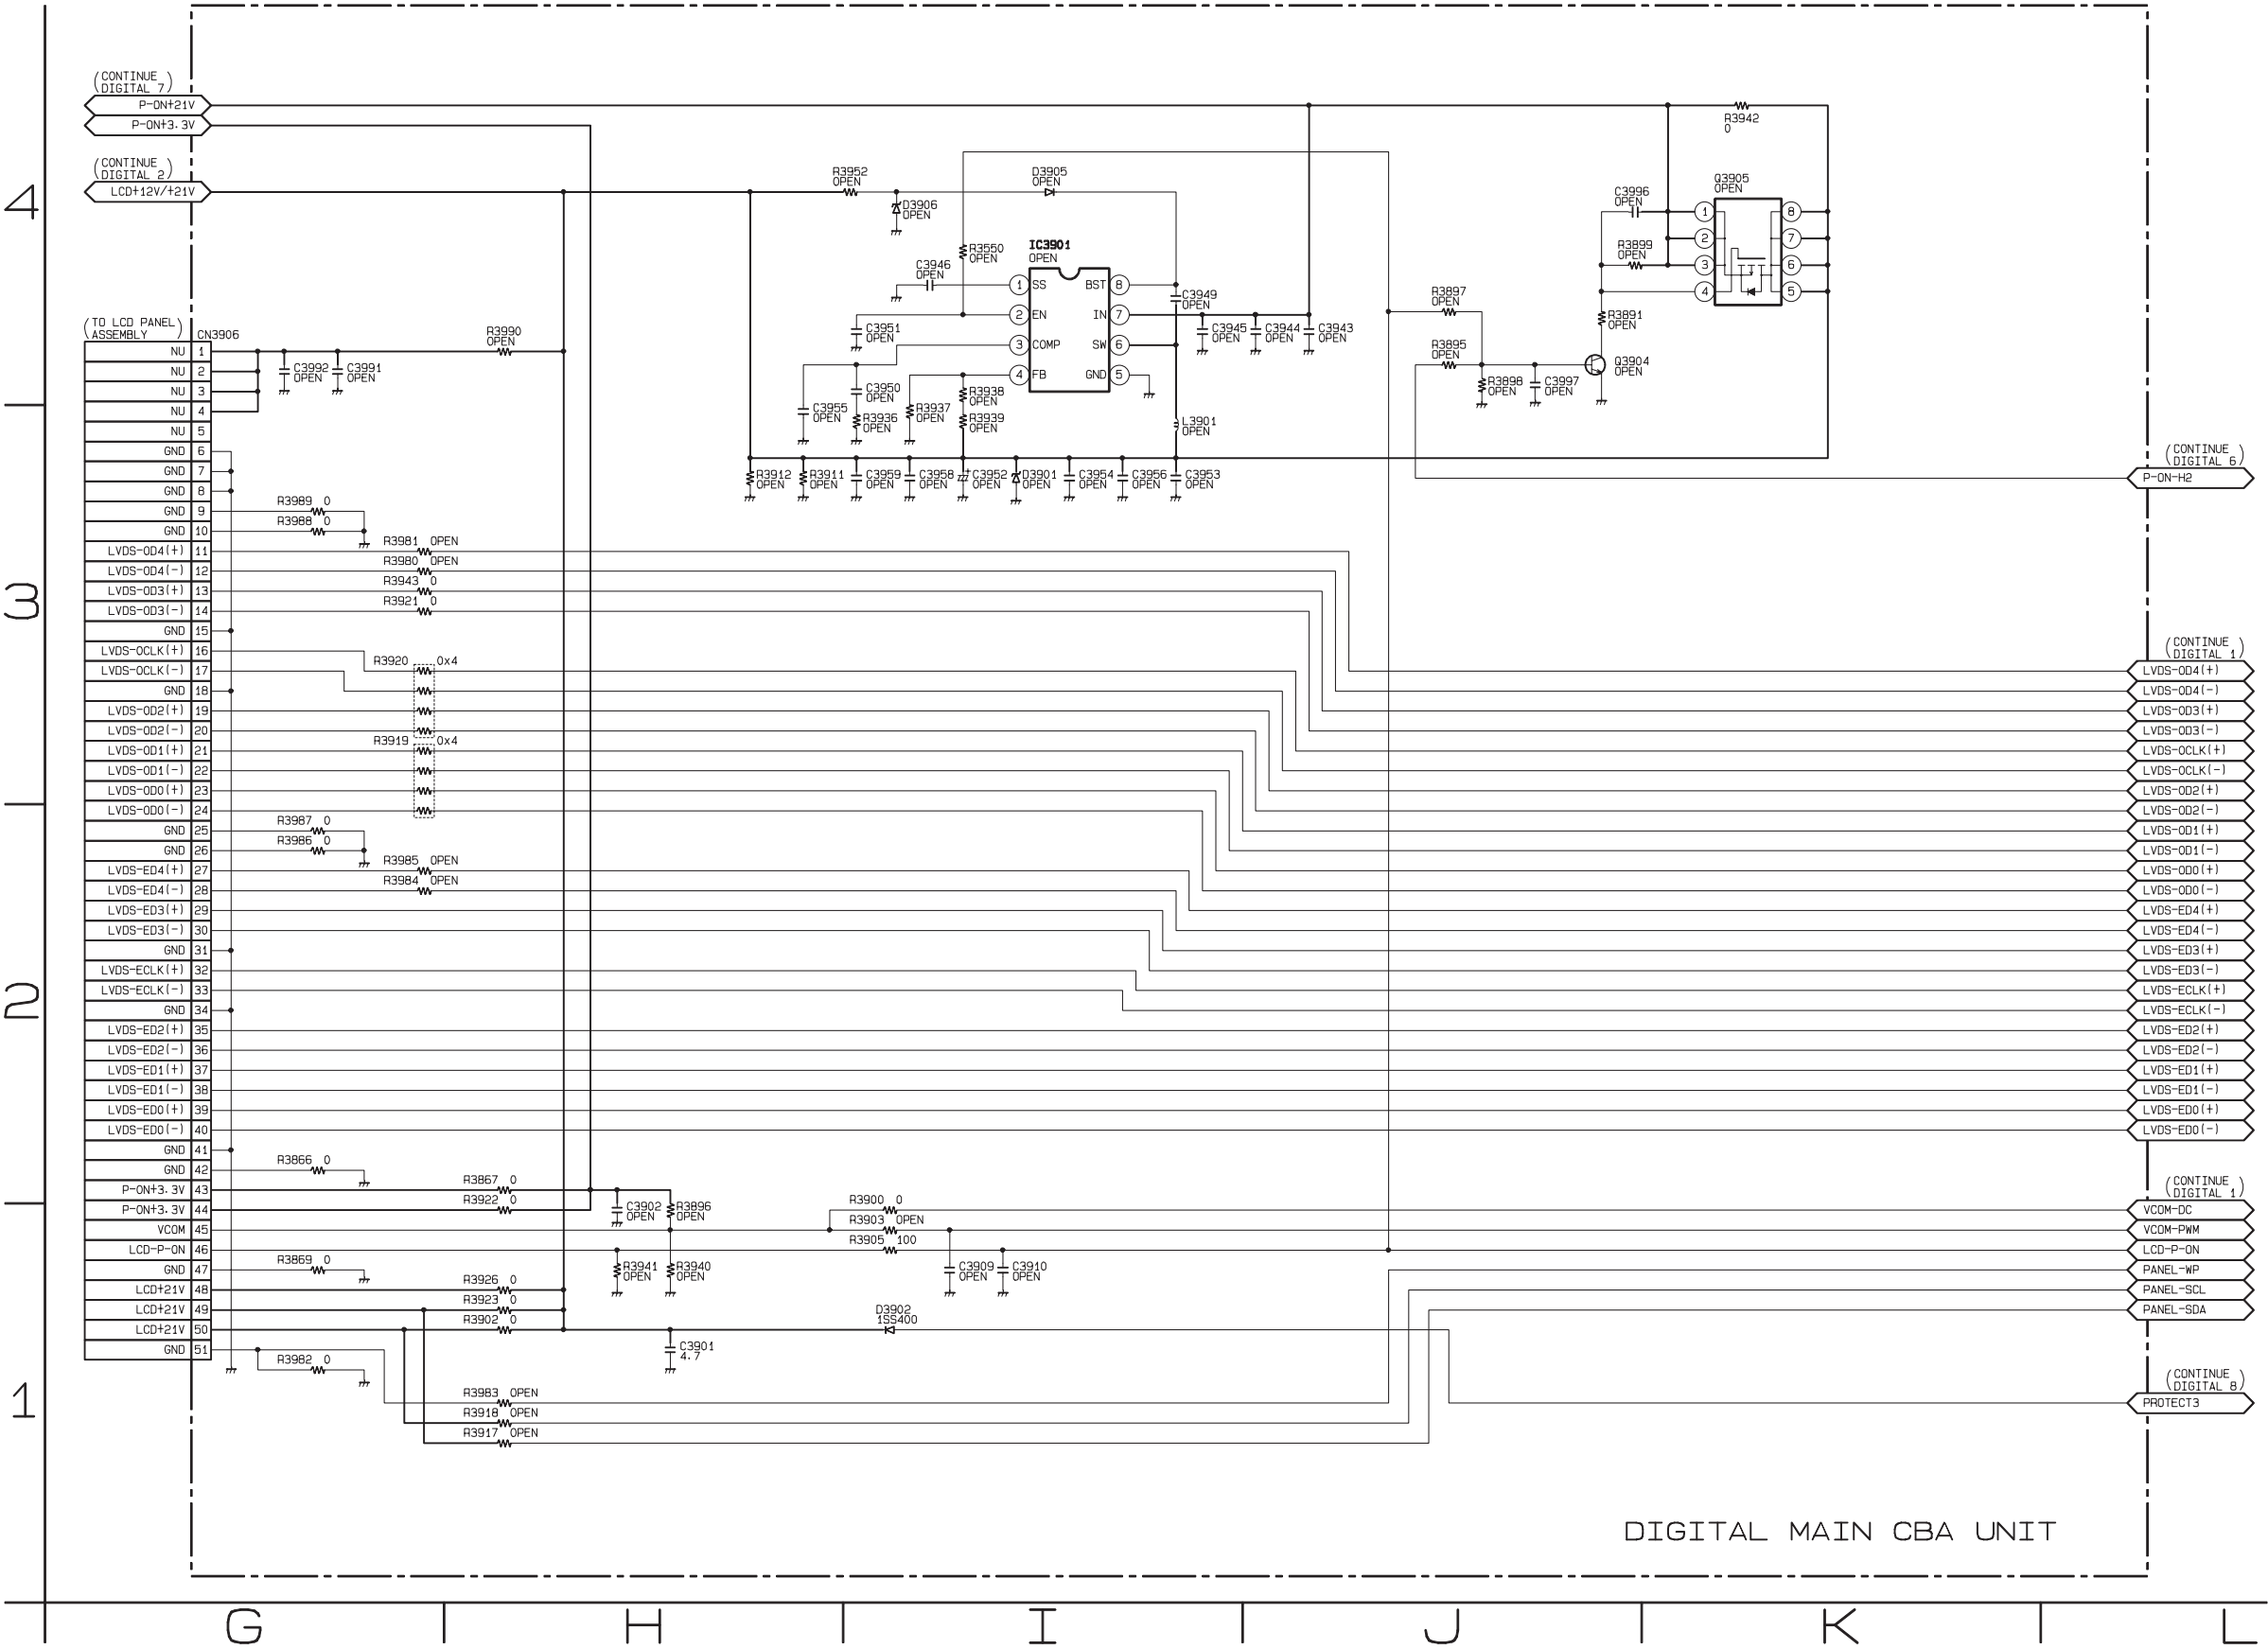



Digital Main 4 Schematic Diagram [TYPE A]

\*1 NOTE:  
The order of pins shown in this diagram is different from that of actual IC3101.  
IC3101 is divided into seven and shown as IC3101 (1/7) ~ IC3101 (7/7) in this Digital Main Schematic Diagram Section.

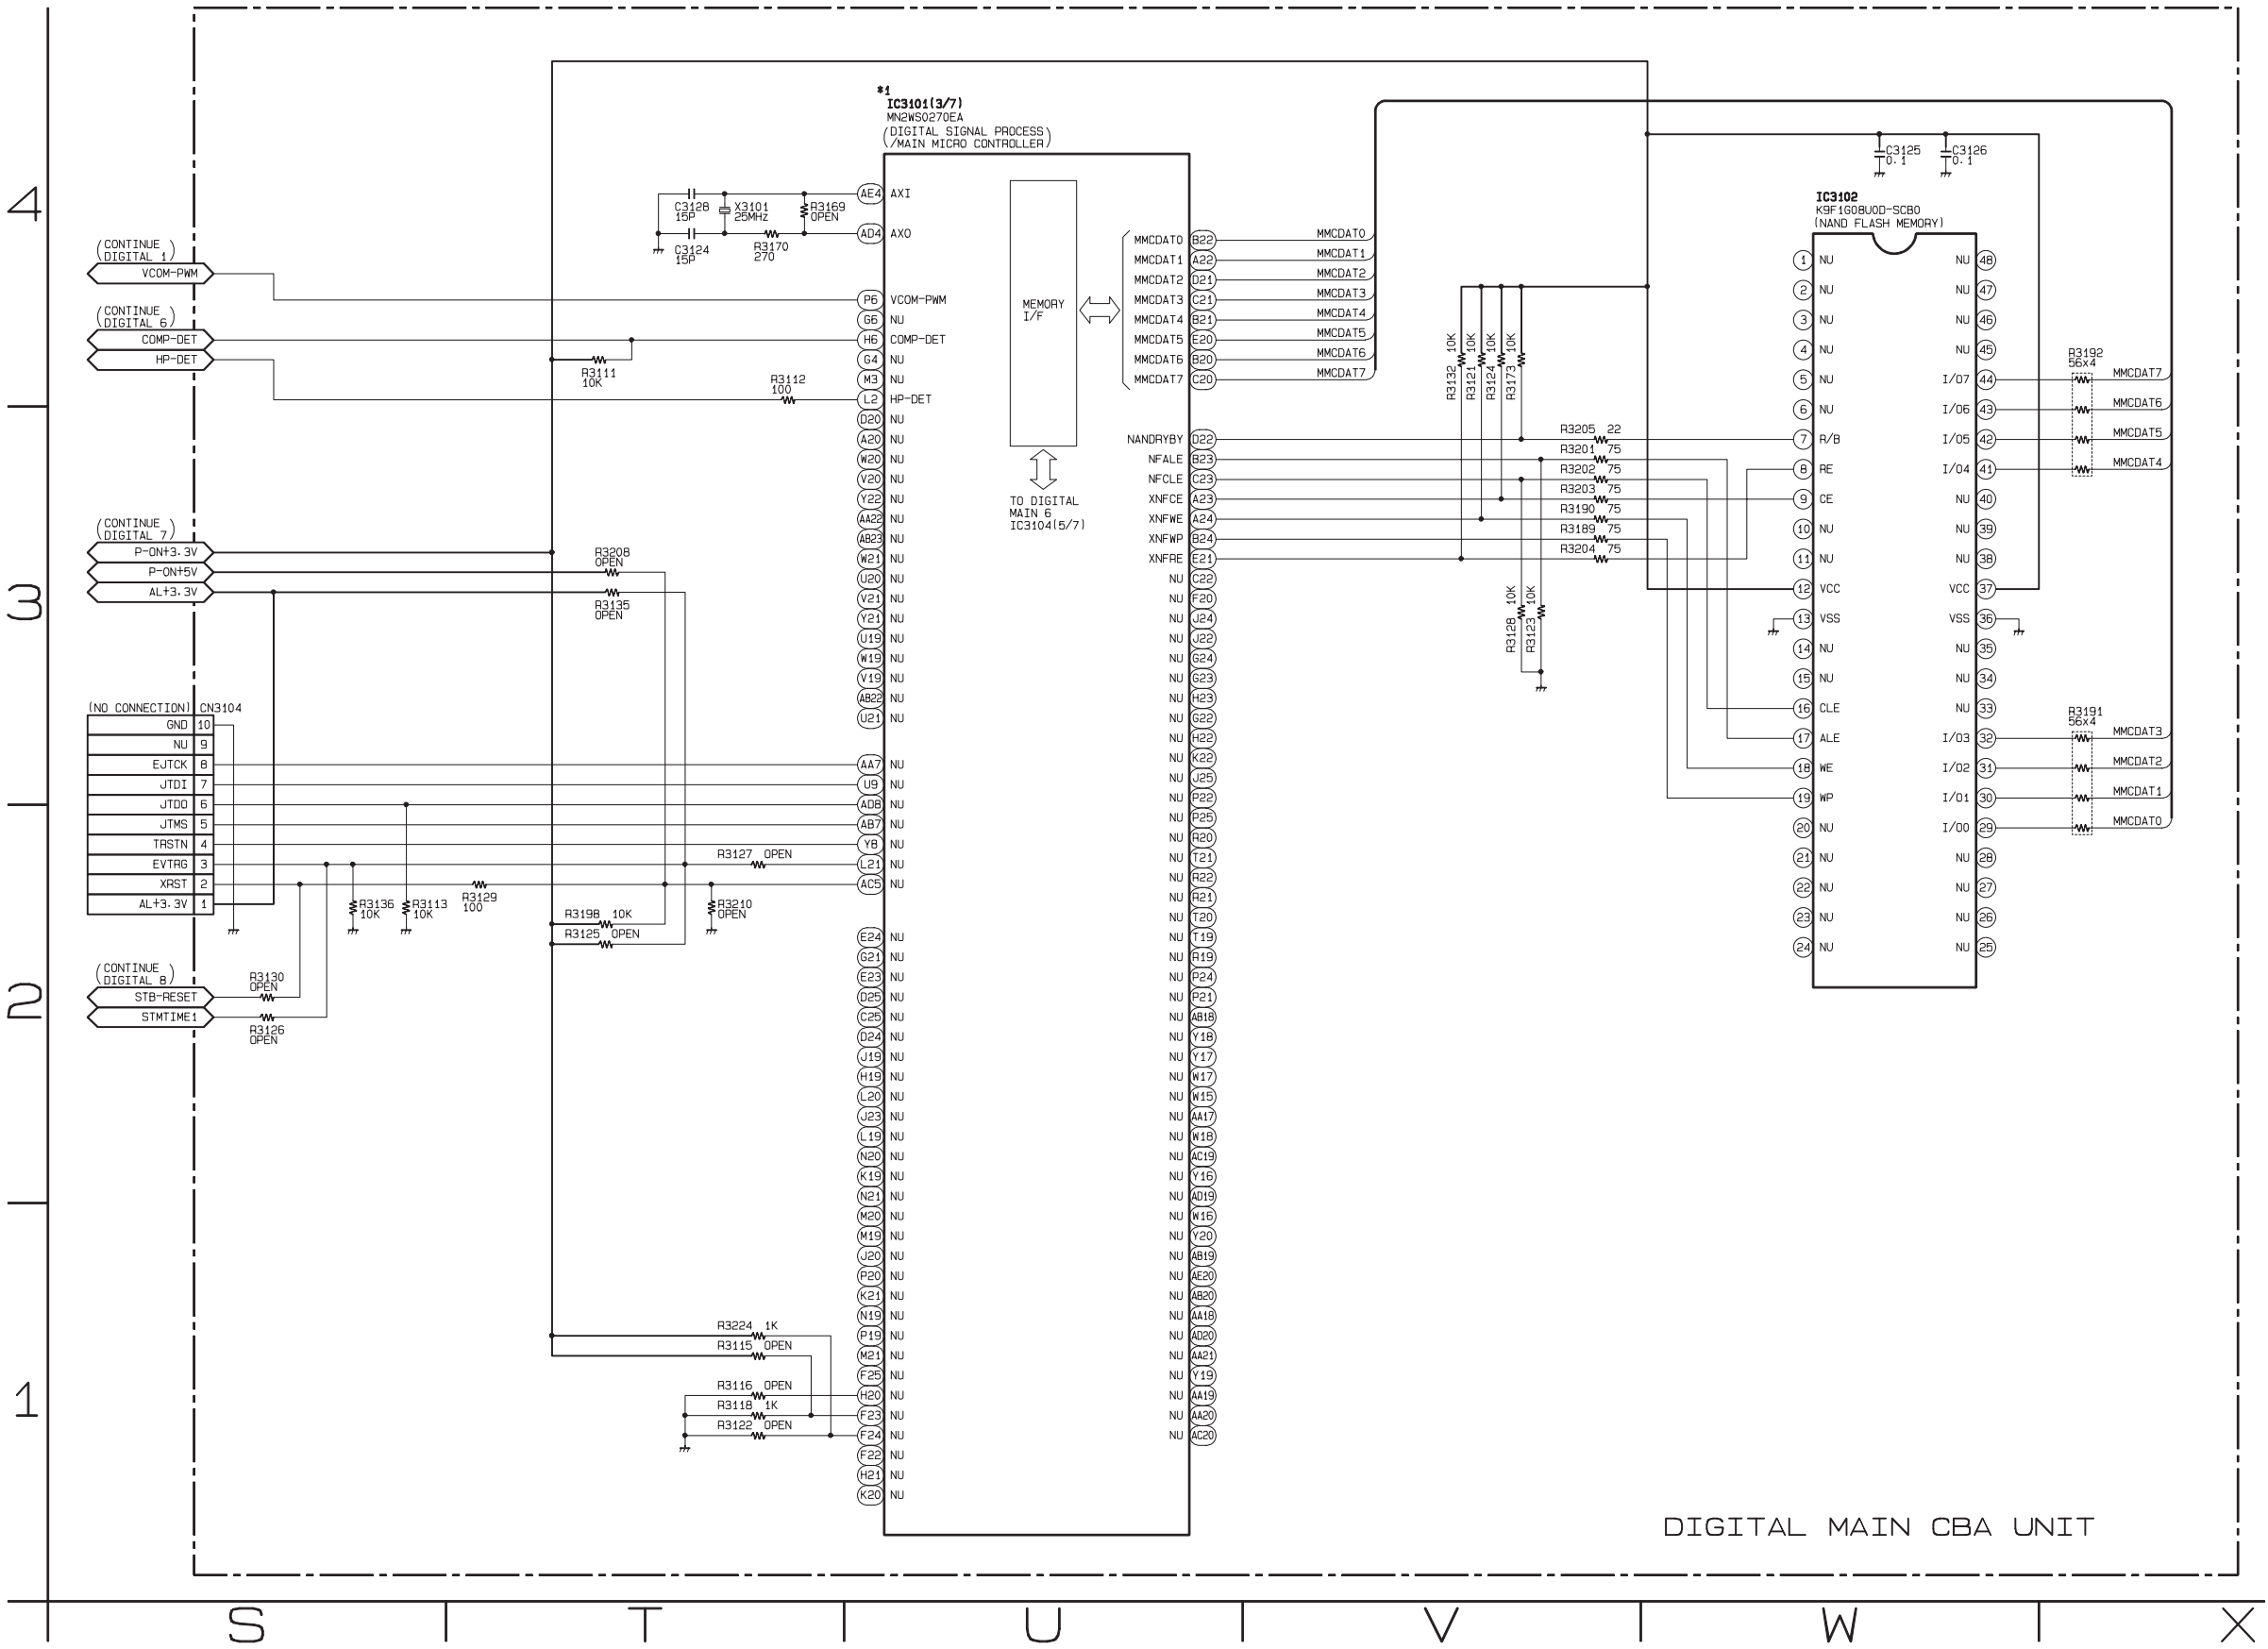


### Digital Main 5 Schematic Diagram [TYPE A]

**\*1 NOTE:**


The order of pins shown in this diagram is different from that of actual IC3101.

IC3101 is divided into seven and shown as IC3101 (1/7) ~ IC3101 (7/7) in this Digital Main Schematic Diagram Section.

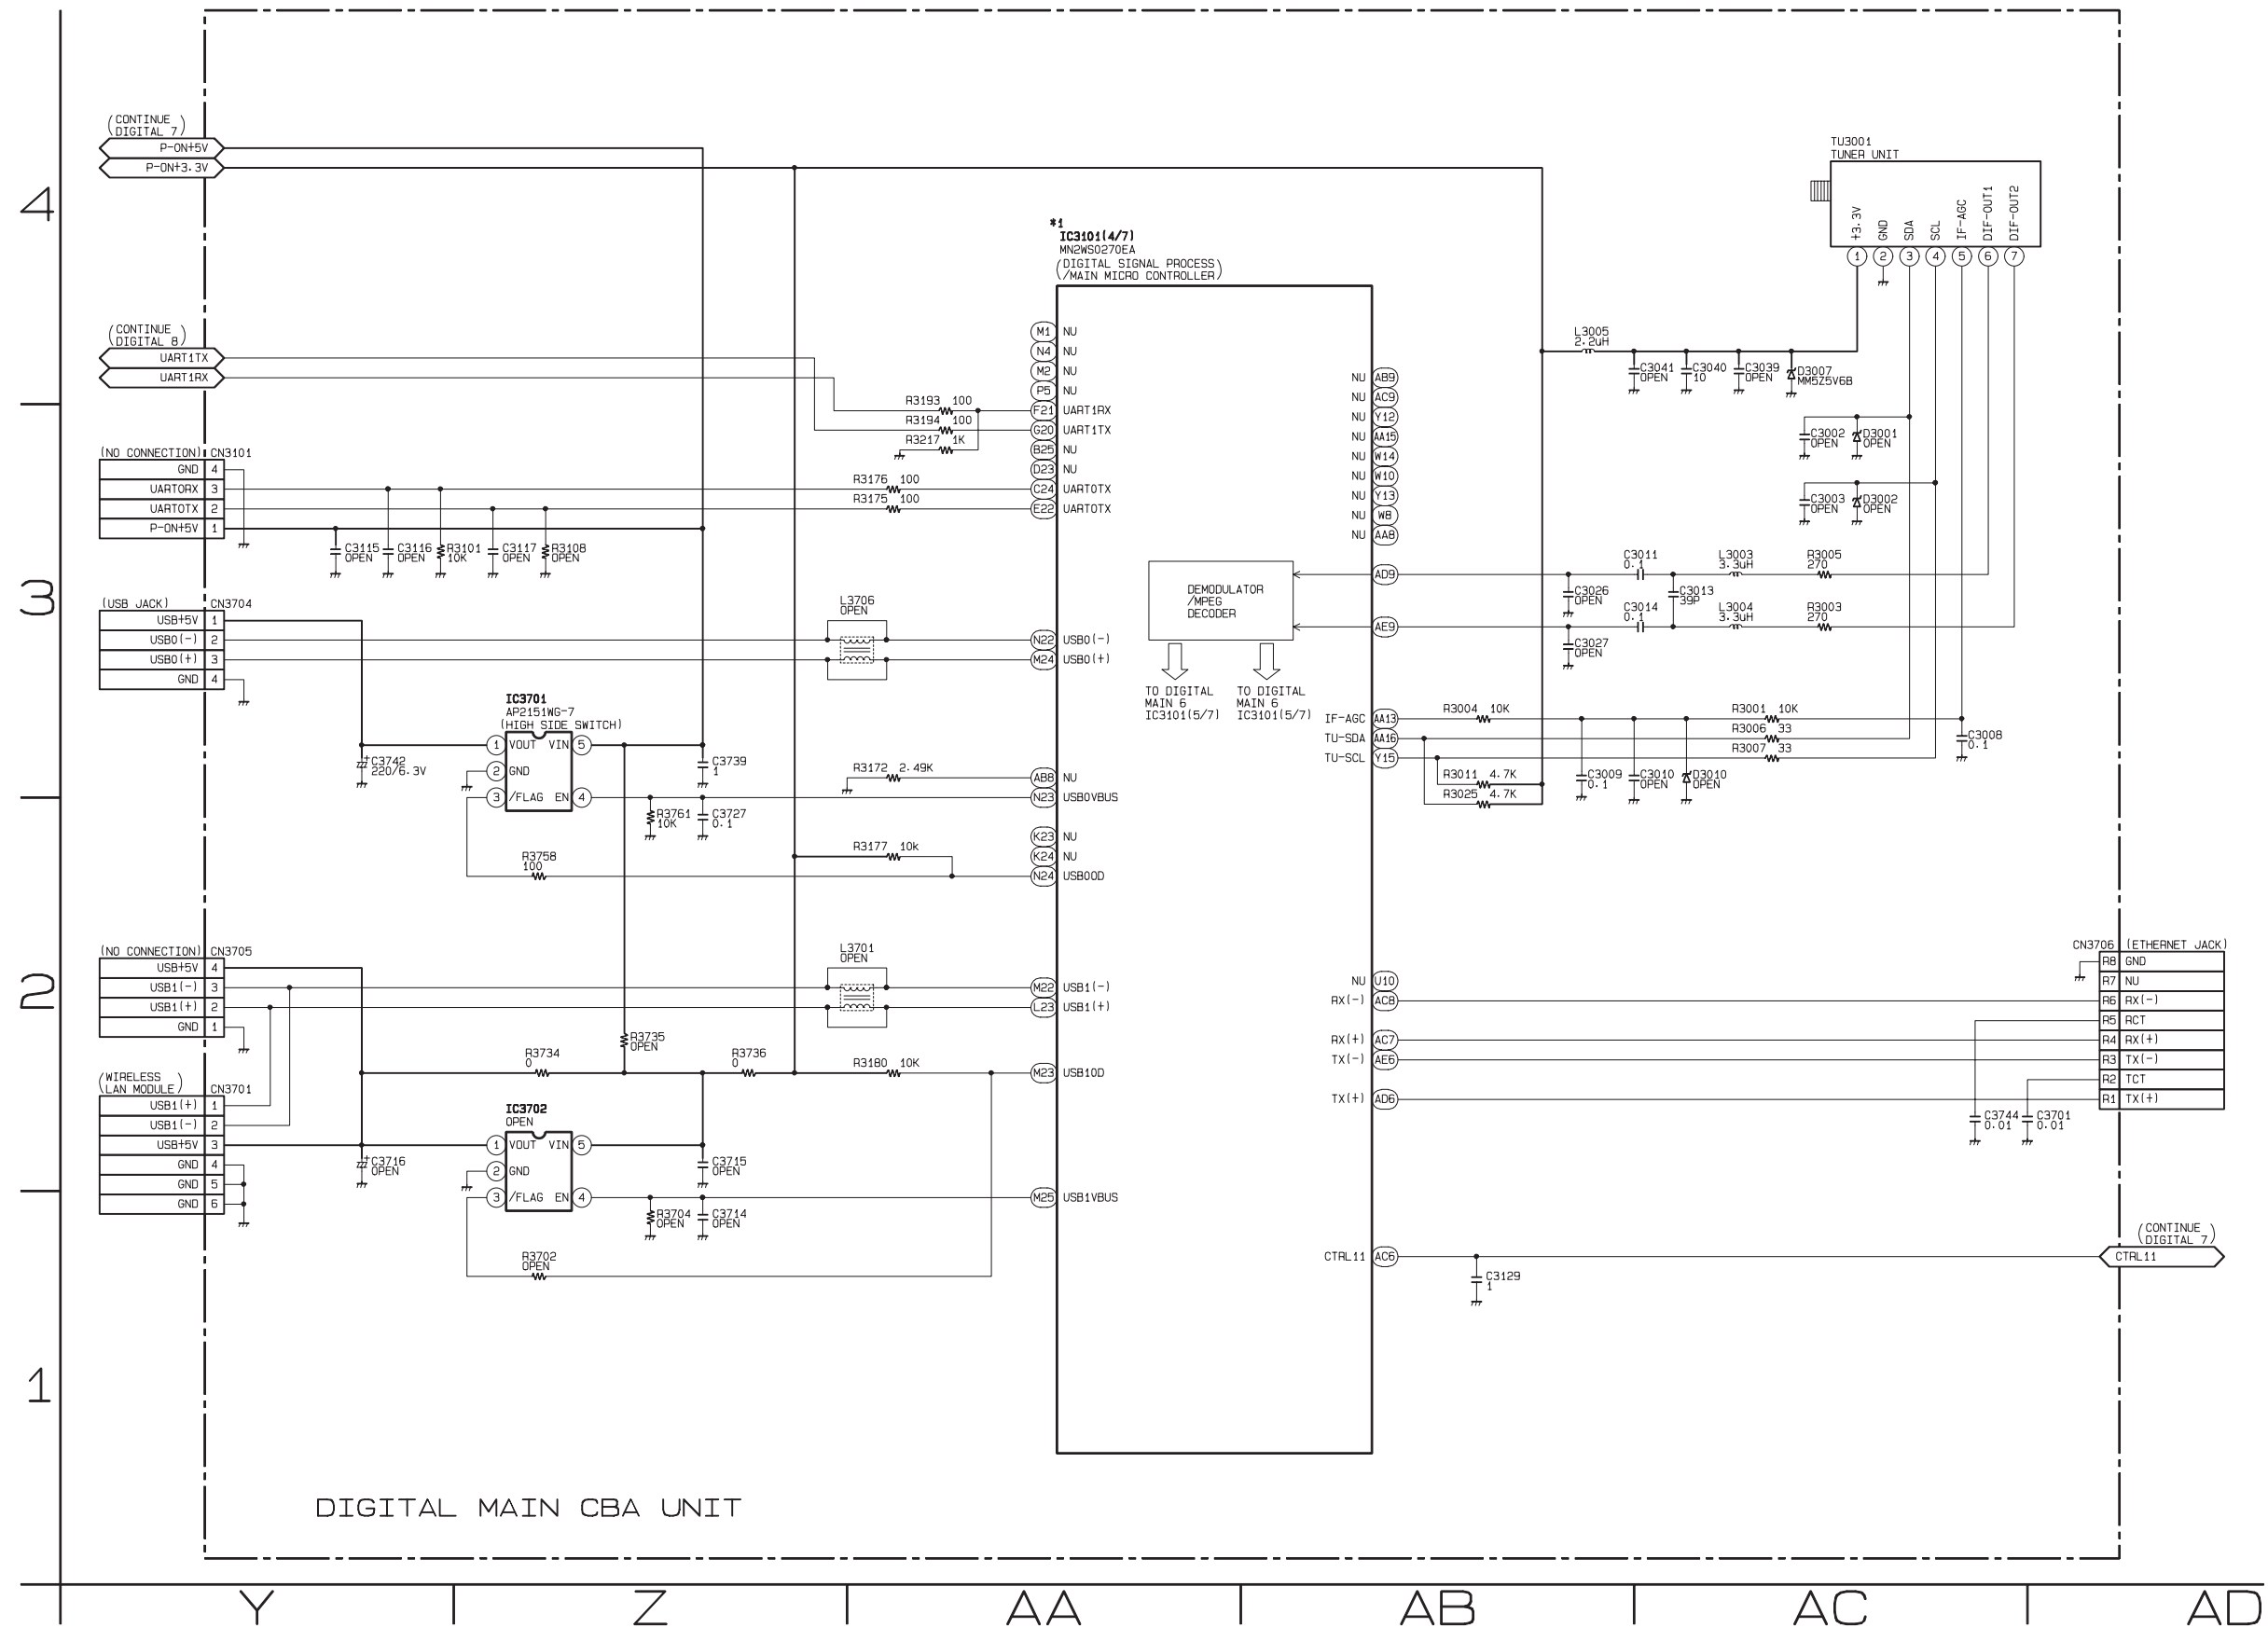


Digital Main 6 Schematic Diagram [TYPE A]

\*1 NOTE:  
The order of pins shown in this diagram is different from that of actual IC3101.  
IC3101 is divided into seven and shown as IC3101 (1/7) ~ IC3101 (7/7) in this Digital Main Schematic Diagram Section.

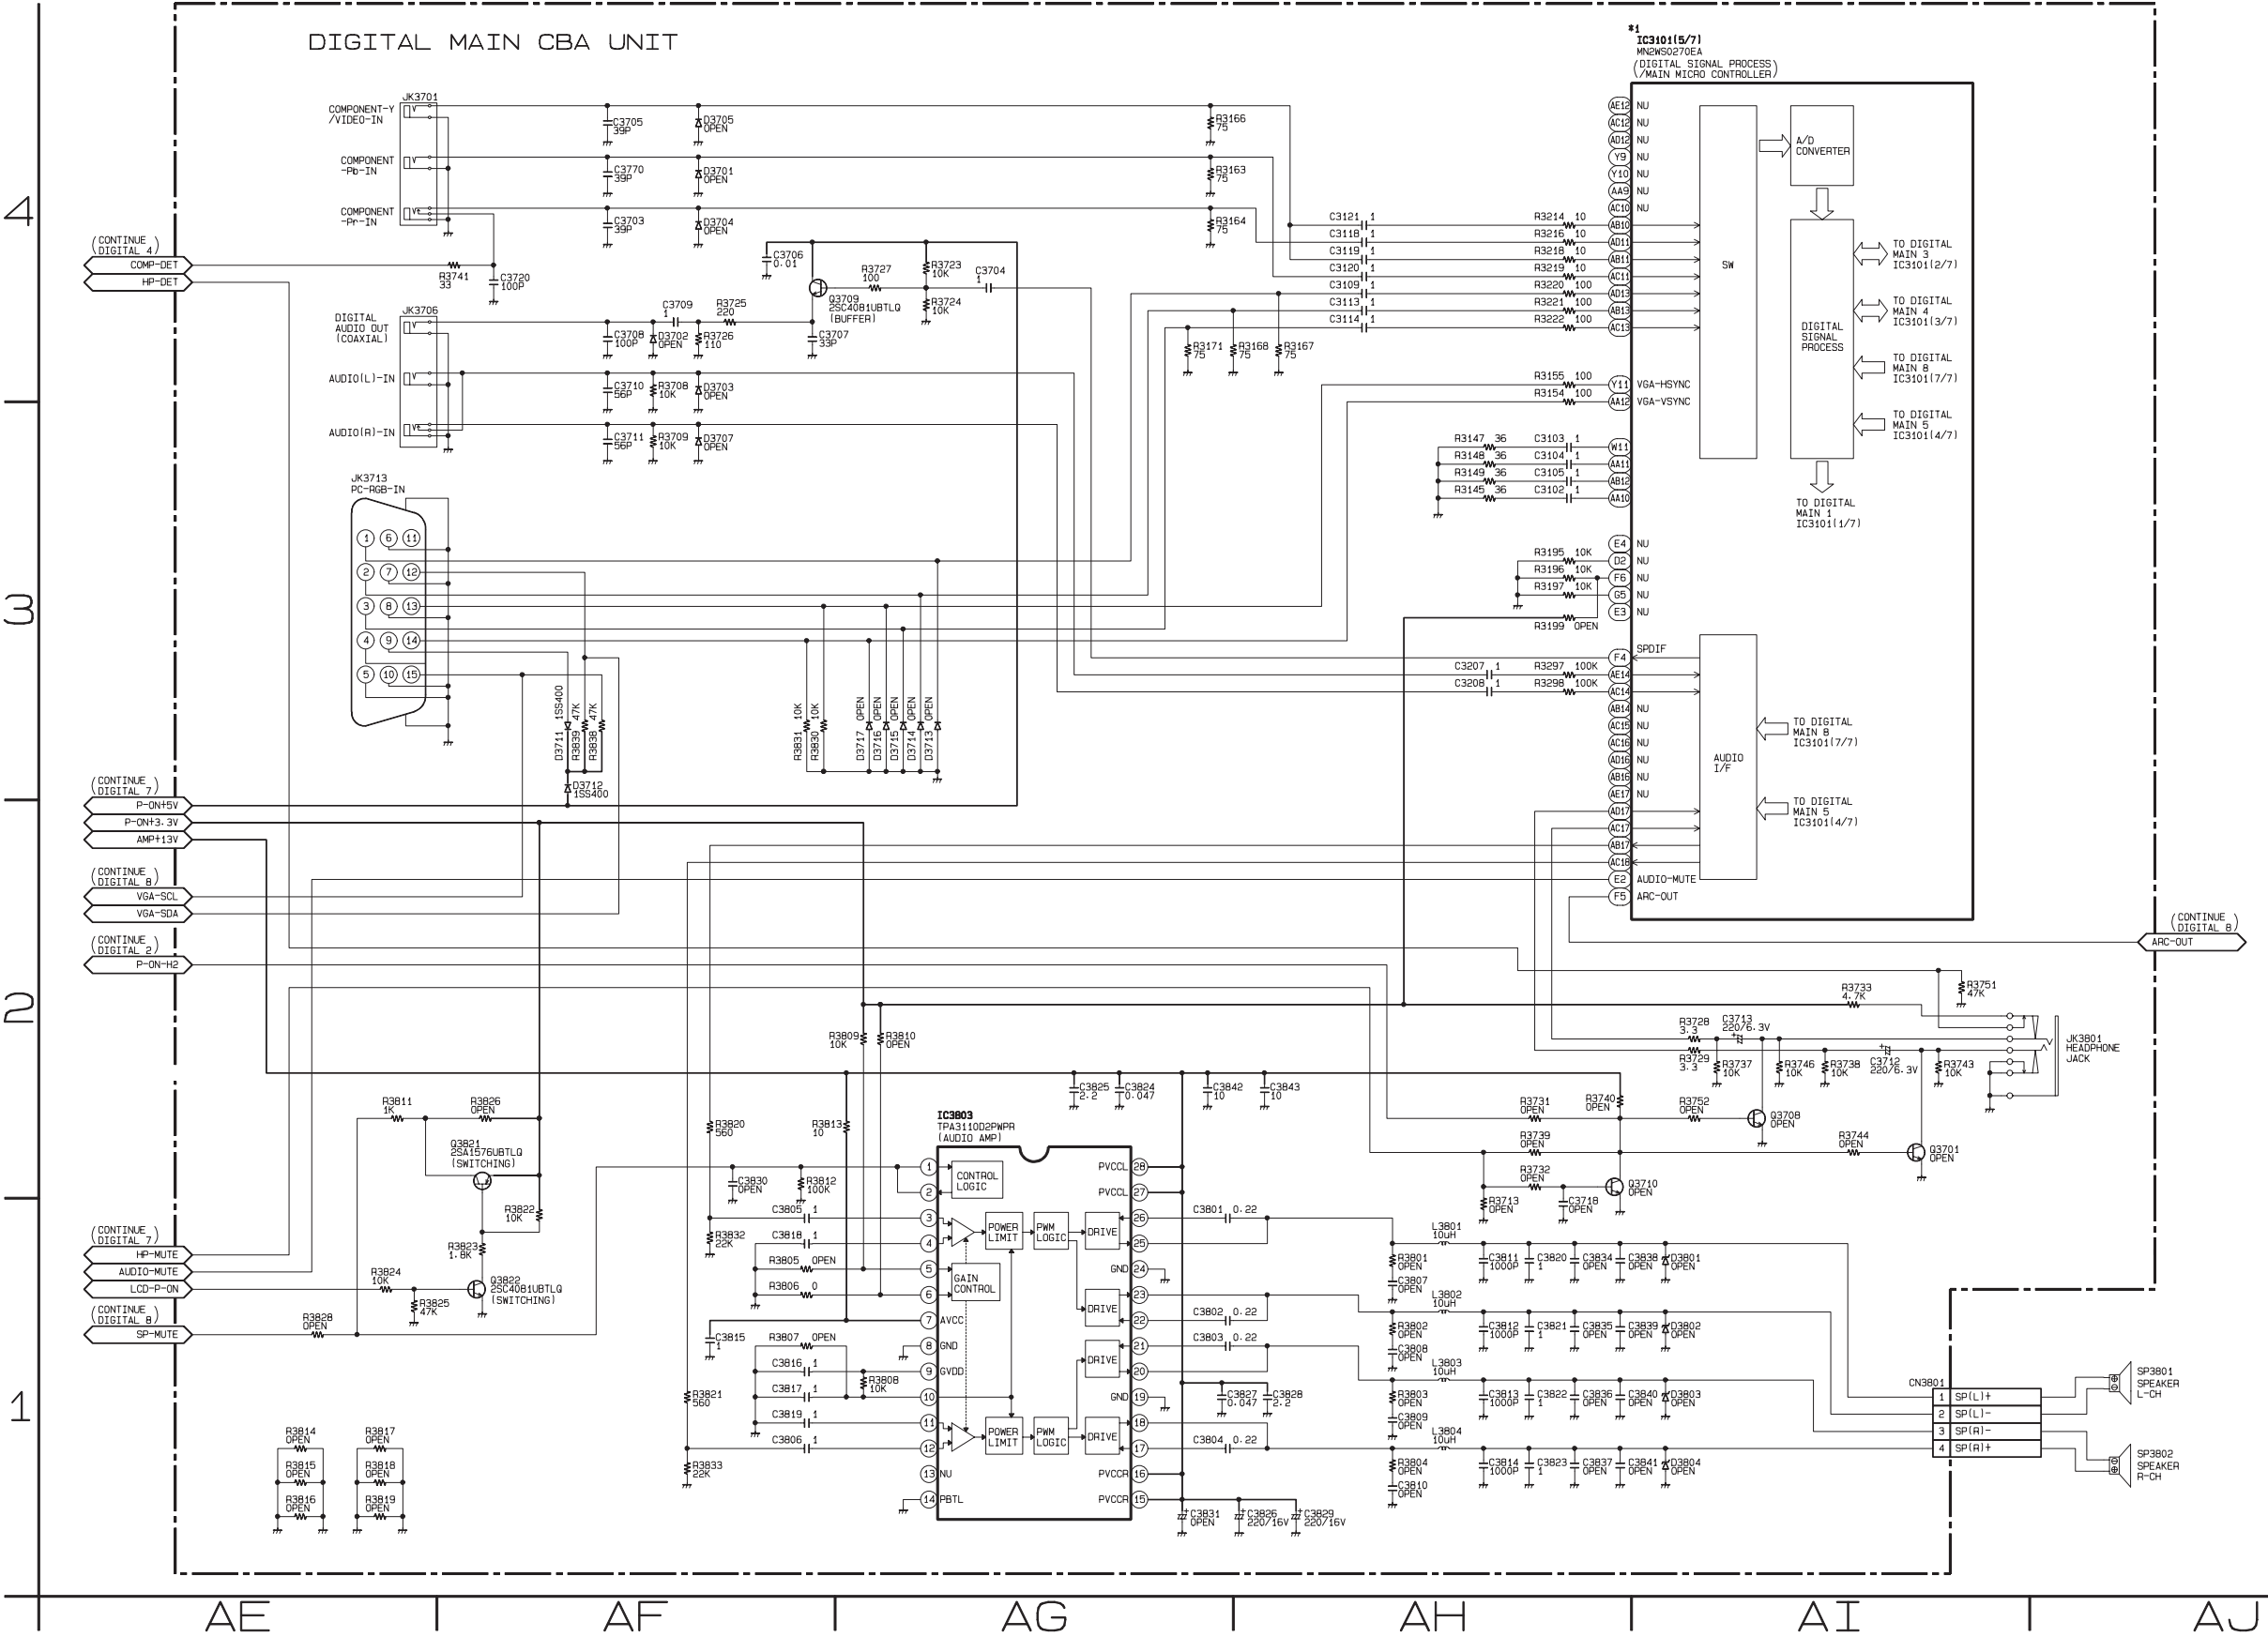


Digital Main 7 Schematic Diagram [TYPE A]

\*1 NOTE:  
The order of pins shown in this diagram is different from that of actual IC3101.  
IC3101 is divided into seven and shown as IC3101 (1/7) ~ IC3101 (7/7) in this Digital Main Schematic Diagram Section.

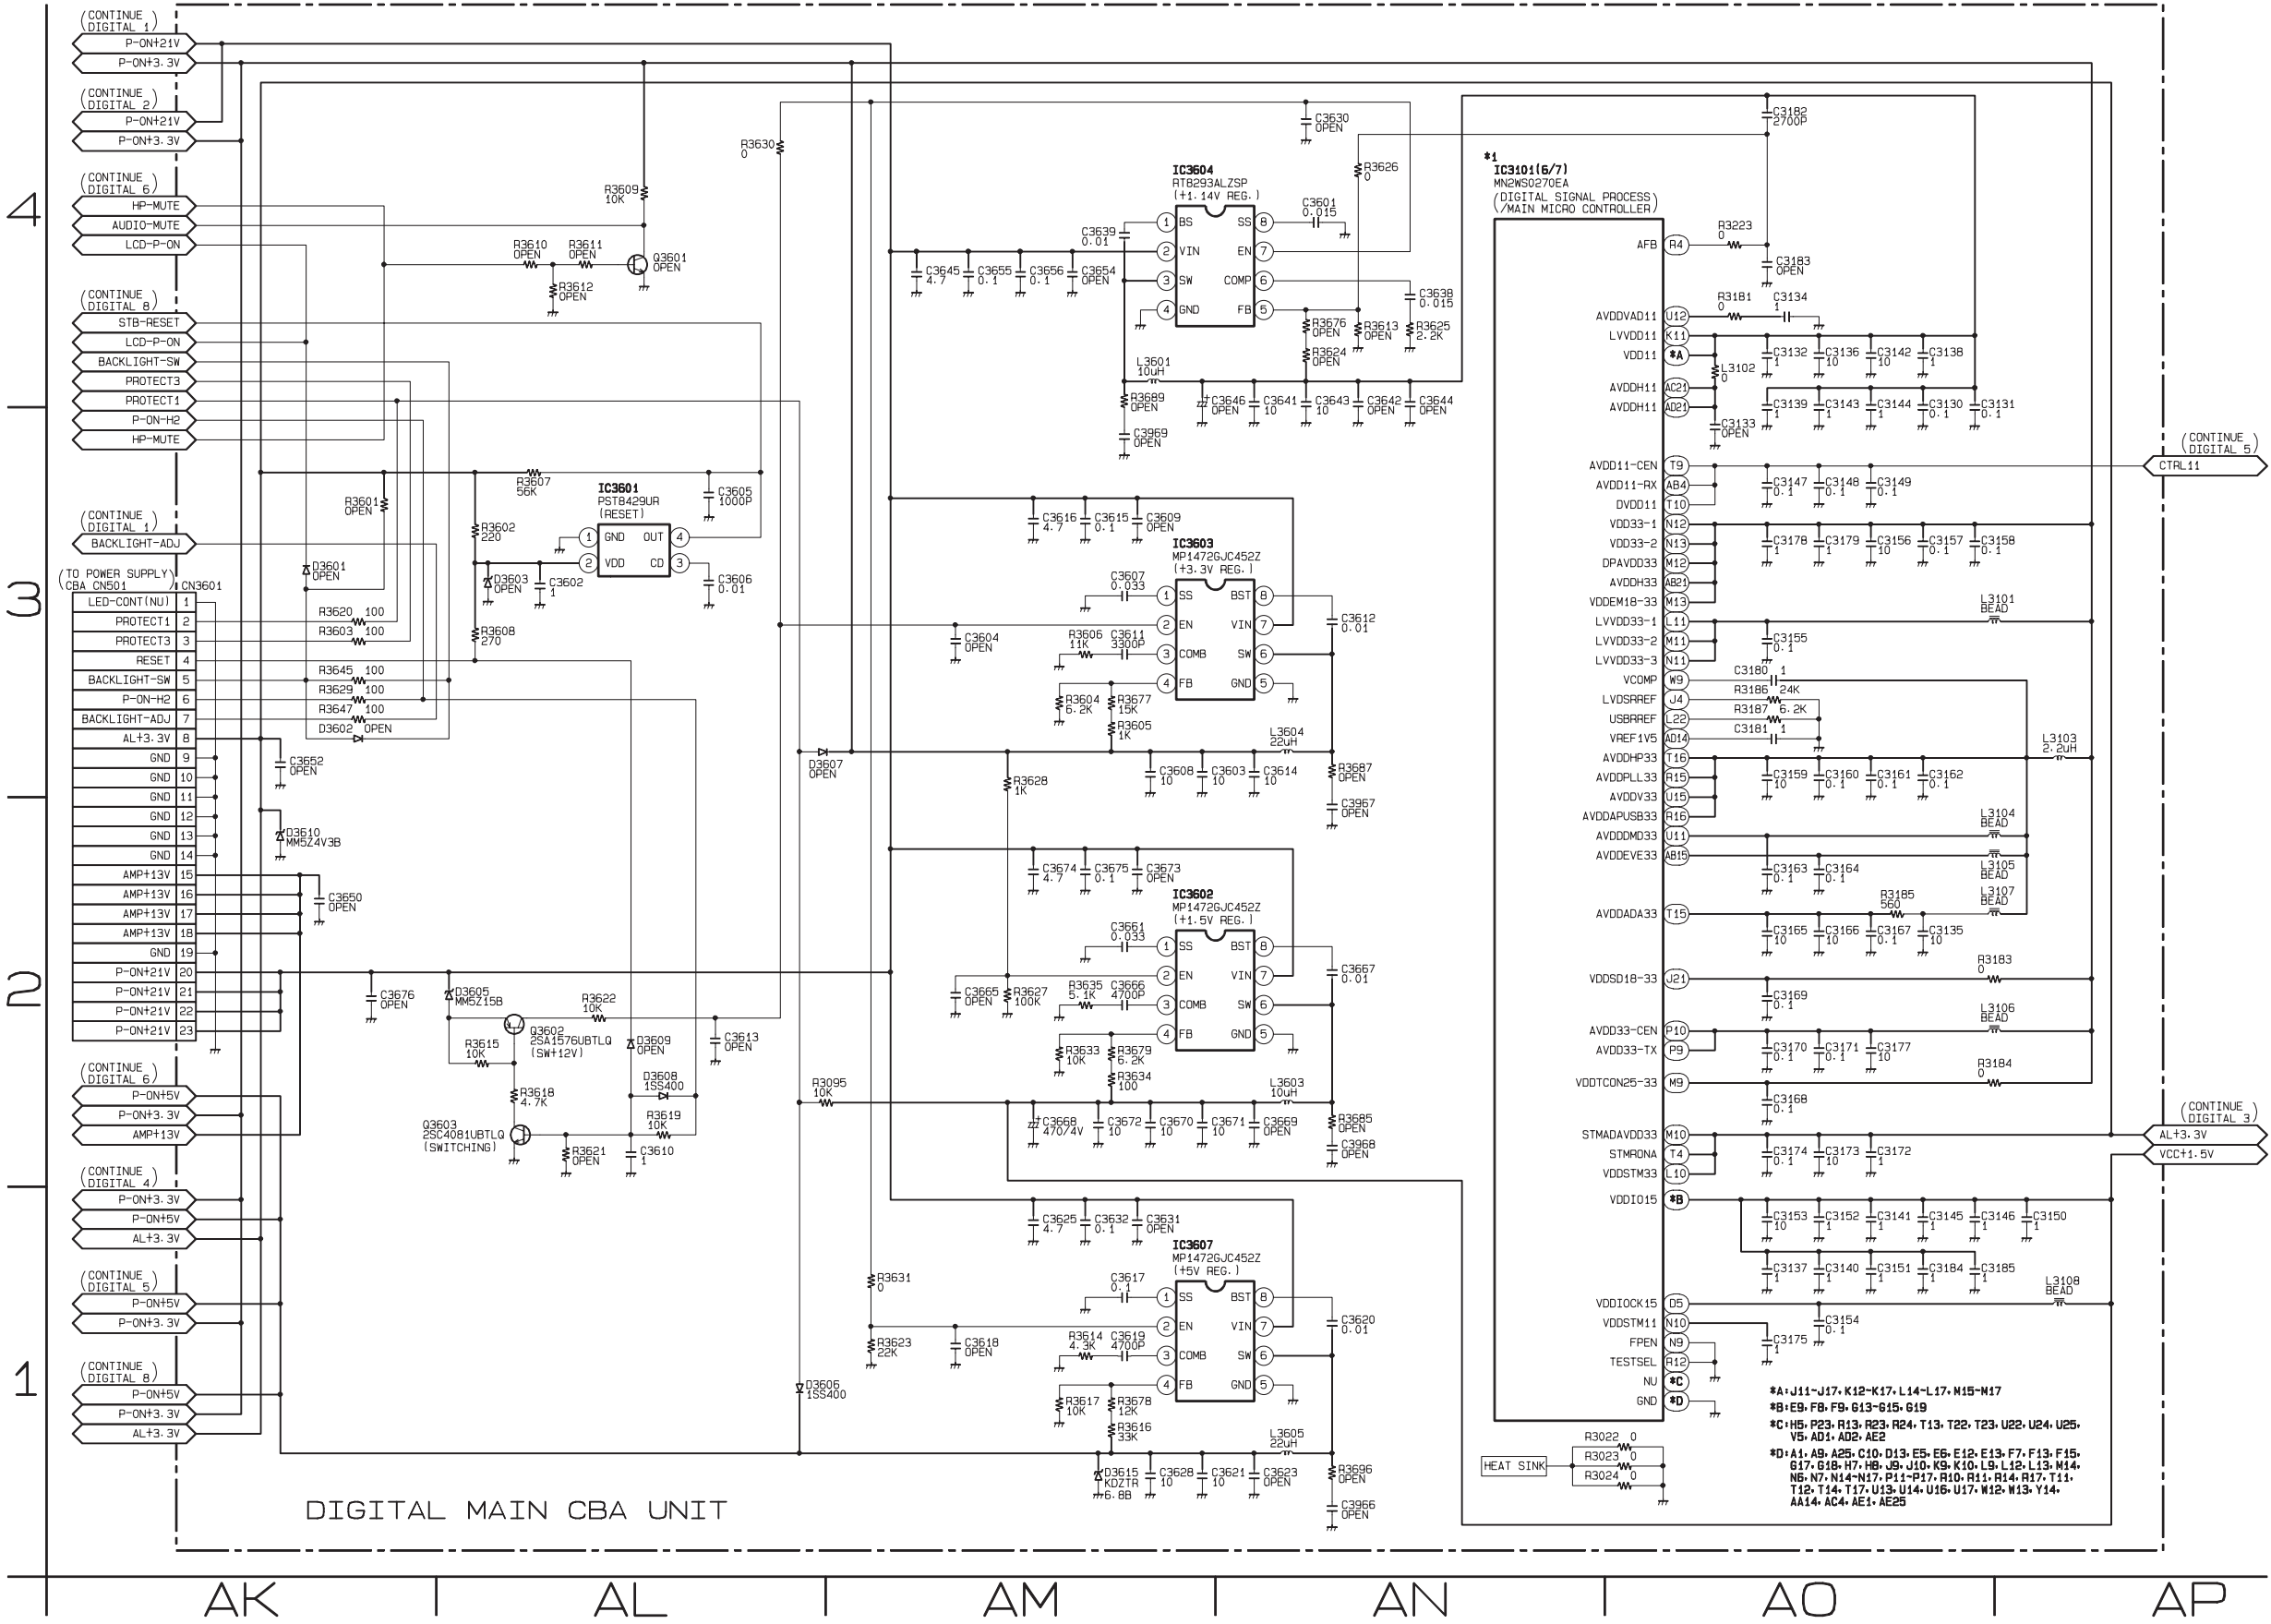


Digital Main 8 Schematic Diagram [TYPE A]

**\*1 NOTE:**  
The order of pins shown in this diagram is different from that of actual IC3101.  
IC3101 is divided into seven and shown as IC3101 (1/7) ~ IC3101 (7/7) in this Digital Main Schematic Diagram Section.

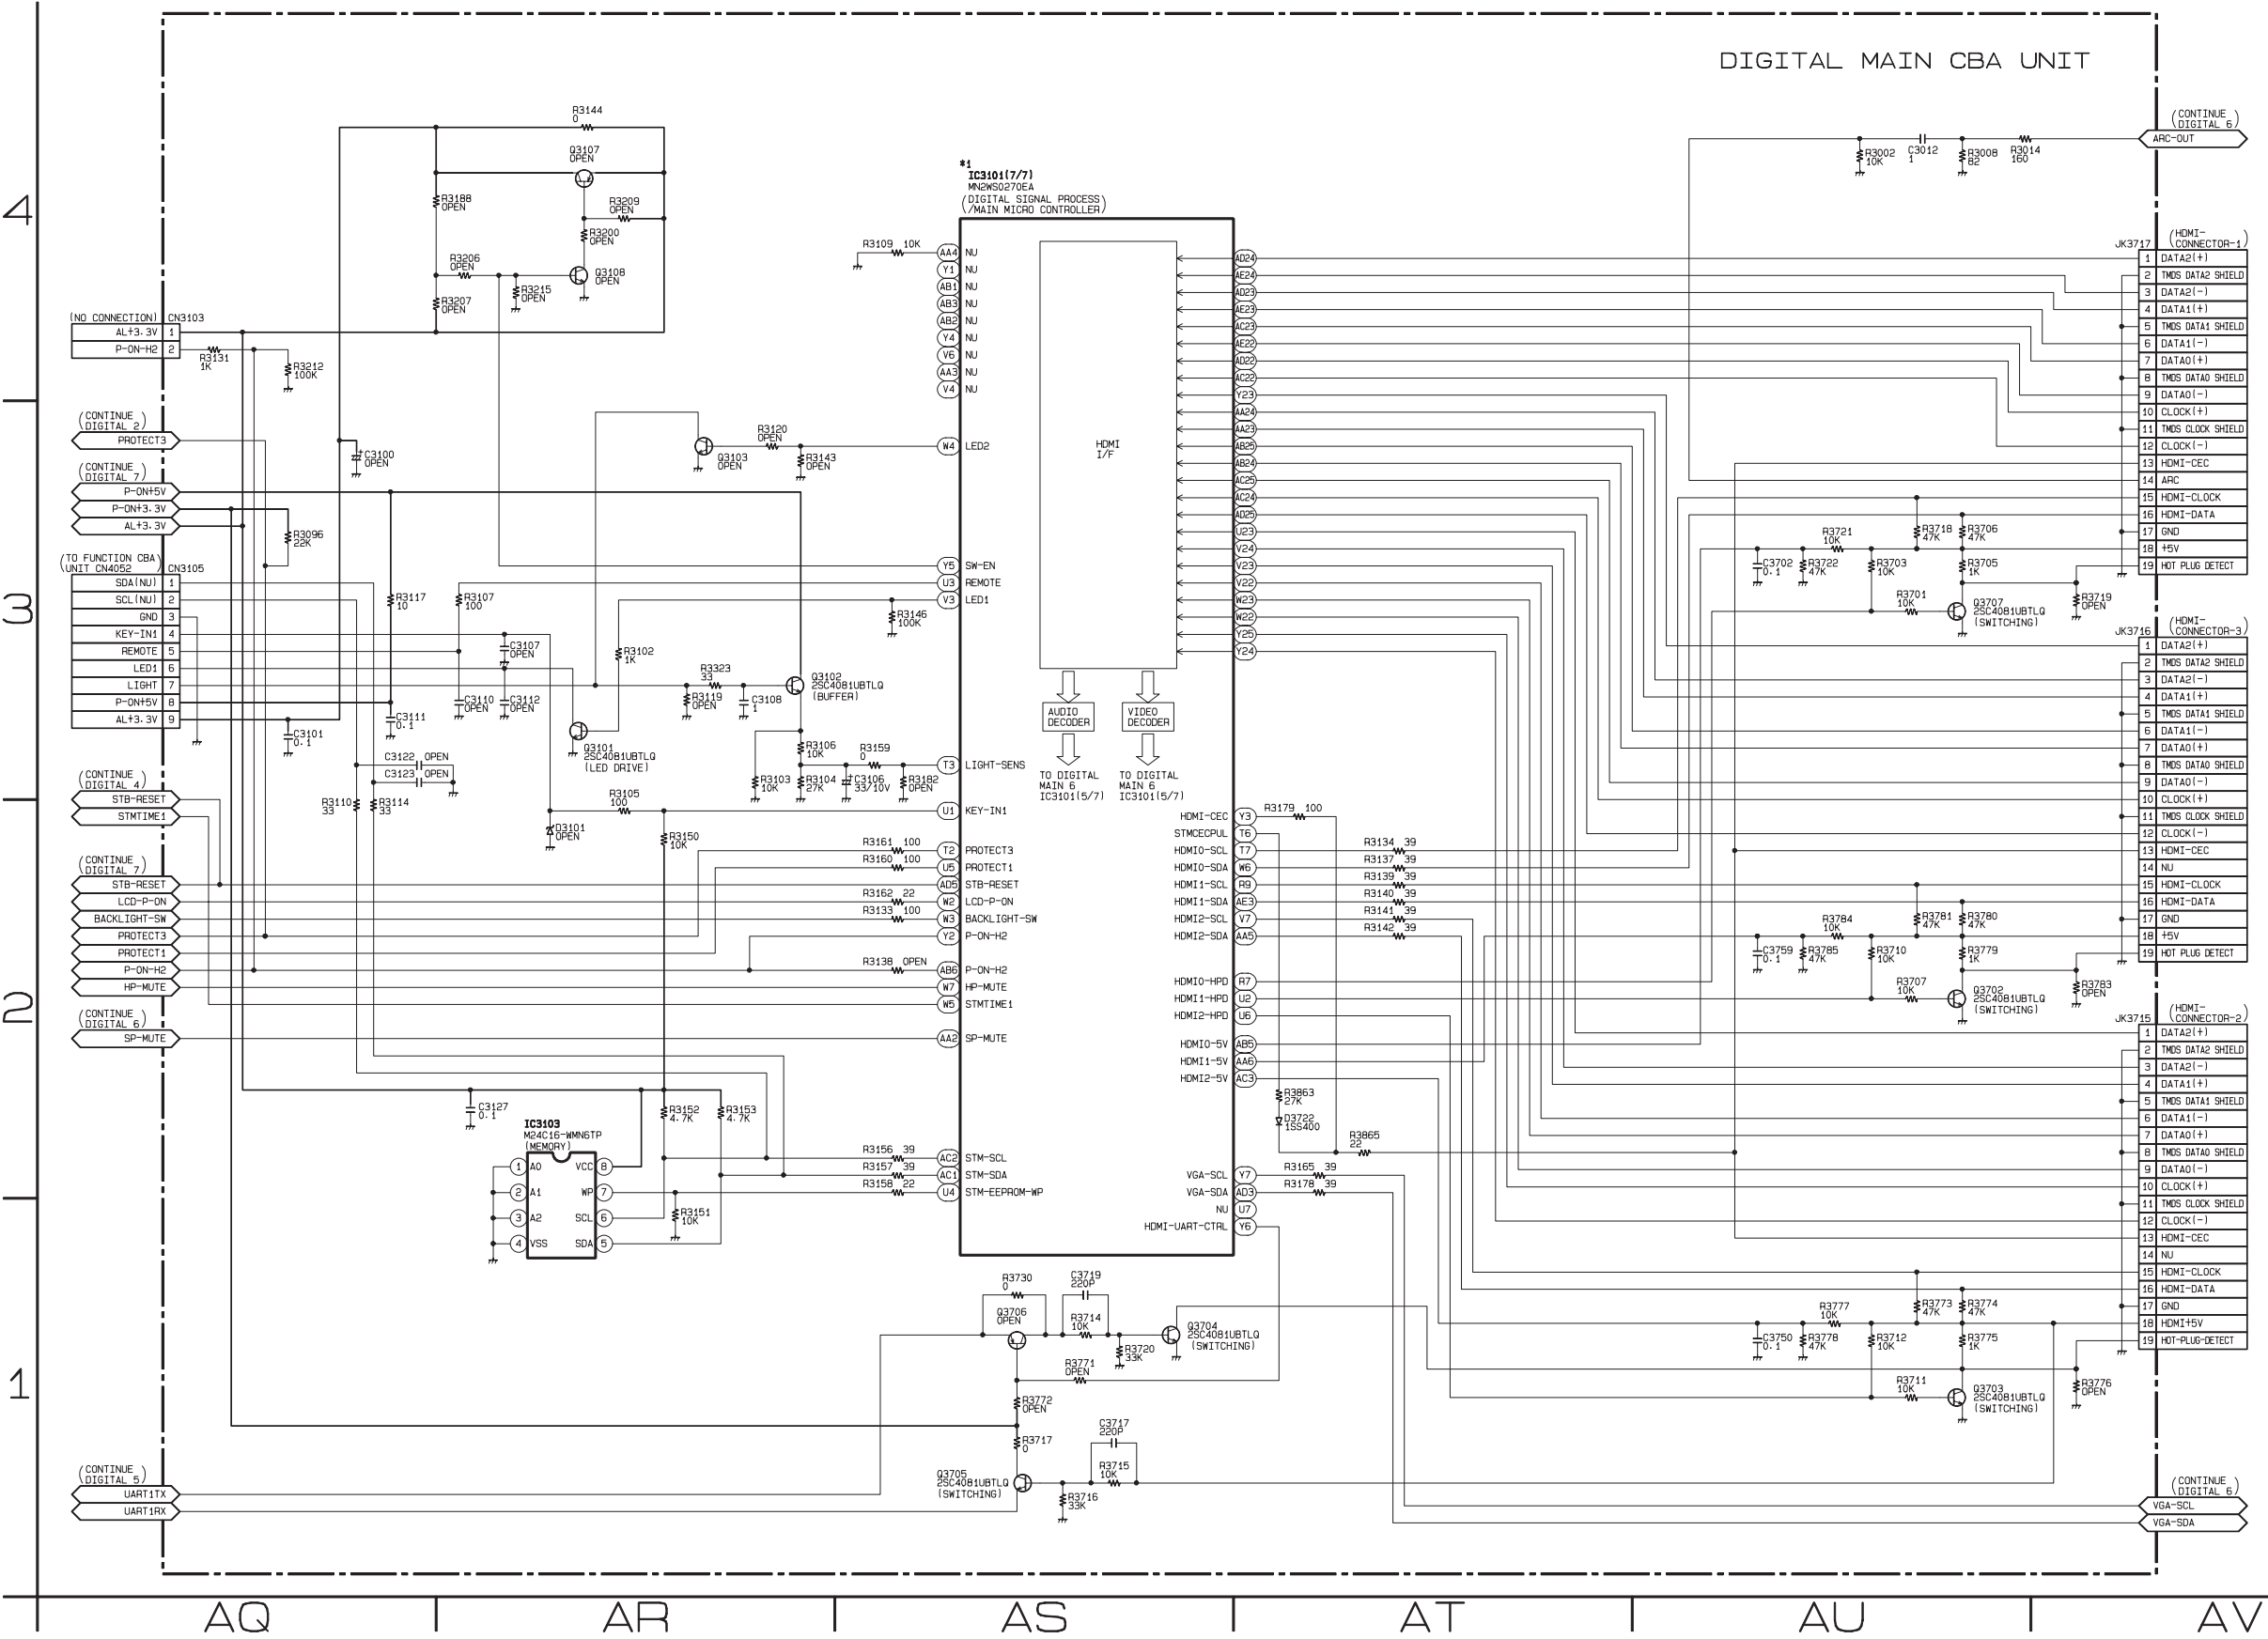


Digital Main 1 Schematic Diagram [TYPE B]

\*1 NOTE:  
The order of pins shown in this diagram is different from that of actual IC3005.  
IC3005 is divided into six and shown as IC3005 (1/6) ~ IC3005 (6/6) in this Digital Main Schematic Diagram Section.

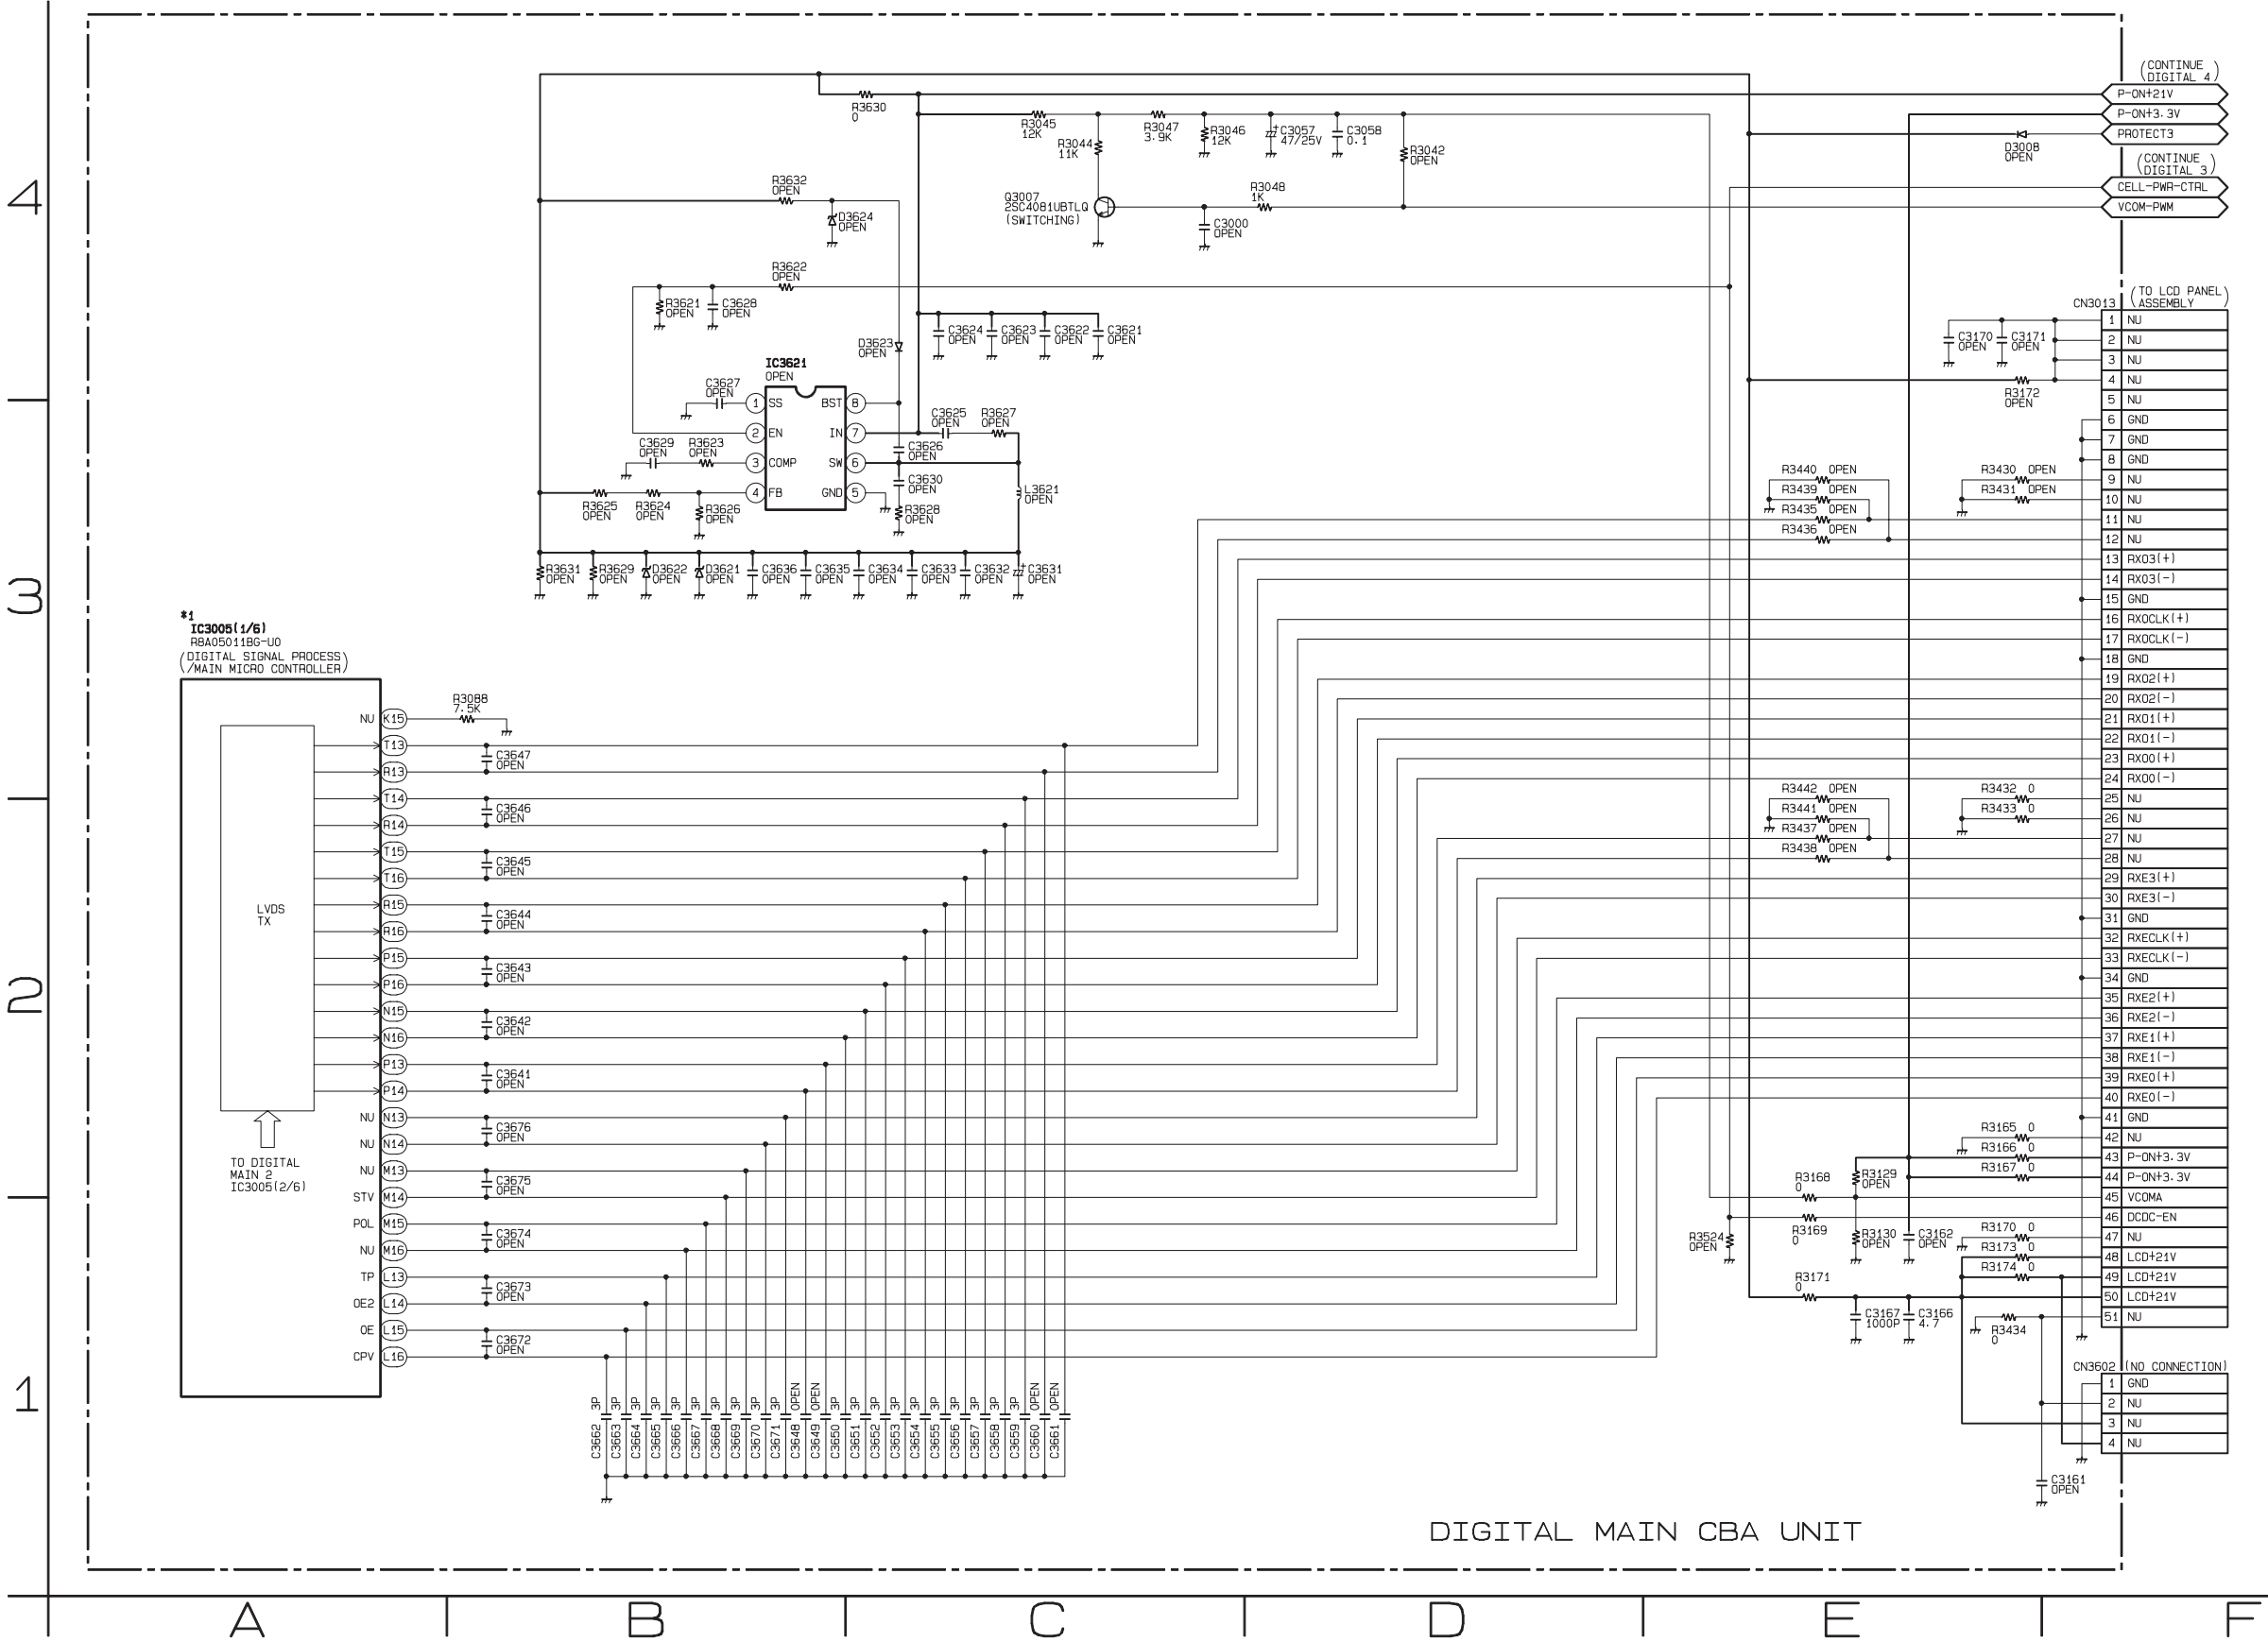

Digital Main 2 Schematic Diagram [TYPE B]

**\*1 NOTE:**  
The order of pins shown in this diagram is different from that of actual IC3005.  
IC3005 is divided into six and shown as IC3005 (1/6) ~ IC3005 (6/6) in this Digital Main Schematic Diagram Section.

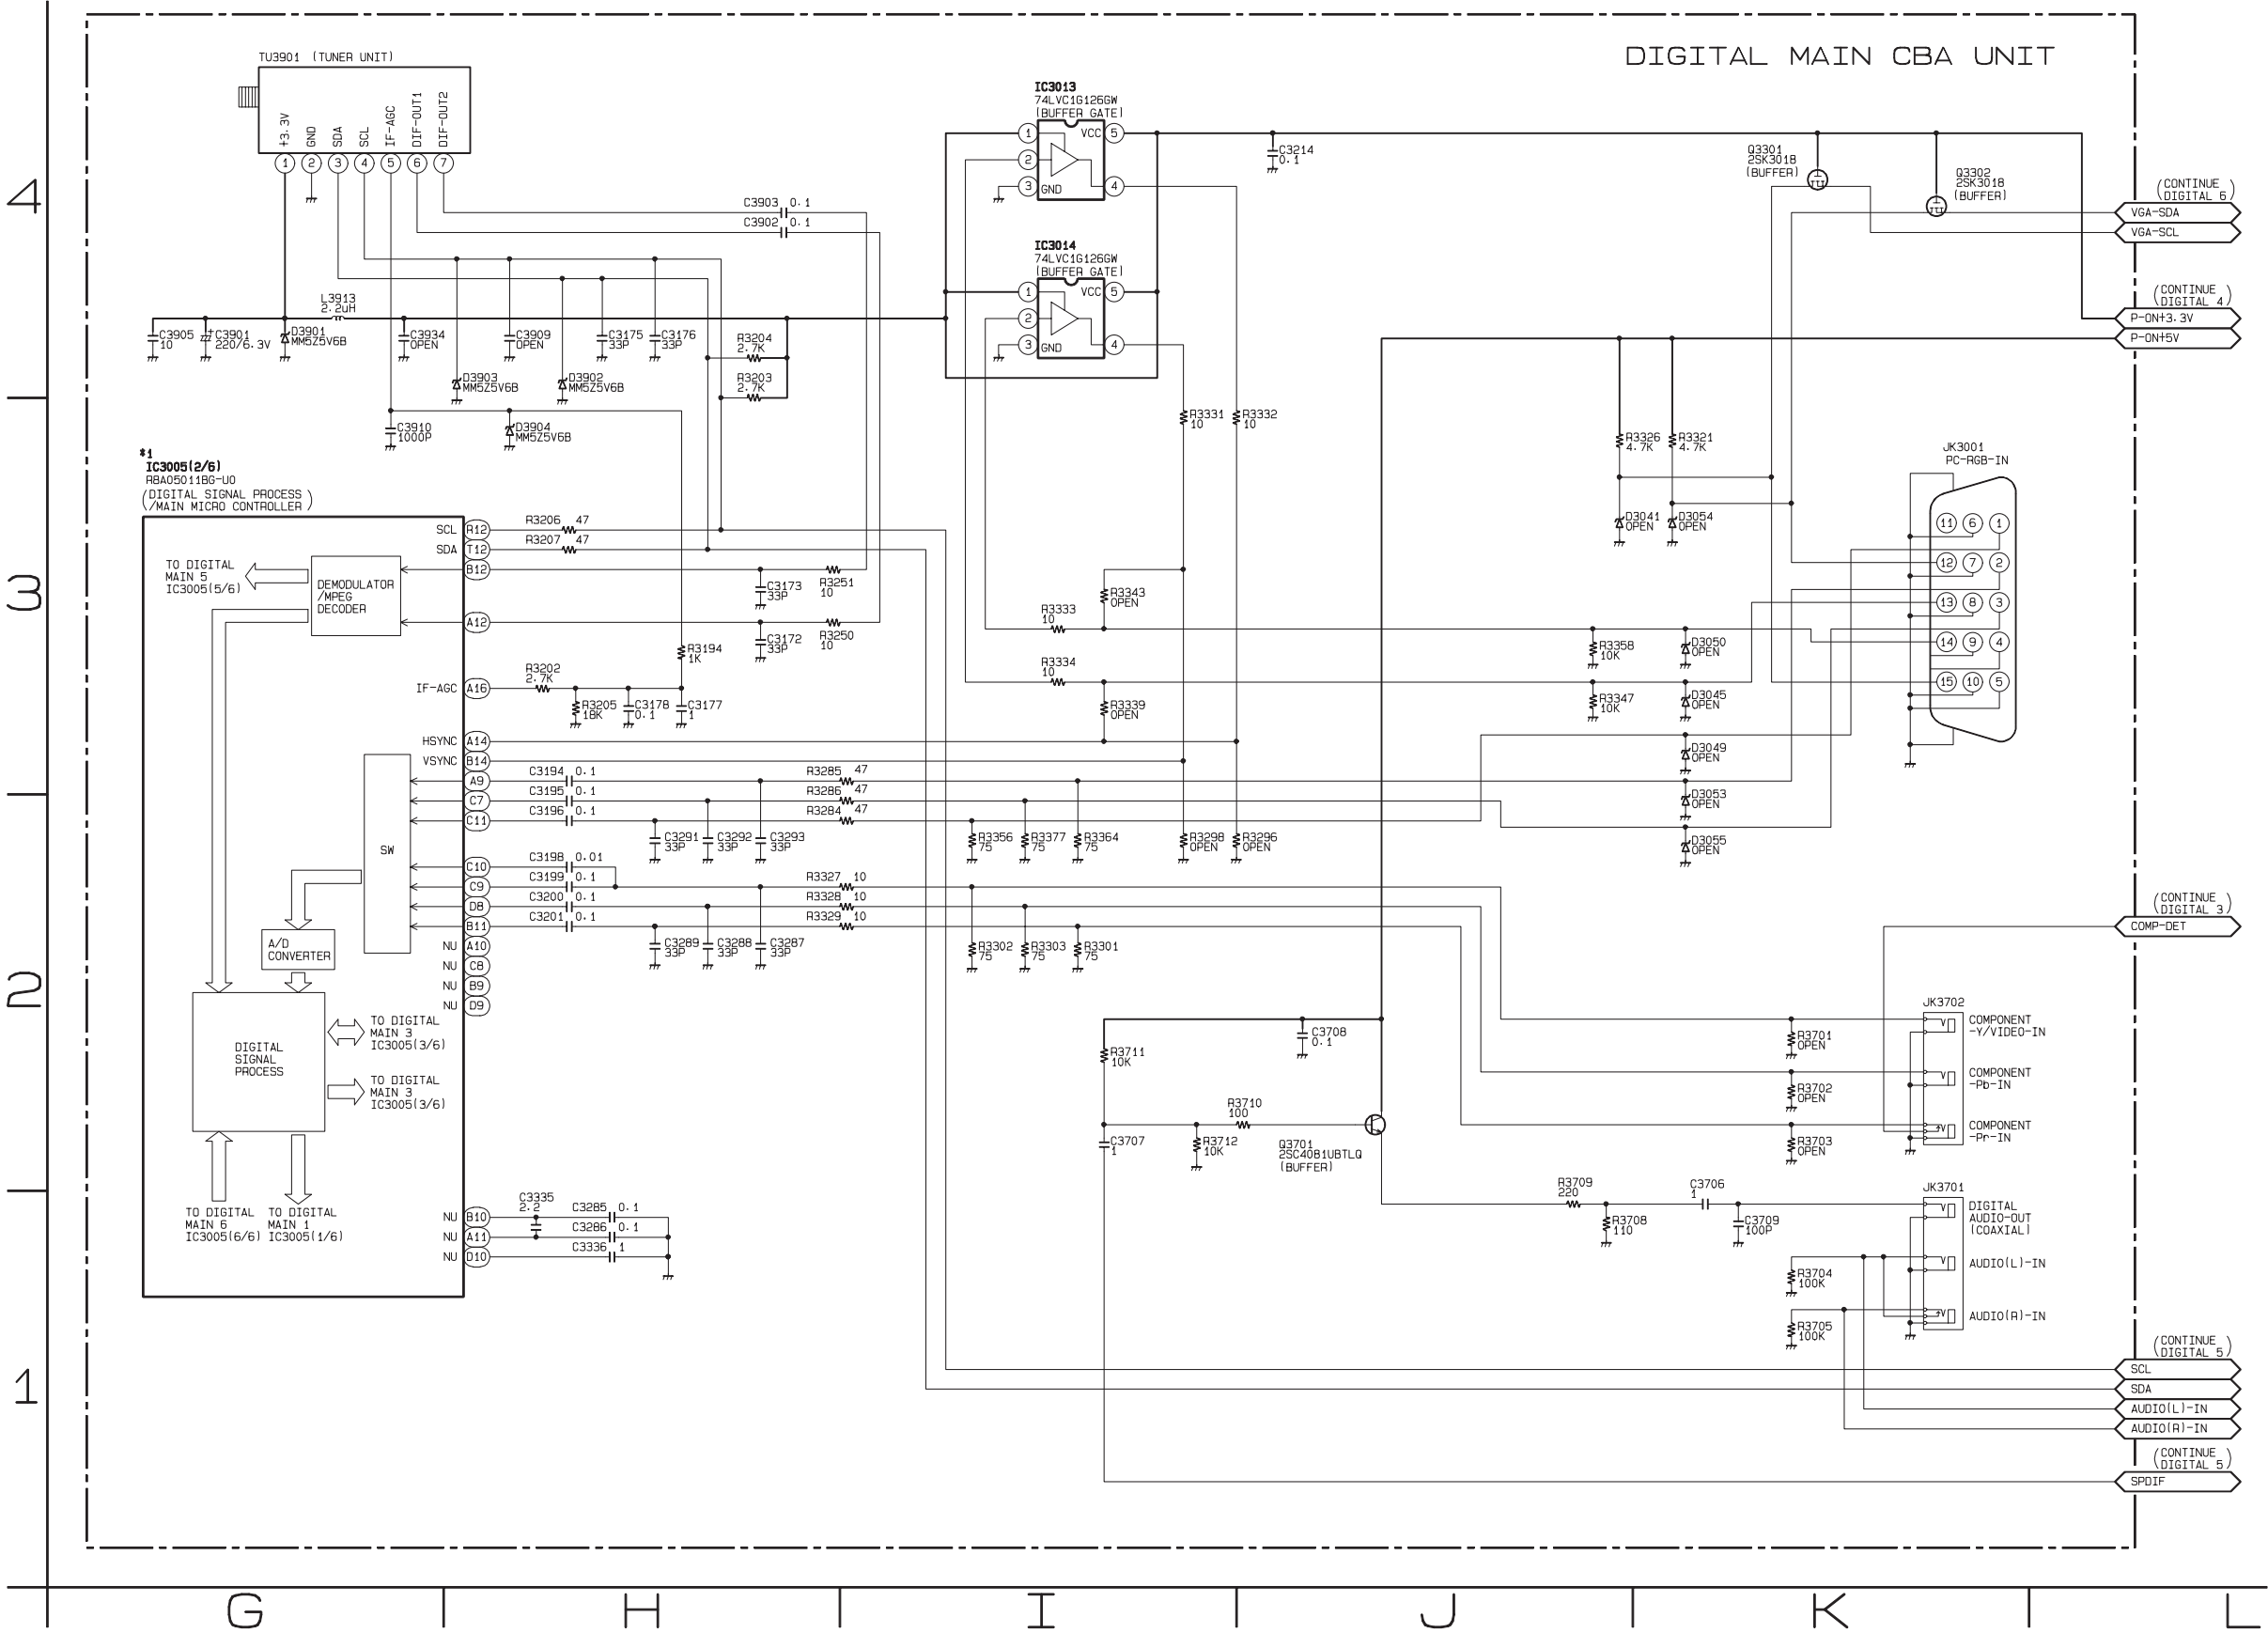

4  
—  
3  
—  
2  
—  
1


The order of pins shown in this diagram is different from that of actual IC3005.  
IC3005 is divided into six and shown as IC3005 (1/6) ~ IC3005 (6/6) in this Digital Main Schematic Diagram Section.





Digital Main 5 Schematic Diagram [TYPE B]

\*1 NOTE:  
The order of pins shown in this diagram is different from that of actual IC3005.  
IC3005 is divided into six and shown as IC3005 (1/6) ~ IC3005 (6/6) in this Digital Main Schematic Diagram Section.

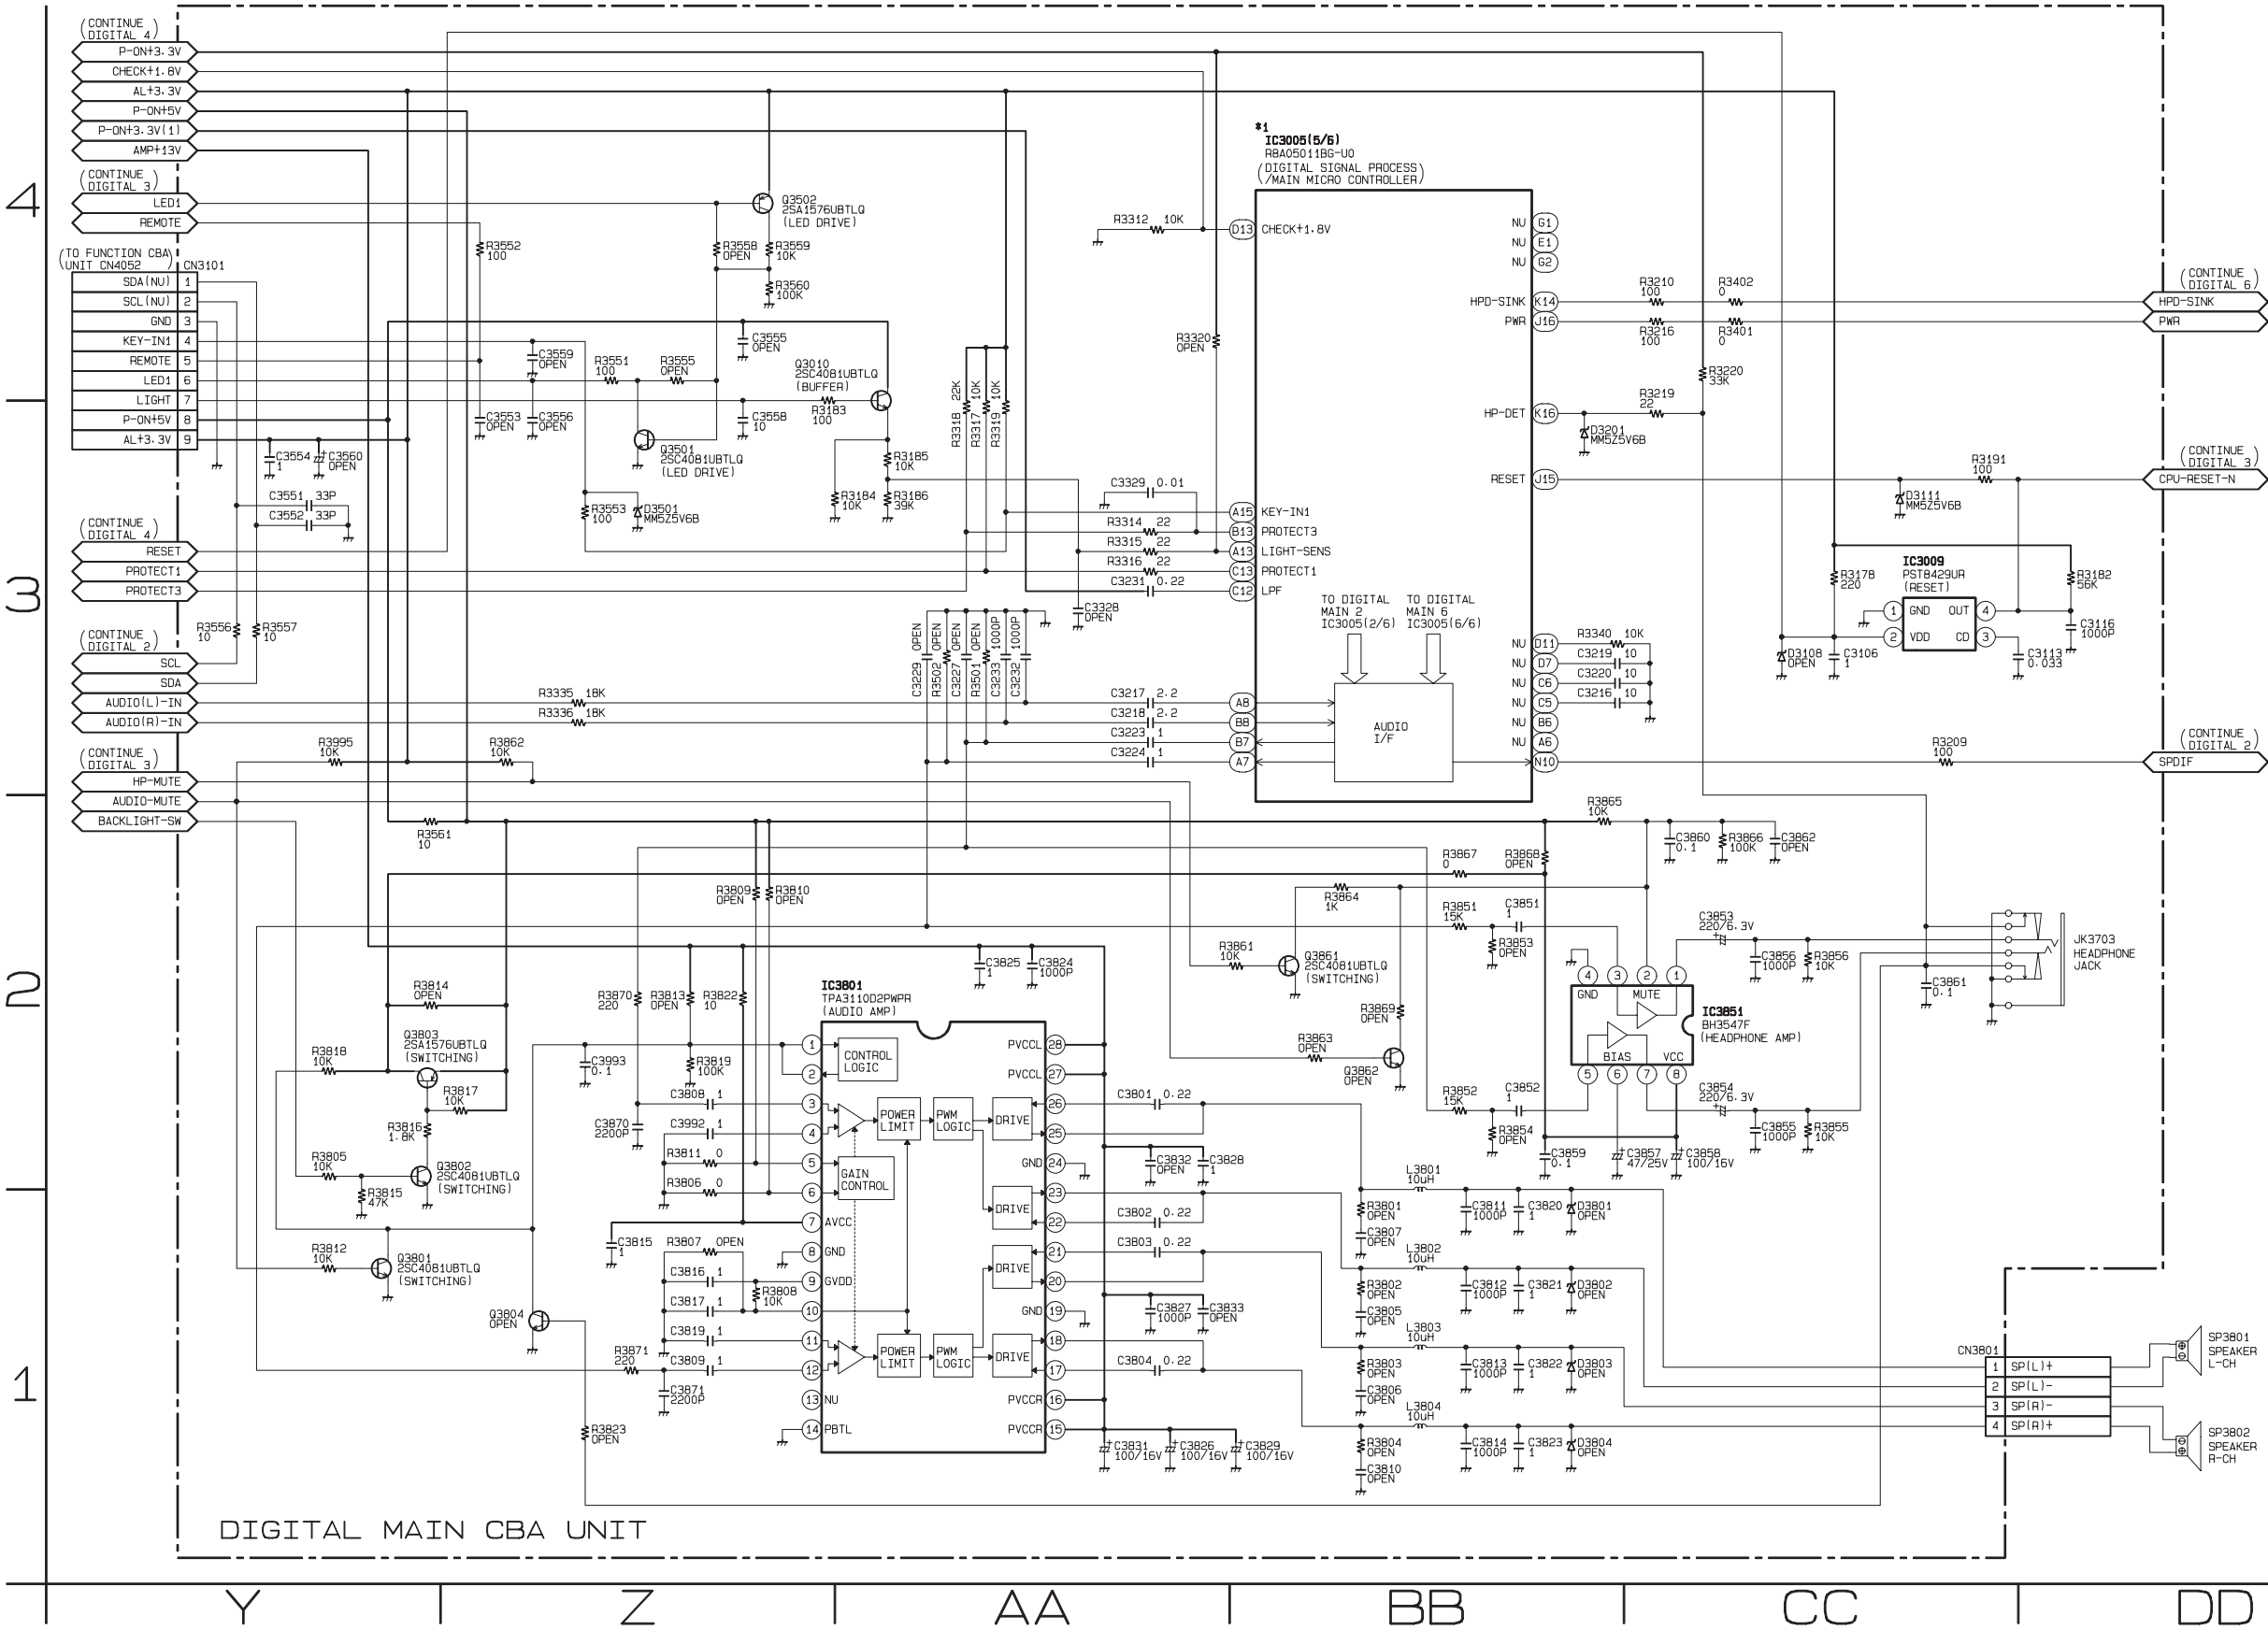


### Digital Main 6 Schematic Diagram [TYPE B]

**\*1 NOTE:**

The order of pins shown in this diagram is different from that of actual IC3005.

IC3005 is divided into six and shown as IC3005 (1/6) ~ IC3005 (6/6) in this Digital Main Schematic Diagram Section.

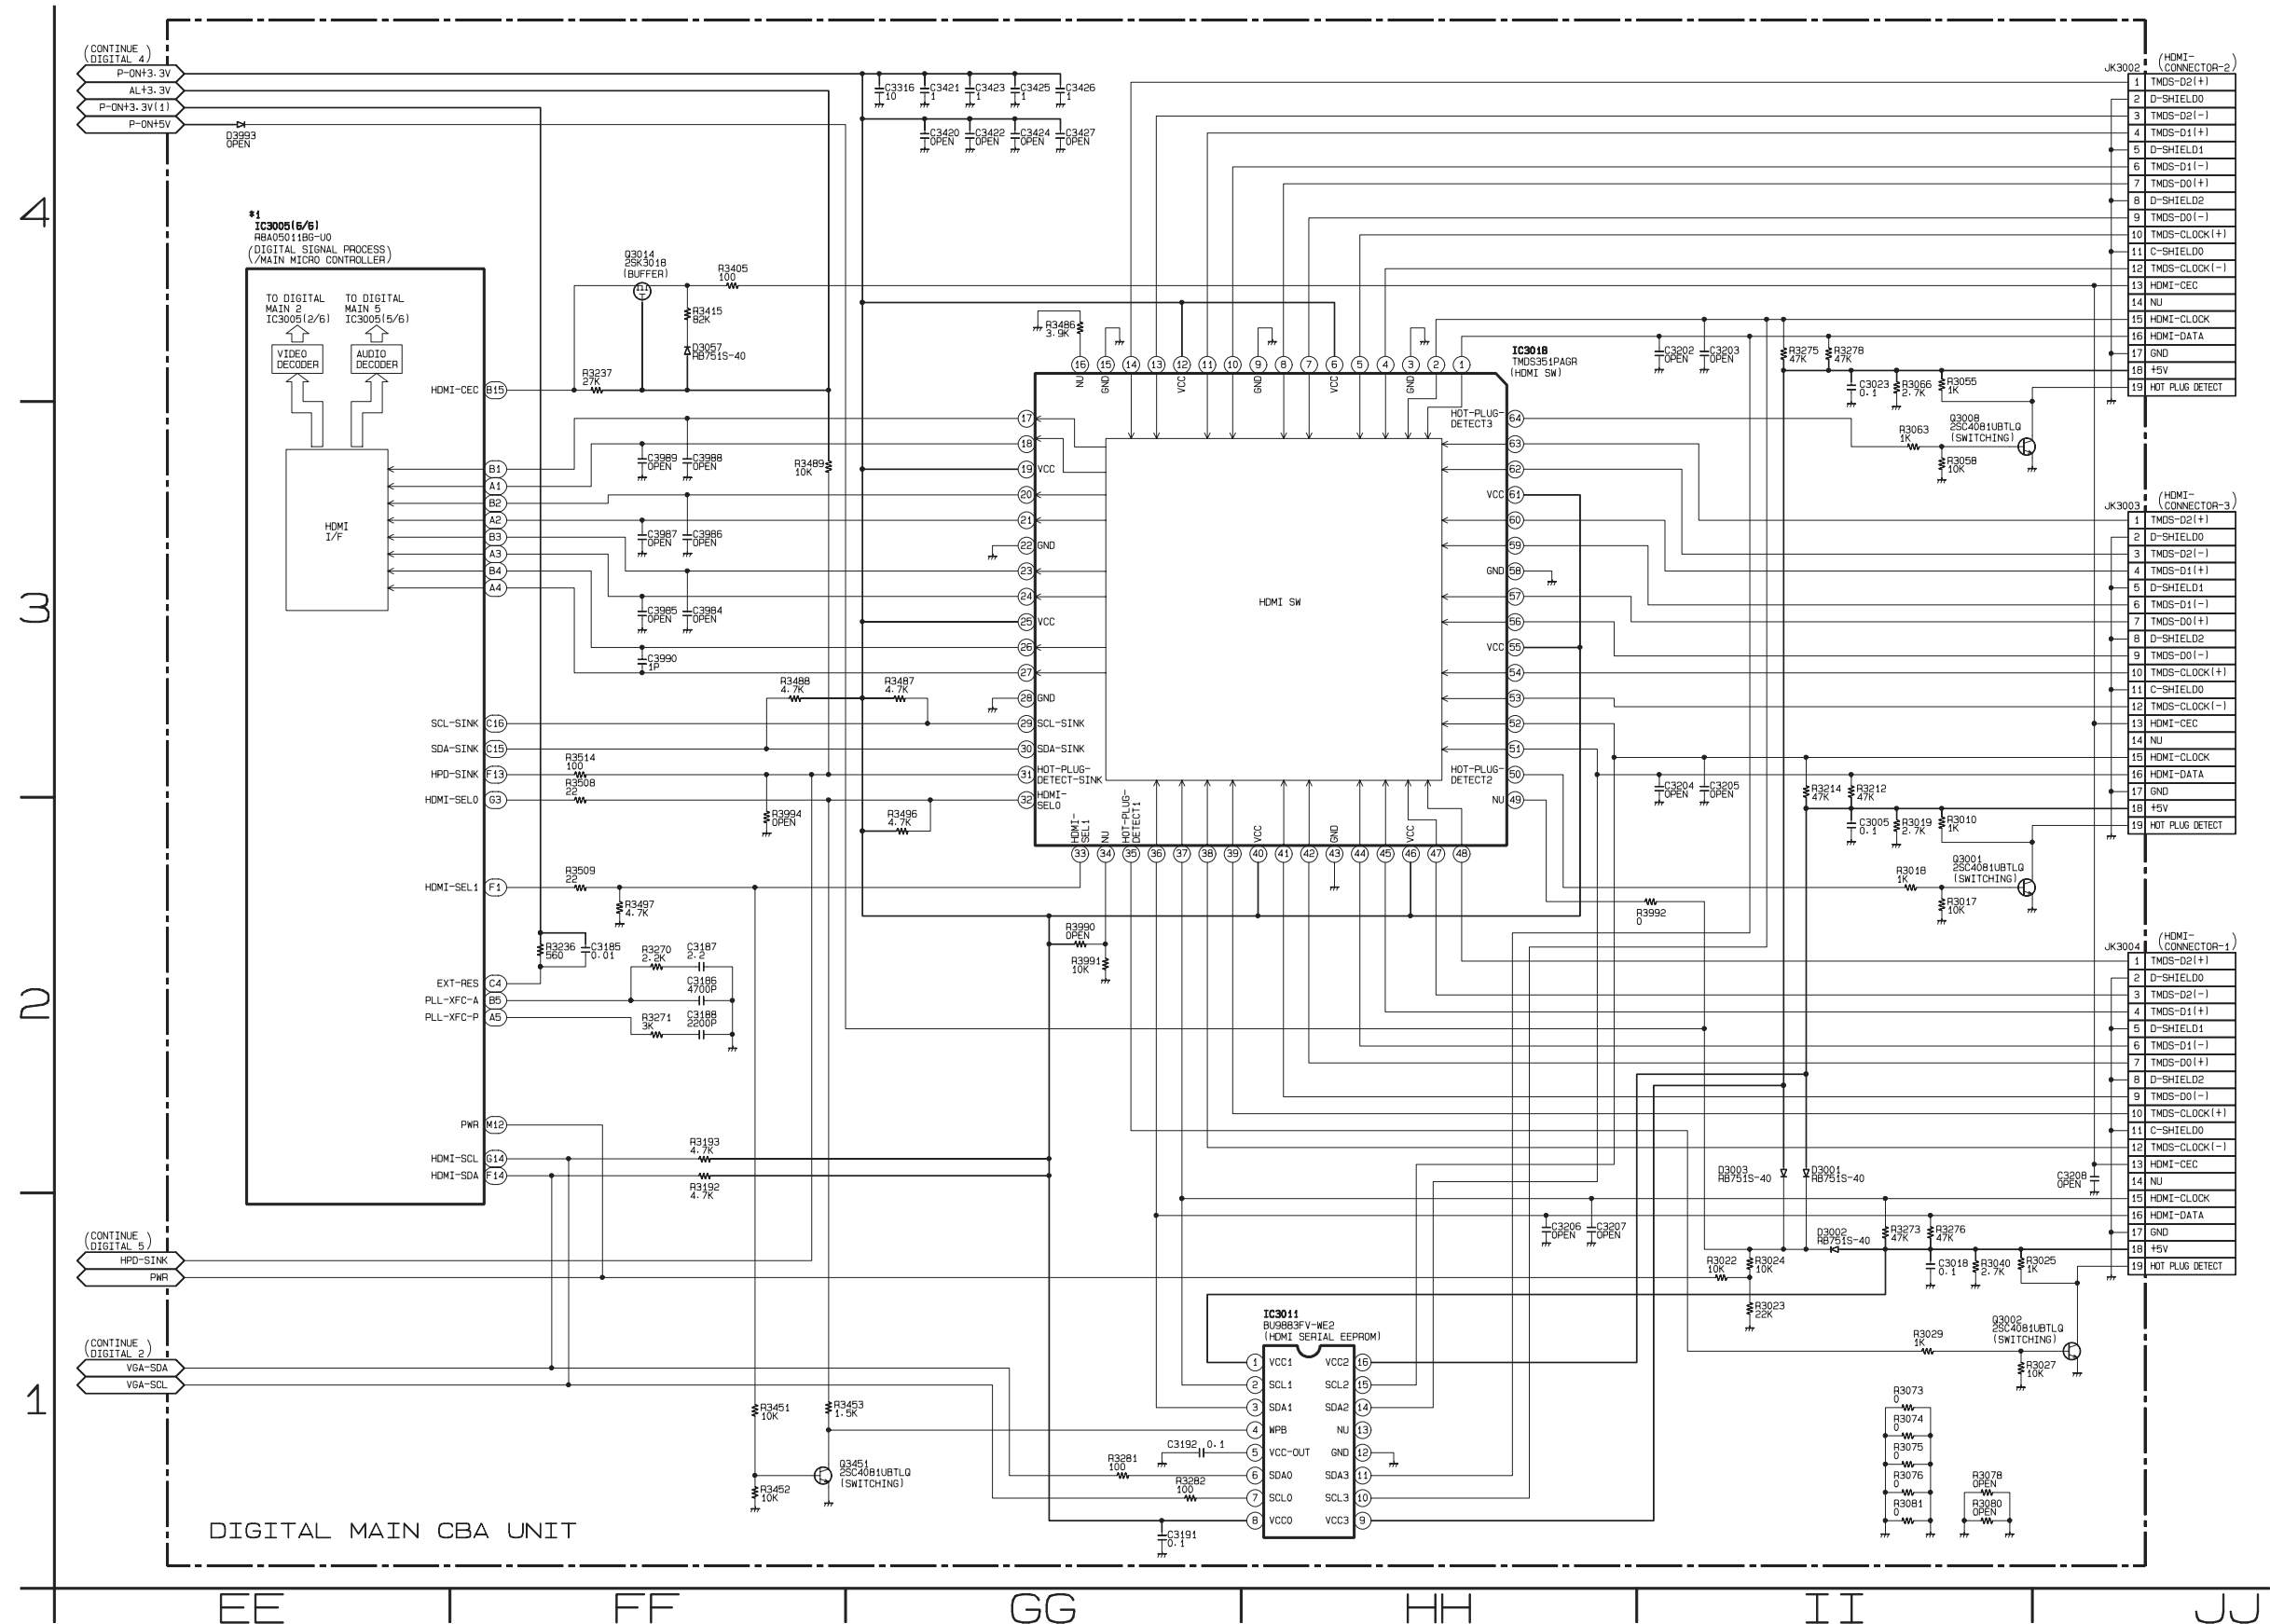


### Digital Main 1 Schematic Diagram [TYPE C]


**\*1 NOTE:**

The order of pins shown in this diagram is different from that of actual IC3001.

IC3001 is divided into five and shown as IC3001 (1/5) ~ IC3001 (5/5) in this Digital Main Schematic Diagram Section.

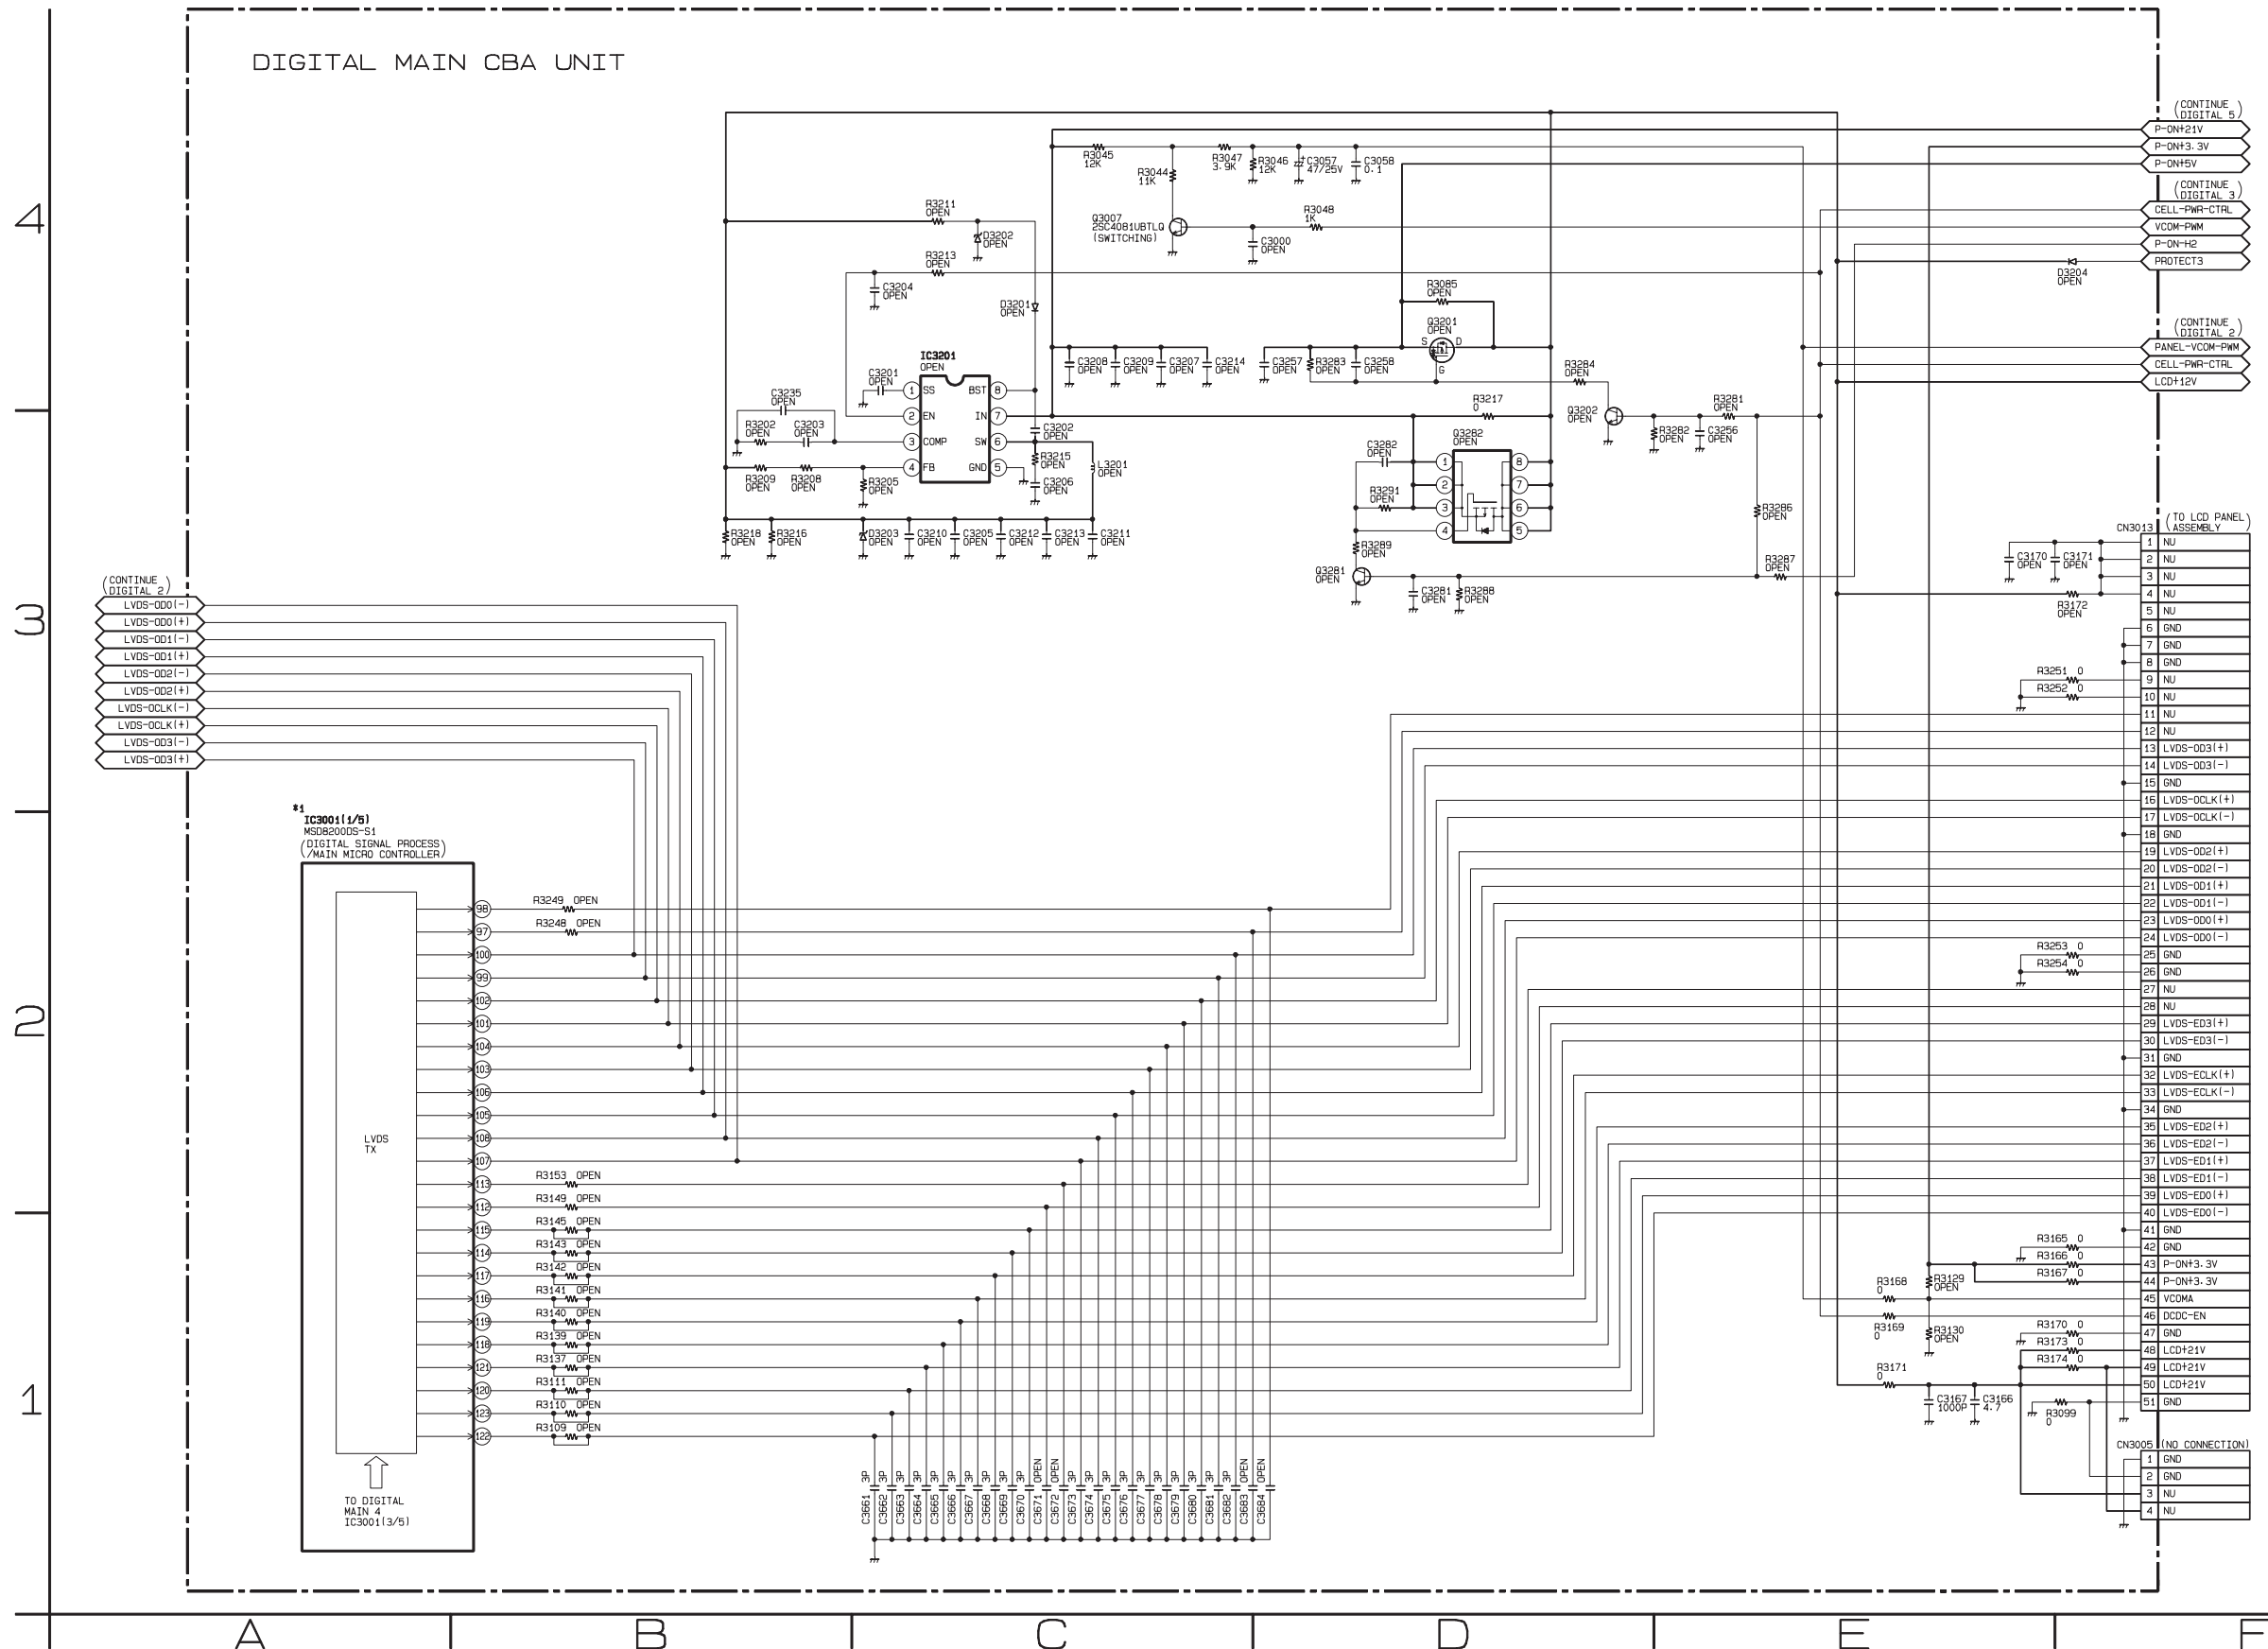

## Digital Main 2 Schematic Diagram [TYPE C]

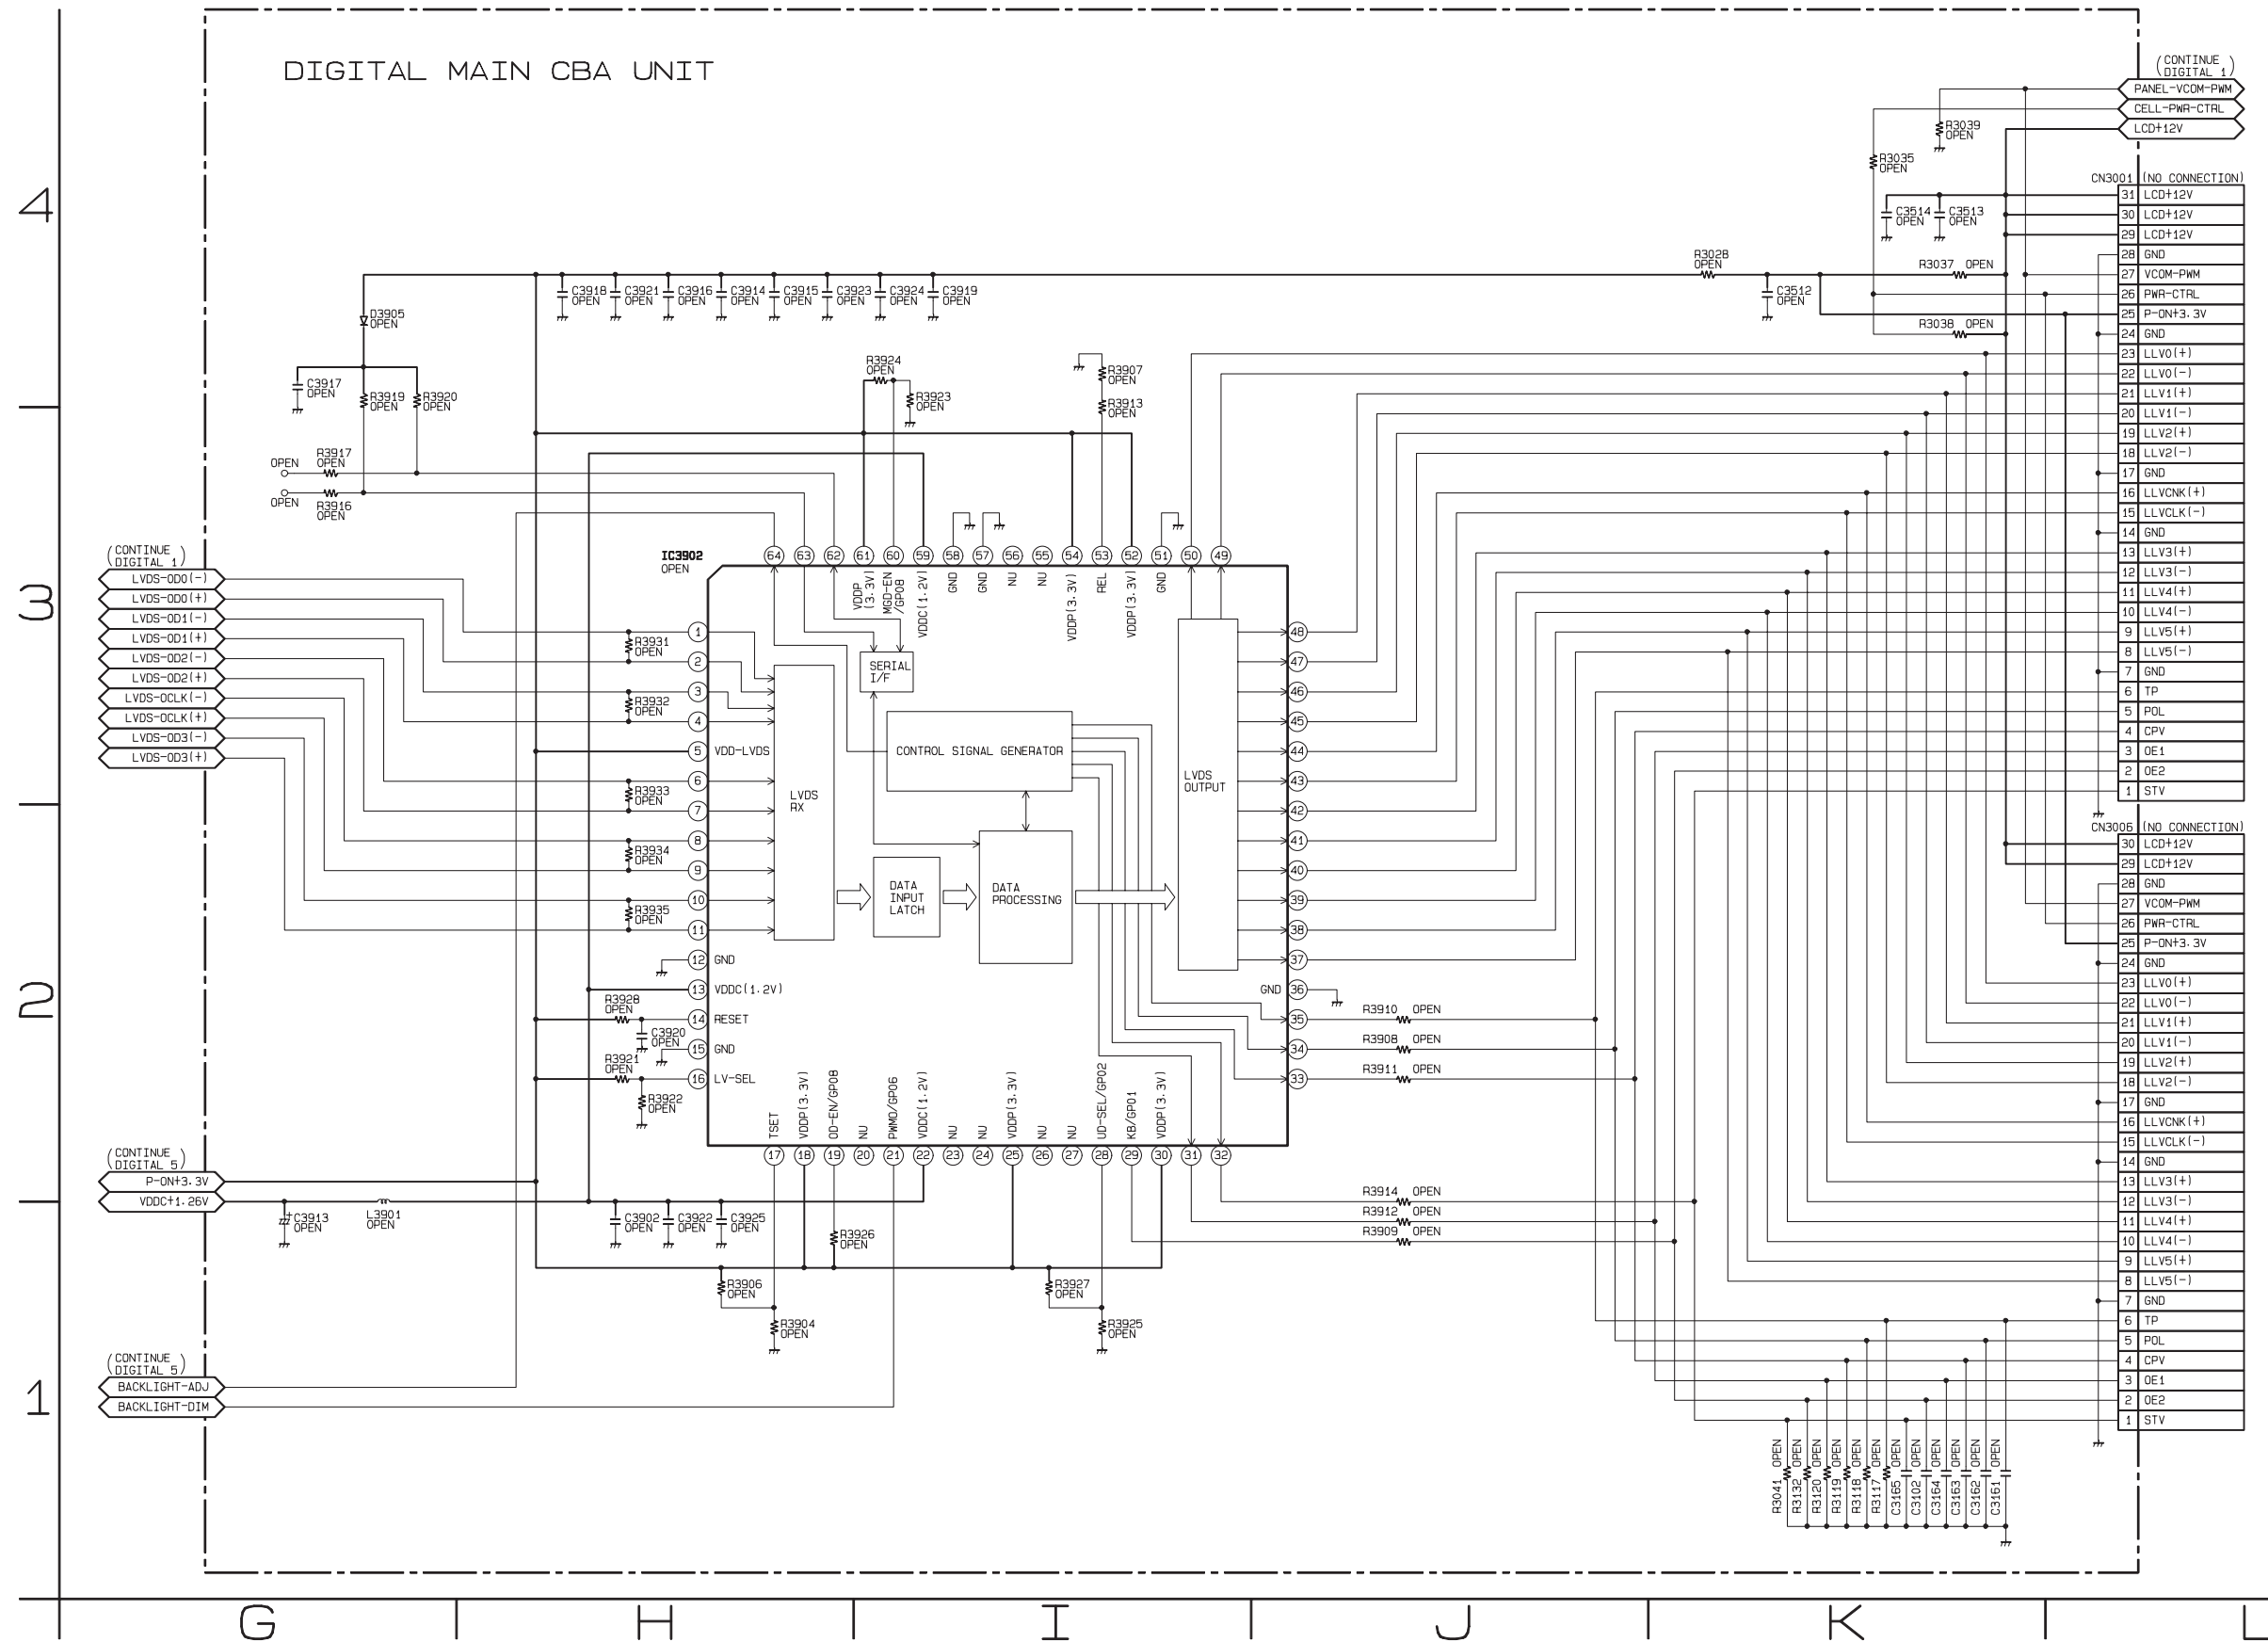

1

IC3001 is divided into five and shown as IC3001 (1/5) ~ IC3001 (5/5) in this Digital Main Schematic Diagram Section.




A vertical axis with tick marks and labels 1, 2, 3, and 4.

IC3001 is divided into five and shown as IC3001 (1/5) ~ IC3001 (5/5) in this Digital Main Schematic Diagram Section.




Digital Main 5 Schematic Diagram [TYPE C]

\*1 NOTE:  
The order of pins shown in this diagram is different from that of actual IC3001.  
IC3001 is divided into five and shown as IC3001 (1/5) ~ IC3001 (5/5) in this Digital Main Schematic Diagram Section.

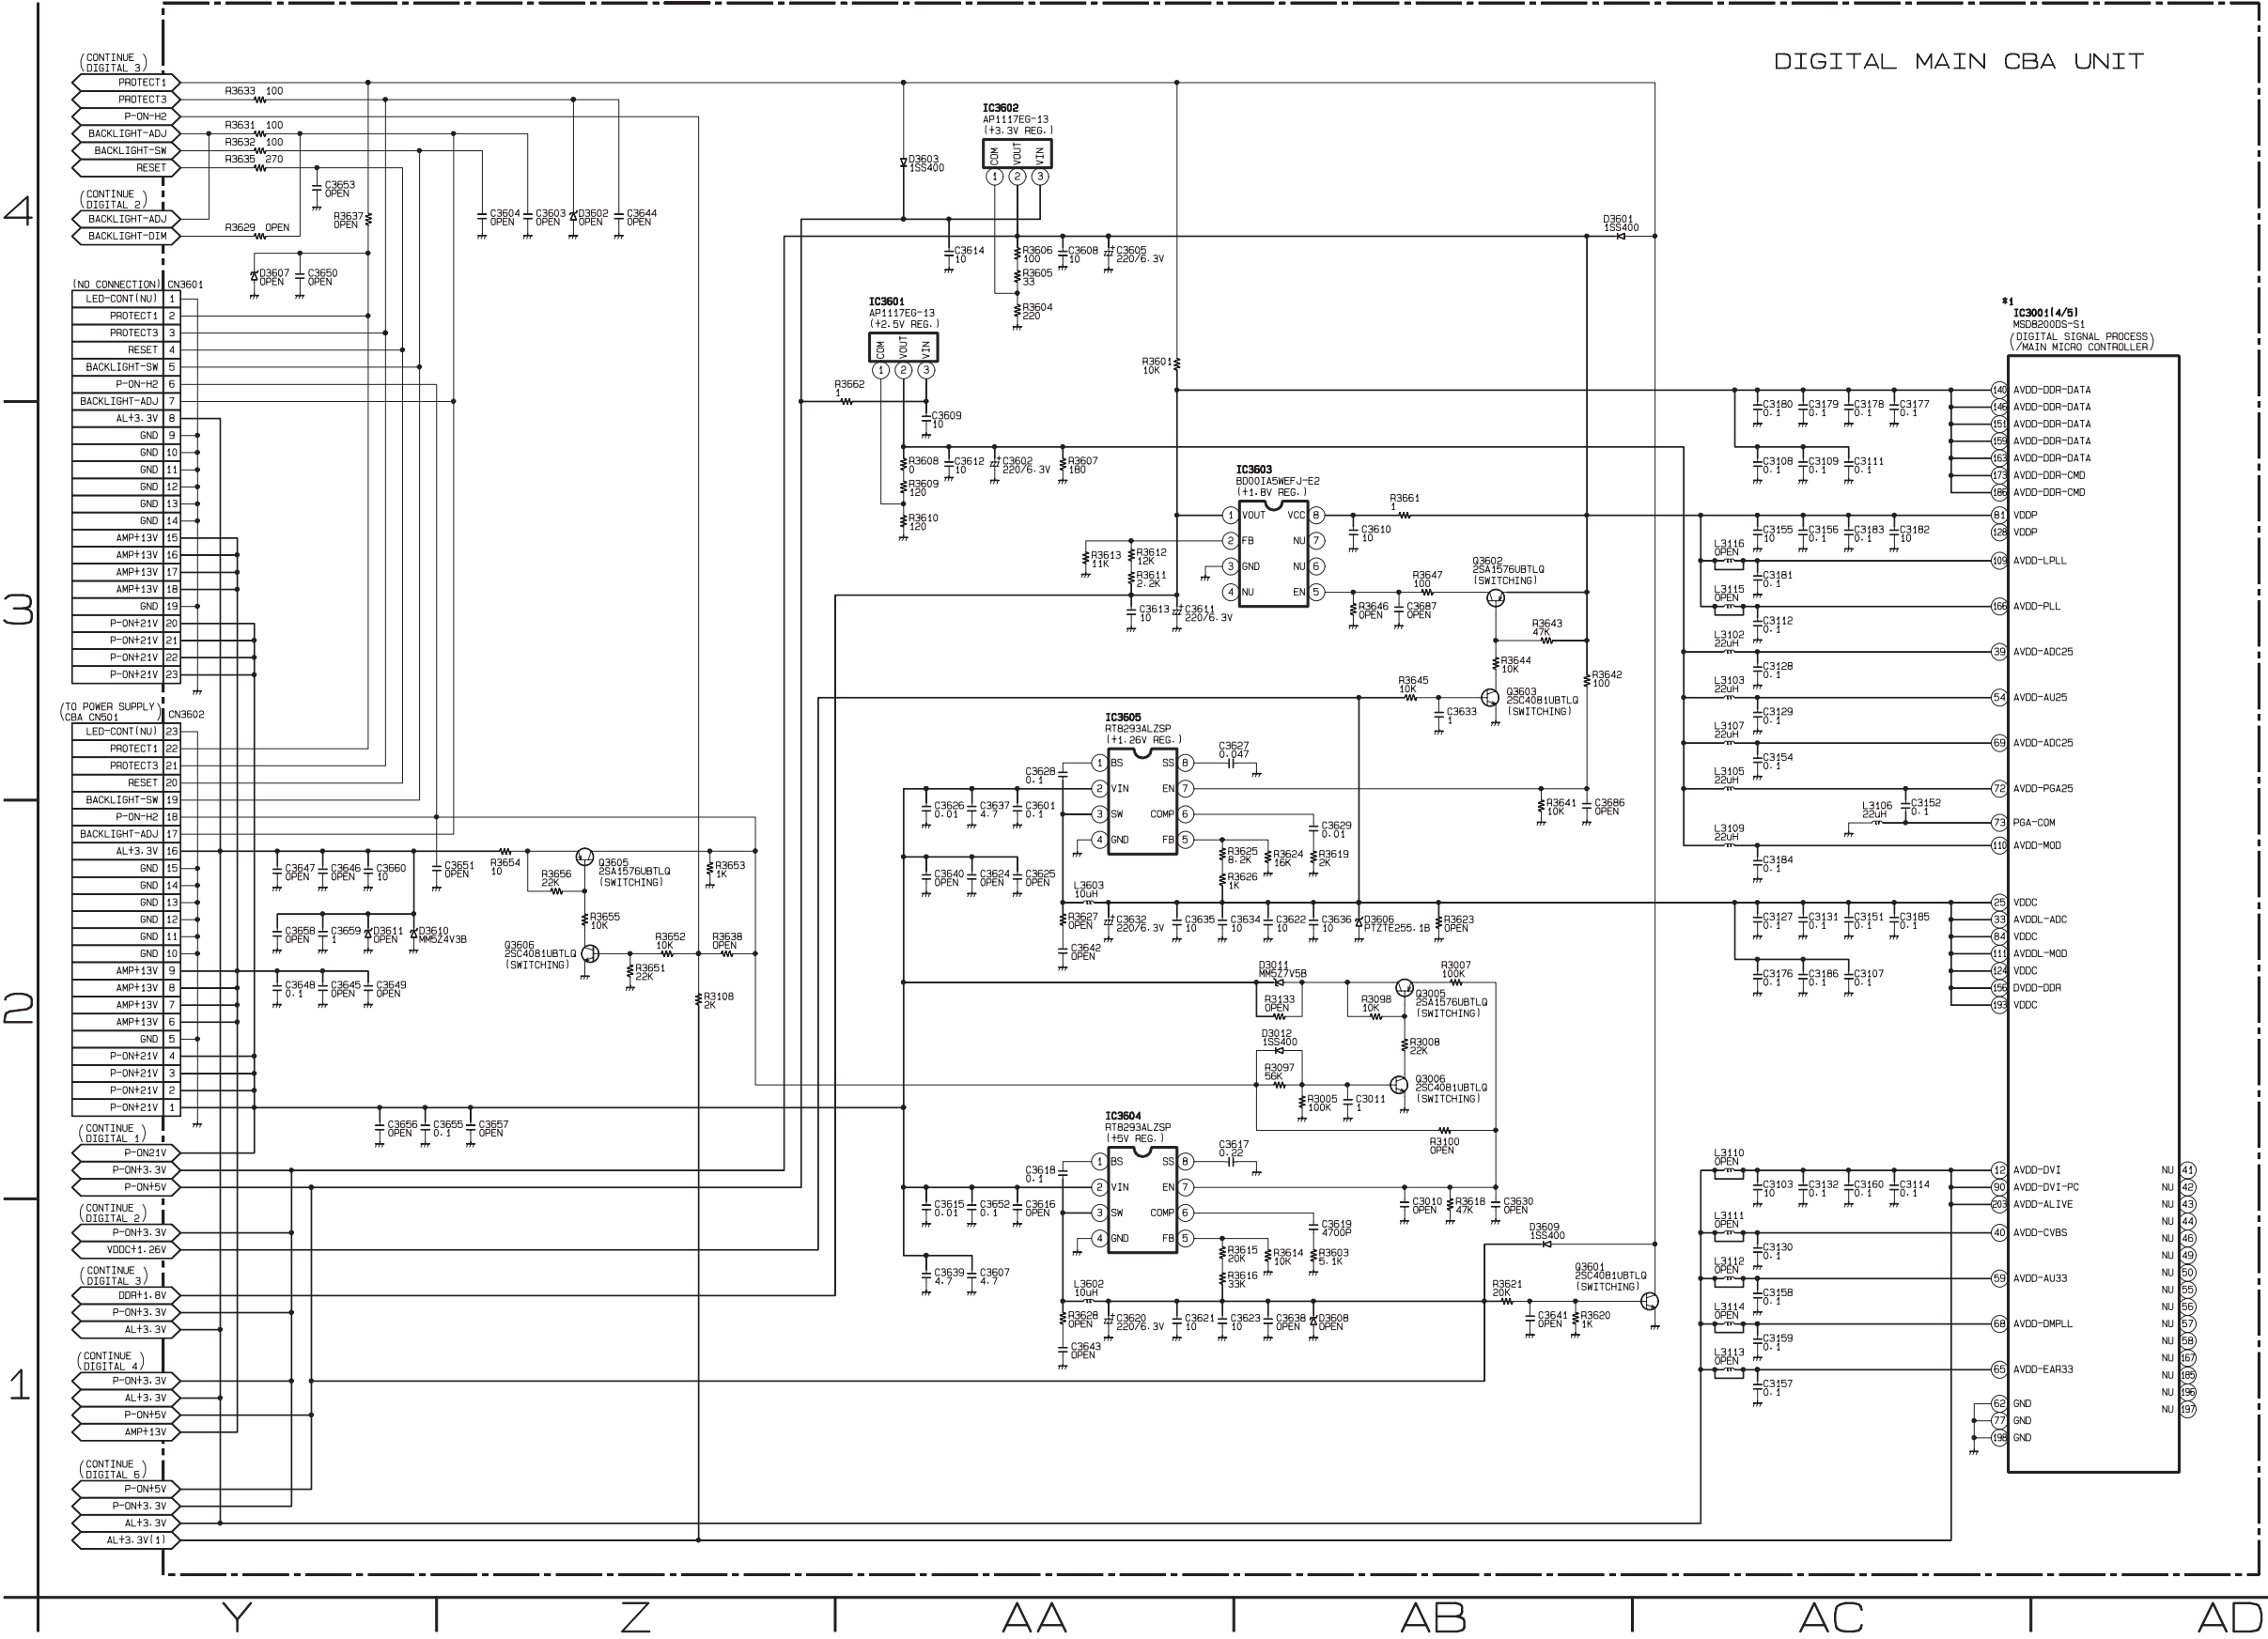

Digital Main 6 Schematic Diagram [TYPE C]


\*1 NOTE:  
The order of pins shown in this diagram is different from that of actual IC3001.  
IC3001 is divided into five and shown as IC3001 (1/5) ~ IC3001 (5/5) in this Digital Main Schematic Diagram Section.

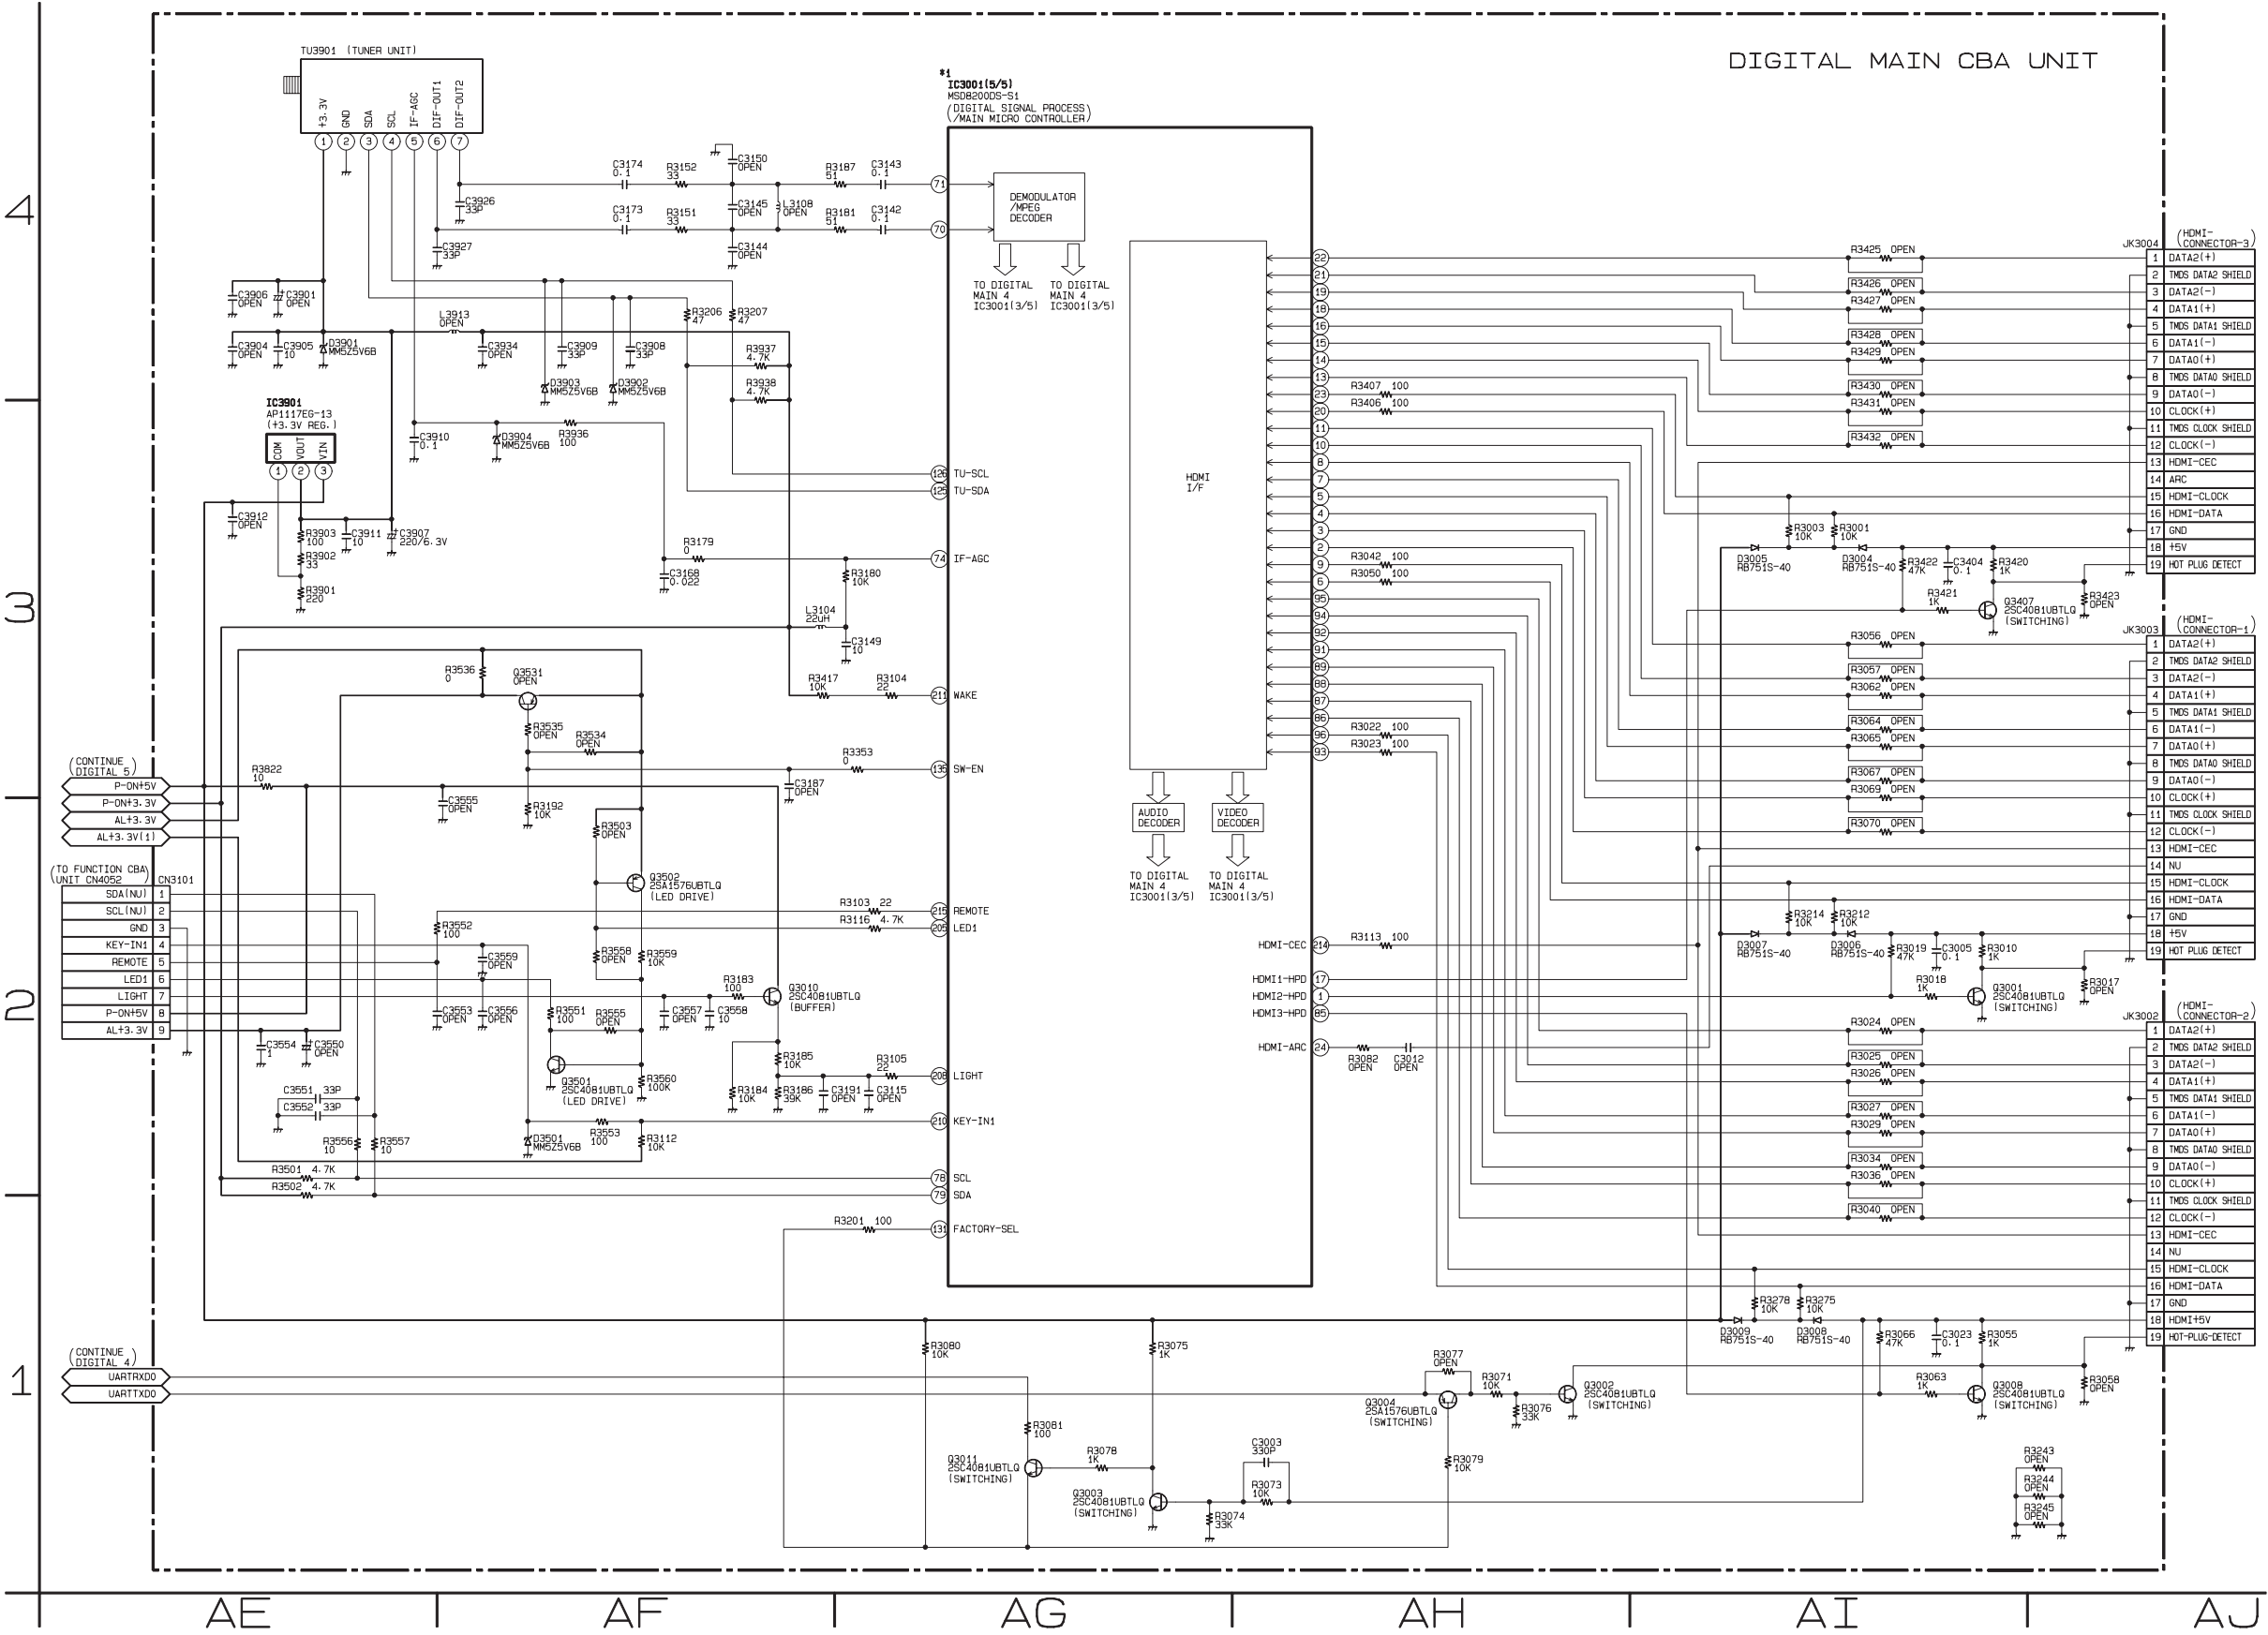

## Power Supply CBA Top View

**CAUTION !**

Fixed voltage (or Auto voltage selectable) power supply circuit is used in this unit. If Main Fuse (F602) is blown, check to see that all components in the power supply circuit are not defective before you connect the AC plug to the AC power supply. Otherwise it may cause some components in the power supply circuit to fail.




**CAUTION ! :** For continued protection against risk of fire, replace only with same type 2.5A, 250V fuse.

⚠ **ATTENTION** : Utiliser un fusible de rechange de même type de 2.5A, 250V.

Because a hot chassis ground is present in the power supply circuit, an isolation transformer must be used when repairing. Also, in order to have the ability to increase the input slowly, when troubleshooting this type of power supply circuit, a variable isolation transformer is required.

**NOTE:**


The voltage for parts in hot circuit is measured using hot GND as a common terminal.

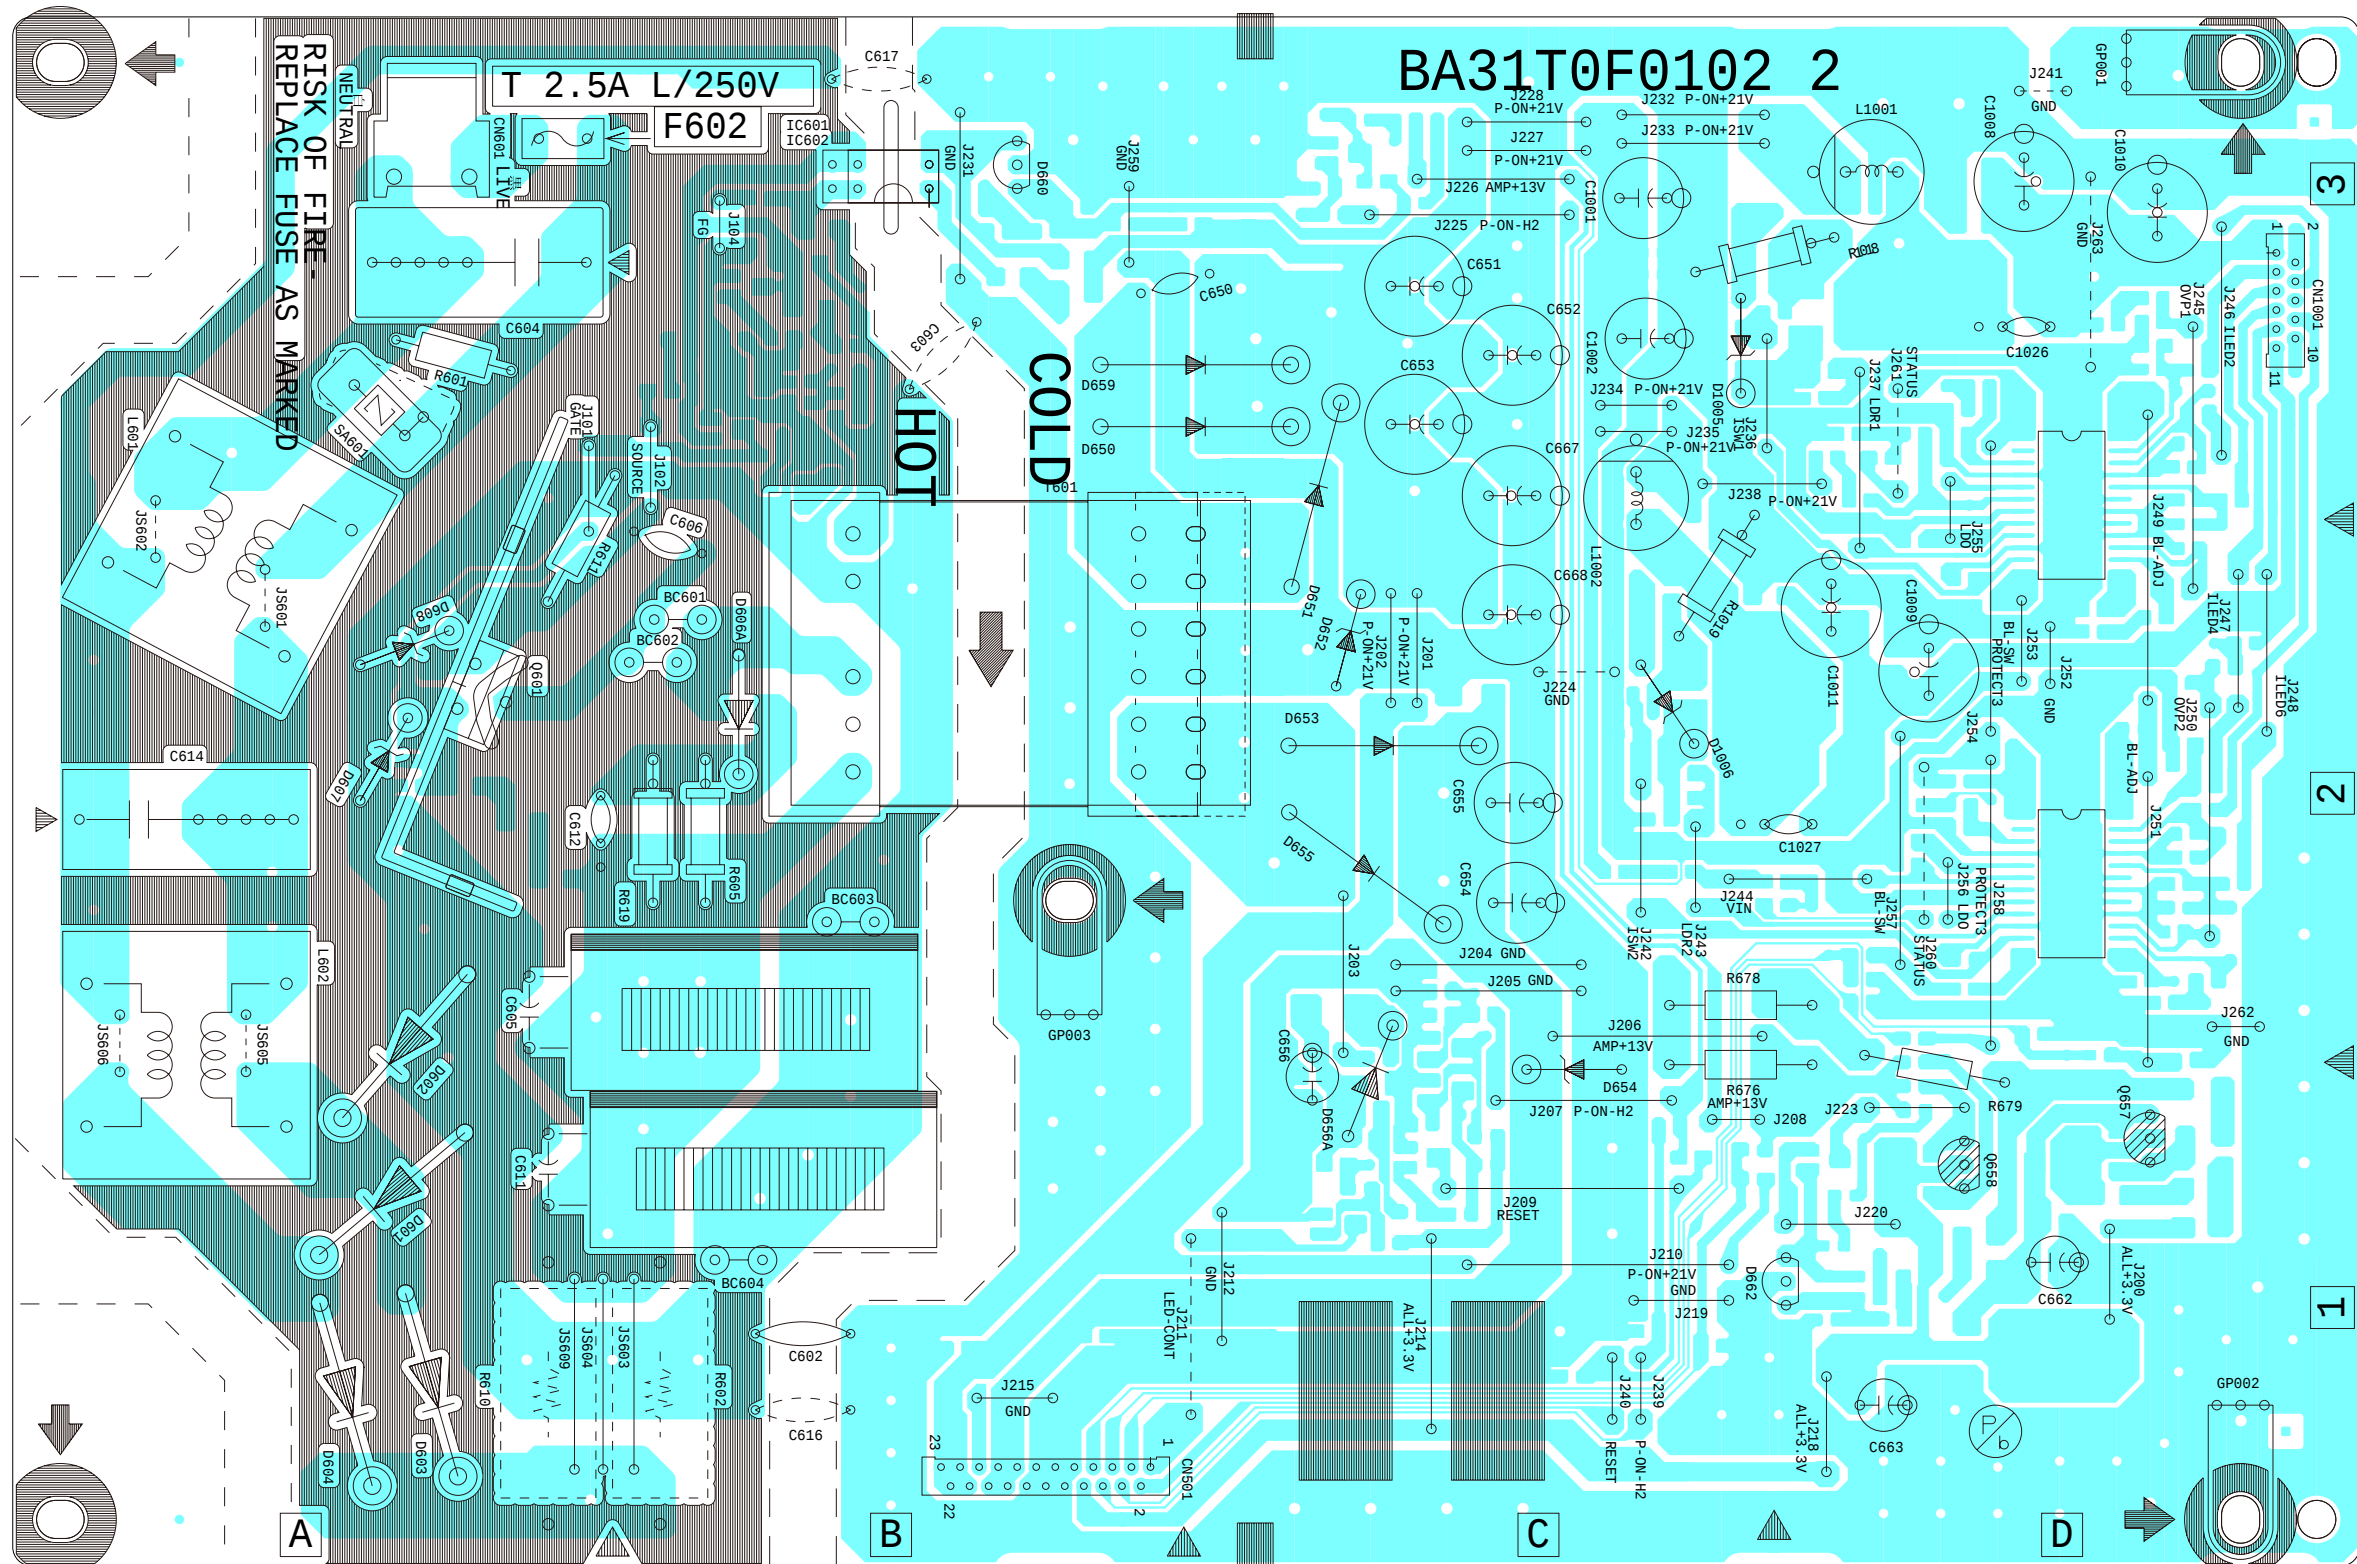

# Power Supply CBA Bottom View

### CAUTION !

Fixed voltage (or Auto voltage selectable) power supply circuit is used in this unit.  
If Main Fuse (F602) is blown , check to see that all components in the power supply circuit are not defective before you connect the AC plug to the AC power supply.  
Otherwise it may cause some components in the power supply circuit to fail.




**CAUTION ! :** For continued protection against risk of fire,  
replace only with same type 2.5A, 250V fuse.

**ATTENTION :** Utiliser un fusible de rechange de même type de 2.5A, 250V.

Because a hot chassis ground is present in the power supply circuit, an isolation transformer must be used when repairing.  
Also, in order to have the ability to increase the input slowly, when troubleshooting this type of power supply circuit, a variable isolation transformer is required.


### NOTE:

The voltage for parts in hot circuit is measured using hot GND as a common terminal.

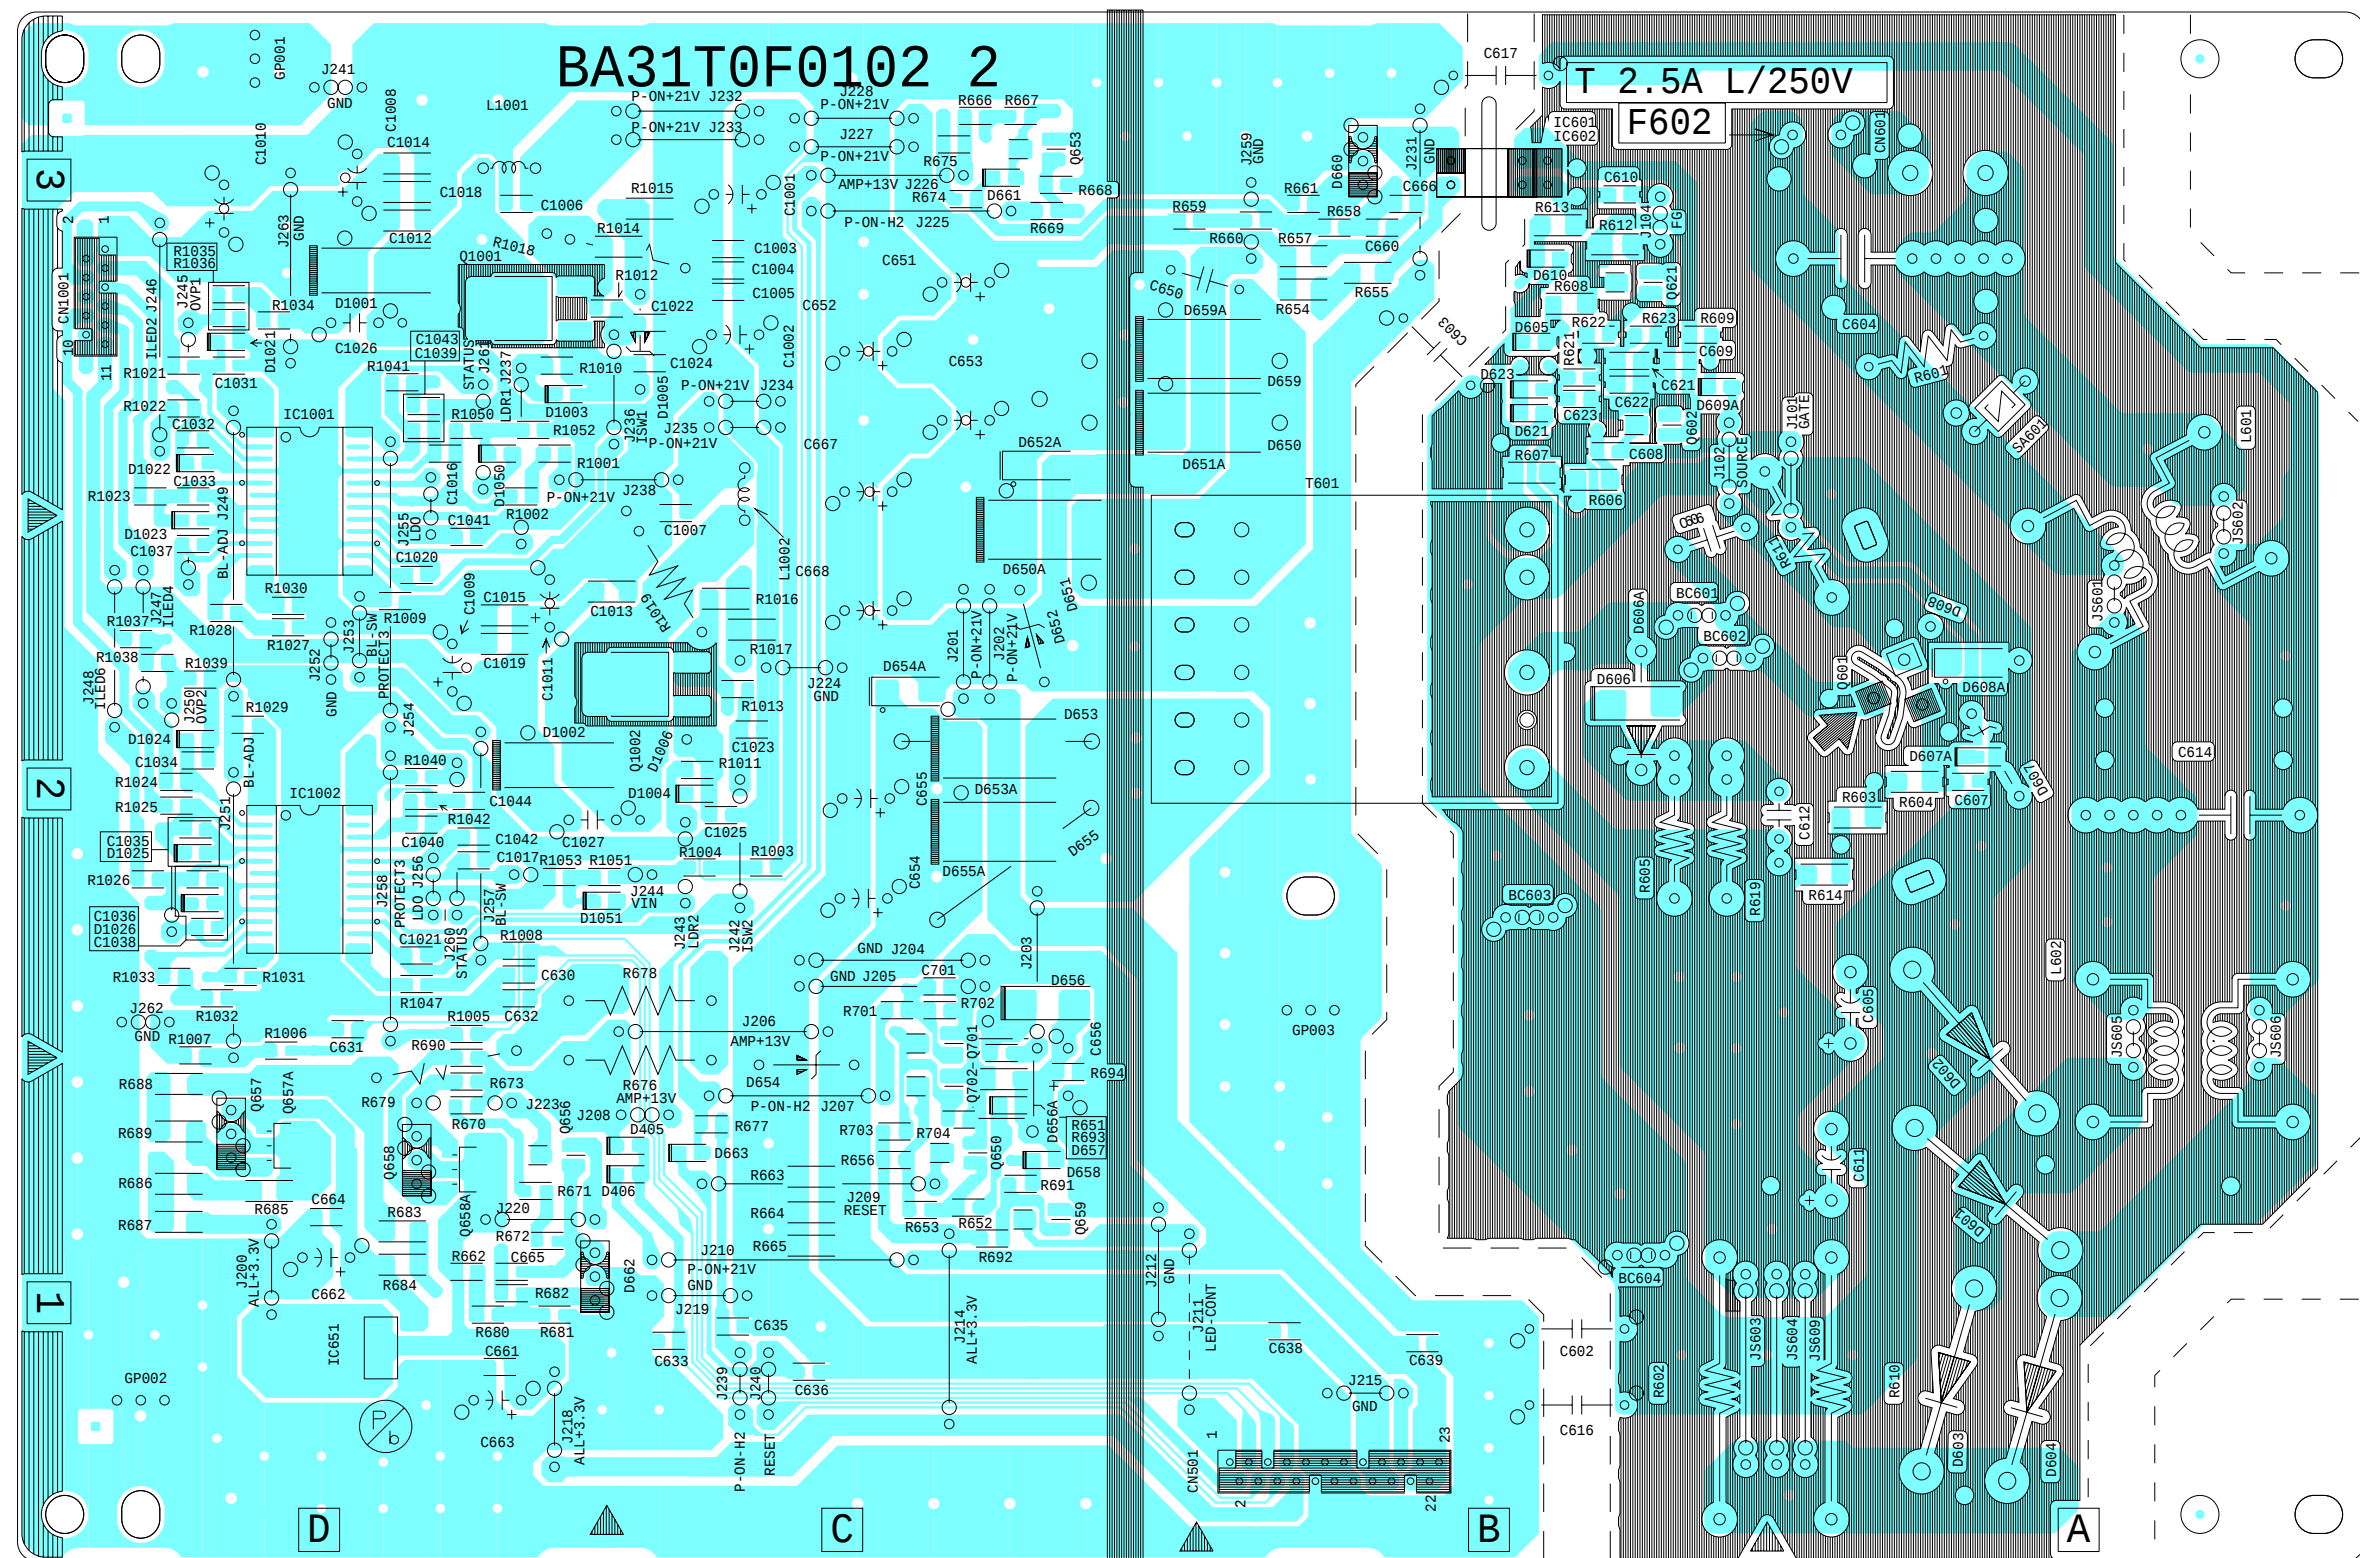


# WIRING DIAGRAM


[TYPE A]

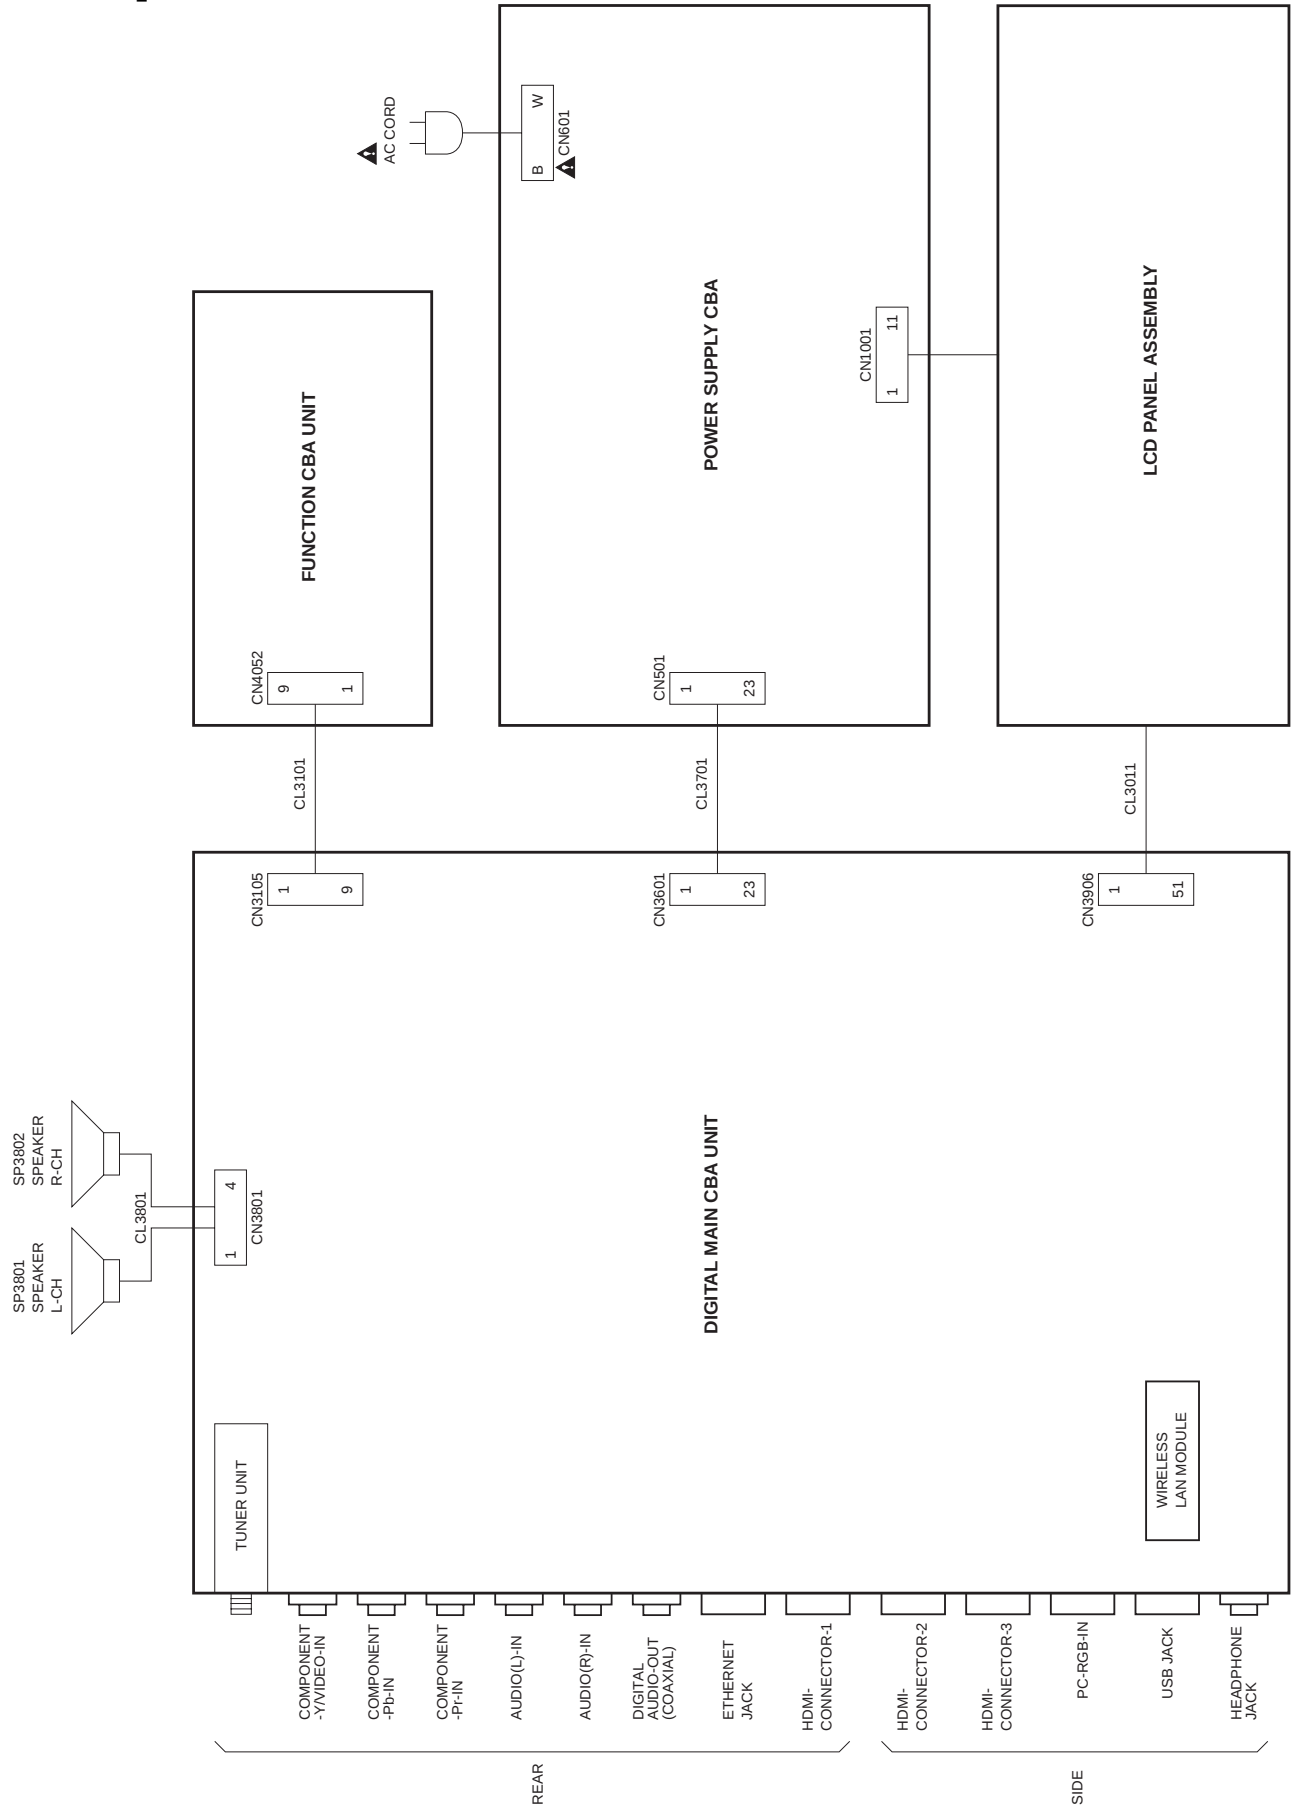

[TYPE B]

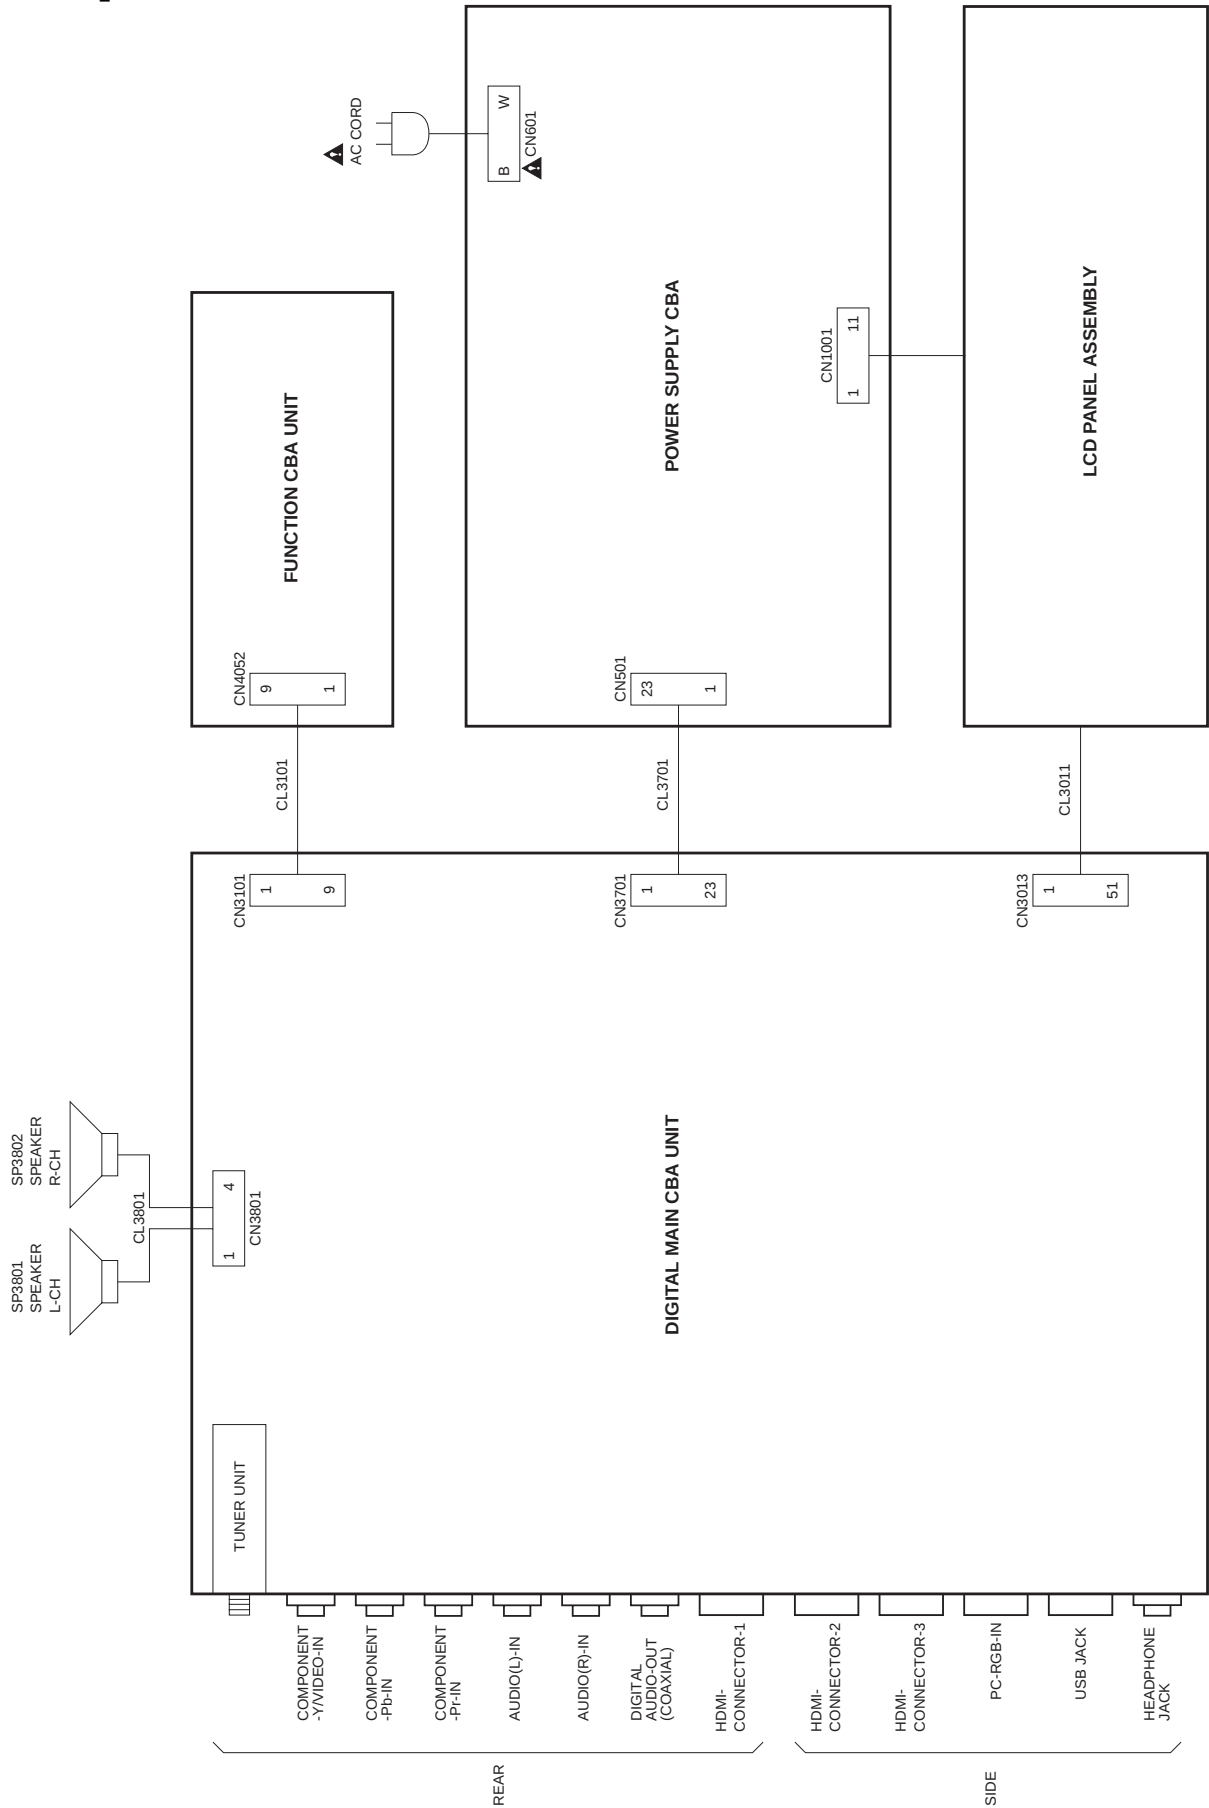


[TYPE C]

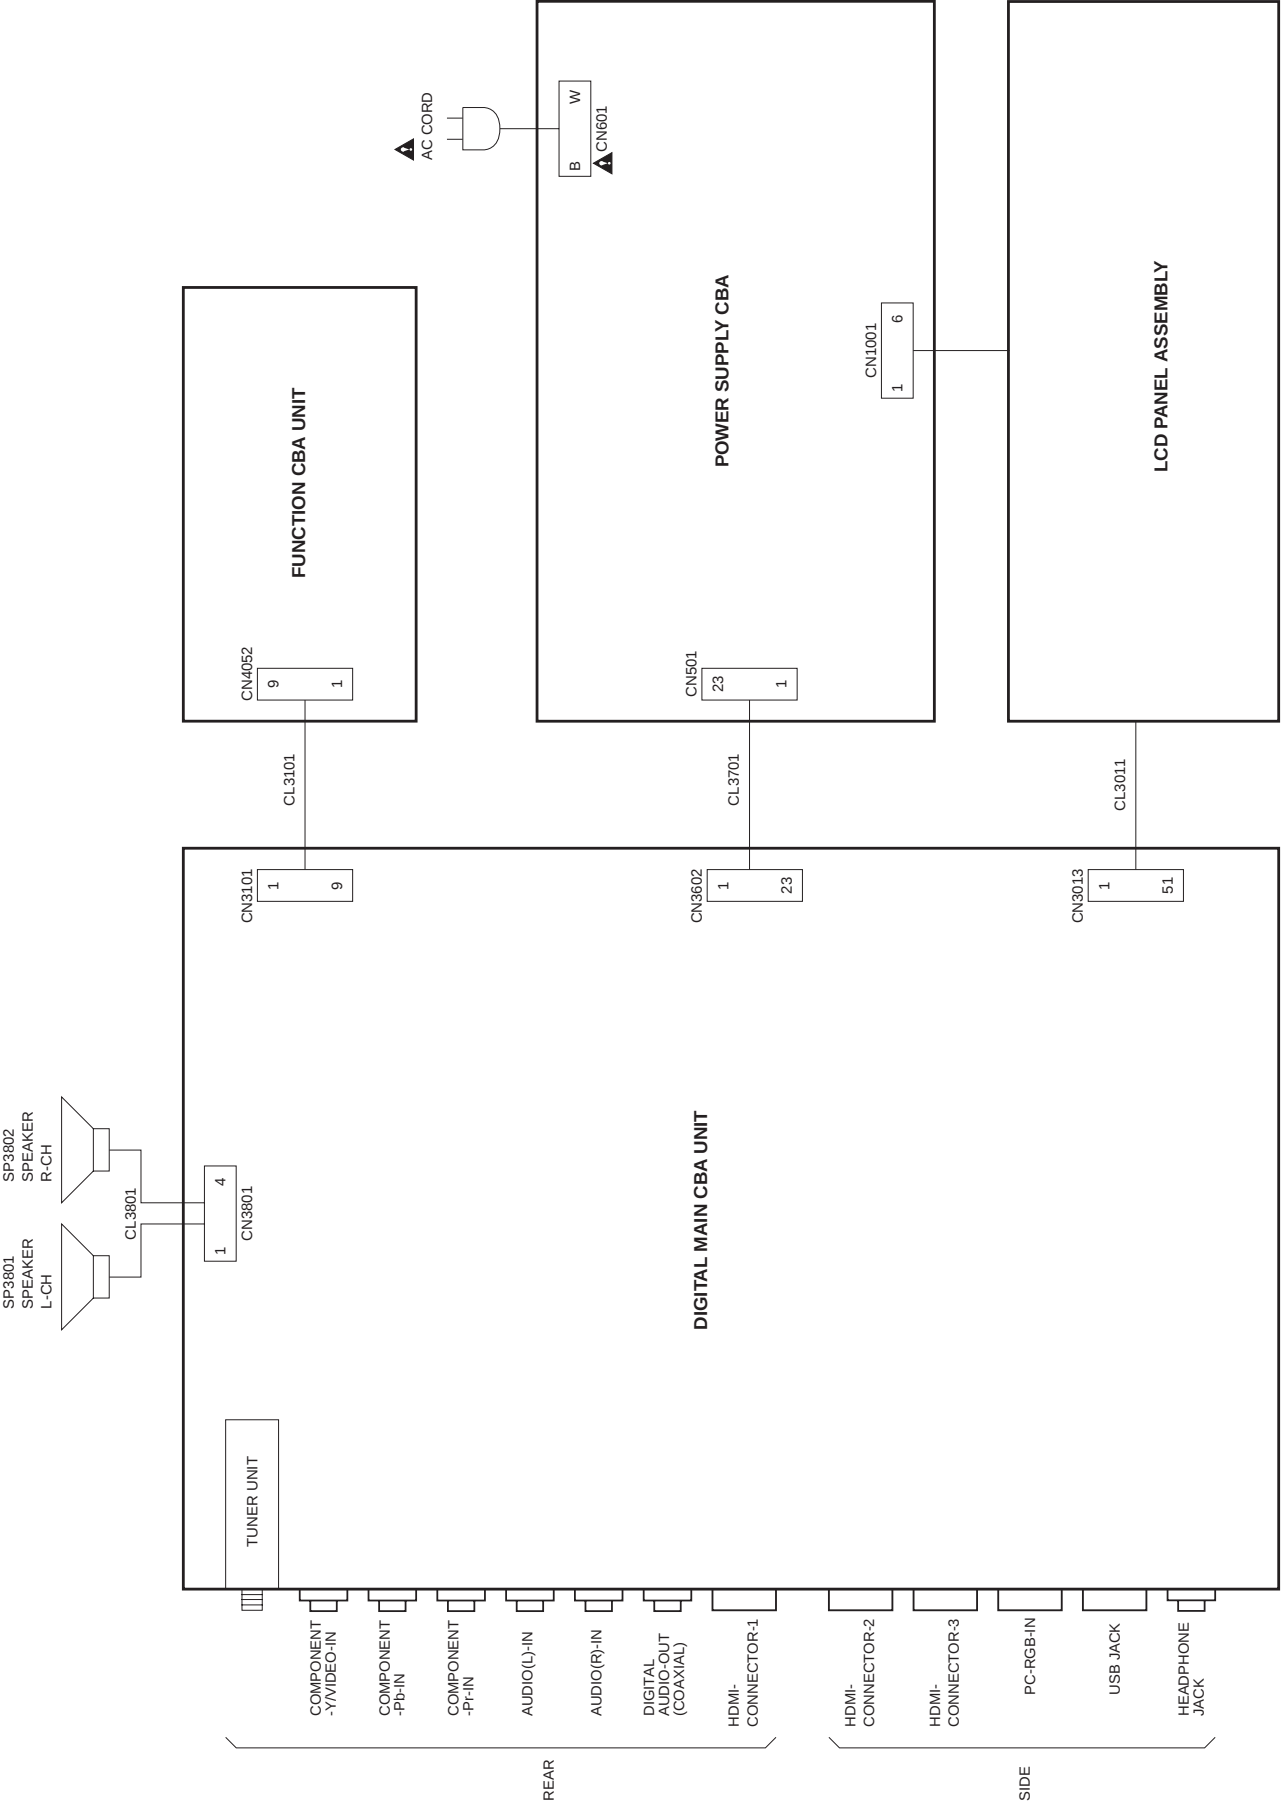


**[TYPE A]**



[TYPE B, C]

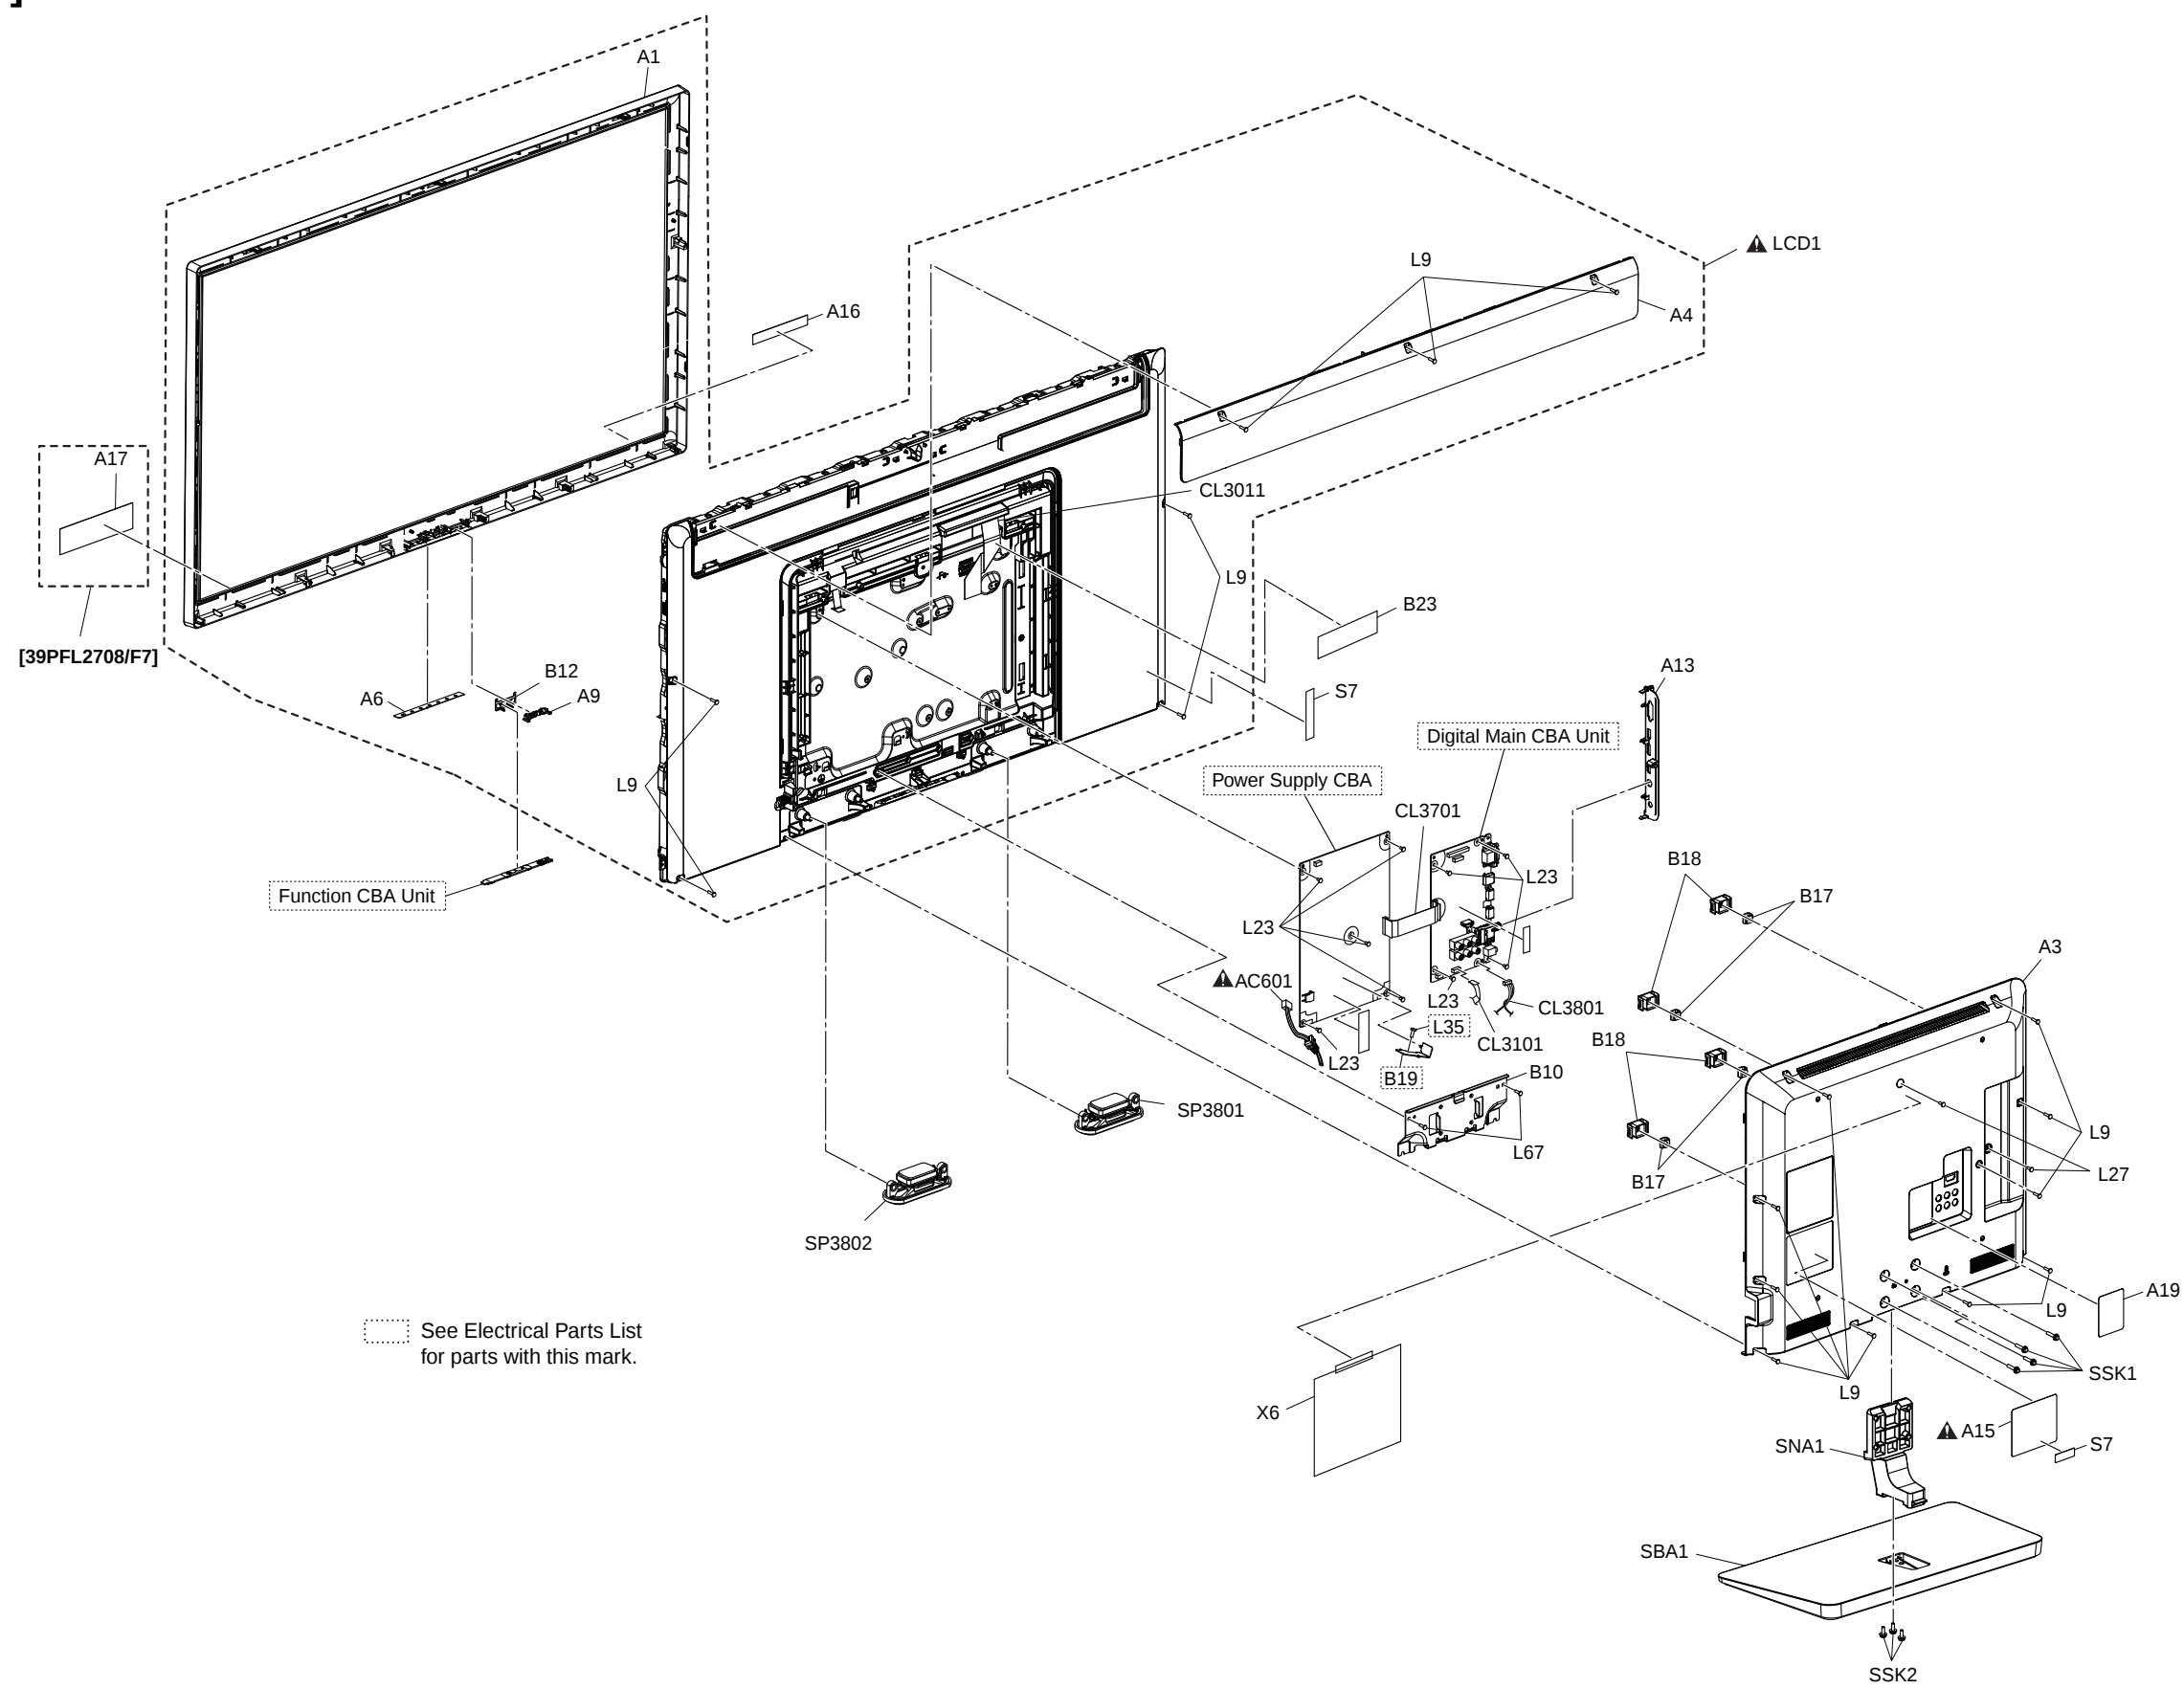

# Packing

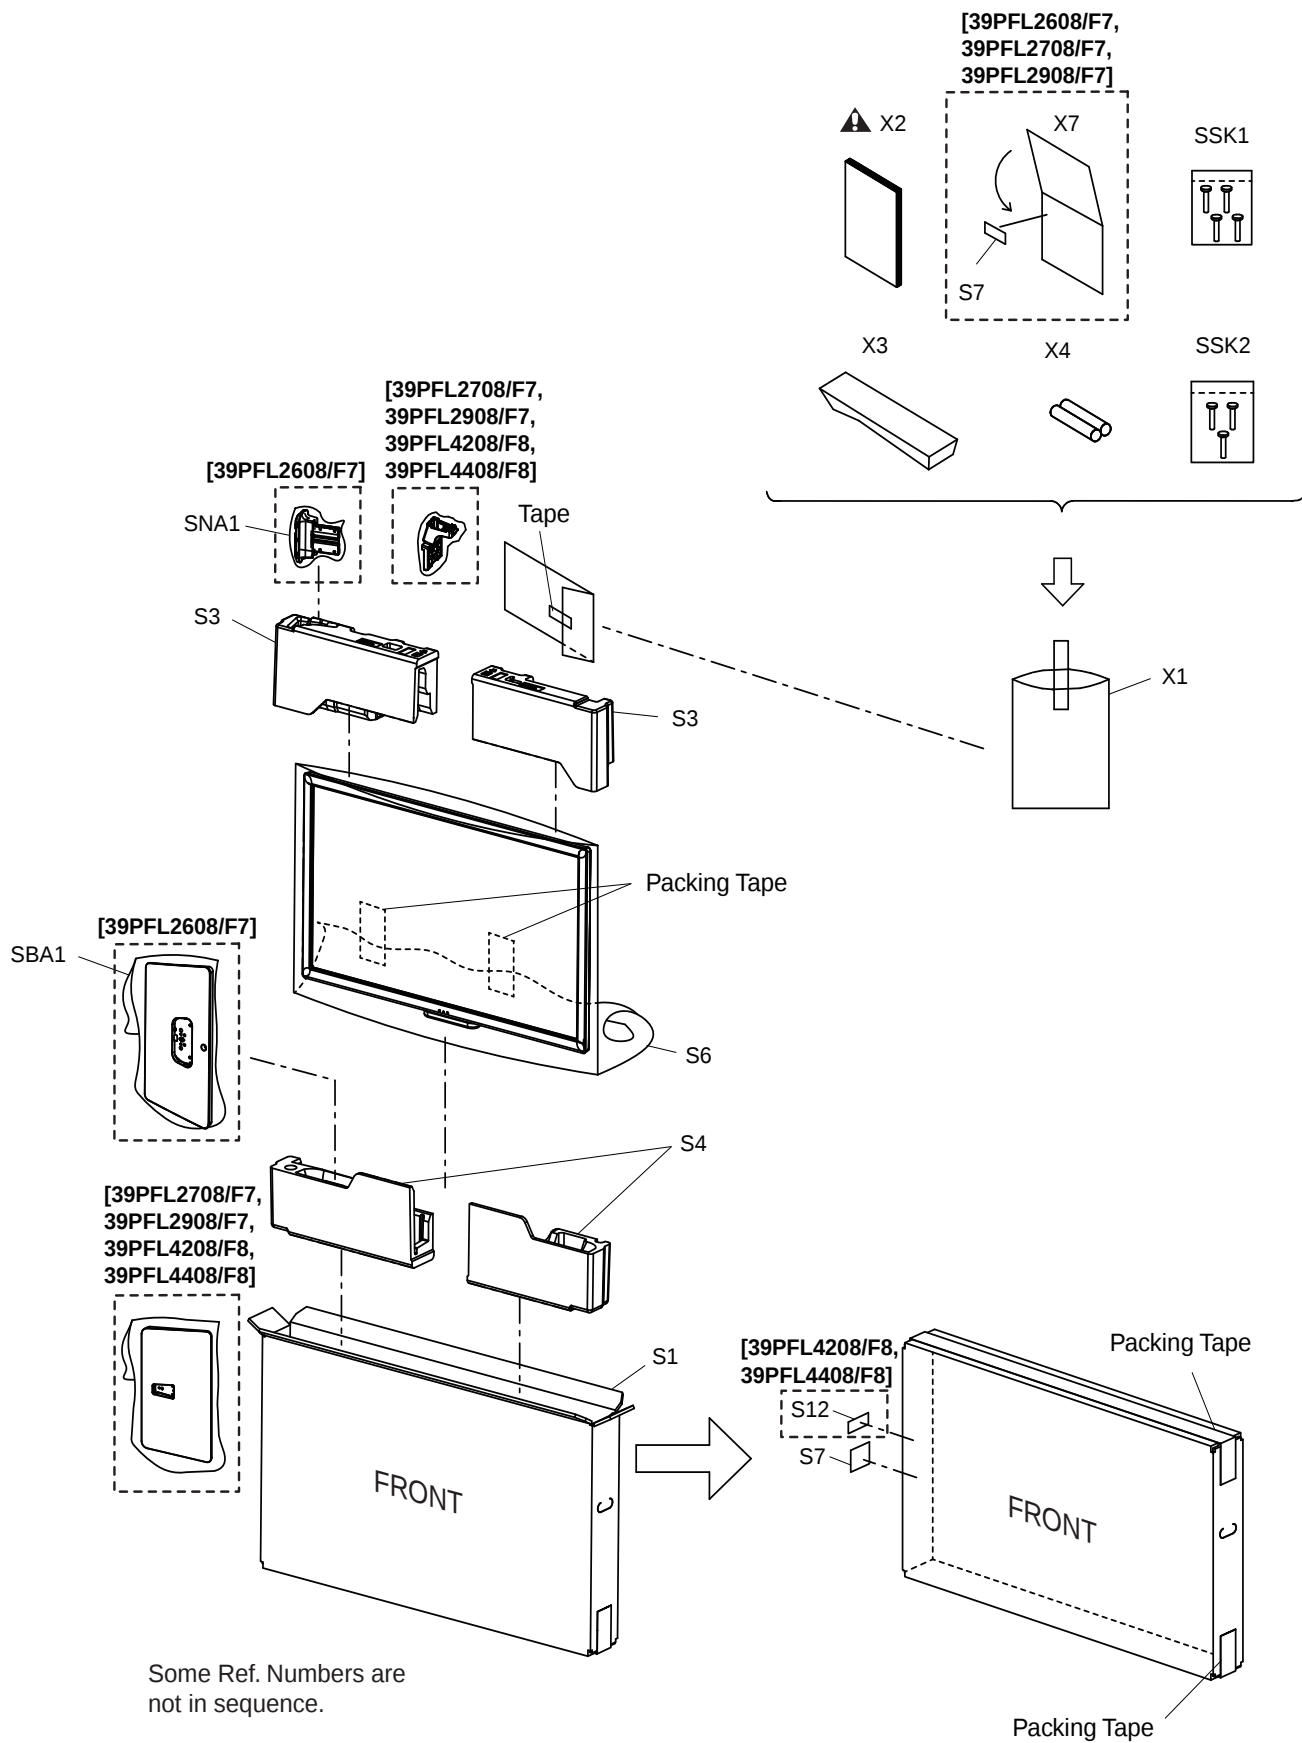

# TYPE A

## PARTS LIST [39PFL2608/F7 (Serial No.: DS1)]

### Mechanical Parts

**PRODUCT SAFETY NOTE:** Products marked with a **▲** have special characteristics important to safety. Before replacing any of these components, read carefully the product safety notice in this service manual. Don't degrade the safety of the product through improper servicing.

**NOTE:** Parts that are not assigned part numbers (-----) are not available.

| Ref. No.           | Description                                            | Part No.     |
|--------------------|--------------------------------------------------------|--------------|
| A3                 | REAR COVER A3RP0UH                                     | 1EM030705    |
| A13                | JACK HOLDER A37U0UH                                    | 1EM334736    |
| A15▲               | RATING LABEL A3RTBUH                                   | -----        |
| A16                | LOGO LABEL A3RM0UT                                     | -----        |
| A17                | ENERGY GUIDE LABEL A3RTBUH                             | -----        |
| AC601▲             | AC CORD W/O A GND WIRE UL/CSA/1700/NO/BLACK            | WAC172LTE005 |
| B10                | STAND HOLDER A31T0UH                                   | 1EM127914    |
| B17                | WALL MOUNT BRACKET A11N0UH                             | 1EM434637    |
| B18                | WALL MOUNT COVER A2170UT                               | 1EM332137    |
| B23                | WIRE LABEL A3AF0UT                                     | -----        |
| CL3101             | FFC WIRE ASSEMBLY 9PIN 9PIN/WHITE/130MM                | WX1A31T0S102 |
| CL3701             | FFC WIRE ASSEMBLY 23PIN 23PIN/WHITE/75MM               | WX1A3RP0S101 |
| CL3801             | WIRE ASSEMBLY 4PIN 4PIN/320MM&90MM                     | WX1A31T0C301 |
| L9                 | SCREW P-TIGHT 3X12 BIND HEAD+ BLK                      | GBHP3120     |
| L23                | SCREW S-TIGHT M3X6 BIND HEAD+                          | GBJS3060     |
| L27                | SCREW S-TIGHT M3X8 BIND HEAD+                          | GBHS3080     |
| L67                | SCREW S-TIGHT M3X10 BIND HEAD+                         | GBJS3100     |
| SBA1               | STAND BASE ASSEMBLY A31T0UH                            | 1EM030366    |
| SNA1               | STAND NECK ASSEMBLY A31T0UH                            | 1EM030365    |
| SP3801             | SPEAKER MAGNETIC 8Ω8W S0310F15                         | DS08110XQ003 |
| SP3802             | SPEAKER MAGNETIC 8Ω8W S0310F15                         | DS08110XQ003 |
| SSK1               | STAND SCREW KIT A31T0UH(DOUBLE SEMS SCREW M4X20 + BLK) | 1ESA34647    |
| SSK2               | STAND SCREW KIT A31T0UH(DOUBLE SEMS SCREW M4X10 + BLK) | 1ESA34648    |
| <b>PACKING</b>     |                                                        |              |
| S1                 | CARTON A3RTBUH                                         | 2EMC00041    |
| S3                 | STYROFOAM TOP A31T0UH                                  | 1EM030609    |
| S4                 | STYROFOAM BOTTOM A31T0UH                               | 1EM030610A   |
| S6                 | SET BAG A31PBUH                                        | 2EMC00084    |
| S7                 | SERIAL NO. LABEL A01PBUH                               | -----        |
| <b>ACCESSORIES</b> |                                                        |              |
| X1                 | POLYETHYLENE BAG HDPE 180X340XT0.03                    | 1EM435579    |
| X2▲                | OWNERS MANUAL A3RT0UH                                  | 2EMN00086    |
| X3                 | REMOTE CONTROL UNIT YKF340-001                         | URMT39JHG003 |
| X4                 | BATTERY R03-B500/01S                                   | XB0M451CZB01 |
| X6                 | QUICK START GUIDE A3RT0UH                              | 1EMN30387    |
| X7                 | REGISTRATION CARD(PHILIPS) A11P4UH                     | 1EMN27321    |

### LCD PANEL ASSEMBLY

| Ref. No. | Description                                            | Part No.     |
|----------|--------------------------------------------------------|--------------|
| LCD1▲    | LCD PANEL ASSEMBLY                                     | U30T1P1      |
|          | Consists of the following                              |              |
| A1       | FRONT CABINET A31T2UH                                  | 1EM127996    |
| A4       | X -PCB COVER A31T0UH                                   | 1EM228323    |
| A6       | CONTROL PLATE A31F0UT                                  | 1EM334317    |
| A9       | SENSOR LENS A31F0UT                                    | 1EM334217    |
| B12      | SHIELD PLATE A31F0UT                                   | 1EM334218    |
| CL3011   | FFC WIRE ASSEMBLY 51PIN(W/SHIELD) 51P/FFC/SHIELD/307MM | WX1A3RT0P402 |
| L9       | SCREW P-TIGHT 3X12 BIND HEAD+ BLK                      | GBHP3120     |
|          | LCD MODULE                                             | -----        |

# Electrical Parts

**PRODUCT SAFETY NOTE:** Products marked with a  have special characteristics important to safety. Before replacing any of these components, read carefully the product safety notice in this service manual. Don't degrade the safety of the product through improper servicing.

## NOTES:

- Parts that are not assigned part numbers (-----) are not available.
- Tolerance of Capacitors and Resistors are noted with the following symbols.

C.....±0.25%    D.....±0.5%    F.....±1%  
 G.....±2%    J.....±5%    K.....±10%  
 M.....±20%    N.....±30%    Z.....+80/-20%

## DIGITAL MAIN CBA UNIT

| Ref. No. | Description                                                                                                                                       | Part No.      |
|----------|---------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
|          | DIGITAL MAIN CBA UNIT                                                                                                                             | A3RTBMMA-007  |
| CN3701   | WIRELESS LAN MODULE WM5504                                                                                                                        | UWMLDLMACM002 |
| IC3101   | IC MAIN PH1-SLD8 MN2WS0270EA                                                                                                                      | QSCA0R0MS053  |
| IC3102   | IC NAND FLASH 1GB K9F1G08U0D-SCB0                                                                                                                 | NSCA0R0SM037  |
| IC3103   | 16KBIT EEPROM M24C16-WMN6TP                                                                                                                       | NSZBA0TSS259  |
| IC3601   | IC RESET IC-PST8429UR                                                                                                                             | QSCA0T0MM075  |
| IC3602   | IC DC-DC CONVERTER MP1472GJC452Z                                                                                                                  | NSCA0T09M021  |
| IC3603   | IC DC-DC CONVERTER MP1472GJC452Z                                                                                                                  | NSCA0T09M021  |
| IC3604   | IC DCDC CONVERTER RT8293ALZSP                                                                                                                     | NSCA0T00B017  |
| IC3607   | IC DC-DC CONVERTER MP1472GJC452Z                                                                                                                  | NSCA0T09M021  |
| IC3701   | IC USB HIGH-SIDE SW AP2151WG-7/SOT25/5PI                                                                                                          | NSCA0TDES015  |
| IC3803   | IC D-CLASS AUDIO POWER AMPLIFI TPA3110D2PWPR                                                                                                      | NSCA0T0TY073  |
| TU3001   | TUNER UNIT U9001UH                                                                                                                                | U9001UH       |
|          | When you replace one of the below ICs on this CBA, replace with the one that has the same part number. Do not mix ICs with different part number. |               |
| IC3401   | IC 1GB DDR3 SDRAM K4B1G1646G-BCH9                                                                                                                 | NSCA0R0SM043  |
| IC3402   | IC 1GB DDR3 SDRAM K4B1G1646G-BCH9                                                                                                                 | NSCA0R0SM043  |
|          | or                                                                                                                                                |               |
| IC3401   | IC 1GB DDR3 SDRAM H5TQ1G63DFR-H9C                                                                                                                 | NSCA0R0HY018  |
| IC3402   | IC 1GB DDR3 SDRAM H5TQ1G63DFR-H9C                                                                                                                 | NSCA0R0HY018  |
|          | or                                                                                                                                                |               |
| IC3401   | IC 1GB DDR3 SDRAM H5TQ1G63EFR-H9C                                                                                                                 | NSCA0R0HY035  |
| IC3402   | IC 1GB DDR3 SDRAM H5TQ1G63EFR-H9C                                                                                                                 | NSCA0R0HY035  |

## FUNCTION CBA UNIT

| Ref. No. | Description                    | Part No.     |
|----------|--------------------------------|--------------|
|          | FUNCTION CBA UNIT              | A3RT0MSW-001 |
| IC4051   | IC LIGHT SENSOR PH5502B2NA1-E4 | QP1ZPH5502B2 |

## POWER SUPPLY CBA

| Ref. No. | Description                                   | Part No.     |
|----------|-----------------------------------------------|--------------|
|          | POWER SUPPLY CBA<br>Consists to the following | A3RT0MPW-002 |

| Ref. No.                                                                                  | Description                               | Part No.     |
|-------------------------------------------------------------------------------------------|-------------------------------------------|--------------|
| <b>CAPACITORS</b>                                                                         |                                           |              |
| C602     | SAFTY CAP. 2200pF/250V KX                 | CA2E222MR101 |
| C604     | CAP METALLIZED FILM 0.22μF/310V /K/L-E-MX | CTA2240DC001 |
| C605                                                                                      | CAP ELE 220μF/200V/M/85                   | CEB2210S6016 |
| C606                                                                                      | CERAMIC CAP. 680pF/2kV                    | CA3D681PAN04 |
| C607                                                                                      | CHIP CERAMIC CAP. B K 1200pF/50V          | CHD1JK30B122 |
| C608                                                                                      | CHIP CERAMIC CAP.(1608) B K 0.033μF/50V   | CHD1JK30B333 |
| C609                                                                                      | CHIP CERAMIC CAP. B K 0.068μF/50V         | CHD1JK30B683 |
| C610                                                                                      | CHIP CERAMIC CAP. B K 1500pF/50V          | CHD1JK30B152 |
| C611                                                                                      | CAP ELE 220μF/200V/M/85                   | CEB2210S6016 |
| C612                                                                                      | CAP CERAMIC HV 1500PF 1kV B K             | CA3A152TE006 |
| C614     | CAP METALLIZED FILM 0.22μF/310V /K/L-E-MX | CTA2240DC001 |
| C623                                                                                      | CHIP CERAMIC CAP.(1608) B K 4.7μF/6.3V    | CHD0KK30B475 |
| C650                                                                                      | CAP CERAMIC HV 2200pF/1kV B K             | CA3A222TE006 |
| C651                                                                                      | CAP ELE 470μF/25V/M/85                    | CED4710V8006 |
| C652                                                                                      | CAP ELE 470μF/25V/M/85                    | CED4710V8006 |
| C653                                                                                      | CAP ELE 470μF/25V/M/85                    | CED4710V8006 |
| C654                                                                                      | CAP ELE 470μF/16V/M/85                    | CEC4710V8006 |
| C655                                                                                      | CAP ELE 470μF/16V/M/85                    | CEC4710V8006 |
| C656                                                                                      | CAP ELE 4.7μF/50V/M/85                    | CEF4R70V8006 |
| C660                                                                                      | CHIP CERAMIC CAP.(1608) B K 0.1μF/50V     | CHD1JK30B104 |
| C663                                                                                      | CAP ELE 100μF/10V/M/85                    | CEB1010V8006 |
| C665                                                                                      | CHIP CERAMIC CAP.(1608) B K 0.1μF/50V     | CHD1JK30B104 |
| C667                                                                                      | CAP ELE 470μF/25V/M/85                    | CED4710V8006 |
| C668                                                                                      | CAP ELE 470μF/25V/M/85                    | CED4710V8006 |
| C1001                                                                                     | CAP ELE 330μF/25V/M/85                    | CED3310V8006 |
| C1002                                                                                     | CAP ELE 330μF/25V/M/85                    | CED3310V8006 |
| C1003                                                                                     | CHIP CERAMIC CAP.(1608) B K 1μF/25V       | CHD1EK30B105 |
| C1004                                                                                     | CHIP CERAMIC CAP.(1608) B K 1μF/25V       | CHD1EK30B105 |
| C1006                                                                                     | CHIP CERAMIC CAP.(1608) B K 1μF/25V       | CHD1EK30B105 |
| C1007                                                                                     | CHIP CERAMIC CAP.(1608) B K 1μF/25V       | CHD1EK30B105 |
| C1008                                                                                     | CAP ELE 47μF/100V/M/85                    | CEH4700V8006 |
| C1009                                                                                     | CAP ELE 47μF/100V/M/85                    | CEH4700V8006 |
| C1010                                                                                     | CAP ELE 47μF/100V/M/85                    | CEH4700V8006 |
| C1011                                                                                     | CAP ELE 47μF/100V/M/85                    | CEH4700V8006 |
| C1014                                                                                     | CHIP CERAMIC CAP.(3216) X7R K 1.0μF/100V  | CA2A105MR080 |
| C1015                                                                                     | CHIP CERAMIC CAP.(3216) X7R K 1.0μF/100V  | CA2A105MR080 |
| C1016                                                                                     | CHIP CERAMIC CAP.(1608) B K 0.1μF/50V     | CHD1JK30B104 |
| C1017                                                                                     | CHIP CERAMIC CAP.(1608) B K 0.1μF/50V     | CHD1JK30B104 |
| C1018                                                                                     | CHIP CERAMIC CAP.(3216) X7R K 1.0μF/100V  | CA2A105MR080 |
| C1019                                                                                     | CHIP CERAMIC CAP.(3216) X7R K 1.0μF/100V  | CA2A105MR080 |
| C1022                                                                                     | CHIP CERAMIC CAP.(1608) B K 1000pF/50V    | CHD1JK30B102 |
| C1023                                                                                     | CHIP CERAMIC CAP.(1608) B K 1000pF/50V    | CHD1JK30B102 |
| C1026                                                                                     | CAP CERAMIC HV 220pF/500V/B/K             | CCA221YNA001 |
| C1027                                                                                     | CAP CERAMIC HV 220pF/500V/B/K             | CCA221YNA001 |
| C1037                                                                                     | CHIP CERAMIC CAP.(1608) B K 1000pF/50V    | CHD1JK30B102 |
| C1038                                                                                     | CHIP CERAMIC CAP.(1608) B K 1000pF/50V    | CHD1JK30B102 |
| C1041                                                                                     | CHIP CERAMIC CAP.(1608) B K 4.7μF/6.3V    | CHD0KK30B475 |
| C1042                                                                                     | CHIP CERAMIC CAP.(1608) B K 4.7μF/6.3V    | CHD0KK30B475 |
| C1043                                                                                     | CHIP CERAMIC CAP.(1608) B K 1μF/25V       | CHD1EK30B105 |
| C1044                                                                                     | CHIP CERAMIC CAP.(1608) B K 1μF/25V       | CHD1EK30B105 |
| <b>CONNECTORS</b>                                                                         |                                           |              |
| CN501                                                                                     | FFC CONNECTOR IMSA-9615S-23A-PP-A         | JC96J23ER007 |
| CN601  | CONNECTOR S2P3-VH (LF)(SN)                | JCVHC02JG002 |
| CN1001                                                                                    | FFC CONNECTOR IMSA-9615S-11A-PP-A         | JC96J11ER007 |
| <b>DIODES</b>                                                                             |                                           |              |
| D601                                                                                      | DIODE 1N5406BH                            | NDL1001N5406 |
| D602                                                                                      | DIODE 1N5406BH                            | NDL1001N5406 |
| D603                                                                                      | DIODE 1N5406BH                            | NDL1001N5406 |

| Ref. No.           | Description                                      | Part No.      |
|--------------------|--------------------------------------------------|---------------|
| D604               | DIODE 1N5406BH                                   | NDL1001N5406  |
| D605               | ZENER DIODE MM5Z6V2B                             | ND1BMM5Z6V2B  |
| D606               | DIODE FAST RECOVERY RS1JJTD                      | ND1Z0RS1JJTD  |
| D607A▲             | ZENER DIODE SMD TFZVTR27B                        | QD1B00TFZV27  |
| D608▲              | DIODE ZENER 1ZB36BB                              | NDWZ0001ZB36  |
| D609A▲             | DIODE SCHOTTKY SMD CES520.L3F(D                  | QD1Z00CES520  |
| D610               | SWITCHING DIODE 1SS400 TE61                      | QD1Z001SS400  |
| D621               | SWITCHING DIODE 1SS400 TE61                      | QD1Z001SS400  |
| D623               | ZENER DIODE MM5Z30B                              | ND1B0MM5Z30B  |
| D650               | DIODE SCHOTTKY SB3150BH                          | NDWZ00SB3150  |
| D651               | DIODE SCHOTTKY SB3150BH                          | NDWZ00SB3150  |
| D652▲              | DIODE ZENER 1ZB30BB                              | NDWZ0001ZB30  |
| D653               | DIODE SCHOTTKY SB3A0BH                           | NDWZ000SB3A0  |
| D654▲              | DIODE ZENER 1ZB20BB                              | NDWZ0001ZB20  |
| D655               | DIODE SCHOTTKY SB3A0BH                           | NDWZ000SB3A0  |
| D656               | DIODE FAST RECOVERY RS1BJTD                      | ND1Z0RS1BJTD  |
| D657               | ZENER DIODE MM5Z11B                              | ND1B0MM5Z11B  |
| D659               | DIODE SCHOTTKY SB3150BH                          | NDWZ00SB3150  |
| D660               | IC SHUNT REGULATOR SL431A-AT                     | NSZBA0TAUK01  |
| D661               | SWITCHING DIODE 1SS400 TE61                      | QD1Z001SS400  |
| D662               | IC SHUNT REGULATOR SL431A-AT                     | NSZBA0TAUK01  |
| D1001              | DIODE SCHOTTKY SMD SK210TD                       | ND1Z0SK210TD  |
| D1002              | DIODE SCHOTTKY SMD SK210TD                       | ND1Z0SK210TD  |
| D1003              | SWITCHING DIODE 1SS400 TE61                      | QD1Z001SS400  |
| D1004              | SWITCHING DIODE 1SS400 TE61                      | QD1Z001SS400  |
| <b>ICS</b>         |                                                  |               |
| IC602▲             | IC PHOTOCOUPLER TLP781F(D4-FUNBLL F)             | QPEL781FBLLF  |
| IC1001             | IC LED BACKLIGHT CONTROLLER HA7209PC /SOP /24PIN | NSCA0T00H003  |
| IC1002             | IC LED BACKLIGHT CONTROLLER HA7209PC /SOP /24PIN | NSCA0T00H003  |
| <b>COILS</b>       |                                                  |               |
| L601▲              | LINE FILTER JLB24136                             | LLEG0Z0XB032  |
| L602▲              | LINE FILTER JLB24136                             | LLEG0Z0XB032  |
| L1001              | POWER INDUCTORS CWKBNP-220K                      | LLF2200KV002  |
| L1002              | POWER INDUCTORS CWKBNP-220K                      | LLF2200KV002  |
| <b>TRANSISTORS</b> |                                                  |               |
| Q601▲              | FET MOS TK10A50D(LS1FN3 QM                       | QEEZTK10A50D  |
| Q602▲              | NPN TRANSISTOR SMD 2SC5344SY                     | NQZY2SC5344S  |
| Q621               | CHIP TRANSISTOR KTC3875S-YRTK/P                  | NQ1YKTC3875S  |
| Q650               | CHIP TRANSISTOR KTC3875S-YRTK/P                  | NQ1YKTC3875S  |
| Q653               | CHIP TRANSISTOR KTC3875S-YRTK/P                  | NQ1YKTC3875S  |
| Q656               | CHIP TRANSISTOR KTC3875S-YRTK/P                  | NQ1YKTC3875S  |
| Q658               | TRANSISTOR 2SA950-O (TE2 F T)                    | QQS002SA950F  |
| Q1001              | FET MOS SMD AP18T10AGH-HF                        | NF2Z18T10AGH  |
| Q1002              | FET MOS SMD AP18T10AGH-HF                        | NF2Z18T10AGH  |
| <b>RESISTORS</b>   |                                                  |               |
| R601▲              | RES. CARBON FILM J 1/2W J 1.2M Ω                 | RCX2125T1003  |
| R603               | RES CHIP 3216 1/4W J 560k Ω                      | RRXA4564HH034 |
| R604               | RES CHIP 3216 1/4W J 560k Ω                      | RRXA4564HH034 |
| R606               | RES CHIP 3216 1/4W J 120 Ω                       | RRXA4121HH034 |
| R607               | RES CHIP 3216 1/4W J 120 Ω                       | RRXA4121HH034 |
| R608               | RES CHIP 3216 1/4W J 1.2k Ω                      | RRXA4122HH034 |
| R609               | RES CHIP 1608 1/10W J 100 Ω                      | RRXA101HH013  |
| R611▲              | METAL OXIDE RES. 2W J 0.3 Ω                      | RN02R30ZU001  |
| R612               | RES CHIP 3216 1/4W J 3.9k Ω                      | RRXA4392HH034 |
| R613               | RES CHIP 3216 1/4W J 270 Ω                       | RRXA4271HH034 |
| R614               | RES CHIP 3216 1/4W J 560k Ω                      | RRXA4564HH034 |
| R619               | METAL OXIDE FILM RES. 1W J 100k Ω                | RN01104ZU001  |
| R621               | RES CHIP 1608 1/10W J 560 Ω                      | RRXA561HH013  |
| R622               | RES CHIP 1608 1/10W 0 Ω                          | RRXA000HH014  |
| R623               | RES CHIP 1608 1/10W J 10k Ω                      | RRXA103HH013  |
| R651▲              | RES CHIP 1608 1/10W J 1.0 Ω                      | RRXA1R0HH013  |

| Ref. No. | Description                       | Part No.      |
|----------|-----------------------------------|---------------|
| R652     | RES CHIP 1608 1/10W F 100k Ω      | RTW1003HH008  |
| R653     | RES CHIP 1608 1/10W 0 Ω           | RRXA000HH014  |
| R654     | RES CHIP 3216 1/4W J 180 Ω        | RRXA4181HH034 |
| R655     | RES CHIP 3216 1/4W J 180 Ω        | RRXA4181HH034 |
| R656     | RES CHIP 1608 1/10W F 33.0k Ω     | RTW3302HH008  |
| R657     | RES CHIP 3216 1/4W J 3.9k Ω       | RRXA4392HH034 |
| R658     | RES CHIP 1608 1/10W J 2.7k Ω      | RRXA272HH013  |
| R659     | RES CHIP 1608 1/10W F 22.0k Ω     | RTW2202HH008  |
| R660     | RES CHIP 1608 1/10W F 2.70k Ω     | RTW2701HH008  |
| R661     | RES CHIP 1608 1/10W F 3.30k Ω     | RTW3301HH008  |
| R662     | RES CHIP 1608 1/10W F 3.30k Ω     | RTW3301HH008  |
| R663     | RES CHIP 3216 1/4W J 4.7k Ω       | RRXA4472HH034 |
| R666     | RES CHIP 1608 1/10W 0 Ω           | RRXA000HH014  |
| R667     | RES CHIP 1608 1/10W J 8.2k Ω      | RRXA822HH013  |
| R668     | RES CHIP 1608 1/10W J 47k Ω       | RRXA473HH013  |
| R669     | RES CHIP 1608 1/10W J 10k Ω       | RRXA103HH013  |
| R670     | RES CHIP 1608 1/10W J 270 Ω       | RRXA271HH013  |
| R671     | RES CHIP 1608 1/10W J 270 Ω       | RRXA271HH013  |
| R672     | RES CHIP 1608 1/10W J 270 Ω       | RRXA271HH013  |
| R677     | RES CHIP 1608 1/10W J 10k Ω       | RRXA103HH013  |
| R680     | RES CHIP 1608 1/10W J 100 Ω       | RRXA101HH013  |
| R681     | RES CHIP 1608 1/10W F 10.0k Ω     | RTW1002HH008  |
| R682     | RES CHIP 1608 1/10W 0 Ω           | RRXA000HH014  |
| R690▲    | RES CHIP 1608 1/10W J 1.5 Ω       | RRXA1R5HH013  |
| R694     | RES CHIP 1608 1/10W J 33k Ω       | RRXA333HH013  |
| R1001    | RES CHIP 1608 1/10W J 360 Ω       | RRXA361HH013  |
| R1002    | RES CHIP 1608 1/10W J 360 Ω       | RRXA361HH013  |
| R1003    | RES CHIP 1608 1/10W J 360 Ω       | RRXA361HH013  |
| R1004    | RES CHIP 1608 1/10W J 360 Ω       | RRXA361HH013  |
| R1005    | RES CHIP 1608 1/10W J 1.0k Ω      | RRXA102HH013  |
| R1006    | RES CHIP 1608 1/10W J 10k Ω       | RRXA103HH013  |
| R1007    | RES CHIP 1608 1/10W J 100k Ω      | RRXA104HH013  |
| R1008    | RES CHIP 1608 1/10W J 10k Ω       | RRXA103HH013  |
| R1009    | RES CHIP 1608 1/10W J 100k Ω      | RRXA104HH013  |
| R1010    | RES CHIP 1608 1/10W J 10 Ω        | RRXA100HH013  |
| R1011    | RES CHIP 1608 1/10W J 10 Ω        | RRXA100HH013  |
| R1012    | RES CHIP 1608 1/10W J 200 Ω       | RRXA201HH013  |
| R1013    | RES CHIP 1608 1/10W J 200 Ω       | RRXA201HH013  |
| R1018    | METAL OXIDE FILM RES. 2W J 0.18 Ω | RN02R18ZU001  |
| R1019    | METAL OXIDE FILM RES. 2W J 0.18 Ω | RN02R18ZU001  |
| R1021    | RES CHIP 1608 1/10W 0 Ω           | RRXA000HH014  |
| R1022    | RES CHIP 1608 1/10W 0 Ω           | RRXA000HH014  |
| R1023    | RES CHIP 1608 1/10W 0 Ω           | RRXA000HH014  |
| R1024    | RES CHIP 1608 1/10W 0 Ω           | RRXA000HH014  |
| R1025    | RES CHIP 1608 1/10W 0 Ω           | RRXA000HH014  |
| R1026    | RES CHIP 1608 1/10W 0 Ω           | RRXA000HH014  |
| R1027    | RES CHIP 1608 1/10W F 13.0k Ω     | RTW1302HH008  |
| R1028    | RES CHIP 1608 1/10W F 330 Ω       | RTW3300HH008  |
| R1029    | RES CHIP 1608 1/10W 0 Ω           | RRXA000HH014  |
| R1030    | RES CHIP 1608 1/10W F 100k Ω      | RTW1003HH008  |
| R1031    | RES CHIP 1608 1/10W F 100k Ω      | RTW1003HH008  |
| R1032    | RES CHIP 1608 1/10W F 13.0k Ω     | RTW1302HH008  |
| R1033    | RES CHIP 1608 1/10W F 330 Ω       | RTW3300HH008  |
| R1034    | RES CHIP 1608 1/10W F 510k Ω      | RTW5103HH008  |
| R1035    | RES CHIP 1608 1/10W F 430k Ω      | RTW4303HH008  |
| R1036    | RES CHIP 1608 1/10W F 27.0k Ω     | RTW2702HH008  |
| R1037    | RES CHIP 1608 1/10W F 510k Ω      | RTW5103HH008  |
| R1038    | RES CHIP 1608 1/10W F 430k Ω      | RTW4303HH008  |
| R1039    | RES CHIP 1608 1/10W F 27.0k Ω     | RTW2702HH008  |
| R1040    | RES CHIP 1608 1/10W 0 Ω           | RRXA000HH014  |
| R1041    | RES CHIP 1608 1/10W F 100 Ω       | RTW1000HH008  |
| R1042    | RES CHIP 1608 1/10W F 100 Ω       | RTW1000HH008  |
| R1047    | RES CHIP 1608 1/10W 0 Ω           | RRXA000HH014  |

| Ref. No.             | Description                    | Part No.     |
|----------------------|--------------------------------|--------------|
| <b>MISCELLANEOUS</b> |                                |              |
| B19                  | HEAT SINK PNL A31T0UH          | 1EM439707    |
| BC601                | WIRE CP STP-S-0.50             | XZ40FOREN001 |
| BC602                | WIRE CP STP-S-0.50             | XZ40FOREN001 |
| BC603                | BEADS INDUCTOR FBR07HA121SB-00 | LLBF00STU030 |
| BC604                | BEADS INDUCTOR FBR07HA121SB-00 | LLBF00STU030 |
| F602▲                | FUSE TIME RAG SLT250V2.5A      | PDGSLB0NG252 |
| JS603                | WIRE CP STP-S-0.50             | XZ40FOREN001 |
| JS604                | WIRE CP STP-S-0.50             | XZ40FOREN001 |
| JS609                | WIRE CP STP-S-0.50             | XZ40FOREN001 |
| L35                  | SCREW B-TIGHT D3X8 BIND HEAD+  | GBJB3080     |
| SA601▲               | VARISTOR 10D 471K SVR          | NVQZVR10D471 |
| T601▲                | TRANS POWER BCK-28F0           | LTT2PCMEK058 |

# TYPE A

## PARTS LIST [39PFL2608/F7 (Serial No.: DS2)]

### Mechanical Parts

**PRODUCT SAFETY NOTE:** Products marked with a  have special characteristics important to safety. Before replacing any of these components, read carefully the product safety notice in this service manual. Don't degrade the safety of the product through improper servicing.

**NOTE:** Parts that are not assigned part numbers (-----) are not available.

#### Different parts from the original model 39PFL2608/F7 (Serial No.: DS1)

| Ref. No.                                                                               | Description                 | Part No. |
|----------------------------------------------------------------------------------------|-----------------------------|----------|
| A17                                                                                    | ENERGY GUIDE LABEL A3RTCUIH | -----    |
| LCD1  | LCD PANEL ASSEMBLY          | U30T9P0  |

# Electrical Parts

**PRODUCT SAFETY NOTE:** Products marked with a  have special characteristics important to safety. Before replacing any of these components, read carefully the product safety notice in this service manual. Don't degrade the safety of the product through improper servicing.

## NOTES:

1. Parts that are not assigned part numbers (-----) are not available.
2. Tolerance of Capacitors and Resistors are noted with the following symbols.

C..... $\pm 0.25\%$     D..... $\pm 0.5\%$     F..... $\pm 1\%$   
G..... $\pm 2\%$     J..... $\pm 5\%$     K..... $\pm 10\%$   
M..... $\pm 20\%$     N..... $\pm 30\%$     Z..... $+80/-20\%$

## Different parts from the original model 39PFL2608/F7 (Serial No.: DS1)

| Ref. No. | Description                          | Part No.     |
|----------|--------------------------------------|--------------|
|          | POWER SUPPLY CBA                     | A3RTCMPW-001 |
| R1027    | RES CHIP 1608 1/10W F 12.0k $\Omega$ | RTW1202HH008 |
| R1028    | RES CHIP 1608 1/10W 0 $\Omega$       | RRXA000HH014 |
| R1032    | RES CHIP 1608 1/10W F 12.0k $\Omega$ | RTW1202HH008 |
| R1033    | RES CHIP 1608 1/10W 0 $\Omega$       | RRXA000HH014 |

# TYPE A

## PARTS LIST [39PFL2908/F7 (Serial No.: DS1)]

### Mechanical Parts

**PRODUCT SAFETY NOTE:** Products marked with a  have special characteristics important to safety. Before replacing any of these components, read carefully the product safety notice in this service manual. Don't degrade the safety of the product through improper servicing.

**NOTE:** Parts that are not assigned part numbers (-----) are not available.

#### Different parts from the original model 39PFL2608/F7 (Serial No. : DS1)

| Ref. No.                                                                              | Description                 | Part No.   |
|---------------------------------------------------------------------------------------|-----------------------------|------------|
| A15  | RATING LABEL A3RT0UH        | -----      |
| A17                                                                                   | ENERGY GUIDE LABEL A3RT0UH  | -----      |
| SBA1                                                                                  | STAND BASE ASSEMBLY A31T2UH | 1EM030546  |
| SNA1                                                                                  | STAND NECK A31T2UH          | 1EM030545A |
| S1                                                                                    | CARTON A3RT0UH              | 1EM334658  |

# Electrical Parts

**PRODUCT SAFETY NOTE:** Products marked with a  have special characteristics important to safety. Before replacing any of these components, read carefully the product safety notice in this service manual. Don't degrade the safety of the product through improper servicing.

## NOTES:

1. Parts that are not assigned part numbers (-----) are not available.
2. Tolerance of Capacitors and Resistors are noted with the following symbols.

|              |             |                |
|--------------|-------------|----------------|
| C.....±0.25% | D.....±0.5% | F.....±1%      |
| G.....±2%    | J.....±5%   | K.....±10%     |
| M.....±20%   | N.....±30%  | Z.....+80/-20% |

## Different parts from the original model 39PFL2608/F7 (Serial No. : DS1)

| Ref. No. | Description           | Part No.     |
|----------|-----------------------|--------------|
|          | DIGITAL MAIN CBA UNIT | A3RT0MMA-003 |

# TYPE A

## PARTS LIST [39PFL4408/F8 (Serial No.: XA1)]

### Mechanical Parts

**PRODUCT SAFETY NOTE:** Products marked with a  have special characteristics important to safety. Before replacing any of these components, read carefully the product safety notice in this service manual. Don't degrade the safety of the product through improper servicing.

**NOTE:** Parts that are not assigned part numbers (-----) are not available.

### Different parts from the original model 39PFL2608/F7 (Serial No.: DS1)

| Ref. No.                                                                               | Description                 | Part No.   |
|----------------------------------------------------------------------------------------|-----------------------------|------------|
| A15   | RATING LABEL A3RTAMA        | -----      |
| A16                                                                                    | LOGO LABEL A3RFAMA          | -----      |
| A17                                                                                    | Not used                    | -----      |
| SBA1                                                                                   | STAND BASE ASSEMBLY A31T2UH | 1EM030546  |
| SNA1                                                                                   | STAND NECK A31T2UH          | 1EM030545A |
| S1                                                                                     | CARTON A3RTAMA              | 2EMC00031  |
| S12                                                                                    | CARTON LABEL A3RTAMA        | -----      |
| X2  | OWNERS MANUAL A3RTAMA       | 2EMN00024A |
| X6                                                                                     | QUICK START GUIDE A3RTAMA   | 2EMN00025  |
| X7                                                                                     | Not used                    |            |

# Electrical Parts

**PRODUCT SAFETY NOTE:** Products marked with a  have special characteristics important to safety. Before replacing any of these components, read carefully the product safety notice in this service manual. Don't degrade the safety of the product through improper servicing.

## NOTES:

1. Parts that are not assigned part numbers (-----) are not available.
2. Tolerance of Capacitors and Resistors are noted with the following symbols.

|              |             |                |
|--------------|-------------|----------------|
| C.....±0.25% | D.....±0.5% | F.....±1%      |
| G.....±2%    | J.....±5%   | K.....±10%     |
| M.....±20%   | N.....±30%  | Z.....+80/-20% |

## Different parts from the original model 39PFL2608/F7 (Serial No.: DS1)

| Ref. No. | Description           | Part No.     |
|----------|-----------------------|--------------|
|          | DIGITAL MAIN CBA UNIT | A3RTAMMA-004 |

## TYPE B

### PARTS LIST [39PFL2708/F7 (Serial No.: DS2)]

#### Mechanical Parts

**PRODUCT SAFETY NOTE:** Products marked with a  have special characteristics important to safety. Before replacing any of these components, read carefully the product safety notice in this service manual. Don't degrade the safety of the product through improper servicing.

**NOTE:** Parts that are not assigned part numbers (-----) are not available.

#### Different parts from the original model 39PFL2608/F7 (Serial No.: DS1)

| Ref. No.                                                                                 | Description                                                | Part No.     |
|------------------------------------------------------------------------------------------|------------------------------------------------------------|--------------|
| A3                                                                                       | REAR COVER A31T0UH                                         | 1EM030350    |
| A13                                                                                      | JACK HOLDER A3AU0UH                                        | 1EM334651    |
| A15     | RATING LABEL A31T2UH                                       | -----        |
| A16                                                                                      | LOGO LABEL A31M2UT                                         | -----        |
| A17                                                                                      | ENERGY GUIDE LABEL A31T2UH                                 | -----        |
| A19                                                                                      | JACK LABEL A31T0UH                                         | 1EM440016    |
| CL3701                                                                                   | FFC WIRE ASSEMBLY 23PIN 23PIN/WHITE/<br>110MM              | WX1A31T0S103 |
| SBA1                                                                                     | STAND BASE ASSEMBLY A31T2UH                                | 1EM030546    |
| SNA1                                                                                     | STAND NECK A31T2UH                                         | 1EM030545A   |
| S1                                                                                       | CARTON A31T2UH                                             | 1EM334657    |
| X2    | OWNERS MANUAL A31T2UH                                      | 2EMN00084    |
| X3                                                                                       | REMOTE CONTROL UNIT YKF335-001                             | URMT39JHG001 |
| X6                                                                                       | QUICK START GUIDE A31T2UH                                  | 1EMN30381    |
| LCD1  | LCD PANEL ASSEMBLY                                         | U30T1P0      |
| CL3011                                                                                   | FFC WIRE ASSEMBLY 51PIN(W/SHIELD) 51P/<br>FFC/SHIELD/270MM | WX1A31T0P402 |

# Electrical Parts

**PRODUCT SAFETY NOTE:** Products marked with a  have special characteristics important to safety. Before replacing any of these components, read carefully the product safety notice in this service manual. Don't degrade the safety of the product through improper servicing.

## NOTES:

1. Parts that are not assigned part numbers (-----) are not available.
2. Tolerance of Capacitors and Resistors are noted with the following symbols.

C.....±0.25%    D.....±0.5%    F.....±1%  
 G.....±2%    J.....±5%    K.....±10%  
 M.....±20%    N.....±30%    Z.....+80/-20%

| Ref. No. | Description                      | Part No.     |
|----------|----------------------------------|--------------|
|          | POWER SUPPLY CBA                 | A31TBMPW-001 |
| C662     | CAP ELE 22µF/50V/M85             | CEF2200V8006 |
| IC651    | IC REGULATOR AP1117E33G-13 /3PIN | NSCA0TDES017 |
| R676     | WIRE CP STP-S-0.50               | XZ40F0REN001 |
| R678     | METAL OXIDE RES. 2W J 0.3 Ω      | RN02R30ZU001 |
| R679     | METAL OXIDE RES. 2W J 0.3 Ω      | RN02R30ZU001 |
| R683     | RES CHIP 3216 1/4W 0 Ω           | RRX4000HH036 |
| R684     | RES CHIP 3216 1/4W 0 Ω           | RRX4000HH036 |

## Different parts from the original model 39PFL2608/F7 (Serial No. : DS1)

| Ref. No. | Description                                      | Part No.     |
|----------|--------------------------------------------------|--------------|
|          | DIGITAL MAIN CBA UNIT                            | A31TCMMA-001 |
| CN3701   | Not used                                         |              |
| IC3001   | IC DC-DC CONVERTER MP1472GJC452Z                 | NSCA0T09M021 |
| IC3002   | IC 512MB DDR2 SDRAM K4T51163QJ-BCE7              | NSCA0R0SM048 |
| IC3003   | IC DC-DC CONVERTER MP1472GJC452Z                 | NSCA0T09M021 |
| IC3004   | IC REGULATOR BD00IA5WEFJ-E2                      | QSCA0T0RM233 |
| IC3005   | IC DTV-C7V R8A05011BG-U0/256FHP                  | QSAA0R0HT057 |
| IC3006   | 32MBIT C-MOS SERIAL FLASH<br>S25FL032P0XMF010 /S | QSCA0R0FJ008 |
| IC3007   | IC LDO REGULATOR BD00IC0WEFJ/HTSOP-<br>J8        | QSCA0T0RM397 |
| IC3008   | IC DC-DC CONVERTER MP1472GJC452Z                 | NSCA0T09M021 |
| IC3009   | IC RESET IC-PST8429UR                            | QSCA0T0MM075 |
| IC3011   | IC EEPROM BU9883FV-WE2                           | QSCA0T0RM105 |
| IC3013   | IC SINGLE BUS BUFFER 74LVC1G126GW                | NSCA0TNXP004 |
| IC3014   | IC SINGLE BUS BUFFER 74LVC1G126GW                | NSCA0TNXP004 |
| IC3018   | IC HDMI SW TMDS351PAGR /PAG-64                   | NSCA0T0TY068 |
| IC3019   | IC USB HIGH-SIDE SW AP2151WG-7/SOT25/<br>5PI     | NSCA0TDES015 |
| IC3101   | Not used                                         |              |
| IC3102   | Not used                                         |              |
| IC3103   | Not used                                         |              |
| IC3601   | IC REGULATOR AP2121AK-3.3TRE1                    | NSCA0TBCD026 |
| IC3602   | Not used                                         |              |
| IC3603   | Not used                                         |              |
| IC3604   | Not used                                         |              |
| IC3607   | Not used                                         |              |
| IC3701   | Not used                                         |              |
| IC3801   | IC D-CLASS AUDIO POWER AMPLIFI<br>TPA3110D2PWPR  | NSCA0T0TY073 |
| IC3803   | Not used                                         |              |
| IC3851   | IC HEADPHONE AMP BH3547F SOP 8PIN                | QSZBA0TRM119 |
| TU3901   | TUNER UNIT U9001UH                               | U9001UH      |
| TU3001   | Not used                                         |              |
| IC3401   | Not used                                         |              |
| IC3402   | Not used                                         |              |
|          |                                                  |              |
|          | FUNCTION CBA UNIT                                | A31TCMSW-001 |

# TYPE C

## PARTS LIST [39PFL2708/F7 (Serial No.: DS1)]

### Mechanical Parts

**PRODUCT SAFETY NOTE:** Products marked with a  have special characteristics important to safety. Before replacing any of these components, read carefully the product safety notice in this service manual. Don't degrade the safety of the product through improper servicing.

**NOTE:** Parts that are not assigned part numbers (-----) are not available.

#### Different parts from the original model 39PFL2608/F7 (Serial No.: DS1)

| Ref. No.                                                                                 | Description                                                | Part No.     |
|------------------------------------------------------------------------------------------|------------------------------------------------------------|--------------|
| A3                                                                                       | REAR COVER A31T0UH                                         | 1EM030350    |
| A13                                                                                      | JACK HOLDER A3AU0UH                                        | 1EM334651    |
| A15     | RATING LABEL A31T2UH                                       | -----        |
| A16                                                                                      | LOGO LABEL A31M2UT                                         | -----        |
| A17                                                                                      | ENERGY GUIDE LABEL A31T2UH                                 | -----        |
| A19                                                                                      | JACK LABEL A31T0UH                                         | 1EM440016    |
| CL3701                                                                                   | FFC WIRE ASSEMBLY 23PIN 23PIN/WHITE/<br>110MM              | WX1A31T0S103 |
| SBA1                                                                                     | STAND BASE ASSEMBLY A31T2UH                                | 1EM030546    |
| SNA1                                                                                     | STAND NECK A31T2UH                                         | 1EM030545A   |
| S1                                                                                       | CARTON A31T2UH                                             | 1EM334657    |
| X2    | OWNERS MANUAL A31T2UH                                      | 2EMN00084    |
| X3                                                                                       | REMOTE CONTROL UNIT YKF335-001                             | URMT39JHG001 |
| X6                                                                                       | QUICK START GUIDE A31T2UH                                  | 1EMN30381    |
| LCD1  | LCD PANEL ASSEMBLY                                         | U30T1P0      |
| CL3011                                                                                   | FFC WIRE ASSEMBLY 51PIN(W/SHIELD) 51P/<br>FFC/SHIELD/270MM | WX1A31T0P402 |

# Electrical Parts

**PRODUCT SAFETY NOTE:** Products marked with a  have special characteristics important to safety. Before replacing any of these components, read carefully the product safety notice in this service manual. Don't degrade the safety of the product through improper servicing.

## NOTES:

1. Parts that are not assigned part numbers (-----) are not available.
2. Tolerance of Capacitors and Resistors are noted with the following symbols.

C.....±0.25%    D.....±0.5%    F.....±1%  
 G.....±2%    J.....±5%    K.....±10%  
 M.....±20%    N.....±30%    Z.....+80/-20%

| Ref. No.                                                                               | Description                      | Part No.     |
|----------------------------------------------------------------------------------------|----------------------------------|--------------|
| R662                                                                                   | Not used                         |              |
| R670                                                                                   | Not used                         |              |
| R671                                                                                   | Not used                         |              |
| R672                                                                                   | Not used                         |              |
| R676                                                                                   | METAL OXIDE FILM RES. 2W J 4.7 Ω | RN024R7ZU001 |
| R678                                                                                   | METAL OXIDE FILM RES. 2W J 4.7 Ω | RN024R7ZU001 |
| R679                                                                                   | METAL OXIDE FILM RES. 2W J 4.7 Ω | RN024R7ZU001 |
| R680                                                                                   | Not used                         |              |
| R681                                                                                   | Not used                         |              |
| R682                                                                                   | Not used                         |              |
| R683                                                                                   | RES CHIP 3216 1/4W J 3.9 Ω       | RRX43R9HH034 |
| R684                                                                                   | RES CHIP 3216 1/4W J 3.9 Ω       | RRX43R9HH034 |
| R685                                                                                   | RES CHIP 3216 1/4W J 3.3 Ω       | RRX43R3HH034 |
| R686                                                                                   | RES CHIP 3216 1/4W J 3.3 Ω       | RRX43R3HH034 |
| R687                                                                                   | RES CHIP 3216 1/4W J 3.3 Ω       | RRX43R3HH034 |
| R688                                                                                   | RES CHIP 3216 1/4W J 2.2 Ω       | RRX42R2HH034 |
| R689                                                                                   | RES CHIP 3216 1/4W J 2.7 Ω       | RRX42R7HH034 |
| R690  | Not used                         |              |

## Different parts from the original model 39PFL2608/F7 (Serial No.: DS1)

| Ref. No. | Description                                  | Part No.     |
|----------|----------------------------------------------|--------------|
|          | DIGITAL MAIN CBA UNIT                        | A31T2MMA-004 |
| CN3701   | Not used                                     |              |
| IC3001   | IC MSD8200DS-S1                              | NSAA0RMST001 |
| IC3002   | IC 512MB DDR2 SDRAM K4T51163QJ-BCE7          | NSCA0R0SM048 |
| IC3006   | IC 32M-BIT SERIAL FLASH MEMORY W25Q32FVSSIG  | NSCA0R0ZM018 |
| IC3009   | IC RESET IC-PST8429UR                        | QSCA0T0MM075 |
| IC3019   | IC USB HIGH-SIDE SW AP2151WG-7/SOT25/5PI     | NSCA0TDES015 |
| IC3101   | Not used                                     |              |
| IC3102   | Not used                                     |              |
| IC3103   | Not used                                     |              |
| IC3601   | REGULATOR AP1117EG-13                        | NSCA0TDES012 |
| IC3602   | REGULATOR AP1117EG-13                        | NSCA0TDES012 |
| IC3603   | IC REGULATOR BD00IA5WEFJ-E2                  | QSCA0T0RM233 |
| IC3605   | IC DCDC CONVERTER RT8293ALZSP                | NSCA0T00B017 |
| IC3607   | Not used                                     |              |
| IC3701   | Not used                                     |              |
| IC3801   | IC D-CLASS AUDIO POWER AMPLIFI TPA3110D2PWPR | NSCA0T0TY073 |
| IC3803   | Not used                                     |              |
| IC3901   | REGULATOR AP1117EG-13                        | NSCA0TDES012 |
| TU3001   | Not used                                     |              |
| TU3901   | TUNER UNIT U9001UH                           | U9001UH      |
| IC3401   | Not used                                     |              |
| IC3402   | Not used                                     |              |
|          |                                              |              |
|          | FUNCTION CBA UNIT                            | A31T2MSW-001 |
|          |                                              |              |
|          | POWER SUPPLY CBA                             | A31T0MPW-002 |
| C662     | CAP ELE 22µF/50V/M/85                        | CEF2200V8006 |
| C665     | Not used                                     |              |
| D662     | Not used                                     |              |
| IC651    | IC REGULATOR AP1117E33G-13/3PIN              | NSCA0TDES017 |
| Q656     | Not used                                     |              |
| Q657     | TRANSISTOR 2SA950-O (TE2 F T)                | QQS002SA950F |
| Q658     | Not used                                     |              |

# TYPE C

## PARTS LIST [39PFL4208/F8 (Serial No.: XA1)]

### Mechanical Parts

**PRODUCT SAFETY NOTE:** Products marked with a  have special characteristics important to safety. Before replacing any of these components, read carefully the product safety notice in this service manual. Don't degrade the safety of the product through improper servicing.

**NOTE:** Parts that are not assigned part numbers (-----) are not available.

### Different parts from the original model 39PFL2608/F7 (Serial No.: DS1)

| Ref. No.                                                                                 | Description                                                | Part No.     |
|------------------------------------------------------------------------------------------|------------------------------------------------------------|--------------|
| A3                                                                                       | REAR COVER A31T0UH                                         | 1EM030350    |
| A13                                                                                      | JACK HOLDER A3AU0UH                                        | 1EM334651    |
| A15     | RATING LABEL A31TAMA                                       | -----        |
| A16                                                                                      | LOGO LABEL A31MAMA                                         | -----        |
| A17                                                                                      | Not used                                                   | -----        |
| A19                                                                                      | JACK LABEL A31T0UH                                         | 1EM440016    |
| CL3701                                                                                   | FFC WIRE ASSEMBLY 23PIN 23PIN/WHITE/<br>110MM              | WX1A31T0S103 |
| SBA1                                                                                     | STAND BASE ASSEMBLY A31T2UH                                | 1EM030546    |
| SNA1                                                                                     | STAND NECK A31T2UH                                         | 1EM030545A   |
| S1                                                                                       | CARTON A31TAMA                                             | 2EMC00014    |
| S12                                                                                      | CARTON LABEL A31TAMA                                       | -----        |
| X2    | OWNERS MANUAL A31TAMA                                      | 1EMN30390    |
| X3                                                                                       | REMOTE CONTROL UNIT YKF335-001                             | URMT39JHG001 |
| X6                                                                                       | QUICK START GUIDE A31TAMA                                  | 1EMN30391    |
| X7                                                                                       | Not used                                                   | -----        |
| LCD1  | LCD PANEL ASSEMBLY                                         | U30T1P0      |
| CL3011                                                                                   | FFC WIRE ASSEMBLY 51PIN(W/SHIELD) 51P/<br>FFC/SHIELD/270MM | WX1A31T0P402 |

# Electrical Parts

**PRODUCT SAFETY NOTE:** Products marked with a  have special characteristics important to safety. Before replacing any of these components, read carefully the product safety notice in this service manual. Don't degrade the safety of the product through improper servicing.

## NOTES:

- Parts that are not assigned part numbers (-----) are not available.
- Tolerance of Capacitors and Resistors are noted with the following symbols.

C.....±0.25%    D.....±0.5%    F.....±1%  
 G.....±2%    J.....±5%    K.....±10%  
 M.....±20%    N.....±30%    Z.....+80/-20%

| Ref. No.                                                                               | Description                      | Part No.     |
|----------------------------------------------------------------------------------------|----------------------------------|--------------|
| R662                                                                                   | Not used                         |              |
| R670                                                                                   | Not used                         |              |
| R671                                                                                   | Not used                         |              |
| R672                                                                                   | Not used                         |              |
| R676                                                                                   | METAL OXIDE FILM RES. 2W J 4.7 Ω | RN024R7ZU001 |
| R678                                                                                   | METAL OXIDE FILM RES. 2W J 4.7 Ω | RN024R7ZU001 |
| R679                                                                                   | METAL OXIDE FILM RES. 2W J 4.7 Ω | RN024R7ZU001 |
| R680                                                                                   | Not used                         |              |
| R681                                                                                   | Not used                         |              |
| R682                                                                                   | Not used                         |              |
| R683                                                                                   | RES CHIP 3216 1/4W J 3.9 Ω       | RRX43R9HH034 |
| R684                                                                                   | RES CHIP 3216 1/4W J 3.9 Ω       | RRX43R9HH034 |
| R685                                                                                   | RES CHIP 3216 1/4W J 3.3 Ω       | RRX43R3HH034 |
| R686                                                                                   | RES CHIP 3216 1/4W J 3.3 Ω       | RRX43R3HH034 |
| R687                                                                                   | RES CHIP 3216 1/4W J 3.3 Ω       | RRX43R3HH034 |
| R688                                                                                   | RES CHIP 3216 1/4W J 2.2 Ω       | RRX42R2HH034 |
| R689                                                                                   | RES CHIP 3216 1/4W J 2.7 Ω       | RRX42R7HH034 |
| R690  | Not used                         |              |

## Different parts from the original model 39PFL2608/F7 (Serial No.: DS1)

| Ref. No. | Description                                  | Part No.     |
|----------|----------------------------------------------|--------------|
|          | DIGITAL MAIN CBA UNIT                        | A31TAMMA-002 |
| CN3701   | Not used                                     |              |
| IC3001   | IC MSD8200DS-S1                              | NSAA0RMST001 |
| IC3002   | IC 512MB DDR2 SDRAM K4T51163QJ-BCE7          | NSCA0R0SM048 |
| IC3006   | IC 32M-BIT SERIAL FLASH MEMORY W25Q32FVSSIG  | NSCA0R0ZM018 |
| IC3009   | IC RESET IC-PST8429UR                        | QSCA0T0MM075 |
| IC3019   | IC USB HIGH-SIDE SW AP2151WG-7/SOT25/5PI     | NSCA0TDES015 |
| IC3101   | Not used                                     |              |
| IC3102   | Not used                                     |              |
| IC3103   | Not used                                     |              |
| IC3601   | REGULATOR AP1117EG-13                        | NSCA0TDES012 |
| IC3602   | REGULATOR AP1117EG-13                        | NSCA0TDES012 |
| IC3603   | IC REGULATOR BD00IA5WEFJ-E2                  | QSCA0T0RM233 |
| IC3605   | IC DCDC CONVERTER RT8293ALZSP                | NSCA0T00B017 |
| IC3607   | Not used                                     |              |
| IC3701   | Not used                                     |              |
| IC3801   | IC D-CLASS AUDIO POWER AMPLIFI TPA3110D2PWPR | NSCA0T0TY073 |
| IC3803   | Not used                                     |              |
| IC3901   | REGULATOR AP1117EG-13                        | NSCA0TDES012 |
| TU3001   | Not used                                     |              |
| TU3901   | TUNER UNIT U9001UH                           | U9001UH      |
| IC3401   | Not used                                     |              |
| IC3402   | Not used                                     |              |
|          |                                              |              |
|          | FUNCTION CBA UNIT                            | A31T2MSW-001 |
|          |                                              |              |
|          | POWER SUPPLY CBA                             | A31T0MPW-002 |
| C662     | CAP ELE 22µF/50V/M/85                        | CEF2200V8006 |
| C665     | Not used                                     |              |
| D662     | Not used                                     |              |
| IC651    | IC REGULATOR AP1117E33G-13/3PIN              | NSCA0TDES017 |
| Q656     | Not used                                     |              |
| Q657     | TRANSISTOR 2SA950-O (TE2 F T)                | QQS002SA950F |
| Q658     | Not used                                     |              |

# REVISION HISTORY

## Chassis PL13.11

- 2013/02/28 39PFL2608/F7 (Serial No.: DS1) Added
- 2013/03/27 39PFL2708/F7 (Serial No.: DS2) Added
- 2013/04/19 39PFL2908/F7 (Serial No.: DS1) Added
- 2013/04/30 39PFL4208/F8 (Serial No.: XA1) Added
- 2013/06/05 39PFL4408/F8 (Serial No.: XA1) Added
- 2013/06/28 39PFL2608/F7 (Serial No.: DS2) Added
- 2013/08/17 39PFL2708/F7 (Serial No.: DS1) Added

# COMPARISON LIST OF MODEL NAMES

## Chassis PL13.11

|              |       |          |        |
|--------------|-------|----------|--------|
| 39PFL2608/F7 | (DS1) | A3RTBUH  | TYPE A |
|              | (DS2) | A3RTCUIH | TYPE A |
| 39PFL2708/F7 | (DS1) | A31T2UH  | TYPE C |
|              | (DS2) | A31TCUIH | TYPE B |
| 39PFL2908/F7 | (DS1) | A3RT0UH  | TYPE A |
| 39PFL4208/F8 | (XA1) | A31TAMA  | TYPE C |
| 39PFL4408/F8 | (XA1) | A3RTAMA  | TYPE A |