





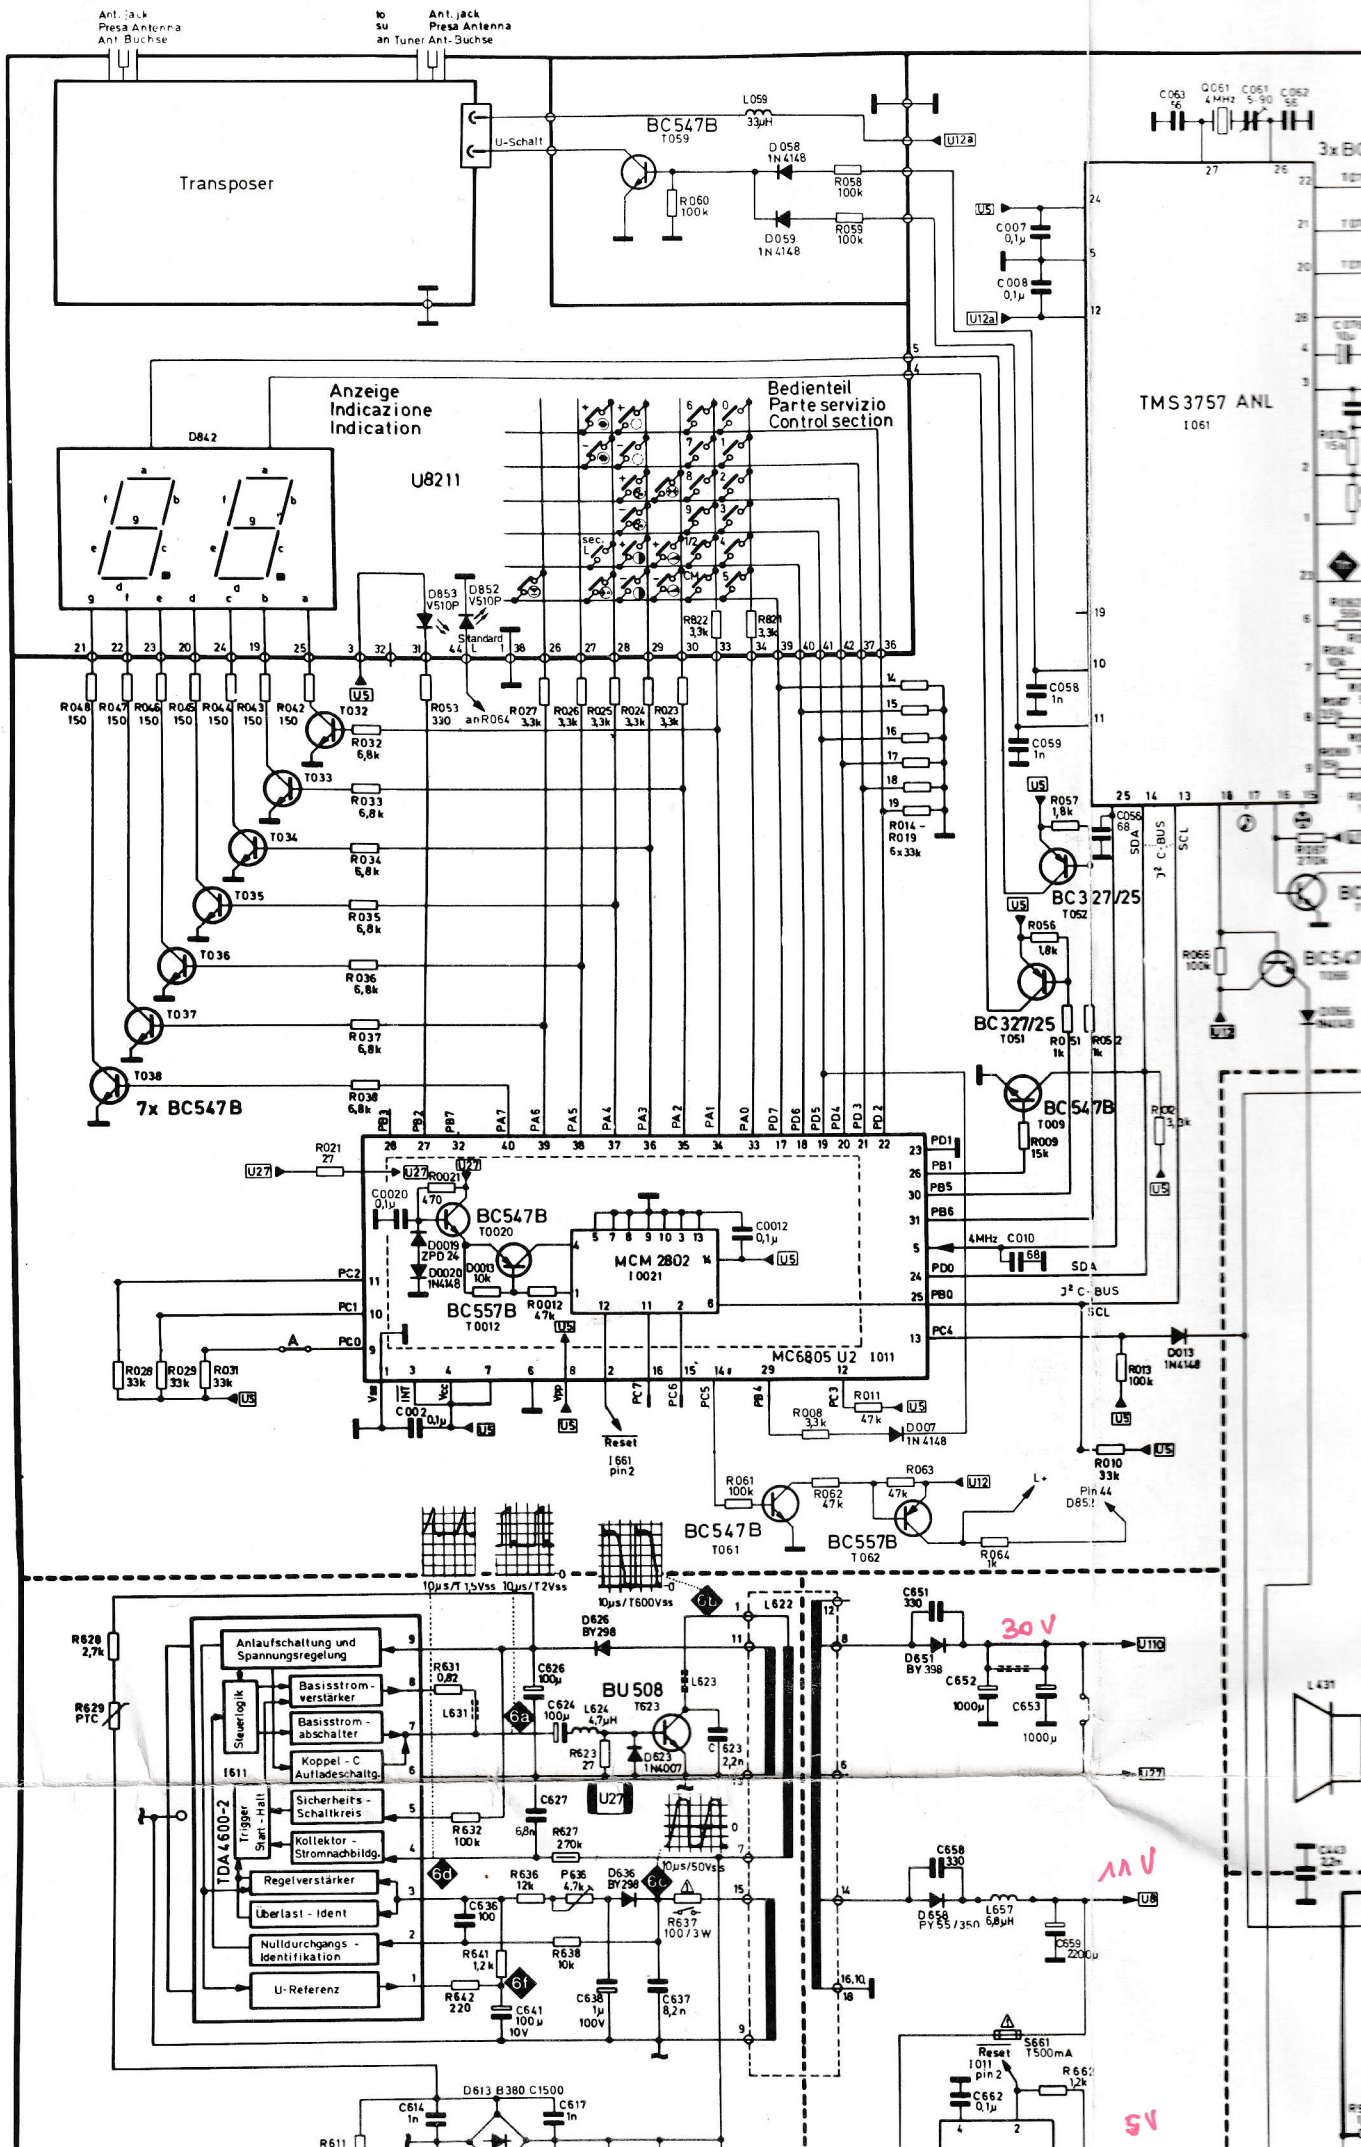


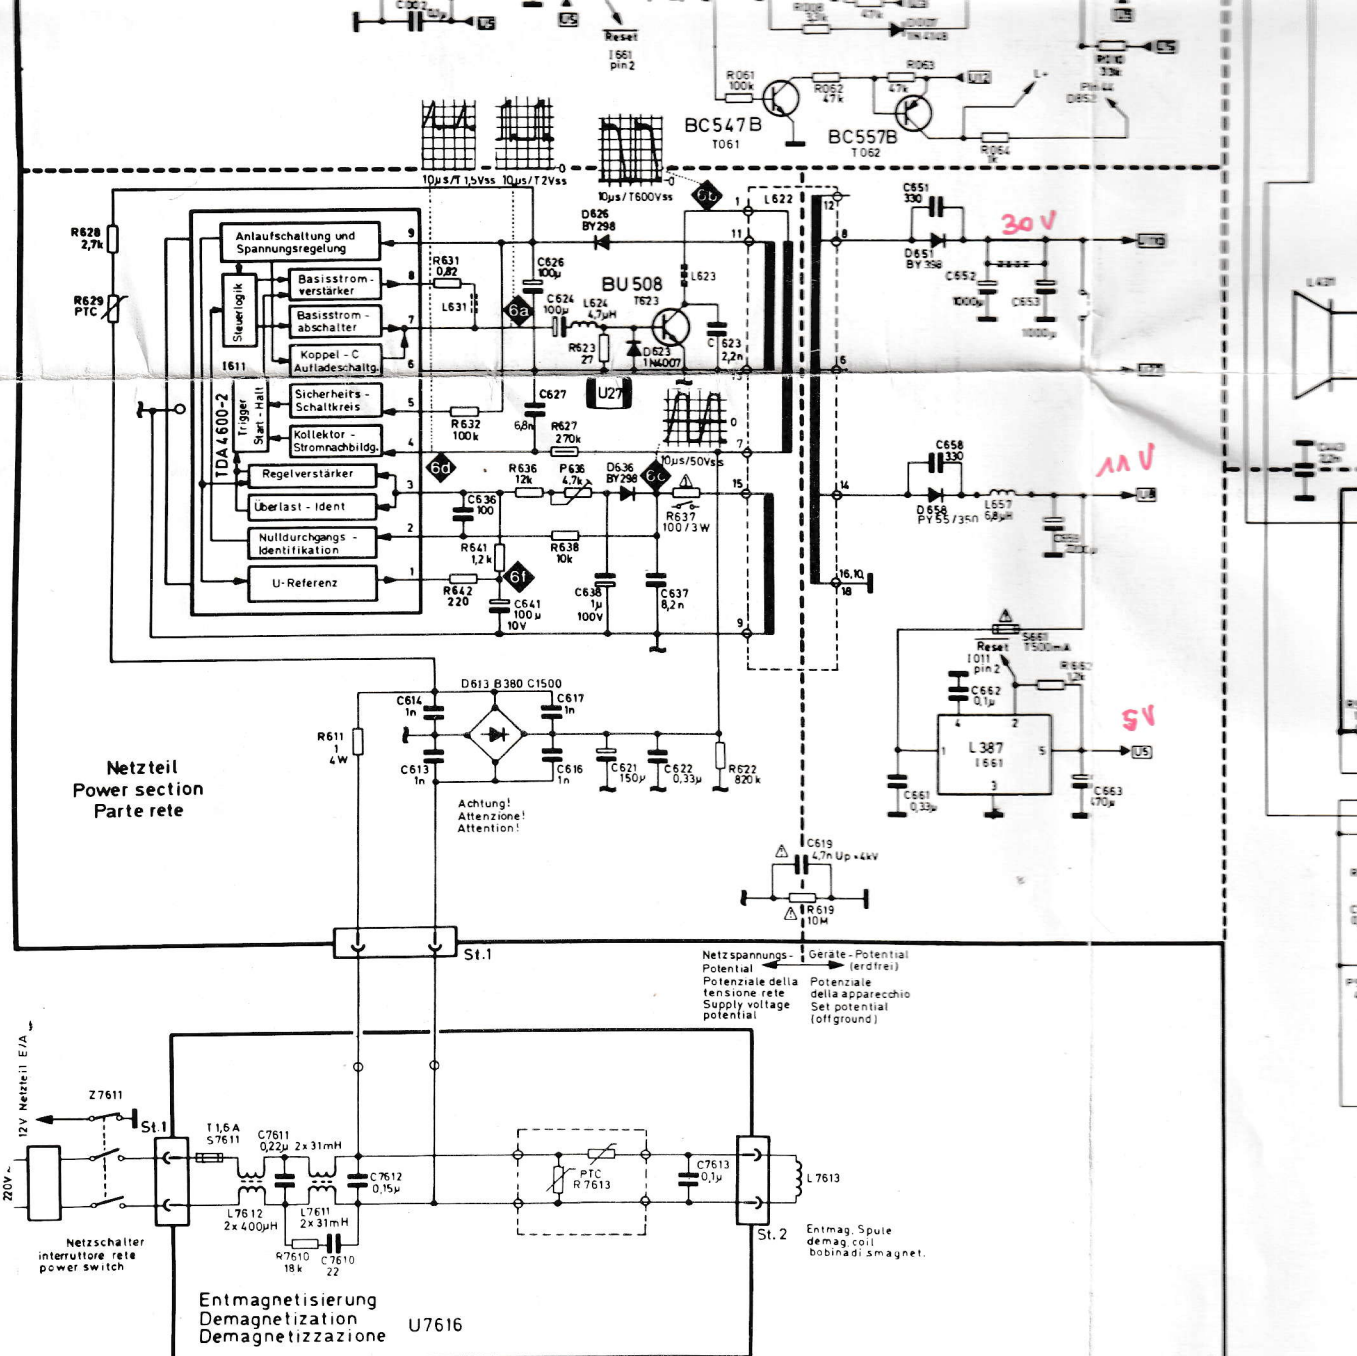

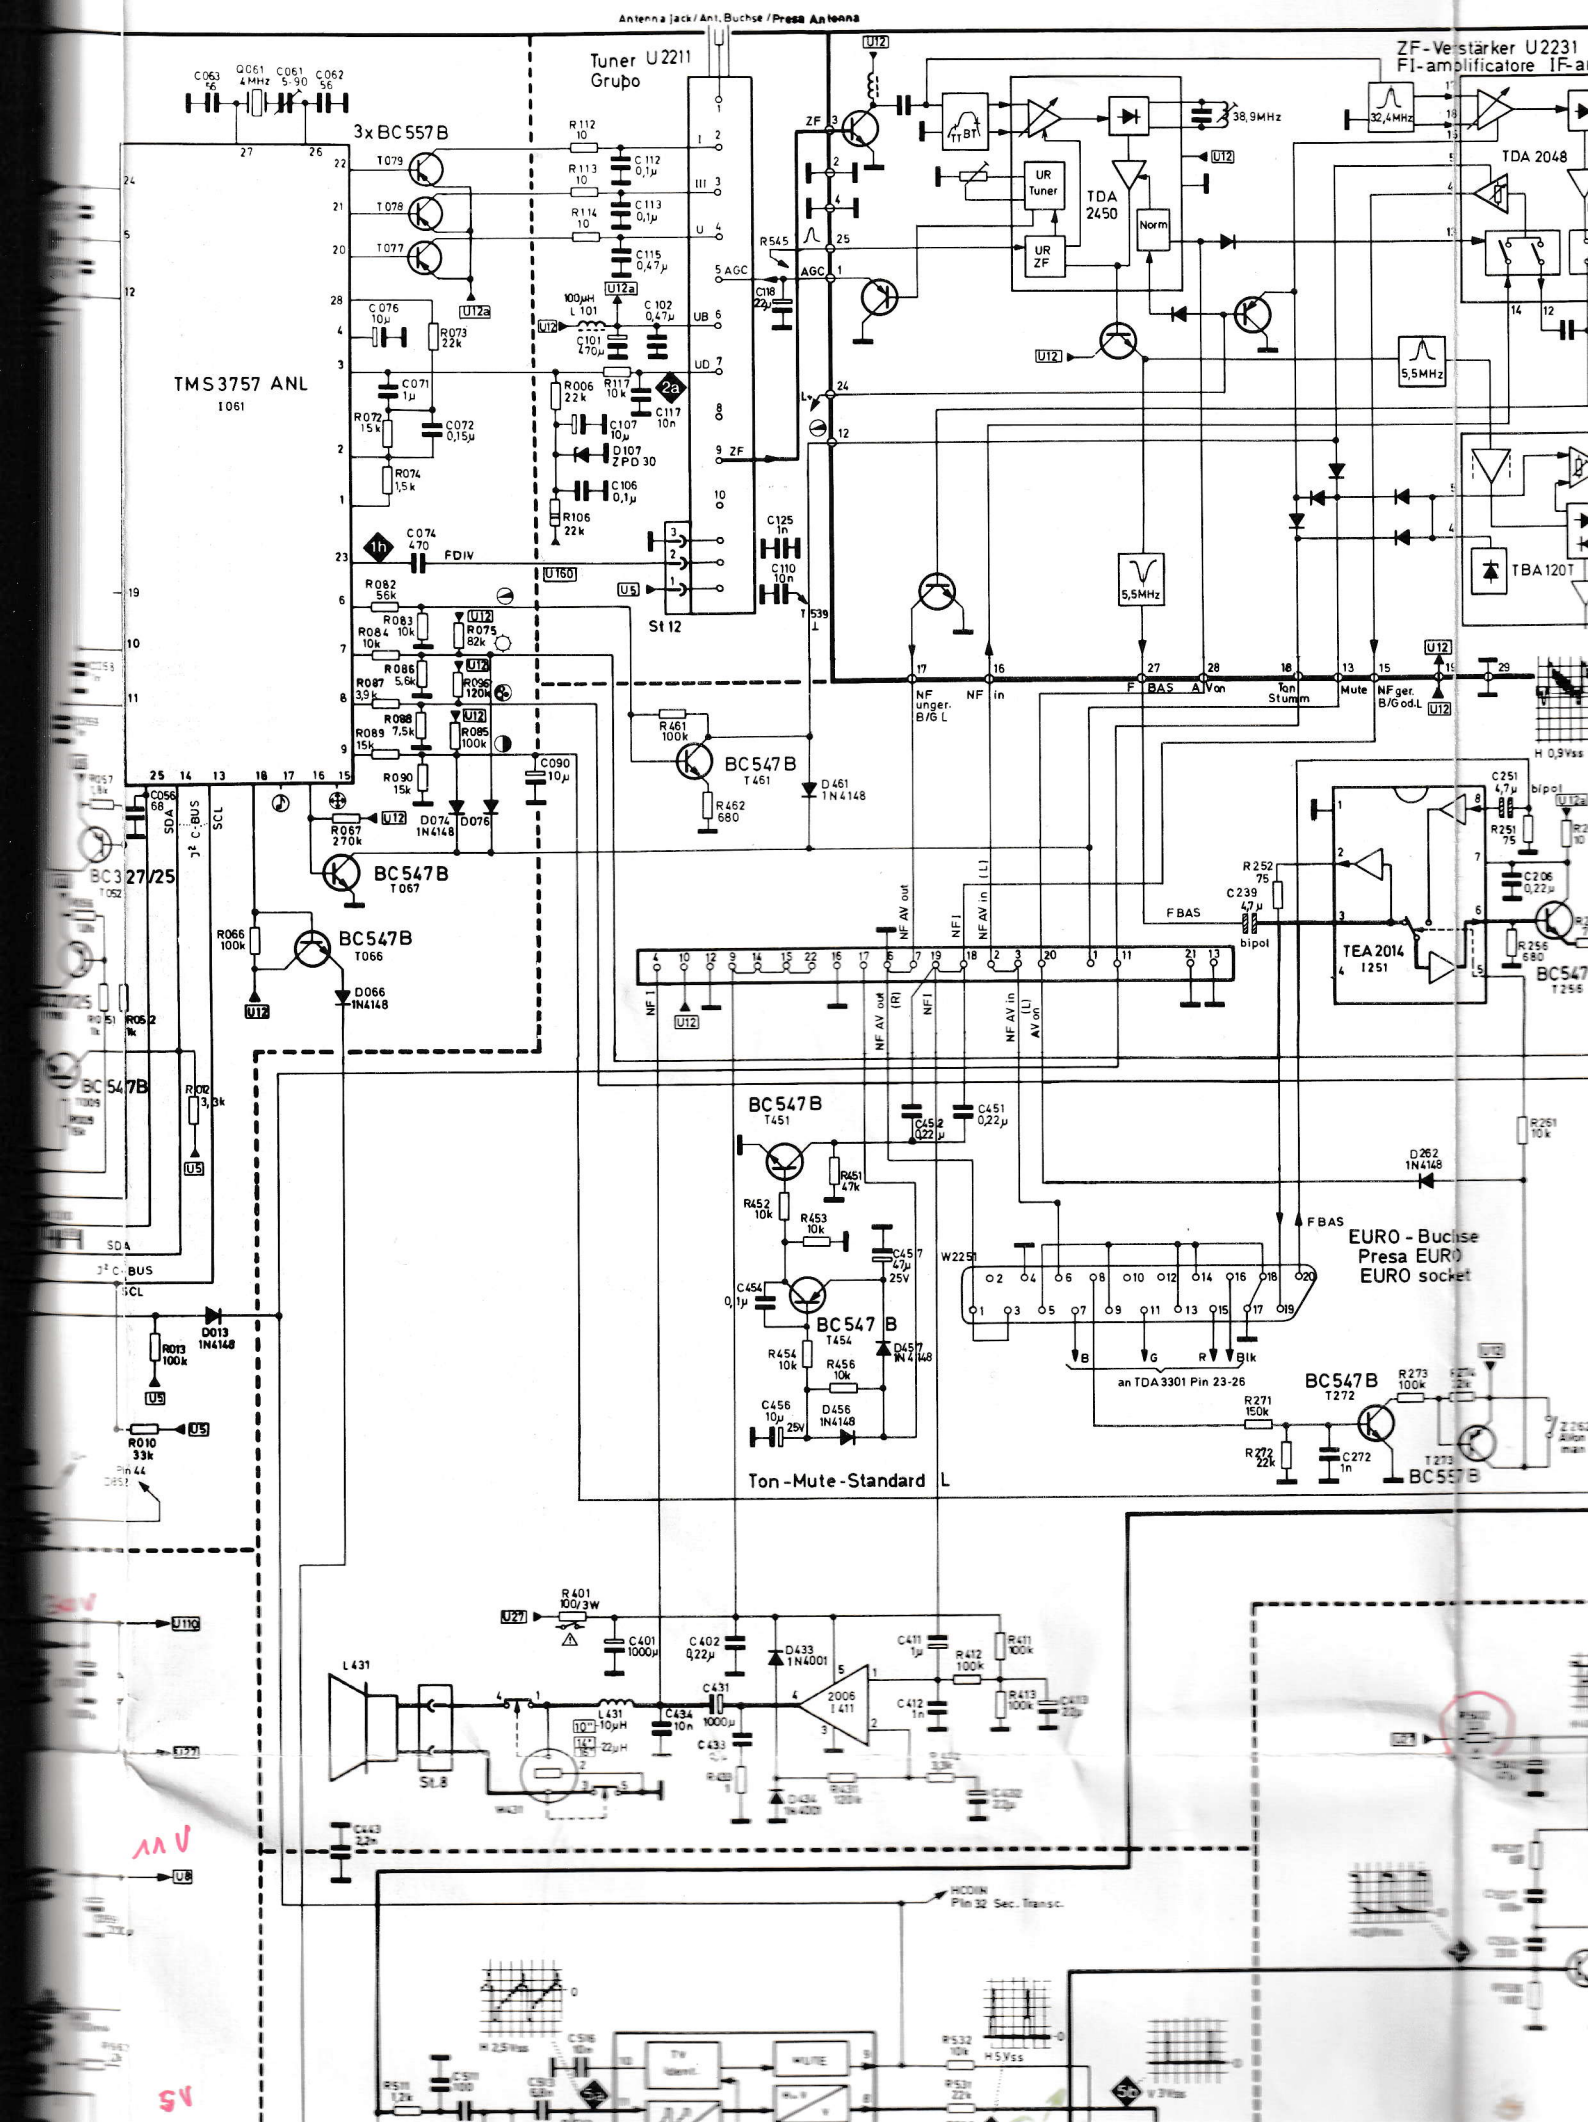


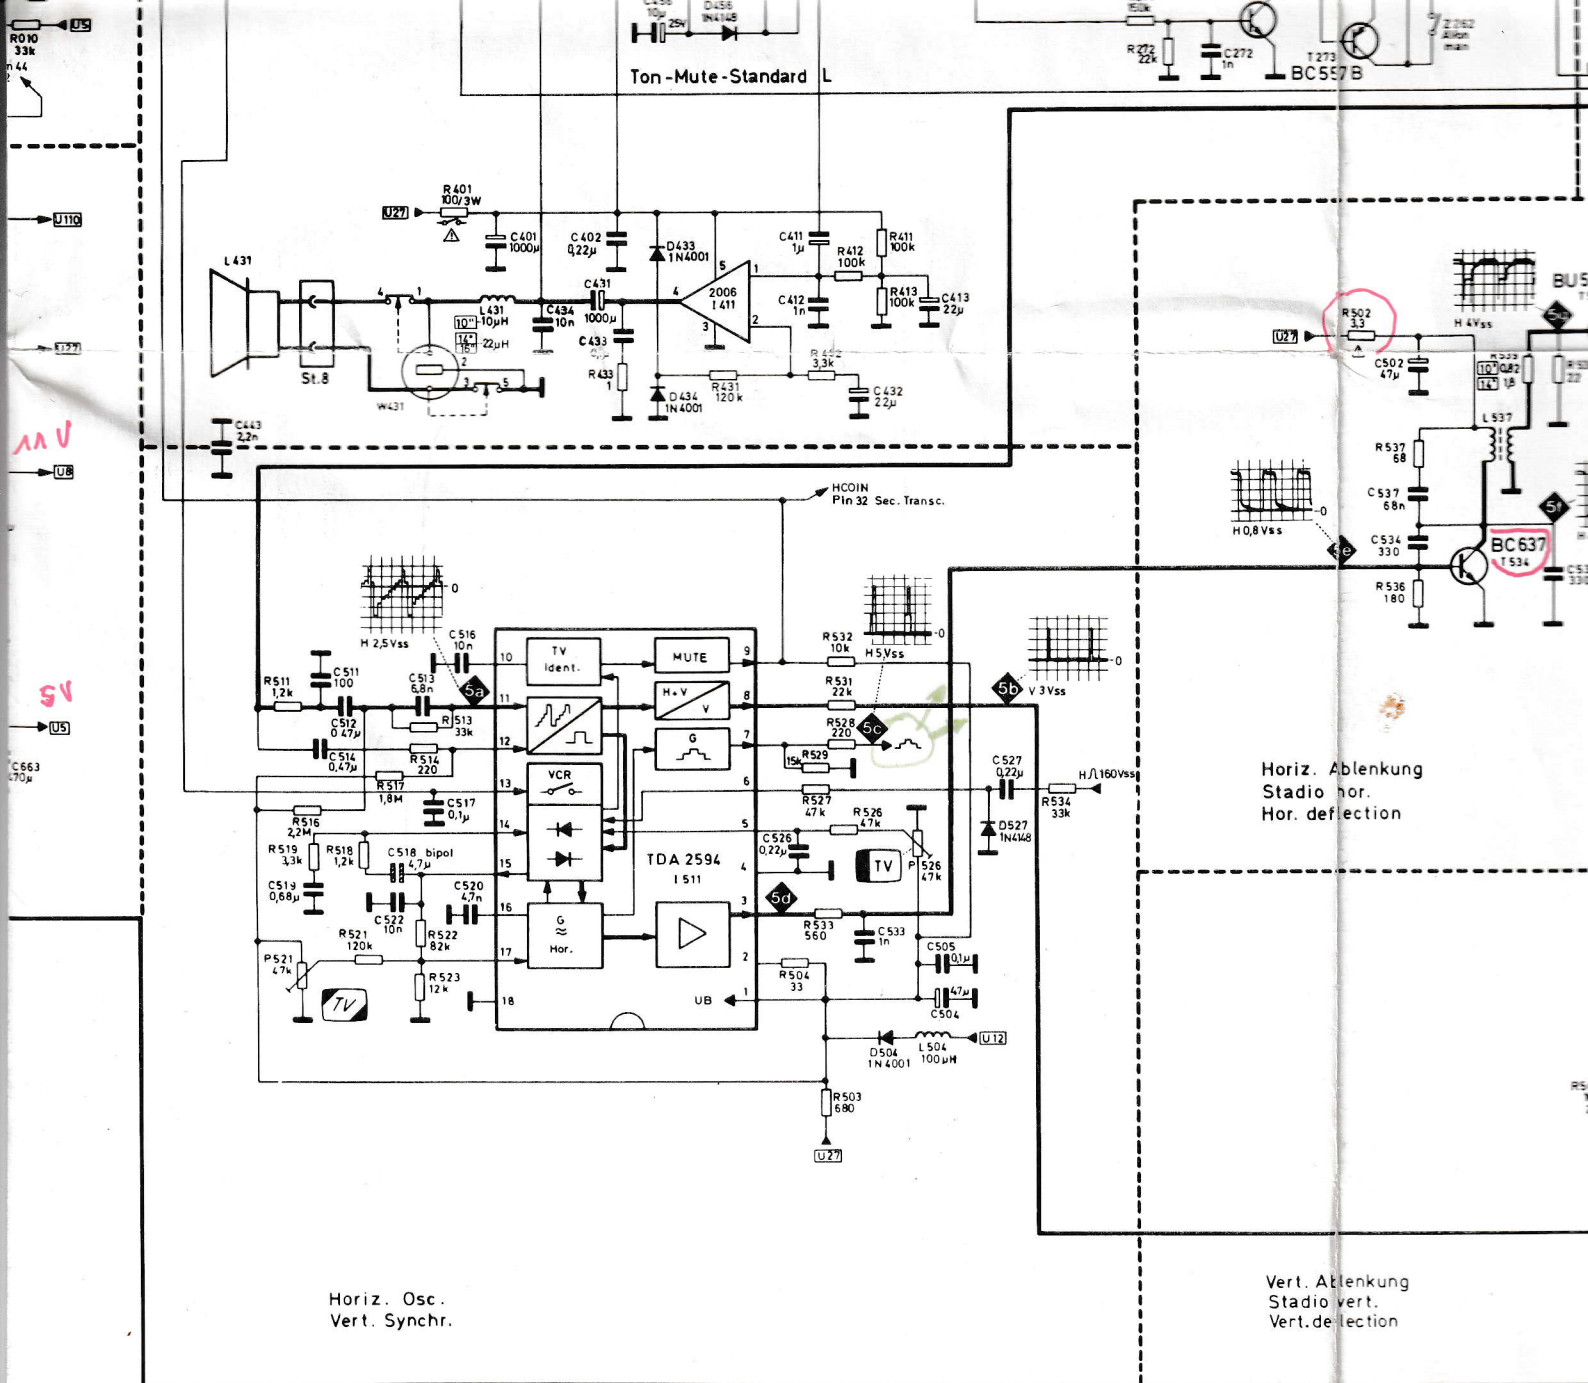




stärker U2231
plificatore IF-amplifier

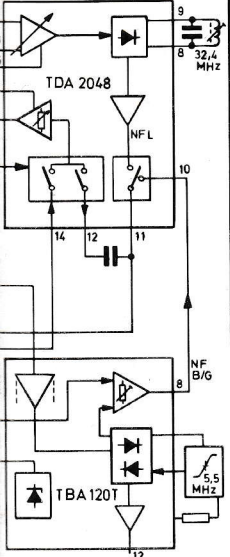


SECAM - Transcoder U7711

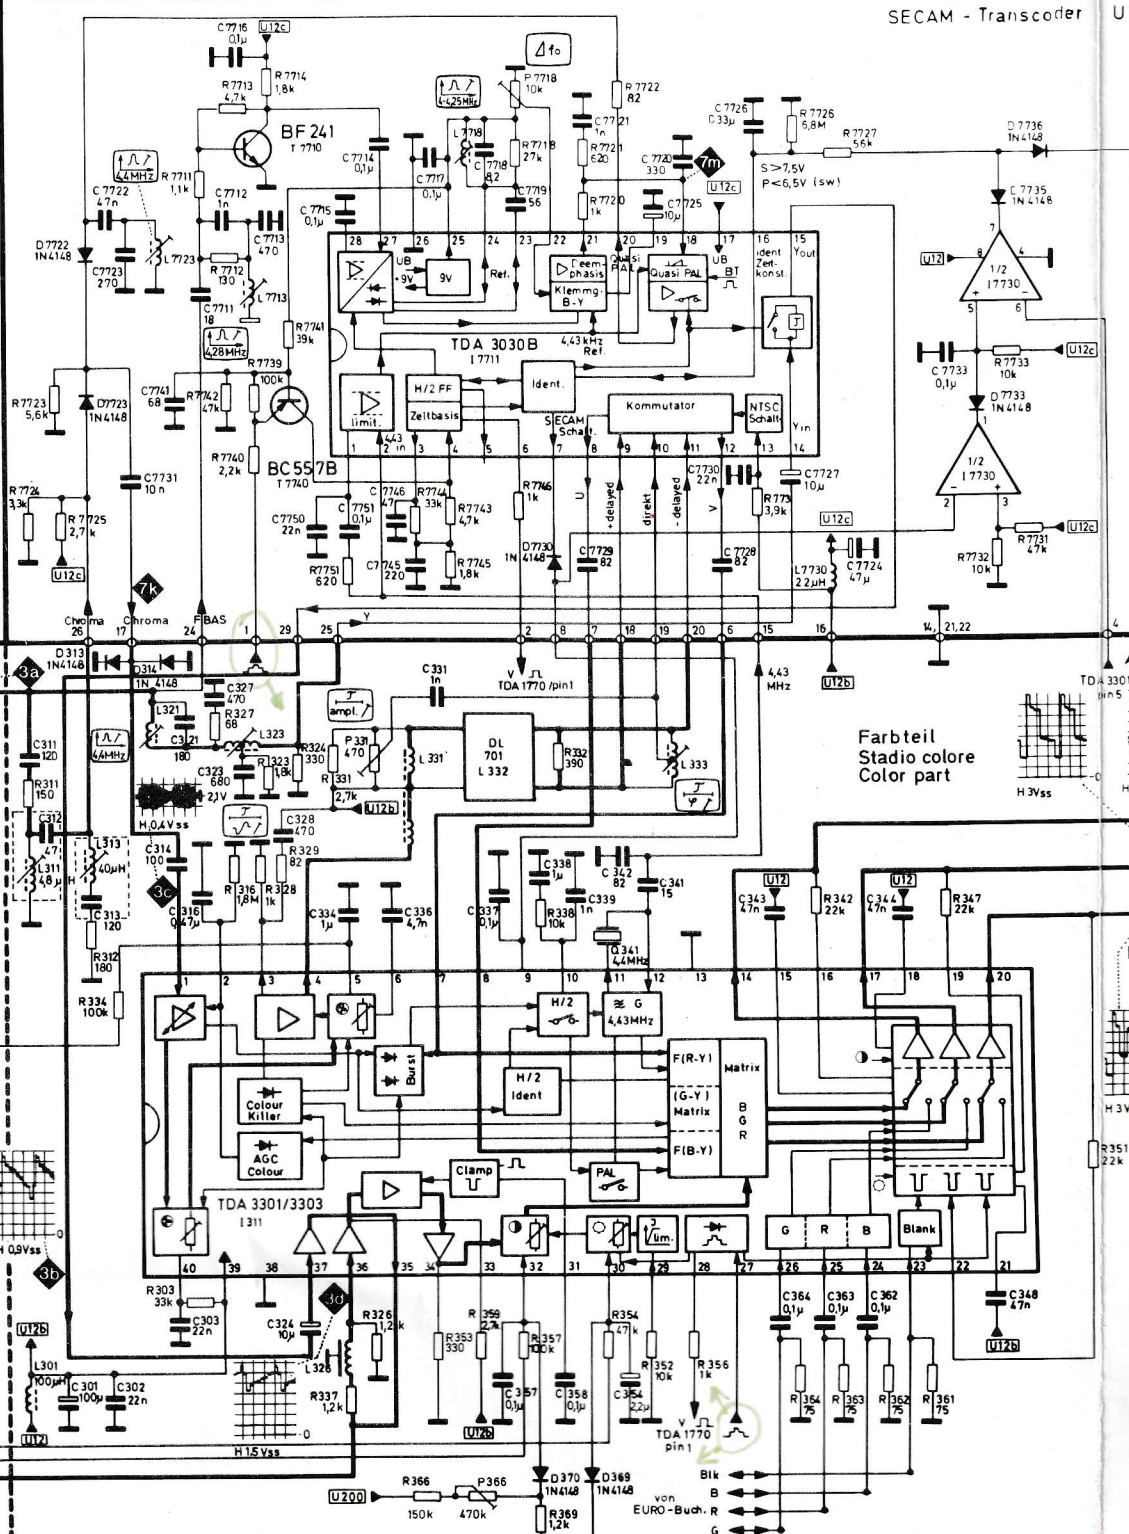

Farbteil
Stadio colore
Color part

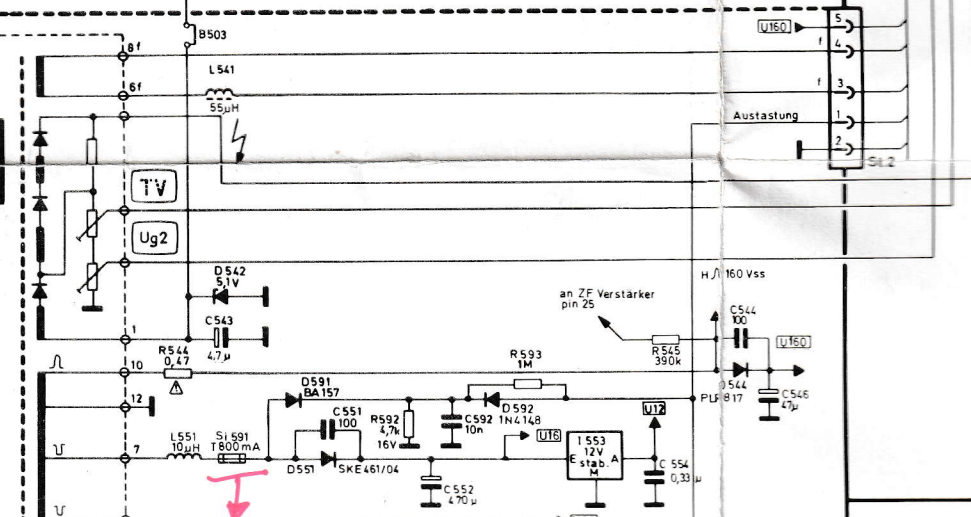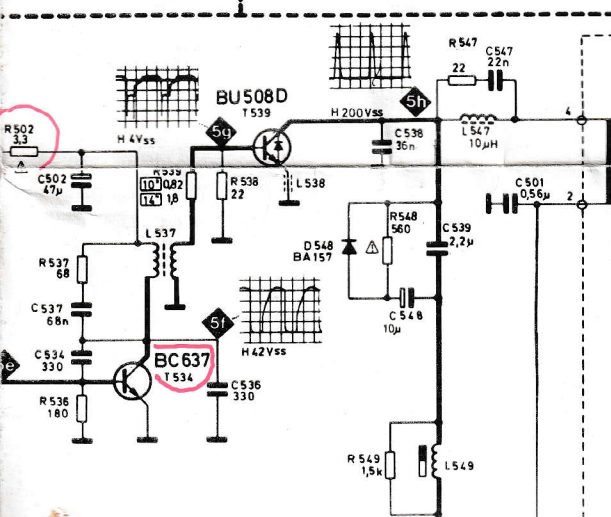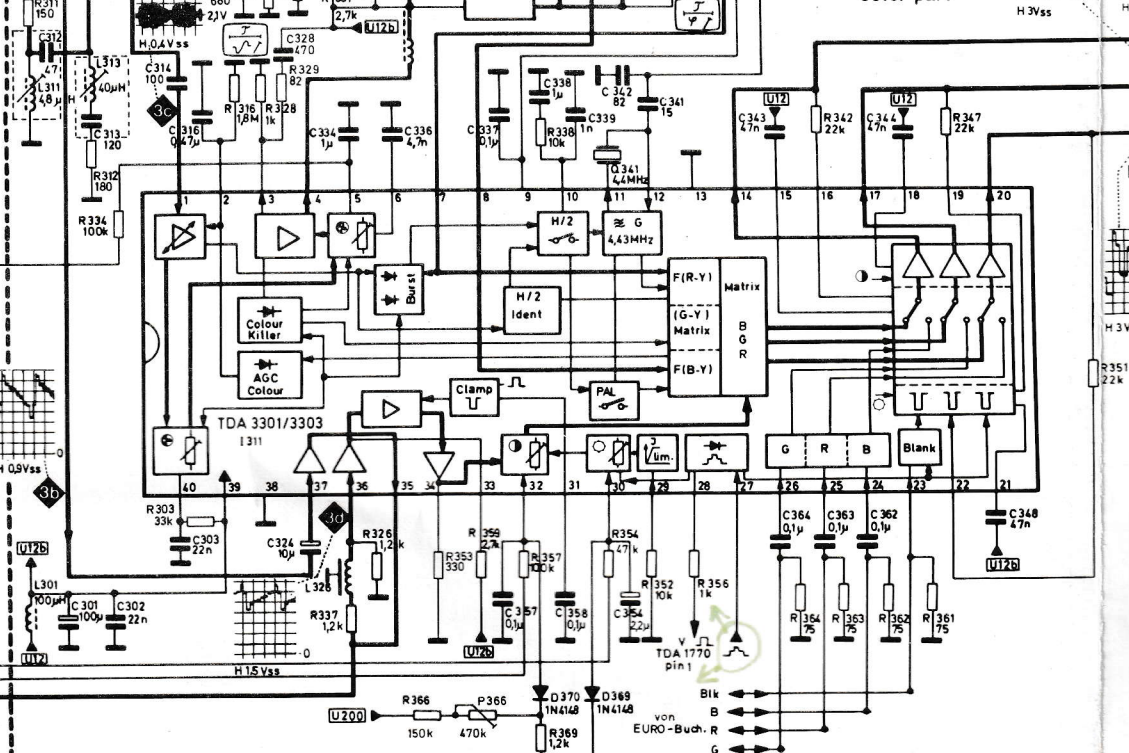


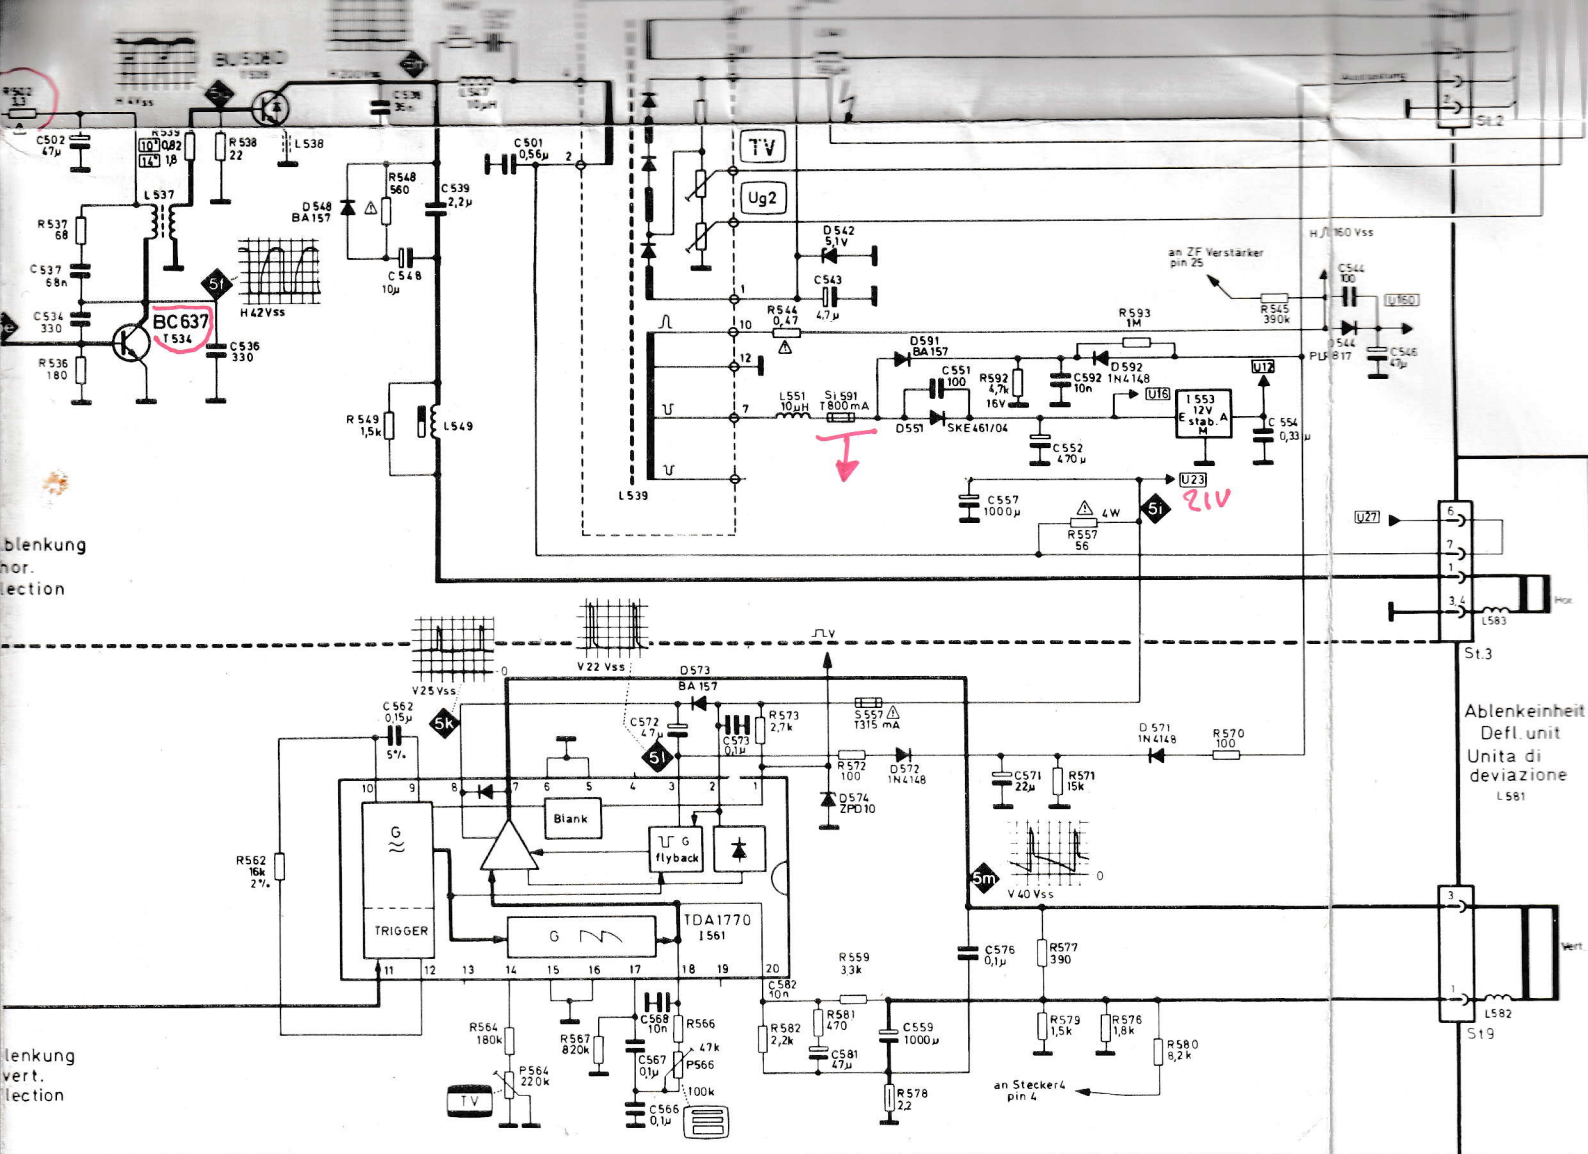


36 971 C12

Plus rien = Voir R 502 / 3,352 coupé et T 534 (BC 637) en C.C.
 Renvoie soudure de R 539 (982 Ω) du BU 508
 + Soudure de masse entre Tuner et F.I.


Plus rien = Affich. en normes BG - Cde change. de normes = Affich. du canal
 U 12 nulle = fusible Si 581 (800mA) coupé

U7711

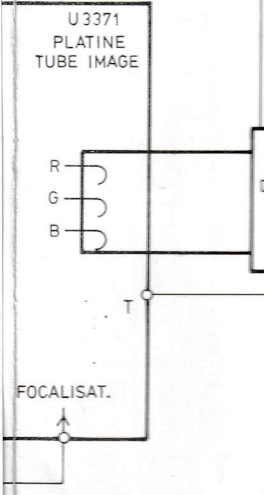
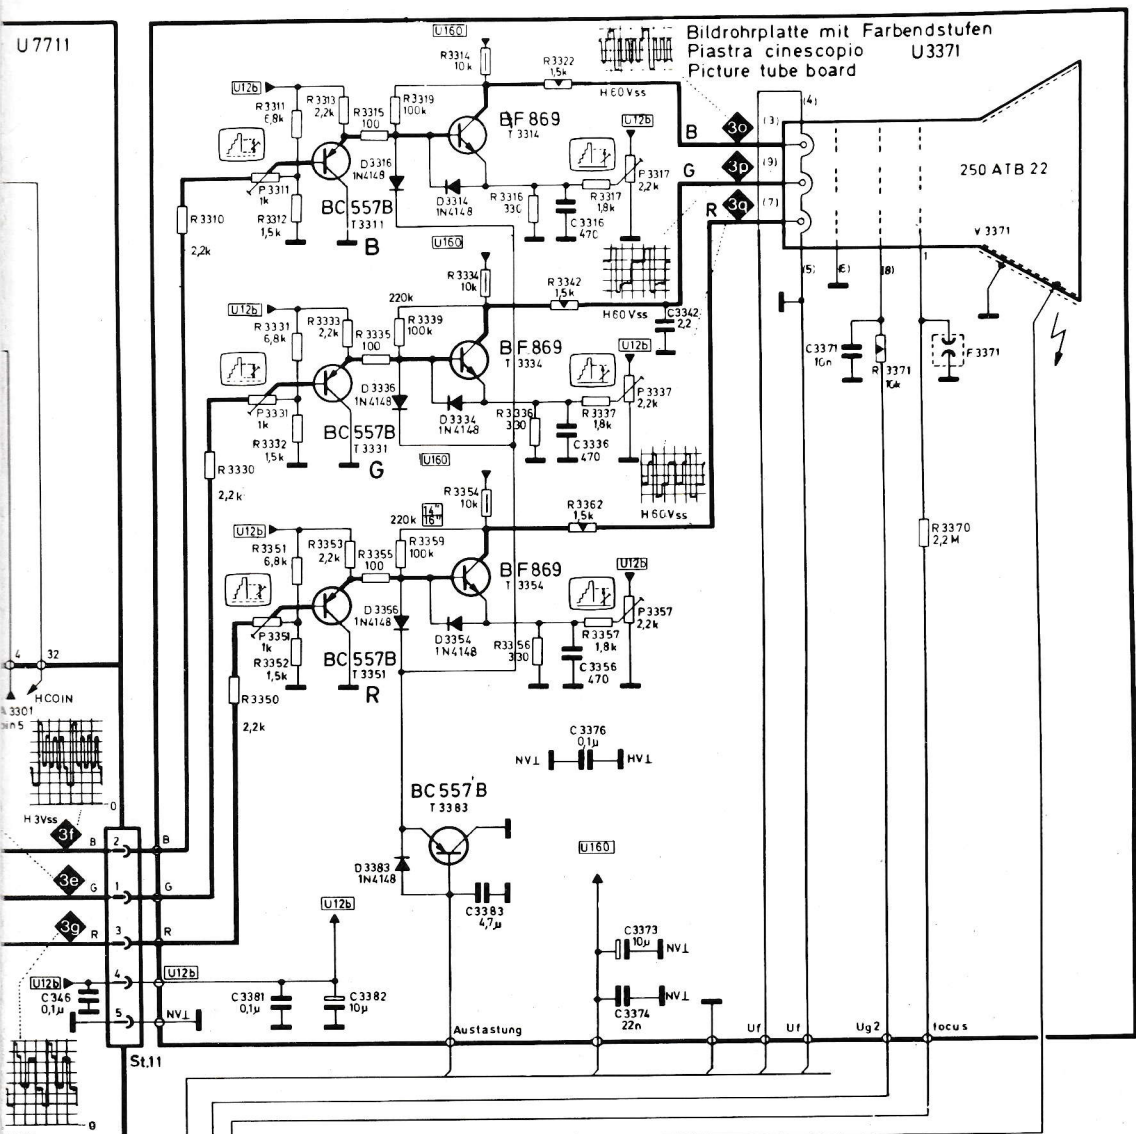


DIN Widerstandsgrößen
Dimensione resistenze DIN
DIN resistor sizes


Widerstand mit
Sicherungsfunktion
Resistenza con
funzione di sicuriza
Resistor with
protective function



- 0204=SFR16—0,2 W
- 0207=SFR25—0,33W
- 0309=SFR30—0,5 W
- 0411=VR37 —0,5 W
- 0617=VR68 —1 W

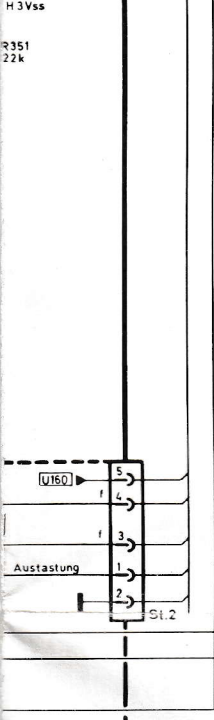

0309=SFR30—0.5 W
0411=VR37 —0.5 W
0617=VR68 —1 W

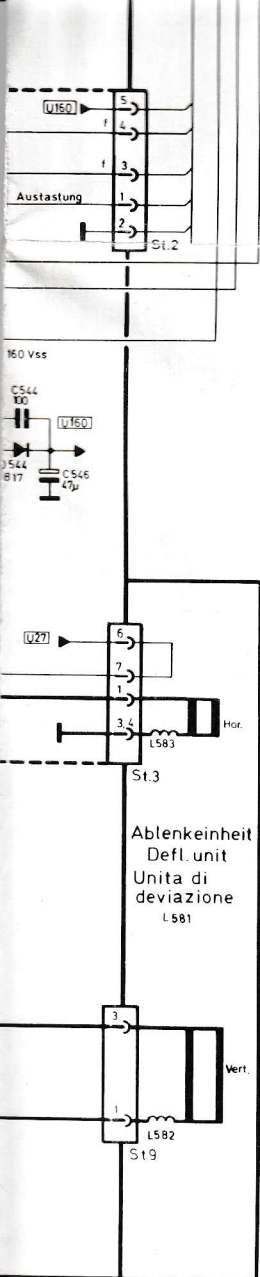

36 971 C12

CS 98 277