



# PHILIPS

## 480


Byggeår	1939
Rørbestykning	ECH3, EF9, EBL1, AZ1
Bølgelengder	L(708 - 2000 m) M(175 - 585 m) K(13.8 - 51 m)
Høytaler	Permanentdynamisk, 17 cm (6.5")
Kabinett/treverk	Lakkert og polert nøttetre, lyse rammelister.
Spenninger	110, 125, 145, 200, 225, 245 volt ~
Fysiske mål	B(46) x H(34) x D(23.5) cm
Pris	kr 225,- + stempelavgift kr 22,-



05-97

Copyright NRHF©

39 RI 1 S

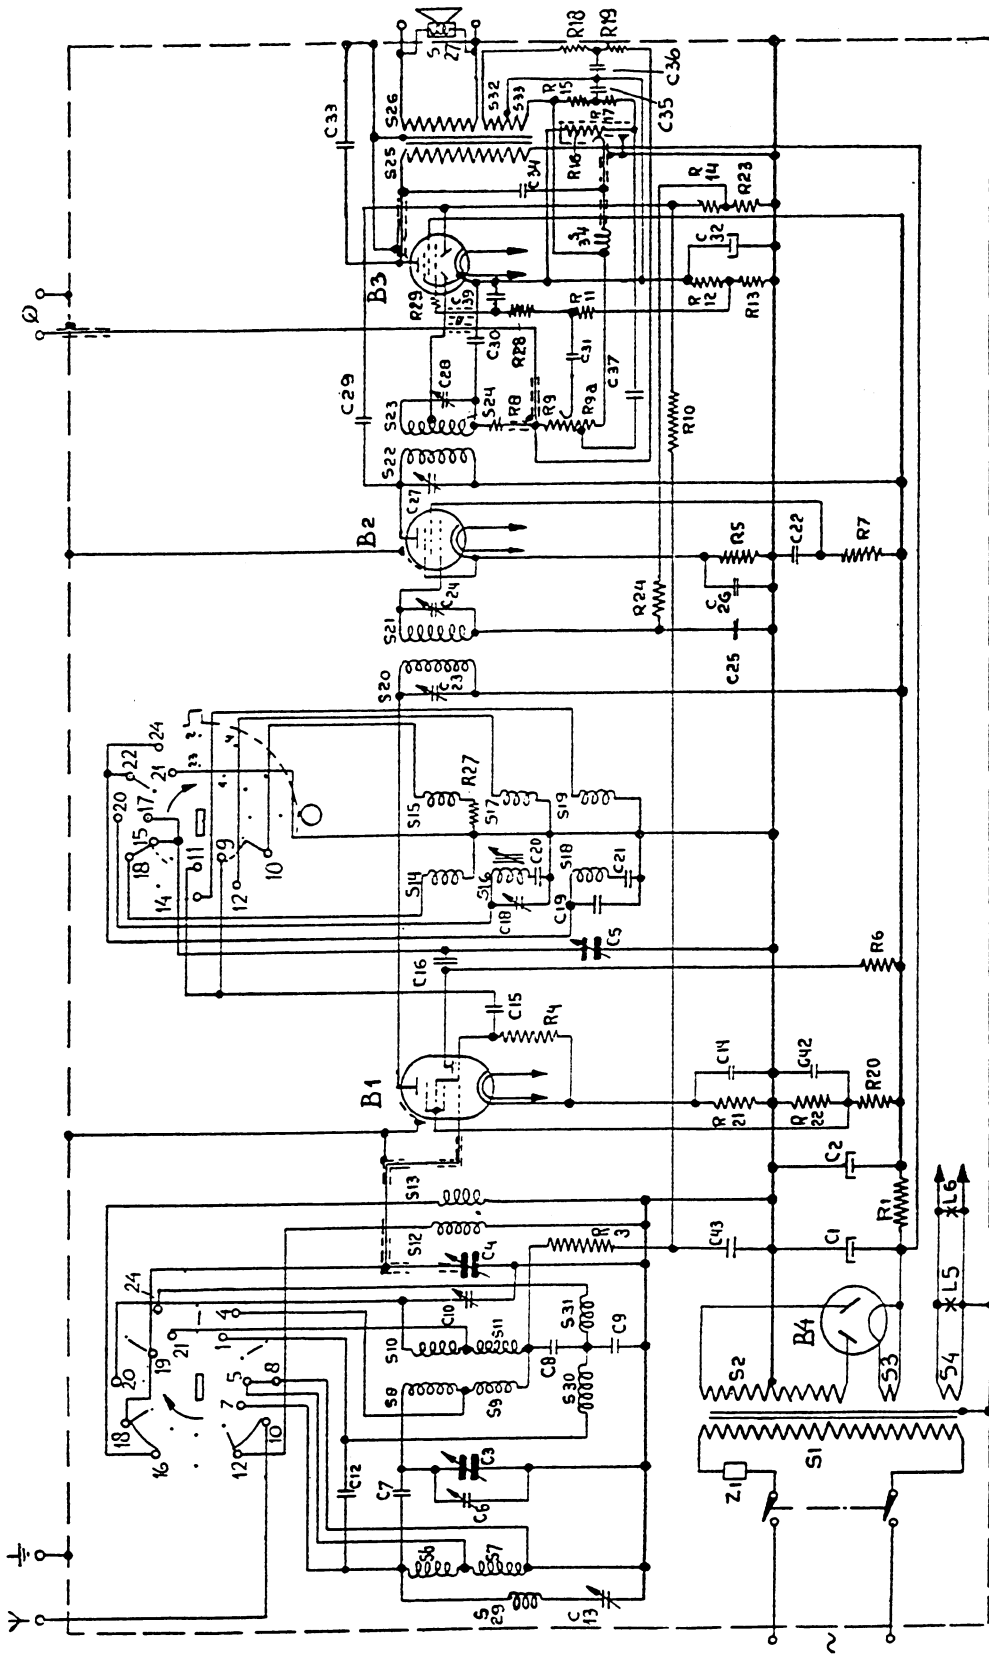

R1	1800 Ω
R2	0.1 MΩ
R3	47000 Ω
R4	330 Ω
R5	27000 Ω
R6	0.1 MΩ
R7	47000 Ω
R8	0.65 MΩ
R9	0.05 MΩ
R10	1.5 MΩ
R11	1 MΩ
R12	180 Ω
R13	395 Ω
R14	0.56 MΩ
R15	3300 Ω
R16	50000 Ω
R17	12000 Ω
R18	10000 Ω
R19	10000 Ω
R20	47000 Ω
R21	330 Ω
R22	33000 Ω
R23	0.56 MΩ
R24	1.8 MΩ
R25	47 Ω
R26	22000 Ω
R27	56 Ω
R28	56 Ω
R29	5.6 MΩ
R30	5.6 MΩ
R31	0.47 MΩ

C1	50 μF
C2	15 μF
C3	11-400 pF
C4	11-400 pF
C5	11-400 pF
C6	10 pF
C7	20 pF
C8	12000 pF
C9	39000 pF
C10	20 pF
C11	33 pF
C12	33 pF
C13	70-100 pF
C14	47000 pF
C15	47 pF
C16	170 pF
C17	20 pF
C18	20 pF
C19	33 pF
C20	35 pF
C21	1450 pF
C22	1585 pF
C23	394 pF
C24	486 pF
C25	47000 pF
C26	70-100 pF
C27	47000 pF
C28	70-100 pF
C29	8.2 pF
C30	36 pF
C31	3300 pF
C32	25 μF
C33	1000 pF
C34	1700 pF
C35	33000 pF
C36	27000 pF
C37	27000 pF
C38	47000 pF
C39	47000 pF
C40	0.1 μF
C41	22 μF