


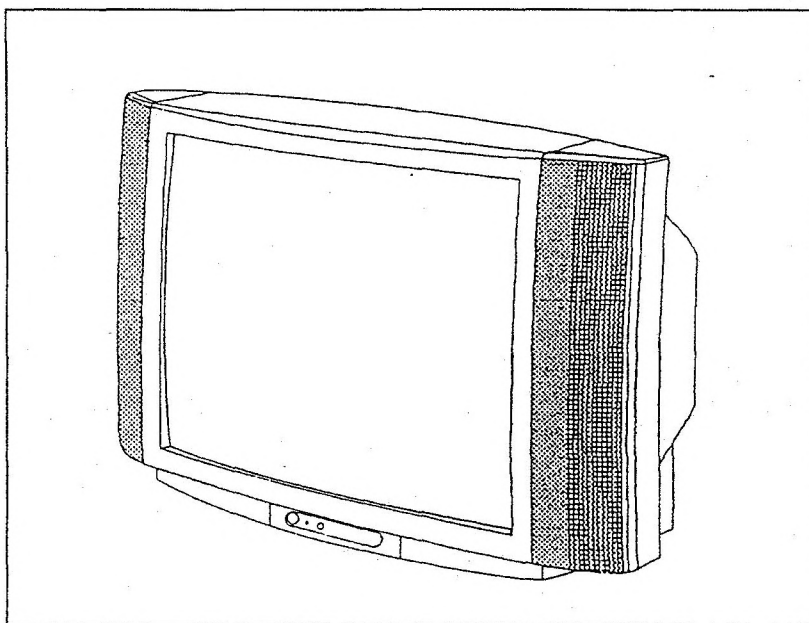

COLOR TELEVISION

SERVICE MANUAL

Cod. 931995430

765/325 - 765/368 - 765/384

GENERAL FEATURES

CHASSIS	- Series PC100 "cold" modular type electrically separated from mains
POWER SUPPLY	- 220V +/- 10%, 50/60Hz
MUSIC POWER	- 20 + 20 Watt 2 Loudspeakers 4 Ohm
EHT	- 29 KV
MAX BEAM CURRENT	- 1,4 mA
PICTURE TUBE	- 25" FLAT (765/368) 28" MP (765/384) 29" SUPERFLAT (765/325)
ANTENNA INPUT	- 75 Ohm DIN 45325-2
TUNER	- Varicap type with hyperband
TUNING SYSTEM	- Electronic frequency synthesis type and On-Screen-Display
PROGRAM PRESELECTION	- 90 storable programs
EXTERNAL IN/OUTPUTS	- Headphone Jack Audio/Video frontal input (cinch socket) 2 Peritelevision (SCART) connection type EN 50049 Cinch socket for audio output
RECEPTION STANDARD	- C.C.I.R. PAL B-G
TELETEXT	- 100PG, TOP, FLOF

SAFETY NOTE

- Do not accidentally touch that part of chassis supply not electrically separated from mains.
- Do not install, remove, or handle the picture tube unless shatter-proof goggles are worn and install, remove or handle only after having kept away people not so equipped
- Before returning a serviced receiver to the customer, the service technician must thoroughly test the unit to be certain that it is completely safe to operate without danger of electrical shock, and be sure that no protective device built into the set by the manufacturer has become defective or inadvertently defected during servicing.

Therefore following checks are recommended:


- Insulation.** Resistance should not be less than 2M Ohm at 500 V DC between the mains poles and any accessible metal parts.
- High voltage.** High voltage should not be kept higher than the rated value indicated on the receiver's back panel. Operating at higher voltage may cause failure of the picture tube or of high voltage supply.

Furthermore, in no case whatsoever must the electrical circuit providing the EHT be altered so as to prevent wrong voltage values from causing ionizing radiations above those allowed by International Standards.

ACCESS TO INTERNAL COMPONENTS


To remove the back panel:

- Unscrew **A** screws.
- Pull the bottom part of the back panel and remove it.

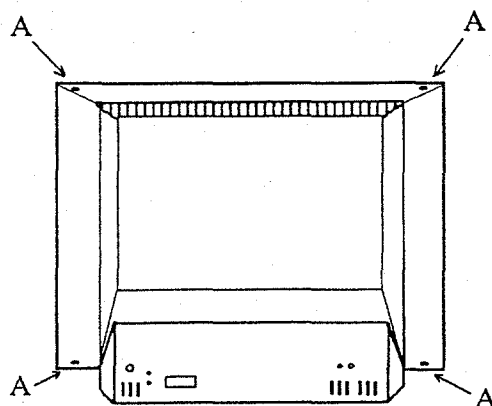

MAIN CHASSIS REMOVAL

- To remove the chassis press the tags **B** towards the hand sides of the cabinet and at the same time pull out the chassis.
- To insert the chassis plug it into the appropriate guides and press it till will be locked by the tags **B**.

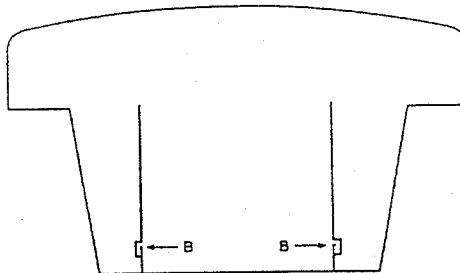

MAIN COMPONENTS

PC100- Multifunctional chassis including following functional units:

- a) Tuning circuit (ST9293)
- b) Vertical deflection (TDA8350)
- c) Horizontal deflection (TDA8143 - T301)
- d) Switch-mode power supply (TEA2261 - T401)
- e) 5V and 12V switching circuit (TDA8138A)
- f) Audio output circuit (TDA7262 - TDA2822M for headphone)
- g) Luminance and chrominance circuit (TDA8376)
- h) Video selector (TEA6415C)
- i) Audio selector (TEA6422)

PCBS plugged on chassis

FL2472/84	CATV RF unit p.c.b. (38,9 MHz video IF; 33,4 MHz audio IF)
PC101	IF module
PC102	Peritelevision (SCART 2) circuit
PC104	Teletext decoder
PC105	Comb Filter + CTI module (only 765/325)
PC108	CTI circuit (only 765/368 and 765/384)
PC175	Low power stand-by

PCBS plugged off chassis

CRT p.c.b. with video output stages

ICS used and relevant functions

<u>Schematic ref.</u>	<u>Type</u>	<u>P.c.B.</u>	<u>Electronic Functions</u>
CI 1	ST92T93	PC100	Tuning Microcomputer with On-Screen-Display
CI 2	ST24C08-B1	PC100	Non volatile memory
CI 3	MC34064P	PC100	Reset for μ P
CI 102	TDA4665	PC100	Delay line
CI 103	TDA8395	PC100	Secam decoder
CI 301	TDA8143	PC100	Horizontal output amplifier
CI 401	TEA2261	PC100	Switch-mode oscillator and control
CI 402	TDA8138A	PC100	5V and 12V stabilizer
CI 403	7808	PC100	8V stabilizer
CI 501	MC44131	PC100	Audio decoder
CI 502	TDA7262	PC100	L & R audio output amplifier
CI 503	TDA2822M	PC100	Audio amplifier for headphone
CI 601	TDA8350	PC100	Vertical output amplifier
CI 901	TEA6422	PC100	Audio selector
CI 902	TEA6415C	PC100	Video input selector
CI 903	TDA8376	PC100	Video decoder
CI 701	TEA5101A		RGB output amplifier
CI 1	TPU3040	PC104	Teletext decoder
CI 2	TC514100	PC104	RAM for teletext
CI 151	TDA4566	PC108	CTI
CI 200	TDA3857	PC101	Audio demodulator
CI 201	TDA8349A-4	PC101	Video demodulator
CI 631	TDA4566	PC105	CTI
CI 634	MC141625A	PC105	Comb filter
CI 635	MC44144D	PC105	Comb filter

Transistors used and relevant functions

<u>Schematic Ref.</u>	<u>Type</u>	<u>P.c.B.</u>	<u>Electronic functions</u>
T 1	BC848B	PC100	Horizontal pulse amplifier
T 2	BC848B	PC100	Vertical pulse amplifier
T 301	S2000AF	PC100	Horizontal output amplifier
T 401	MJF18008	PC100	Switch-mode transistor switch
T 501	BC858B	PC100	Audio amplifier
T 503	BC858B	PC100	Audio amplifier
T 504	BC848B	PC100	Muting audio
T 505	BC847B	PC100	Muting audio
T 701	BC558B		Red output amplifier
T 702	BC558B		Green output amplifier
T 703	BC558B		Blu output amplifier
T 901	BC858B	PC100	
T 902	BC858B	PC100	
T 903	BC848B	PC100	
T 904	BC848B	PC100	Emitter follower
T 905	BC635	PC100	Emitter follower
T 951	BC548B	PC102	Video amplifier
T 952	BC327/25	PC102	Video amplifier

ADJUSTMENT PROCEDURE FOR PC100 CHASSIS

Power Supply

Operating conditions: - Contrast and Brightness to minimum level (I beam = 0).

Operations: - Adjust P401 for $155\text{ V} \pm 0,5\text{ V}$ on TP7.

Video and Audio IF

Operating conditions: - Apply a intermediate frequency (IF) signal to the SAW filter and adjust L505 for the better video response on TP14.

Operations:


- Adjust L204 (5,5 MHz trap) for minimum 5,5 signal on TP14.
- Adjust L200 for minimum video signal on TP8.
- Adjust L202 (5,5 MHz) and L201 (5,74 MHz) for maximum output, respectively on TP4 and TP6.
- Adjust L501 (carrier wave at 54,7 kHz) for maximum signal on TP81.

Top AGC

Tune a band III channel with an 1 mV amplitude and adjust P200 for $8,5\text{V} \pm 0,2\text{V}$ on TP60.

SERVICE MODE

All adjustment related to geometry and video amplifier are carried out with remote control in "Service" mode. To enter "Service" mode switch-on the CTV set, push, at the same moment, V+/V- push buttons on the CTV front panel and the switch-off pushbutton of the remote control; on the screen will be displayed the register to be set and the relevant value. Selection of the function to be adjusted can be made with P+ and P- pushbuttons and adjustment can be made with Vol+ and Vol- pushbuttons. To memorise adjustments, push  button of remote control.



Geometry Adjustments

Operating conditions: - tune a channel with a test pattern signal and pre-adjust focusing and G2.

- Adjust colour saturation, contrast and brightness to obtain normal picture.
- Enter "Service mode" as already explained.

Operations: - Set-in the "Vertical Blanking" setting to 001 the of 000 SBL register.


- Adjust the blanking vertical position in the center of the screen adjusting value of register 001 VSH.
- Adjust "Vertical Slope" (003 VS) till the central line of the "circle" is visible for an half.
- *Get-out from "Service Blanking" setting the 000 SBL register to 000.*
- Adjust vertical amplitude (002 VA) and linearity (004 SC).
- Adjust parabola amplitude (006 PW) and "corner correction" (007 CP).
- Adjust "horizontal position" (009 HS), "horizontal amplitude" (005 EW) and "trapezoidal correction" (008 TC).
- Memorise adjustments pushing ☐ button of the remote control.

Video Amplifier Adjustments

Carry out following adjustments after deflections adjustments (geometry); set as to be switched-on for 15-20 min. before adjustments.

Operating conditions: - Set tuned on white/black picture and Contrast and brightness at minimum setting.

- Select the higher cut-off pulse on video vertical blanking (among TP53 - TP54 - TP55) and adjust it to 140V_{DC} with G2 potentiometer on EHT transformer.

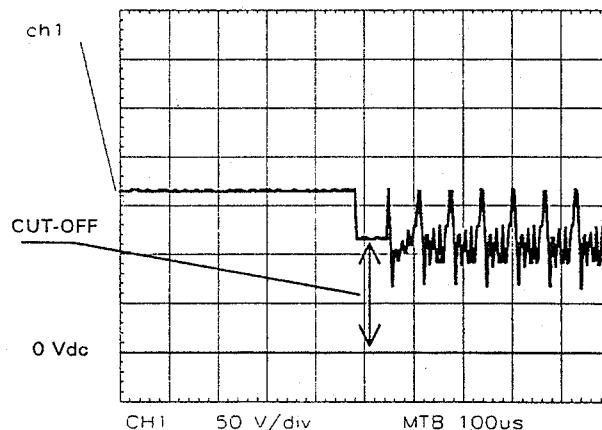

- Adjust Brightness and Contrast for a normal picture.
- Enter the "Service" mode and control that the value of the Red gain (011 WPR) reach 040.
- Adjust the Green gain (012 WPG) and Blue gain (013 WPB) till white reach desired tonality.
- Memorise adjustments pushing ☐ button of the remote control.

Focus Adjustment

Adjust focus voltage, adjusting related potentiometer of the EHT transformer, to obtain best focusing of picture on the entire screen.

SPARE PARTS LIST

MODELS:

a.	765/325	85506400x *
b.	765/368	85506240x *
c.	765/384	85506300x *

Ass'y	Code Number	Description	PK	a	b	c
PC100	805260000	Main chassis	09F	•		
PC100	805255000	Main chassis	09C		•	
PC100	805256000	Main chassis	09A			•
PC101	804803002	IF module	06P	•	•	•
PC102	804827004	"Scart 2" module	05B	•	•	•
PC104	804862104	Teletext Decoder	06T	•	•	•
PC105	805158002	CTI + Comb-filter module	07C	•		
PC108	804883000	CTI module	05R		•	•
PC175	805212000	Low power stand-by module	06P	•	•	•
ST5	792463000	Remote control	06F	•	•	•
	712141000	29" 108° Picture tube	09L	•		
	712156000	25" 110° Picture tube	09C		•	
	712111000	28" 110° Picture tube	09E			•
	804221000	Degaussing coil	05E	•		
	805143000	Degaussing coil	05C		•	
	805144000	Degaussing coil	05C			•
	732121000	4 ohm Loudspeaker	05H	•	•	•
	752012000	Battery 1,5v (2 pieces)	02M	•	•	•
	692071100	Supply cable	04S	•	•	•
	469140000	Owner's manual	03N	•	•	•

* Technical code of TV model findable on the back cover.
The last not significative number can be change.

Ref.	Code Number	Description	P. K.
	805260000	MAIN CHASSIS PC100	
PC101	804803002	IF MODULE	06P
PC102	804827004	SCART 2 BOARD	05B
PC104	804862104	TELETEXT DECODER	06T
PC105	805158002	CTI MODULE	07C
C-2-509-546	512175000	CEN'220U M 16V ->	01L
C-103-109	930073665	CEN'47U M 16V ->	01F
C-121-137-435-604	930073161	CEN'1U0 M 100V	01F
C-123-127-510-536-537-552-915	930071451	CEN'100U M 25V ->	01G
C-133-513-514-521-522-916-917	930073468	CEN'10U M 63V +>	01G
C-303	512278000	CEN'220U M 25V +>	01M
C-304	930074042	CFN'47N K 63V	01F
C-305	512275000	CRB 220U M I.R.16V 1050	01V
C-306-312	532156000	CPM 560N J 250VP225	02Z
C-307-322-710	930072109	CEN'2U2 M 250V +>	01P
C-309	532486000	CTS 12N J 2KV 22.5	02F
C-310	930073145	CTS 27N J 630V/1KV	02G
C-311	532375000	CTS 2N7 J 2KV P225	02L
C-321	930072962	CPM 680N K 250VP225	02U
C-401	930072229	CFS 470N M 275VCA	02Z
C-402	930073653	CMM 47N K 630V P15	01N
C-407	512308000	CEF 220U M 400V D25	05C
C-409-523-524-538-539-912	930074048	CFN'220N K 63V	01N
C-411	930073163	CEN'2U2 M 63V +>	01E
C-414	512305000	CEN'330U M 25V ->	01Z
C-415	532245000	CTS 1N5 J 1,5KV 15	02K
C-419	930072138	CCS 2N2 M 400/4KV	02M
C-421	930070834	CRA 100U M 250V1050	03Q
C-423-426-437	522647000	CCN'270P M 1KV 2B4	01L
C-424-601	930072983	CRB 1000U M 25V	02E
C-427	512214000	CRB 2200U M 16V	02K
C-429	512169000	CRB 2200U M 35V SUB.	03G
C-433-438-442	930073743	CEN'47U M 25V +>	01F
C-436	532446000	CTS 220P J 1KV6	02D
C-5-439-907	512115000	CEN'22U M 16V +>	01F
C-502-530	930073167	CEN'4U7 M 63V +>	01F
C-505	930073663	CEN'4U7 M 63V ->	01E
C-534	512243000	CRB 3300U M 35V T=5	03N
C-540-543	930073427	CRB 1000U M 35V	02H
C-544	512246000	CEN'470U M 16V ->	01S
C-545	930070824	CEN'220U M 16V +>	01L
C-602	512300000	CEN'100U M 63V ->	01Z

Ref.	Code Number	Description	P. K.
C-315-515-516-610	532276000	CFN'100N K 63V	01H
C-667	930072127	CFN'1UO K 50V	02K
C-704	512290000	CEN'22U M 16V ->	01E
C-706	930073506	CMM 100N K 250V P10	01Q
C-712	522625000	CAT 2N2 M 2KV	01P
C-713	930072241	CFN'4N7 K 63V	01H
C-714	532329000	CMM 22N K 250VP7,5	01M
C-715	930073833	CRA 10U T 250V	01Z
C-8-11-533-551	930073747	CEN'100U M 25V +>	01G
C-922-923-925-926	512276000	CEN'10U M 63V ->	01F
C417	512233000	CEN'47U M I.R.50V +>	02B
CH-1-301-902	930071276	BNA-10UH K	01Q
CH-302	930071316	BLI X DEF.1100	03R
CH-303	612699000	BPO 920UH 7%	04B
CH-404	612665000	BNA-2,2UH K	01P
CH-405	612680000	BCH 39UH K P=5	02D
CH-501	612479000	BNA-15UH K	01P
CH-601	612555000	BCH 15MH 15% E/W	03N
CH-901	930072106	BNA-22UH J	01N
CI-1	931590079	CI ST92T93J9B1 OTP DIP42	06U
CI-2	931590078	CI ST24C08-B1	04L
CI-3	592835000	CI MC34064P	03A
CI-102	592986000	CI TDA4665	04G
CI-103	592899000	CI TDA8395	04Z
CI-301	592783000	CI TDA8143	03S
CI-401	592679000	CI TEA2261	04B
CI-402	592834000	CI TDA8138A (HEPTAWATT)	03S
CI-403	592984000	CI 78M08CX 0.5A SOT82	02V
CI-501	592787000	CI MC44131	05M
CI-502	592788000	CI TDA7262	04L
CI-503	592644000	CI TDA2822M	03A
CI-601	592900000	CI TDA8350 SOT141BEC	04K
CI-701	592647000	CI TEA5101A	04B
CI-901	592985000	CI TEA6422	04H
CI-902	592792000	CI TEA6415C DIP20	04H
CI-903	592901000	CI TDA8376	06G
D-1-502-505	930074457	DSC-1N4148	01B
D-2-7-102-103-104-105-409-501-503-504-701-702-703	582243000	DCM.LL4148/F	01D
D-303-306-601-602	930074085	DSC-BA157 VR400 IF1/9A	01F
D-304	930070797	DRV BY228 VR1500IF5/10A	02L
D-305	582186000	DRV BYW95C VR600 IF3/70A	02G
D-401-402-403-404-704	930074478	DSR-1N4006 IF5M 50A	01E

Ref.	Code Number	Description	P. K.
D-411	582257000	DSR-1N4934	01K
D-412	582258000	DRV MUR4100E	03D
D-413	582179000	DRV-BYV95C VR600 I1,5/35A	01T
D-414-415	582219000	DRV-BYV27/100 I=2A	02F
D-416	582259000	DRV MUR415	02G
DL-1	582221000	DLD LED D=3 GREEN/RED	02G
DT-401	572328000	TDC=DTC143EK-146 SOT23	01N
DZ-401	582294000	DZE-ZPD3V0	01D
DZ-402	930070796	CI -ZTK33A 30-32V	02H
DZ-601	582293000	DZE-ZPY36	01G
F-401	652035000	FUSE 2A T 250V 5X20	01M
I-401	672098000	POWER SWITCH SH RB4A/120A-	03Z
CN1-CN4-CN9- CN33 (CN9-33 FOR PIP)	682615000	3 WAYS CONNECTOR	01K
CN34 -CN35	682586000	5 WAYS CONNECTOR P=2,5 MINI	01F
CN42-CN951	682692000	7 WAYS CONNECTOR P2 M V	01N
IR-1	792295100	INFRARED RECEIVER LTM-9034A	04E
TS1	672115000	FRONT TACT SWITCH (KEYBOARD)	03R
CN28 CN29	682438000	8 WAYS CONNECTOR P=2,5 WH8D-1	01L
CN43	682613000	5 WAYS CONNECTOR	01L
L-501	612618000	BSC 54,7KHZ 7X7 DM9006SC	02N
P-401	552281000	PTO 470R J 0,1W P5	01Z
FOR F-401	930076491	POR 6,3A 250V P=22,5	01H
FOR DL-1	483147100	LED SUPPORT	01K
PO-401	543138000	PTC 260VRMS I.MIN.>6A	03M
PR-3	682766000	HEADPHONE AU/VI 3V H6,5 RCA	03R
PR-4	682765000	SOCKET S-VHS 4 WAYS	04B
PR-6	682675000	SOCKET CHINC HI-FI	03G
PR1	682502000	PRJ STEREO DI3.5MM	03P
PS-1	930702205	SCART SOCKET .EN50049	02N
Q-1	792297000	8MHZ QUARTZ HC49/U (20PF)	03C
Q-101	792451000	3579,545KHZ HC49/U	03N
Q-102	792452000	4433,619KHZ QUARTZ HC49/U	03N
Q-501	792255000	437KHZ FILTER CSB437	02T
Q-632	792213000	17734.47KHZ QUARTZ P5 T=5	03H
R-30-31-101- 105-108-109- 429-515-602	930070342	RFU-4R7 J 0,3W	01K
R-301	544263000	RSM-R1 J 1W	01K
R-304	542929000	RPM 27R J 2W	01H
R-305	544243000	RSM-10R J 1W	01G
R-307	544230000	RPA 4R7 J 5WP15H15	02Q
R-308	544231000	RPA 6K8 J 5WP15H15	02S
R-309	930071145	RFU 1K5 J 1W	01U
R-317	543131000	RFU-8R2 J 0,5W	01Q
R-318-406- 416-421-726	930070121	RFU-R10 K 0,4W	01N

Ref.	Code Number	Description	P. K.
R-401	543915000	RFA 4R7 K 4W	02M
R-403	544450000	RPM-6R8 J 2W	01M
R-408-321	544445000	RSC-4R7 J 1W	01N
R-409	544462000	RPA 1K0 J 10W T=25	03B
R-412	544302000	RSM R22 J 2W	01T
R-413	930071086	RAI 10M J 1W	02C
R-414	542468000	RPM 150R J 2W	01H
R-415	930070416	RPM 27K J 2W	01E
R-419-707- 709-711	543721000	RPM 39K G 2W	01M
R-424	543089000	RPM 270K J 2W	01M
R-425	544225000	RPM 15R J 2W	01L
R-428	544184000	RSM-22R J 1W	01H
R-541-728-602	543061000	RFU-10R J 0,3W	01K
R-601	543879000	RPM R47 K 2W	01U
R-613	930071242	RPM-10R J 2W	01S
R-732	542370000	RFU-100R J 0,3W	01T
CN19	682151000	3 WAYS CONNECTOR P5 M	01H
CN23	682614000	2 WAYS CONNECTOR P2 M	01H
CN31	682678000	2 WAYS CONNECTOR P7,62M V	02H
CN37	682688000	2 WAYS CONNECTOR P2,5M L.V	01L
CN39	682689000	4 WAYS CONNECTOR P2,5M V	01M
CN8	682153000	4 WAYS CONNECTOR P5 M V	01K
T-1-2-504- 903-904	572282000	TNC BC848/B NPN 1K	01G
T-301	572280000	TR S2000AF	04D
T-401	572312000	TR MJF18008 NPN	04A
T-501-503- 901-902	572294000	TNC BC858B PNP 3K	01F
T-701-702-703	930071230	TRN'BC558B PNP EM.>	01D
T-905	572239000	TRN'BC635 NPN BA.>	01M
T-505	572264000	TNC=BC847B NPN 1F	01E
TR-301	632095000	EHT TRANSFORMER	06L
TR-401	612648000	BFR 2X28MH +/-30%T	04D
TR-402	622155000	SWITCH MODE	05G
TRC1	682598200	CRT SOCKET (B10-277)	03Q
TUNER	882239000	TUNER UNIT	06Q
FOR CI.-2	930701036	8 PIN CI SOCKET P2.54	01K
TOTAL ASSY	805255000	TE. TESI +CTI TSL. PC100	
	882239000	TUNER UNIT	06Q
PC101	804803002	IF BOARD	06P
PC102	804827004	SCART 2 BOARD	05B
PC104	804862104	TELETEXT DECODER	06T
PC108	804883000	VIDEO CTI FOR TESI	05R
C-103-109	930073665	CEN'47U M 16V ->	01F
C-121-137- 435-604	930073161	CEN'1U0 M 100V +>	01G

Ref.	Code Number	Description	P. K.
C-123-127- 510-536-537- 552-601-915	930071451	CEN'100U M 25V ->	01G
C-133-513- 514-521-522- 916-917	930073468	CEN'10U M 63V +>	01G
C-2-509-545- 546	512175000	CEN'220U M 16V	01L
C-303	512278000	CEN'220U M 25V +>	01M
C-304	930074042	CFN'47N K 63V	01F
C-305	512275000	CRB 220U M I.R.16V 1050	01V
C-306-321	532127000	CPM 470N J 250VP225	02S
C-307-322-710	930072109	CEN'2U2 M 250V	01P
C-309	532421000	CTS 11N2 J 2KV 22.5	02S
C-310	532383000	CTS 22N J 1KV P225	02R
C-312	930072962	CPM 680N K 250VP225	02U
C-401	930072229	CFS 470N M 275VCA	02Z
C-402	930073653	CMM 47N K 630V P15	01N
C-407	512307000	CEF 150U M 400V D25	04K
C-409-523- 524-538-539- 912	930074048	CFN'220N K 63V	01N
C-411	930073163	CEN'2U2 M 63V +>	01E
C-414	512305000	CEN'330U M 25V ->	01Z
C-415	532245000	CTS 1N5 J 1,5KV 15	02K
C-419	930072138	CCS 2N2 M 400/4KV	02M
C-421	930070834	CRA 100U M 250V1050	03Q
C-423-426-437	522647000	CCN'270P M 1KV 2B4	01L
C-424	930072983	CRB 1000U M 25V	02E
C-427	512214000	CRB 2200U M 16V	02K
C-429	512169000	CRB 2200U M 35V SUB.	03G
C-433-438-442	930073743	CEN'47U M 25V +>	01F
C-436	532446000	CTS 220P J 1KV6	02D
C-5-439-907- 704	512115000	CEN'22U M 16V +>	01F
C-502-505-530	930073663	CEN'4U7 M 63V ->	01F
C-534	512243000	CRB 3300U M 35V T=5	03N
C-540-543	930073427	CRB 1000U M 35V	02H
C-544	512246000	CEN'470U M 16V ->	01S
C-602	512300000	CEN'100U M 63V ->	01Z
C-315-515- 516-610	532276000	CFN'100N K 63V	01H
C-706	930073506	CMM 100N K 250V P10	01Q
C-712	522625000	CAT 2N2 M 2KV	01P
C-713	930072241	CFN'4N7 K 63V	01H
C-714	532329000	CMM 22N K 250VP7,5	01M
C-715	930073833	CRA 10U T 250V	01Z
C-8-11-533- 551	930073747	CEN'100U M 25V +>	01G
C-922-923- 925-926	512276000	CEN'10U M 63V ->	01F
C417	512233000	CEN'47U M I.R.50V +>	02B

Ref.	Code Number	Description	P.K.
CH-1-301-902	930071276	BNA-10UH K	01Q
CH-302	612656000	BLI X DEF.1100 704237/90	03S
CH-303	612527000	BPO 1,6 MH 7%	03T
CH-404	612665000	BNA-2,2UH K	01P
CH-405	612680000	BCH 39UH K P=5	02D
CH-501	612479000	BNA-15UH K	01P
CH-601	612555000	BCH 15MH 15% E/W	03N
CI-1	931590079	CI ST92T93J9B1 OTP DIP42	06U
CI-2	931590078	CI ST24C08-B1	04L
CI-3	592835000	CI MC34064P	03A
CI-102	592986000	CI TDA4665	04G
CI-103	592899000	CI TDA8395	04Z
CI-301	592783000	CI TDA8143	03S
CI-401	592679000	CI TEA2261	04B
CI-402	592834000	CI TDA8138A (HEPTAWATT)	03S
CI-403	592984000	CI 78M08CX 0.5A SOT82	02V
CI-501	592788000	CI TDA7262	04L
CI-502	592787000	CI MC44131	05M
CI-503	592644000	CI TDA2822M	03A
CI-601	592900000	CI TDA8350 SOT141BEC	04K
CI-701	592647000	CI TEA5101A	04B
CI-901	592985000	CI TEA6422	04H
CI-902	592792000	CI TEA6415C DIP20	04H
CI-903	592901000	CI TDA8376	06G
CN1-CN4-CN9-CN33	682615000	3 WAYS CONNECTOR P2 M V	01K
D-1-502-505	930074457	DSC-1N4148	01B
D-2-102-103-104-105-409-501-503-504-701-702-703	582243000	DCM.LL4148/F IN REEL	01D
D-303-306-601-602	930074085	DSC-BA157 VR400 IF1/9A	01F
D-304	930070797	DRV BY228 VR1500IF5/10A	02L
D-305	582186000	DRV BYW95C VR600 IF3/70A	02G
D-401-402-403-404-704	930074478	DSR-1N4006 IFSM 50A	01E
D-411	582257000	DSR-1N4934	01K
D-412	582258000	DRV MUR4100E	03D
D-413	582179000	DRV-BYV95C VR600 I1,5/35A	01T
D-414-415	582219000	DRV-BYV27/100 I=2A	02F
D-416	582259000	DRV MUR415	02G
DL-1	582221000	DLD LED D=3 GREEN/RED	02G
DT-401	572328000	TDC=DTC143EK-146 SOT23	01N
DZ-401	582294000	DZE-ZPD3V0	01D
DZ-402	930070796	CI -ZTK33A 30-32V	02H
DZ-601	582289000	DZE-ZPY33	01G
F-401	652035000	FUSE 2A T 250V 5X20	01M
I-401	672098000	POWER SWITCH RB4A/120A-250VAC	03Z

Ref.	Code Number	Description	P. K.
CN34 CN35	682586000	5 WAYS CONNECTOR P=2,5 MINI	01F
CN42	682692000	7 WAYS CONNECTOR P2 M V	01N
IR-1	792295100	INFRARED RECEIVER LTM-9034A	04E
TS1	672115000	FRONT TACT SWITCH (KEIBOARD)	03R
CN28 CN29	682438000	8 WAYS CONNECTOR P=2,5 WH8D-1	01L
CN43	682613000	5 WAYS CONNECTOR P2 M V	01L
L-200	612697000	BSE 38,9M 7X7 DSG-3004	02M
L-201-202	612696000	BSE 5,62M 7X7 DSG-3005	02K
L-204	612669000	BSE 7X7 5,5MHZ TRAPP.	02N
L-205	612668000	BSE 7X7 38,9MHZ	02P
L-429	930072106	BNA-22UH J	01N
L-501	612618000	BSC 54,7KHZ 7X7 DM9006SC	02N
P-200	552245000	PTO 4K7 M 0,1W V	01Z
P-401	552281000	PTO 470R J 0,1W P5	01Z
FOR F-401	930076491	POR 6,3A 250V P=22,5	01H
FOR DL-1	483147100	LED SUPPORT	01K
PO-401	543138000	PTC 260VRMS I.MIN.>6A	03M
PR-6	682675000	CINCH SOCKET HI-FI	03G
PR-1	682502000	JACK SOCKET STEREO DI3.5MM	03P
PR-3	682766000	JACK SOCKET AU/VI 3V H6,5 RCA	03R
PR4	682765000	SOCKET S-VHS 4VIE	04B
PS-1	930702205	SCART SOCKET EN50049	02N
Q-1	792297000	8MHZ QUARTZ HC49/U (20PF)	03C
Q-101	792451000	3579,545KHZ QUARTZ HC49/U	03N
Q-102	792452000	4433,619KHZ QUARTZ HC49/U	03N
Q-501	792255000	437KHZ FILTER CSB437	02T
R-30-31-101- 105-108-109- 515-541-901A	930070342	RFU-4R7 J 0,3W	01K
R-301	544263000	RSM-R1 J 1W	01K
R-304	542929000	RPM 27R J 2W	01H
R-305	544243000	RSM-10R J 1W	01G
R-307	544230000	RPA 4R7 J 5WP15H15	02Q
R-308	544231000	RPA 6K8 J 5WP15H15	02S
R-309	930071145	RFU 1K5 J 1W	01U
R-317	543131000	RFU-8R2 J 0,5W	01Q
R-318	544222000	RSM-1R5 J 1W	01P
R-401	543915000	RFA 4R7 K 4W	02M
R-403	544450000	RPM-6R8 J 2W	01M
R-406-416-613	930070121	RFU-R10 K 0,4W	01N
R-408 R-321	544445000	RSC-4R7 J 1W	02C
R-409	544462000	RPA 1K0 J 10W T=25	03B
R-412	544302000	RSM R22 J 2W	01T
R-413	930071086	RAI 10M J 1W	02C
R-414	542468000	RPM 150R J 2W	01H
R-415	930070416	RPM 27K J 2W	01E

Ref.	Code Number	Description	P. K.
R-419-707- 709-711	543721000	RPM 39K G 2W	01M
R-424	543089000	RPM 270K J 2W	01M
R-425	544225000	RPM 15R J 2W	01L
R-428	544184000	RSM-22R J 1W	01H
R-601	543879000	RPM R47 K 2W	01U
R-602-728	543061000	RFU-10R J 0,3W	01K
R-726	542307000	RFU-1R0 J 0,4W	01N
R-732	542370000	RFU-100R J 0,3W	01T
R-902A	543644000	RFU-15R J 0,3W	01K
REF. CN27	682728000	20 WAYS CONNECTOR P2.5M H	02P
REF. CN5	682690000	9 WAYS CONNECTOR P2 M V	01P
CN 19	682151000	3 WAYS CONNECTOR P5 M V	01H
CN23	682614000	2 WAYS CONNECTOR P2 M V	01H
CN31	682678000	2 WAYS CONNECTOR P7,62M V	02H
CN37	682688000	2 WAYS CONNECTOR P2,5M L.V	01L
CN39	682689000	4 WAYS CONNECTOR CP2,5M V	01M
CN8	682153000	RIT-CS 4 WAYS CONNECTOR P5 M V	01K
T-1-2-504- 903-904	572282000	TNC=BC848/B NPN 1K	01G
T-301	572280000	TR S2000AF	04D
T-401	572312000	TR MJF18008 NPN	04A
T-501-503- 901-902	572294000	TNC=BC858B PNP 3K	01F
T-701-702-703	930071230	TRN'BC558B PNP EM.>	01D
T-905	572239000	TRN'BC635 NPN BA.>	01M
T-505	572264000	TNC=BC847B NPN 1F	01E
TR-301	632078100	EHT TRANSFORMER	06E
TR-401	612648000	BFR 2X28MH +/-30%	04D
TR-402	622137000	SWITCH MODE TRANSFORMER	05F
TRC-1	682598200	CRT SOCKET (B10-277)	03Q
FOR CI-2	930701036	8 PIN CI SOCKET P2.54	01K
TOTAL ASSY	805256000	TE. TESI 29KV + CTI PC100	
	882239000	TUNER UNIT	06P
PC101	804803002	IF MODULE	06P
PC102	804827004	SCART 2 BOARD	05B
PC104	804862104	TELETEXT DECODER	06T
PC108	804883000	CTI MODULE	05R
C-103-109	930073665	CEN'47U M 16V ->	01F
C-121-137- 435-604	930070828	CEN'1U0 M 100V	01E
C-123-127- 215-510-536- 537-552-915	930071451	CEN'100U M 25V ->	01G
C-133-513- 514-521-522- 916-917-204	930073468	CEN'10U M 63V +>	01G
C-2-509-545- 546	512175000	CEN'220U M 16V ->	01L
C-303	512278000	CEN'220U M 25V +>	01M


Ref.	Code Number	Description	P. K.
C-304	930074042	CFN' 47N K 63V	01F
C-305	512275000	CRB 220U M I.R. 16V 1050	01V
C-306-312	532156000	CPM 560N J 250VP225	02Z
C-307-710	512286000	CEN' 2U2 M 250V ->	01S
C-309	532421000	CTS 11N2 J 2KV 22.5	02S
C-310	930073145	CTS 27N J 630V/1KV	02G
C-311	532255000	CTS 1N5 J 2KV P225	02R
C-321	930072962	CPM 680N K 250VP225	02U
C-322	930072109	CEN' 2U2 M 250V +>	01P
C-401	930072229	CFS 470N M 275VCA	02Z
C-402	930073653	CMM 47N K 630V P15	01N
C-407	512308000	CEF 220U M 400V D25	05C
C-409-523- 524-538-539- 912	930074048	CFN' 220N K 63V	01N
C-411	930073163	CEN' 2U2 M 63V +>	01E
C-414	512305000	CEN' 330U M 25V ->	01Z
C-415	532245000	CTS 1N5 J 1,5KV 15	02K
C-419	930072138	CCS 2N2 M 400/4KV	02M
C-421	930070834	CRA 100U M 250V1050	03Q
C-423-426-437	522647000	CCN' 270P M 1KV 2B4	01L
C-424-601	930072983	CRB 1000U M 25V	02E
C-427	512214000	CRB 2200U M 16V	02K
C-429	512169000	CRB 2200U M 35V SUB.	03G
C-433-438-442	930073743	CEN' 47U M 25V +>	01F
C-436	532446000	CTS 220P J 1KV6	02D
C-5-439-907	512115000	CEN' 22U M 16V +>	01F
C-502-505-530	930073167	CEN' 4U7 M 63V	01F
C-534	512243000	CRB 3300U M 35V T=5	03N
C-540-543	930073427	CRB 1000U M 35V	02H
C-544	512246000	CEN' 470U M 16V ->	01S
C-602	512300000	CEN' 100U M 63V ->	01Z
C-610	532276000	CFN' 100N K 63V	01H
C-315-515-516			
C-704	512290000	CEN' 22U M 16V ->	01E
C-706	930073506	CMM 100N K 250V P10	01Q
C-712	522625000	CAT 2N2 M 2KV	01P
C-713	930072241	CFN' 4N7 K 63V	01H
C-714	532329000	CMM 22N K 250VP7,5	01M
C-715	930073833	CRA 10U T 250V	01Z
C-8-11-533- 551	930073747	CEN' 100U M 25V +>	01G
C-922-923- 925-926	512276000	CEN' 10U M 63V ->	01F
C417	512233000	CEN' 47U M I.R. 50V +>	02B
CH-1-301-902	930071276	BNA-10UH K	01Q
CH-951	612676000	BMM.10UH K MINIMELF	02G
CH-302	930071316	BLI FOR DEF.110° FISSA	03R
CH-303	612658000	BPO 1 MH 7%	04M

Ref.	Code Number	Description	P. K.
CH-404	612665000	BNA-2,2UH K	01P
CH-405	612680000	BCH 39UH K P=5	02D
CH-501	612479000	BNA-15UH K	01P
CH-601	612555000	BCH 15MH 15% E/W	03N
CI-1	931590079	CI ST92T93J9B1 OTP DIP42	06U
CI-2	931590078	CI ST24C08-B1	04L
CI-3	592835000	CI MC34064P	03A
CI-102	592986000	CI TDA4665	04G
CI-103	592899000	CI TDA8395	04Z
CI-301	592783000	CI TDA8143	03S
CI-401	592679000	CI TEA2261	04B
CI-402	592834000	CI TDA8138A (HEPTAWATT)	03S
CI-403	592984000	CI 78M08CX 0.5A SOT82	02V
CI-501	592787000	CI MC44131	05M
CI-502	592788000	CI TDA7262	04L
CI-503	592644000	CI TDA2822M	03A
CI-601	592900000	CI TDA8350 SOT141BEC	04K
CI-701	592647000	CI TEA5101A	04B
CI-901	592985000	CI TEA6422	04H
CI-902	592792000	CI TEA6415C DIP20	04H
CI-903	592901000	CI TDA8376	06G
CN1-CN4-CN9-CN33	682615000	3 WAYS CONNECTOR P2 M V	01K
D-1-502-505	930074457	DSC-1N4148	01B
D-2-102-103-104-105-409-501-503-504-701-702-703	582243000	DCM.LL4148/F IN REEL	01D
D-303-306-601-602	930074085	DSC-BA157 VR400 IF1/9A	01F
D-304	930070797	DRV BY228 VR1500IF5/10A	02L
D-305	582186000	DRV BYW95C VR600 IF3/70A	02G
D-401-402-403-404-704	930074478	DSR-1N4006 IFSM 50A	01E
D-411	582257000	DSR-1N4934	01K
D-412	582258000	DRV MUR4100E	03D
D-413	582179000	DRV-BYV95C VR600 I1,5/35A	01T
D-414-415	582219000	DRV-BYV27/100 I=2A	02F
D-416	582259000	DRV MUR415	02G
DL-1	582221000	LED D=3 GREEN/RED	02G
DT-401	572328000	TDC=DTC143EK-146 SOT23	01N
DZ-401	582294000	DZE-ZPD3VO	01D
DZ-402	930070796	CI -ZTK33A 30-32V	02H
DZ-601	582289000	DZE-ZPY33	01G
F-401	652035000	FUSE 2A T 250V 5X20	01M
FC-200	792428000	FI.OA. QPT OFWG3264	04V
FC-201	930072117	RI 5,74 FILTER M. SFT/MA	03N
FC-202	930702202	RI 5,5 FILTER M. SFT/MA	03L
I-401	672098000	POWER SWITCH RB4A/120A-250VAC	03Z


Ref.	Code Number	Description	P.K.
IR-1	792295100	INFRARED RECEIVE LTM-9034A-	04E
TS1	672115000	FRONT TACT SWITCH (KEYBOARD)	03R
L-429	930072106	BNA-22UH J	01N
L-501	612618000	BSC 54,7KHZ 7X7 DM9006SC	02N
P-401	552281000	PTO 470R J 0,1W P5	01Z
FOR F-401	930076491	POR 6,3A 250V P=22,5	01H
FOR DL-1	483147100	LED SUPPORT	01K
PO-401	543138000	PTC 260VRMS I.MIN.>6A	03M
PR-1	682502000	PRJ STEREO DI3.5MM	03P
PR-3	682766000	JACK SOCKET STEREO AU/VI	03R
PR-4	682765000	SOCKET S-VHS 4 WAYS	04B
PR-6	682675000	CINCH SOCKET HI-FI	03G
PS-1	930702205	SCART SOCKET EN50049	02N
Q-1	792297000	8MHZ QUARTZ HC49/U (20PF)	03C
Q-101	792451000	3579,545KHZ QUARTZ HC49/U	03N
Q-102	792452000	4433,619KHZ QUARTZ HC49/U	03N
Q-501	792255000	FILTER.CER.437KHZ CSB437	02T
R-30-31-101- 105-108-109- 515-541-901A	930070342	RFU-4R7 J 0,3W	01K
R-301	544263000	RSM-R1 J 1W	01K
R-304	542929000	RPM 27R J 2W	01H
R-305	544243000	RSM-10R J 1W	01G
R-307	544230000	RPA 4R7 J 5WP15H15	02Q
R-308	544231000	RPA 6K8 J 5WP15H15	02S
R-309	930071145	RFU 1K5 J 1W	01U
R-317	543131000	RFU-8R2 J 0,5W	01Q
R-318	542938000	RPM R82 K 2W	01U
R-401	543915000	RFA 4R7 K 4W	02M
R-403	544450000	RPM-6R8 J 2W	01M
R-406-416- 613-726	930070121	RFU-R10 K 0,4W	01N
R-321-408	544445000	RSC-4R7 J 1W	01N
R-409	5444462000	RPA 1K0 J 10W T=25	03B
R-412	544302000	RSM R22 J 2W	01T
R-413	930071086	RAI 10M J 1W	02C
R-414	542468000	RPM 150R J 2W	01H
R-415	930070416	RPM 27K J 2W	01E
R-419-707- 709-711	543721000	RPM 39K G 2W	01M
R-424	543089000	RPM 270K J 2W	01M
R-425	544225000	RPM 15R J 2W	01L
R-428	544184000	RSM-22R J 1W	01H
R-601	544493000	RPM 1R2 J 1W	01L
R-602-728	543061000	RFU-10R J 0,3W	01K
R-608-609	930070104	RSM-2R2 G 0,4W	01B
R-732	542370000	RFU-100R J 0,3W	01T
R-902A	543644000	RFU-15R J 0,3W	01K

Ref.	Code Number	Description	P. K.
REF.CN19	682151000	3 WAYS CONNECTOR P5 M	01H
REF.CN23	682614000	2 WAIS CONNECTOR P2 M	01H
REF.CN31	682678000	2 WAYS CONNECTOR P7,62M	02H
REF.CN37	682688000	2 WAYS CONNECTOR P2,5M	01L
REF.CN39	682689000	4 WAYS CONNECTOR P2,5M	01M
REF.CN8	682153000	4 WAYS CONNECTOR P5 M	01K
T-1-2-504- 903-904	572282000	TNC=BC848/B NPN 1K	01G
T-301	572280000	TR S2000AF	04D
T-401	572312000	TR MJF18008 NPN	04A
T-501-503- 901-902	572294000	TNC=BC858B PNP 3K	01F
T-701-702-703	930071230	TRN'BC558B PNP EM.>	01D
T-905	572239000	TRN'BC635 NPN BA.>	01M
T-505	572264000	TNC=BC847B NPN 1F	01E
TR-301	632089000	EHT TRANSFORMER	06H
TR-401	612648000	BFR 2X28MH +/-30	04D
TR-402	622155000	SWITCH MODE TRANSFORMER	05G
TRC-1	682598200	SRT SOCKET TIPO (B10-277)	03Q
FOR CI.-2	930701036	SOCKET IC 8P P2.54 I7.62	01K
TOTAL ASSY	805212000	STPD POWER STAND BY PC.175	
C-1	930072506	CRB 470U M 25V	01T
C-2-C3	532343000	CFN'100N J 63V	01H
C-4	532432000	CFS 680N M 275VCA	03R
C-6-7	930073747	CEN'100U M 25V +>	01G
C-8-9-10-11	930073251	CCN'1N0 K 50V 2B4	01D
R-1	543626000	RPM 4R7 J 4W	02R
R-6	544495000	VDR'SIOV-S05K300 300V	03A
T-1	930071228	TRN'BC548B NPN CO.>	01F
T-2	930074346	TRN'BC337/25 NPN CO.>	01H
TY-1	572306000	TY BTA12-700SW	03V
D3-4-5-6	930074478	DSR-1N4006 IFSM 50A	01E
DZ-1	582148000	DZE-ZPY15	01L
D-1-2	930070990	DSR-1N4007 IFSM 50A	01G
CI-1	592451000	CI 78L05ACP	03B
TR-1	622158000	TRANSFORMER 220/8V 0,5W	04Z
CN-1	682153000	4 WAYS CONNECTOR P5 M V	01K
CN-2	682615000	3 WAYS CONNECTOR P2 M V	01K
OP-1	792205000	PHOTO COUPLER CNY64	04H
	483542000	HEXAGONAL NUT M3	01R
	483543000	SCREW M3X16	01N
	483544000	SPREADER L=6,4 D.I.3,7 NY	01E
TOTAL ASSY	804803002	IF MODULE FOR TESI PC101	
C-202-203-209	930073163	CEN'2U2 M 63V	01E
C-204	930073468	CEN'10U M 63V +>	01G


765/325 - 765/368 - 765/384

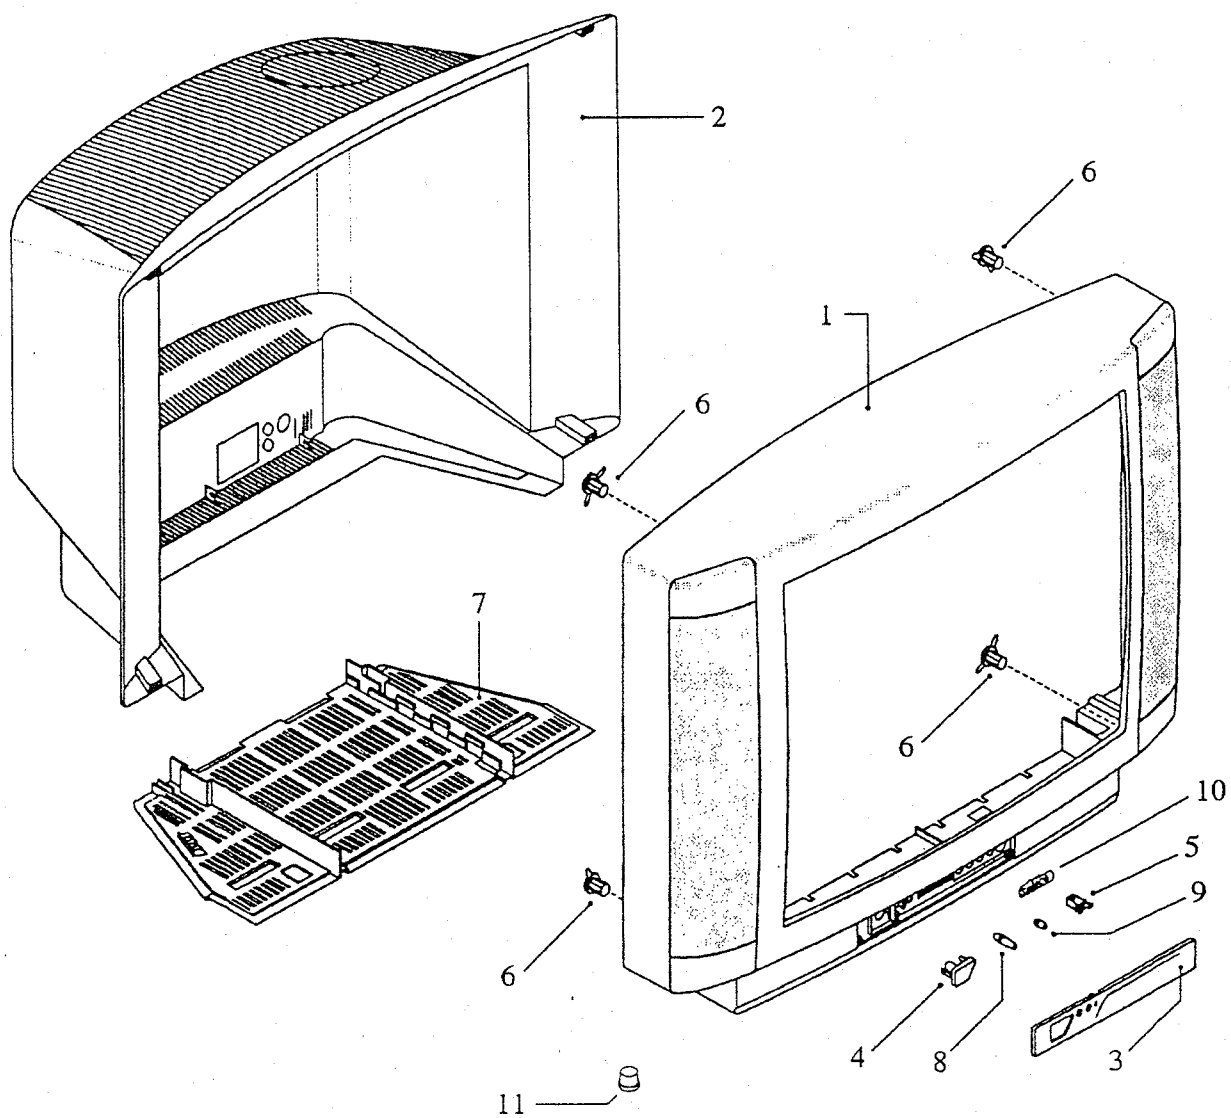


WAVE FORMS PC100

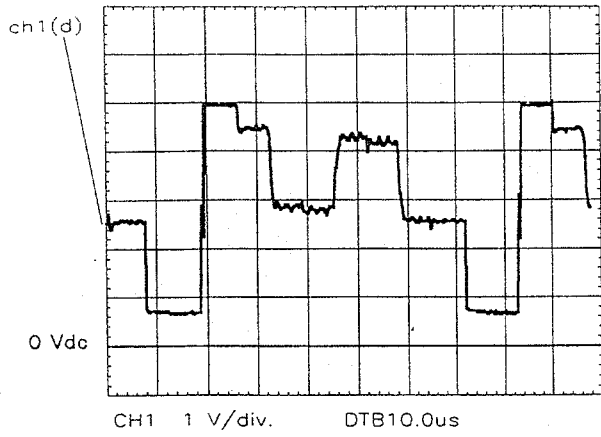


TP50

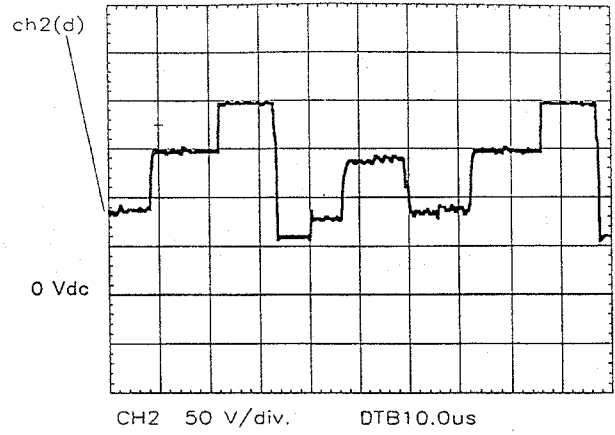


TP53

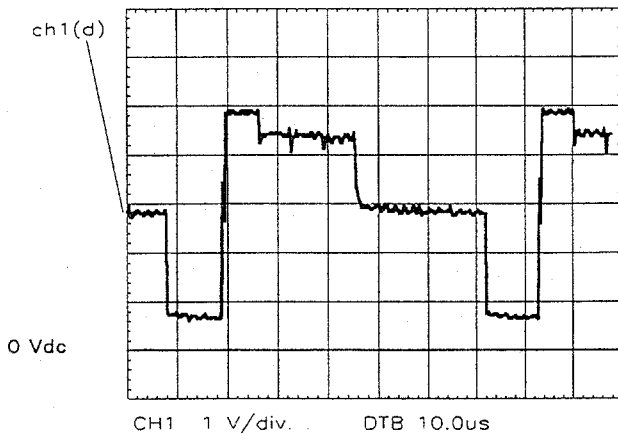


TP51

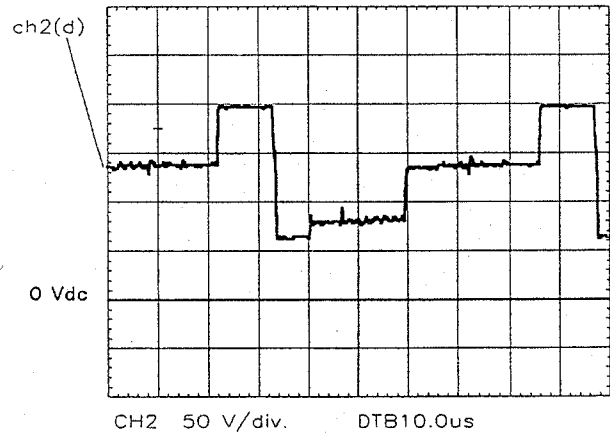


TP54

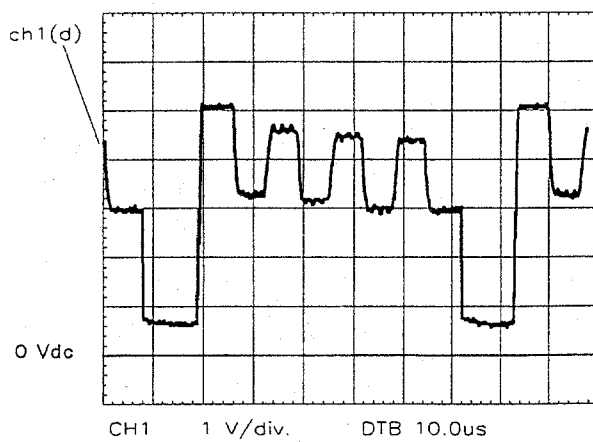


TP52

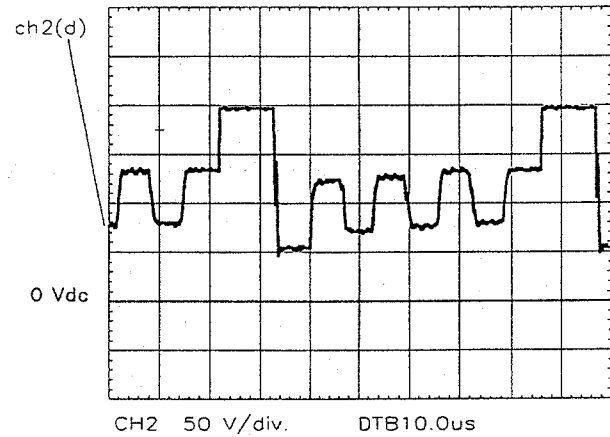


TP55

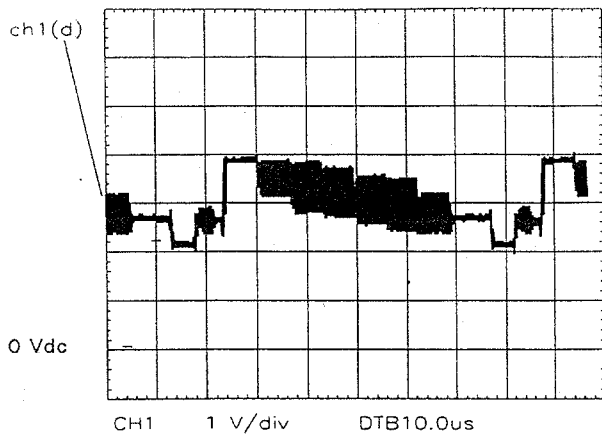


TP64

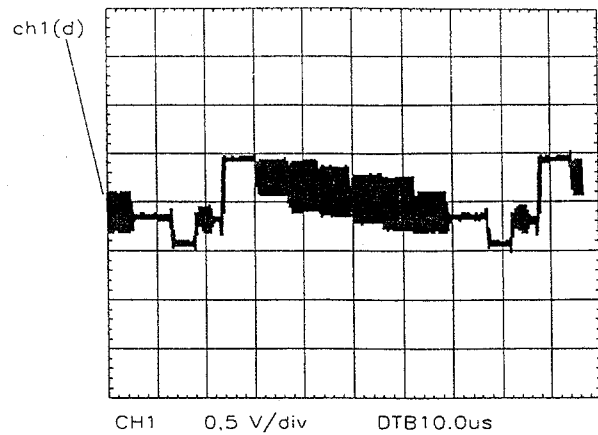


Pin 7 IC903 with signal video from Tuner

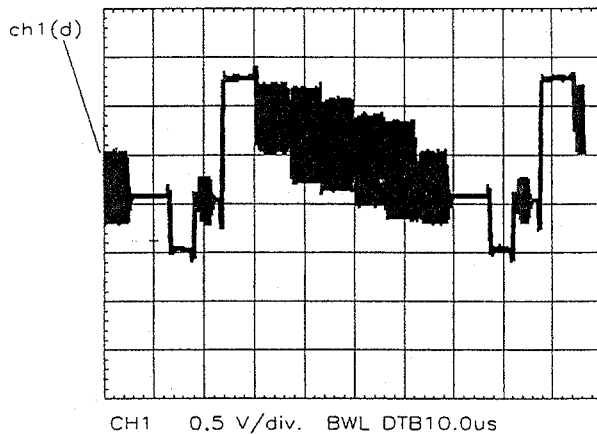


TP64 (AC)

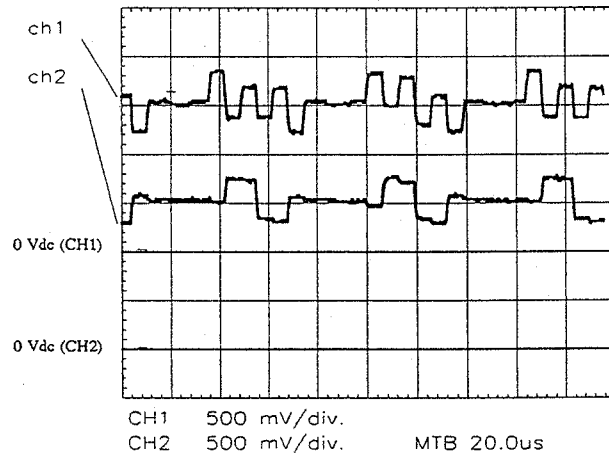


CH1 Pin 29 CI903 (B-Y)
CH2 Pin 30 CI903 (R-Y)

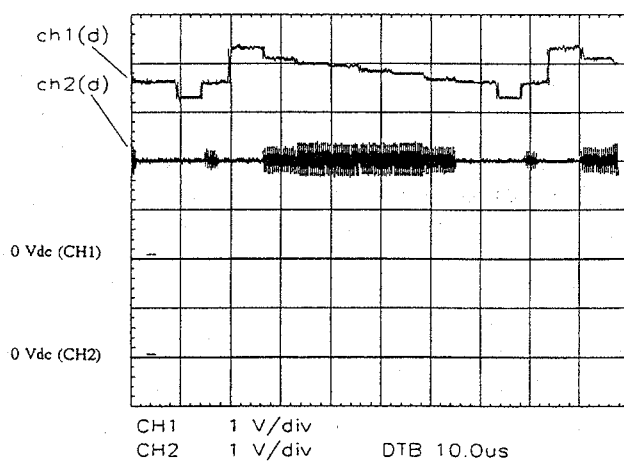


CH1 Pin 7 CI903
CH2 Pin 6 CI903 (with signal input SVHS)

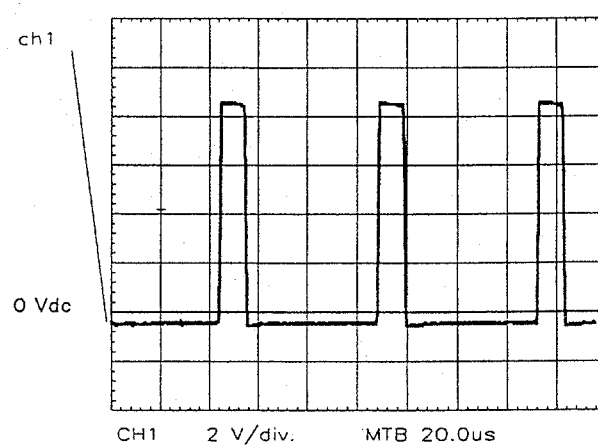


Pin 41 IC903 (Flyback)

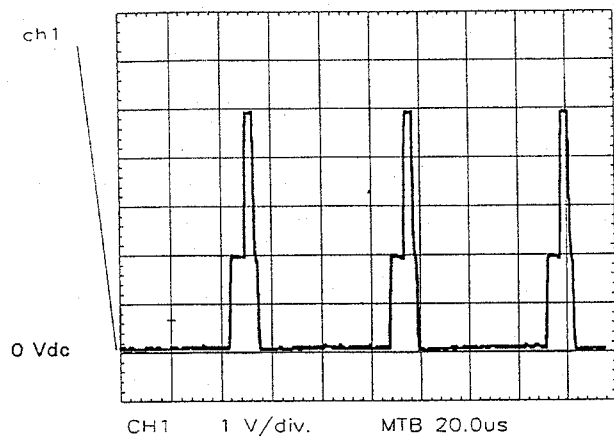


Pin 39 IC903 (Super-sandcastle)

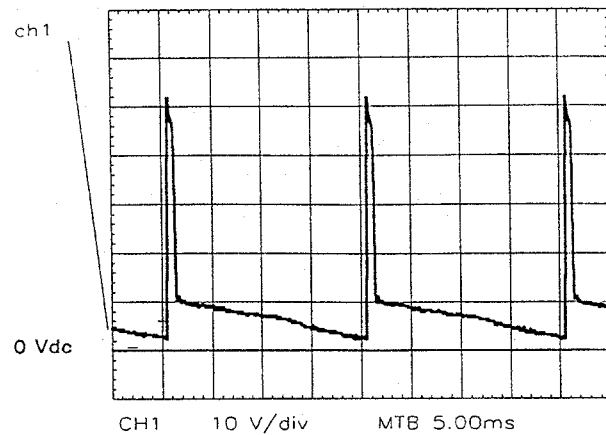


Pin 9 IC601

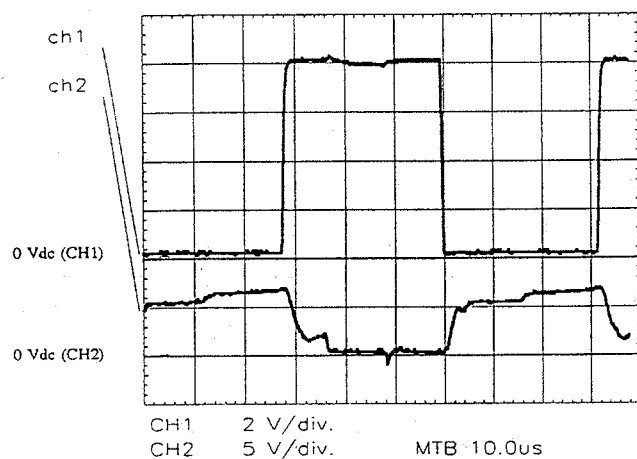


Horizontal: CH1 Pin 40 CI903
CH2 TP19

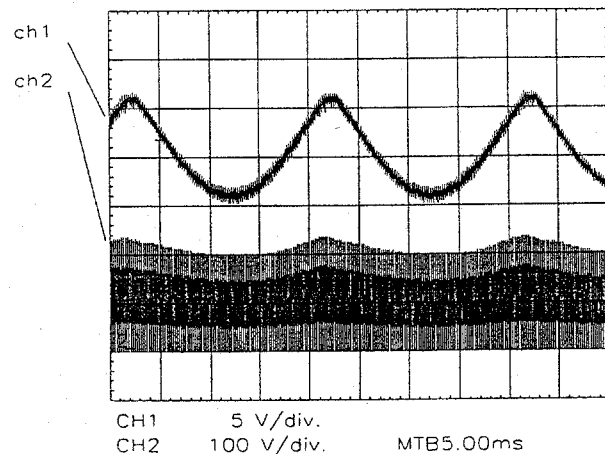

E/W: CH1 Pin 11 CI601
CH2 wave form on D305

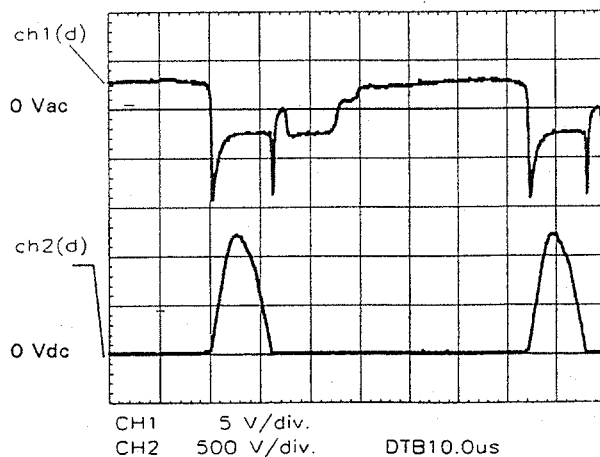


Horizontal: CH1 Base T301
CH2 Collector T301

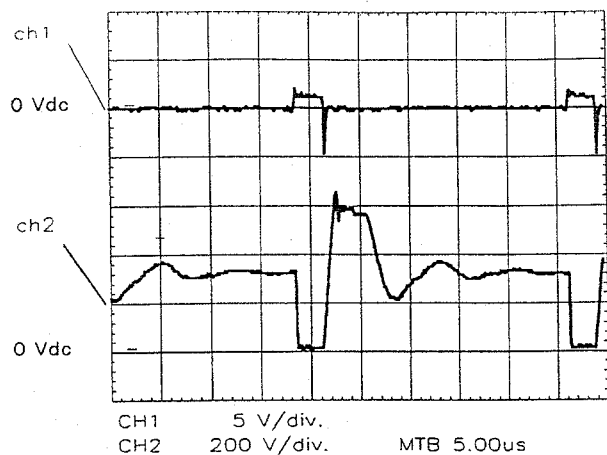


TVC: STAND-BY

CH1 Base of T401
CH2 Collector of T401

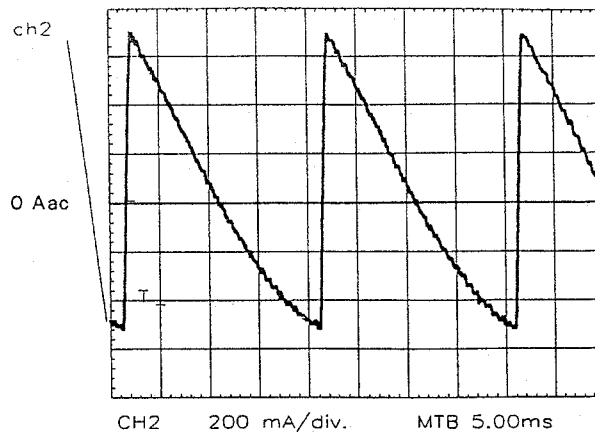


Horizontal yoke current





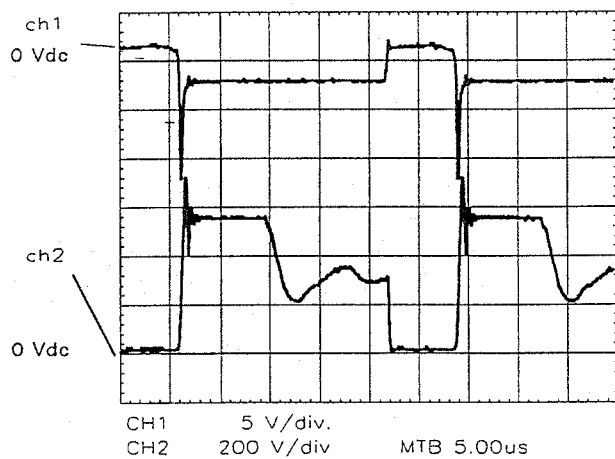


TVC: POWER ON:






CH1 Base of T401
CH2 Collector of T401


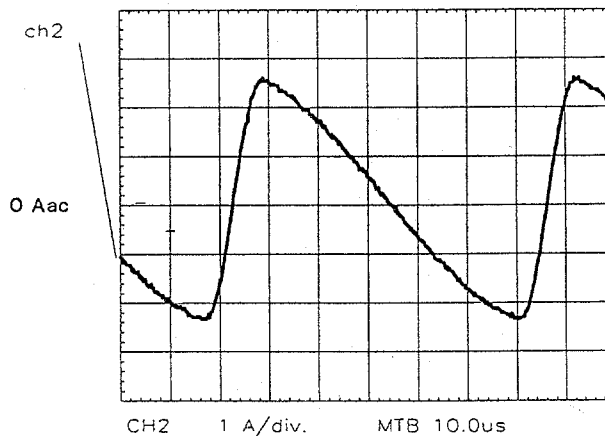





Vertical yoke current

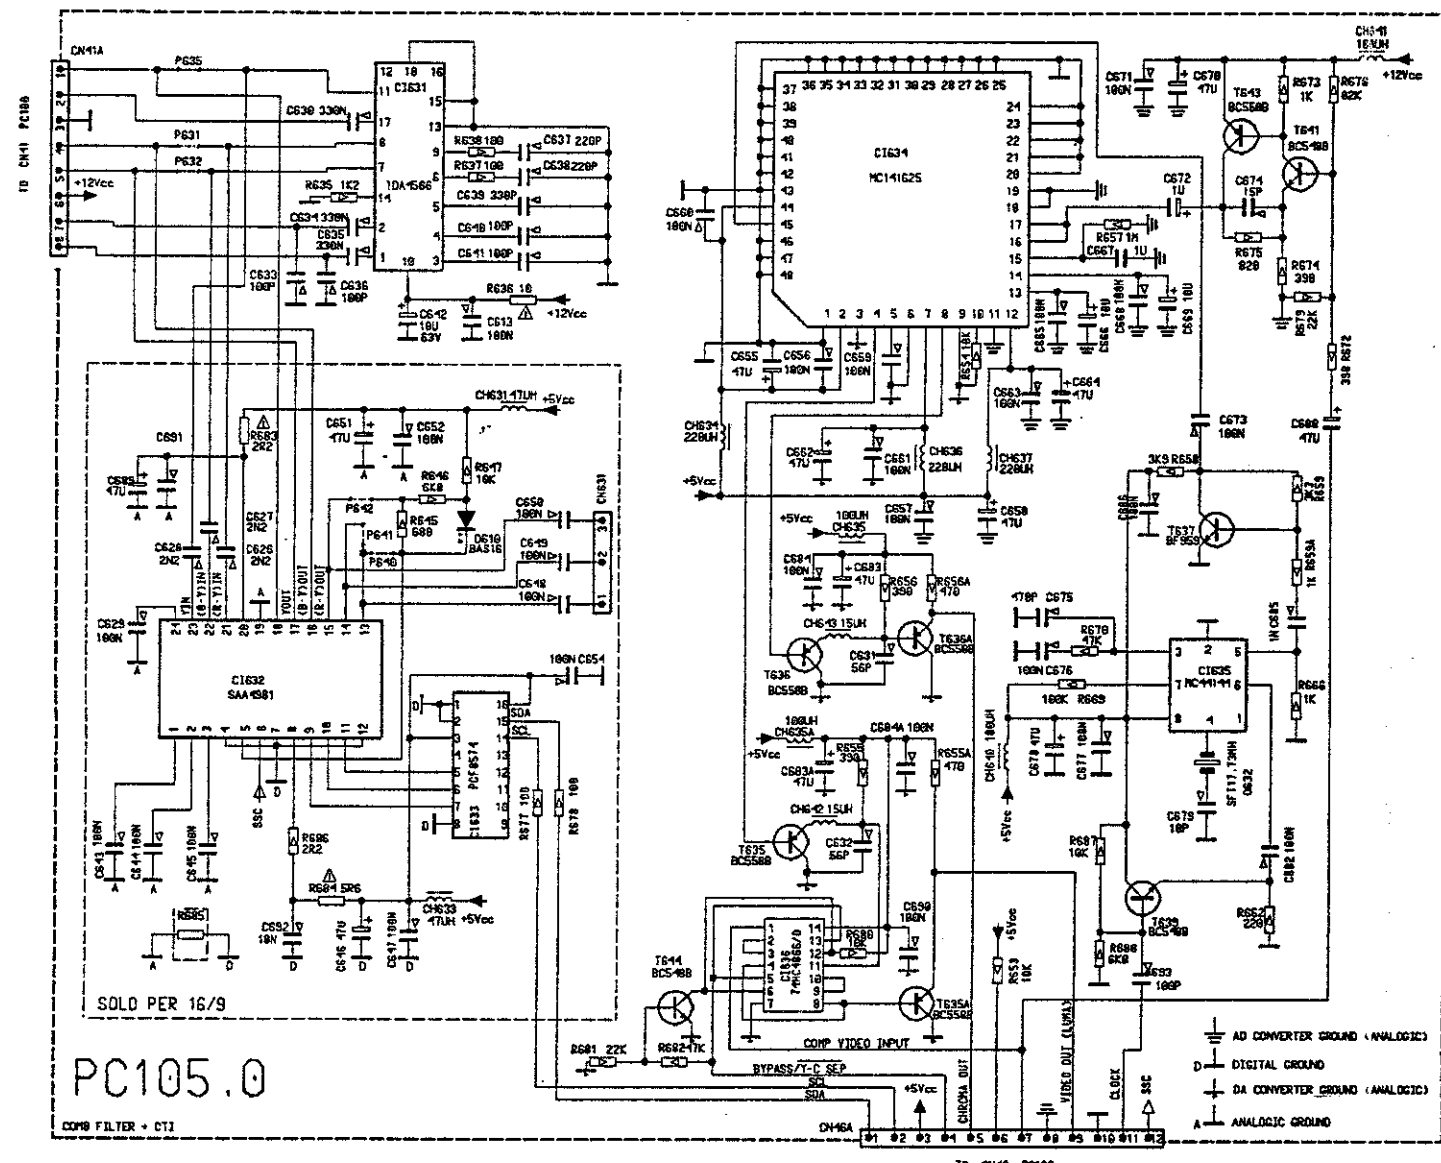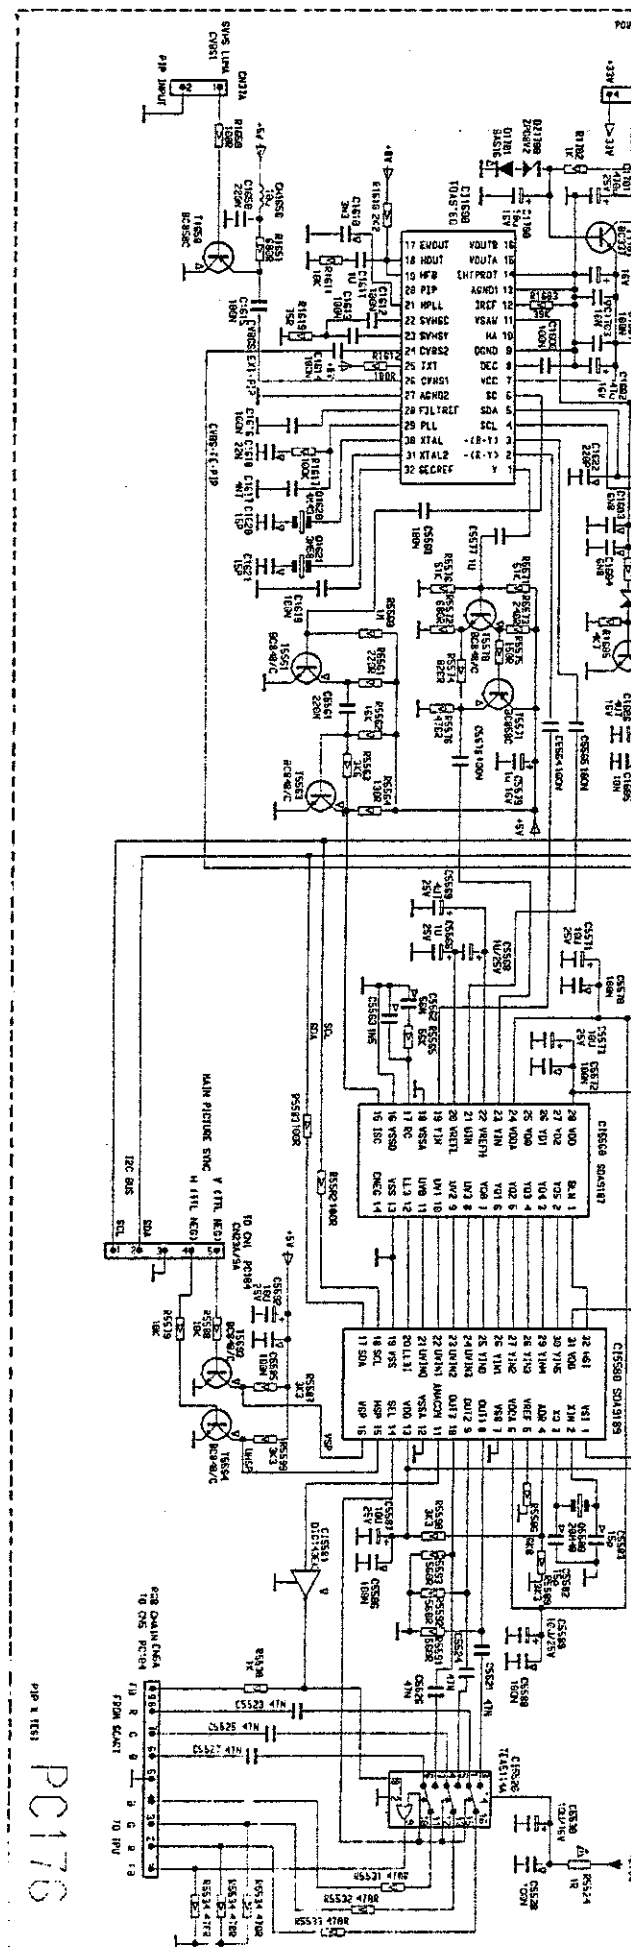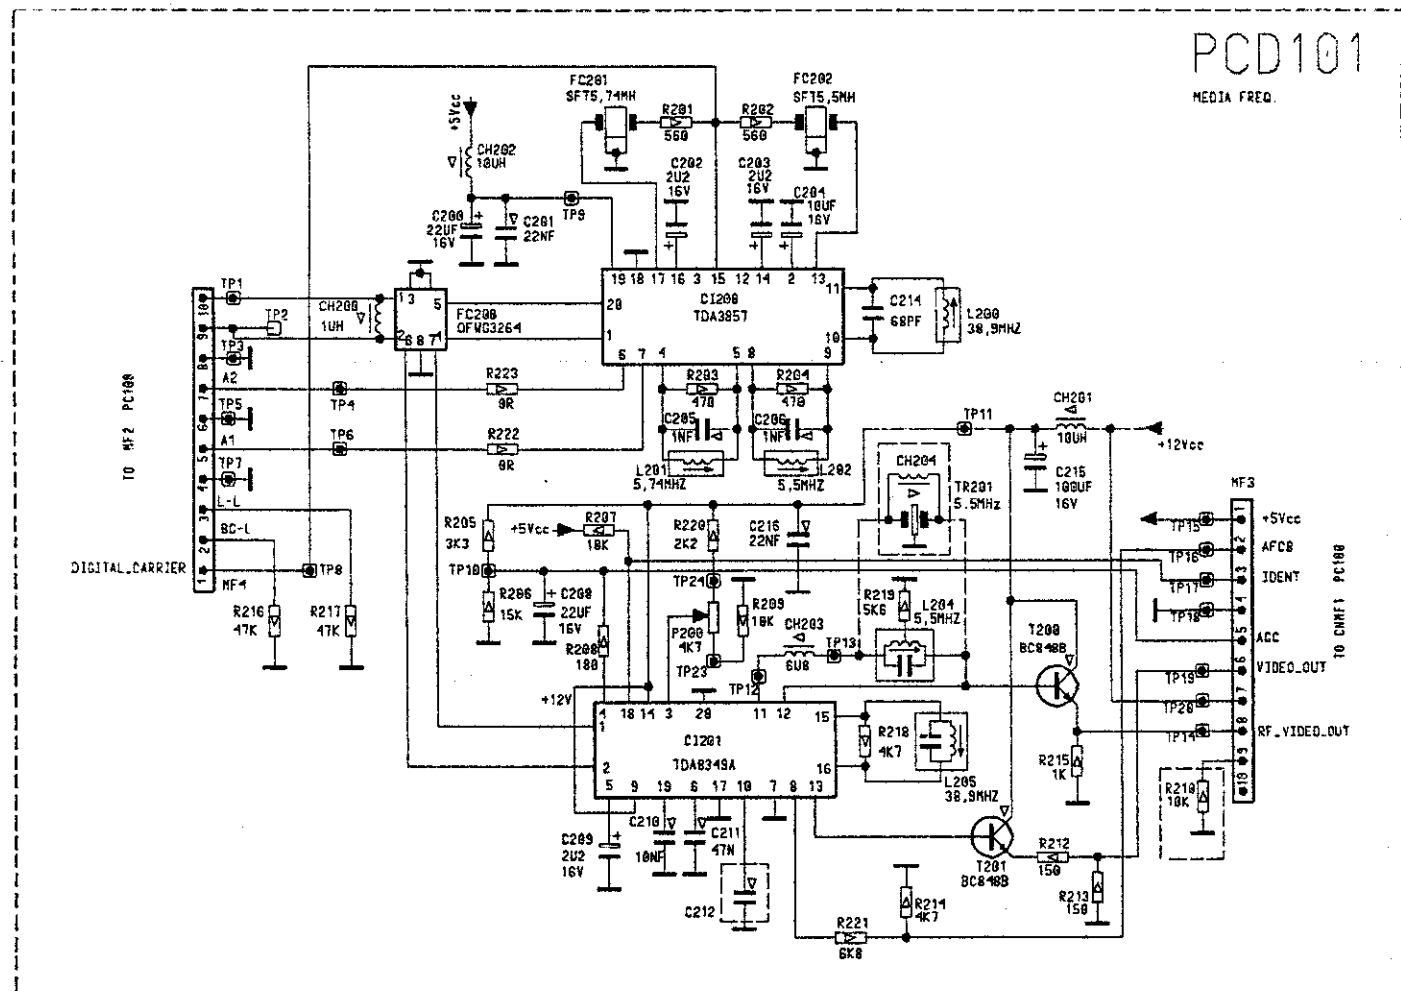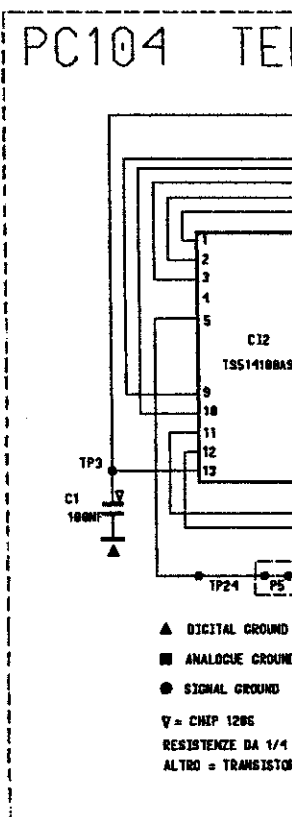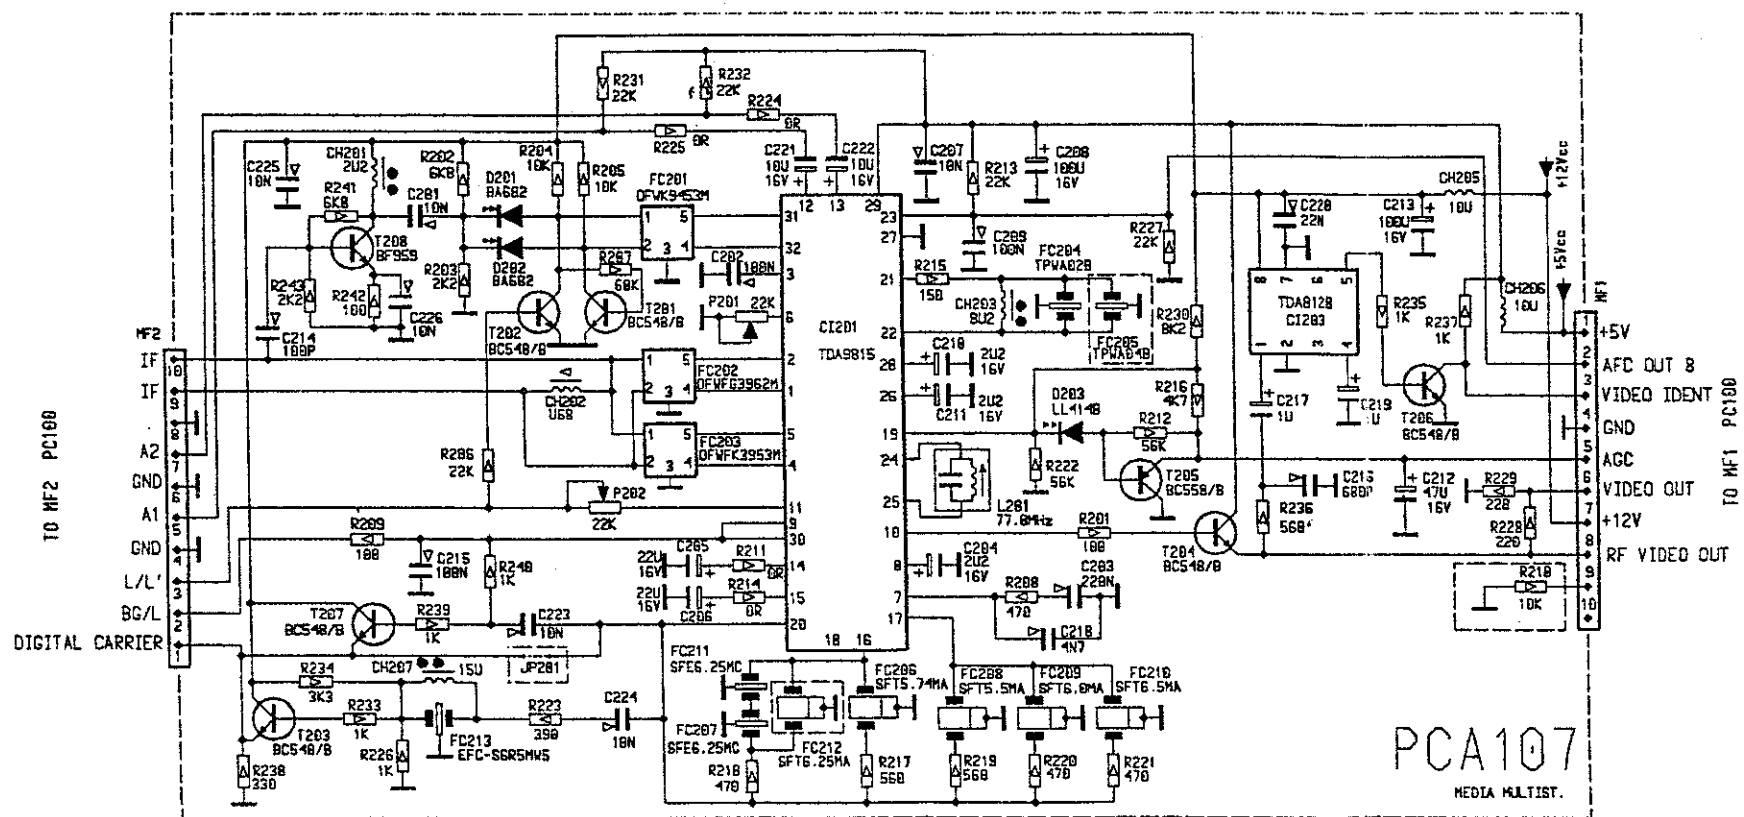



PC104 TELETEX

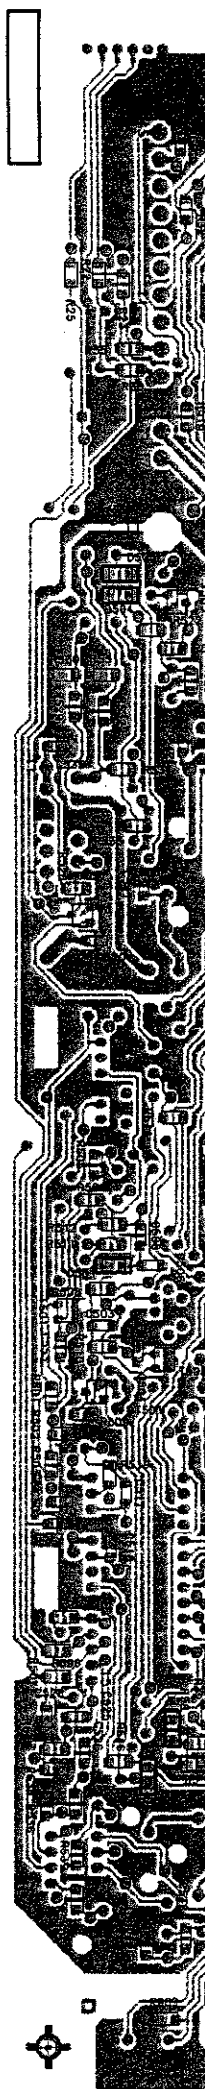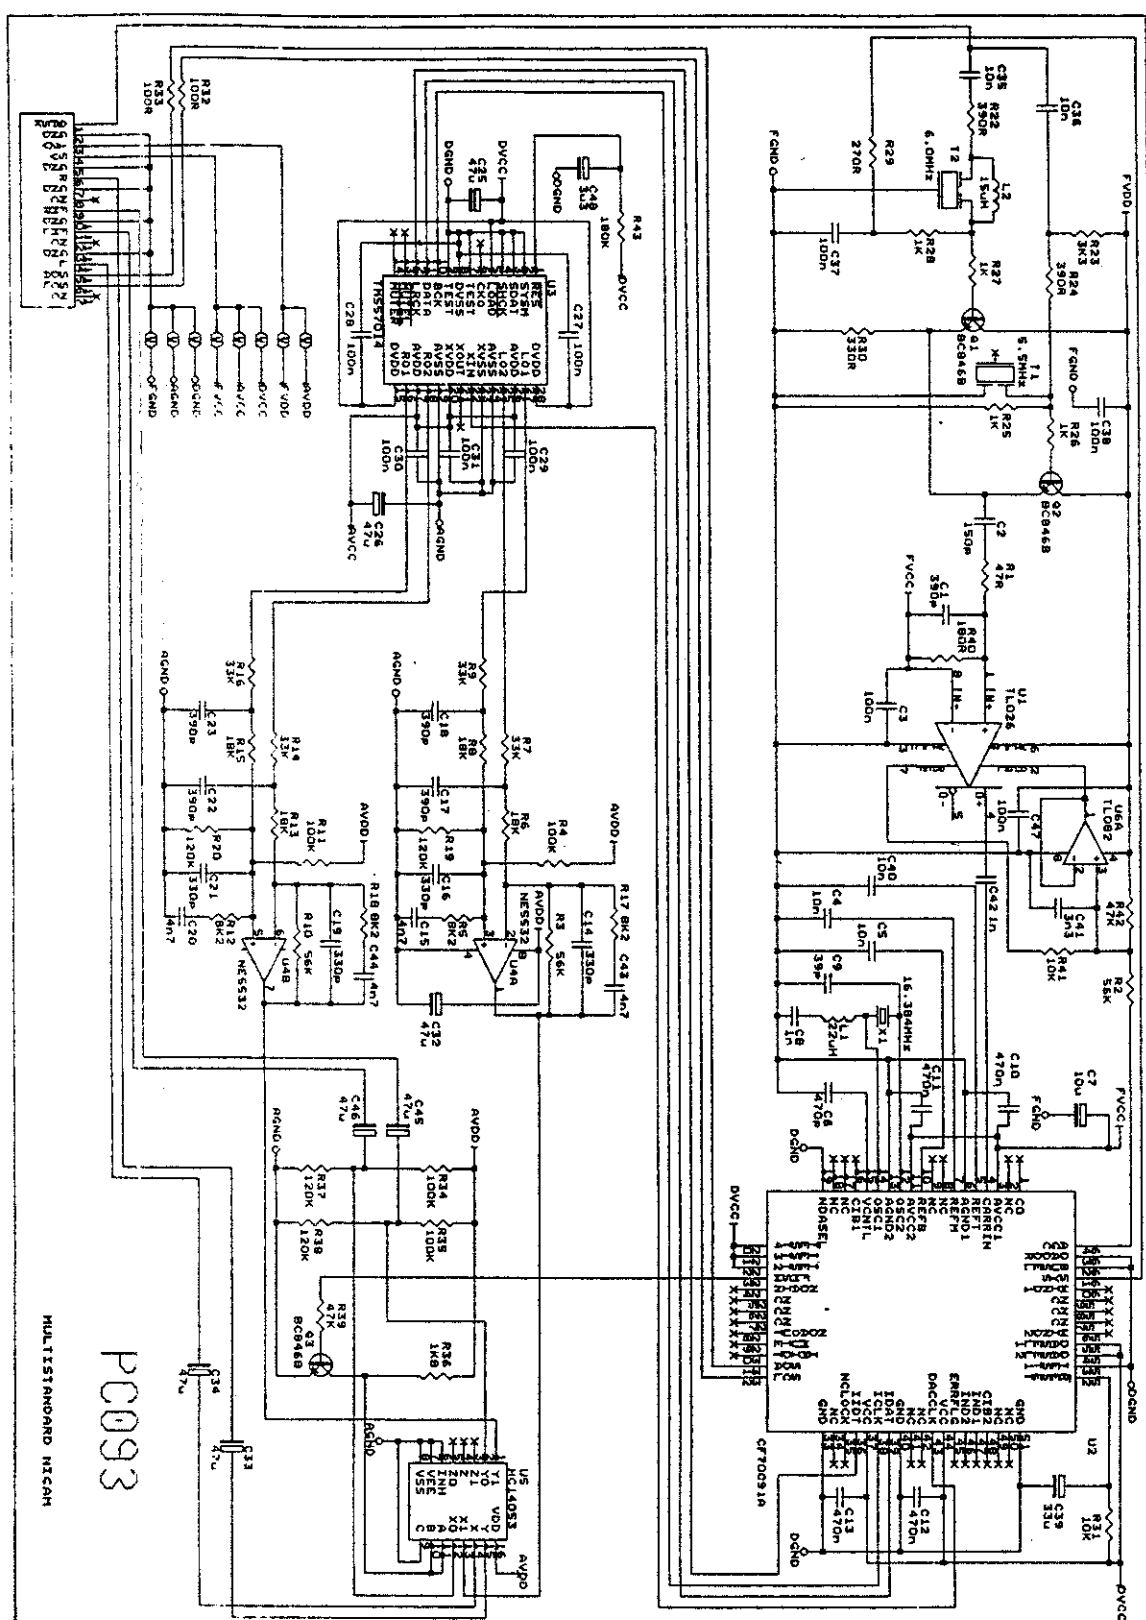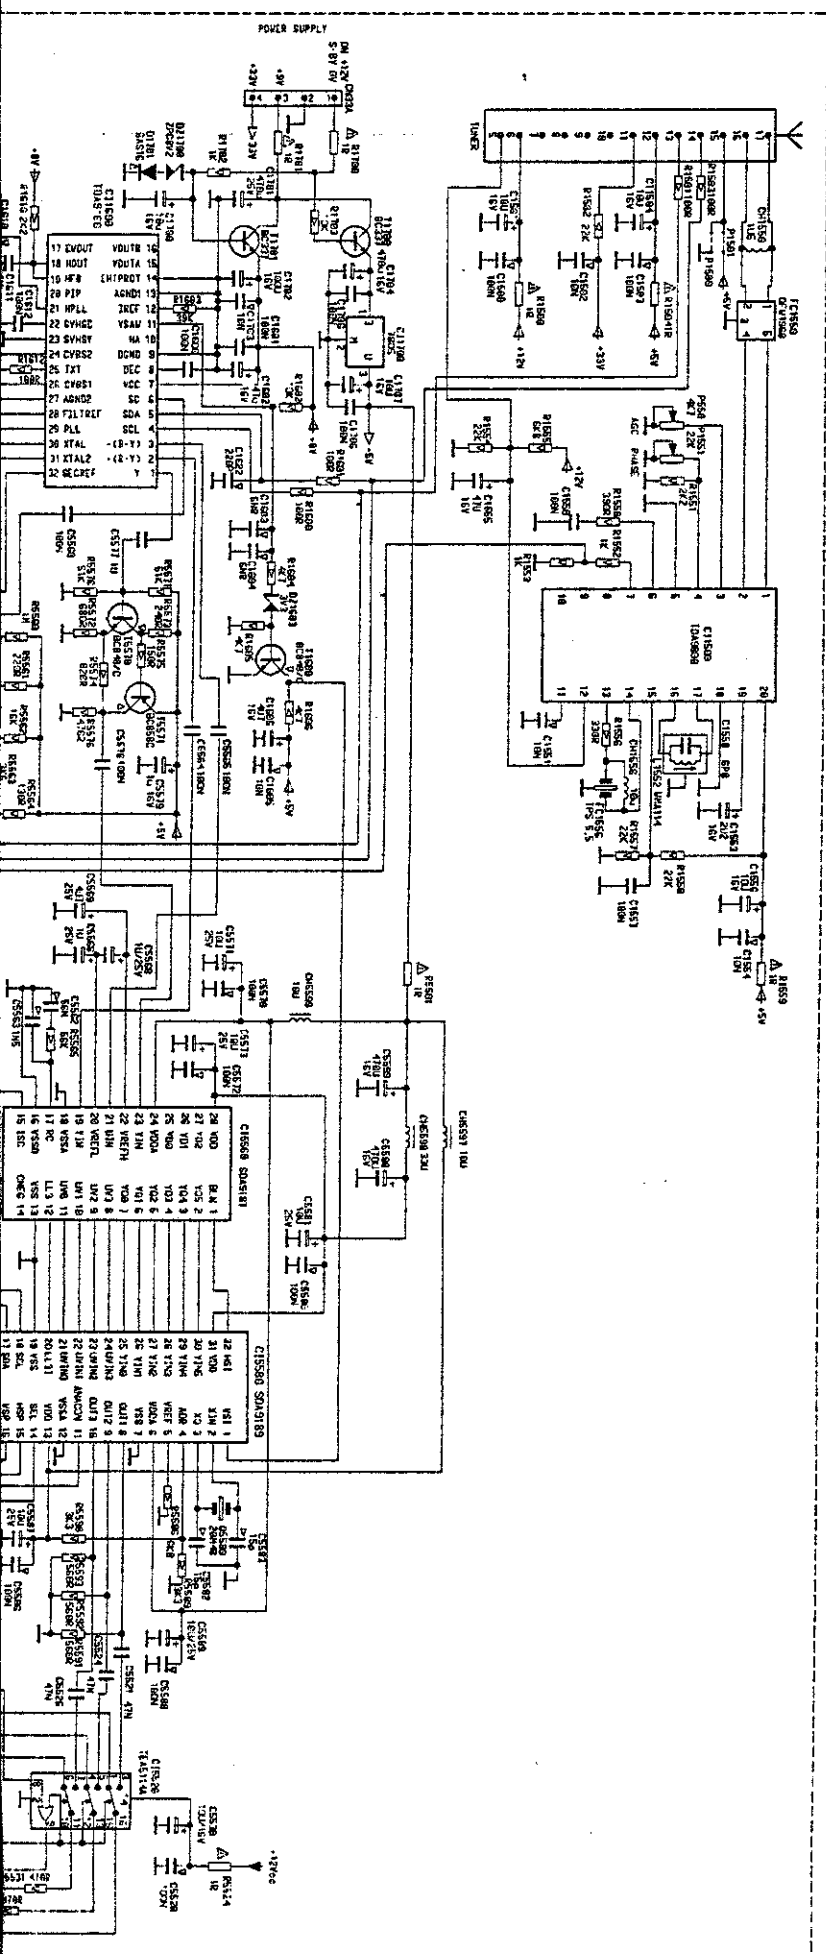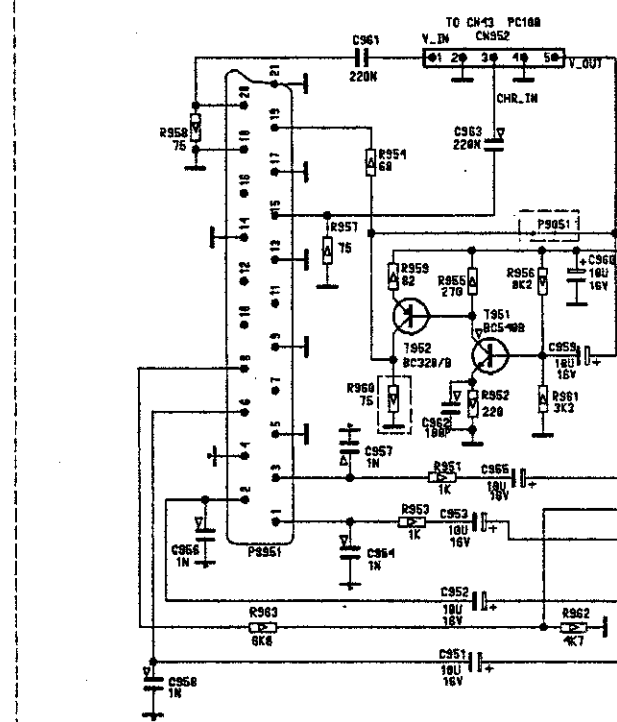
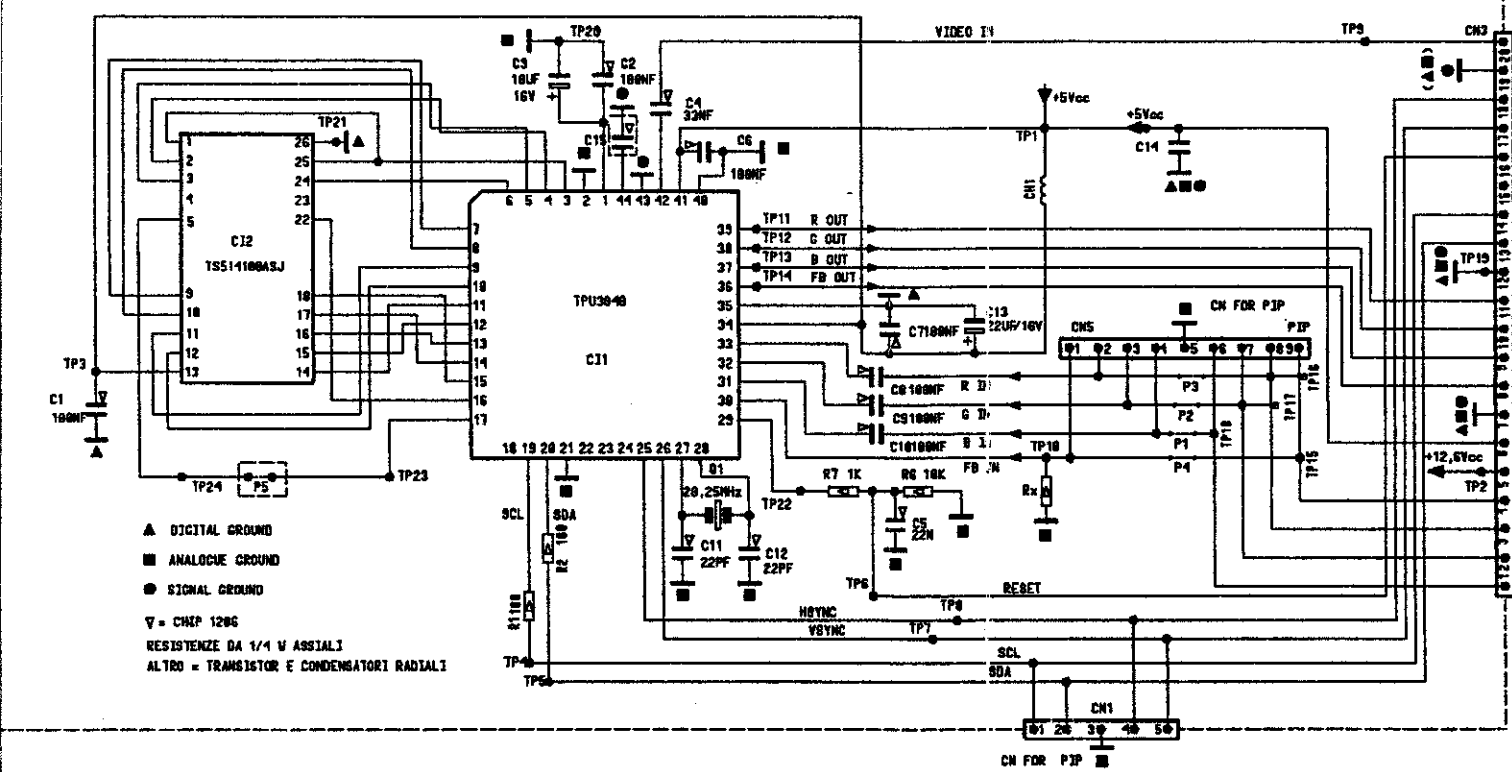


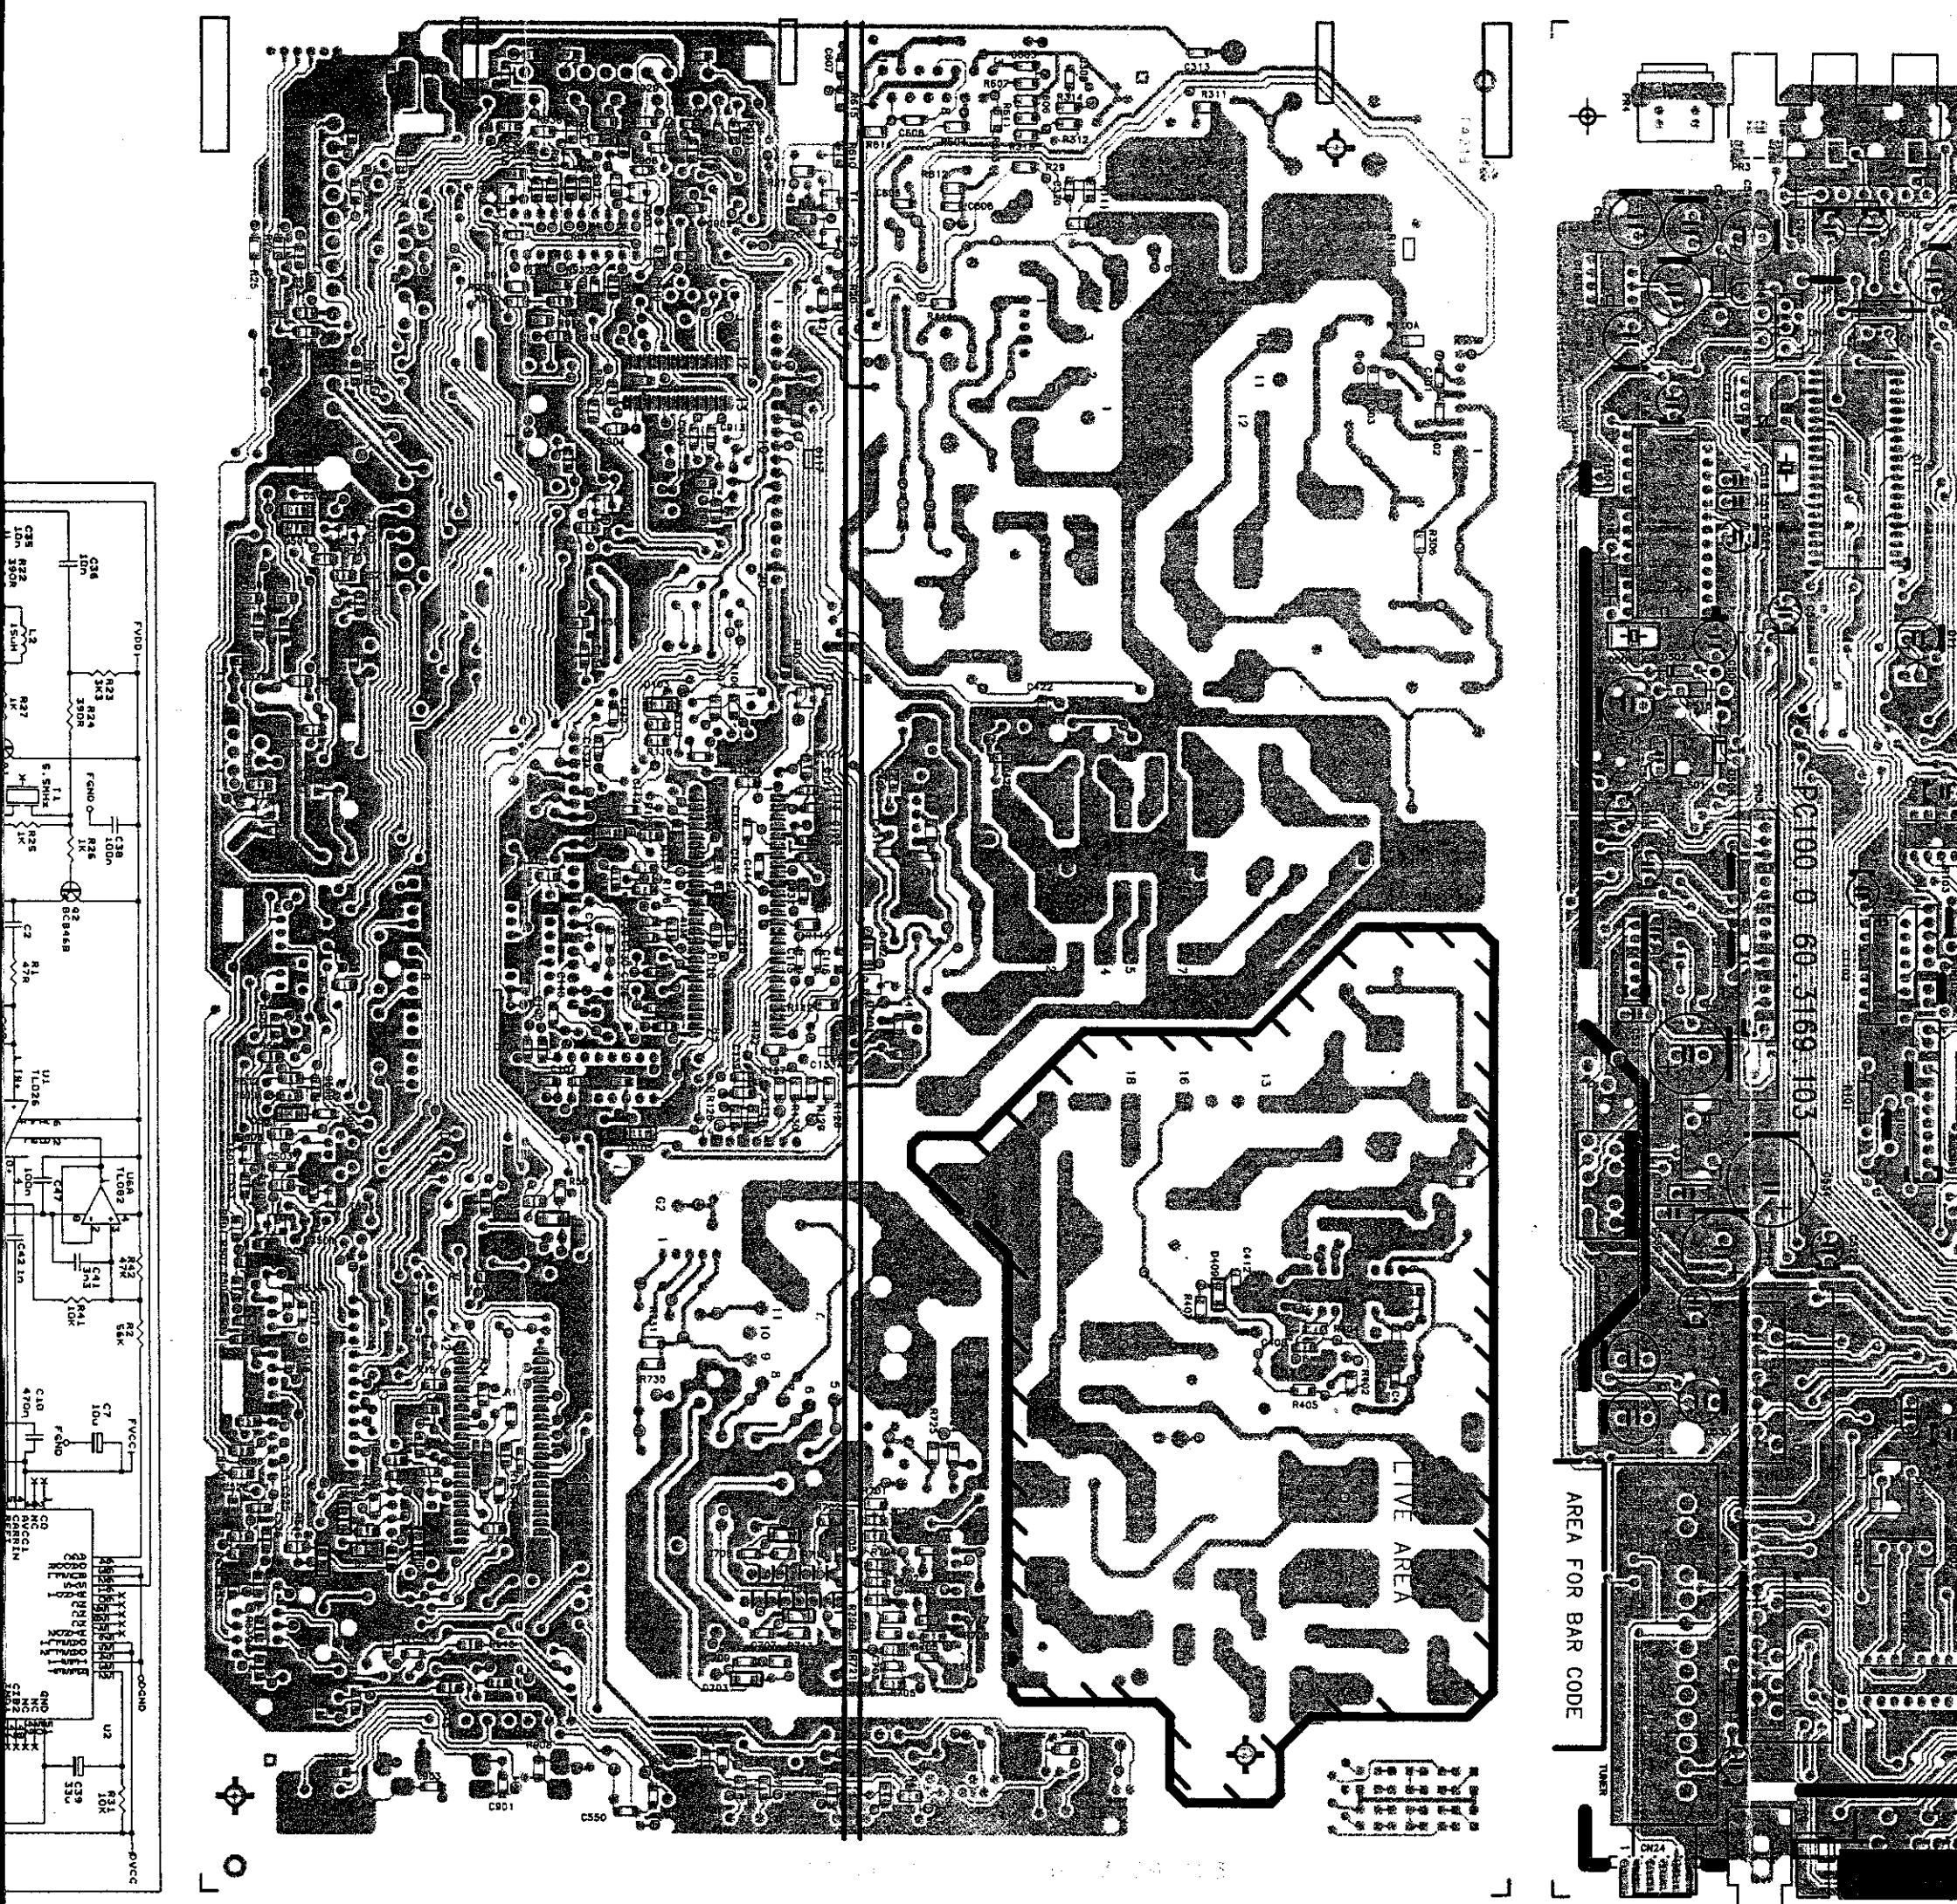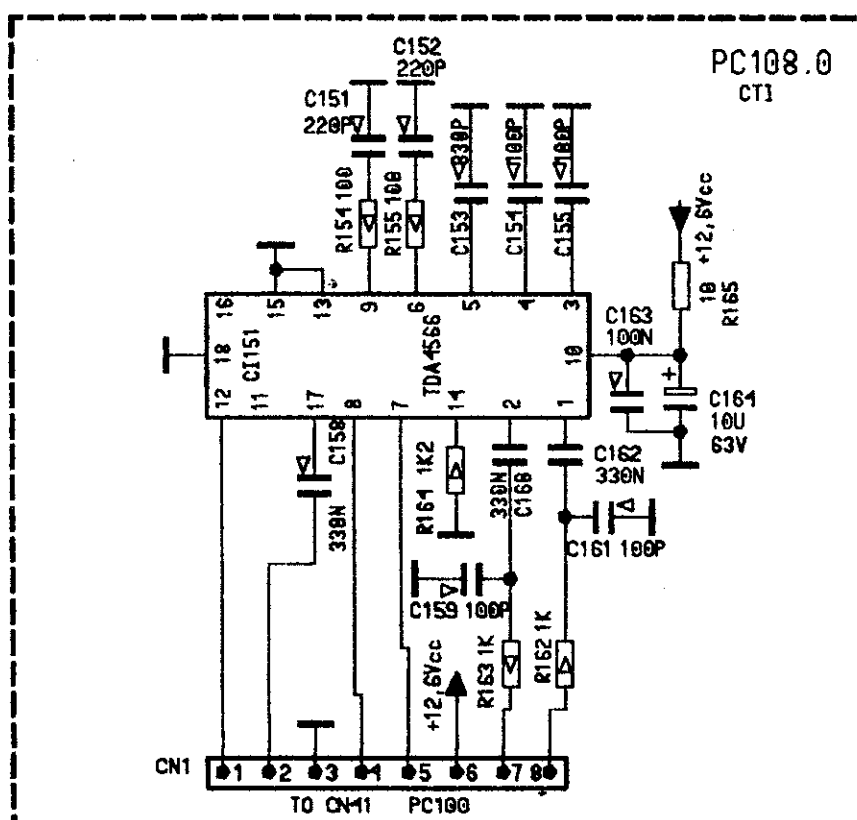

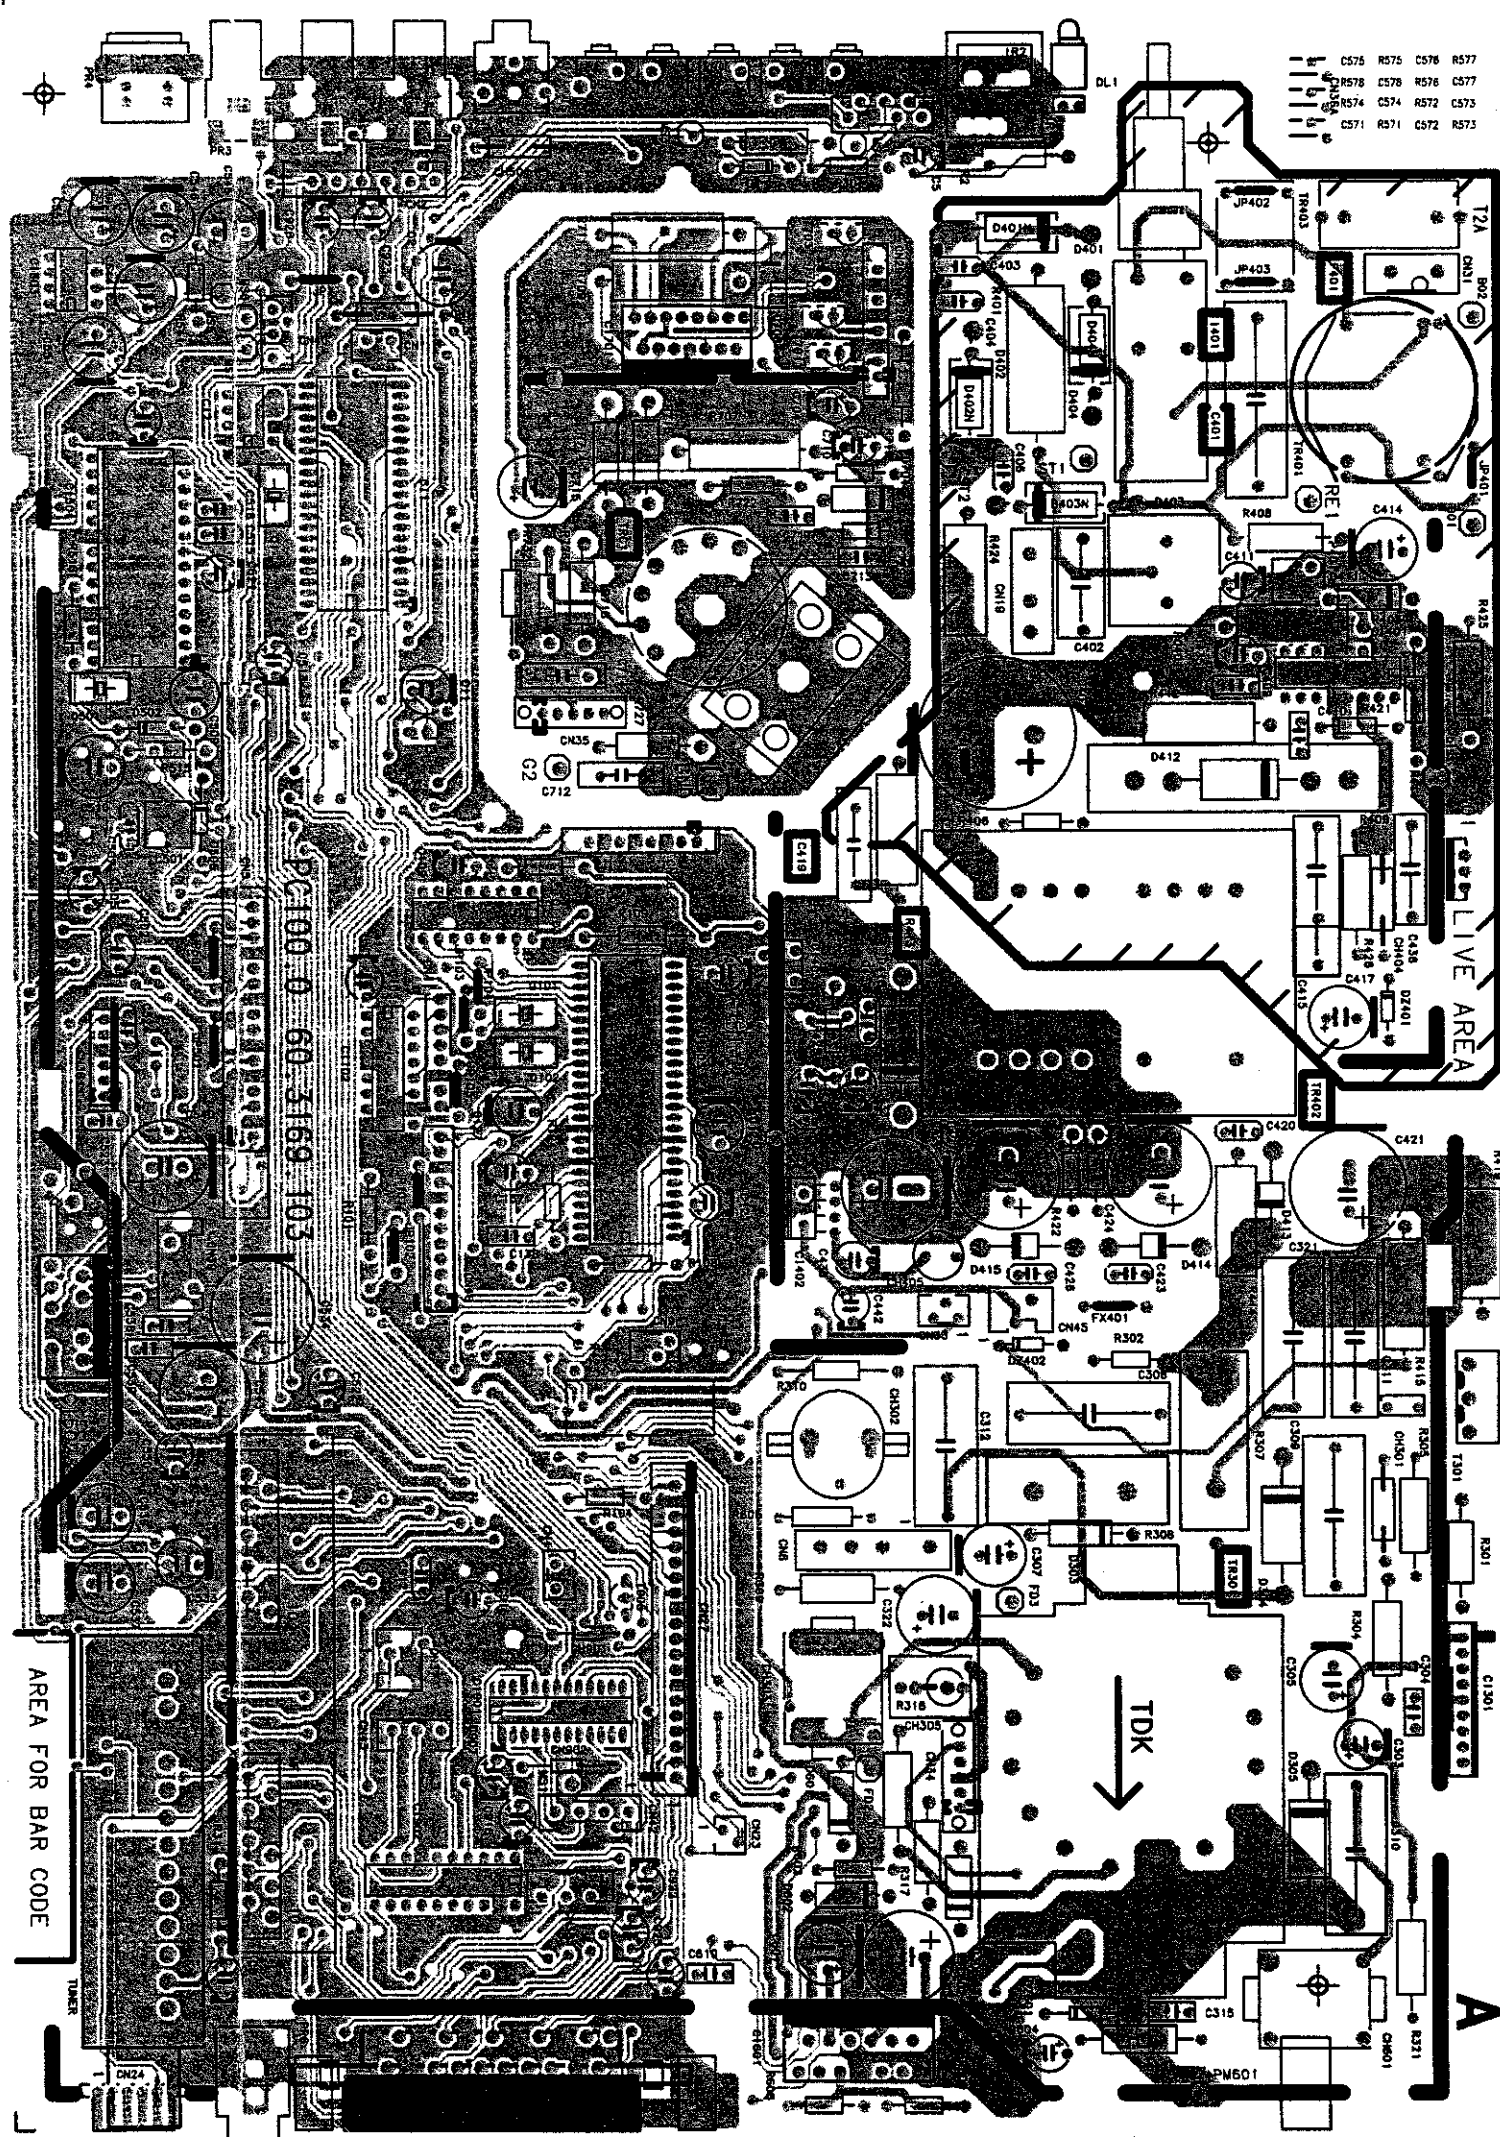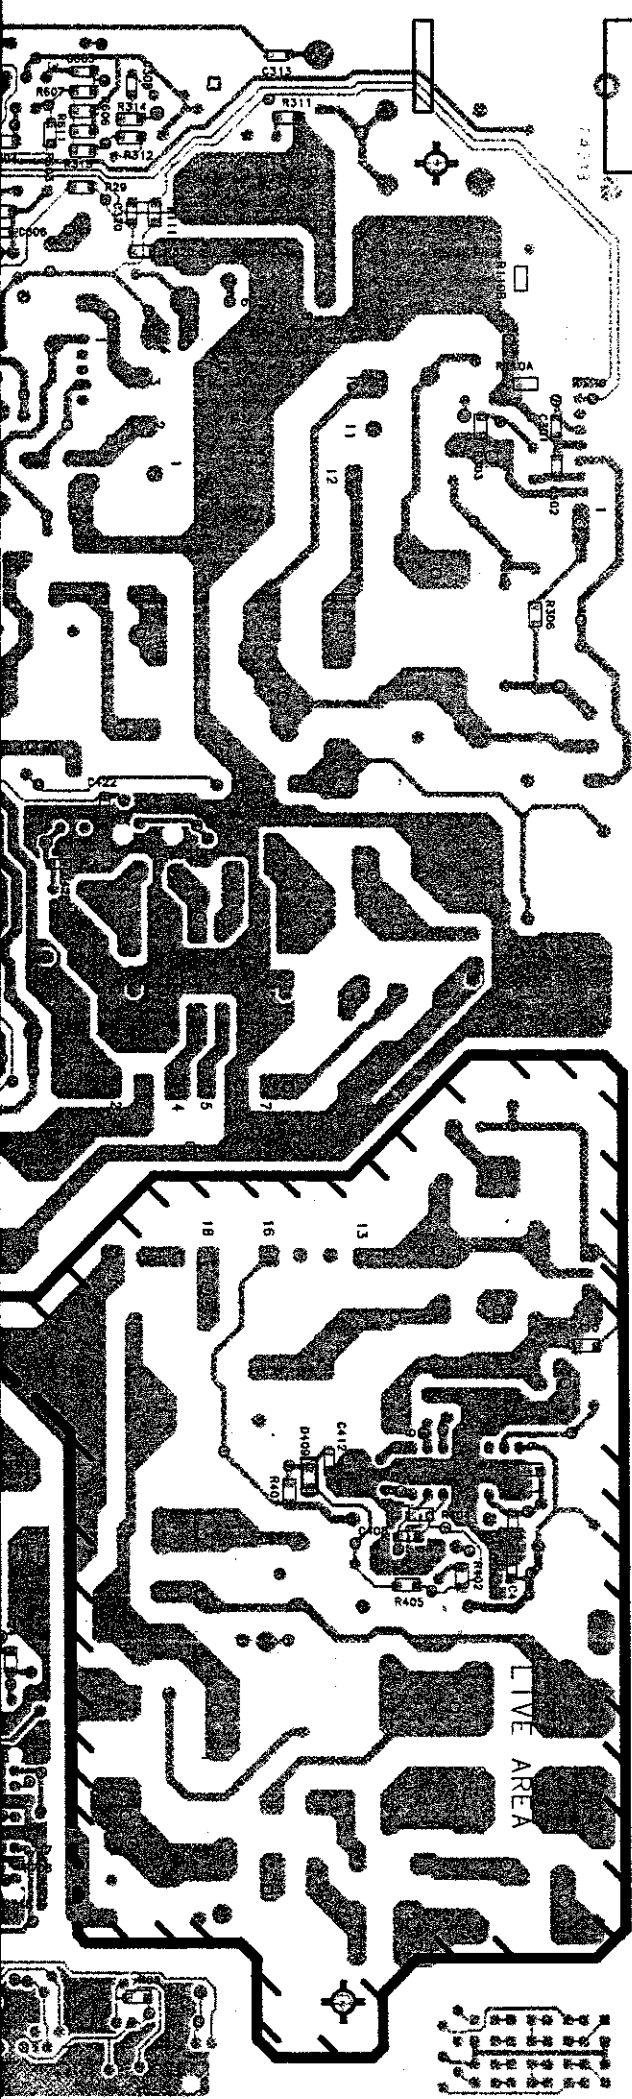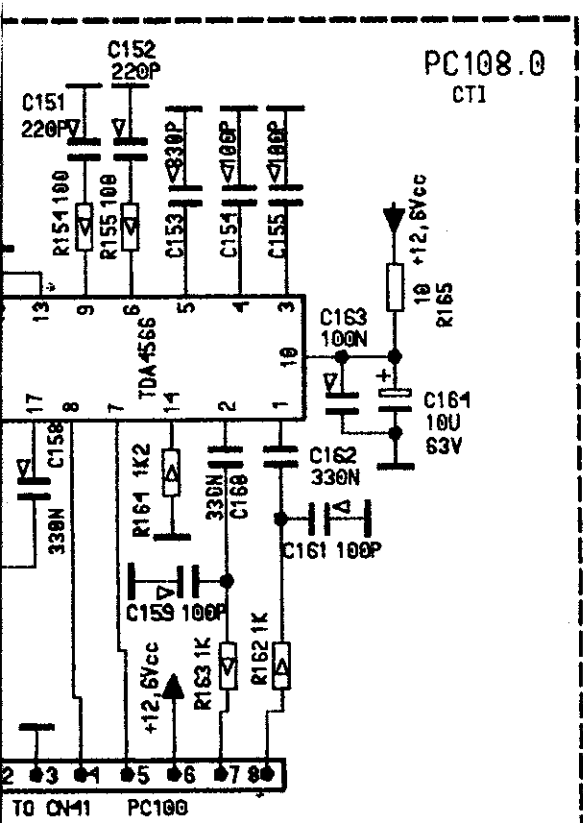


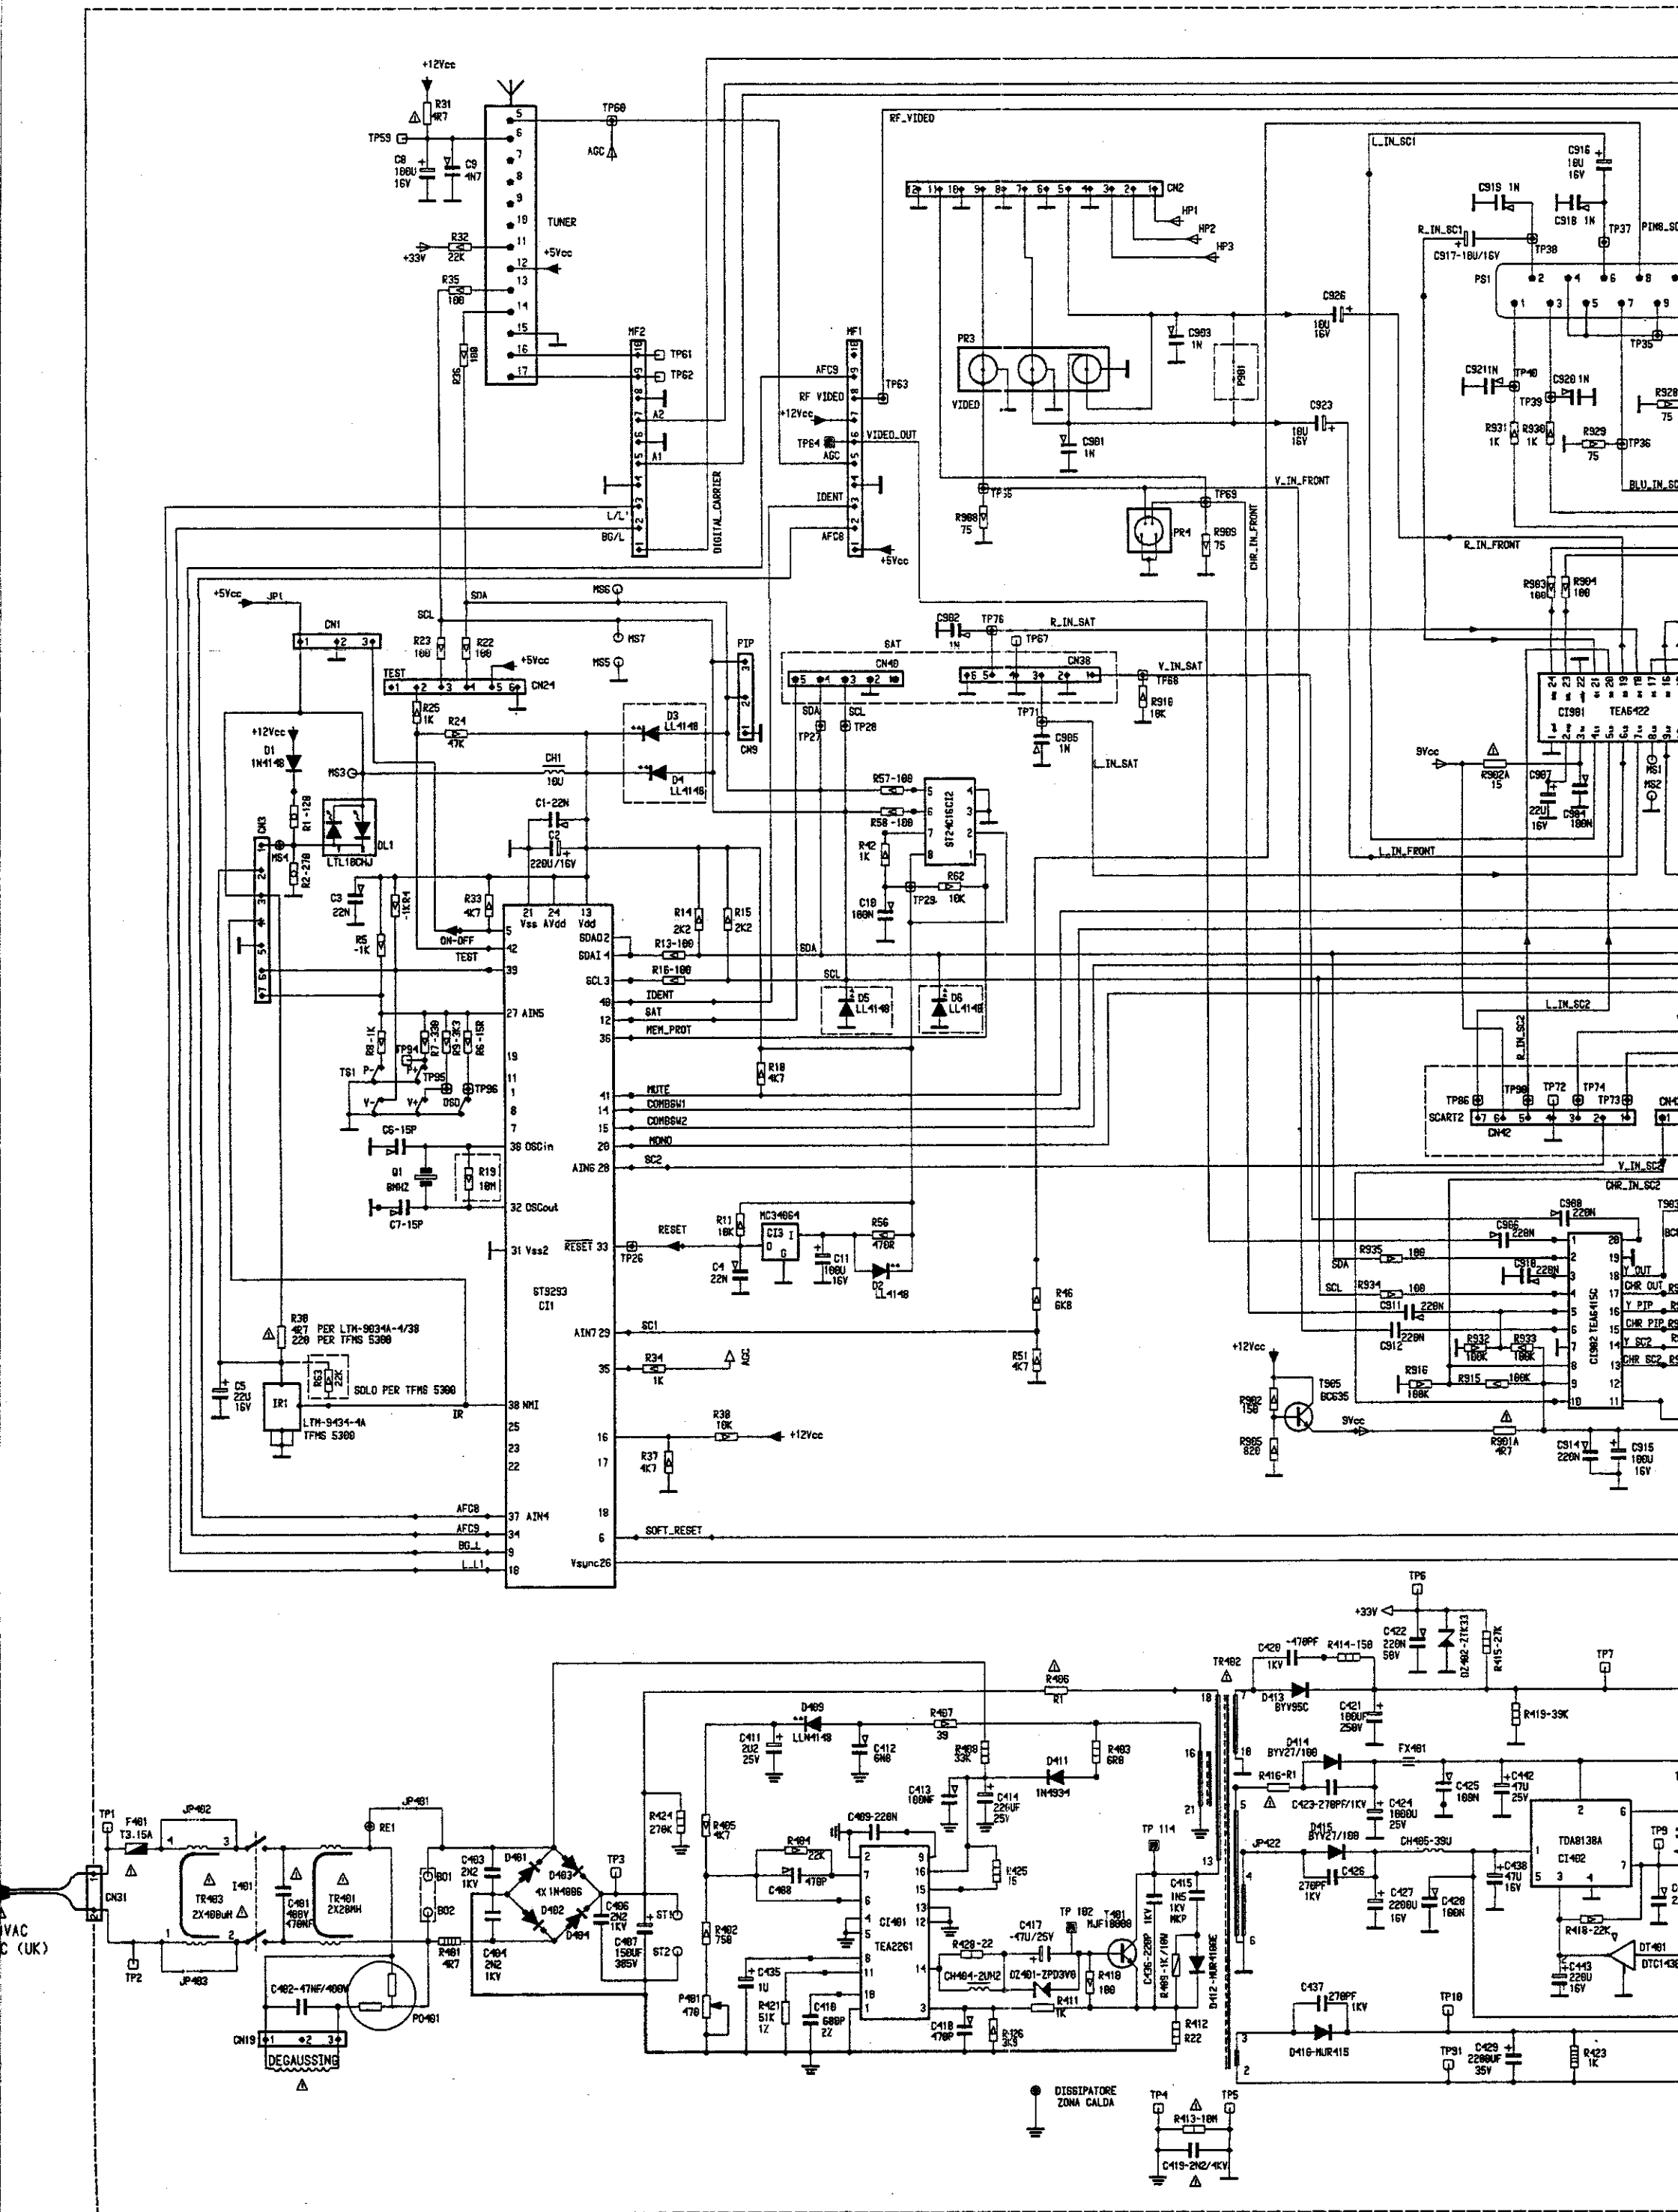

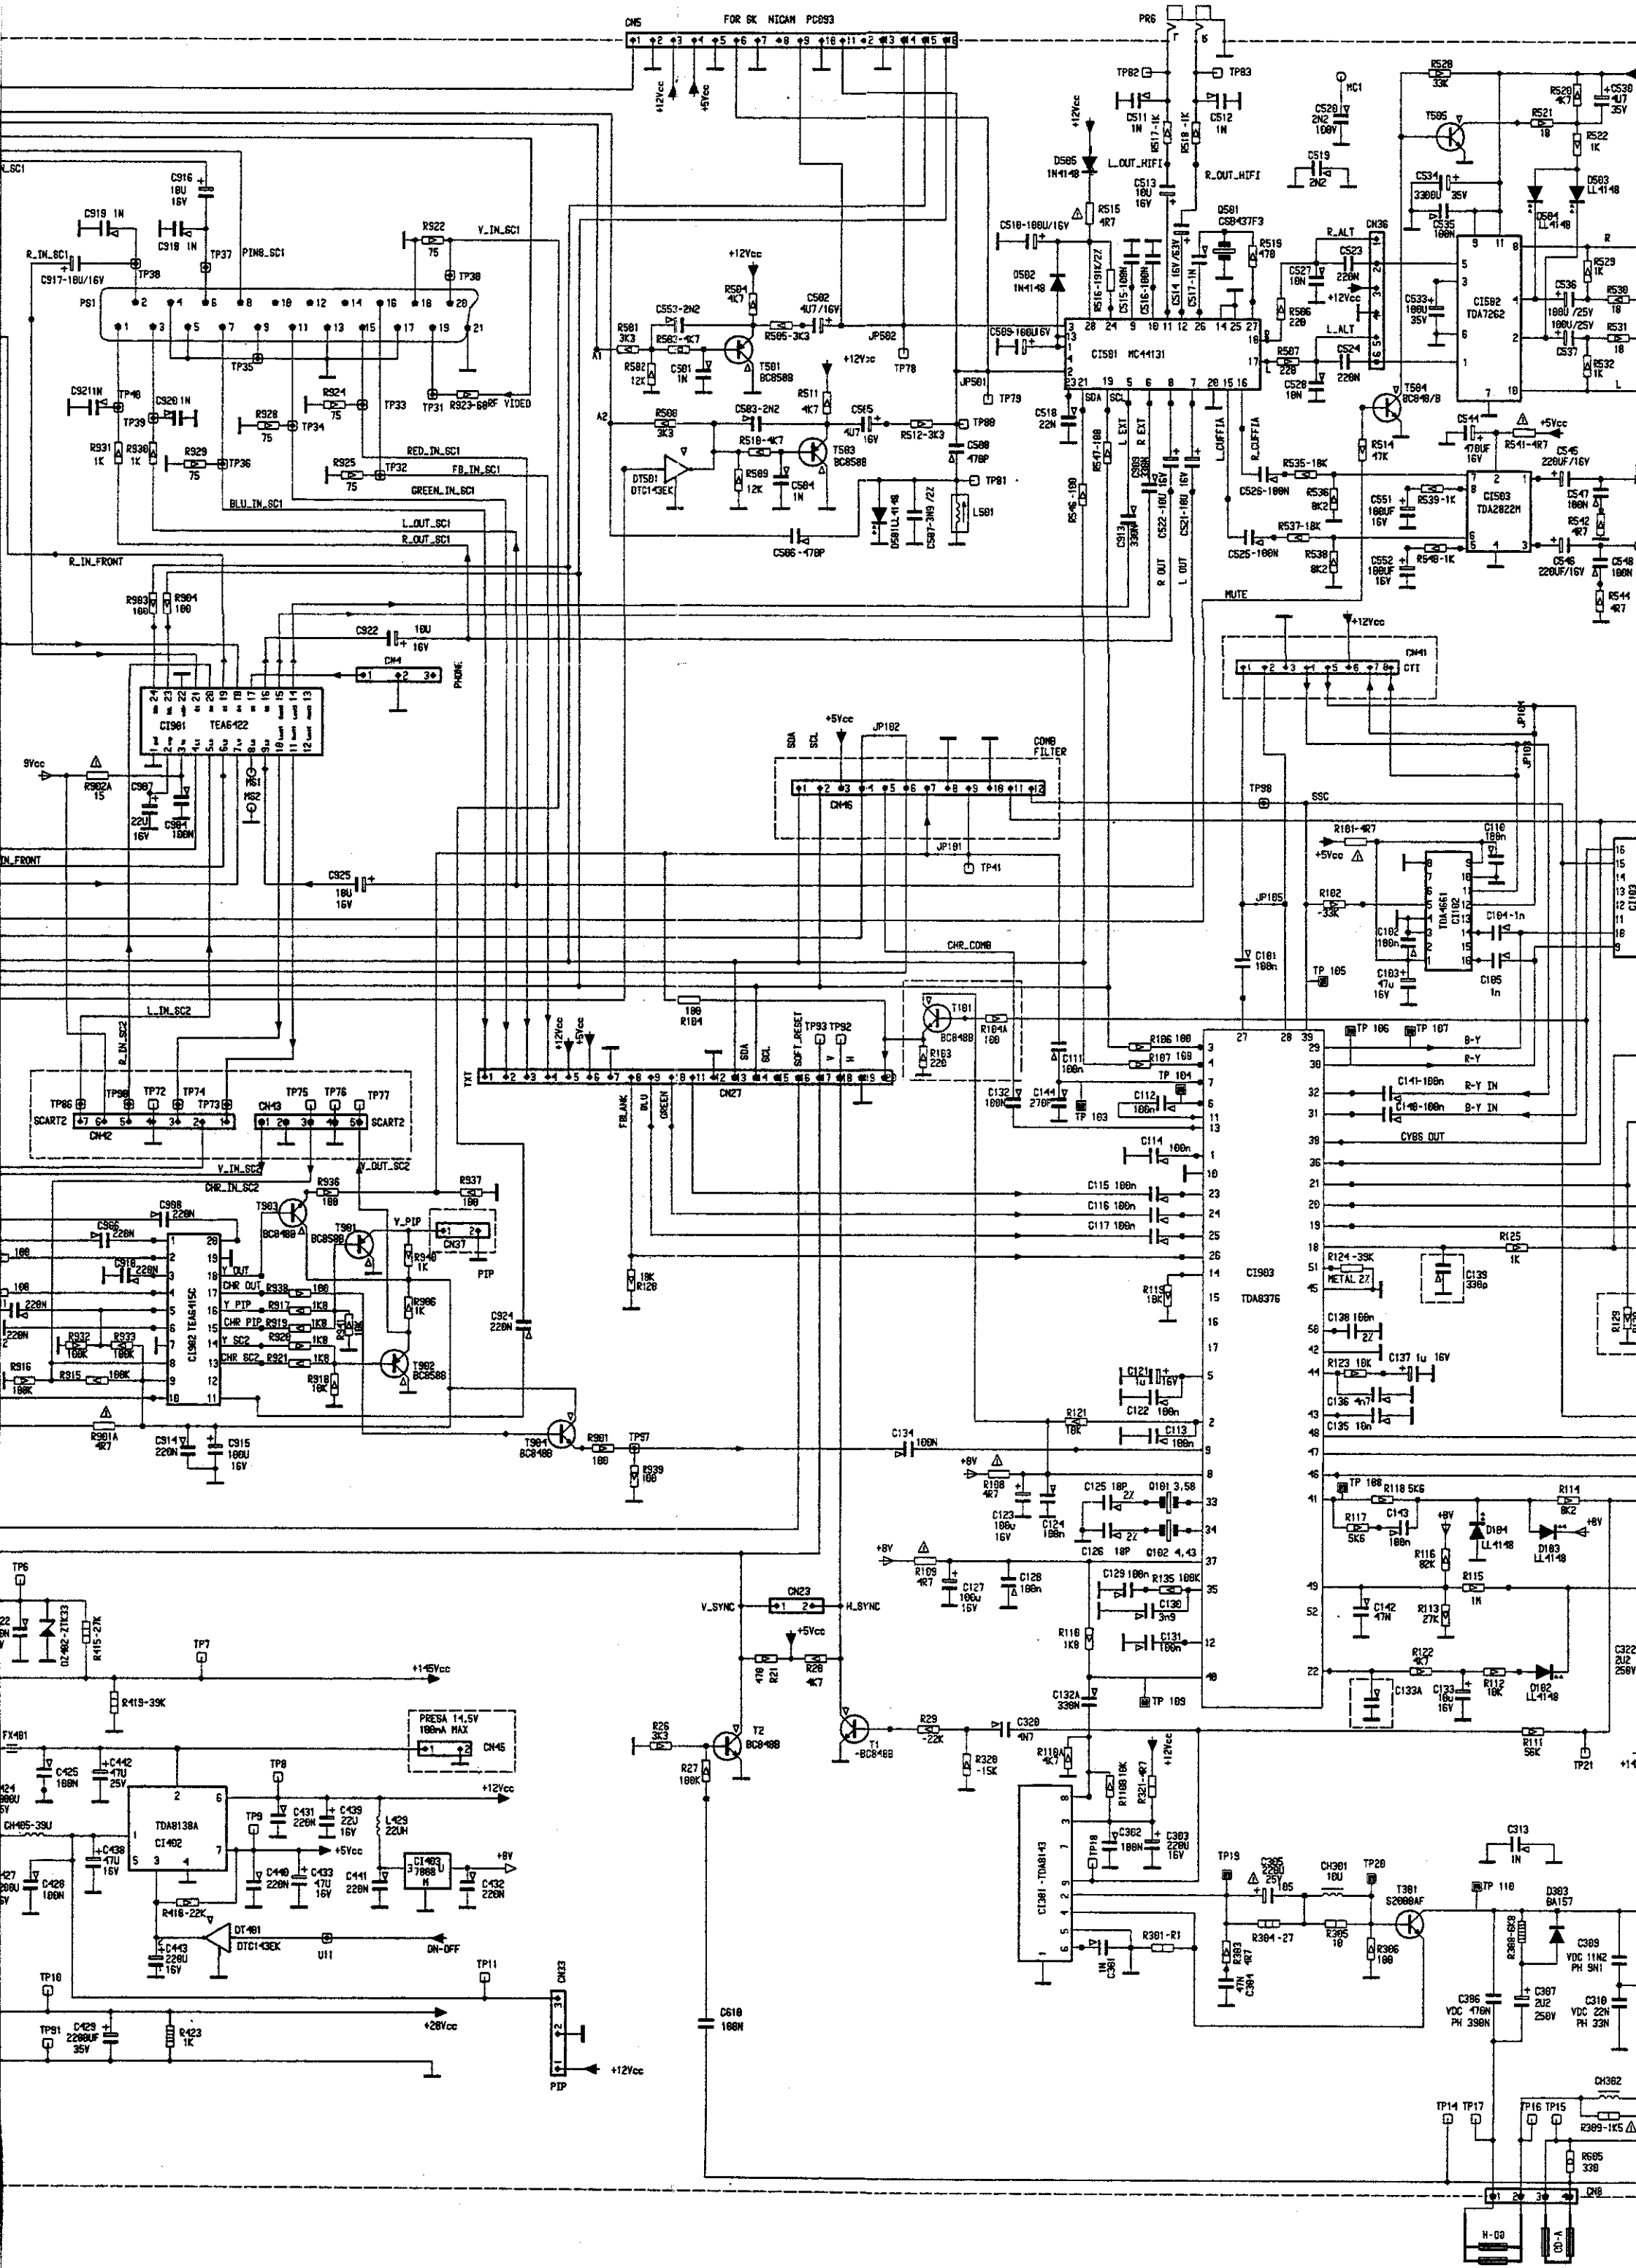

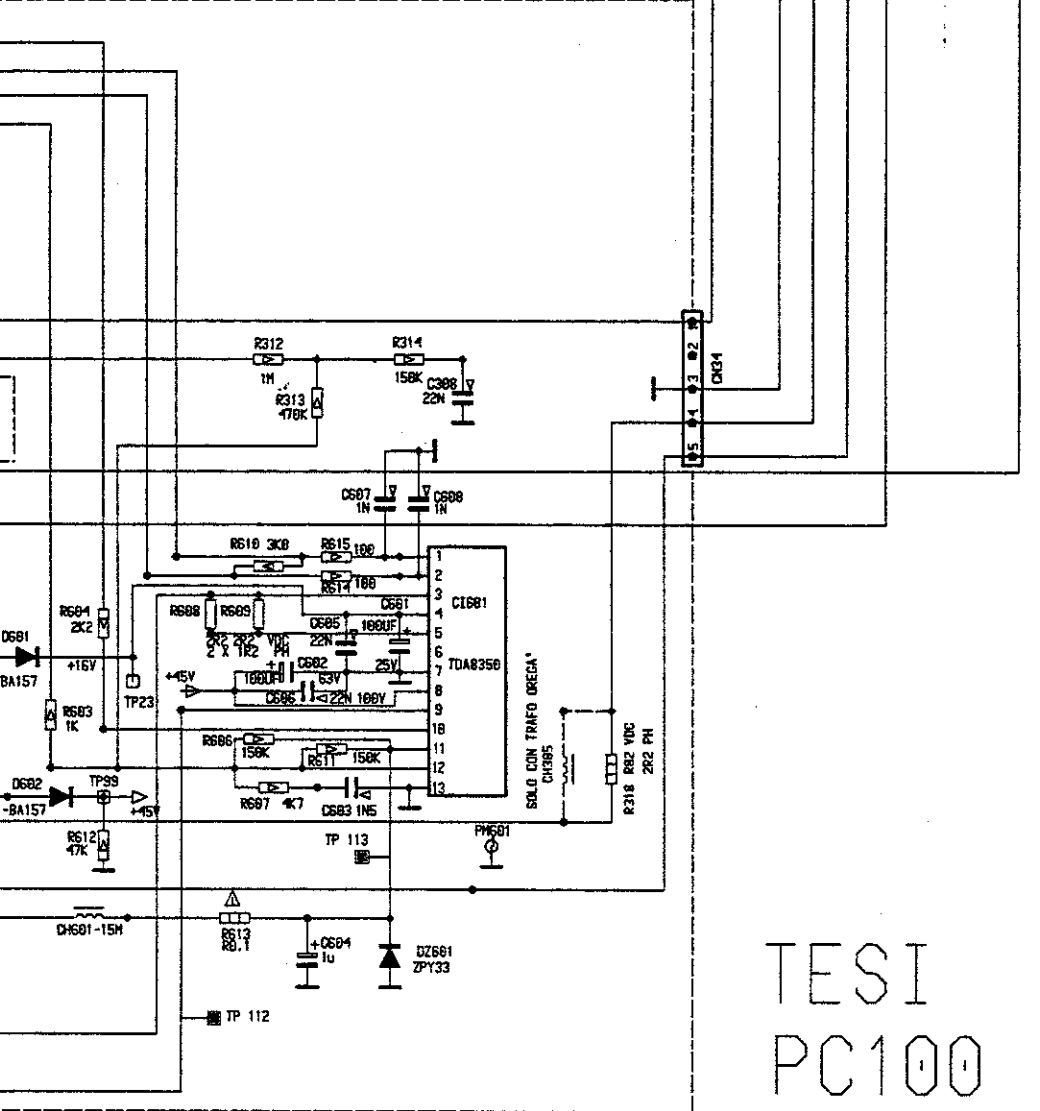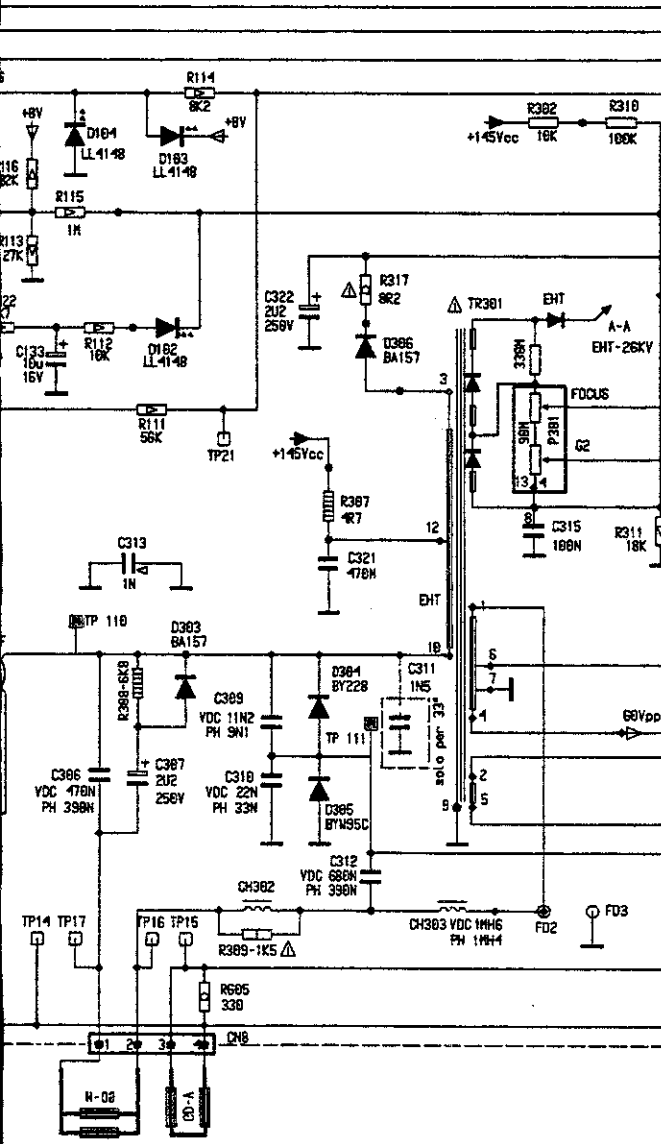

TESI
PC100

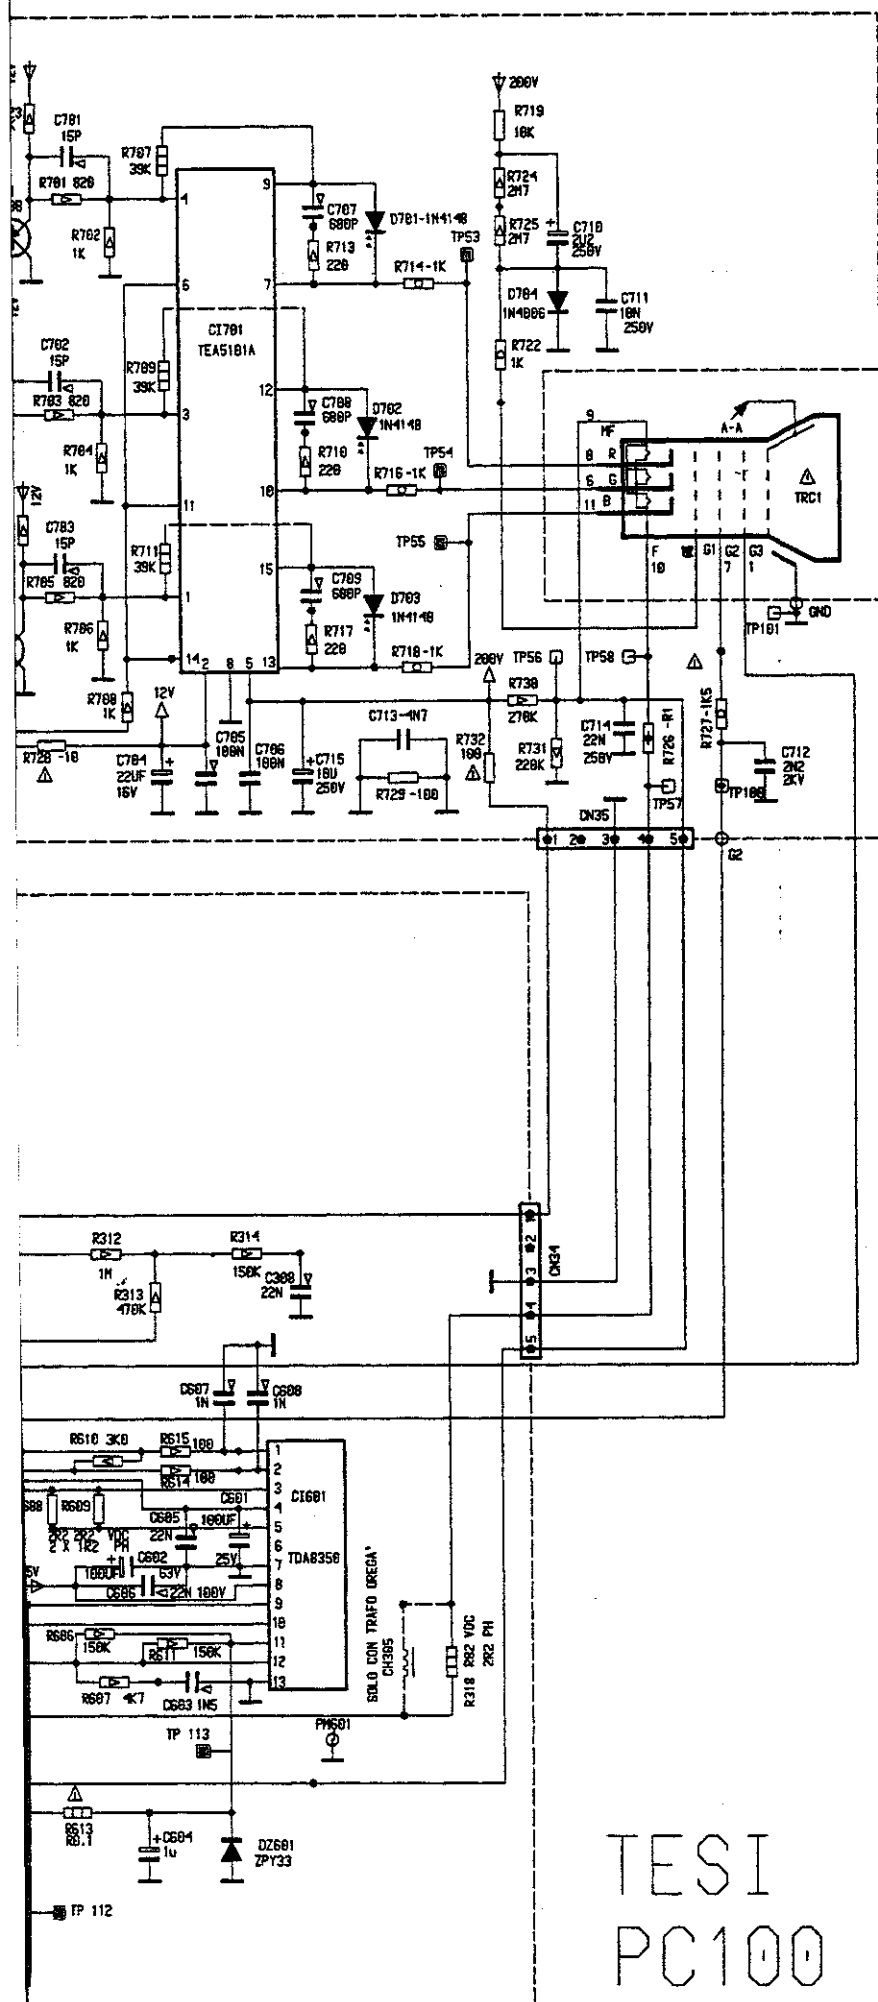


TESI
PC100

The manufacturers reserve all legal rights with regard to the ownership of this document and hereby prohibit reproduction or distribution of the same without their prior permission. Moreover, they decline all responsibility for eventual errors, whether due to misprints or incorrect transcription, and reserve the right to make any necessary or useful changes without jeopardizing the essential characteristics. All resistors without markings are 1/4 W - 5%. All measurements refer to ground with mains supply 220V (240V UK) correct picture and a voltmeter of 20.000 Ohm/V.

Die Herstellerfirma behält sich alle gesetzlichen Eigentumsrechte dieser Unterlage vor, der Nachdruck und die Verbreitung bedarf der ausdrücklichen Genehmigung durch dieselbe. Ferner wird jegliche Verantwortung für eventuelle Ungenauigkeiten der vorliegenden Unterlage, durch Fehler beim Druck oder bei der Übertragung des Textes, abgelehnt. Die Herstellerfirma behält sich weiter vor, Änderungen, die als notwendig oder zweckmässig angesehen werden, vorzunehmen ohne dass dabei die wesentlichen Eigenschaften des Teiles beeinträchtigt werden. Alle Widerstände ohne Bezeichnung sind 1/4 W - 5%. Alle Messungen beziehen sich auf Masse, mit einer Netzspannung von 220 V (240 V UK) und normalem Fernsehsignal gemessen mit einem Voltmeter von 20.000 Ohm/V.

Le constructeur se réserve aux termes de la loi, la propriété de le document et l'interdiction de le réimprimer ou sa divulgation sans son permis. Decline toute responsabilité pour d'éventuelles inexactitudes (fautes d'impression ou de transcription), contenues dans ce document. Il se réserve en outre le droit d'apporter toutes les modifications qu'il estimerait nécessaires ou utiles, sans porter préjudice au caractéristiques essentielles. Toutes les résistances sans d'indication sont de 1/4 W - 5%. Toutes les mesures sont respect à la masse, avec tension secteur 220 V (240 V UK). Image correcte et avec un voltmètre de 20.000 Ohm/V.

La casa costruttrice si riserva ai termini di legge la proprietà del presente documento con divieto di riprodurlo o divulgarlo senza sua previa autorizzazione. Inoltre declina ogni responsabilità per le possibili inesattezze contenute nel presente documento, se dovute ad errori di stampa o trascrizione. Si riserva il diritto di apportare quelle modifiche che ritenesse necessarie o utili, senza pregiudicare le caratteristiche essenziali. Tutte le resistenze prive d'indicazione s'intendono da 1/4 W - 5%. Tutte le misure s'intendono rispetto a massa con alimentazione rete 220 V (240 V UK). Immagine corretta e con un voltmetro da 20.000 Ohm/V.

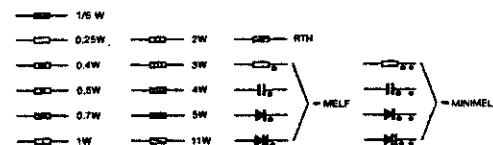

In order to ensure the maximum safety and reliability, original spare parts should always be used when replacing components. Particular care should be taken when replacing components marked with the symbol Δ .

Zur Gewährleistung von Sicherheit und Zuverlässigkeit dürfen nur Original-Ersatzteile verwendet werden. Besondere Sorgfalt wird bei den Teilen, die mit dem Symbol Δ gekennzeichnet sind, verlangt.

Pour une plus grande sécurité et fiabilité, tous les composants doivent être remplacés par des pièces originales. Il faut prêter une attention particulière à ceux portant le symbole Δ .

Ai fini della sicurezza ed affidabilità tutti i componenti devono essere sostituiti con pezzi originali.

Particolare attenzione va posta a quelli contrassegnati con il simbolo Δ .

MEASUREMENTS PERFORMED USING COLOUR BARS WITH 100% MODULATION

MESSUNGEN SIGNALTYP 100% MODULIERTES FARBBALKEN

LES MESURES SONT EFFECTUEES AVEC SIGNAL: MIRE EN COULEUR MODULEE AU 100%

RILIEVI ESEGUITI CON SEGNALE: BARRE COLORE MODULEE AL 100%

MEASUREMENTS PERFORMED WITH
ERGENISSE AUS
MESURES EFFECTUEES AVEC
RILIEVI ESEGUITI CON



Colour TV receiver
Televisiione a colori
TESI
PC 100 - 110°