



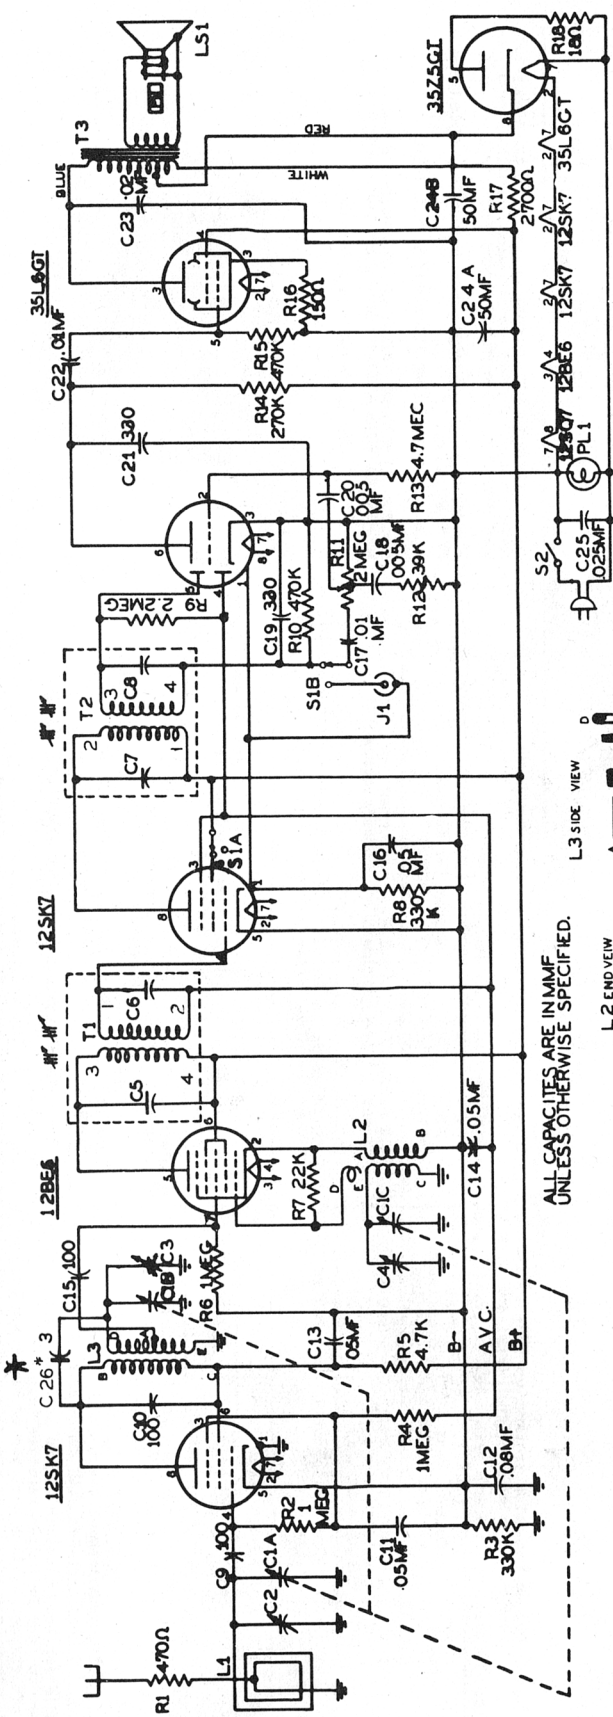

ALL CAPACITORS ARE IN MMF.  
UNLESS OTHERWISE SPECIFIED.



C600—As Fig. 1.  
C601 } As Fig. 1 except R12 is 68000 ohms and C23 is 0.01 mfd.  
C602 }

\*Note: C26 (3 mmf. ceramic) was used in some series, due to variations in L3. It was added to give a uniform gain across the band and to prevent a condition of loss of sensitivity at the high end of the band. If it is added where not required, it may be found that C3 will not have a low enough minimum capacity to peak secondary of L3.

The cathode of the 35L6GT tube should be pin 8 instead of pin 3 as shown.

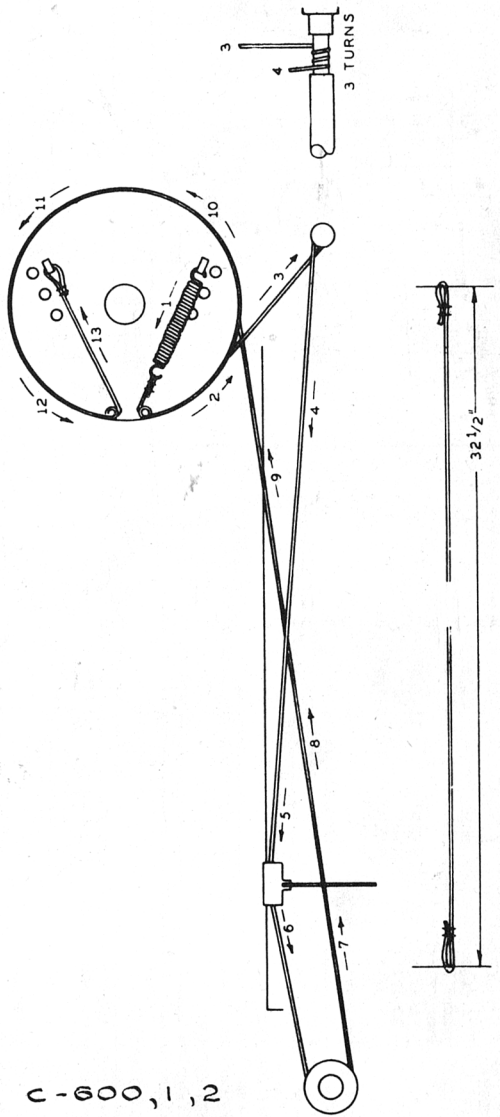
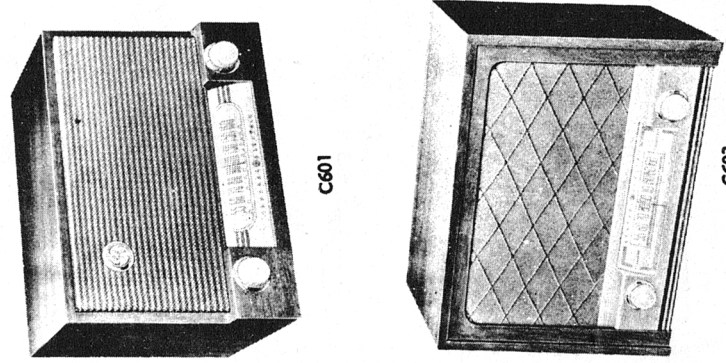


Fig. 4—Dial Stringing Diagram

C-600, 1, 2