


BE 382-U


16 — 28 m.
27 — 51 m.
187 — 578 m.

F 3027
110 — 125 V.
150 — 220 V.

187 — 578 m. A	16 — 28 m. B	187 — 578 m. C
452 Kc/s — C4	17,8 Mc/s — Y	452 Kc/s — Y
C4, C5 mín.	C4, C5 17,8 Mc/s	C6 mín.
S24, S23, S19, S20. máx.	C10, C16 máx.	
	(Este ajuste es también válido para la banda de 27-51 m.)	
	187 — 578 m.	
	1550 Kc/s — Y	
	C4, C5 1550 Kc/s	
	C9, C17 máx.	
	550 Kc/s — Y	
	C4, C5 550 Kc/s	
	C18 máx.	

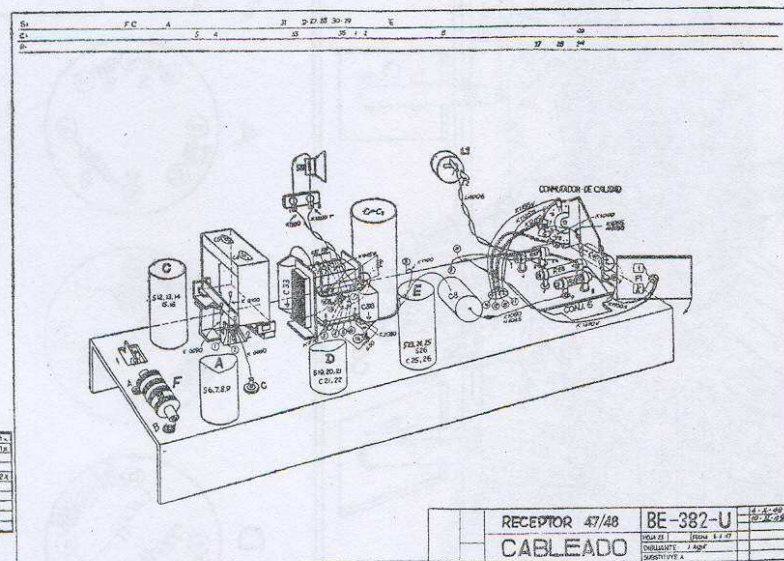

	V1		V2	V3	V4	
	UCH41		UAF41	UAF41	UL41	
	HEXODO	TRIODO				
Vf	14		12,6	12,6	45	Volts.
Va	119	85	119	28	123	Volts.
Vg'	58	—	58	25	119	Volts.
-Vg	1,3	1,3	1,4	6,5		Volts.
Ia	0,98	3	2,25	0,42	38	m.A.
Ig'	1,2	—	0,64	0,14	7,5	m.A.

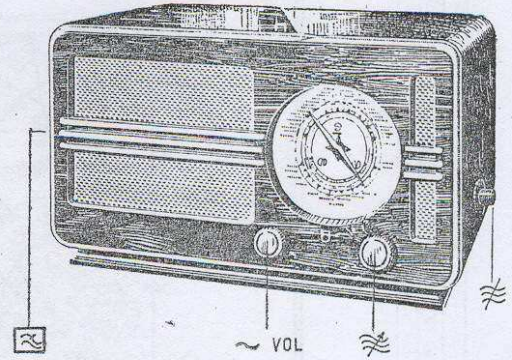

C1	40-25 pF	F 10350/40-25	R1	1200 Ω	48 468 10/1K2
C2	40-25 pF	F 11012/100	R2	0,82 M Ω	48 425 10/820K
C3	100 pF	A 3 345 000	R3	22000 Ω	48 425 10/22K
C4	12-490 pF		R4	10000 Ω	48 427 10/10K
C5	12-490 pF		R5	33000 Ω	48 426 10/33K
C6	30 pF	28 212 36	R6	12000 Ω	48 425 10/12K
C7	210 pF	48 406 02/210E	R7	0,1 M Ω	48 425 10/100K
C8	10000 pF	48 752 20/10K	R8	0,28 M Ω	49 501 02
C9	30 pF	28 212 36	R9	0,07 M Ω	
C10	30 pF	28 212 36	R10	1,5 M Ω	48 426 10/1M5
C11	220 pF	48 406 20/220E	R11	10 Ω	48 425 10/10E
C12	47000 pF	48 750 20/47K	R13	0,82 M Ω	48 425 10/820K
C13	82 pF	48 406 10/82E	R14	1,5 M Ω	48 426 10/1M5
C14	470 pF	48 406 20/470E	R15	1,5 M Ω	48 426 10/1M5
C15	200 pF	28 212 08	R16	0,1 M Ω	48 426 10/100K
C16	30 pF	28 212 36	R17	0,56 M Ω	48 425 10/560K
C17	30 pF	28 212 36	R18	0,1 M Ω	48 425 10/100K
C18	350-550 pF	49 005 46	R19	27 Ω	48 426 10/27E
C19	181 pF	48 406 10/18E	R20	100 Ω	48 427 10/100E
C20	120 pF	48 406 02/120E	R21	1200 Ω	48 425 10/1K2
C21	1.ª Bob. F.I.		R22	0,1 M Ω	48 425 10/100K
C22	1.ª Bob. F.I.		R24	160 Ω	48 494 10/160E
C23	0,22 pF	48 751 20/220K	R27	63 Ω	48 494 10/63E
C24	82 pF	48 406 10/82E	R28	710 Ω	48 495 05/710E
C25	2.ª Bob. F.I.		R29	1,5 M Ω	48 426 10/1M5
C26	2.ª Bob. F.I.		R30	22000 Ω	48 425 10/22K
C27	100 pF	48 406 10/100E	R31	170 Ω	49 378 80
C28	27000 pF	48 750 20/27K	R32	0,68 M Ω	48 425 10/680K
C29	10000 pF	48 750 20/10K	R33	1000 Ω	48 425 10/1K
C30	0,1 pF	48 751 20/100K			
C31	10000 pF	48 751 20/10K			
C32	10 pF	48 406 99/10E			
C33	4700 pF	48 758 20/4K7			
C34	1000 pF	48 757 20/1K			
C35	4700 pF	48 757 20/4K7			
C36	4700 pF	48 757 20/4K7			
C37	220 pF	48 406 20/220E			
C38	47000 pF	48 750 20/47K			
C39	470 pF	48 406 20/470E			
C40	3300 pF	48 751 10/3K3			
C41	18 pF	48 406 10/18E			
C42	110 pF	48 406 02/110E			
C43	220 pF	48 406 02/220E			
C44	10900 pF	48 757 20/10K			
C45	47000 pF	48 757 20/47K			
C46	47000 pF	48 751 20/47K			
C47	470 pF	48 406 20/470E			
C48	470 pF	48 406 20/470E			
S1, S2	A1.000.34				
S5	A3.110.60				
S6, S7, S8, S9	A3.122.06				
S12, S13, S14, S15, S16	A3.122.07				
S19, S20, S21, S22	A3.121.94				
S23, S24, S25, S26	A3.121.94				
S27, S28, S29, S30	F 2549				


DERIVADO DEL
BX-370-U

RECEPTOR 48/49 ESQUEMA

BE-382-U

HOJA nº 21	FECHA 8 x 47	21 VII 48
DIBUJANTE Agut		11 XII 47
SUBSTITUYE A:		27 II 48

S:	5	1-2	6-8	7-9	14-12-15	13-16	19-19	20-21	23-32	24-25	27	28	29-30-31
C:	34	6-37	42-35-7-11-9-10-4-11-12-8	47-1-13-14-5-2	20-15-45-48-18-19-16-17-21-23-22	14-25-28-32-26-27-29-44-38	45-30-31-3-39-40	33	36				
R:	22-31-28	27	24-2	3-4-1	5	6-7-8-9-13-32-10-11-14-15-21-16-18-19-30-17-20-21							

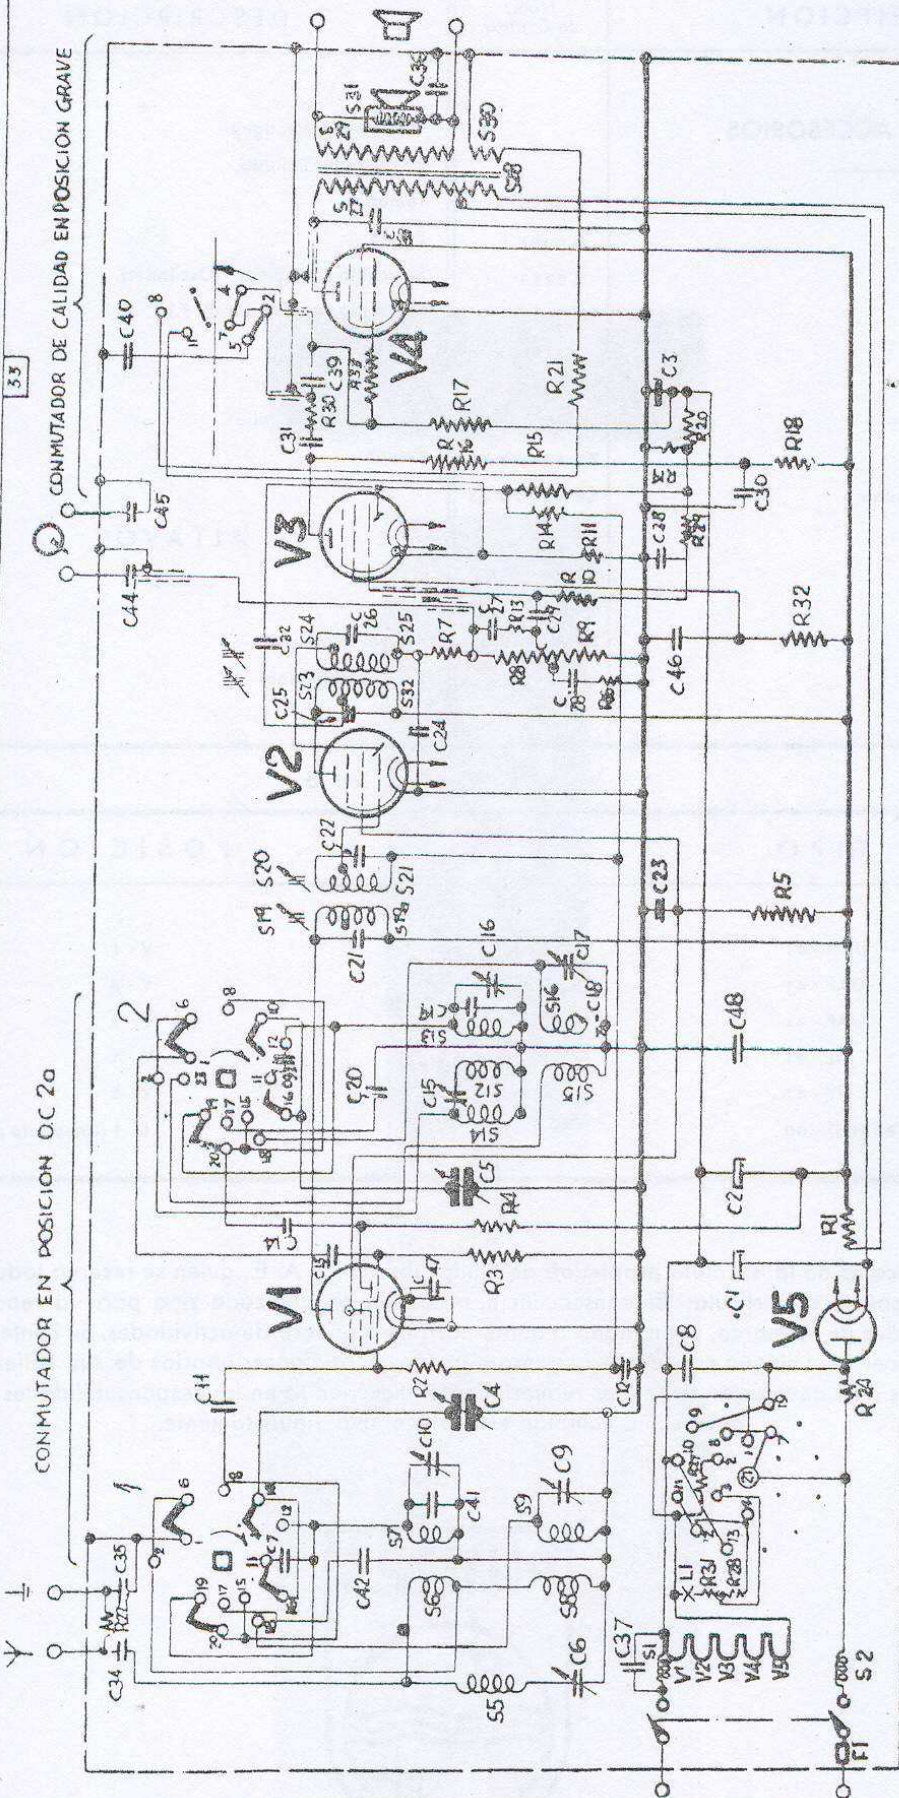

CONMUTADOR CALIDAD 3 POSICIONES: GRAVE,

ALTA FIDELIDAD, PALABRA

CAMBIADOR VOLTAJE VISTO DESDE LOS PUNTOS DE SOLDADURA

POSICIONES:	110V	125V	150V	220V
1-21	1-21	1-21	1-21	1-21
2-21	2-21	2-21	2-21	2-21
3-21	3-21	3-21	3-21	3-21
4-21	4-21	4-21	4-21	4-21

