



aiwa

AD-WX929 AD-WX828

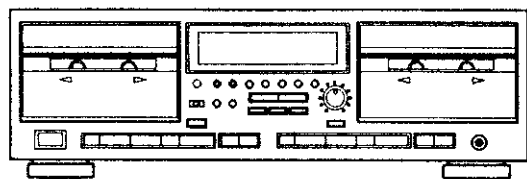

AD-WX929

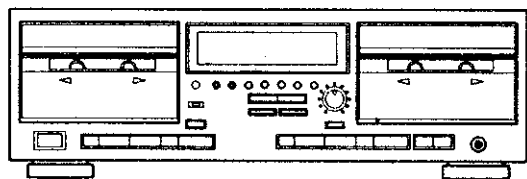

AD-WX828

STEREO CASSETTE DECK

• BASIC TAPE MECHANISM : α -14MK II

• TYPE. H.E.E.K

SPECIFICATIONS

Type	Stereo cassette tape deck	Output	PLAY/LINE OUT: 350 mV (0 VU)* Optimum load impedance 47 k Ω or more PHONES: 0.8 mW (load impedance 32 Ω , 0 VU)*
Track format	4 tracks, 2 channels	Outer dimensions	(W x H x D) AD-WX929: 430 x 140 x 317.5 mm AD-WX828: 430 x 140 x 317.5 mm
Power requirements	AD-WX929HE/AD-WX828HE AC 120/220/240V switchable, 50/60Hz AD-WX929E/AD-WX828E AC 230V, 50Hz AD-WX929K/AD-WX828K AC 240V, 50Hz	Weight	AD-WX929: 5.7 kg AD-WX828: 5.4 kg
Power consumption	23 W		
Frequency response	Metal tape: 20 - 18,000Hz -10^0 dB (-20dB Recording) CrO ₂ tape: 20 - 17,000Hz -10^0 dB (-20dB Recording) Normal tape: 20 - 16,000Hz -10^0 dB (-20dB Recording)		
Signal-to-noise ratio	78 dB (Dolby C NR ON above 5 kHz, metal tape, peak level)		
Wow and flutter	AD-WX929: 0.060 % (WRMS) AD-WX828: 0.065 % (WRMS)		
Recording system	AC bias		
Erase system	AC erase		
Motor	DC motor x 2		
Playback/recording head	Permalloy head		
Erase head	Double gap Ferrite head		
Input	REC/LINE IN: 50mV (input impedance 47 k Ω , 0 VU)*		

- Design and specifications are subject to change without notice.
- Dolby noise reduction and HX Pro headroom extension manufactured under license from Dolby Laboratories Licensing Corporation. HX Pro originated by Bang & Olufsen.
- "DOLBY", the double-D symbol $\square\square$ and "HX PRO" are trademarks of Dolby Laboratories Licensing Corporation.


CAUTION WHEN SERVICING

If the tape transport mechanisms are in the following state, an abnormal sound may be heard when the power switch is turned on and the mechanisms may not operate. In this case, turn the power switch off and then on again. The mechanisms will operate normally. (The microprocessor will be reset.)

Case : The PLAY solenoids in both decks 1 and decks 2 have drifted down from the normal positions and also the FR solenoid in one deck has drifted down from the normal position.

Case : The FR solenoids in both decks 1 and decks 2 have drifted down from the normal positions and also the PLAY solenoid in one deck has drifted down from the normal position.

TRANSISTOR ILLUSTRATION

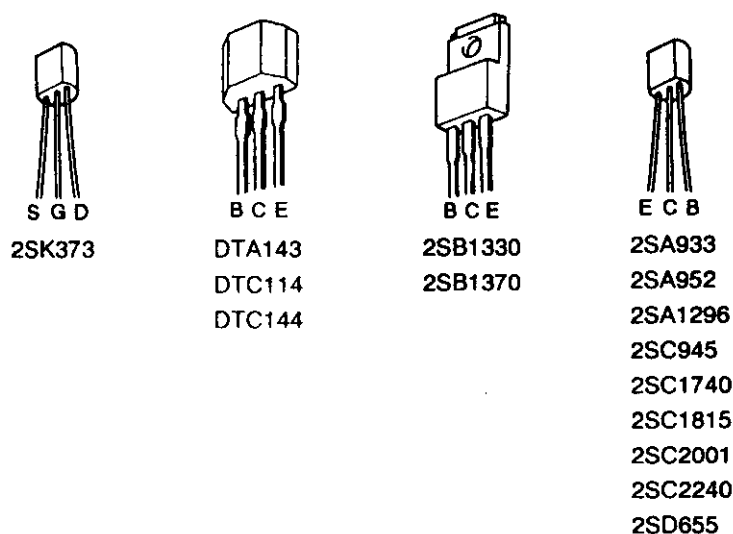

ACCESSORIES/PACKAGE LIST

PART NO. CHANGED TO	REF. NO.	PART NO.	DESCRIPTION	COMMON MODEL	Q.TY
	1	★82-DW1-904-019	IB,EK (S)	*	1
	2	★82-DW1-030-019	RC - W101 (AD - WX929)	*	1
	3	★87-034-786-019	CORD PIN 189 - 0760		1
	4	★87-042-062-019	PLUG ADPTR S - I6115		1

ELECTRICAL MAIN PARTS LIST - 1 (AD - WX929)


REF. NO.	PART NO.	DESCRIPTION	REF. NO.	PART NO.	DESCRIPTION	REF. NO.	PART NO.	DESCRIPTION	REF. NO.	PART NO.	DESCRIPTION
=== C ===			C204	★87-018-124-089	CAP, TC-U 270P-50 B	C610	★87-010-401-089	CAP, E 1-50 SME	L502	★82-231-622-080	COIL, 22MH-J
	87-001-441-019	IC, BA10358N	C209	★87-018-133-089	CAP, TC-U 4700P-16 X	C611	★87-018-132-089	CAP, TC-U 2200P-16 X	L503	★87-003-131-089	COIL, 10MH-J
	87-002-282-019	IC, BU4066B	C210	★87-018-133-089	CAP, TC-U 4700P-16 X	C612	★87-018-132-089	CAP, TC-U 2200P-16 X	L504	★87-003-131-089	COIL, 10MH-J
	87-002-444-019	IC, BU4094B	C211	★87-018-203-089	CAP, TC-U 8200P-16 Y	C613	★87-018-121-089	CAP, TC-U 150P-50 B	L601	★80-052-611-019	FLTR, MPX 85K-CAN
	87-002-669-010	IC, GP1U571X (REMOTE SENSOR)	C212	★87-018-203-089	CAP, TC-U 8200P-16 Y	C614	★87-018-121-089	CAP, TC-U 150P-50 B	L602	★80-052-611-019	FLTR, MPX 85K-CAN
	87-002-932-010	IC, HA12155MT-01	C213	★87-010-405-089	CAP, E 10-50 SME	C615	★87-010-404-089	CAP, E 4.7-50 SME	L603	★82-231-622-080	COIL, 22MH-J
	87-001-334-019	IC, L89051A	C214	★87-010-405-089	CAP, E 10-50 SME	C616	★87-010-404-089	CAP, E 4.7-50 SME	L604	★82-231-622-080	COIL, 22MH-J
	82-0M1-630-010	IC, LC866016A-5300	C215	★87-010-405-089	CAP, E 10-50 SME	C627	★87-010-404-089	CAP, E 4.7-50 SME	ΔS801	★87-036-015-019	AC SW S0DL01 (POWER)
	87-002-328-010	IC, MS218AL	C216	★87-010-405-089	CAP, E 10-50 SME	C628	★87-010-404-089	CAP, E 4.7-50 SME	ΔS802	87-036-136-019	SW ROTARY 1-1-3 H B1 (AC VOLTAGE)
	87-020-758-019	IC, NJM2068SD	C217	★87-010-384-089	CAP, E 100-25 SME	C629	★87-010-404-089	CAP, E 4.7-50 SME	SFR101	★87-024-168-089	SFR, 1K DIA6 V
	87-027-565-019	IC, TC4081BP	C218	★87-018-134-089	CAP, TC-U 0.01-16 Y	C630	★87-010-404-089	CAP, E 4.7-50 SME	SFR102	★87-024-168-089	SFR, 1K DIA6 V
			C220	★87-018-134-089	CAP, TC-U 0.01-16 Y	C631	★87-010-401-089	CAP, E 1-50 SME	SFR201	★87-024-168-089	SFR, 1K DIA6 V
=== TRANSISTOR ===			C221	★87-018-126-089	CAP, TC-U 390P-50 B	C632	★87-010-401-089	CAP, E 1-50 SME	SFR202	★87-024-168-089	SFR, 1K DIA6 V
	89-503-735-389	TR, FET 2SK373-GR (TPE2)	C222	★87-018-126-089	CAP, TC-U 390P-50 B	C633	★87-010-405-089	CAP, E 10-50 SME	SFR301	★87-024-175-089	SFR, 100K DIA6 V
	87-026-463-089	TR, 2SA933S (RS)	C301	★87-018-123-089	CAP, TC-U 220P-50 B	C634	★87-010-401-089	CAP, E 1-50 SME	SFR302	★87-024-175-089	SFR, 100K DIA6 V
	89-109-521-389	TR, 2SA952K	C302	★87-018-123-089	CAP, TC-U 220P-50 B	C636	★87-018-119-089	CAP, TC-U 100P-50 B	SFR401	★87-024-175-089	SFR, 100K DIA6 V
	89-112-965-389	TR, 2SA1296GR	C303	★87-018-131-089	CAP, TC-U 1000P-50 B	C638	★87-018-195-089	CAP, TC-U 1200P-16 X	SFR402	★87-024-175-089	SFR, 100K DIA6 V
	89-213-302-389	TR, 2S913300	C304	★87-018-131-089	CAP, TC-U 1000P-50 B	C643	★87-010-405-089	CAP, E 10-50 SME	SFR501	★87-024-172-089	SFR, 10K DIA6 V
	89-213-702-019	TR, 2S91370E	C309	★87-018-126-089	CAP, TC-U 390P-50 B	C644	★87-010-221-089	CAP, E 470-10 SME	SFR502	★87-024-172-089	SFR, 10K DIA6 V
	89-309-456-089	TR, 2SC3945L P	C310	★87-018-126-089	CAP, TC-U 390P-50 B	C645	★87-010-401-089	CAP, E 1-50 SME	SFR601	★87-024-175-089	SFR, 47K DIA6 V
	87-026-462-089	TR, 2SC1740S (RS)	C313	★87-018-131-089	CAP, TC-U 1000P-50 B	C646	★87-010-263-089	CAP, E 100-10	SFR602	★87-024-175-089	SFR, 47K DIA6 V
	89-318-155-089	TR, 2SC1815GR	C314	★87-018-131-089	CAP, TC-U 1000P-50 B	C647	★87-010-401-089	CAP, E 1-50 SME	=== FRONT CIRCUIT BOARD SECTION ===		
	89-320-011-089	TR, 2SC2001K	C317	★87-010-263-089	CAP, E 100-10	C648	★87-018-121-089	CAP, TC-U 150P-50 B	S902	87-036-170-089	SW, TACT (STOP) (D1)
	89-322-408-089	TR, 2SC2240BL	C318	★87-010-260-089	CAP, E 47-25 SME	C649	★87-018-121-089	CAP, TC-U 150P-50 B	S903	87-036-170-089	SW, TACT (STOP) (D2)
	89-406-555-089	TR, 2SC655E	C319	★87-018-131-089	CAP, TC-U 1000P-50 B	C650	★87-018-121-089	CAP, TC-U 150P-50 B	S904	87-036-170-089	SW, TACT (SYNC DUBB HIGH)
	87-026-288-089	TR, DTA143XS	C320	★87-014-081-089	PPCAP 0.01J	C651	★87-010-401-089	CAP, E 1-50 SME	S905	87-036-170-089	SW, TACT (SYNC SYSTEM) (D1)
	87-026-464-089	TR, DTC114TS	C323	★87-018-201-089	CAP, TC-U 5600P-16 X	C652	★87-010-405-089	CAP, E 10-50 SME	S906	87-036-170-089	SW, TACT (PLAY) (D1)
	87-026-215-089	TR, DTC114YS	C325	★87-010-248-089	CAP, E 220-10 SME	C654	★87-018-134-089	CAP, TC-U 0.01-16 Y	S907	87-036-170-089	SW, TACT (PLAY) (D2)
	87-026-218-089	TR, DTC144ES	C326	★87-010-401-089	CAP, E 1-50 SME	C667	★87-018-206-089	CAP, TC-U 8200P-16 Y	S908	87-036-170-089	SW, TACT (SYNC DUBB NORMAL)
=== DIODE ===			C327	★87-010-401-089	CAP, E 1-50 SME	C771	★87-010-401-089	CAP, E 1-50 SME	S909	87-036-170-089	SW, TACT (DUAL REC)
	87-001-783-089	DIODE, 1N4002-T	C401	★87-018-123-089	CAP, TC-U 220P-50 B	C772	★87-010-401-089	CAP, E 1-50 SME	S910	87-036-170-089	SW, TACT (PLAY) (D1)
	87-001-559-089	DIODE, 1SS131 (T-72)	C402	★87-018-123-089	CAP, TC-U 220P-50 B	C773	★87-010-263-089	CAP, E 100-10	S911	87-036-170-089	SW, TACT (PLAY) (D2)
	87-020-465-089	DIODE, 1SS133 T-72	C403	★87-018-131-089	CAP, TC-U 1000P-50 B	C774	★87-010-263-089	CAP, E 100-10	S912	87-036-170-089	SW, TACT (DATA SYSTEM) (D2)
	87-020-123-089	DIODE, 05A46-AT (TA)	C404	★87-018-131-089	CAP, TC-U 1000P-50 B	C775	★87-010-401-089	CAP, E 1-50 SME	S913	87-036-170-089	SW, TACT (REC FADER)
	87-017-183-089	ZENER, HZS12A3L	C409	★87-018-126-089	CAP, TC-U 390P-50 B	C776	★87-010-401-089	CAP, E 1-50 SME	S914	87-036-170-089	SW, TACT (REPEAT/BLANK SKIP)
	87-017-143-089	ZENER, HZS22-2	C410	★87-018-126-089	CAP, TC-U 390P-50 B	C778	★87-018-134-089	CAP, TC-U 0.01-16 Y	S915	87-036-170-089	SW, TACT (REPEAT/BLANK SKIP)
	87-001-636-089	ZENER, HZS3C1	C413	★87-018-131-089	CAP, TC-U 1000P-50 B	C779	★87-010-401-089	CAP, E 1-50 SME	S916	87-036-170-089	SW, TACT (REC TIME)
	87-017-101-089	ZENER, HZS6C2	C414	★87-018-131-089	CAP, TC-U 1000P-50 B	ΔC801	★87-010-401-089	CAP, E 1-50 SME	S917	87-036-170-089	SW, TACT (REPEAT/BLANK SKIP)
	87-001-936-089	ZENER, HZS7A3L	C417	★87-018-131-089	CAP, TC-U 1000P-50 B	ΔC802	★87-010-453-089	CAP ELECT 4700-25V SME	S918	87-036-170-089	SW, TACT (MS) (D1)
	87-001-911-089	ZENER, UTZJ4.7A (TAPG)	C418	★87-014-081-089	PPCAP 0.01J	ΔC803	★87-010-389-089	CAP ELECT 2200-25V SME	S919	87-036-170-089	SW, TACT (MS) (D2)
=== MAIN CIRCUIT BOARD SECTION ===			C421	★87-018-201-089	CAP, TC-U 5600P-16 X	C803	★87-010-247-089	CAP, E 100-50 SME	S920	87-036-170-089	SW, TACT (DOLBY NR)
			C423	★87-010-248-089	CAP, E 220-10 SME	C804	★87-010-405-089	CAP, E 10-50 SME	S921	87-036-170-089	SW, TACT (REV. MODE)
			C424	★87-010-401-089	CAP, E 1-50 SME	C805	★87-010-382-089	CAP, E 220-25 SME	S922	87-036-170-089	SW, TACT (REC/REC MUTE) (D2)
			C425	★87-010-401-089	CAP, E 1-50 SME	C806	★87-010-235-089	CAP, ELECT 470-16V	S923	87-036-170-089	SW, TACT (PAUSE) (D2)
			C427	★87-010-405-089	CAP, E 10-50 SME	C807	★87-010-401-089	CAP, E 1-50 SME	S924	87-036-170-089	SW, TACT (COUNTER RESET) (D1)
			C501	★87-010-404-089	CAP, E 4.7-50 SME	C808	★87-010-387-089	CAP, ELECT 470-25V	S925	87-036-170-089	SW, TACT (COUNTER RESET) (D2)
			C502	★87-010-404-089	CAP, E 4.7-50 SME	C809	★87-010-221-089	CAP, E 470-10 SME	S926	87-036-170-089	SW, TACT (PAUSE) (D1)
			C503	★87-018-121-089	CAP, TC-U 150P-50 B	ΔC810	★87-019-112-019	CAP, SG 0.01 E	S927	87-036-170-089	SW, TACT (REC/REC MUTE) (D1)
			C504	★87-018-121-089	CAP, TC-U 150P-50 B	C851	★87-010-405-089	CAP, E 10-50 SME	S928	87-036-170-089	SW, TACT (DISPLAY MODE)
			C505	★87-018-132-089	CAP, TC-U 2200P-16 X	C852	★87-010-221-089	CAP, E 470-10 SME	S929	87-036-170-089	SW, TACT (PLAY TRIM)
			C506	★87-018-132-089	CAP, TC-U 2200P-16 X	C853	★87-010-406-089	CAP, E 22-50 SME	=== JACK CIRCUIT BOARD SECTION ===		
			C521	★87-018-131-089	CAP, TC-U 1000P-50 B	C854	★87-010-406-089	CAP, E 22-50 SME	C777	★87-018-134-089	CAP, TC-U 0.01-16 Y
			C522	★87-018-131-089	CAP, TC-U 1000P-50 B	C855	★87-018-134-089	CAP, TC-U 0.01-16 Y	J771	★87-009-355-019	JACK, 6.3 GLD HLJ1520 (PHONES)
			C524	★87-010-405-089	CAP, E 10-50 SME	ΔF801	87-035-367-019	FUSE, 3.15A 250V TE (E, K)	=== DECK-1 CIRCUIT BOARD SECTION ===		
			C601	★87-018-121-089	CAP, TC-U 150P-50 B	ΔF801	87-035-191-019	FUSE, 3315AT (HE)	S1	87-036-110-019	SW, PUSH (PLAY)
			C602	★87-018-121-089	CAP, TC-U 150P-50 B	J772	★87-009-394-019	JACK PIN 4P EARTH (LINE IN/OUT)	S2	86-575-632-210	SW, FR (FR)
			C603	★87-010-404-089	CAP, E 4.7-50 SME	L301	★80-054-618-010	COIL, HX85K-4	S3	87-036-110-019	SW, PUSH (ST)
			C604	★87-010-404-089	CAP, E 4.7-50 SME	L302	★80-054-618-010	COIL, HX85K-4	S4	87-036-109-019	SW, PUSH (CRO2)
			C605	★87-010-546-089	CAP, E 0.33-50 SME	L303	★80-054-617-010	COIL, OSC 85K-4	S5	87-036-109-019	SW, PUSH (REA)
			C606	★87-010-546-089	CAP, E 0.33-50 SME	L401	★80-054-618-010	COIL, HX85K-4	S6	87-036-109-019	SW, PUSH (REB)
			C607	★87-010-402-089	CAP, E 2.2-50 SME	L402	★80-054-618-010	COIL, HX85K-4	S7	87-036-110-019	SW, PUSH (MT)
			C608	★87-010-402-089	CAP, E 2.2-50 SME	L403	★80-054-617-010	COIL, OSC 85K-4			
			C609	★87-010-401-089	CAP, E 1-50 SME	L501	★82-231-622-080	COIL, 22MH-J			


REF. NO.	PART NO.	DESCRIPTION	REF. NO.	PART NO.	DESCRIPTION
SFR1	★87-024-331-019	SFR, 5K	M1	87-045-348-019	MOT, SHW 2L 70 (D1)
SFR2	★87-024-331-019	SFR, 5K	M11	87-045-348-019	MOT, SHW 2L 70 (D2)
SOL1	★86-575-622-019	SOL ASSY (PLAY)	ΔPT801	82-DW1-621-019	PT, HE (HE)
SOL2	★86-575-622-019	SOL ASSY (FR)	ΔPT801	82-DW1-622-019	PT, E (E)
=== DECK-2 CIRCUIT BOARD SECTION ===					
S11	87-036-110-019	SW, PUSH (PLAY)	ΔPT801	82-DW1-623-019	PT, K (K)
S12	86-575-632-210	SW, FR (FR)	RPEH	87-046-392-019	HEAD, RPEH, HADKHS598A (D1)
S13	87-036-110-019	SW, PUSH (CST)	RPEH	87-046-392-019	HEAD, RPEH, HADKHS598A (D2)
S14	87-036-109-019	SW, PUSH (CR02)			
S15	87-036-109-019	SW, PUSH (REA)			
S16	87-036-109-019	SW, PUSH (REB)			
S17	87-036-110-019	SW, PUSH (MT)			
SFR11	★87-024-331-019	SFR, 5K			
SFR12	★87-024-331-019	SFR, 5K			
SOL11	★86-575-622-019	SOL ASSY (PLAY)			
SOL12	★86-575-622-019	SOL ASSY (FR)			
=== FL CIRCUIT BOARD SECTION ===					
C901	★87-010-408-089	CAP, E 47-50 SME			
C902	★87-010-405-089	CAP, E 10-50 SME			
C903	★87-010-402-089	CAP, E 2.2-50 SME			
C904	★87-010-405-089	CAP, E 10-50 SME			
C905	★87-010-405-089	CAP, E 10-50 SME			
C908	★87-018-109-089	CAP, TC-U 22P-50 SL			
C909	★87-018-109-089	CAP, TC-U 22P-50 SL			
C910	★87-018-214-089	CAP, TC-U 0.1-50 F			
C911	★87-010-405-089	CAP, E 10-50 SME			
C912	★87-018-127-089	CAP, TC-U 47P-50 B			
C913	★87-010-252-089	CAP ELECT (TAPG) 1000-6.3V			
C971	★87-010-244-089	CAP, E 22-16 SL			
C972	★87-010-417-089	CAP, E 2.2-35 SL			
C973	★87-010-244-089	CAP, E 22-16 SL			
C974	★87-010-417-089	CAP, E 2.2-35 SL			
C975	★87-010-405-089	CAP, E 10-50 SME			
C978	★87-018-209-089	CAP, TC-U 0.1-50 F			
CF901	★87-030-264-089	CERA LOCK (MU) 12.0MHZ			
FL901	82-DW1-623-019	FL, BJ 108GK (DISPLAY)			
L901	87-003-098-089	COIL, 2.2UH			
S901	82-DW1-639-019	SW, SL SSSF013 (TIMER)			
VR901	★82-DW1-640-019	VR, 10K8 RK11K130 (REC LEVEL)			
=== RELAY-1 CIRCUIT BOARD SECTION ===					
=== RELAY-2 CIRCUIT BOARD SECTION ===					
=== SENSOR-1 CIRCUIT BOARD SECTION ===					
IC1	87-001-367-019	P-SMSR, SPI-315-05-CD			
=== SENSOR-2 CIRCUIT BOARD SECTION ===					
IC11	87-001-367-019	P-SMSR, SPI-315-05-CD			
=== POWER-1 CIRCUIT BOARD SECTION ===					
=== POWER-2 CIRCUIT BOARD SECTION ===					
=== MISCELLANEOUS ===					
Δ	★82-187-797-019	AC CORD (E) (HE, E)			
Δ	★82-187-796-019	AC CORD (BS) (K)			


ELECTRICAL MAIN PARTS LIST - 2 (AD - WX828)

REF. NO.	PART NO.	DESCRIPTION	REF. NO.	PART NO.	DESCRIPTION
=== IC ===					
	87-002-282-019	IC, BU4066B	C216	★87-010-405-089	CAP, E 10-50 SME
	87-002-444-019	IC, BU4094B	C217	★87-010-384-089	CAP, E 100-25 SME
	87-002-669-010	IC, GP 1U 571X (REMOTE SENSOR)	C218	★87-018-134-089	CAP, TC-U 0.01-16 Y
	87-002-932-010	IC, HA12155NT-01	C220	★87-018-134-089	CAP, TC-U 0.01-16 Y
	87-001-334-019	IC, LB 9051A	C221	★87-018-126-089	CAP, TC-U 390P-50 B
	82-DW1-630-010	IC, LC866016A-5300	C222	★87-018-123-089	CAP, TC-U 220P-50 B
	87-002-328-010	IC, M5218AL	C301	★87-018-123-089	CAP, TC-U 220P-50 B
	87-020-758-019	IC, NJM 2068 SD	C302	★87-018-123-089	CAP, TC-U 220P-50 B
	87-027-565-019	IC, TC4081BP	C303	★87-018-131-089	CAP, TC-U 1000P-50 B
=== TRANSISTOR ===					
	89-503-735-089	TR, FET 2SK373-GR (TPE2)	C304	★87-018-131-089	CAP, TC-U 1000P-50 B
	87-026-463-089	TR, 2SA933S (RS)	C309	★87-018-126-089	CAP, TC-U 390P-50 B
	89-109-521-089	TR, 2SA952K	C310	★87-018-126-089	CAP, TC-U 390P-50 B
	89-112-965-089	TR, 2SA1296GR	C313	★87-018-131-089	CAP, TC-U 1000P-50 B
	89-213-302-089	TR, 2SB1330Q	C314	★87-018-131-089	CAP, TC-U 1000P-50 B
	89-213-702-019	TR, 2SB1370E	C317	★87-010-260-089	CAP, E 47-25 SME
	87-026-462-089	TR, 2SC1740S (RS)	C318	★87-010-260-089	CAP, E 47-25 SME
	89-309-456-089	TR, 2SC945L P	C319	★87-018-131-089	CAP, TC-U 1000P-50 B
	89-318-155-089	TR, 2SC1815GR	C320	★87-014-081-089	PPCAP, 0.01U
	89-320-011-089	TR, 2SC2001K	C323	★87-018-201-089	CAP, TC-U 5600P-16 X
	89-322-406-089	TR, 2SC2240BL	C325	★87-010-248-089	CAP, E 220-10 SME
	89-406-555-089	TR, 2SD655E	C326	★87-010-401-089	CAP, E 1-50 SME
	87-026-288-089	TR, DTA143XS	C327	★87-010-401-089	CAP, E 1-50 SME
	87-026-464-089	TR, DTC114TS	C329	★87-010-405-089	CAP, E 10-50 SME
	87-026-215-089	TR, DTC114YS	C601	★87-018-121-089	CAP, TC-U 150P-50 B
	87-026-218-089	TR, DTC144ES	C602	★87-018-121-089	CAP, TC-U 150P-50 B
=== DIODE ===					
	87-001-783-089	DIODE, 1N4002-T	C603	★87-010-404-089	CAP, E 4.7-50 SME
	87-001-559-089	DIODE, 1SS131 (T-72)	C604	★87-010-404-089	CAP, E 4.7-50 SME
	87-020-465-089	DIODE, 1SS133 T-72	C605	★87-010-546-089	CAP, E 0.33-50 SME
	87-020-123-089	DIODE, DS446-AT (TA)	C607	★87-010-402-089	CAP, E 2.2-50 SME
	87-017-183-089	ZENER, HZS12A3L	C608	★87-010-402-089	CAP, E 2.2-50 SME
	87-017-143-089	ZENER, HZS22-2	C609	★87-010-401-089	CAP, E 1-50 SME
	87-001-636-089	ZENER, HZS3C1	C610	★87-010-401-089	CAP, E 1-50 SME
	87-001-936-089	ZENER, HZS7A3L	C611	★87-018-132-089	CAP, TC-U 2200P-16 X
	87-001-911-089	ZENER, UTZJ4.7A (TAPG)	C612	★87-018-132-089	CAP, TC-U 2200P-16 X
=== MAIN CIRCUIT BOARD SECTION ===					
C101	★87-018-121-089	CAP, TC-U 150P-50 B	C613	★87-018-121-089	CAP, TC-U 150P-50 B
C102	★87-018-121-089	CAP, TC-U 150P-50 B	C614	★87-018-121-089	CAP, TC-U 150P-50 B
C103	★87-018-123-089	CAP, TC-U 220P-50 B	C615	★87-010-404-089	CAP, E 4.7-50 SME
C104	★87-018-123-089	CAP, TC-U 220P-50 B	C616	★87-010-404-089	CAP, E 4.7-50 SME
C109	★87-010-405-089	CAP, E 10-50 SME	C627	★87-010-404-089	CAP, E 4.7-50 SME
C110	★87-010-405-089	CAP, E 10-50 SME	C628	★87-010-404-089	CAP, E 4.7-50 SME
C111	★87-010-405-089	CAP, E 10-50 SME	C631	★87-010-401-089	CAP, E 1-50 SME
C112	★87-010-405-089	CAP, E 10-50 SME	C632	★87-010-401-089	CAP, E 1-50 SME
C117	★87-018-129-089	CAP, TC-U 680P-50 B	C633	★87-010-405-089	CAP, E 10-50 SME
C118	★87-018-129-089	CAP, TC-U 680P-50 B	C634	★87-010-401-089	CAP, E 1-50 SME
C119	★87-010-404-089	CAP, E 4.7-50 SME	C636	★87-018-119-089	CAP, TC-U 100P-50 B
C120	★87-010-404-089	CAP, E 4.7-50 SME	C638	★87-018-195-089	CAP, TC-U 1200P-16 X
C121	★87-010-384-089	CAP, E 100-25 SME	C643	★87-010-405-089	CAP, E 10-50 SME
C122	★87-018-134-089	CAP, TC-U 0.01-16 Y	C644	★87-010-370-089	CAP, E 330-6.3 SME
C124	★87-018-134-089	CAP, TC-U 0.01-16 Y	C645	★87-010-401-089	CAP, E 1-50 SME
C125	★87-018-126-089	CAP, TC-U 390P-50 B	C646	★87-010-401-089	CAP, E 1-50 SME
C126	★87-018-123-089	CAP, TC-U 220P-50 B	C647	★87-010-401-089	CAP, E 1-50 SME
C203	★87-018-124-089	CAP, TC-U 270P-50 B	C648	★87-018-121-089	CAP, TC-U 150P-50 B
C204	★87-018-124-089	CAP, TC-U 270P-50 B	C649	★87-018-121-089	CAP, TC-U 150P-50 B
C213	★87-010-405-089	CAP, E 10-50 SME	C650	★87-018-121-089	CAP, TC-U 150P-50 B
C214	★87-010-405-089	CAP, E 10-50 SME	C651	★87-010-401-089	CAP, E 1-50 SME
C215	★87-010-405-089	CAP, E 10-50 SME	C652	★87-010-405-089	CAP, E 10-50 SME
			C653	★87-018-134-089	CAP, TC-U 0.01-16 Y
			C654	★87-018-134-089	CAP, TC-U 0.01-16 Y
			C671	★87-018-134-089	CAP, TC-U 0.01-16 Y
			C672	★87-018-134-089	CAP, TC-U 0.01-16 Y
			C771	★87-010-401-089	CAP, E 1-50 SME
			C772	★87-010-401-089	CAP, E 1-50 SME
			C773	★87-010-263-089	CAP, E 100-10


9

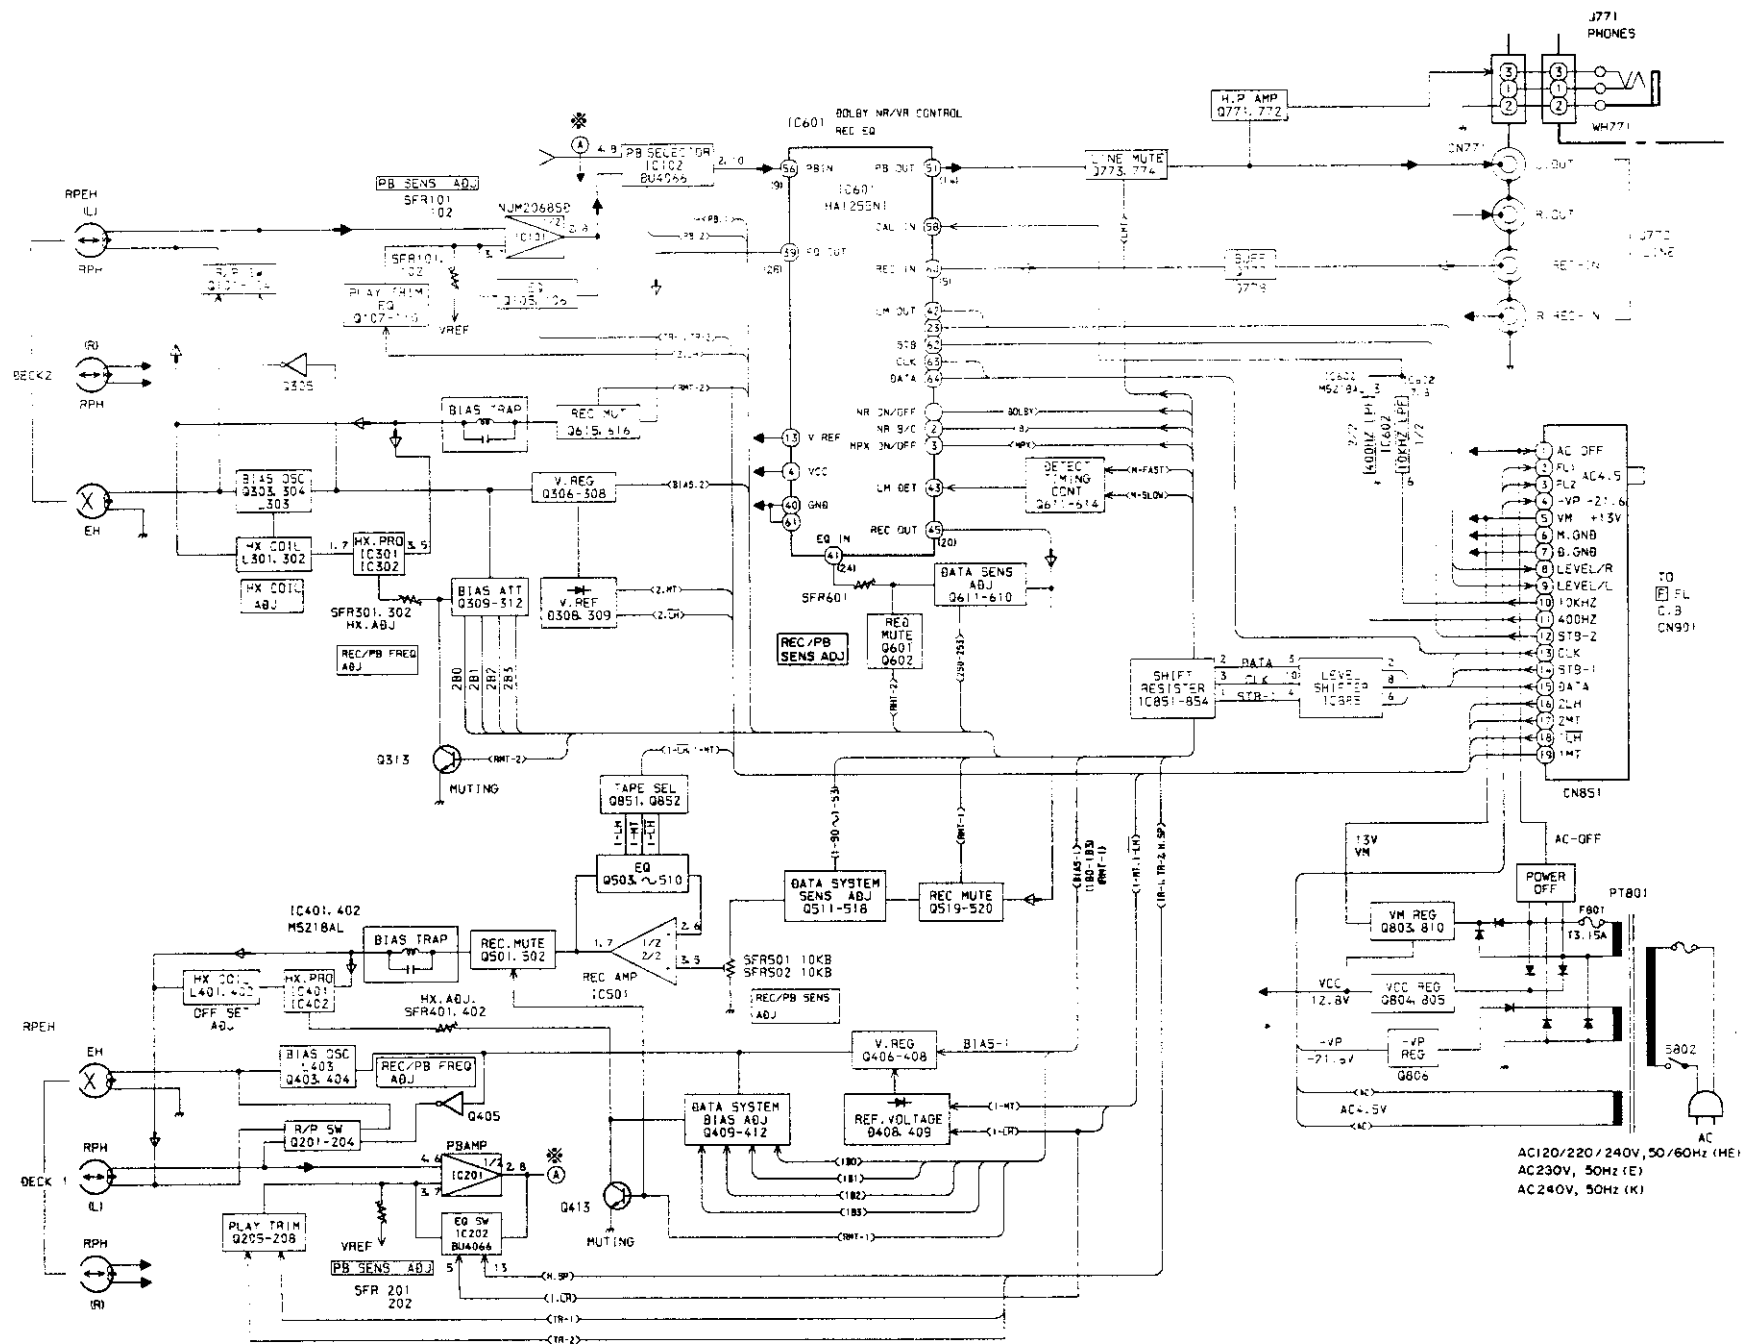


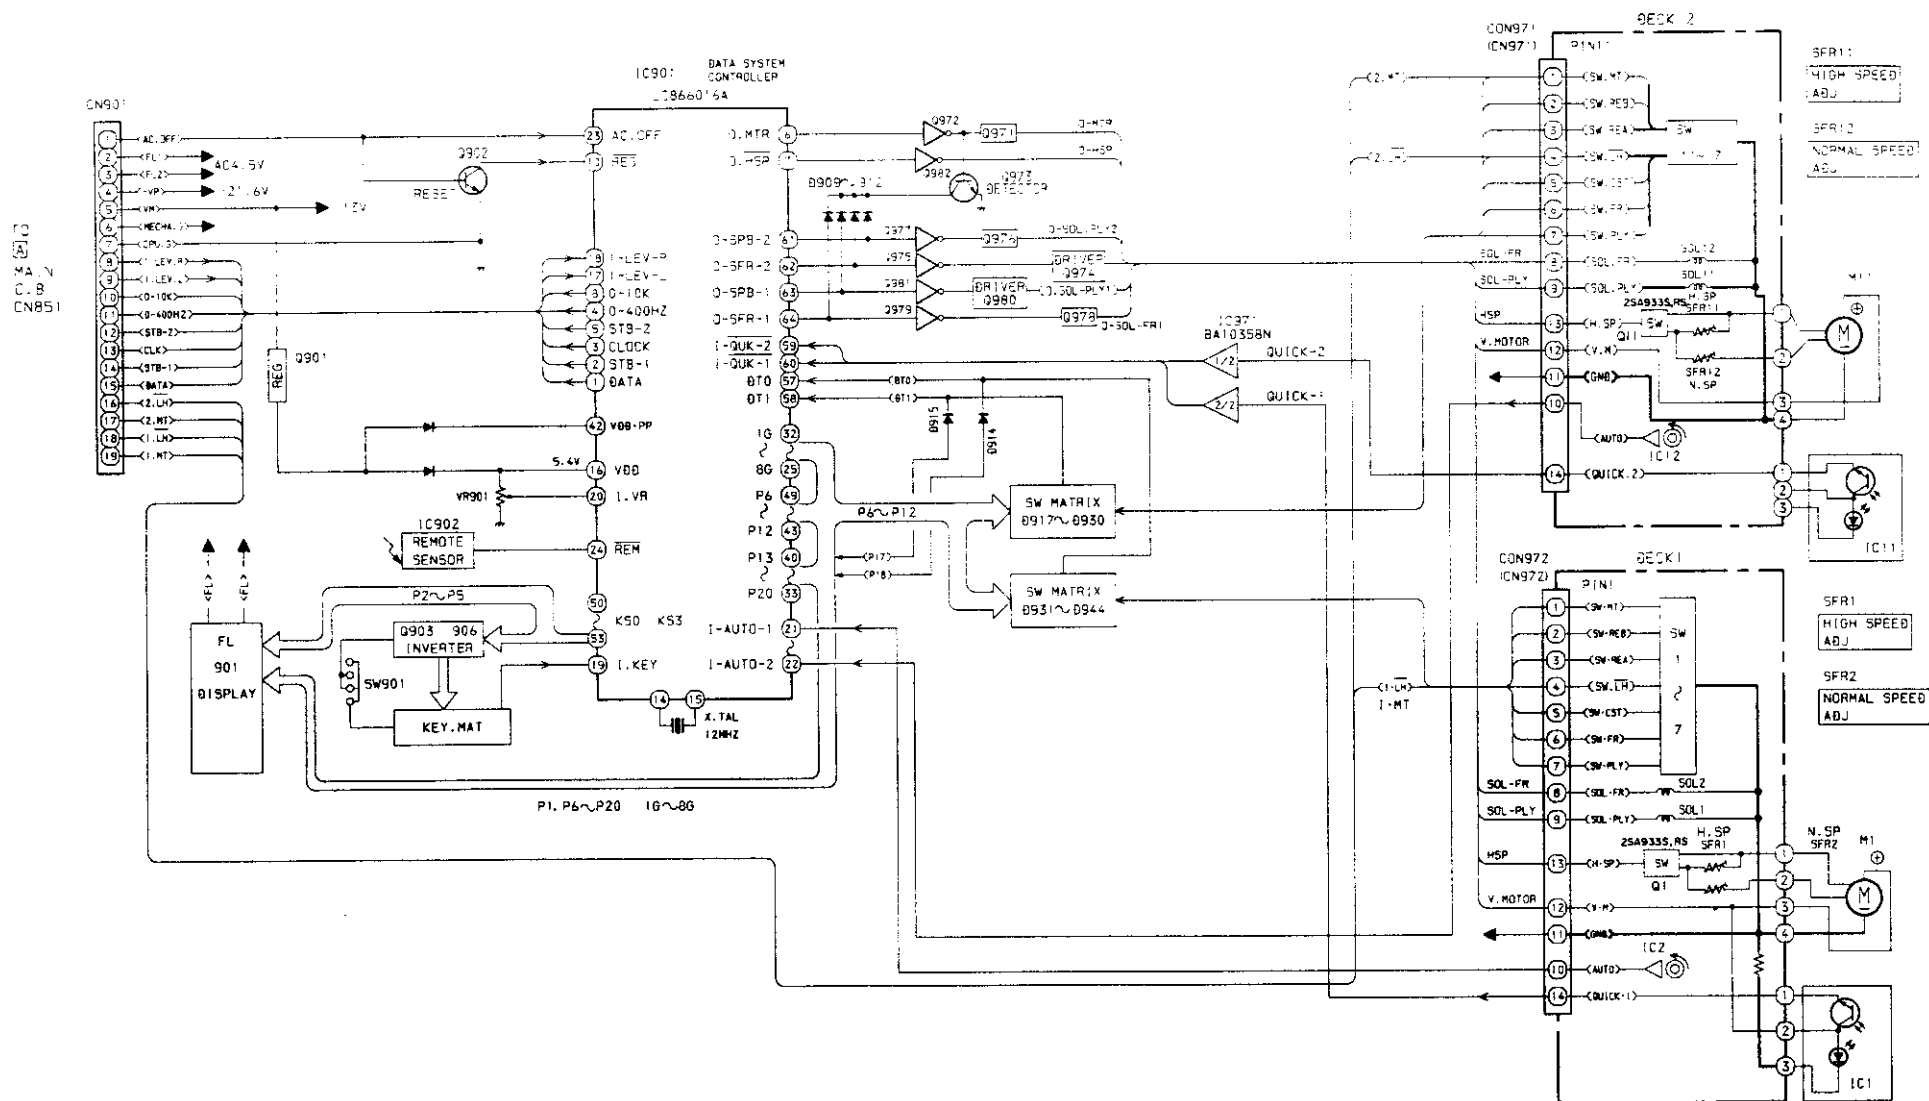


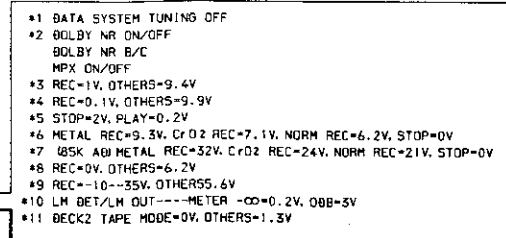

L POWER-2 C.B

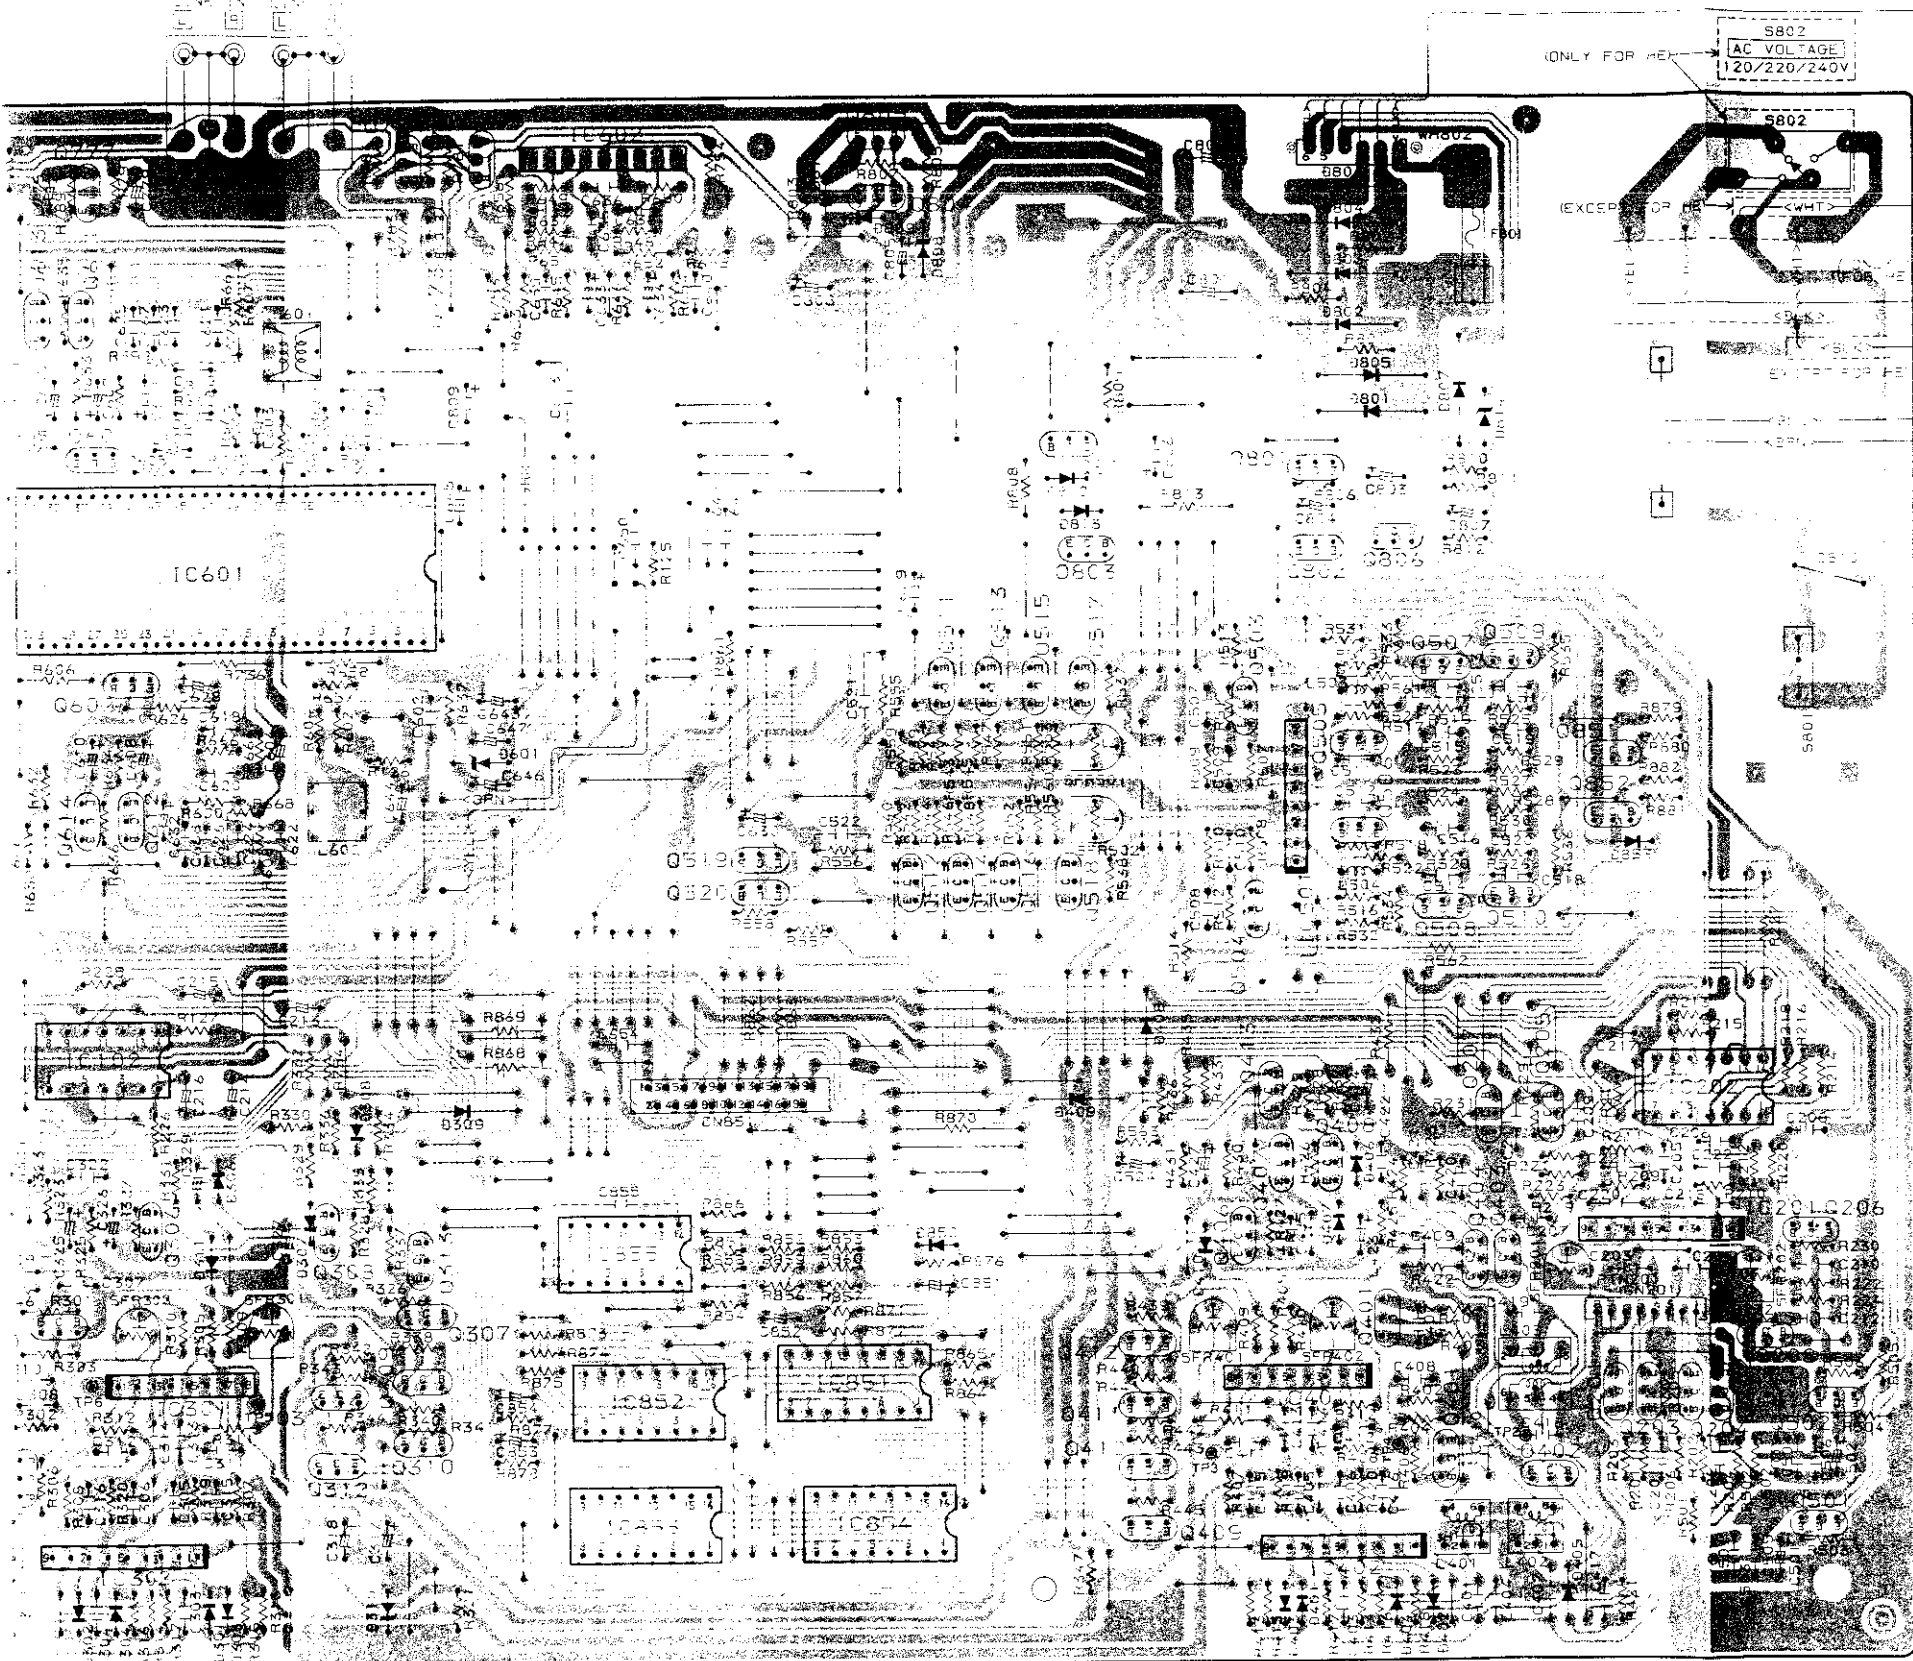


(ONLY FOR PER) S802 AC VOLTAGE 120/220/240V



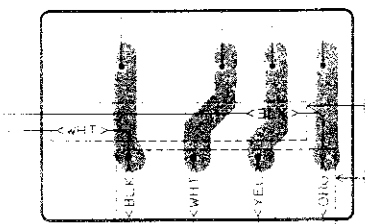



K POWER-1 C.B


A MAIN C.B

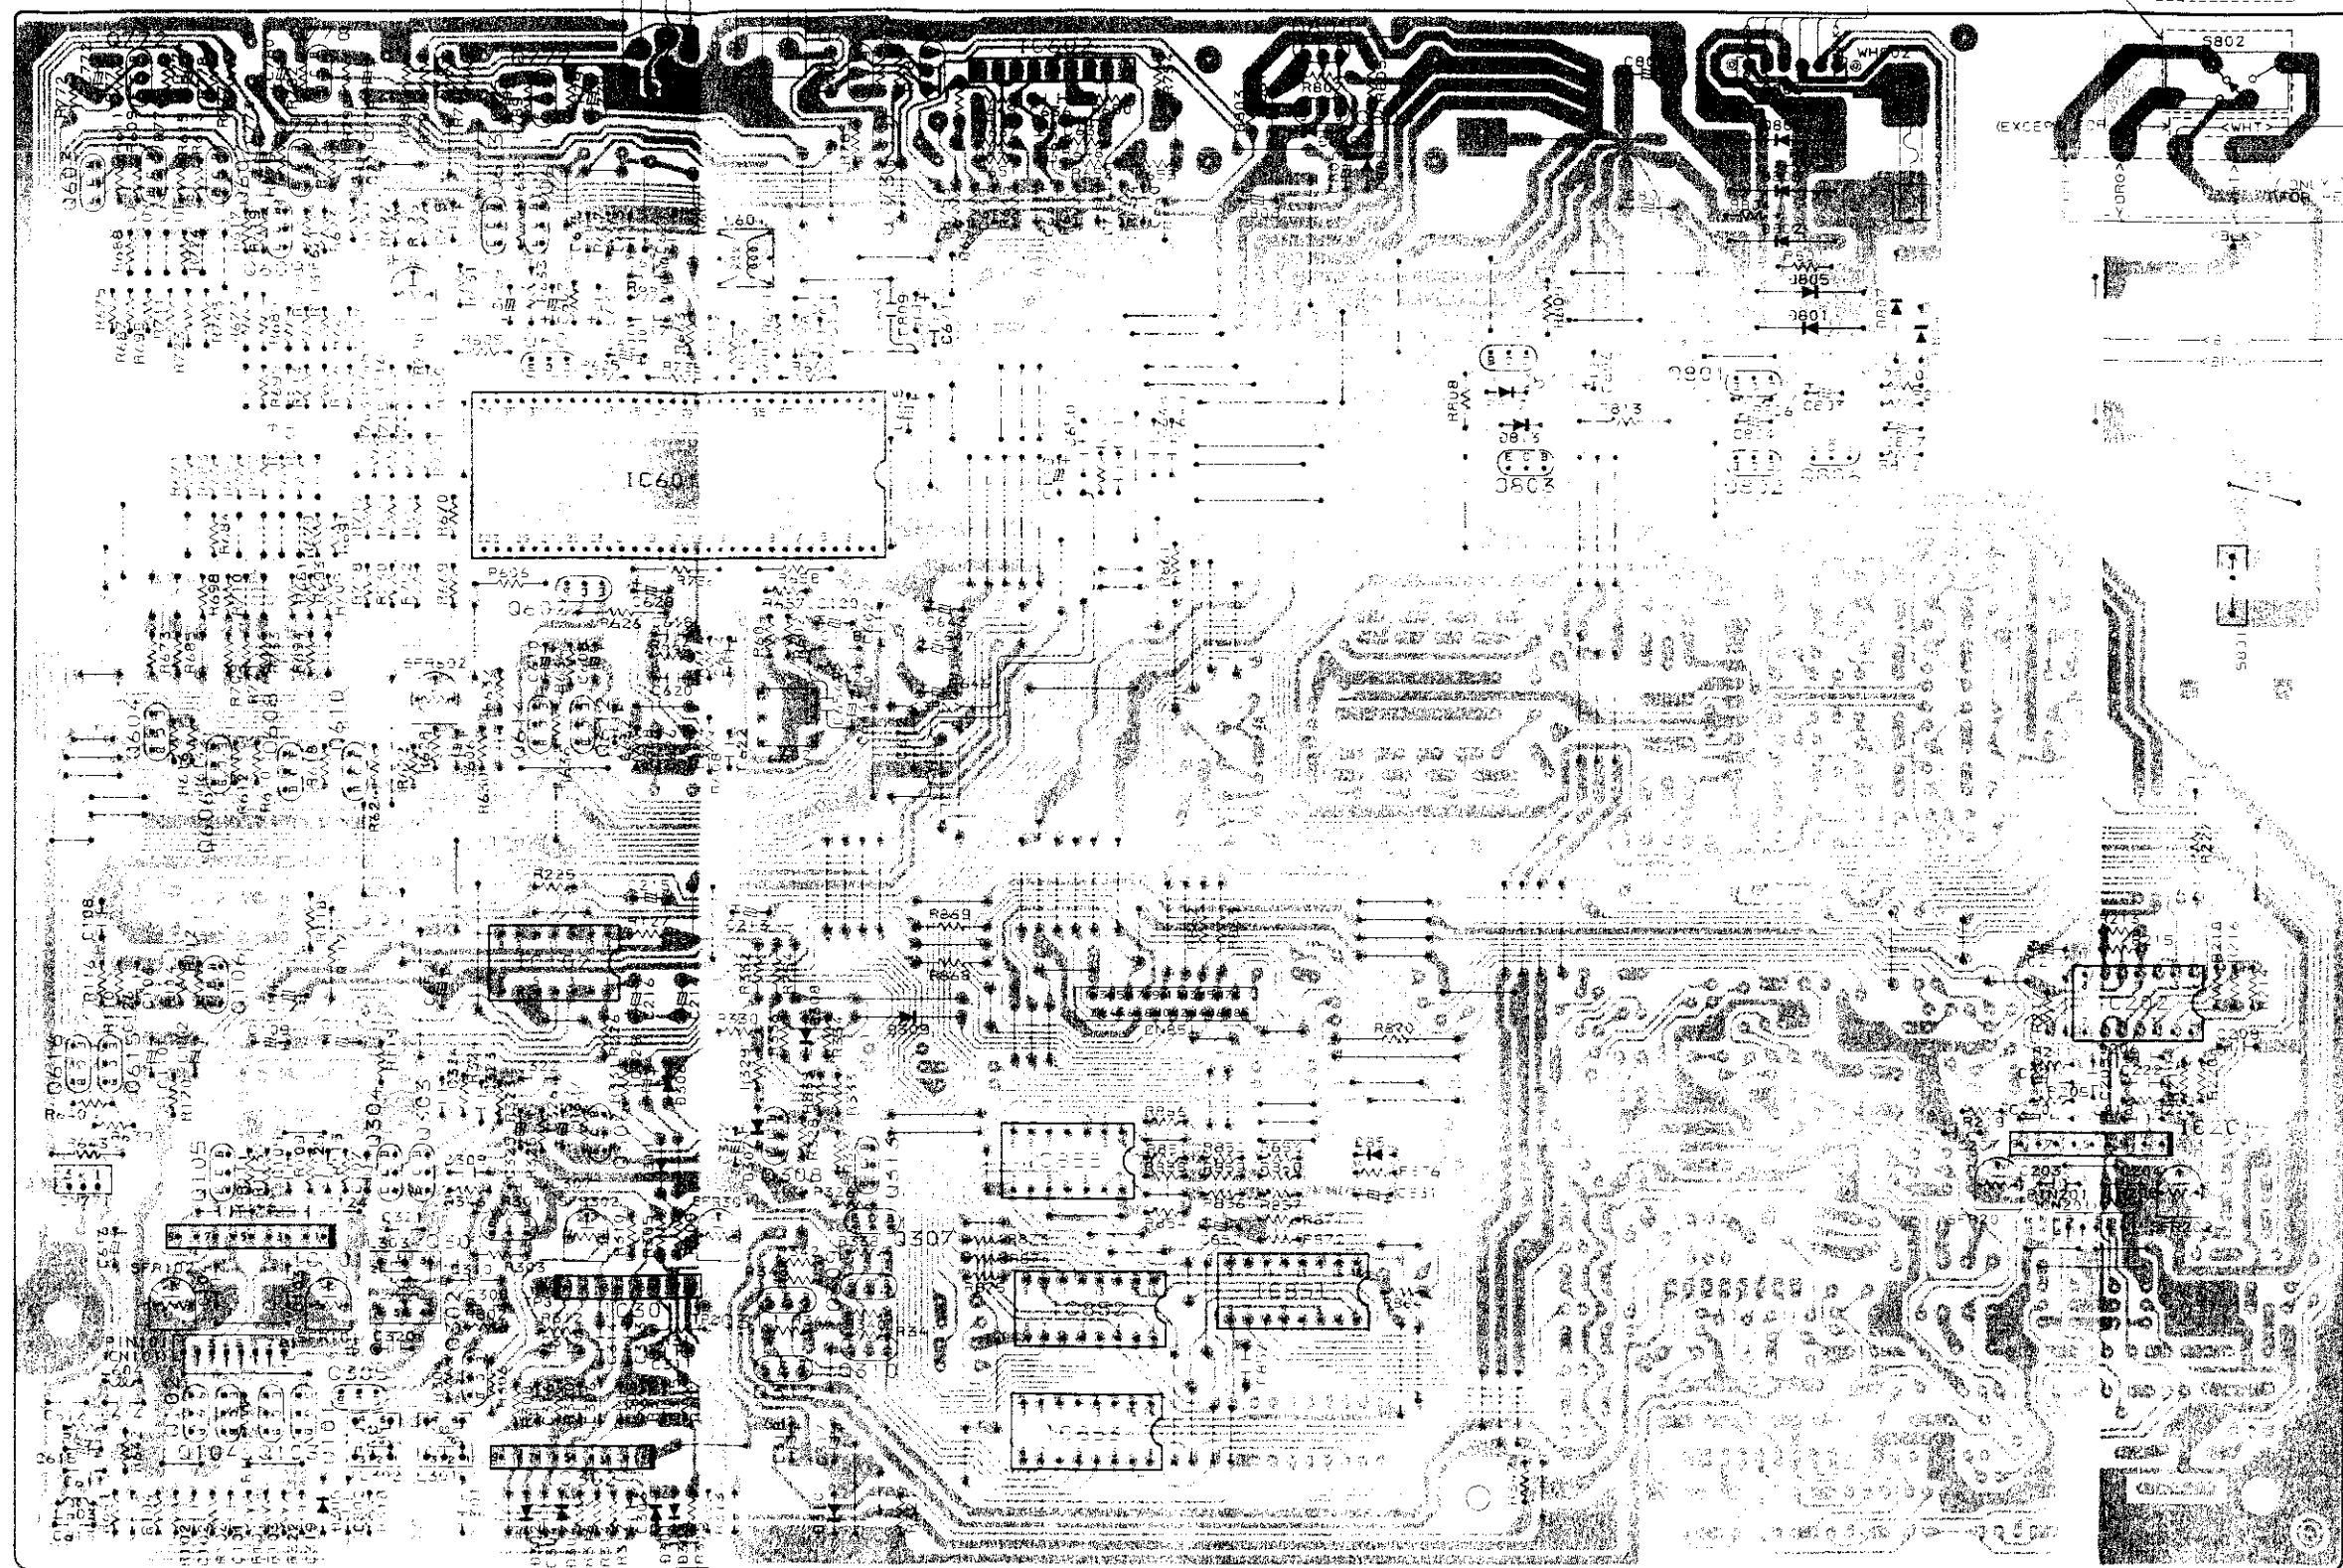

J POWER-2 C.B

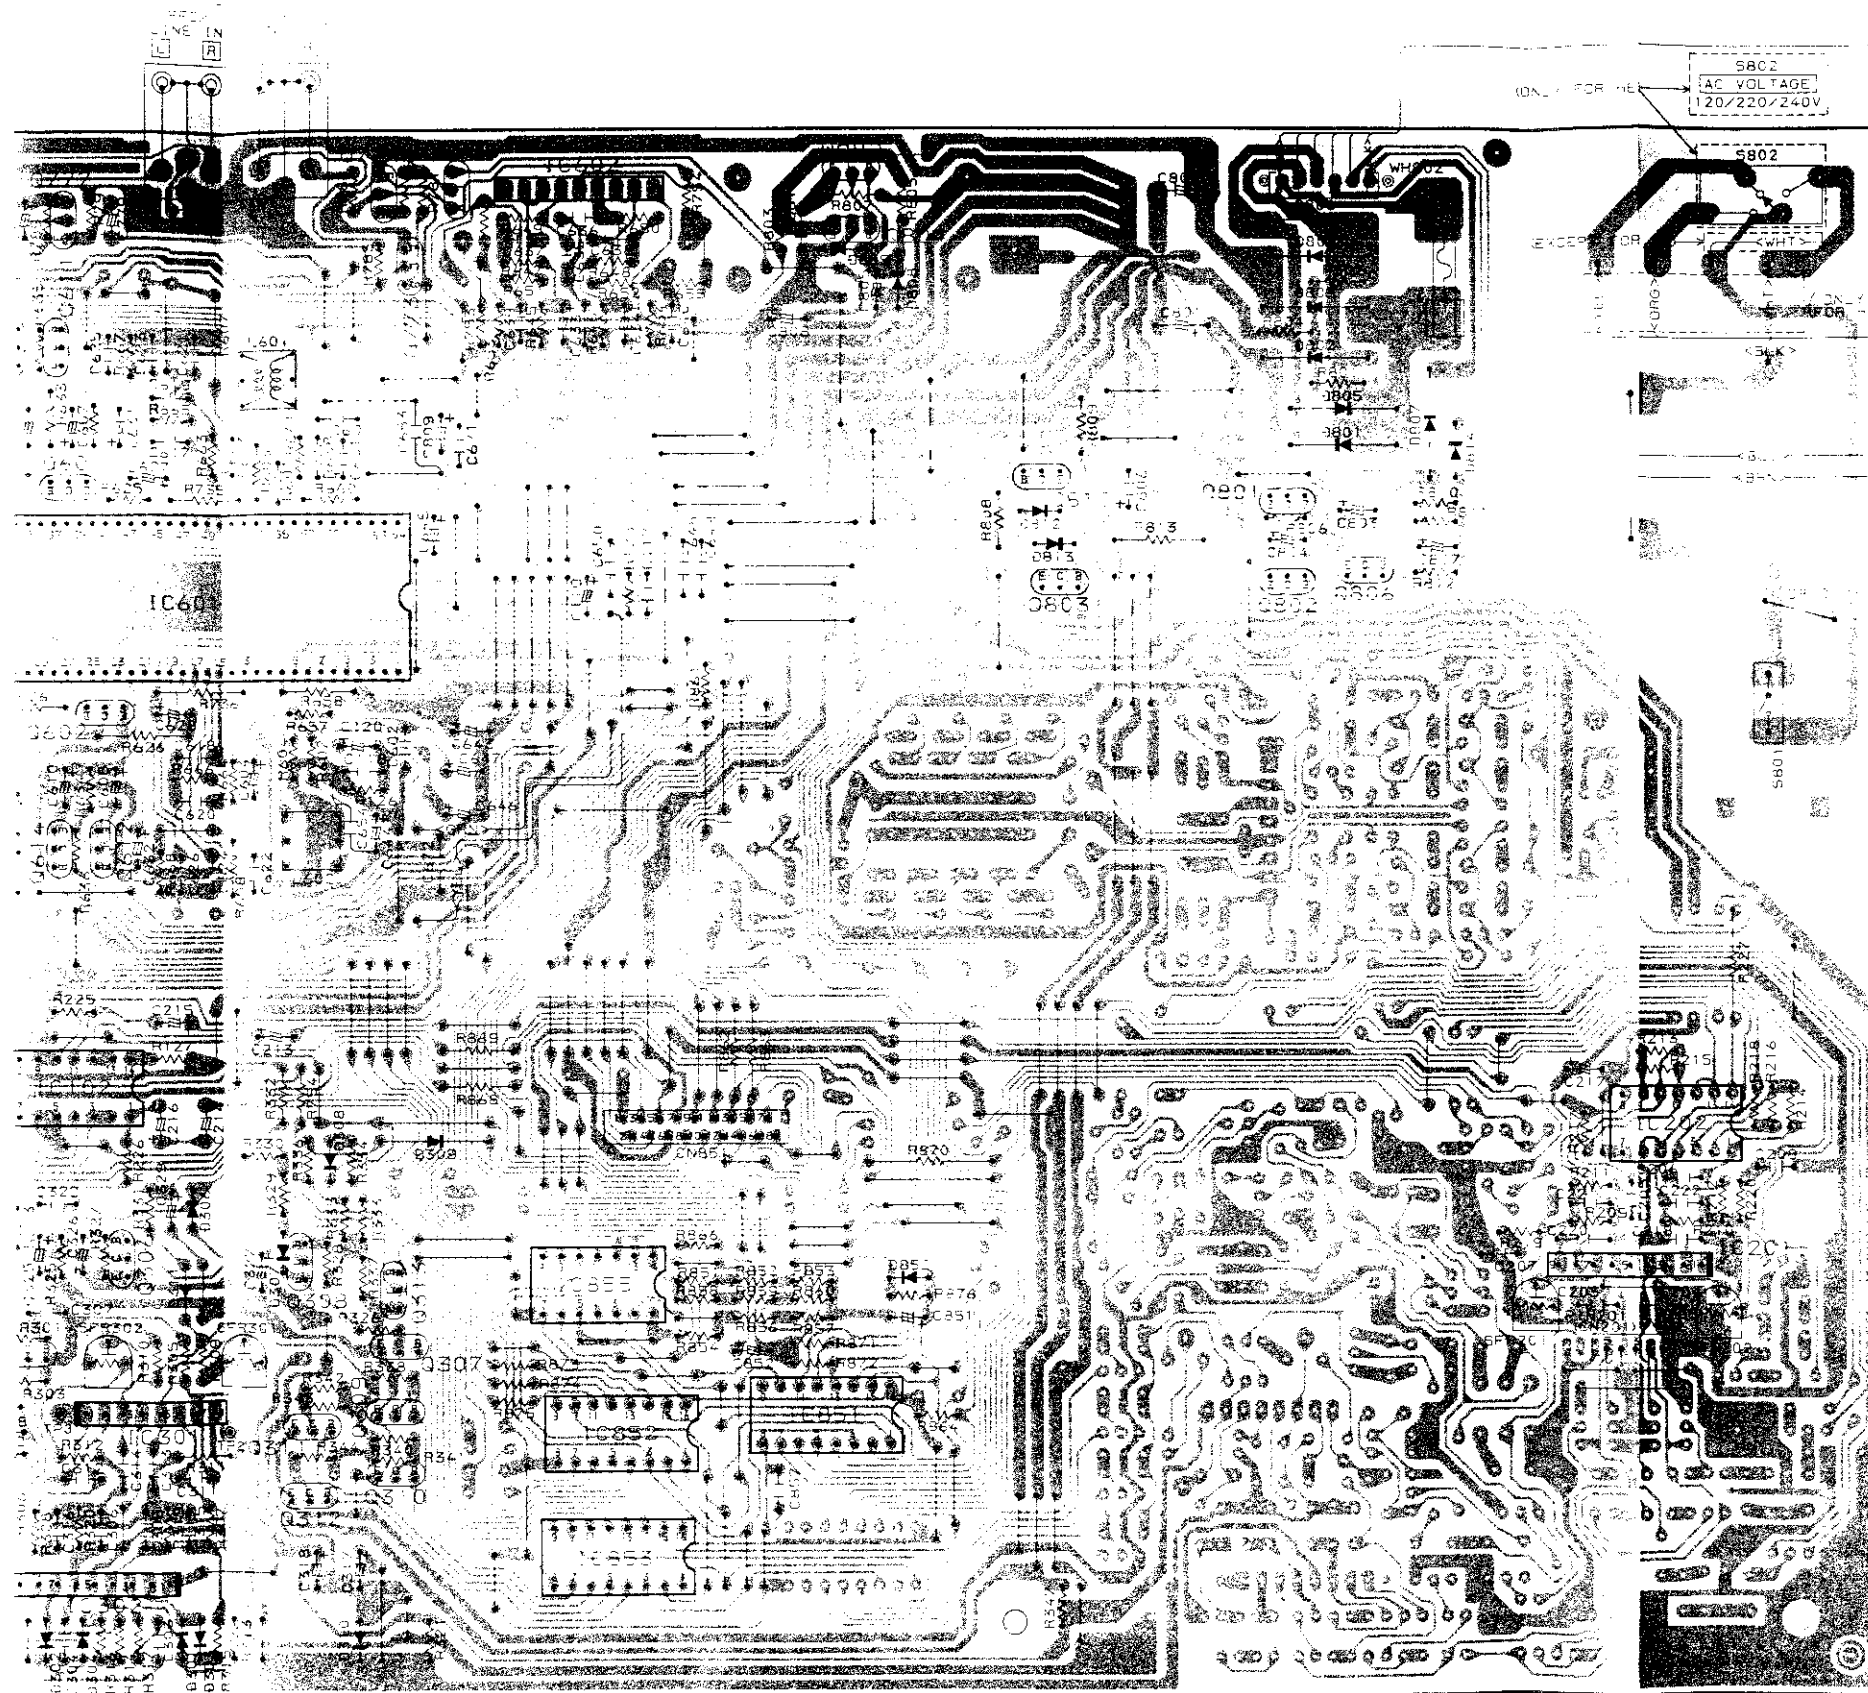

I POWER-1 C.B

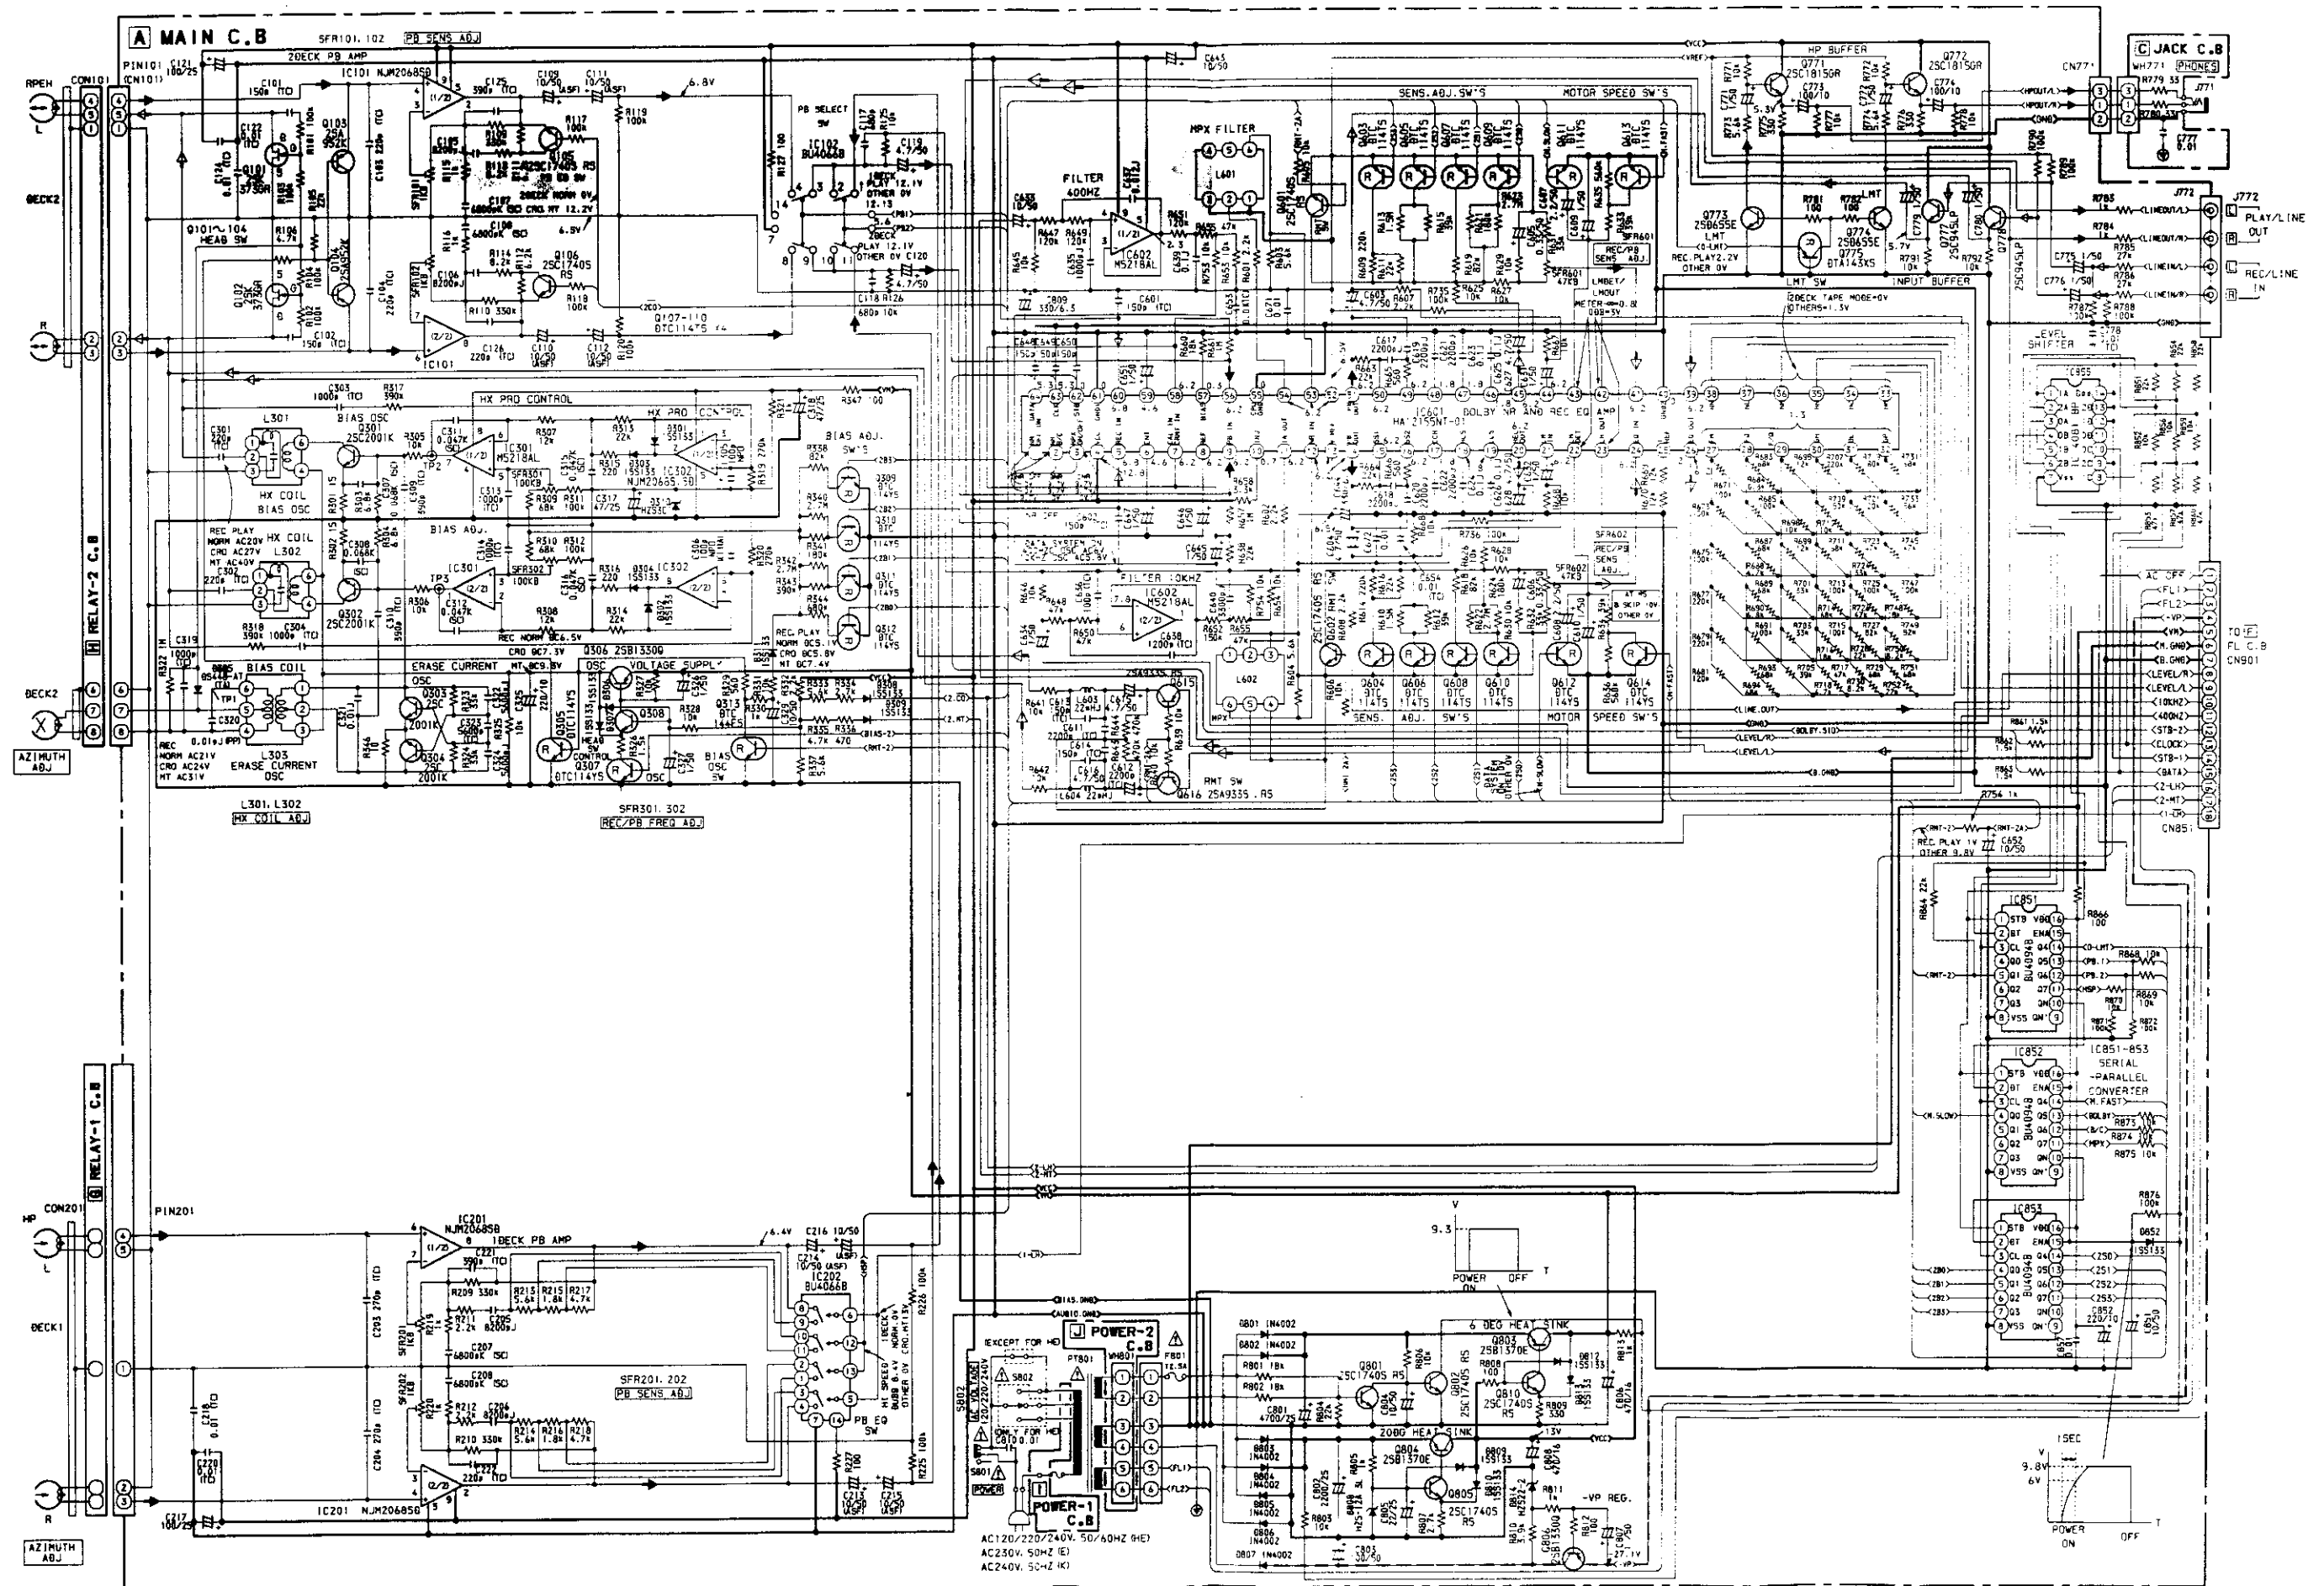

B FRONT C.B

C JACK C.B

D DECK-1 C.B (FOR 828)
E DECK-2 C.B (FOR 828)


F FL C.B


D DECK-1 C.B (FOR 929)
E DECK-2 C.B (FOR 929)

I SENSOR-1 C.B (FOR 929)
J SENSOR-1 C.B (FOR 929)


G RELAY-1 C.B (FOR 929)
H RELAY-2 C.B

G RELAY-1 C.B (FOR 828)

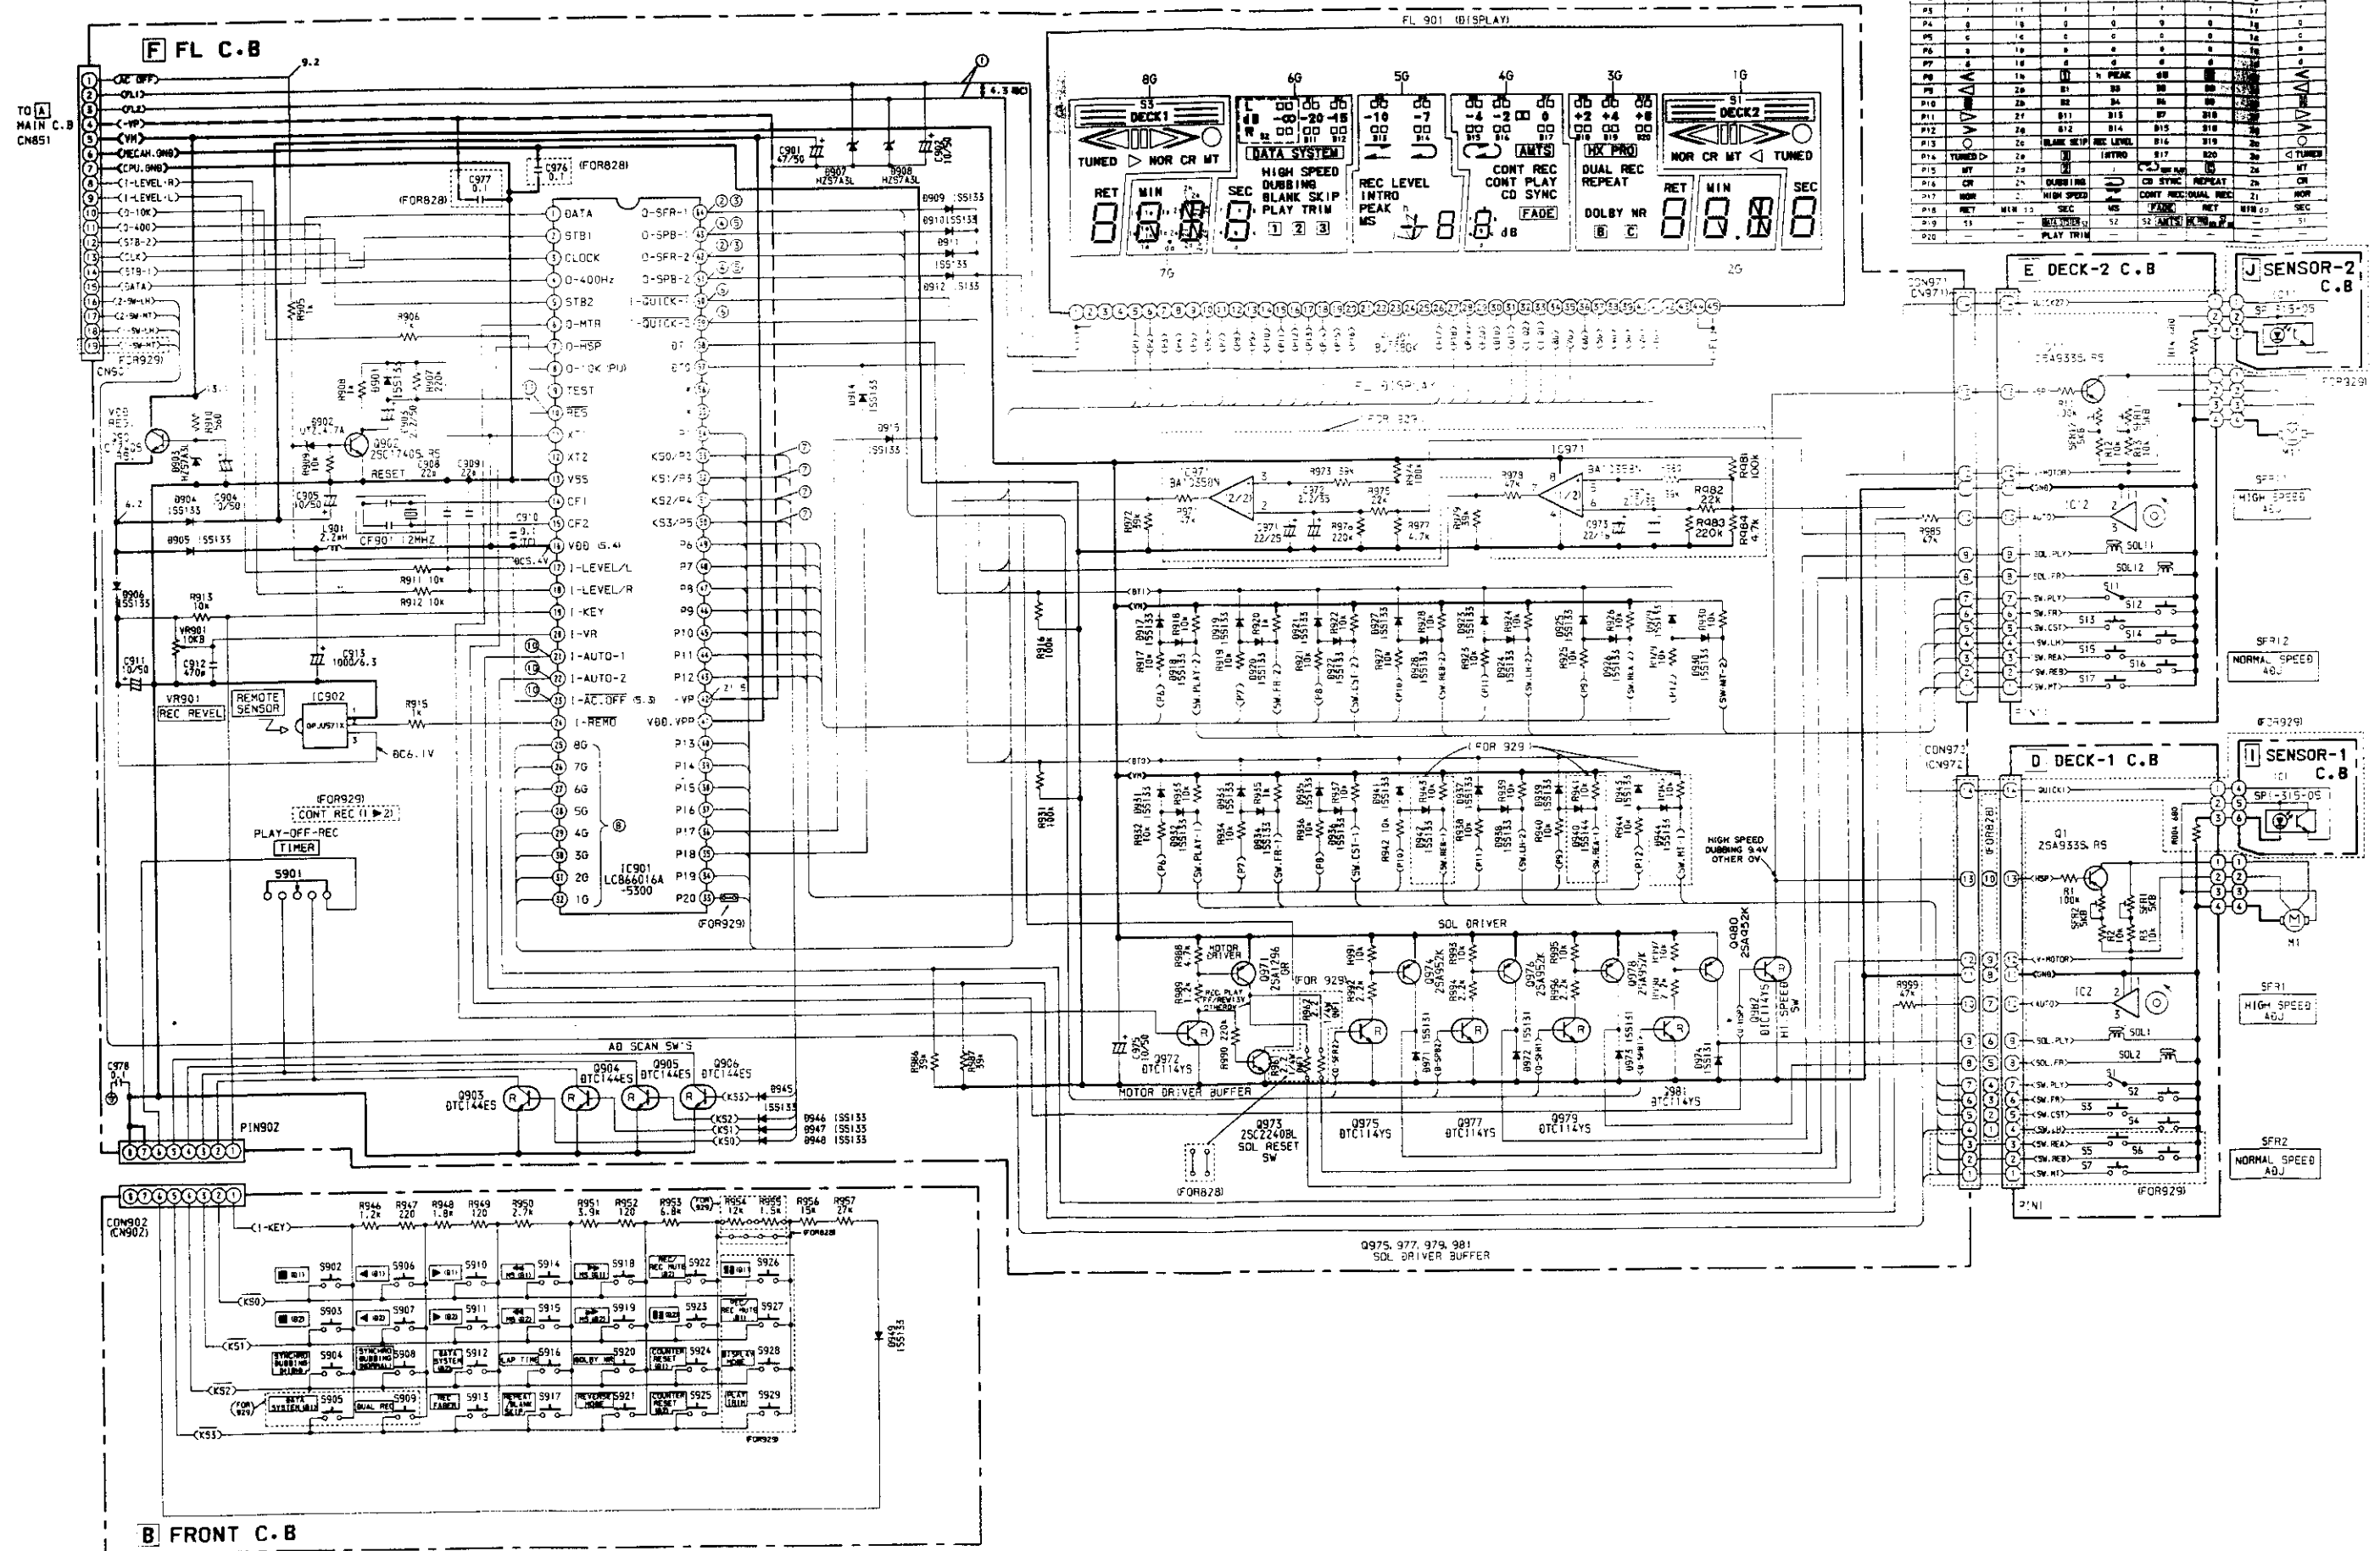

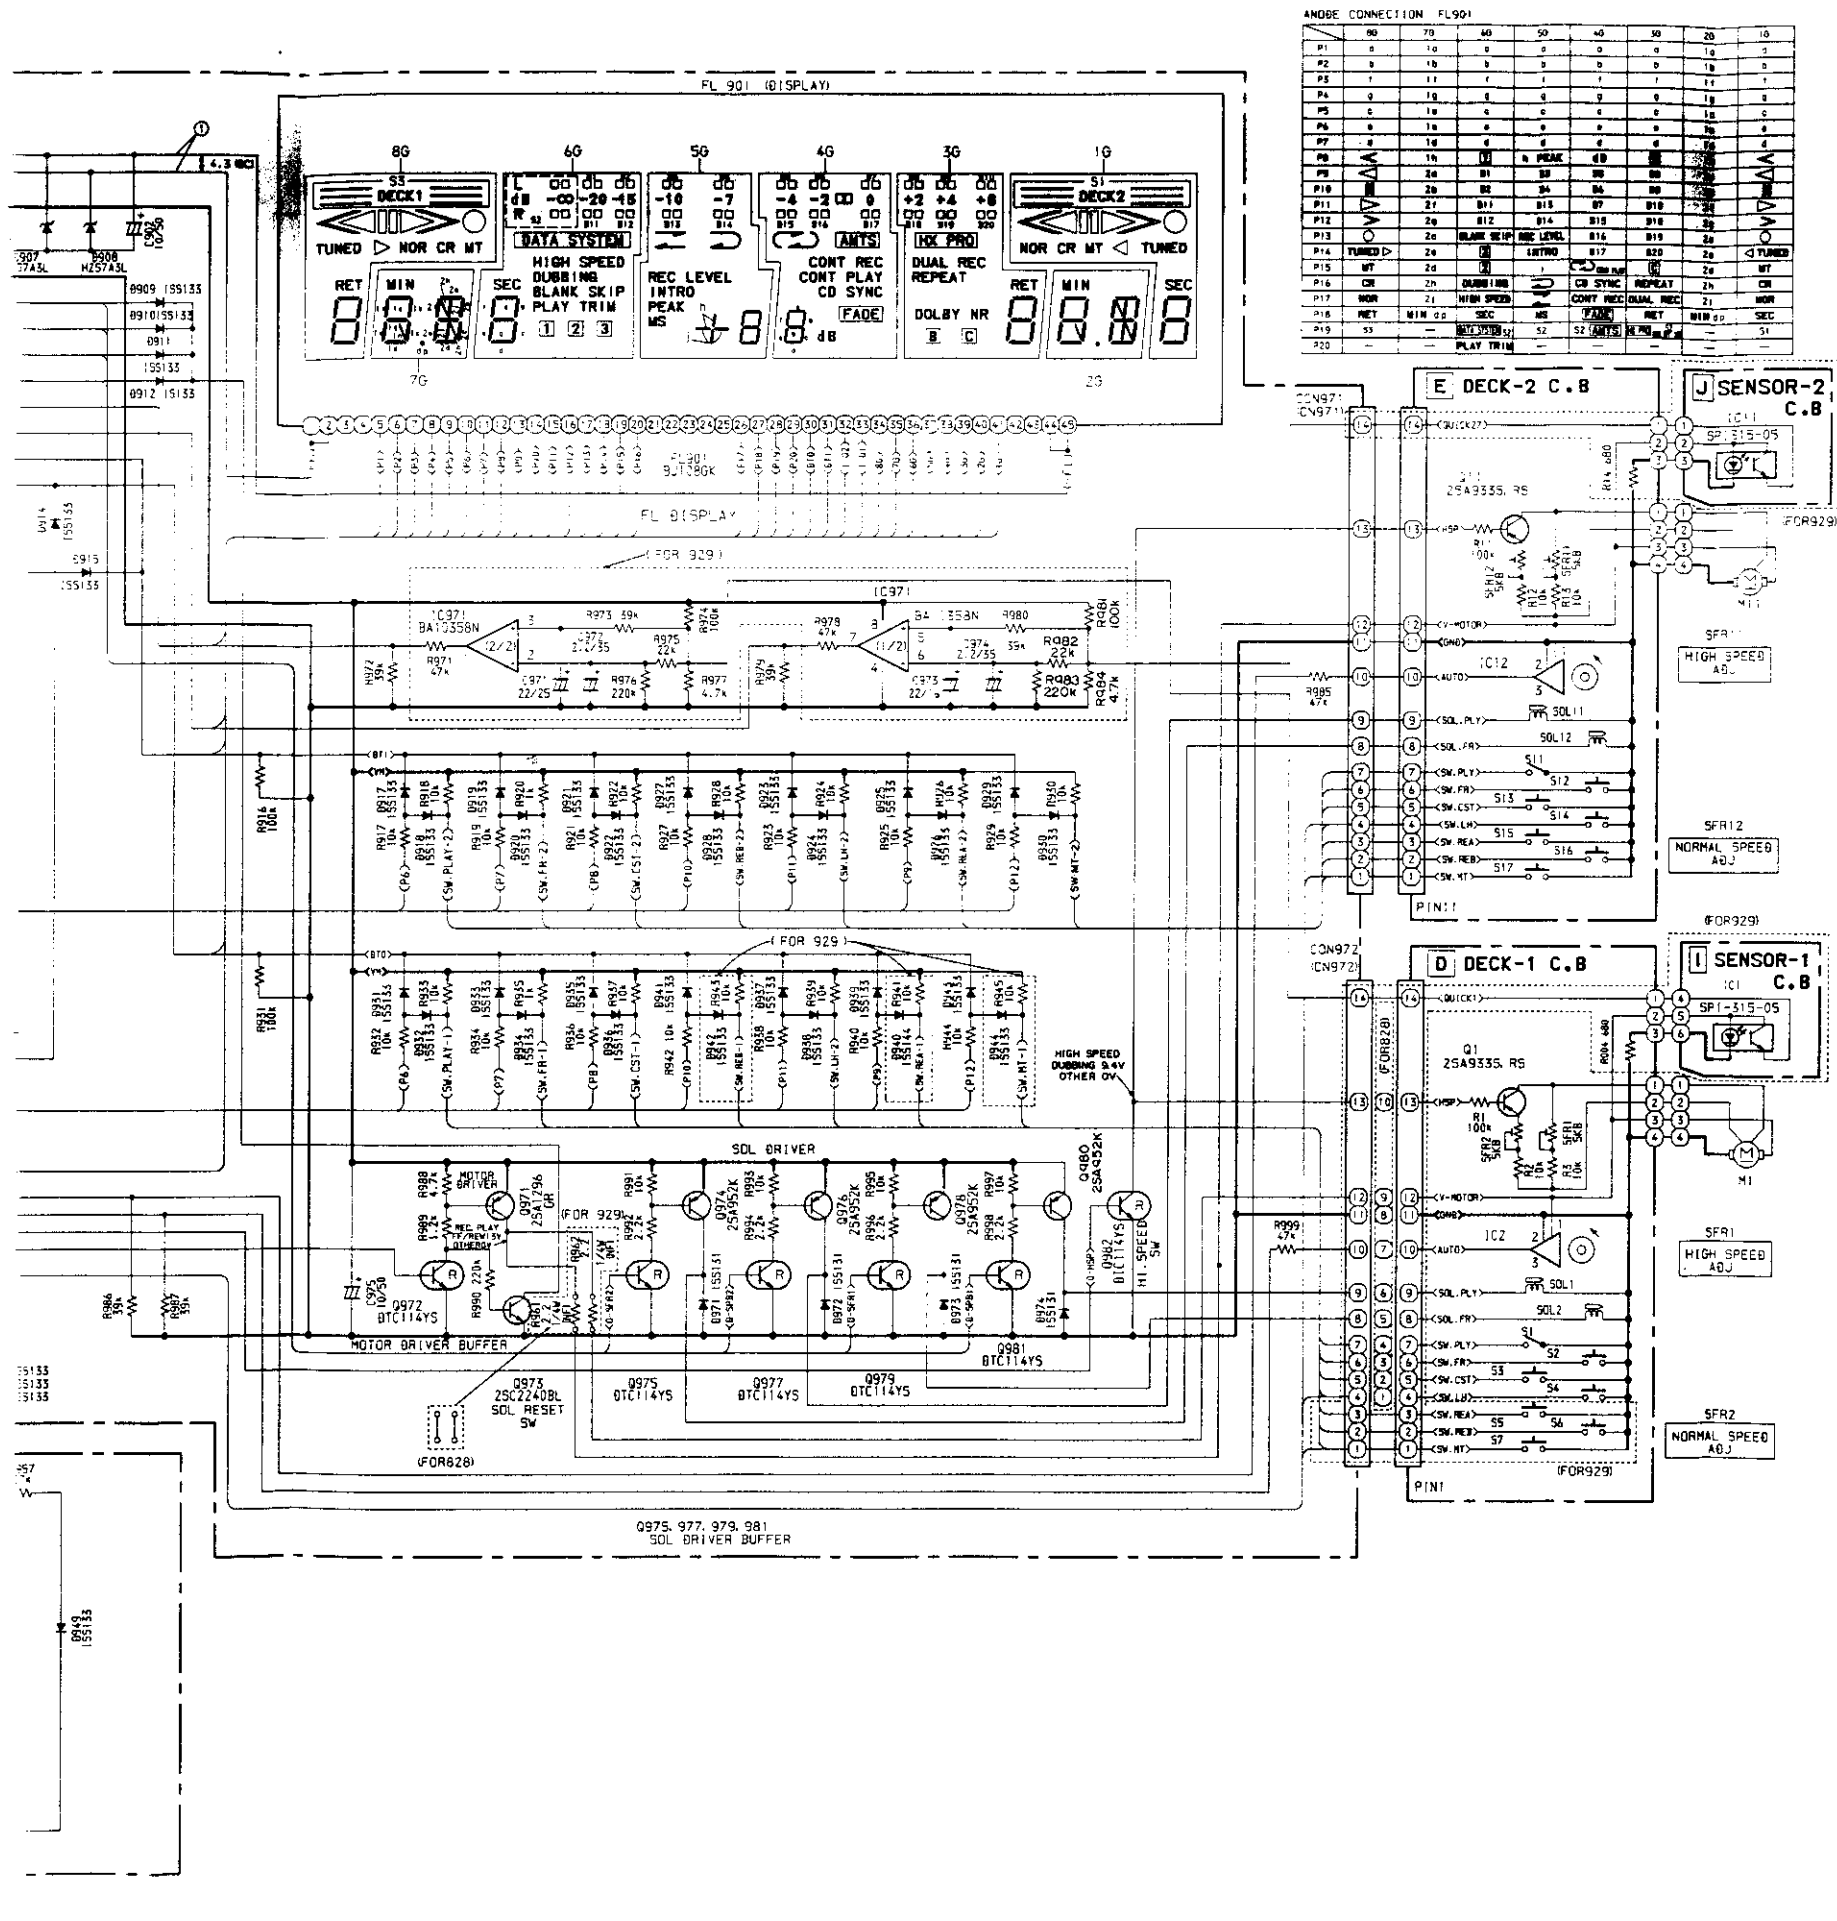

ANODE CONNECTION FL901										
	80	70	40	50	40	50	20	10		
P1	0	1.0	0	0	0	0	1.0	0		
P2	0	1.0	0	0	0	0	1.0	0		
P5	1	1.1	1	1	1	1	1.1	1		
P4	0	1.0	0	0	0	0	1.0	0		
P3	0	1.0	0	0	0	0	1.0	0		
P6	0	1.0	0	0	0	0	1.0	0		
P7	0	1.0	0	0	0	0	1.0	0		
P8	1N	1N	1N	h	h	h	h	h		
P9	2d	B1	33	33	33	33	33	33		
P10	2d	B2	34	B4	B4	B4	B4	B4		
P11	2f	B1	B15	B7	B18	B18	B18	B18		
P12	2g	B12	B14	B15	B16	B16	B16	B16		
P13	2g	B12	B14	B15	B16	B16	B16	B16		
P14	2d	B1	33	33	33	33	33	33		
P15	2d	B1	33	33	33	33	33	33		
P16	2d	B1	33	33	33	33	33	33		
P17	2d	B1	33	33	33	33	33	33		
P18	2d	B1	33	33	33	33	33	33		
P19	2d	B1	33	33	33	33	33	33		
P20	2d	B1	33	33	33	33	33	33		
P21	2d	B1	33	33	33	33	33	33		
P22	2d	B1	33	33	33	33	33	33		
P23	2d	B1	33	33	33	33	33	33		
P24	2d	B1	33	33	33	33	33	33		
P25	2d	B1	33	33	33	33	33	33		
P26	2d	B1	33	33	33	33	33	33		
P27	2d	B1	33	33	33	33	33	33		
P28	2d	B1	33	33	33	33	33	33		
P29	2d	B1	33	33	33	33	33	33		
P30	2d	B1	33	33	33	33	33	33		
P31	2d	B1	33	33	33	33	33	33		
P32	2d	B1	33	33	33	33	33	33		
P33	2d	B1	33	33	33	33	33	33		
P34	2d	B1	33	33	33	33	33	33		
P35	2d	B1	33	33	33	33	33	33		
P36	2d	B1	33	33	33	33	33	33		
P37	2d	B1	33	33	33	33	33	33		
P38	2d	B1	33	33	33	33	33	33		
P39	2d	B1	33	33	33	33	33	33		
P40	2d	B1	33	33	33	33	33	33		
P41	2d	B1	33	33	33	33	33	33		
P42	2d	B1	33	33	33	33	33	33		
P43	2d	B1	33	33	33	33	33	33		
P44	2d	B1	33	33	33	33	33	33		
P45	2d	B1	33	33	33	33	33	33		
P46	2d	B1	33	33	33	33	33	33		
P47	2d	B1	33	33	33	33	33	33		
P48	2d	B1	33	33	33	33	33	33		
P49	53	—	—	52	52	52	52	52	—	51
P50	—	—	—	—	—	—	—	—	—	—

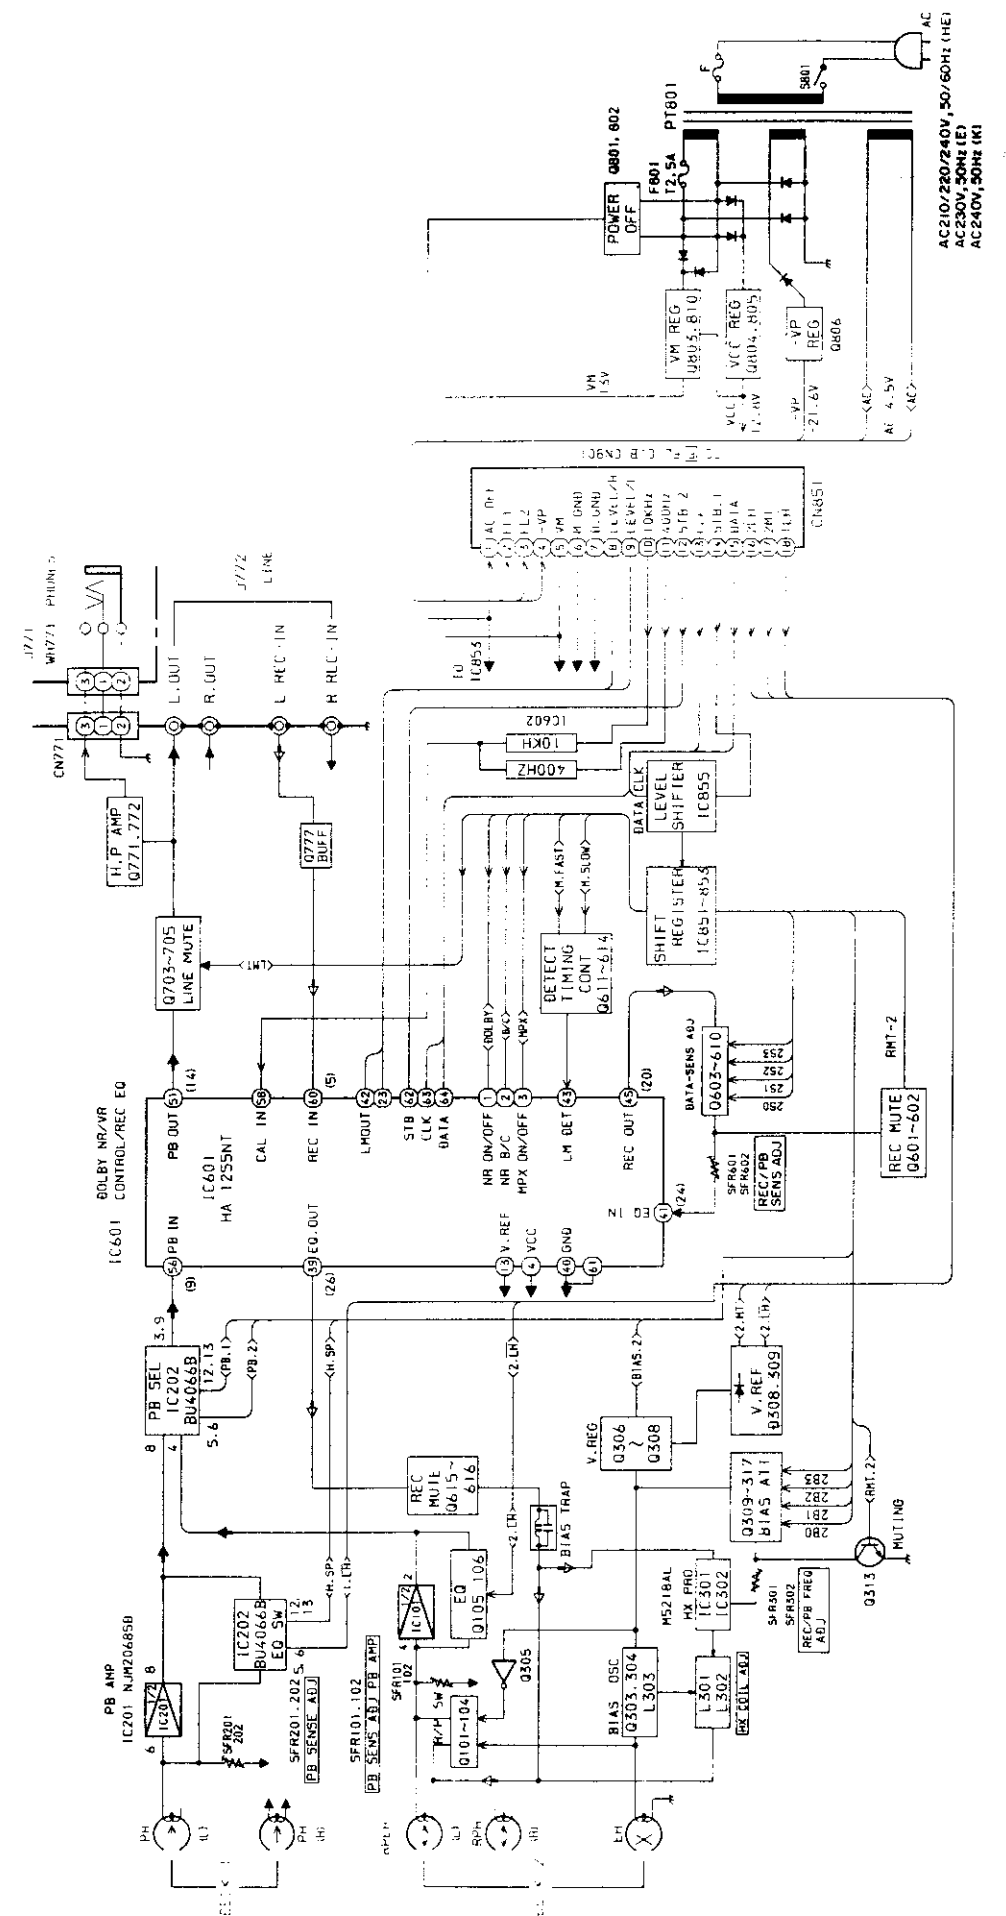

IC DESCRIPTION

IC, LC866016A – 5300

Pin No.	Pin Name	I/O	Description
1	DATA	O	Serial data output.
2	STB1	O	Strobe output (for shift register).
3	CLOCK	O	Data clock output.
4	O – 400Hz	O	400Hz oscillation output for data system.
5	STB2	O	Strobe output (for Dolby IC).
6	O – MTR	O	Mechanism motor control output.
7	$\overline{O}$ – HSP	O	Motor speed switching output.
8	O – 10kHz	O	10kHz oscillation output for data system.
9	TEST1	–	System test pin, not connected.
10	$\overline{RES}$	I	System reset pin.
11	XT1	O	Sub-clock pin, connected to VDD.
12	XT2	I	Sub-clock pin, not connected.
13	VSS	–	System power supply pin, connected to GND.
14	CF1	O	System clock pins. A 12MHz ceramic clock oscillator is connected.
15	CF2	I	
16	VDD	–	System power supply pin, connected to +5V.
17	I – LEVEL • L	I	Lch meter input. AD converted to 8 bits internally.
18	I – LEVEL • R	I	Rch meter input. AD converted to 8 bits internally.
19	I – KEY	I	AD key scan input.
20	I – VR	I	Volume level detection.
21	I – AUTO1	I	Reel disk rotation pulse inputs for counter.
22	I – AUTO2	I	
23	$\overline{I}$ – AC • OFF	I	Power off detection input.
24	$\overline{I}$ – REMO	I	Serial data input for remote control.
25	G8	O	Grid outputs to drive the FL display. Lights at "H".
26	G7	O	
27	G6	O	
28	G5	O	
29	G4	O	
30	G3	O	
31	G2	O	
32	G1	O	


Pin No.	Pin Name	I/O	Description
33	P20	O	Segment outputs to drive the FL display. Lights at "H". P17 – P20 are also used to scan the operation mode during initialization.
34	P19	O	
35	P18	O	
36	P17	O	
37	P16	O	
38	P15	O	
39	P14	O	
40	P13	O	
41	VDDVPP	–	Power supply of FL display drive outputs. Connected to 5V.
42	VP	–	Negative power supply for pull-down resistors. – 27V is connected.
43	P12	O	Segment outputs to drive the FL display. Lights at "H". P2 – P12 are also used as the SW scan and AD scan outputs.
44	P11	O	
45	P10	O	
46	P9	O	
47	P8	O	
48	P7	O	
49	P6	O	
50	P5	O	
51	P4	O	
52	P3	O	
53	P2	O	
54	P1	O	
55	NC	–	Not used.
56	NC	–	
57	DT0	I	SW scan inputs.
58	DT1	I	
59	I – QUICK1	I	Quick sensor inputs.
60	I – QUICK2	I	
61	O – SOL • PL2	O	Outputs to control the plunger driver in the mechanism. The plunger is attracted at "H".
62	O – SOL • FR2	O	
63	O – SOL • PL1	O	
64	O – SOL • FR1	O	

Note : The initial output of P6 and P61 – P64 are set to "L" and others to "H" when reset.


KEY MATRIX

IC, LC866016A - 5300

KSCAN-AB MATRIX

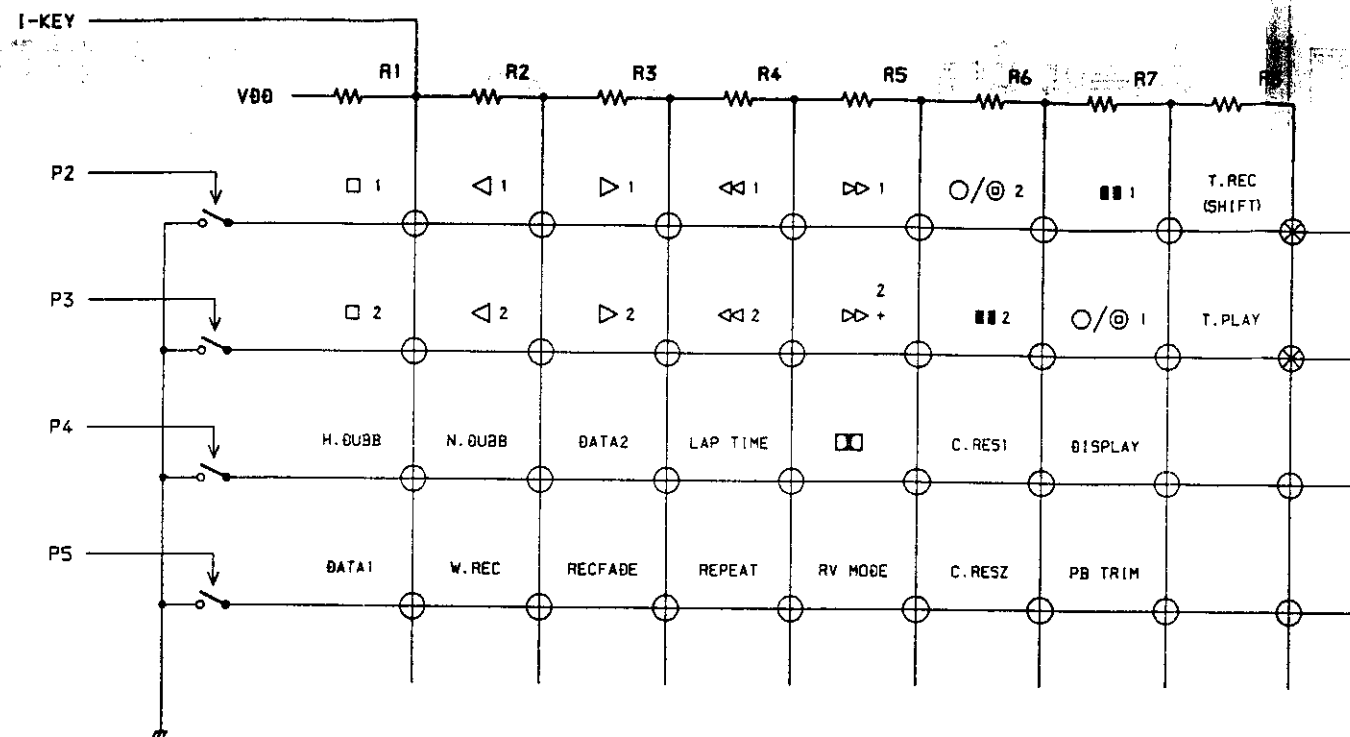



SEGMENT SCAN MATRIX

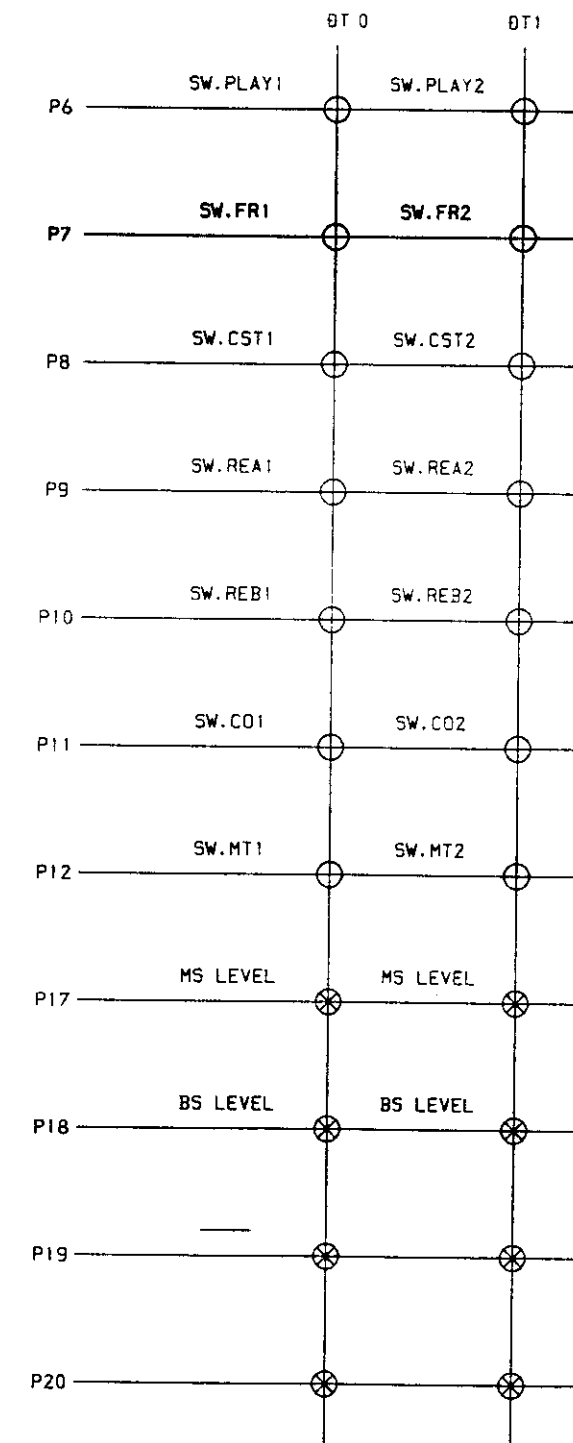


IC BLOCK DIAGRAM - 2

IC, TC4081BP

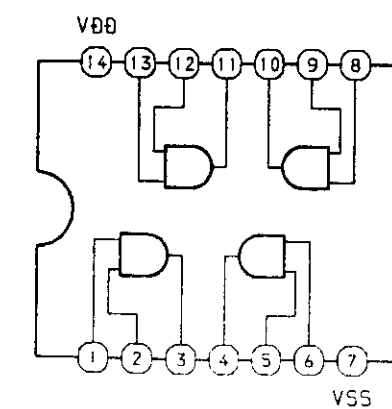

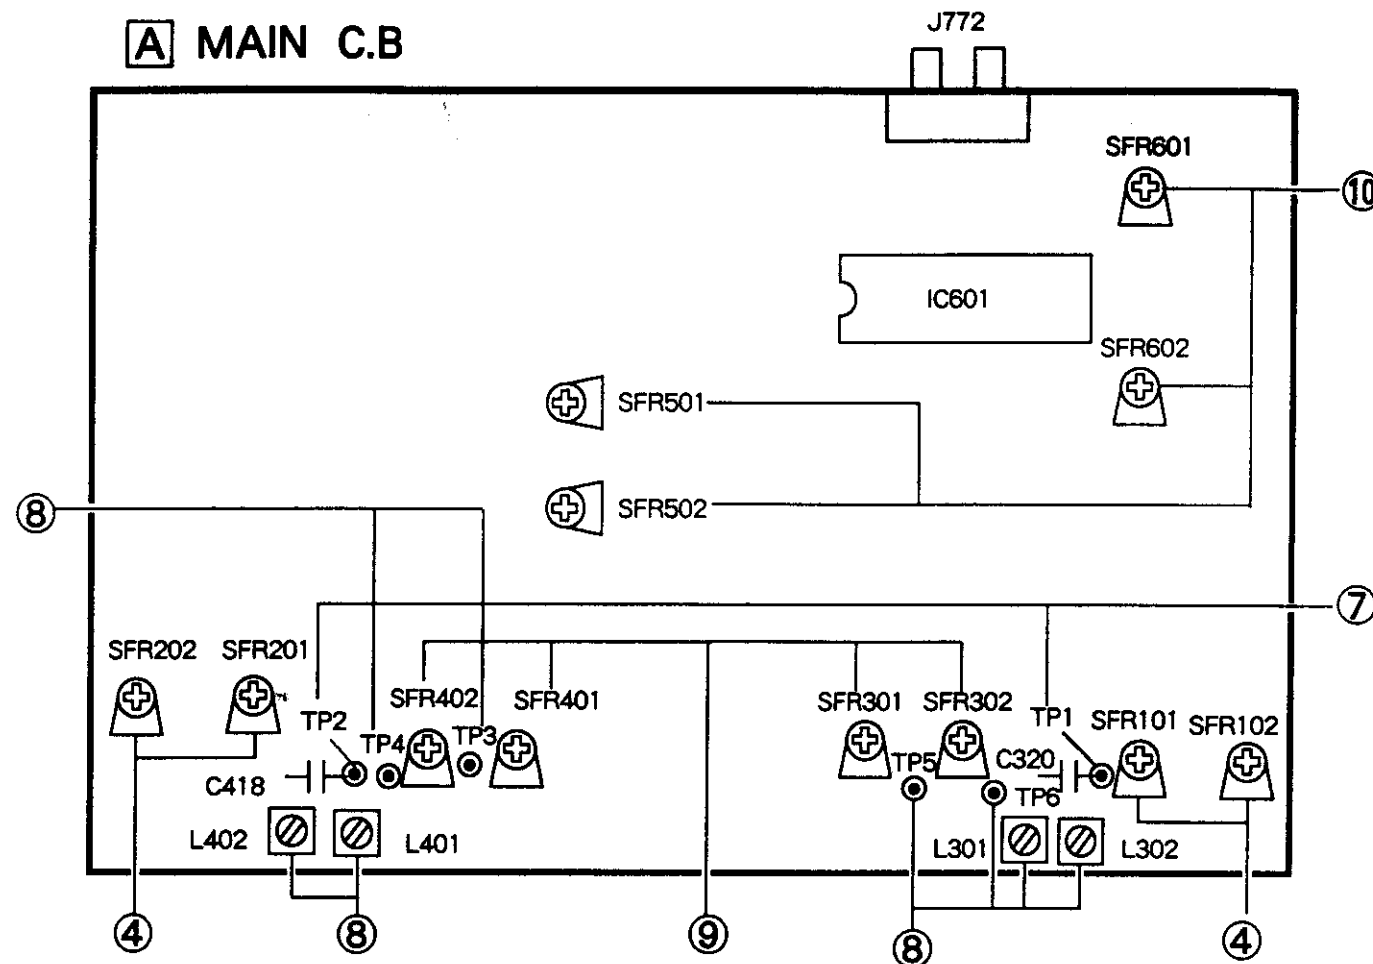


D DECK - 1 C.B
E DECK - 2 C.B

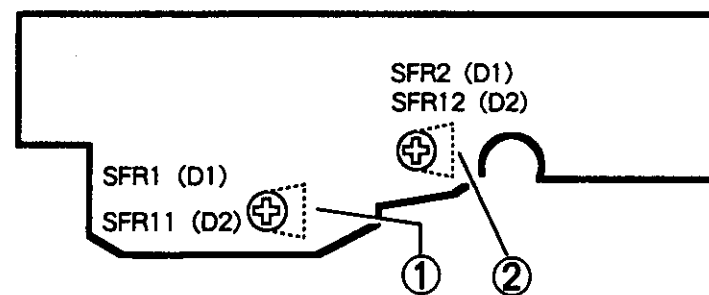

(TOP VIEW)

(DECK1, 2) R/P/E HEAD



1. High Speed Adjustment (DECK1, DECK2)

Settings : • Test tape : TTA - 100 (TTA - 111S)
• Test point : LINE OUT (PIN JACK)
• Adjustment Location : SFR1 (DECK1)
SFR11 (DECK2)

Method : Play back the test tape, and adjust for $5980 \pm 20\text{Hz}$.

2. Normal Speed Adjustment (DECK1, DECK2)

Settings : • Test tape : TTA - 100 (TTA - 111S)
• Test point : LINE OUT (PIN JACK)
• Adjustment Location : SFR2 (DECK1)
SFR12 (DECK2)

Method : Play back the test tape, adjust for 3000Hz.

3. Head Azimuth Adjustment (DECK1, DECK2)

Settings : • Test tape : TTA - 300 (TTA - 317E)
• Test point : LINE OUT (PIN JACK)
• Adjustment Location : Head azimuth

adjustment screw

Method : Play back the 10kHz signal of test tape and adjust so that the output is maximum and the waveforms in the lissajours are in phase.

4. PB Sensitivity Adjustment (DECK1, DECK2)

Settings : • Test tape : TTA - 200 (TTA - 161)
• Test point : LINE OUT (PIN JACK)
• Adjustment Location : SFR201 (DECK1, Lch)
SFR202 (DECK1, Rch)
SFR101 (DECK2, Lch)
SFR102 (DECK2, Rch)

Method : Play back the test tape, and adjust SFR so that the output level of the test point is 480mV.

5. PB Frequency Response Check (DECK1, DECK2)

Settings : • Test tape : TTA - 300 (TTA - 317E)
• Test point : LINE OUT (PIN JACK)

• Method : Play back the 315Hz and 10kHz signals of the test tape and check the output of the 10kHz signal is $0\text{dB} \pm 2\text{dB}$ with respect to that of the 315Hz signal.

6. Level Meter Check (DECK1, DECK2)

Settings : • Test tape : TTA - 200 (TTA - 161)

Method : Play back the test tape, and check that the reading of the level meter is light on -4dB. After check the FL goer out the level by +2dB.

7. Bias Frequency Check (DECK1, DECK2)

Settings : • Test tape : TTA - 630

• Test point : TP1, TP2

Method : Set to the record mode, and check so that the frequency counter of the test point reads $85\text{kHz} \pm 3\text{kHz}$.

8. HX Coil Adjustment (DECK1, DECK2)

Settings : • Test tape : TTA - 630

• Test point : TP3, TP4, TP5, TP6

• Adjustment Location : (DECK1)

L401 (Lch), L402 (Rch)
(DECK2)

L301 (Lch), L302 (Rch)

Method : Adjust L401, L402 and L301, L302 so that the DC voltage at the test points is minimum in the record mode.

9. REC/PB Frequency Adjustment (DECK1, DECK2)

Settings : • Test tape : TTA - 601 (TTA - 630)

• Test point : LINE OUT (PIN JACK)

• Adjustment Location : (DECK1)

SFR401 (Lch)

SFR402 (Rch)

(DECK2)

SFR301 (Lch)

SFR302 (Rch)

Method : Apply a 1kHz signal and adjust REC LEVEL VR attenuater so that the output level at the LINE OUT jack is 48mV.

Record and playback the 1kHz and 10kHz signals and adjust so that the output of the 10kHz signal is $0\text{dB} \pm 0.5\text{dB}$ with respect to that of the 1kHz signal.

10. REC/PB Sensitivity Adjustment (DECK1, DECK2)

Settings : • Test tape : TTA - 601 (TTA - 630)

• Test point : LINE OUT (PIN JACK)

• Adjustment Location : (DECK1)

SFR501 (Lch)

SFR502 (Rch)

(DECK2)

SFR601 (Lch)


SFR602 (Rch)

Method : Apply a 1kHz signal and adjust REC LEVEL VR so that the output level at the LINE OUT is 48mV.

Record and playback the 1kHz signal


and adjust so that the output is $48\text{mV} \pm 0.5\text{dB}$.

A MAIN C.B

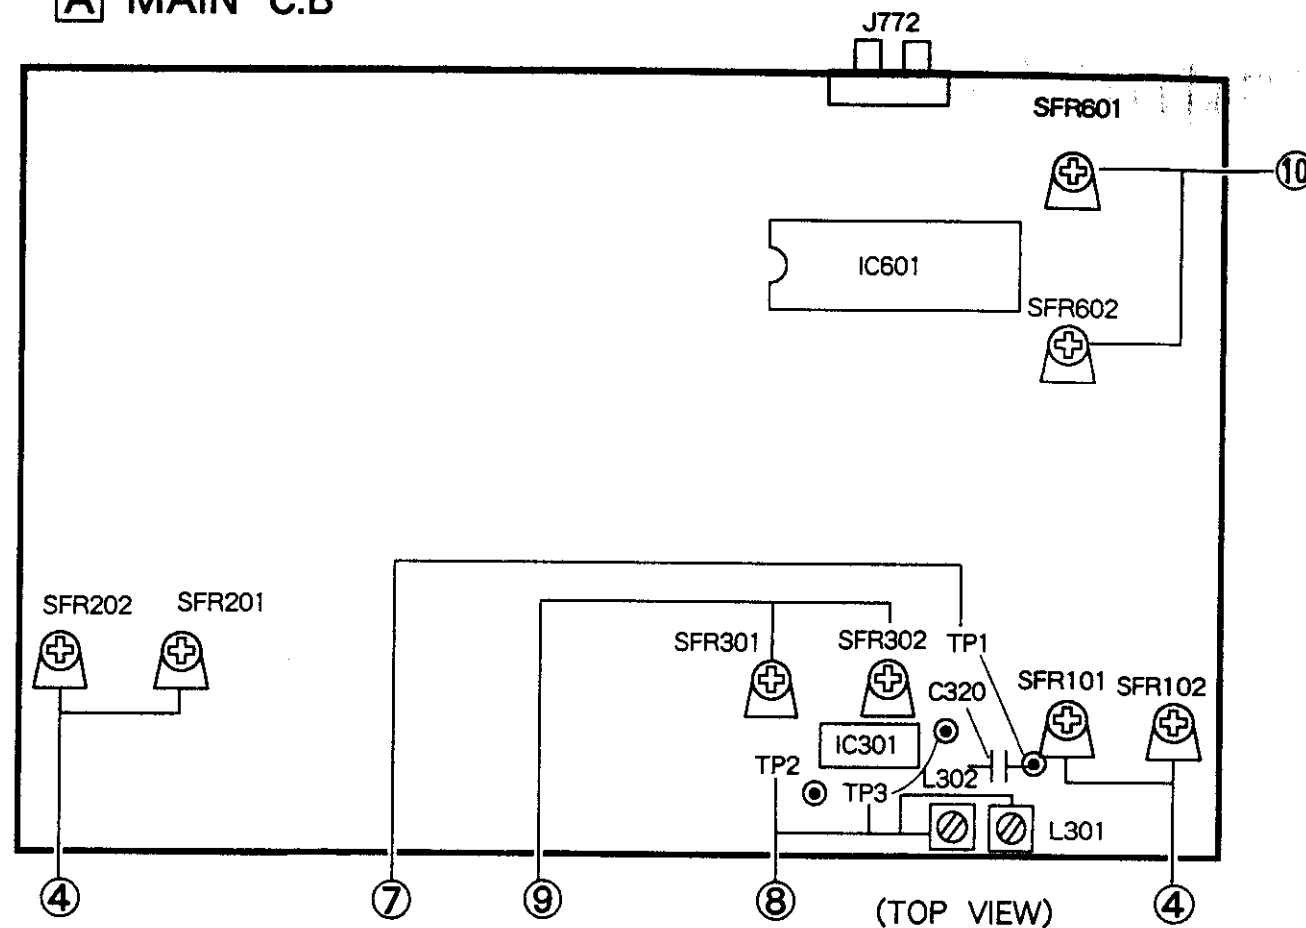

D DECK - 1 C.B

E DECK - 2 C.B

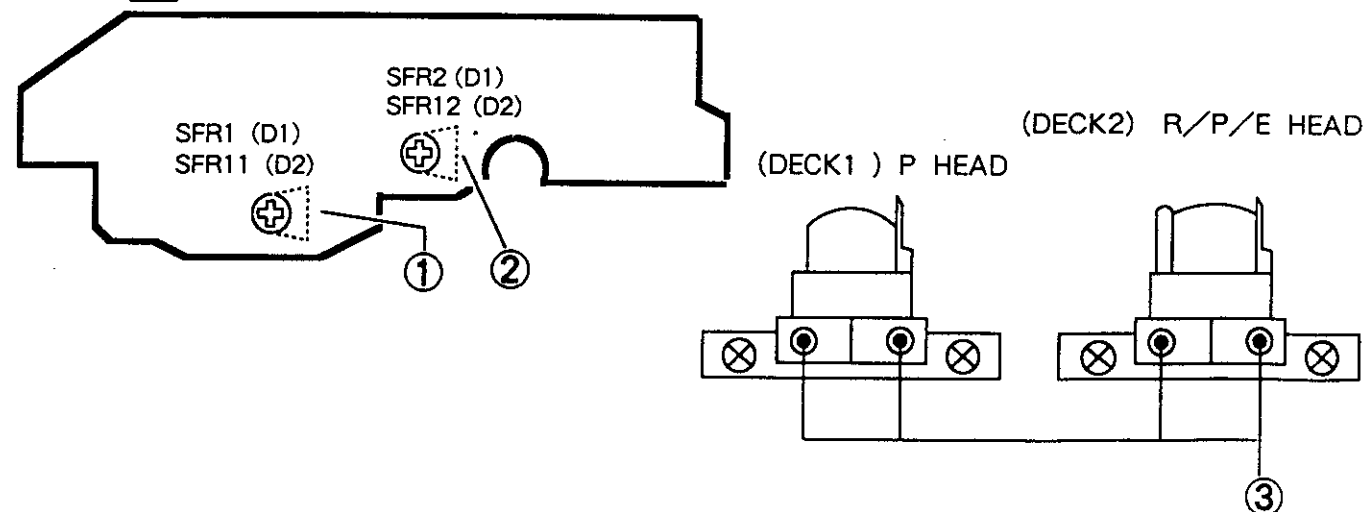

1. High Speed Adjustment (DECK1, DECK2)

- Settings : • Test tape : TTA - 100 (TTA - 111S)
• Test point : LINE OUT (PIN JACK)
• Adjustment Location : SFR1 (DECK1)
SFR11 (DECK2)

Method : Play back the test tape, and adjust for $5980 \pm 20\text{Hz}$.

2. Normal Speed Adjustment (DECK1, DECK2)

- Settings : • Test tape : TTA - 100 (TTA - 111S)
• Test point : LINE OUT (PIN JACK)
• Adjustment Location : SFR2 (DECK1)
SFR12 (DECK2)

Method : Play back the test tape, adjust for 3000Hz.

3. Head Azimuth Adjustment (DECK1, DECK2)

- Settings : • Test tape : TTA - 300 (TTA - 317E)
• Test point : LINE OUT (PIN JACK)
• Adjustment Location : Head azimuth
adjustment screw

Method : Play back the 10kHz signal of test tape and adjust so that the output is maximum and the waveforms in the lissajours are in phase.

4. PB Sensitivity Adjustment (DECK1, DECK2)

- Settings : • Test tape : TTA - 200 (TTA - 161)
• Test point : LINE OUT (PIN JACK)
• Adjustment Location : SFR201 (DECK1, Lch)
SFR202 (DECK1, Rch)
SFR101 (DECK2, Lch)
SFR102 (DECK2, Rch)

Method : Play back the test tape, and adjust SFR so that the output level of the test point is 480mV.

5. PB Frequency Response Check (DECK1, DECK2)

- Settings : • Test tape : TTA - 300 (TTA - 317E)
• Test point : LINE OUT (PIN JACK)

Method : Play back the 315Hz and 10kHz signals of the test tape and check the output of the 10kHz signal is $0\text{dB} \pm 2\text{dB}$ with respect to that of the 315Hz signal.

6. Level Meter Check (DECK1, DECK2)

- Settings : • Test tape : TTA - 200 (TTA - 161)

Method : Play back the test tape, and check that the reading of the level meter is light on -2dB.

7. Bias Frequency Check (DECK2)

- Settings : • Test tape : TTA - 630
• Test point : TP1

Method : Set to the record mode, and check so that the frequency counter of the test point reads $85\text{kHz} \pm 3\text{kHz}$.

8. HX Coil Adjustment (DECK1, DECK2)

- Settings : • Test tape : TTA - 630
• Test point : TP2, TP3
• Adjustment Location : L301 (Lch)
L302 (Rch)

Method : Adjust L301, L302 so that the DC voltage at the test points is minimum in the record mode.

9. REC/PB Frequency Adjustment (DECK2)

- Settings : • Test tape : TTA - 601 (TTA - 630)
• Test point : LINE OUT (PIN JACK)
• Adjustment Location : (DECK2)
SFR301 (Lch)
SFR302 (Rch)

Method : Apply a 1kHz signal and adjust REC LEVEL VR attenuator so that the output level at the LINE OUT jack is 48mV.

Record and playback the 1kHz and 10kHz signals and adjust so that the output of the 10kHz signal is $0\text{dB} \pm 0.5\text{dB}$ with respect to that of the 1kHz signal.

10. REC/PB Sensitivity Adjustment (DECK2)

- Settings : • Test tape : TTA - 601 (TTA - 630)
• Test point : LINE OUT (PIN JACK)
• Adjustment Location : (DECK2)
SFR601 (Lch)
SFR602 (Rch)

Method : Apply a 1kHz signal and adjust REC LEVEL VR so that the output level at the LINE OUT is 48mV.

Record and playback the 1kHz signal and adjust so that the output is $48\text{mV} \pm 0.5\text{dB}$.

PRACTICAL SERVICE FIGURE (AD - WX929)


Playback output Level : 480mV $\pm$ 0.5dB
(TTA-200) (TTA-161, TCC-130) (LINE OUT)
REC/PB output : 0VU $\pm$ 1dB
(TTA-601) (LINE OUT)
REC/PB distortion : Less than 2%
(NORM, CrO₂, MT)
Playback noise : Less than 4.0/3.5mV
(120 μ s/70 μ s, DOLBY NR OFF)
Less than 1.8/1.5mV
(120 μ s/70 μ s, DOLBY NR B, C)
Erase ratio (125Hz) : More than 58dB
Crosstalk : More than 60dB
Channel separation : More than 30dB
Level drift : Within 1.5dB
(10kHz, TTA-300)
DOLBY EFFECT : More than 8.5dB
(TTA-610) (DOLBY NR B)
More than 17dB
(DOLBY NR C)
REC/PB S/N ratio : Less than 4.0/3.5mV
(LINEAR) (DOLBY NR OFF NORM./ MT, CrO₂)
Less than 1.8/1.5mV
(DOLBY NR B, C NORM./ MT, CrO₂)
Recording bias frequency: 85kHz
Tape speed : 3kHz $\pm$ 1.5%
Wow & flutter : Less than 0.08%
(W.R.M.S) (FWD)
Take-up torque : 30~55g-cm
Fast forward torque : 75~150g-cm
Rewind torque : 75~150g-cm
Back-tension : 2~6g-cm
Test tape : METAL TTA-630
CrO₂ TTA-610
(TTA-119H)
NORMAL TTA-601

PRACTICAL SERVICE FIGURE (AD - WX828)


Playback output Level : 480mV $\pm$ 0.5dB
(TTA-200) (TTA-161, TCC-130) (LINE OUT)
REC/PB output : 0VU $\pm$ 1dB
(TTA-601) (LINE OUT)
REC/PB distortion : Less than 2.5% (NORM, CrO₂)
Less than 3.0% (MT)
Playback noise : Less than 4.0/3.5mV
(120 μ s/70 μ s, DOLBY NR OFF)
Less than 1.8/1.5mV
(120 μ s/70 μ s, DOLBY NR B, C)
Erase ratio (125Hz) : (DECK - 2)
More than 58dB
Crosstalk : More than 60dB
Channel separation : More than 30dB
Level drift : Within 1dB
(10kHz, TTA-300)
DOLBY effect : More than 8.5dB
(TTA-610) (DOLBY NR B)
More than 17dB
(DOLBY NR C)
REC/PB S/N ratio : Less than 4.0/3.5mV
(LINEAR) (DOLBY NR OFF NORM./ MT, CrO₂)
Less than 1.8/1.5mV
(DOLBY NR B, C NORM./ MT, CrO₂)
Recording bias frequency: (DECK - 2)
85kHz
Tape speed : 3kHz $\pm$ 1.5%
Wow & flutter : Less than 0.08%
(W.R.M.S) (FWD)
Take-up torque : 30~55g-cm
Fast forward torque : 70~150g-cm
Rewind torque : 70~150g-cm
Back-tension : 2~6g-cm
Test tape : METAL TTA-630
CrO₂ TTA-610
(TTA-119H)
NORMAL TTA-601

WAVE FROM


① FL901 PIN ①, ②, ④, ⑤

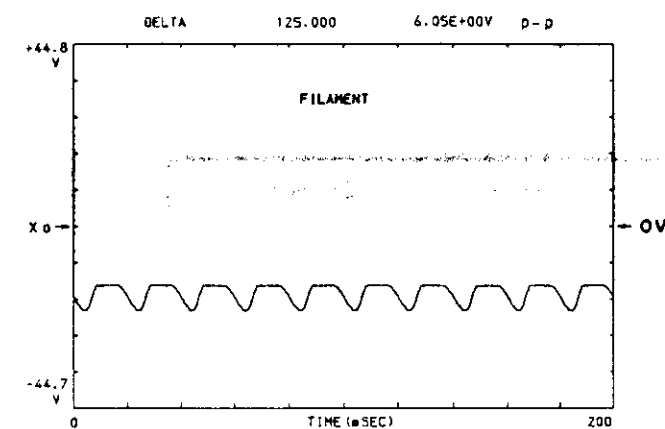


④ IC901 PIN ⑥1, ⑥3

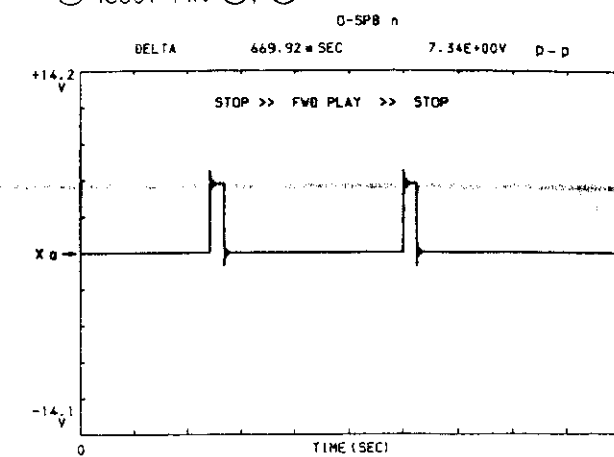


② IC901 PIN ⑥2, ⑥4

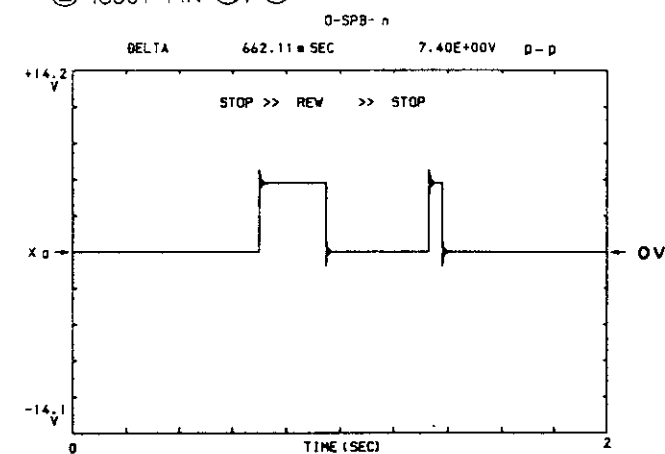


⑤ IC901 PIN ⑥1, ⑥3

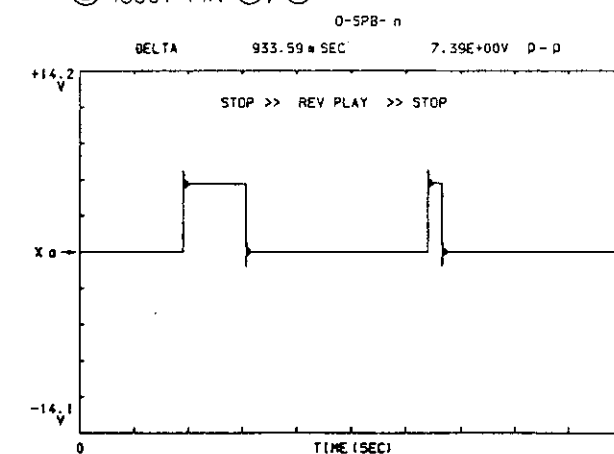

③ IC901 PIN ⑥2, ⑥4

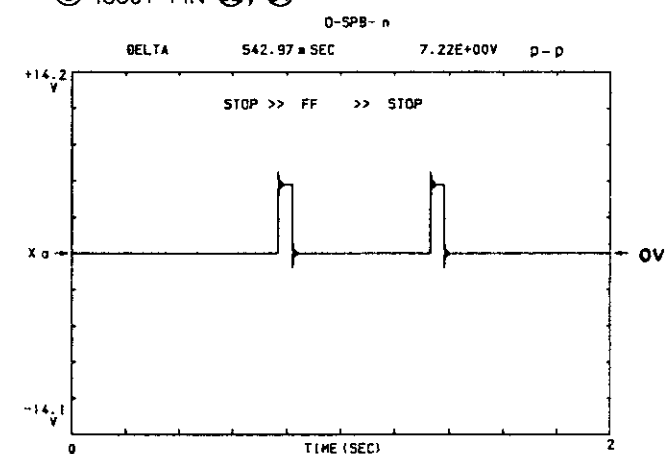


⑥ IC901 PIN ⑤9, ⑥0

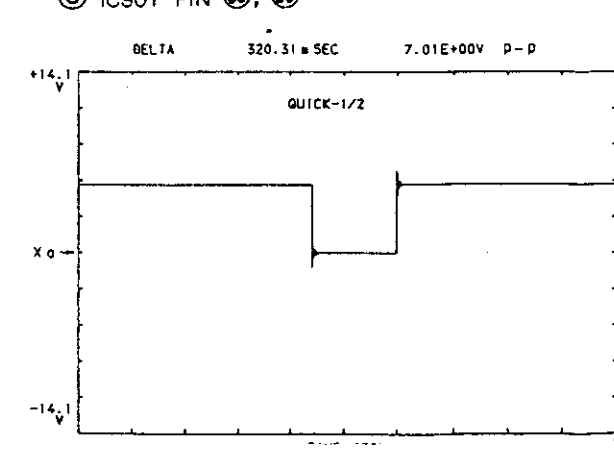


EXPLODED VIEW - 1 (AD - WX929,AD - WX828)


⑦ IC901 PIN ⑤①, ⑤②, ⑤③

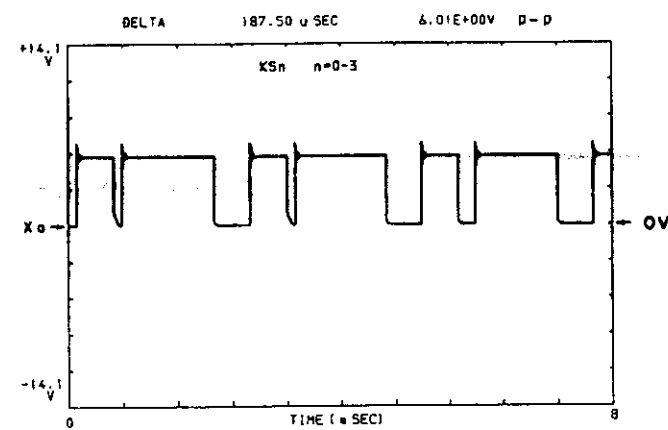


⑩ IC901 PIN ②①, ②②

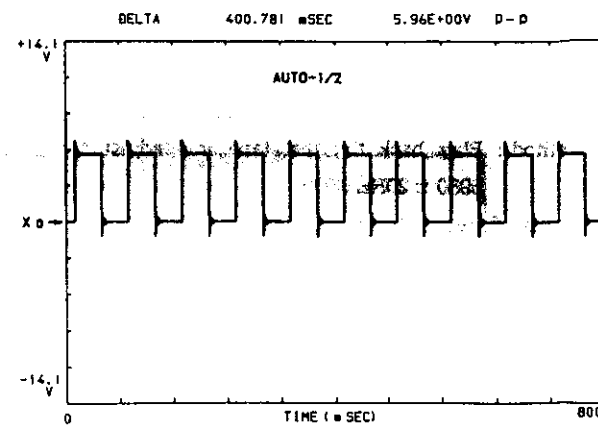


⑧ IC901 PIN ②⑤ ~ ③②

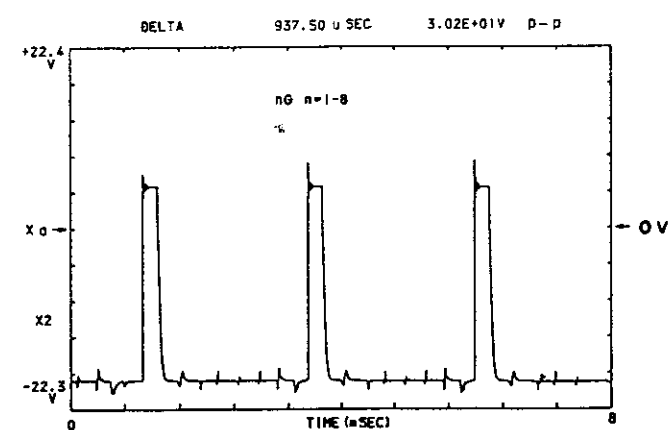


⑪ IC901 PIN ⑩

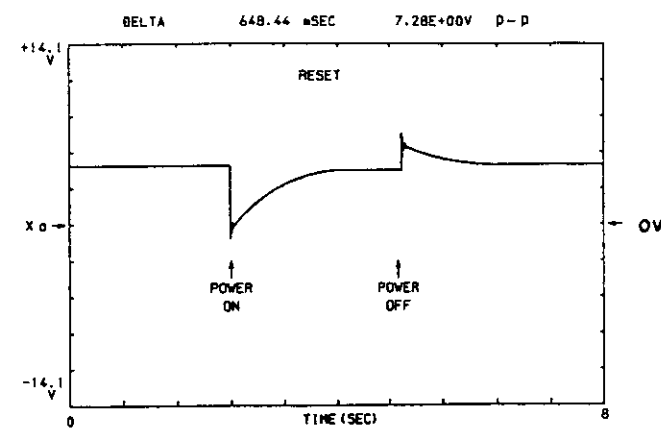

⑨ IC901 PIN ②③

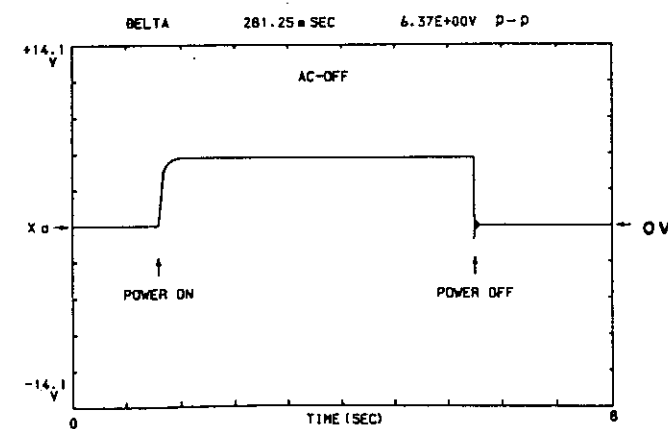

REF.NO.	PART NO.	DESCRIPTION	REF.NO.	PART NO.	DESCRIPTION	REF.NO.	PART NO.	DESCRIPTION
A	87-067-584-010	BVT,+3-6	E	87-067-698-010	BVT,+3-18 W/O SLOT	I	87-067-978-010	VFT,+3-8 DIA10 BLK
B	87-067-579-010	BVT,+3-8 W/O SLOT	F	87-067-777-010	BVT,+3-6 W, CONVEX BLK	J	87-067-977-010	S-SCREW+2.6-2.5
C	87-067-660-010	BVT,+3-8 W/O SLOT BLK	G	87-067-585-010	BVT,+4-6	K	87-067-586-010	BVT,+4-8
D	87-067-703-010	BVT,+3-10 W/O SLOT	H	87-581-094-410	QIT+3-6	L	87-253-094-419	U+3-6 BLK

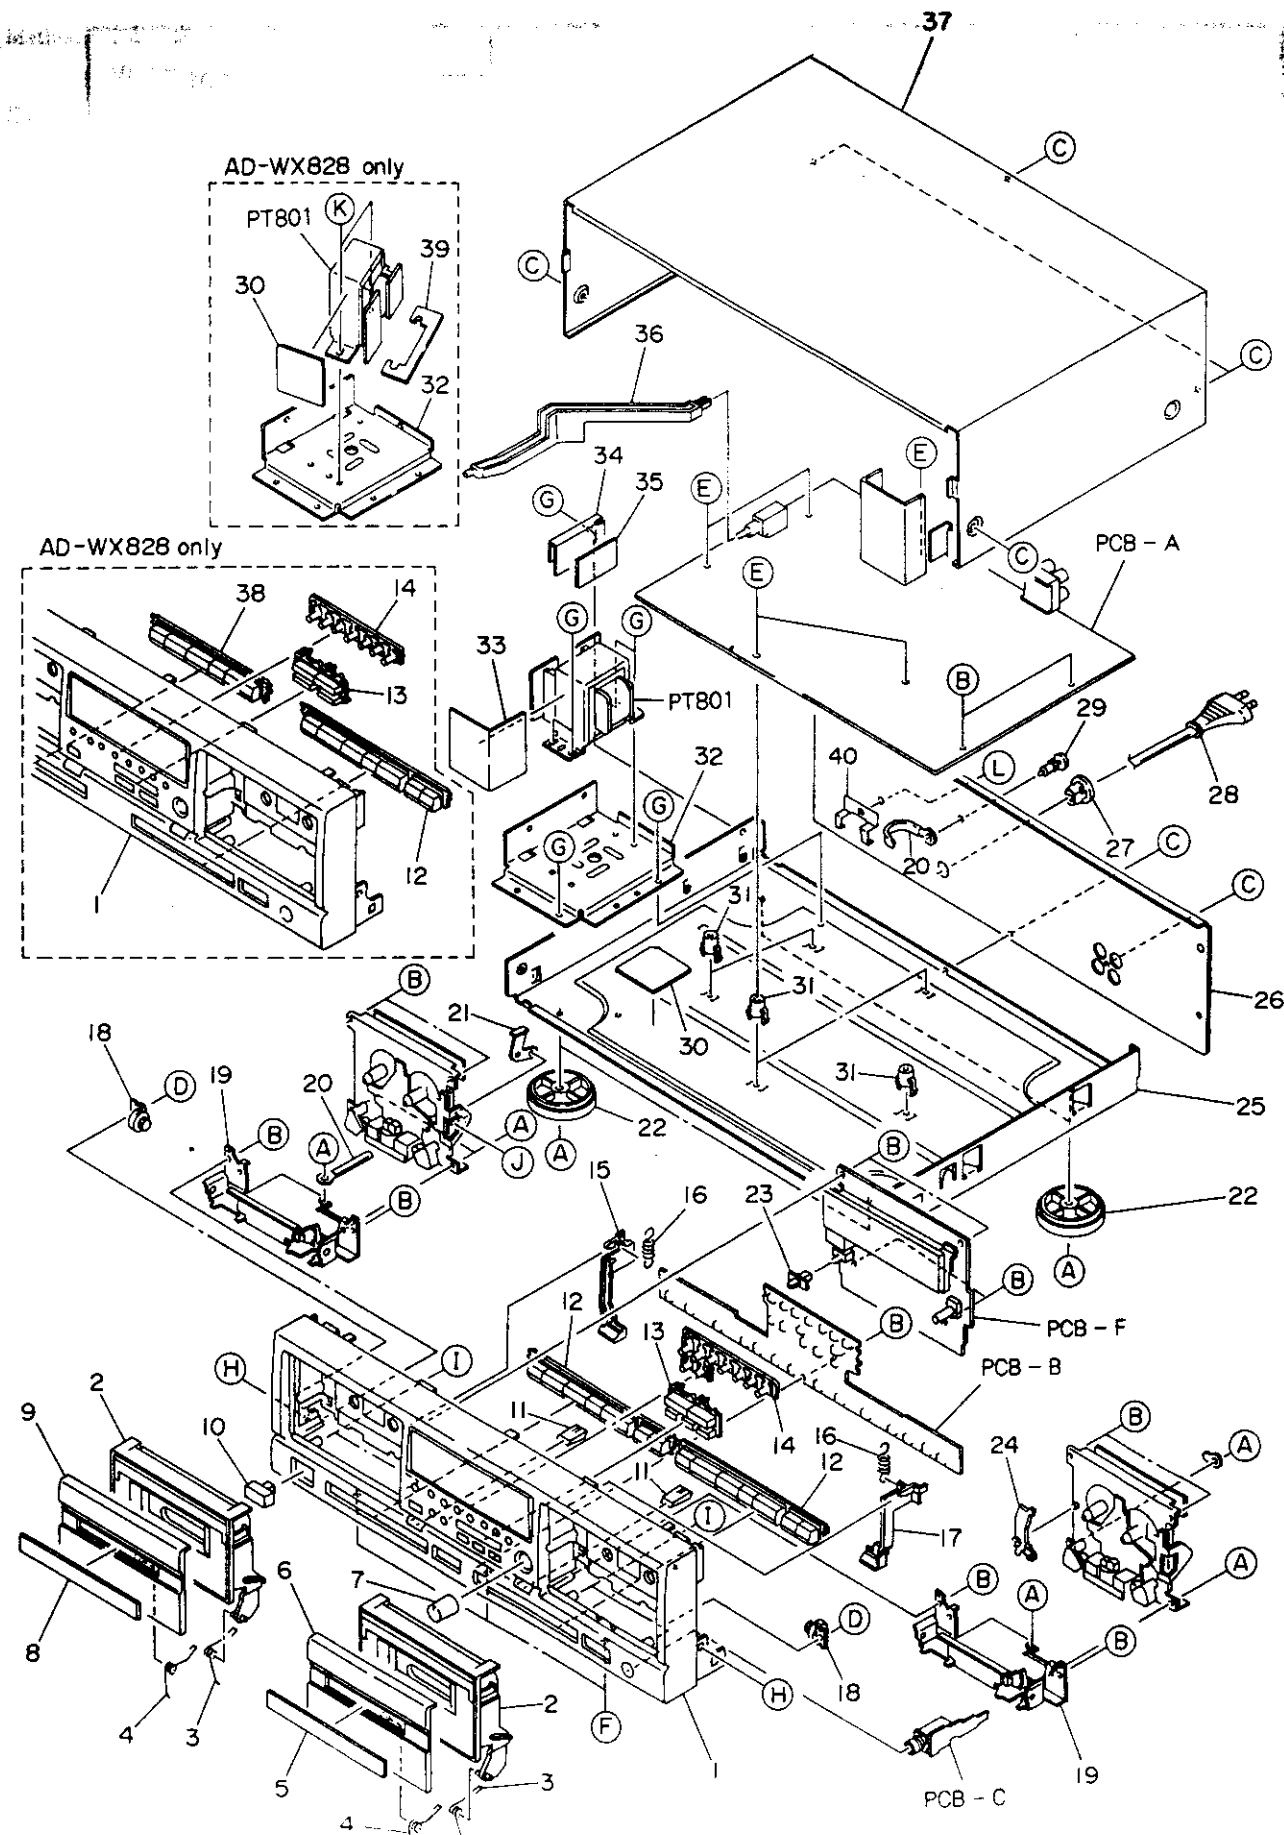


MECHANICAL PARTS LIST (AD - WX929,AD - WX828)

PART NO. CHANGED TO	REF. NO.	PART NO.	DESCRIPTION	COMMON MODEL	Q. TY
	1-1	★ 09-047-738-010	CAB FR ASSY(WX828)	*	1
	1-1	★ 09-047-739-010	CAB FRONT ASSY(WX929)	*	1
	1-2	★ 09-047-508-010	CASS BOX ASSY	*	2
	1-3	★ 82-DW1-213-010	SPR-T, EJECT 2(E, K)	*	2
	1-3	★ 82-DW1-218-019	SPR-T, EJECT 2(HE, EN, KN)	*	2
	1-4	★ 82-DW1-212-010	SPR-T, EJECT 1(E, K)	*	2
	1-4	★ 82-DW1-217-019	SPR-T, EJECT 1(HE, EN, KN)	*	2
	1-5	★ 82-DW1-016-019	WINDOW, C-BOX R	*	1
	1-6	★ 82-DW2-007-019	PANEL, C-BOX 2R(WX828)	*	1
	1-6	★ 82-DW1-011-019	PANEL, C-BOX 1R(WX929)	*	1
	1-7	★ 82-DW1-007-019	KNOB, VOL	*	1
	1-8	★ 82-DW1-013-019	WINDOW, C-BOX L	*	1
	1-9	★ 82-DW2-006-019	PANEL, C-BOX 2L(WX828)	*	1
	1-9	★ 82-DW1-010-019	PANEL, C-BOX 1L(WX929)	*	1
	1-10	★ 82-AA1-016-019	BTN, POWER	*	1
	1-11	★ 82-DW1-008-019	BTN, EJECT	*	2
	1-12	★ 82-DW1-004-019	KEY, PLAY 1(WX828)	*	1
	1-12	★ 82-DW1-004-019	KEY, PLAY 1(WX929)	*	2
	1-13	★ 82-DW2-003-019	KEY, DUBB 2(WX828)	*	1
	1-13	★ 82-DW1-005-019	KEY, DUBB 1(WX929)	*	1
	1-14	★ 82-DW2-004-019	KEY, DOLBY 2(WX828)	*	1
	1-14	★ 82-DW1-006-019	KEY, DOLBY 1(WX929)	*	1
	1-15	★ 82-DW1-202-010	LVR, EJECT L	*	1
	1-16	★ 82-DW1-214-010	SPR-E, LVR(E, K)	*	2
	1-16	★ 82-DW1-219-019	SPR-E, LVR(HE, EN, KN)	*	2
	1-17	★ 82-DW1-203-010	LVR, EJECT R	*	1
	1-18	★ 87-063-143-010	OIL-DMPR 75	*	2
	1-19	★ 82-DW1-204-010	HLDR, MECHA	*	2
	1-20	---	WIRE BINDER(WX929)	*	2
	1-21	★ 82-DW1-215-010	LVR, PROTECT R-2	*	1
	1-22	★ 82-AA1-029-010	FOOT	*	4
	1-23	★ 82-DW1-017-019	KNOB, SLIDE	*	1
	1-24	★ 80-DW1-206-019	LVR, EJECT ST	*	1
	1-25	---	CHAS, MAIN	*	1
	1-26	★ 82-DW2-014-019	PANEL, REAR 2-E(WX828 E)	*	1
	1-26	★ 82-DW2-015-019	PANEL, REAR 2-K(WX828 K)	*	1
	1-26	★ 82-DW2-016-019	PANEL, REAR 2-HEJN(WX828 HE)	*	1
	1-26	★ 82-DW2-001-019	PANEL, REAR 2-EN(WX828 EN)	*	1
	1-26	★ 82-DW2-011-019	PANEL, REAR 2-KN(WX828 KN)	*	1
	1-26	★ 82-DW1-024-019	PANEL, REAR 1-E(WX929 E)	*	1
	1-26	★ 82-DW1-025-019	PANEL, REAR 1-K(WX929 K)	*	1
	1-26	★ 82-DW1-027-019	PANEL, REAR 1-HEJN(WX929 HE)	*	1
	1-26	★ 82-DW1-003-019	PANEL, REAR 1-EN(WX929 EN)	*	1
	1-26	★ 82-DW1-021-019	PANEL, REAR 1-KN(WX929 KN)	*	1
	1-27	★ 87-085-185-010	BUSHING, AC CORD	*	1
	1-28	★ 82-187-796-019	AC CORD(K)	*	1
	1-28	★ 82-187-797-019	AC CORD(HE, E)	*	1
	1-29	★ 87-084-077-010	NYLON RIVET DIA 3.5 - 4.5(WX929)	*	1
	1-30	★ 82-231-615-010	SILICON BOARD 43-43	*	1
	1-31	★ 81-670-214-010	HOLDER, PCB	*	5
	1-32	---	HLDR, PT	*	1
	1-33	★ 84-117-637-010	PLATE, SHIELD PT(WX929)	*	1
	1-34	★ 82-DW1-222-110	COVER, PT(WX929)	*	1
	1-35	★ 82-DW1-223-010	SH, PT(WX929)	*	1
	1-36	★ 82-DW1-207-010	ROD, POWER	*	1
	1-37	★ 82-DW1-002-019	CAB, STEEL	*	1
	1-38	★ 82-DW2-002-019	KEY, PLAY 2(WX828)	*	1
	1-39	---	PLATE, PT(WX828)	*	1
	1-40	★ 80-DS3-208-019	HLDR, VS2(HE)	*	1

EXPLODED VIEW - 2 (AD - WX929,AD - WX828)


REF.NO.	PART NO.	DESCRIPTION	REF.NO.	PART NO.	DESCRIPTION	REF.NO.	PART NO.	DESCRIPTION
A	86-575-363-210	S-SCREW V+2-8	E	87-067-174-010	VTT+2-4	I	87-067-177-010	V+1.6-5.5
B	80-ZM6-207-010	V+1.6-7	F	80-ZM6-250-010	PW4.8-8.5-0.13	J	87-081-489-010	PW1.7-3.5-0.25
C	87-263-033-110	V+2-4	G	87-067-825-010	PW4.1-6.9-0.25			
D	86-524-418-010	VFT ₂ +1.4-5	H	86-575-236-010	S-SCREW TAPE ADJ			

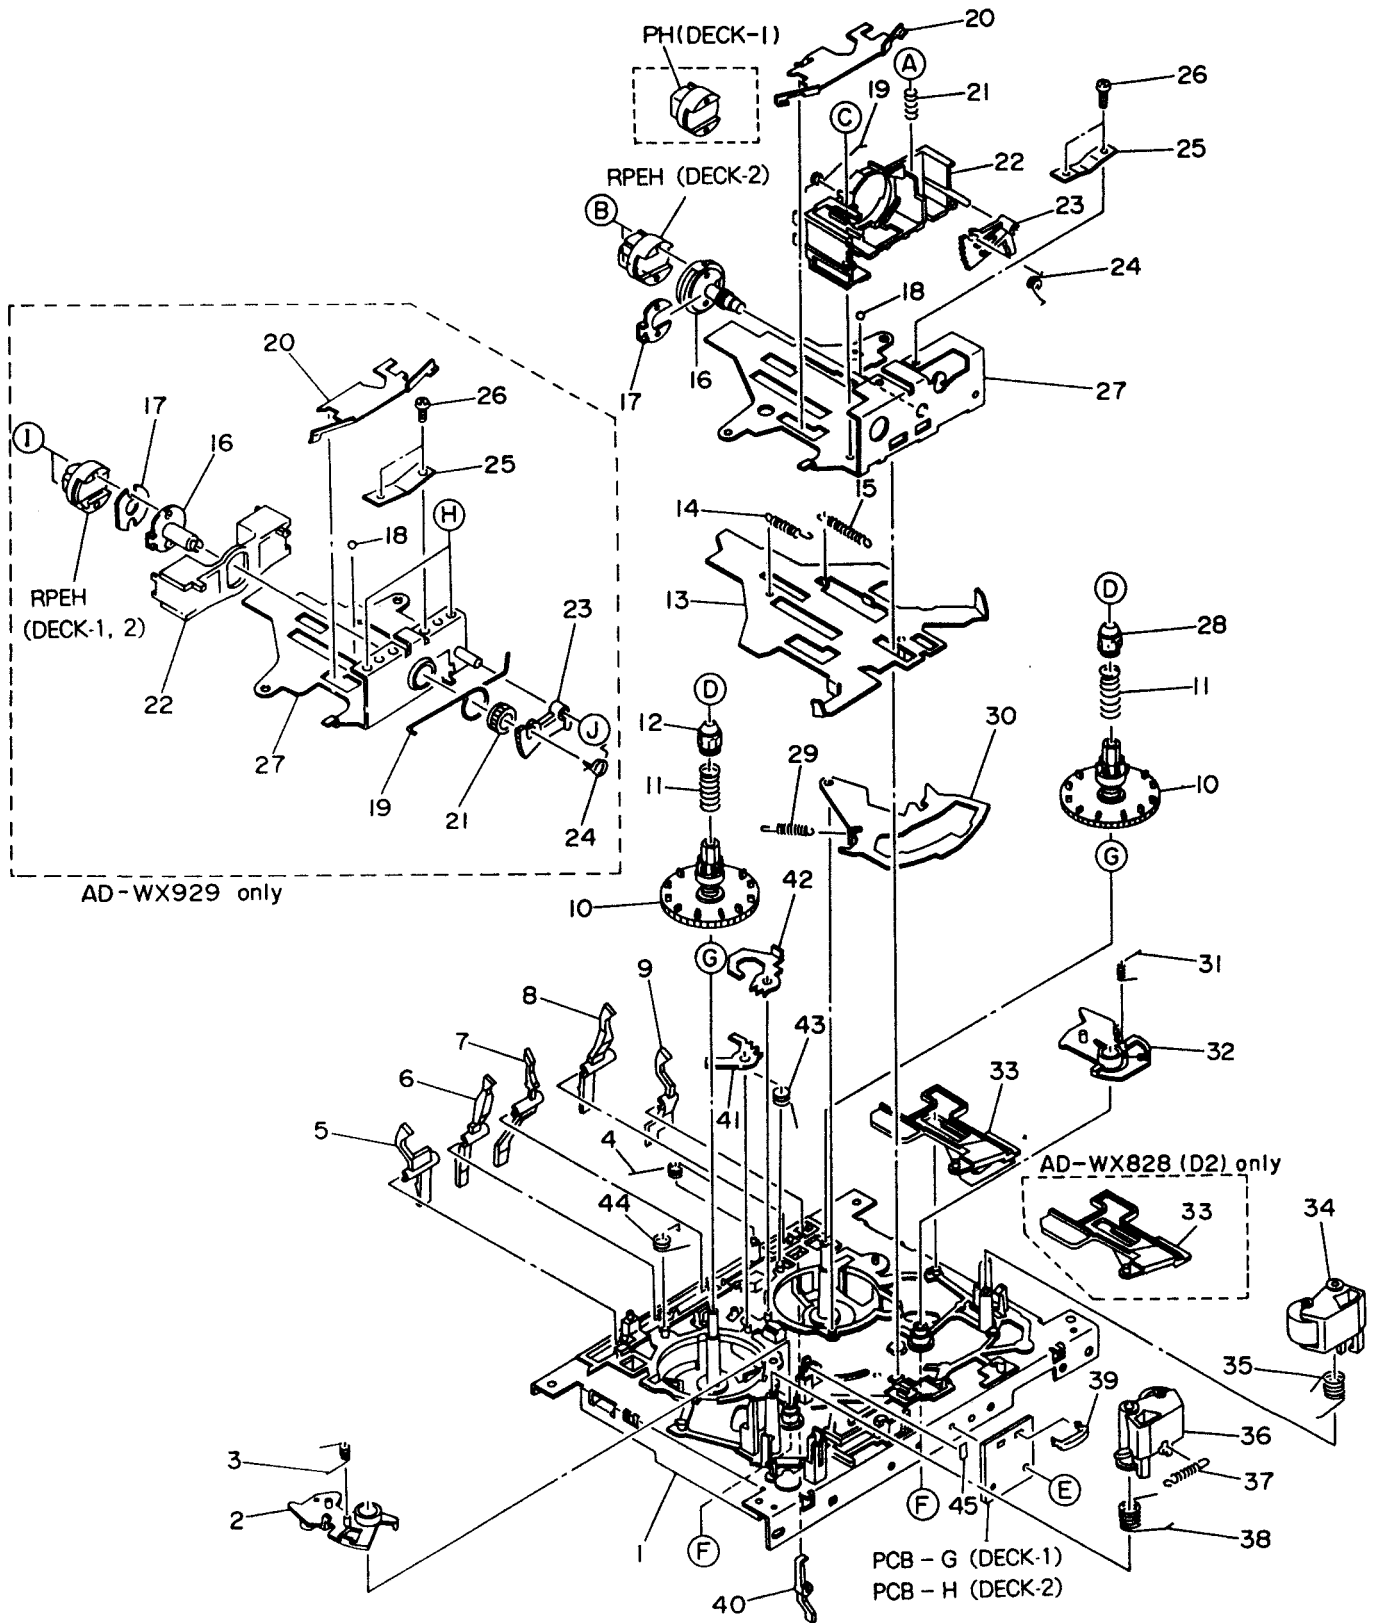

PART NO. CHANGED TO	REF. NO.	PART NO.	DESCRIPTION	COMMON MODEL	Q. TY
	2-1	★ 86-575-407-010	MECHANISM CHASSIS ASSY	*	1
	2-2	★ 86-535-239-110	LEVER, PLAY R		1
	2-3	★ 86-535-283-010	T-SPRING, PLAY GEAR R		1
	2-4	★ 80-ZM6-206-010	T-SPRING CASSETTE		1
	2-5	★ 86-575-322-110	LEVER, REC A (D2)	*	1
	2-6	★ 86-575-325-210	LEVER, METAL (D2)	*	1
	2-7	★ 86-575-324-310	LEVER, CASSETTE	*	1
	2-8	★ 86-575-327-210	LEVER, CLOME	*	1
	2-9	★ 86-575-323-010	LEVER, REC B (D2)	*	1
	2-10	★ 80-ZM6-254-210	GEAR REEL ASSY L		2
	2-11	★ 86-535-293-010	C-SPRING, REEL TABLE		2
	2-12	★ 86-524-218-319	STOPPER, S REEL TABLE		1
	2-13	★ 86-535-215-410	SLIDE PLATE ASSY		1
	2-14	★ 86-535-285-110	E-SPRING, SLIDE		1
	2-15	★ 86-575-226-010	E-SPRING, HEAD CHASSIS	*	1
	2-16	86-575-411-110	HOLDER, HOUSING (WX828)	*	1
	2-16	★ 86-575-398-010	HEAD, HOUSING ASSY 2 (WX929)	*	1
	2-17	★ 86-575-305-010	PLATE, HOUSING (WX828)	*	1
	2-17	★ 86-535-338-010	HEAD, MYLER (WX929)		1
	2-18	★ 87-073-018-010	BALL, STEEL 1.588		1
	2-19	★ 86-575-310-210	T-SPRING, HEAD (WX828)	*	1
	2-19	★ 86-575-240-010	T-SPRING, GUIDE (WX929)	*	1
	2-20	★ 86-575-347-110	P-SPRING, HEAD 2 (WX828)	*	1
	2-20	★ 86-535-289-210	P-SPRING, ACTUATING (WX929)		1
	2-21	★ 86-541-318-110	T-SPRING, AZIMUTH (WX828)		1
	2-21	★ 86-575-206-010	HEAD, FR GEAR (WX929)	*	1
	2-22	★ 86-575-288-510	GUIDE, TAPE (WX828)	*	1
	2-22	★ 86-575-214-110	GUIDE, TAPE (WX929)		1
	2-23	★ 86-575-290-310	GEAR, SEGMENT (WX828)	*	1
	2-23	★ 86-535-246-210	GEAR, SEGMENT (WX929)		1
	2-24	★ 80-ZM6-229-110	T-SPRING, SEGMENT GEAR 2 (WX828)		1
	2-24	★ 86-575-259-110	T-SPRING, SEGMENT GEAR (WX929)		1
	2-25	★ 86-575-343-110	P-SPRING, AZIMUTH 2 (WX828)	*	1
	2-25	★ 86-524-300-110	P-SPRING, AZIMUTH (WX929)		1
	2-26	★ 80-ZM6-251-010	S-SCREW, AZIMUTH (WX828)		2
	2-26	★ 86-535-297-010	SCREW, AZIMUTH 3H (WX929)		2
	2-27	★ 86-575-311-410	CHASSIS, HEAD (WX828)	*	1
	2-27	★ 86-575-209-410	CHASSIS, HEAD ASSY (WX929)	*	1
	2-28	★ 86-524-233-219	STOPPER, T REEL PLATE		1
	2-29	★ 86-535-284-110	E-SPRING, DIRECTION LEVER		1
	2-30	★ 86-535-218-310	DIRECTION LEVER ASSY		1
	2-31	★ 86-535-282-010	T-SPRING, PLAY GEAR F		1
	2-32	★ 86-535-238-310	LEVER, PLAY F		1
	2-33	★ 82-DW1-216-010	LEVER, SLIDE (WX828 EXCEPT D2)		1
	2-33	★ 86-575-345-310	LEVER, SW2 (WX828 D2)	*	1
	2-34	★ 86-575-408-010	PINCH LEVER ASSY F	*	1
	2-35	★ 86-575-222-110	T-SPRING, PINCH ROLLER F	*	1
	2-36	★ 86-575-409-010	PINCH LEVER ASSY R	*	1
	2-37	★ 86-575-339-010	E-SPRING, PINCH 22	*	1
	2-38	★ 86-575-341-110	T-SPRING, PINCH L (WX828)	*	1
	2-38	★ 86-575-223-110	T-SPRING, PINCH R (WX929)	*	1
	2-39	★ 86-575-342-010	HOLDER, WIRE 2	*	1
	2-40	★ 86-575-326-310	LEVER, RINK	*	1
	2-41	★ 86-535-252-210	LEVER, BRAKE R		1
	2-42	★ 86-535-251-110	LEVER, BRAKE F		1
	2-43	★ 86-575-416-010	T-SPRING, BRAKE F	*	1
	2-44	★ 86-575-417-010	T-SPRING, BRAKE RS	*	1
	2-45	★ 86-517-353-010	QUICK, SHEET (WX929)		1



EXPLODED VIEW - 3 (AD - WX929,AD - WX828)

REF. NO.	PART NO.	DESCRIPTION
A	86-524-457-010	U+2.6-5.5
B	87-741-072-410	UT ₂ +2.6-5
C	80-ZM6-211-010	PW2.68-4.15-0.3 SLOT
D	87-081-489-010	PW1.7-3.5-0.25 SLOT
E	87-067-380-010	PW1.7-7-0.5


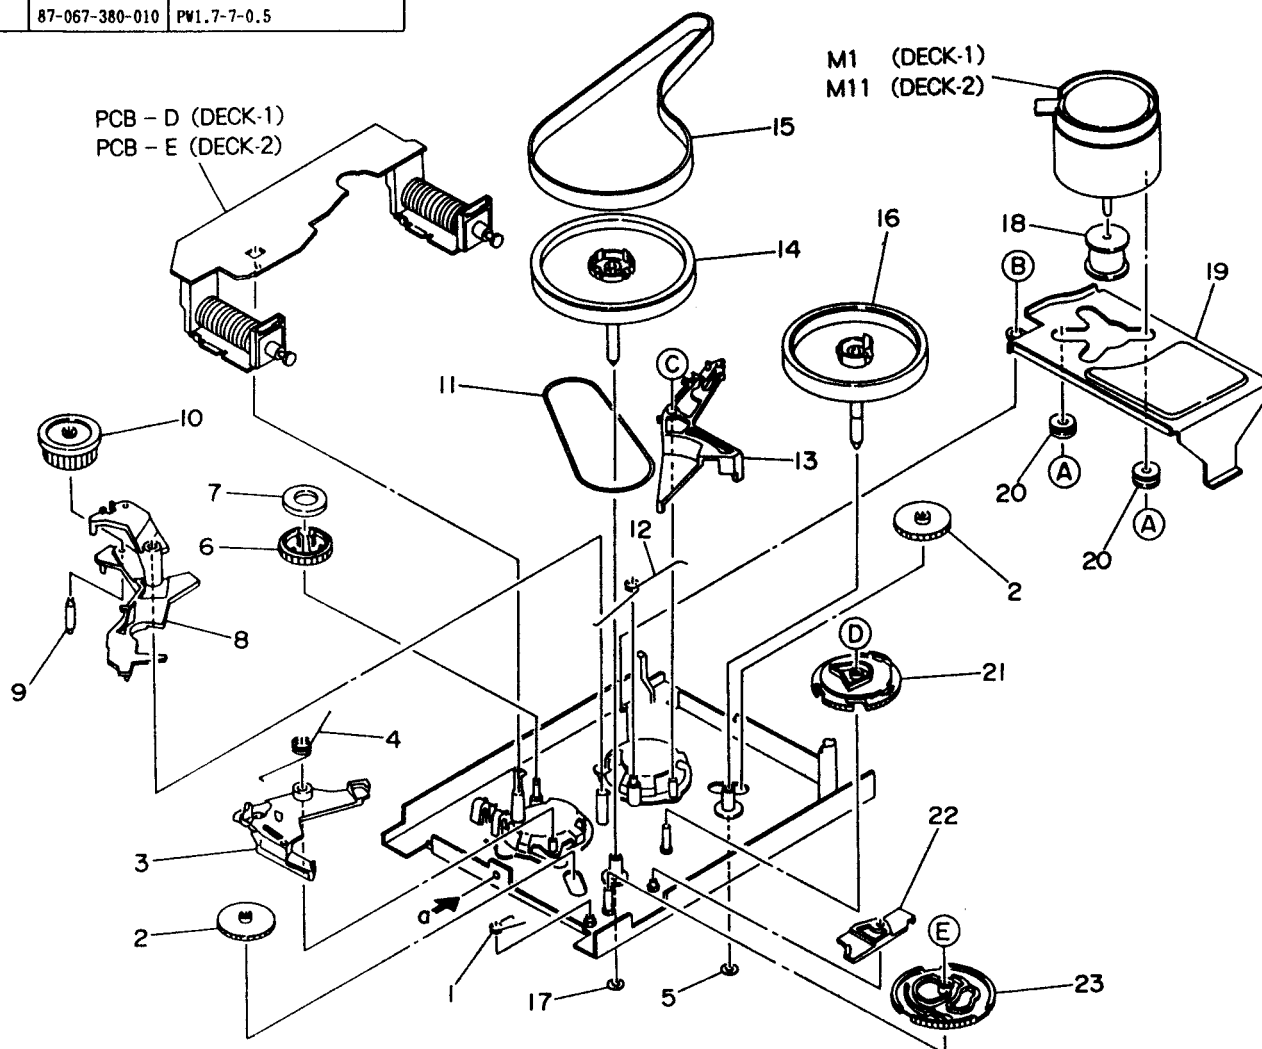


PART NO. CHANGED TO	REF. NO.	PART NO.	DESCRIPTION	COMMON MODEL	Q T
	3-1	★ 86-535-291-210	T-SPRING, FR CAM		1
	3-2	★ 86-575-221-210	GEAR, PLAY	*	2
	3-3	★ 86-535-230-510	LEVER, FR TRIGGER		1
	3-4	★ 80-ZM6-220-010	T-SPRING, FR 2		1
	3-5	★ 80-ZM6-243-010	SHEET, 175-3.6-0.5		1
	3-6	★ 86-575-328-110	GEAR, IDLER	*	1
	3-7	★ 80-ZM6-217-010	RING, MAGNET 2		1
	3-8	★ 80-ZM6-218-110	LEVER, FR 2		1
	3-9	★ 80-ZM6-222-110	SHAFT, PULLEY FR		1
	3-10	★ 80-ZM6-282-010	GEAR, FR 2		1
	3-11	80-ZM6-227-110	BELT, SQ 1.2-140		1
	3-12	★ 80-ZM6-205-110	T-SPRING, MAIN		1
	3-13	★ 86-535-231-510	LEVER, PLAY TRIGGER		1
	3-14	★ 86-575-373-010	FLYWHEEL ASSY R3	*	1
	3-15	★ 86-575-415-010	BELT, FLAT 0.55-217	*	2
	3-16	★ 86-575-375-010	FLYWHEEL ASSY L3	*	1
	3-17	★ 80-ZM6-242-010	SHEET, 1.95-3.6-0.5		1
	3-18	★ 86-575-406-010	PULLEY MOTOR RQ		1
	3-19	★ 86-575-301-410	HOLDER, MOTOR	*	1
	3-20	★ 86-513-441-210	COLLAR		2
	3-21	★ 86-575-312-210	CAM, MAIN	*	1
	3-22	★ 83-575-229-210	LEVER, PAUSE B	*	1
	3-23	★ 80-ZM6-219-210	CAM, FR MK2 2M		1

SPRING APPLICATION POSITION - 1 (AD - WX929)

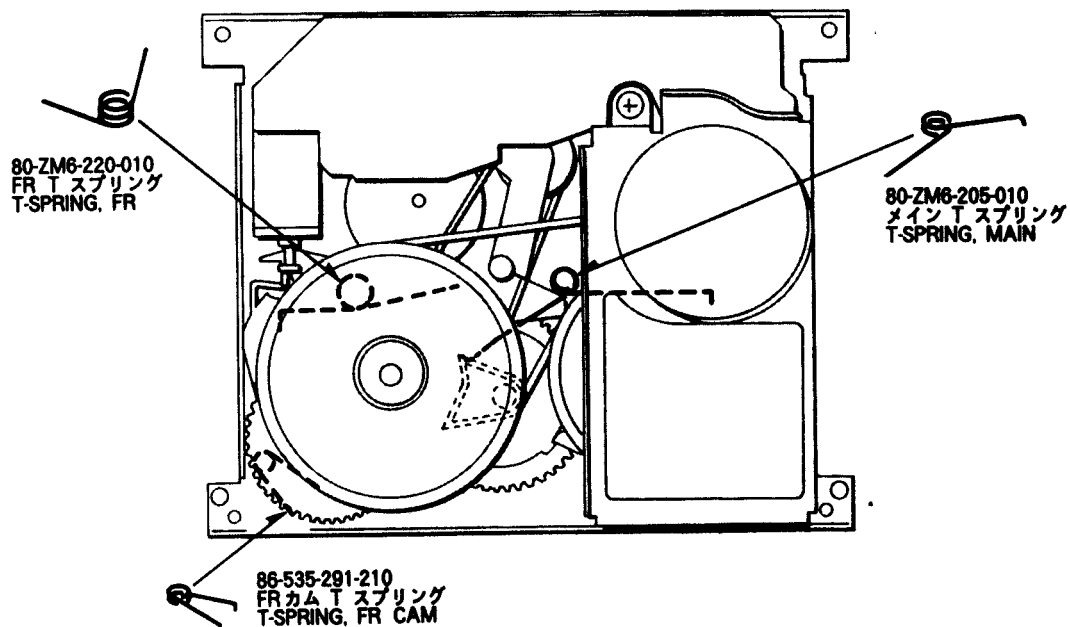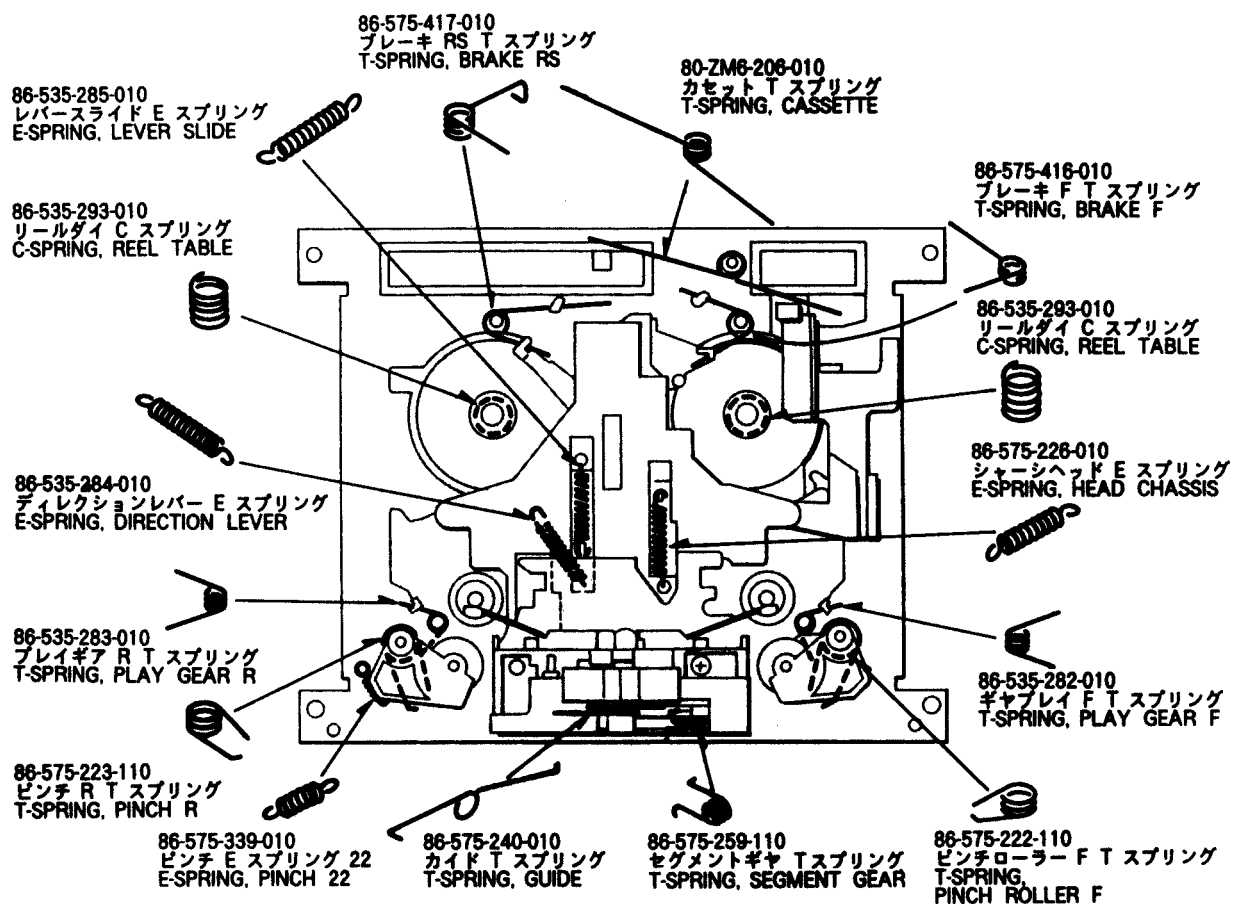

SPRING APPLICATION POSITION - 2 (AD - WX828)

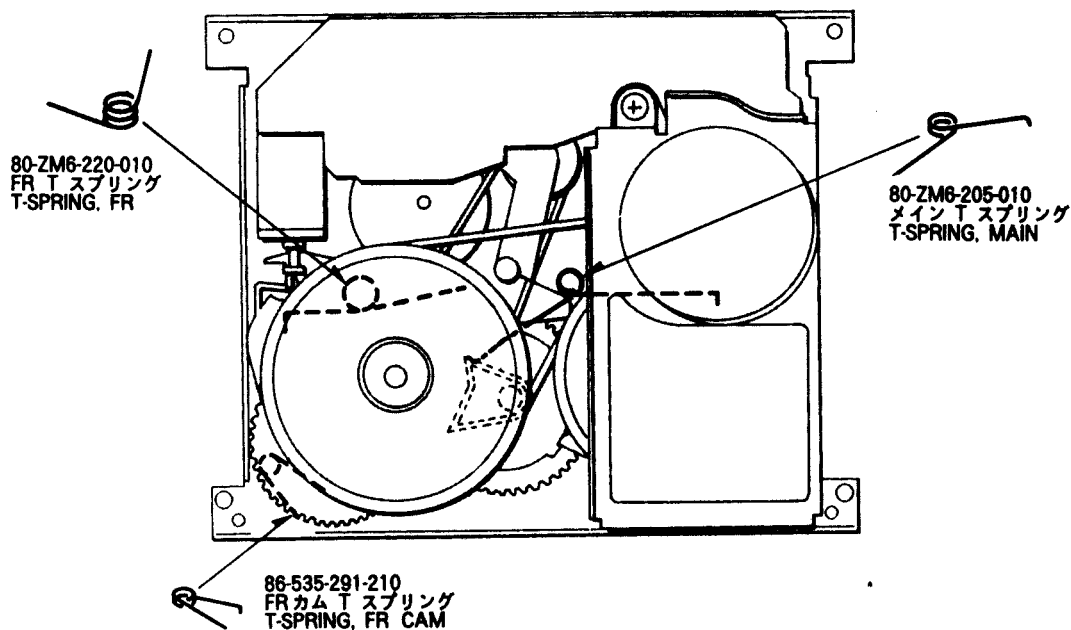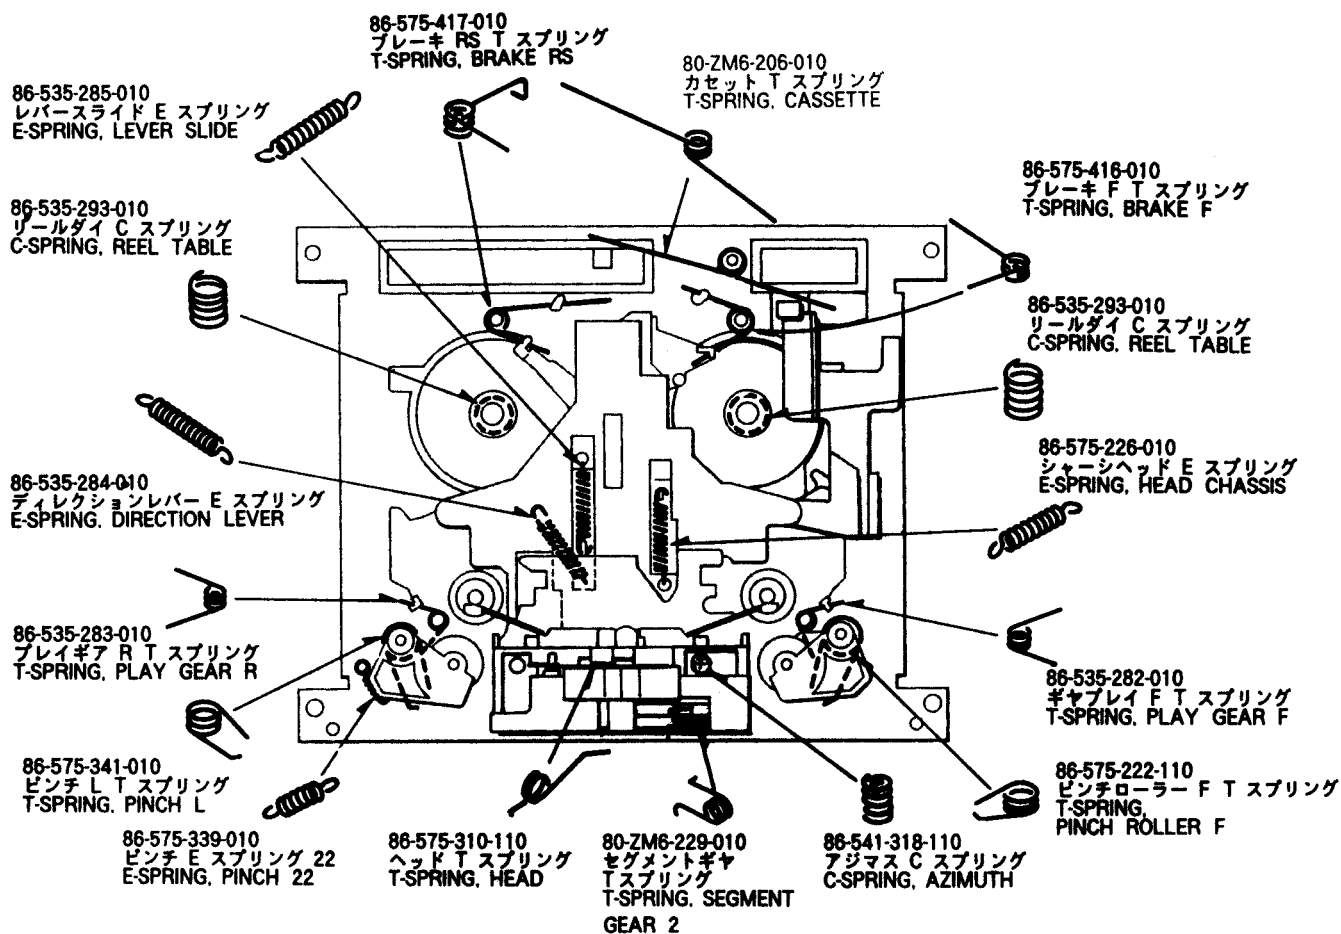

REFERENCE NAME LIST

ELECTRICAL SECTION

DESCRIPTION	REFERENCE NAME
ANT	ANTENNAS
C-	CHIP
C-CAP	CAP, CHIP
C-CAP TN	CAP, CHIP TANTALUM
C-COIL	COIL, CHIP
C-DI	DIODE, CHIP
C-DIODE	DIODE, CHIP
C-FET	FET, CHIP
C-FOTR	FILTER, CHIP
C-JACK	JACK, CHIP
C-LED	LED, CHIP
C-RES	RES, CHIP
C-SFR	SFR, CHIP
C-SLIDE SW	SLIDE SWITCH, CHIP
C-SW	SWITCH, CHIP
C-TR	TRANSISTOR, CHIP
C-VR	VOLUME, CHIP
C-ZENER	ZENER, CHIP
CAP, CER	CAP, CERA-SOL
CAP, E	CAP, ELECT
CAP, M/F	CAP, FILM
CAP, TC	CAP, CERA-SOL
CAP, TC-U	CAP, CERA-SOL SS
CAP, TN	CAP, TANTALUM
CERA FIL	FILTER, CERAMIC
CF	FILTER, CERAMIC
DL	DELAY LINE
E/CAP	CAP, ELECT
ECM	ECM
FLTR	FILTER
FUSE RES	RES, FUSE
MOT	MOTOR
P-DIODE	PHOTO DIODE
P-SNSR	PHOTO SENSER
P-TR	PHOTO TRANSISTOR
POLY VARI	VARIABLE CAPACITOR
PPCAP	CAP, PP
PT	POWER TRANSFORMER
PTR, RES	PTR, MELF
RC	REMOTE CONTROLLER
RES NF	RES, NON-FLAMMABLE
RESO	RESONATOR
SHLD	SHIELD
SOL	SOLENOID
SPKR	SPEAKER
SW, LVR	SWITCH, LEVER
SW, RTRY	SWITCH, ROTARY
SW, SL	SWITCH, SLIDE
THMS	THERMISTOR
TR	TRANSISTOR
TRIMMER	CAP, TRIMMER
TUN-CAP	VARIABLE CAPACITOR
VIB, CER	RESONATOR, CERAMIC
VIB, XTAL	RESONATOR, CRYSTAL
VR	VOLUME
ZENER	DIODE, ZENER
サージレギュ レータ	SERGESUPPRESSOR
セラミック	CAP, CERA

MECHANICAL SECTION

DESCRIPTION	REFERENCE NAME
ADHESHIVE	SHEET ADHESHIVE
AZ	AZIMUTH
BAR-ANT	BAR-ANTENNA
BAT	BATTERY
BAT, CONTACT ASSY	BATTERY CONTACT ASSY
BATT	BATTERY
BRG	BEARING
BTN	BUTTON
CAB	CABINET
CASS	CASSETTE
CHAS	CHASSIS
CHAS, FR	CHASSIS, FRONT
CHAS, MECHA	CHASSIS, MECHANISM
CLR	COLLAR
CONT	CONTROL
CRSR	CURSOR
CUSH	CUSHION
DIR	DIRECTION
DUBB	DUBBING
FLY-WHL	FLYWHEEL
FR	FRONT
FUN	FUNCTION
G-CU	G-CUSHION
HDL	HANDOL
HIMERON	CLOTH
HINGE, BAT	HINGE, BATTERY
HLD	HOLDER
HT-SINK	HEAT SINK
IB	INSTRUCTION BOOKLET
IDLE	IDLER
IND, L-R	INDICATOR, L-R
KEY, CONT	KEY, CONTROL
KEY, PRGM	KEY, PROGRAM
KNOB, SL	KNOB, SLIDE
KNOB, VOL REV	KNOB, VOLUME REV
LBL	LABEL
LID, BATT	LID, BATTERY
LID, CASS	LID, CASSETTE
LVR	LEVER
P-SP	P-SPRING
PANEL, CONT	PANEL, CONTORL
PANEL, FR	PANEL, FRONT
PULLY, LOAD MO	PULLY, LOADING MOTOR
RBN	RIBBON
S-	SPECIAL
SEG	SEGMENT
SH	SHEET
SHLD-SH	SHIELD-SHEET
SL	SLIDE
SP	SPRING
SP, SCREW BAT	SPECIAL SCREW BATTERY
SP-SCREW	SPECIAL-SCREW
SPACER, BAT	SPACER, BATTERY
SPR	SPRING
SPR-P	P-SPRING
SPR-PC-PUSH	P-SPRING, C-PUSH
SW	SWITCH
T-SP	T-SPRING
TERM	TERMINAL
TRIG	TRIGGER
TUN	TUNING
VOL	VOLUME
W	WASHER
WHL	WHEEL
WORM-WHL	WORM-WHEEL
シャフト	ARM, SHAFT
ガイド	GUIDE, SHAFT
ストラップ	STRAP