

PHILCO RADIO & TELEV. CORP.

MODEL 45
Alignment Data
Voltage, Layouts

Model 45

Philco Model 45 is a six tube receiver operating on alternating current and capable of receiving either standard and police broadcasts between 540 and 1720 kilocycles, or short-wave stations between 4.2 and 13 megacycles. The left hand side of the dial is calibrated in kilocycles for standard reception and the right in megacycles for short-wave stations. A two-position switch changes reception from standard to short-waves.

Model 45 uses a type 6-A-7 detector-oscillator, two type 39-44 I. F. Tubes, type 75 2d detector, type 42 output tube, and type 80 rectifier. The power consumption is 65 watts. The intermediate frequency is 460 K.C.

Power Transformer Voltages

Terminals	Volts	Circuit	Color Leads
1-2	120	Primary	White
3-4	5.0	Fil. of 80	Blue
5-7	600	Plates of 80	Yellow
8-10	6.3	Filaments	Black
6	...	Center of 5-7	Yellow—Green tr.
9	...	Center of 8-10	Black—Yellow tr.

Tube Socket Voltages

CIRCUIT	Dat. Osc.	1st IF	2d IF	3d Det.	Out-put	Rest.
Type Tube	6A7	39-44	39-44	75	42	50
Filament (F to F).....	6.3	6.3	6.3	6.3	6.3	5.0
Plate (P to K).....	260	255	255	175	250	235
Screen Grid (SG to K).....	G1-35 G2-185 G3&G-85	75	75	...	200	...
Cathode (K to F).....	4.2	3.8	3.8	0	0	...

The above tests were made with an AC voltmeter for filament voltages and a high resistance DC voltmeter for all others. Dial at 550 KC, volume control at maximum. Test made with test prods applied to socket terminals underneath chassis. Line voltage 115.

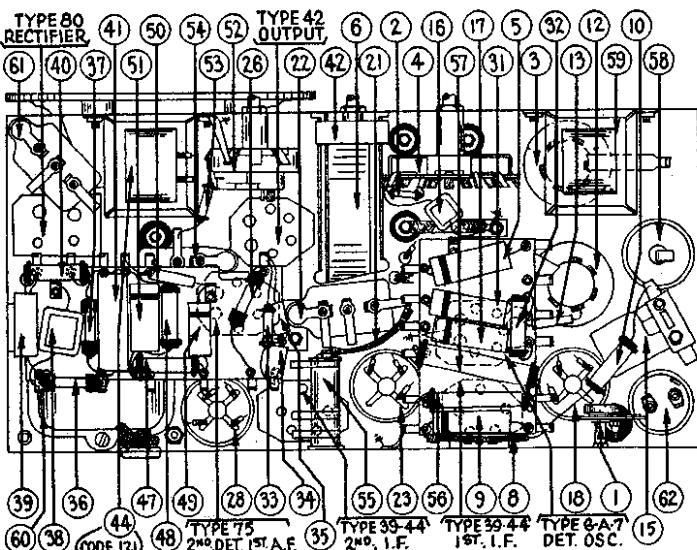


Fig. 4—Bottom View Showing Parts

Adjusting Compensating Condensers

For adjustment of compensating (padding) condensers in model 45, an accurately calibrated signal generator and a special insulated padding wrench are needed. We suggest the Philco Model 024 Signal Generator or the 048 Tester which includes a similar instrument.

The chassis must be removed from cabinet in order to make all adjustments.

Adjustments are made in the following order—

ADJUSTMENT OF THE INTERMEDIATE FREQUENCY—Remove the grid clip from the type 6A7 tube and connect the "ANT" output terminal of the signal generator to the grid cap of the tube. Connect the "GND" terminal of the signal generator to the "GND" terminal of the receiver chassis.

Connect the output meter to the primary terminals of the output transformer. Set the signal generator at 460 K.C. (the intermediate frequency of Model 45) and with the receiver and signal generator turned on, the wave band switch at left and dial at 600 K.C., adjust each of the I. F. compensating condensers in turn, to give maximum response in the output of the receiver. The three pairs of I. F. compensating condensers are located one pair at the top of each of the three I. F. transformer shields. These are the three metal "cans" near the rear of the chassis. Each of the transformers has a dual compensating condenser mounted at its top, and accessible thru a hole in the top of the coil shield. In the dual compensators, the Primary circuit is adjusted by turning the screw; the Secondary circuit is adjusted by turning the hex-head nut.

ADJUSTMENT OF THE WAVE TRAP—Replace the grid clip upon the Detector-Oscillator tube (Type 6A7). Connect the output leads from the signal generator directly to the antenna and ground terminals of the receiver. Set the Wave-Band Switch of the receiver to the standard broadcast band (left hand position) and the Station Selector at the low frequency (540 K.C.) end. Adjust the Wave Trap condenser to give MINIMUM response to a 460 K.C. signal from the signal generator. The Wave Trap ① is located at rear and underneath the chassis, and is shown in Figure 4. It is reached from the rear of the chassis, by inserting the fibre wrench thru the hole near right-hand rear corner of chassis.

DETECTOR, AND OSCILLATOR "HIGH" AND "LOW" FREQUENCY ADJUSTMENTS—The "antenna" and "oscillator H. F." compensators are located on top of the tuning condenser assembly, reached from above.

Set the signal generator at 1500 K.C., tune in this signal on the set and adjust the antenna compensator ⑦ (nearest tuning control) to give maximum reading in the output meter.

Next adjust the oscillator H. F. condenser ⑪ (located on the other section of tuning condenser) to maximum reading.

Finally set the signal generator at 600, tune in this signal and adjust the oscillator "L. F. condenser", located underneath chassis ⑩ in Fig. 4) to maximum reading. This adjustment is reached thru the hole in top of chassis, between the two electrolytic condensers (left hand end of chassis when facing rear).

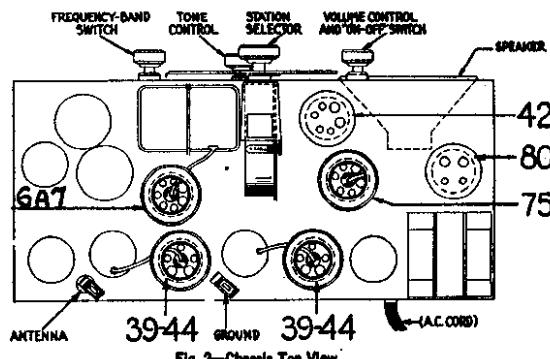


Fig. 2—Chassis Top View

MODEL 45
**Schematic
Parts List
Socket Layout**

PHILCO RADIO & TELEV. CORP.


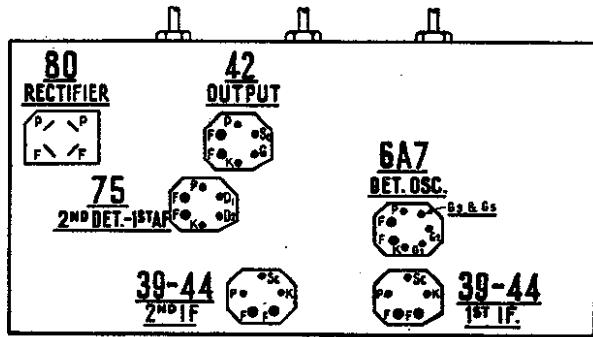


Fig. 1—Tube Socket Layout (underside)

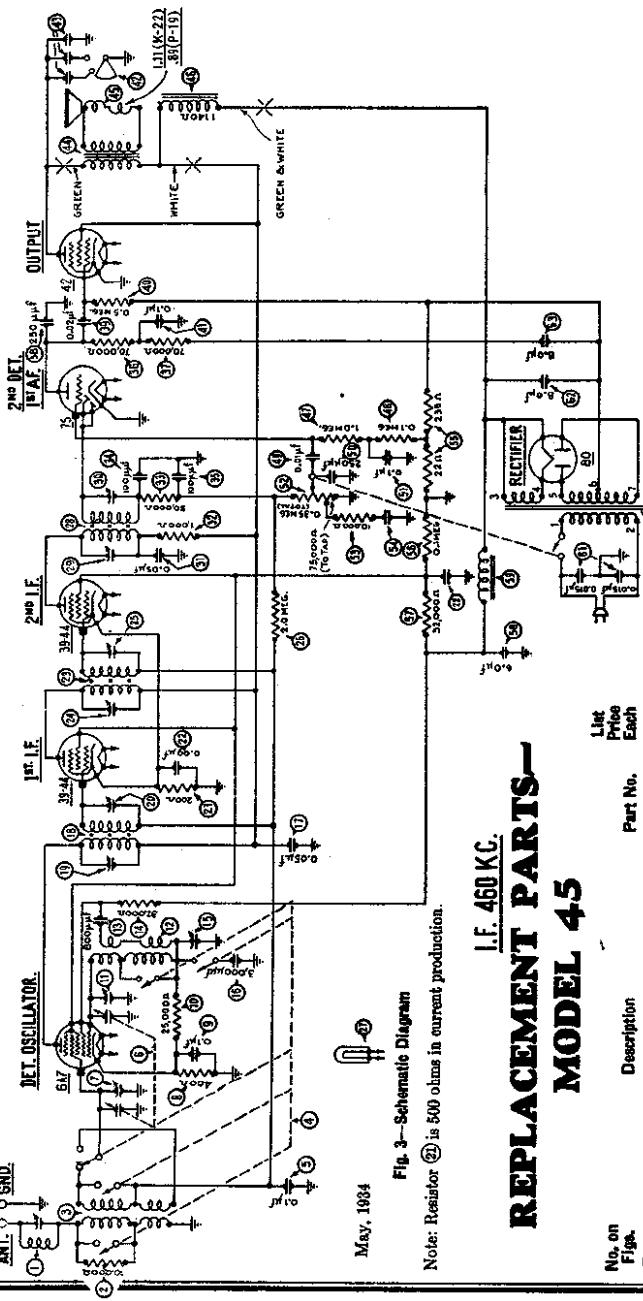

No. on Fig.	Description	Part No.	List Price Each
①	Wave Trap.....	38-4199	\$0.30
②	Resistor (10,000 ohms) (Brown-Black-Orange)	4412	.25
③	Antenna Transformer.....	32-1380	.60
④	Wave Band Switch.....	42-1982	1.10
⑤	Condenser (.1 Mfd.) (Tubular).....	30-4122	.35
⑥	Tuning Condenser Assembly.....	31-1169	4.40
⑦	Compensating Condenser (Pet.).....	Part of ④	
⑧	Resistor (400 ohms—Flexible wire wound).....	33-3016	.20
⑨	Condenser (.1 Mfd.) (Tubular).....	30-4122	.35
⑩	Resistor (25,000 ohms) (Red-Green-Orange).....	4516	.25
⑪	Compensating Condenser (Pet. H. F.).....	Part of ④	
⑫	Oscillator Transformer.....	32-1361	.45
⑬	Condenser (.0008 Mfd.—Mica).....	5878	.35
⑭	Resistor (70,000 ohms) (Violet-Black-Orange).....	3825	.25
⑮	Condenser (.00025 Mfd. Mica).....	5886	.35
⑯	Condenser (.02 Mfd. Tubular).....	30-4113	.45
⑰	Resistor (.5 mfd.) (Yellow-White-Yellow).....	4517	.25
⑱	Condenser (.1 Mfd.) (Tubular).....	30-4170	.35
⑲	Tone Control.....	30-4178	.75
⑳	Condensers.....	Inside 42	
㉑	Output Transformer (Code 121).....	32-7041	.44
㉒	* Output Transformer (Code 122).....	2680	1.25
㉓	Voice Coil & Cone Assembly.....	Part of ㉔	
㉔	P-19 (Compact).....	36-3827	.50
㉕	K-22 (Lowboy).....	38-3174	.40
㉖	* Field Coil and Pot Assembly.....	6808	.11
㉗	P-19 (Compact).....	36-3298	3.00
㉘	K-22 (Lowboy).....	02767	2.70
㉙	Resistor (1 mfd.) (Brown-Black-Green).....	Part of ㉚	
㉚	Compensating Condenser—3d I. F. Primary.....	Part of ㉛	
㉛	Compensating Condenser—3d I. F. Secondary.....	6872	.25
㉜	Resistor (2 mfd.) (Red-Black-Green).....	6808	.11
㉝	Pilot Lamp.....	22-1364	1.55
㉞	3d I. F. Transformer.....	Part of ㉟	
㉟	Compensating Condenser—3d I. F. Primary.....	Part of ㉟	
㉟	Compensating Condenser—3d I. F. Secondary.....	Part of ㉟	

- ㉟ Resistor (1 mfd.) (White-White-Green)..... 4411 .25
- ㉟ Condenser (.01 Mfd. Tubular)..... 30-4124 .25
- ㉟ Does not appear in Fig. 4.
- ㉟ Condenser (.0025 Mfd. Mica)..... 5858 .35
- ㉟ Condenser (.1 Mfd. Tubular)..... 30-4122 .35
- ㉟ Volume Control and On-Off Switch..... 32-5066 1.45
- ㉟ Resistor 10,000 ohms (Brown-Black-Orange)..... 32-1020 .35
- ㉟ Condenser (Code 121) (.05 Mfd.) (Bakelite Block)..... 3815-W .35
- ㉟ Condenser (Code 122) (.09 Mfd.) (Bakelite Block)..... 4986-AM .35
- ㉟ Voltage Divider (BC Resistor 22—265 ohms) (Wire wound)..... 32-3037 .20
- ㉟ Resistor 1 mfd (White-White-Orange)..... 3767 .25
- ㉟ Resistor 25,000 ohms (Orange-Red-Orange)..... 32-1026 .35
- ㉟ Condenser (Electrolytic—6 Mfd.)..... 36-2020 1.40
- ㉟ Filter Choke..... 32-7018 1.50
- ㉟ Power Transformer..... 32-7226 4.25
- ㉟ Condenser (.015 Mfd. twin—Bakelite blank)..... 3738-E .40
- ㉟ Resistor 1 mfd (White-Orange)..... 3767 .25
- ㉟ Condenser (Electrolytic 3—8 Mfd. 450 Volts)..... 30-3028 .40
- ㉟ A. C. Cord and Plug Assembly..... L-943-A .60
- ㉟ Tube Shield, Four Prong Socket..... 28-1107 .10
- ㉟ Five Prong Socket..... 4935 .10
- ㉟ Six Prong Socket..... 6417 .11
- ㉟ Seven Prong Socket..... 27-4005 .11
- ㉟ Speaker Socket (Lowboy set—code 122)..... 4957 .10
- ㉟ Knob..... 27-4032 .10
- ㉟ Dial Assembly..... 27-4031 .10
- ㉟ Dial Scale..... 31-1298 .45
- ㉟ Mounting Screw (Compact set)..... 27-5042 .17
- ㉟ Mounting Washer (Compact set)..... W-1945 .35
- ㉟ Foot (Rubber)..... 5035 .05
- ㉟ Resistor (1 mfd.) (Brown-Black-Green)..... 4409 .25