


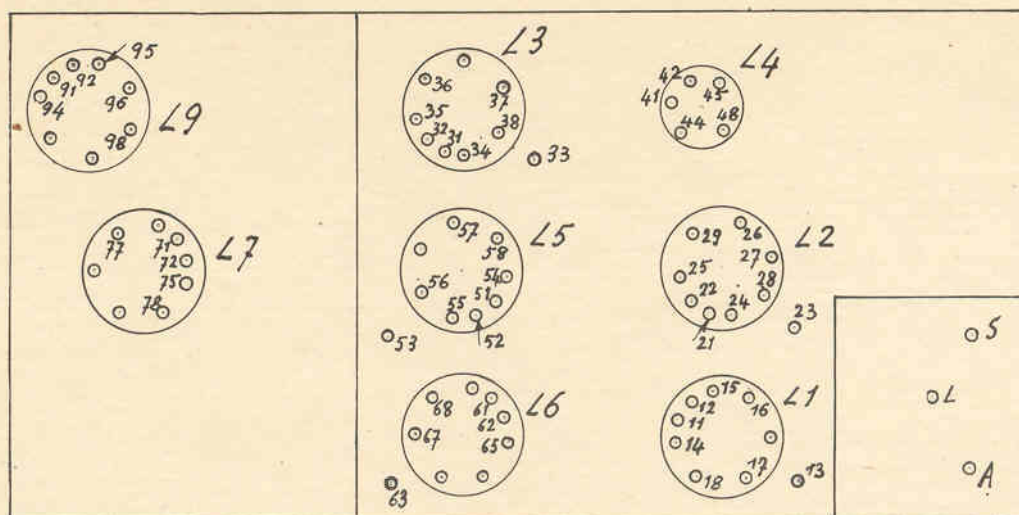

Circuits des Resistances

9	13	33	48	53	58	63	75	A									
	100	100	180	140	270	180	300	0									
10	15/16	17	18	26	27	28	29	35/36	37	38	45	55/56	57	68	L	S	
	400	240	100	145	240	475	240	400	240	475	500	400	240	460	480	460	
11	23	25	65	67	77	78											
	245	300	380	415	440	440											
12	91	92	94	95	96	98	11/12	71/72	24	34	44	54	14				
	25	15	25	15	25	25	5	5	5	5	5	5	5				

Circuits des Capacités

Variantes (circuits de Resistances 243B)

9	23	25	55	65	75												
	320	270	485	480	360												
10	13	15	17	35	68												
	100	200	400	200	225												
11	33																
	390																
12	53	58x63									91	92	94	95	96	98	
	180	195									45	20	45	20	45	45	

Placer le commutateur de A sur G.O.

" le volume contrôle au maximum

la sensibilité au maximum

H.P. branché.