


TABLEAU DE MESURE

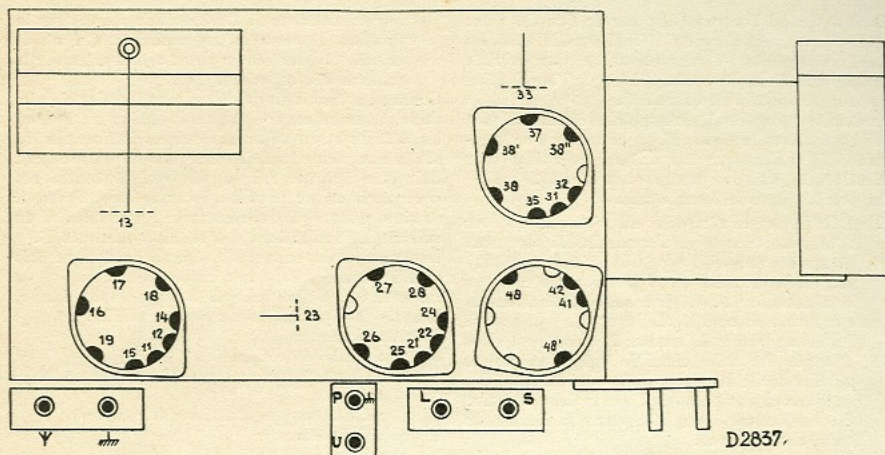

RESISTANCE

12	11/12	41/42	11	14	24	3 × Y			P	L	S				
						O.C.	O.M.	O.L.							
	10		10	10	10	100	370	465	10	10	35				
11	13														
	O.C.	15	25	26	35	38''	48	48''							
	100	335	305	305	275	390	255	255							
10	16	18	3 × 19			27	28	37							
			O.C.	O.M.	O.L.										
	145	450	210	195	195	100	445	445							
9	2 × 13		17	23	33	38'	38	41	U						
	O.M.	O.L.													
	65	65	340	70	140	205	220	370	230						

CAPACITÉ

12	33/38'														
	220														
11	17	23	27												
	140	205	150												

Commuter sur les ondes moyennes (585 mètres). Tourner le régulateur de tonalité sur la position „haut”.
Tourner le régulateur du volume sonore sur la position maximum.