


MANUAL OF 1940 MOST POPULAR SERVICE DIAGRAMS

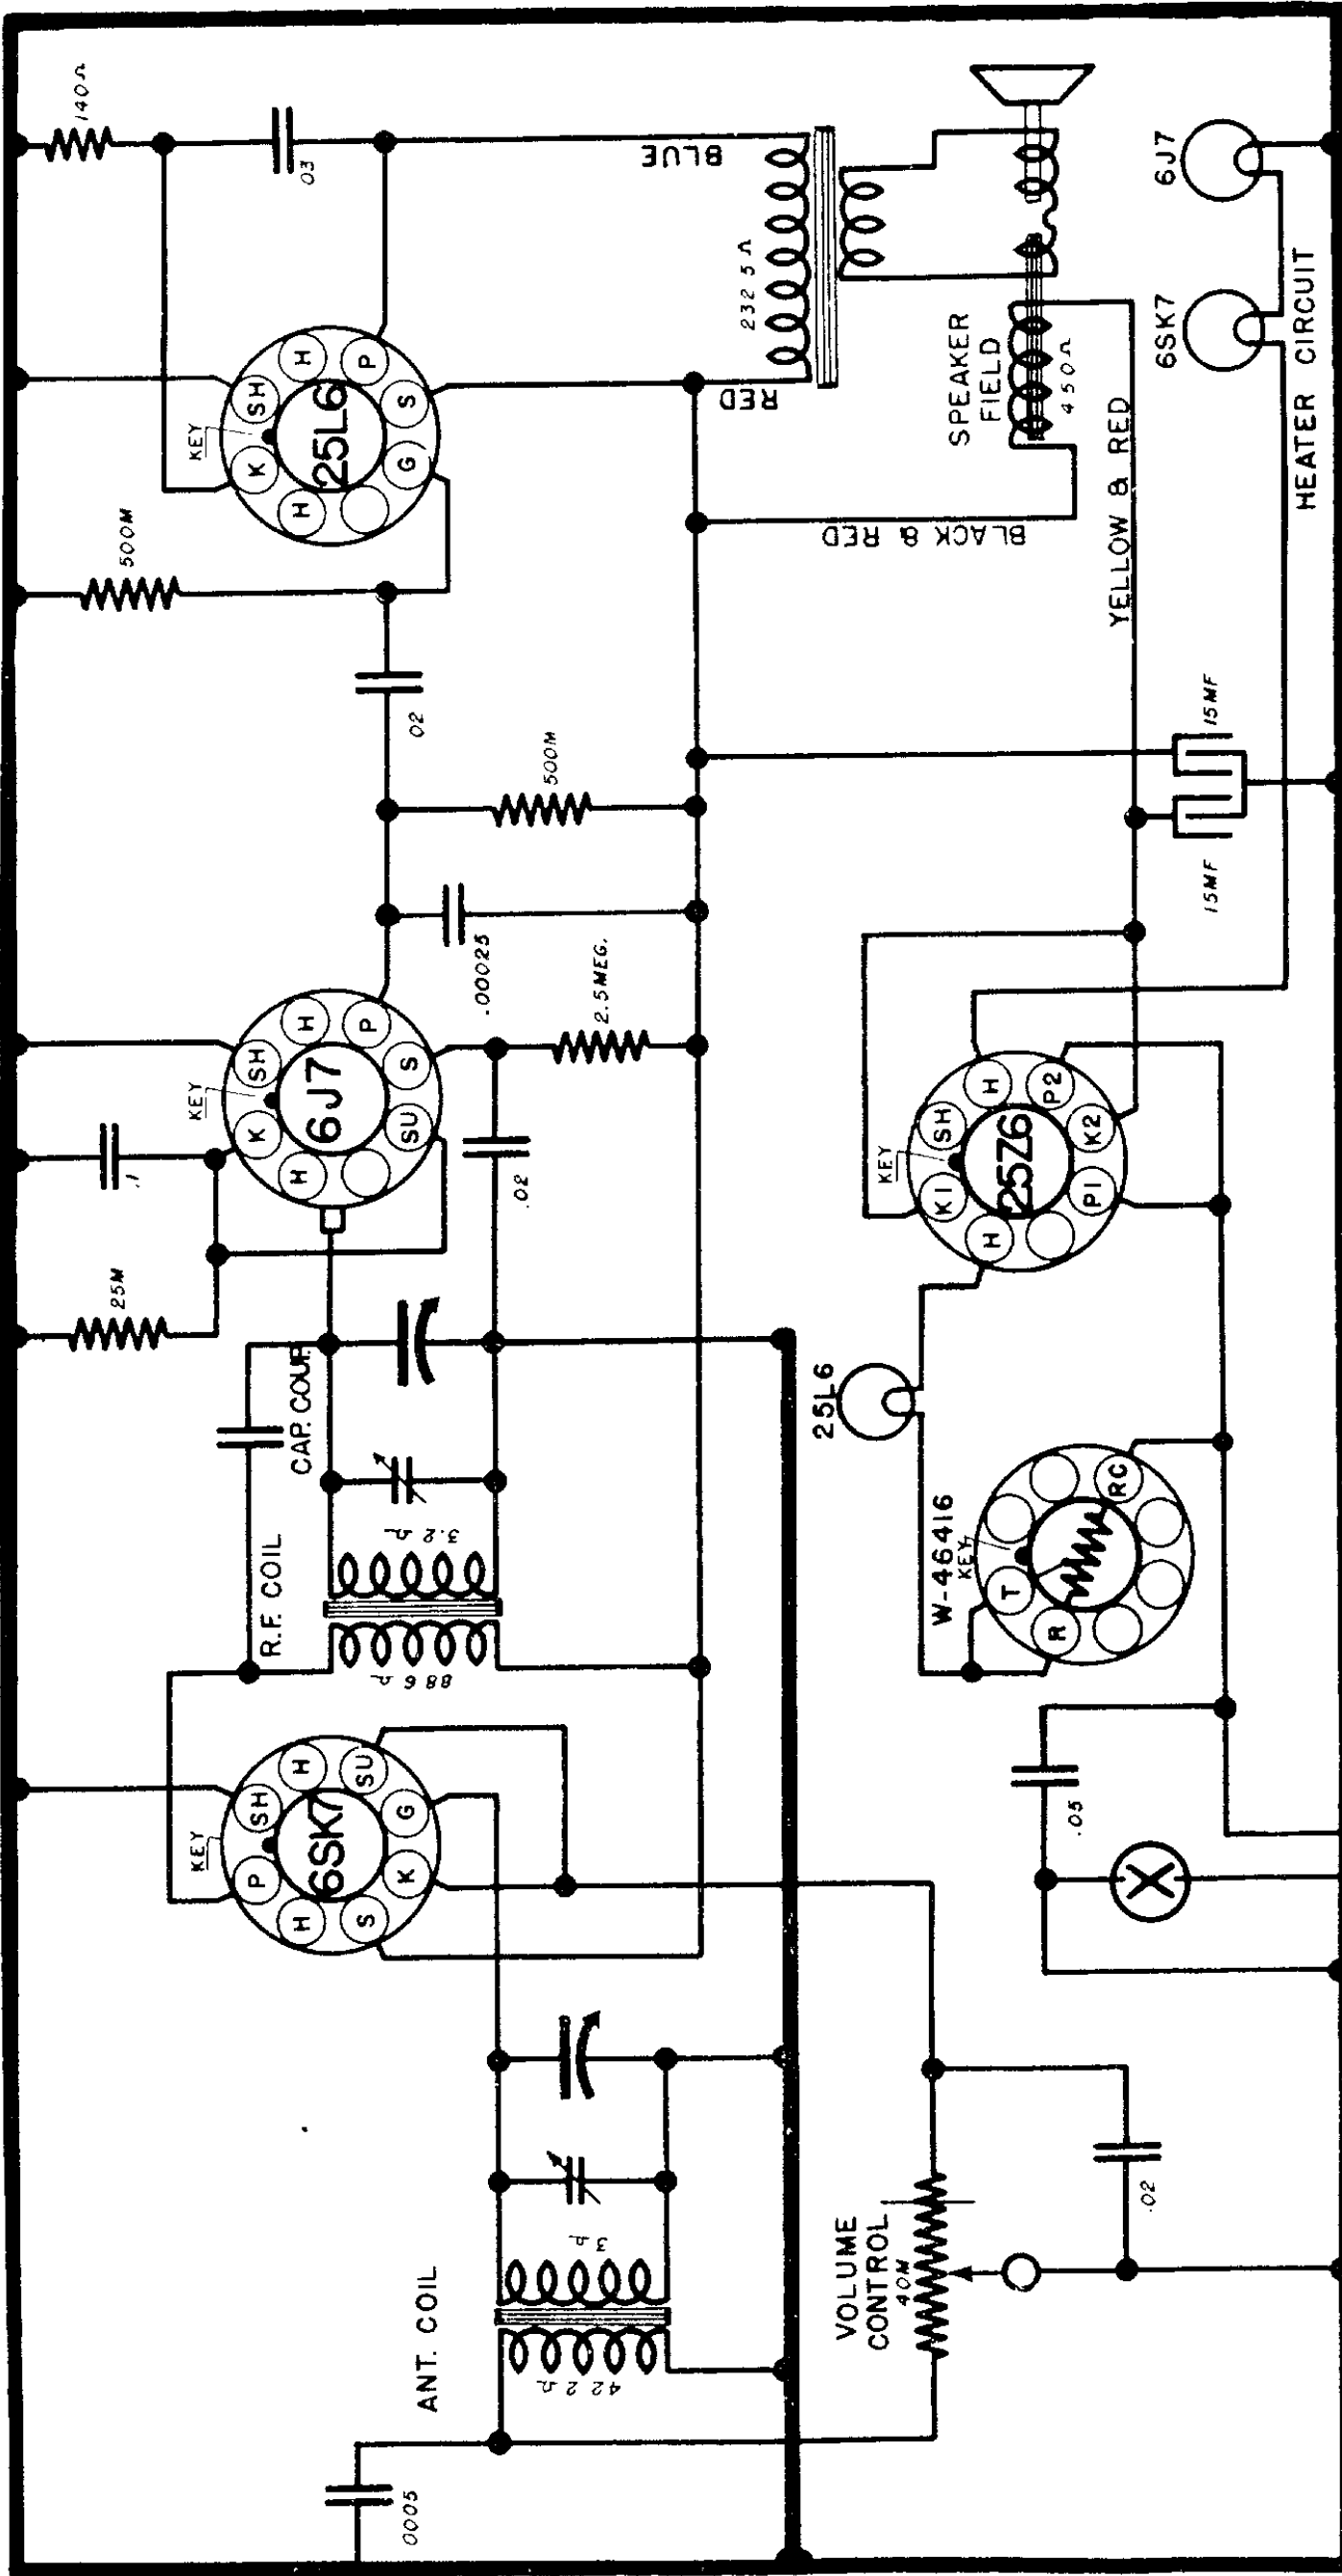

Power Consumption @ 117.5 Volts Line—Approximately 43 Watts.
 D. C. Drop Across Speaker Field—29 Volts.
 Maximum Power Output Approximately 2.0 Watts.

The material presented on this page has been prepared by and is printed through the courtesy of THE CROSLEY CORP.

MODEL --- # 10

TUBES MAY BE METAL OR GT TYPE

CROSLEY

SOCKET VOLTAGES TAKEN @ 117.5 VOLT LINE (A. C.)

Tube	Function	No. 1	No. 2	No. 3	No. 4	No. 5	No. 6	No. 7	No. 8
6SK7	R. F. Amplifier	GND.	H	3.0	GRID	3.0	92	H	91
6J7	Detector	GND.	H	20	8	2.0	—	H	2.0
25L6	Output	GND.	H	82	91	GRID	N.C.	H	5.8
25Z6	Rectifier	GND.	H	A.C.	120	A.C.	—	H	120
W-46416	Ballast Resistor — 165 Ohms (Cold)								

ANTENNA ROLL

M. N. BEITMAN, SUPREME PUBLICATIONS