
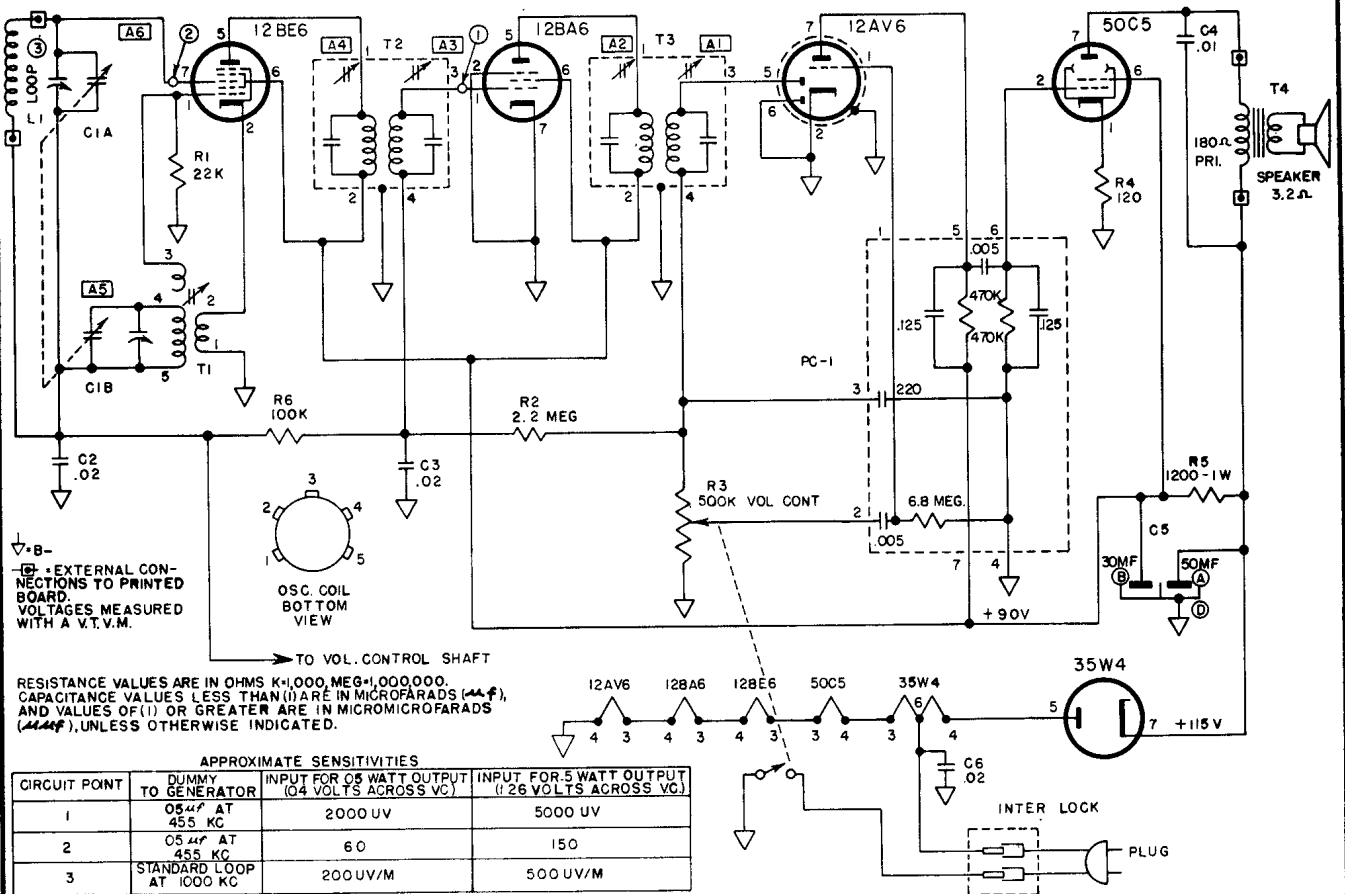


MOST-OFTEN-NEEDED 1959 RADIO SERVICING INFORMATION

A R V I N
Model 2581
Chassis 1.43800

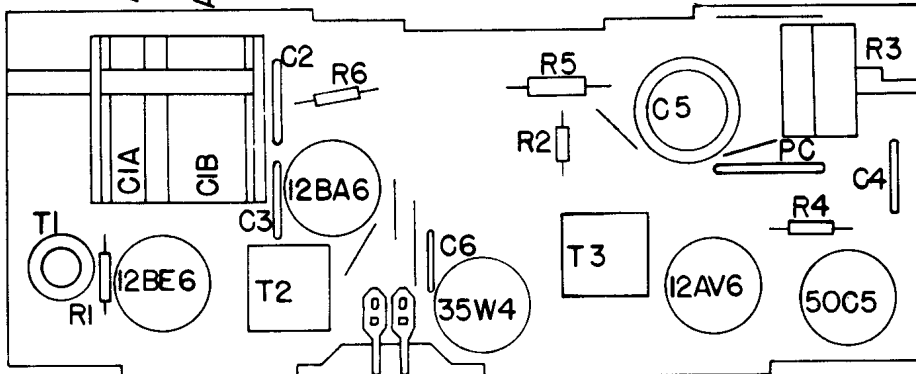

ALIGNMENT PROCEDURE Output meter connection Across speaker voice coil
 Output meter reading to indicate 500 milliwatts (standard output)... 1.26 volts
 Connection of generator ground lead..... Floating ground
 Generator modulation 30% 400 cycles

Position of Variable	Frequency of Generator	Dummy Antenna	Generator Output Connection	Trimmers Adjusted in Order Shown for Maximum Output	Function of Trimmer
Open	455 Kc	.05 μ fd	Pin 7 12BE6	A1, A2, A3, A4	I. F.
Open	1670 Kc		* Test Loop	A5	Oscillator
1400	1400 Kc		* Test Loop	A6	Antenna
1000	1000 Kc		* Test Loop	Fan C1A Plates	
600	600 Kc		* Test Loop	Fan C1A Plates	

* Standard Hazeltine Test Loop Model 1150 or 3 turns of wire about 6" in diameter placed about one foot from the set loop.