


TABLEAU DE MESURE

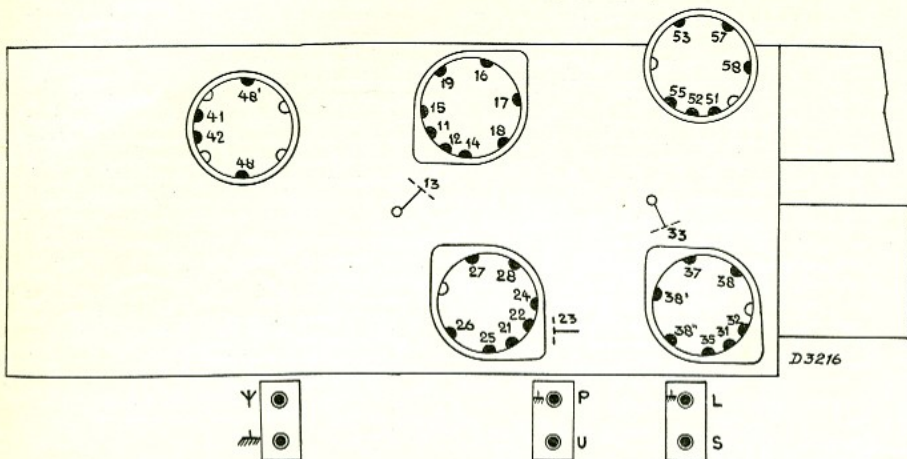

RÉSISTANCE

12	11/ 12	51/ 52	11	14	24	3 × Υ			P	L	S	57/ 37			
						O.C.	O.M.	O.L.							
	10		10	10	10	100	370	465	10	10	35	10			
11	13	15	25	26	35	38	48'	48''							
	O.C.														
	100	335	305	305	275	390	255	255							
10	16	18	3 × 19			27	28								
			O.C.	O.M.	O.L.										
	145	450	210	195	195	100	445								
9	2 × 13		17	23	33	38'	38''	41	U	U/53	53/ 55				
	O.M.	O.L.													
	65	65	340	70	140	205	220	370	230	140	205				

CAPACITÉ

12	38/ 38'														
	220														
11	17	23	27	53/55											
	140	205	150	150											

Commuter sur les ondes moyennes (585 mètres. Tourner le régulateur de tonalité sur la position „haut”.
Tourner le régulateur du volume sonore sur la position „maximum”.