

# ICF-7600

*E Model  
UK Model  
AEP Model*



## FM/MW/SW 7BAND RECEIVER

### SPECIFICATIONS

**Power Requirement:** 6V dc, four batteries size AA (IEC Designation R6)  
120V ac (110, 220, or 240V ac adjustable by Sony Personnel)  
50/60 Hz with optional Sony AC Power Adaptor AC-4A (E model), AC-15A (UK model) or AC-456C (AEP model)  
12V car battery with Sony Car Battery Cord DCC-127H (optional)

**Frequency Range:** FM 76–108 MHz  
SW1 3.9–4.0 MHz (75m)  
SW2 5.95–6.20 MHz (49m)  
SW3 9.5–9.8 MHz (31m)  
SW4 11.7–12.0 MHz (25m)  
SW5 15.1–15.5 MHz (19m)  
MW 530–1,605 kHz (566–187m)

**Antennas:** FM: Telescopic antenna  
SW: Telescopic antenna, external antenna terminal  
MW: Built-in ferrite-rod antenna

**Power Output:** 350 mW (at 10% harmonic distortion)

**Speaker:** Approx. 7.7 cm (3 inches) dia.

**Output:** Recording (minijack) . . . . . 1  
Earphone (minijack) . . . . . 1


**Dimensions:** Approx: 179(w) x 117(h) x 31(d) mm  
7<sup>1</sup>/<sub>8</sub> (w) x 4<sup>5</sup>/<sub>8</sub> (h) x 1<sup>1</sup>/<sub>4</sub>(d) inches  
not including projecting parts and controls

**Weight:** Approx. 600 g (1 lb 6 oz.)  
including batteries

**SONY**  
**SERVICE MANUAL**

# SECTION 1 BLOCK DIAGRAM

## 1-1. BLOCK DIAGRAM

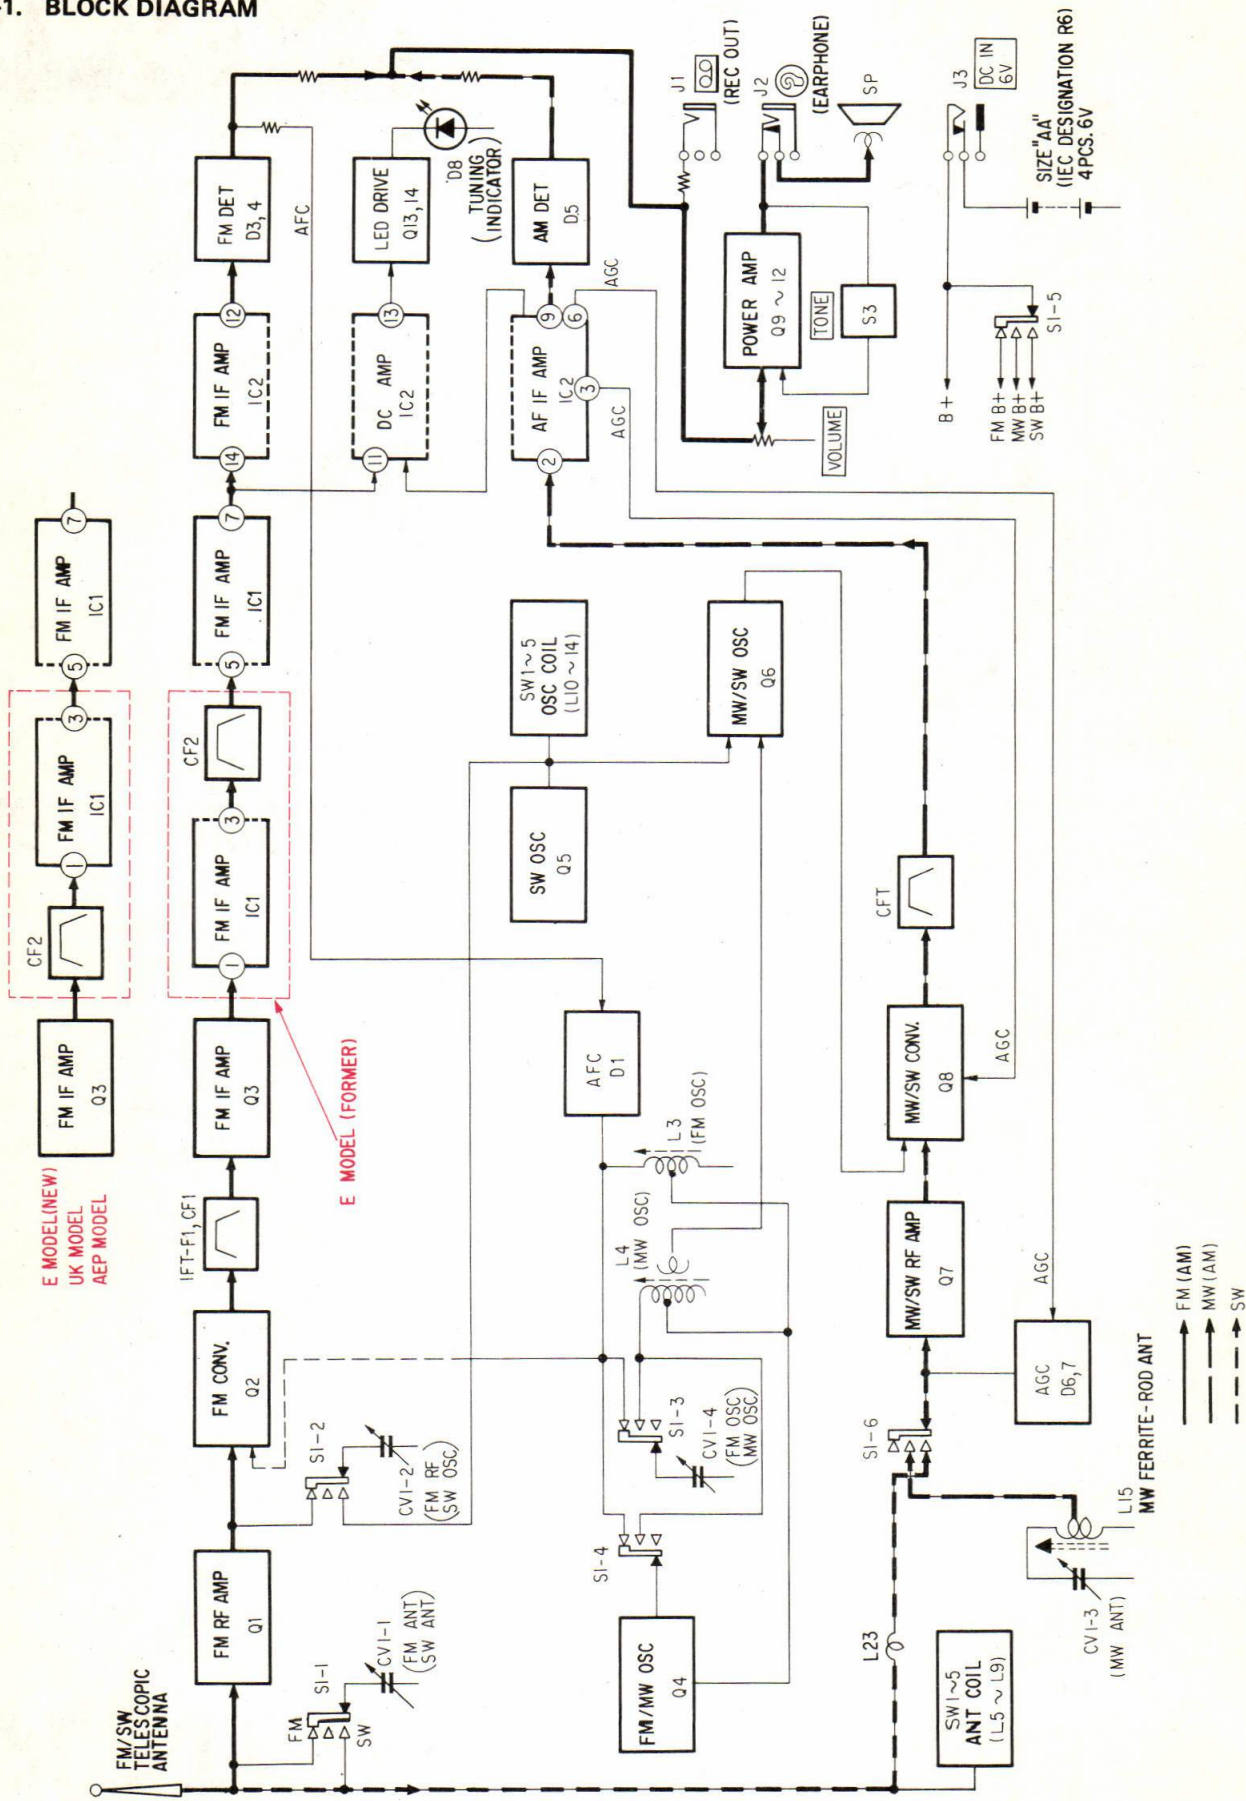

**1-2. SERVICING NOTE**

**S4 (Power Switch)**

S4 is connected as shown in Fig. 1.

When the band (FM, MW or SW) switch is pushed, only pushed switch is turned on. On the other hand, the OFF switch keeps on always, but the OFF switch becomes off for a moment when the band switch is pushed.

As a result, check for the OFF switch when the power is not supplied at all modes, and the specified switch at specified modes.




Fig. 1

**L10 - 14 (SW OSC Coils)**

A coil is connected between pin (1) and pin (3) at each SW OSC coil; L10, 11, 12, 13 and 14 as shown in Fig. 3.

Therefore, be careful not to install them on the circuit board reversely.

The pin (4) is used to ground the shield case.




Fig. 2




Fig. 3

**IFT-F1**

The IFT-F1 has the five leads as shown in Fig. 4.

The circuit board has six holes for IFT-F1. Therefore, be careful to the direction of installation when replacing it.




Fig. 4

**Masking Plate for Adjustment Holes**

The masking plate is used under the VOLUME knob to mask the adjustment holes for L8 (SW2 ANT) and L11 (SW4 OSC) as shown in Fig. 5.

When adjusting L8 and L11, pull off the VOLUME knob, and then leave out the plate with a flat-bit screwdriver.

**Note:** Adhere the plate securely on the chassis after adjusting L8 or L11.

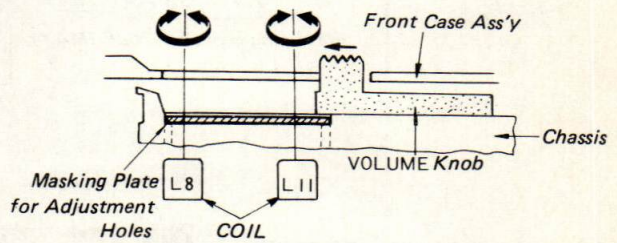


Fig. 5

**FM Oscillator Voltage Injection**

This receiver does not employ the coupling capacitor for oscillator voltage injection.

Accordingly, the local oscillator voltage is injected by the inductive-coupling between L2 (FM RF coil) and L3 (FM OSC coil) and stray-capacitance between both circuits.

### 1-3. CIRCUIT DESCRIPTION

#### Tuning Circuit

This receiver that employs the bandspread tuning circuit for SW bands changes the tank circuit at each band position as shown in Fig. 6.




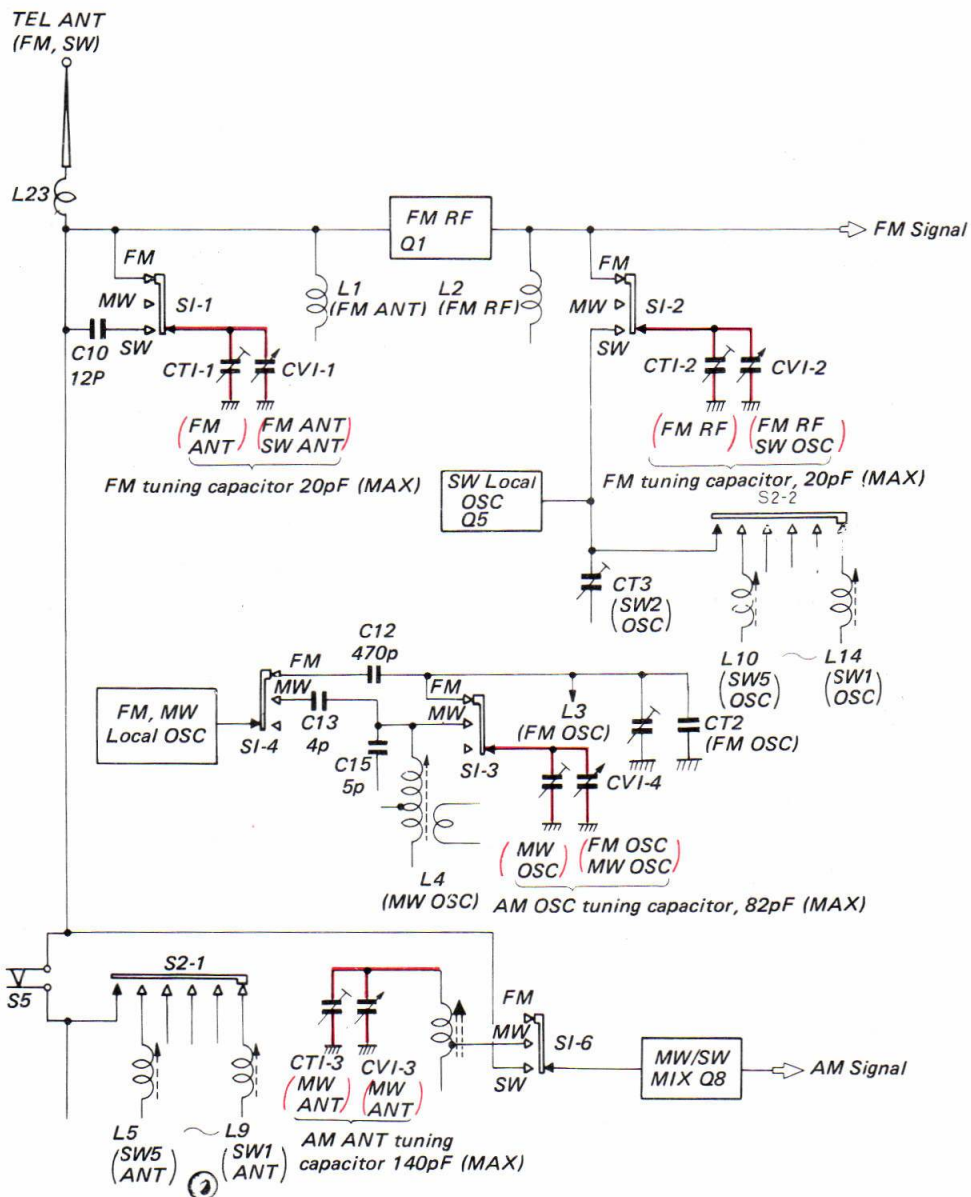





Fig. 6

The tuning capacitors and the trimmer capacitors used at each band position are located as shown below.

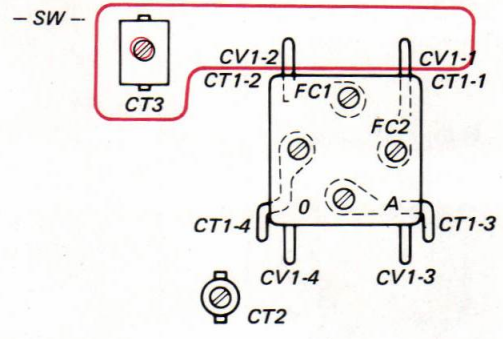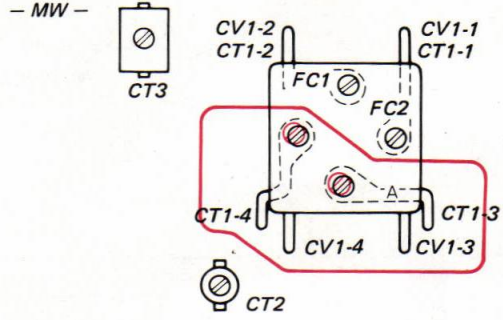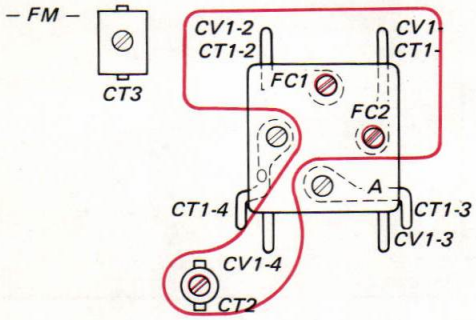


# SECTION 2 DISASSEMBLY

Remove the parts in the numerical order.

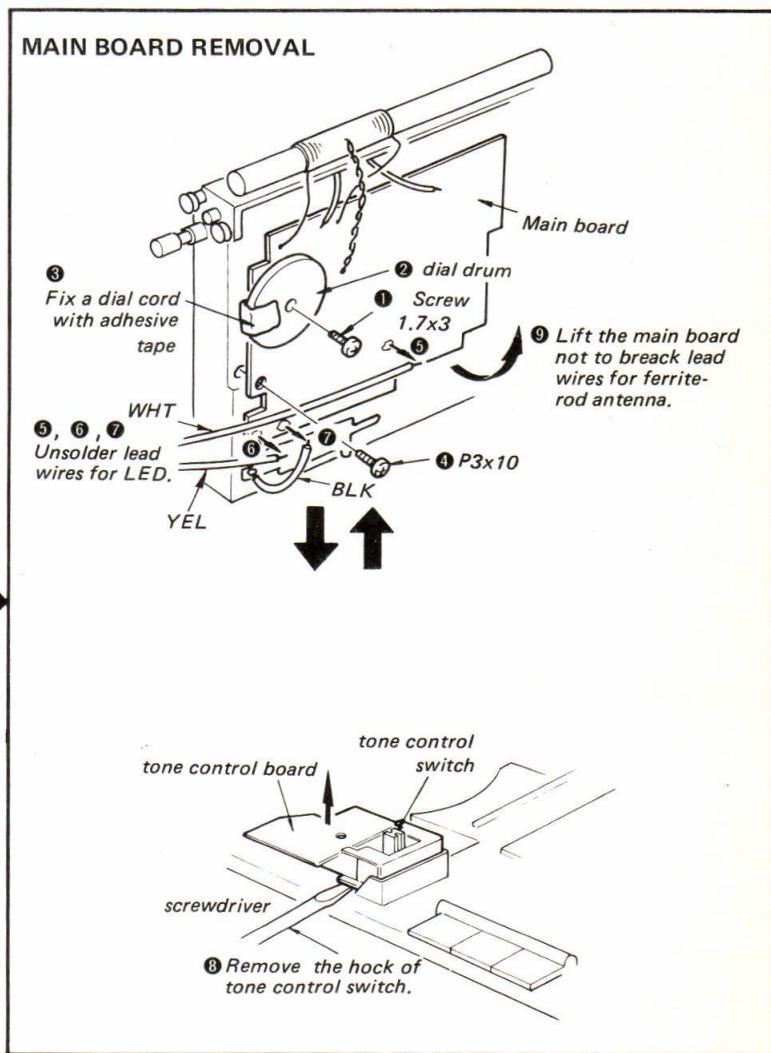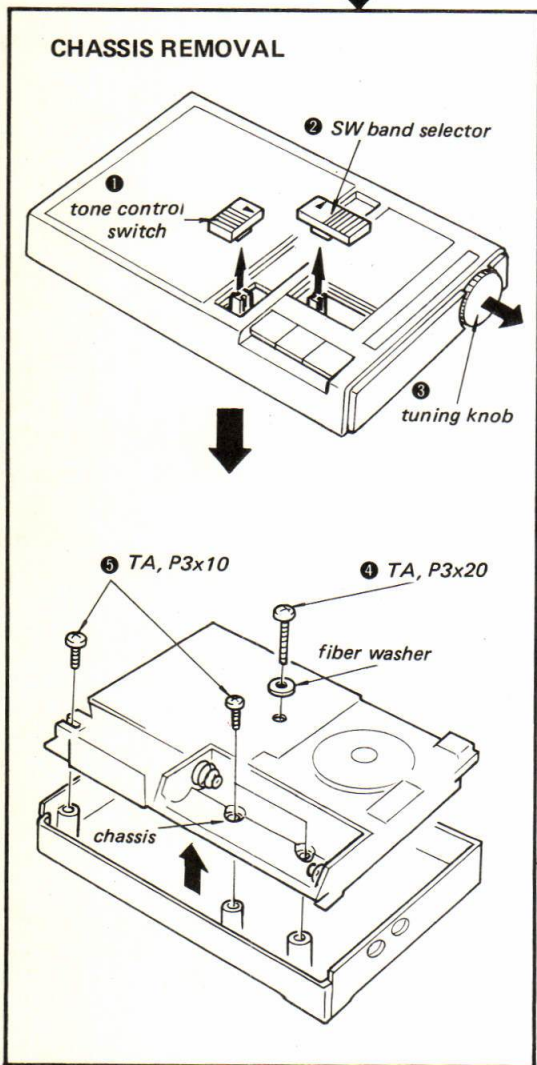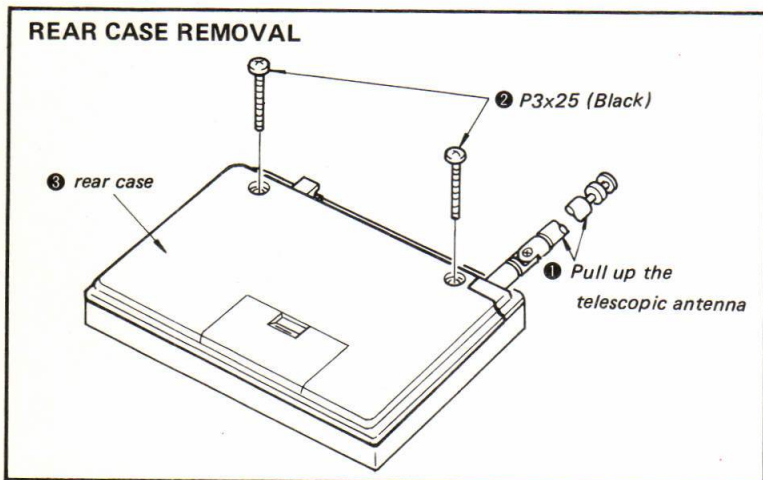


### DIAL CORD STRINGING

#### 1. Dial Cord Preparation

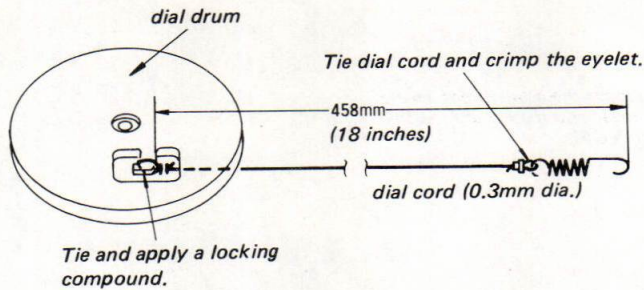



#### 2. Dial Cord Stringing

String the dial cord in the numerical order.

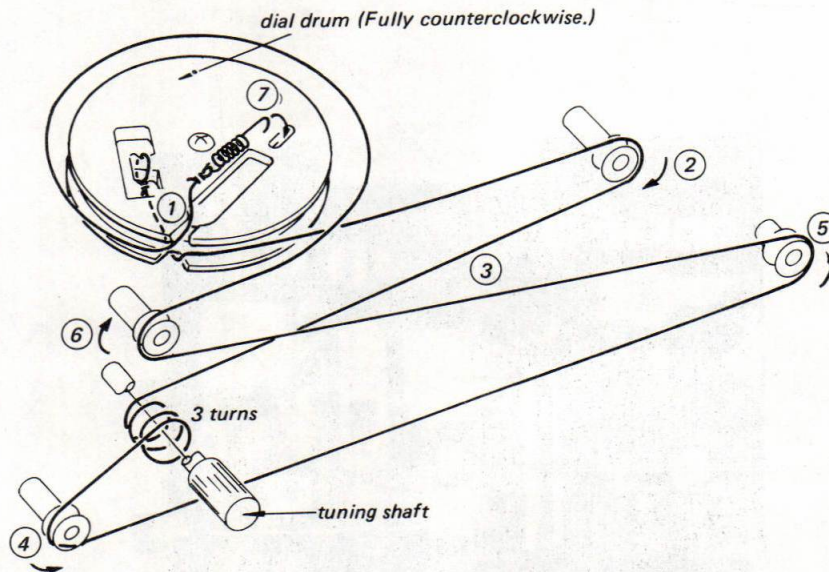

#### 3. Dial Pointer Setting

Slide the dial pointer on the edge of the dial scale and place it on the marking of the dial scale.

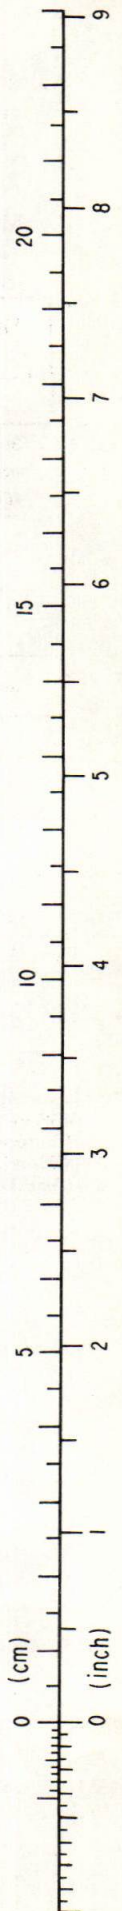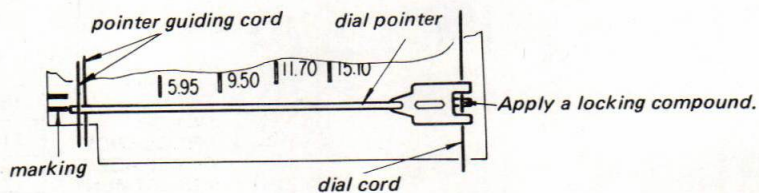


# SECTION 3 ADJUSTMENTS

Adjust in following order; MW, FM, SW2, SW1, 3 ~ 5.

## 1. MW SECTION


AM rf signal generator

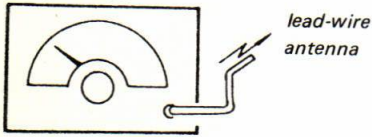

30% amplitude modulation by 400 Hz signal

Repeat the adjustment several times for a maximum reading on VOM.


VOM  
(range: 0.5-5 V ac)



| MW TRACKING ADJUSTMENT |          |
|------------------------|----------|
| 600kHz                 | 1,400kHz |
| L15                    | CTI-3    |

| FM IF ALIGNMENT (1) |        |
|---------------------|--------|
| 10.7MHz             | IFT F1 |
|                     | IFT F2 |

| AM IF ALIGNMENT         |     |
|-------------------------|-----|
| 455 kHz (E model)       | CFT |
| 468 kHz (AEP, UK model) |     |

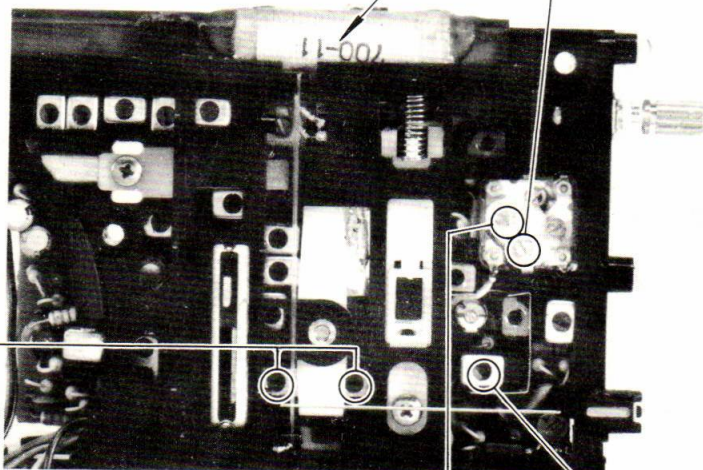


| CTI-4                            | L4     |
|----------------------------------|--------|
| 1,650kHz                         | 520kHz |
| MW FREQUENCY COVERAGE ADJUSTMENT |        |

|   |          |             |
|---|----------|-------------|
| SW1, 3-5<br>FREQUENCY COVERAGE ADJUSTMENT | 15.30MHz | SW5 OSC L10 |
|   | 11.85MHz | SW4 OSC L11 |
|   | 9.65MHz  | SW3 OSC L12 |
|   | 3.95MHz  | SW1 OSC L14 |




Repeat each adjustment for a maximum reading on VOM except for FM IF ALIGNMENT (2).

2. FM SECTION

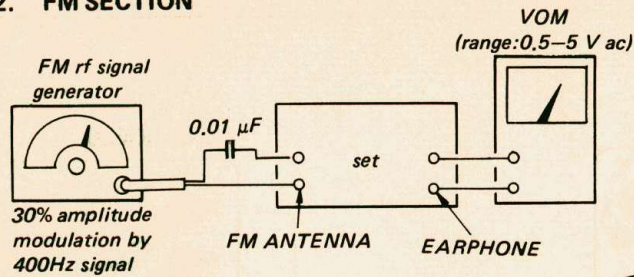


| FM TRACKING ADJUSTMENT |    |        |       |
|------------------------|----|--------|-------|
| 77MHz                  |    | 106MHz |       |
| L2                     | L1 | CTI-2  | CTI-1 |

| FM FREQUENCY COVERAGE ADJUSTMENT |          |
|----------------------------------|----------|
| CT2                              | 109.5MHz |
| L3                               | 75MHz    |

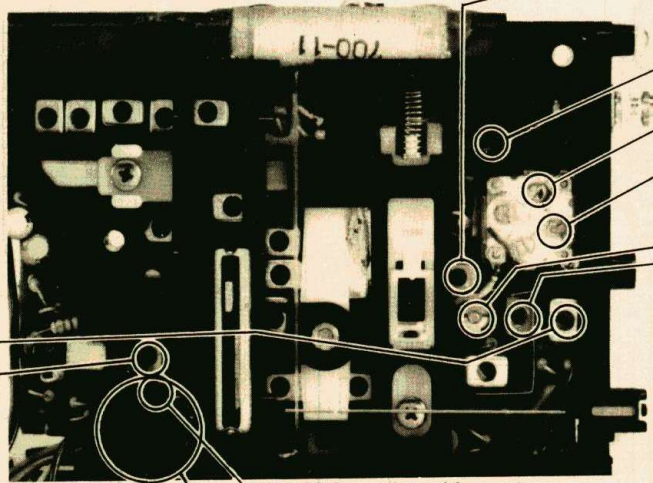


(Primary-side)

FM IF ALIGNMENT (2)  
(Adjust the secondary side of IFT F2 for OV reading on VOM (A) .)

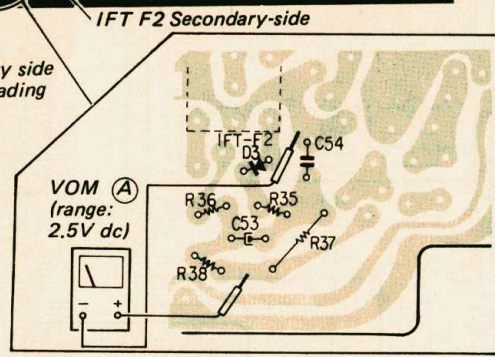


3. SW SECTION

Note: After the adjustment of SW2, set to the dial pointer at 3.95MHz on the dial scale, then adjust SW1, 3~5 at the same position.

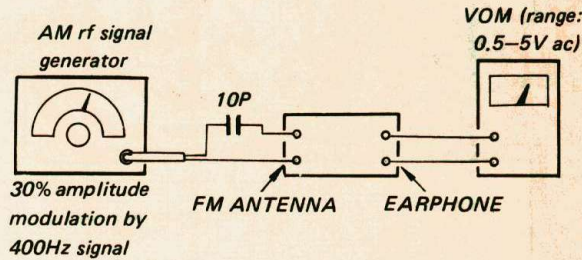

| ③ SW1~5 TRACKING ADJUSTMENT |            |            |            |            |
|-----------------------------|------------|------------|------------|------------|
| 15.30MHz                    | 11.85MHz   | 9.65MHz    | 3.95MHz    | 6.075MHz   |
| SW5 ANT L5                  | SW4 ANT L6 | SW3 ANT L7 | SW1 ANT L9 | SW2 ANT L8 |

| ① SW2 FREQUENCY COVERAGE ADJUSTMENT |          |
|-------------------------------------|----------|
| 6.225MHz                            | 5.925MHz |
| CT3                                 | C13      |

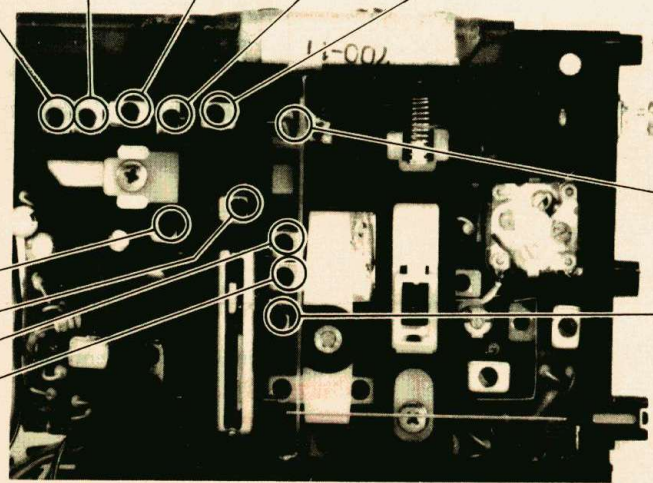


SECTION 4  
DIAGRAMS

4-1. MOUNTING DIAGRAM  
(FORMER E MODEL)


— Conductor Side —

● Replacement Semiconductors.  
For replacement, use semiconductors  
except in ( ).


Q1 : 2SC1129(2SC668) D1 : 2SC710




Q2, 8 : 2SC710 D2, 6, 7 } : 1S1555

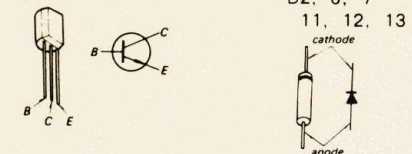


Q3, 4 } : 2SC930 D8 : SEL103R

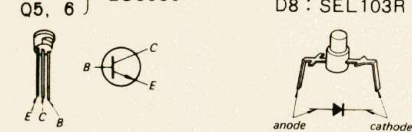


Q7 : 2SK42 D9 : VD1220

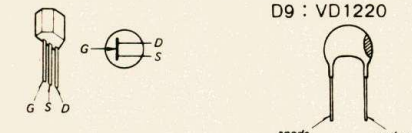


Q9 : 2SA678(2SA677) D10 : U05G(GP08B)

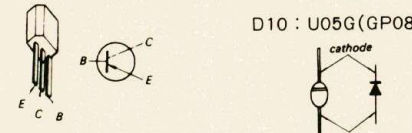



Q10, 13 } : 2SC634A IC1 : IC CX161

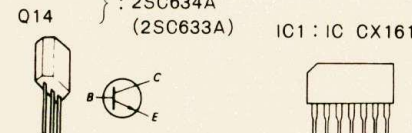

Q11 : 2SC1474 IC2 : IC CX162

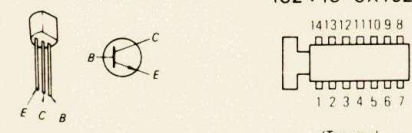


Q12 : 2SA684(2SA772)

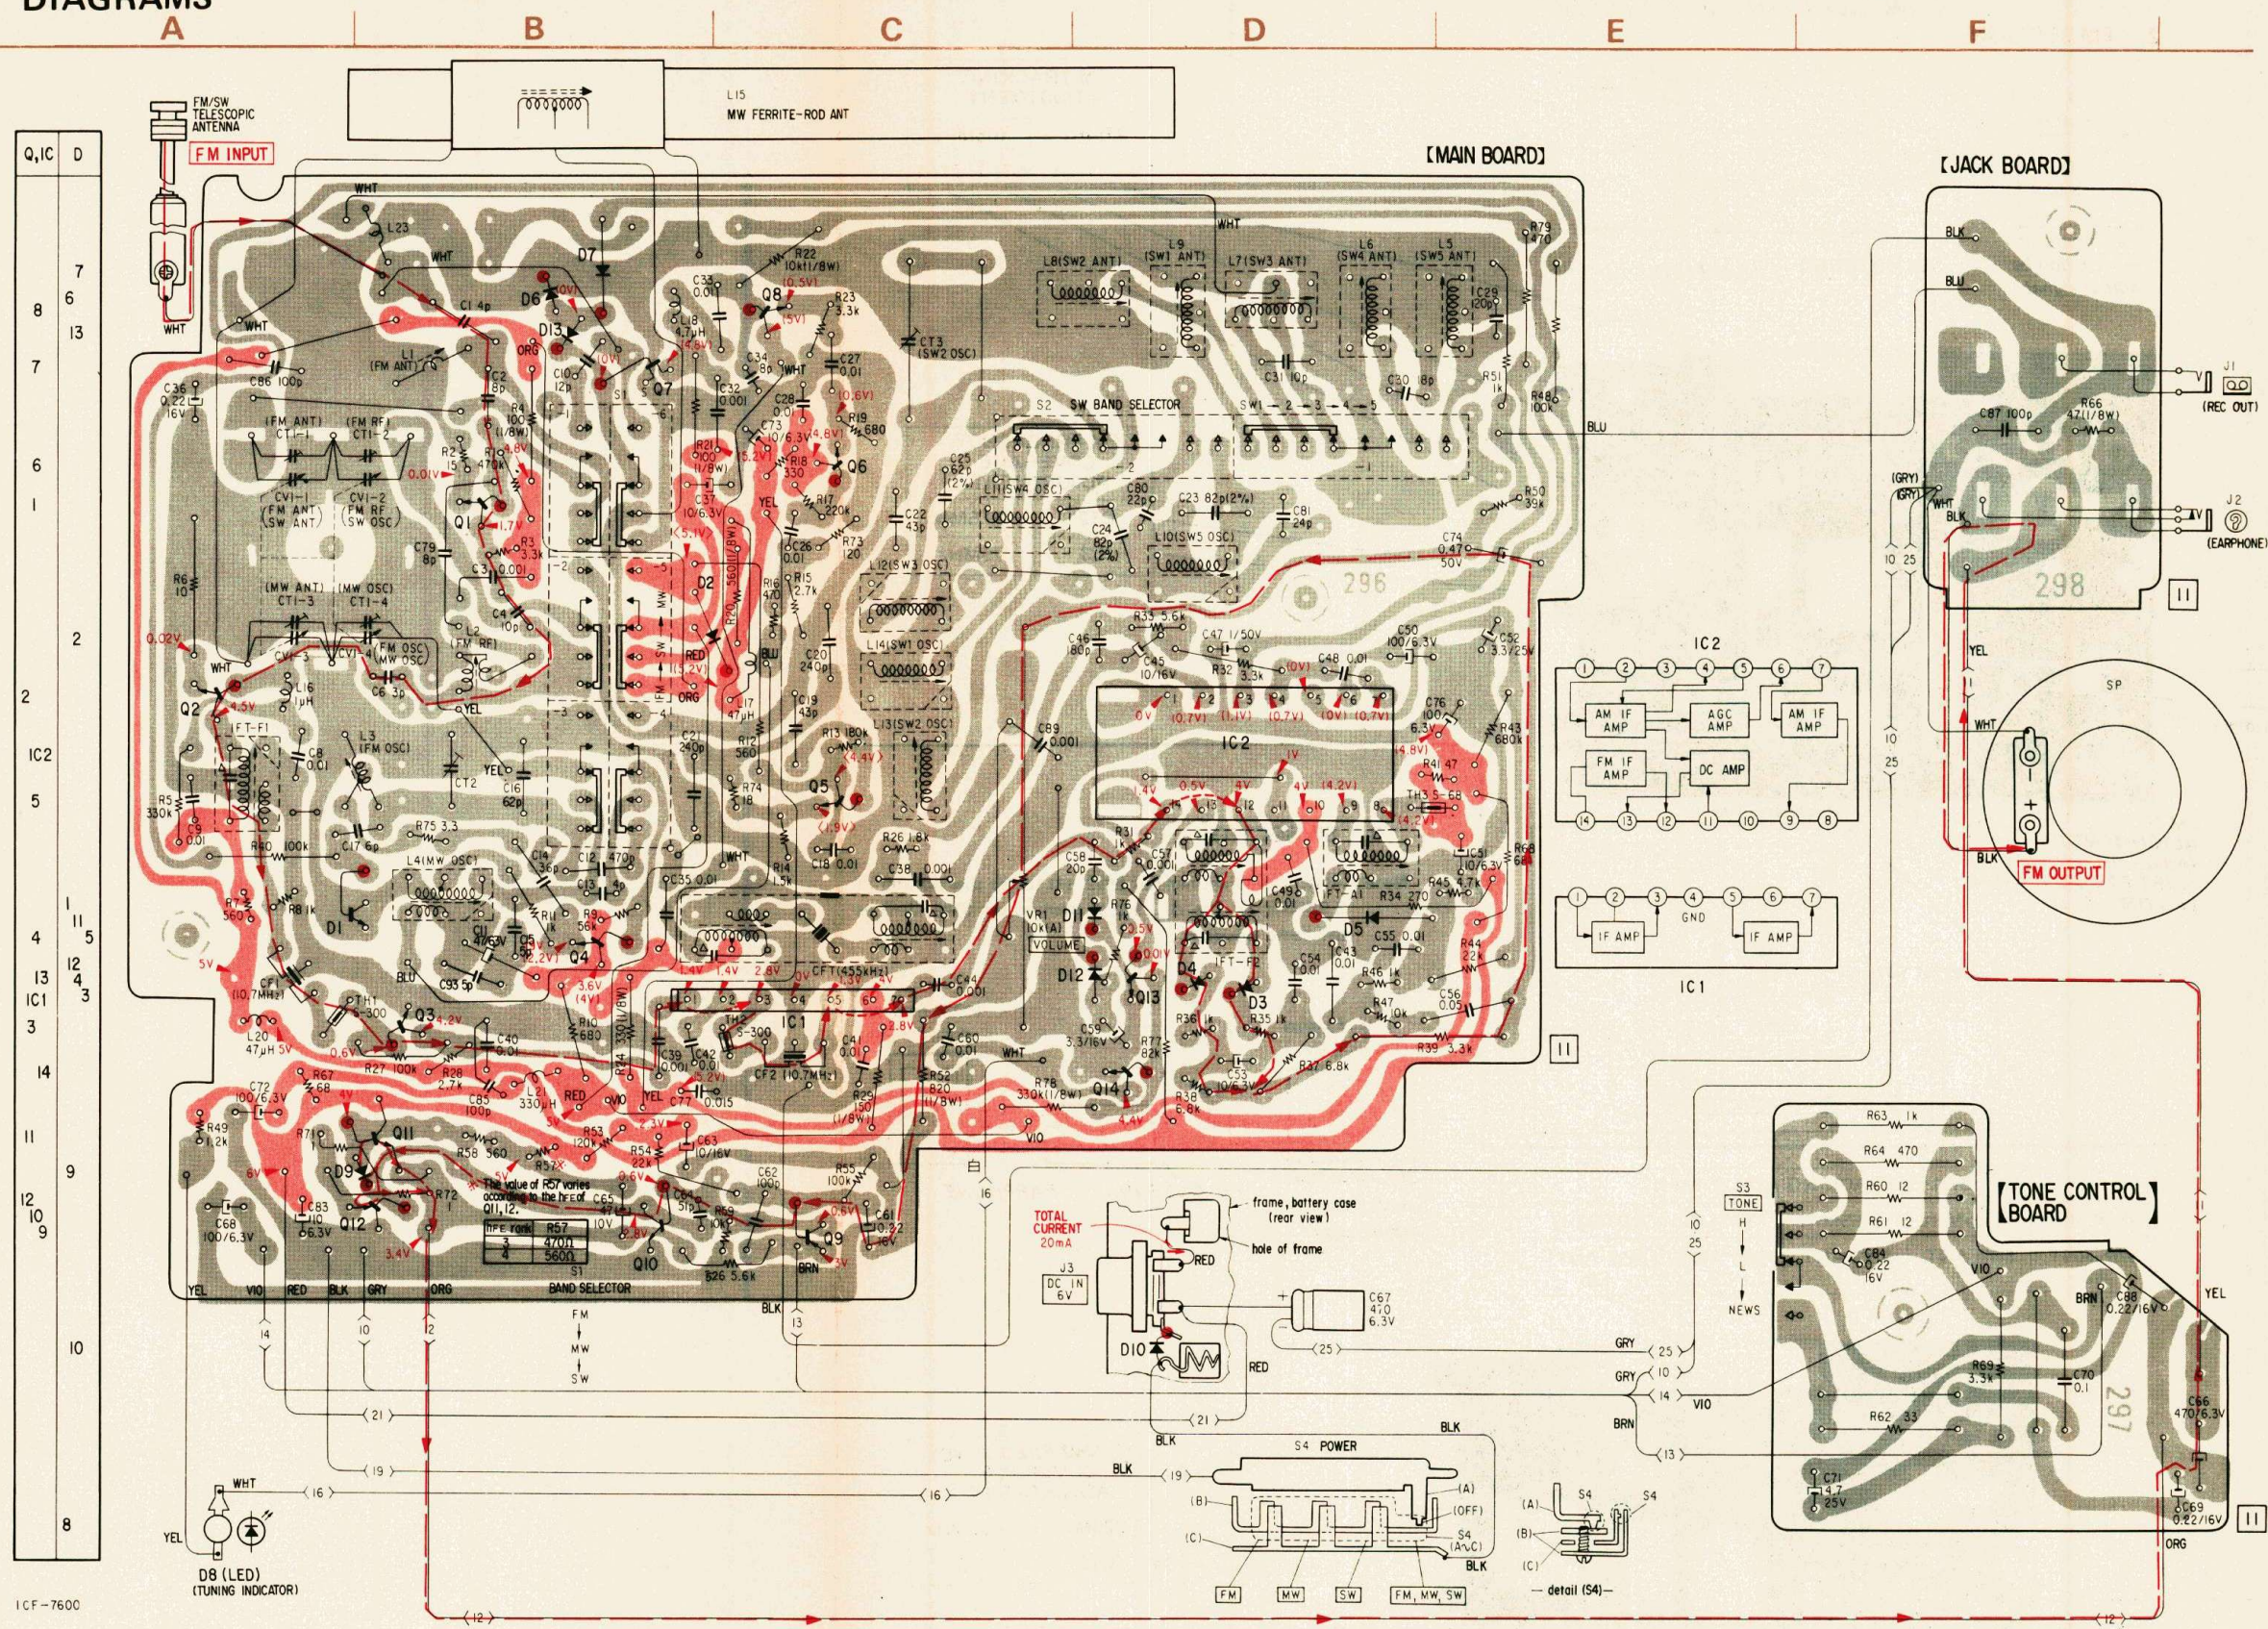

Note:  
● [ ] : indicates side identified with part number.  
● [ ] : B + pattern.  
● [ ] : signal path.  
● [ ] : grounding lead mark.  
● ( ) : MW  
● < > : SW

4-2. SCHEMATIC DIAGRAM (FORMER E MODEL)

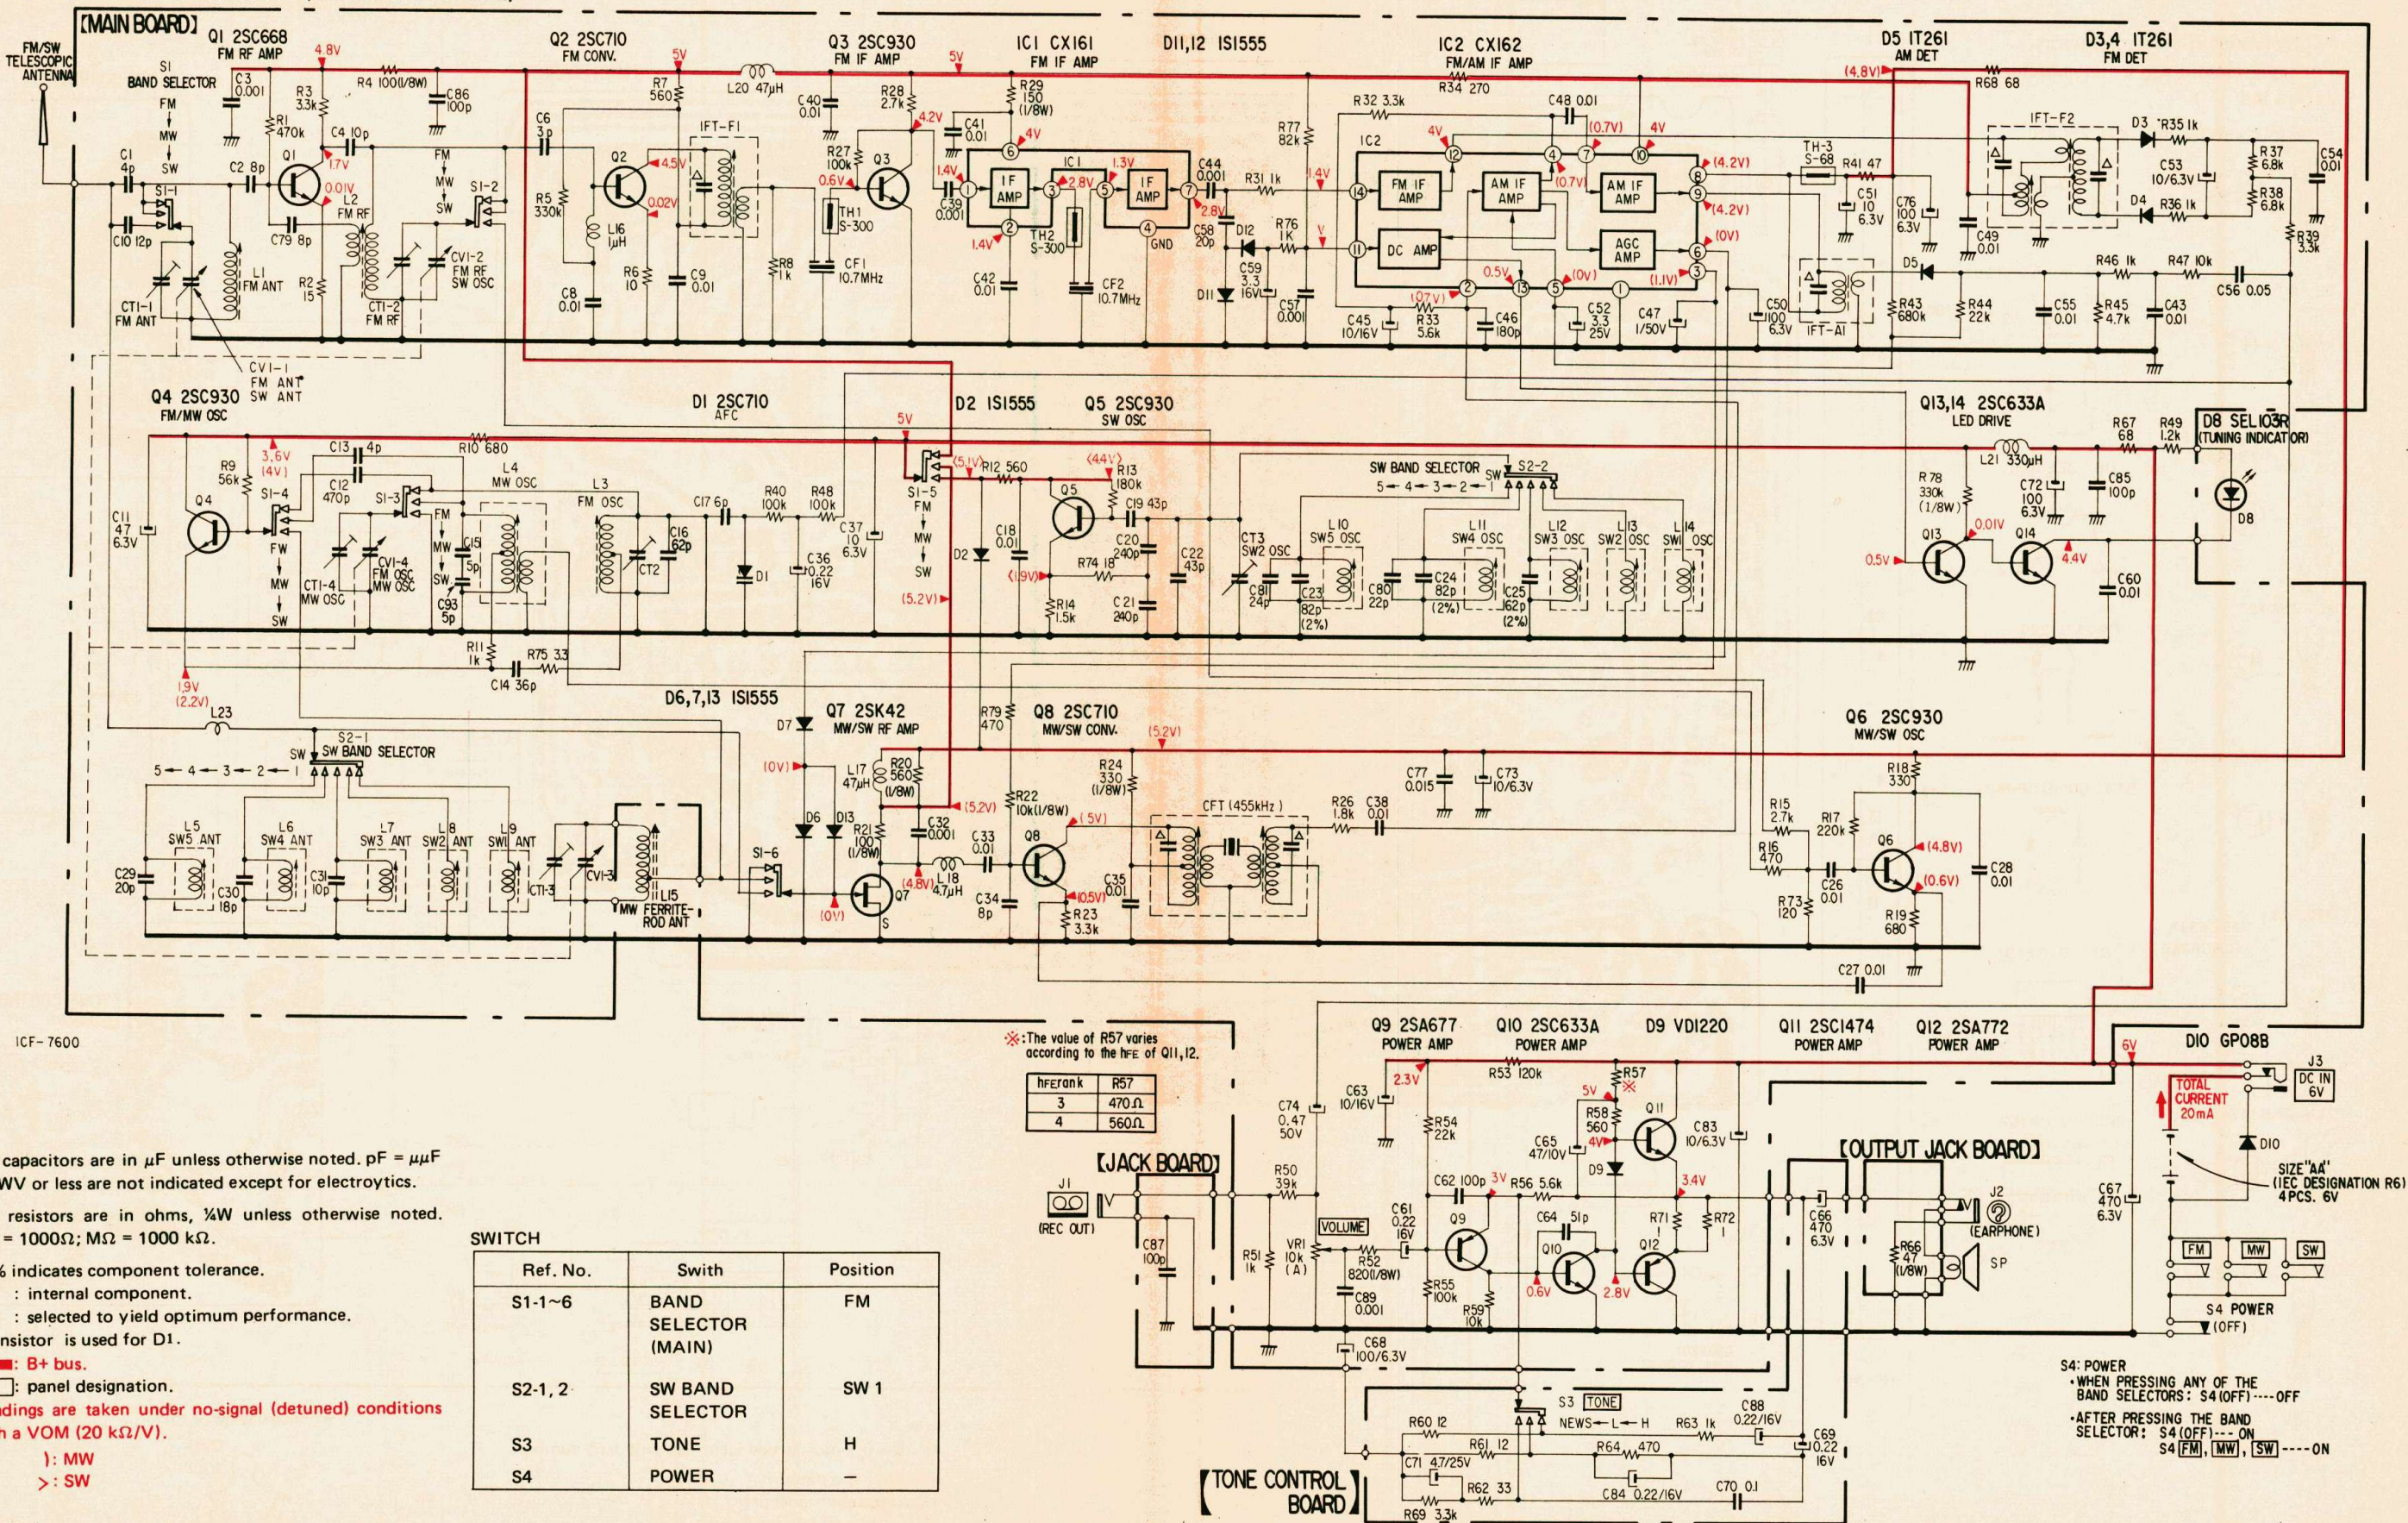

1  
2  
3  
4  
5

- Note:**
- All capacitors are in  $\mu\text{F}$  unless otherwise noted.  $\text{pF} = \mu\mu\text{F}$ . 50 WV or less are not indicated except for electrolytics.
  - All resistors are in ohms,  $\frac{1}{2}\text{W}$  unless otherwise noted.  $\text{k}\Omega = 1000\Omega$ ;  $\text{M}\Omega = 1000 \text{k}\Omega$ .
  - $\pm 2\%$  indicates component tolerance.
  - $\Delta$ : internal component.
  - $*$ : selected to yield optimum performance.
  - Transistor is used for D1.
  - : B+ bus.
  - : panel designation.
  - Readings are taken under no-signal (detuned) conditions with a VOM (20  $\text{k}\Omega/\text{V}$ ).
  - ( ): MW
  - < >: SW

**SWITCH**

| Ref. No. | Switch               | Position |
|----------|----------------------|----------|
| S1-1~6   | BAND SELECTOR (MAIN) | FM       |
| S2-1, 2  | SW BAND SELECTOR     | SW 1     |
| S3       | TONE                 | H        |
| S4       | POWER                | -        |

\*: The value of R57 varies according to the  $h_{FE}$  of Q11,12.

| $h_{FE}$ rank | R57          |
|---------------|--------------|
| 3             | 470 $\Omega$ |
| 4             | 560 $\Omega$ |


S4: POWER  
 • WHEN PRESSING ANY OF THE BAND SELECTORS: S4(OFF)----OFF  
 • AFTER PRESSING THE BAND SELECTOR: S4(OFF)---ON S4[FM], [MW], [SW]----ON

4-3. MOLINKING DIAGRAM (LATTER E MODEL, UK MODEL, AEP MODEL)


- Conductor Side -

● Replacement Semiconductors.  
For replacement, use semiconductors except in ( ).


Q1 : 2SC1129(2SC668) D1 : 2SC710




Q2, 8 : 2SC710 D3, 4, 5 : 1T261

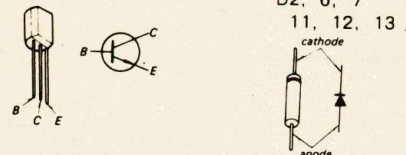


Q3, 4 } : 2SC930 D8 : SEL103R

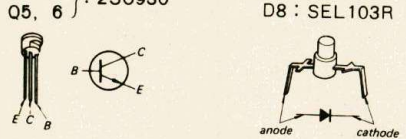


Q7 : 2SK42 D9 : VD1220

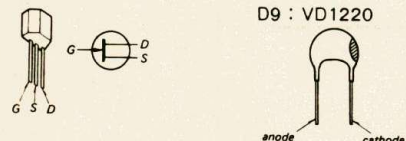


Q9 : 2SA678(2SA677) D10 : U05G(GP08B)

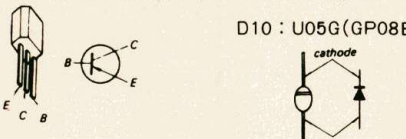



Q10, 13 } : 2SC634A IC1 : IC CX161

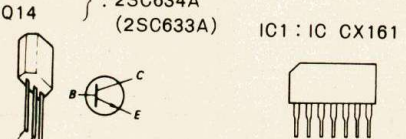

Q11 : 2SC1474 IC2 : IC CX162

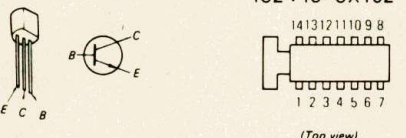


Q12 : 2SA684(2SA772)

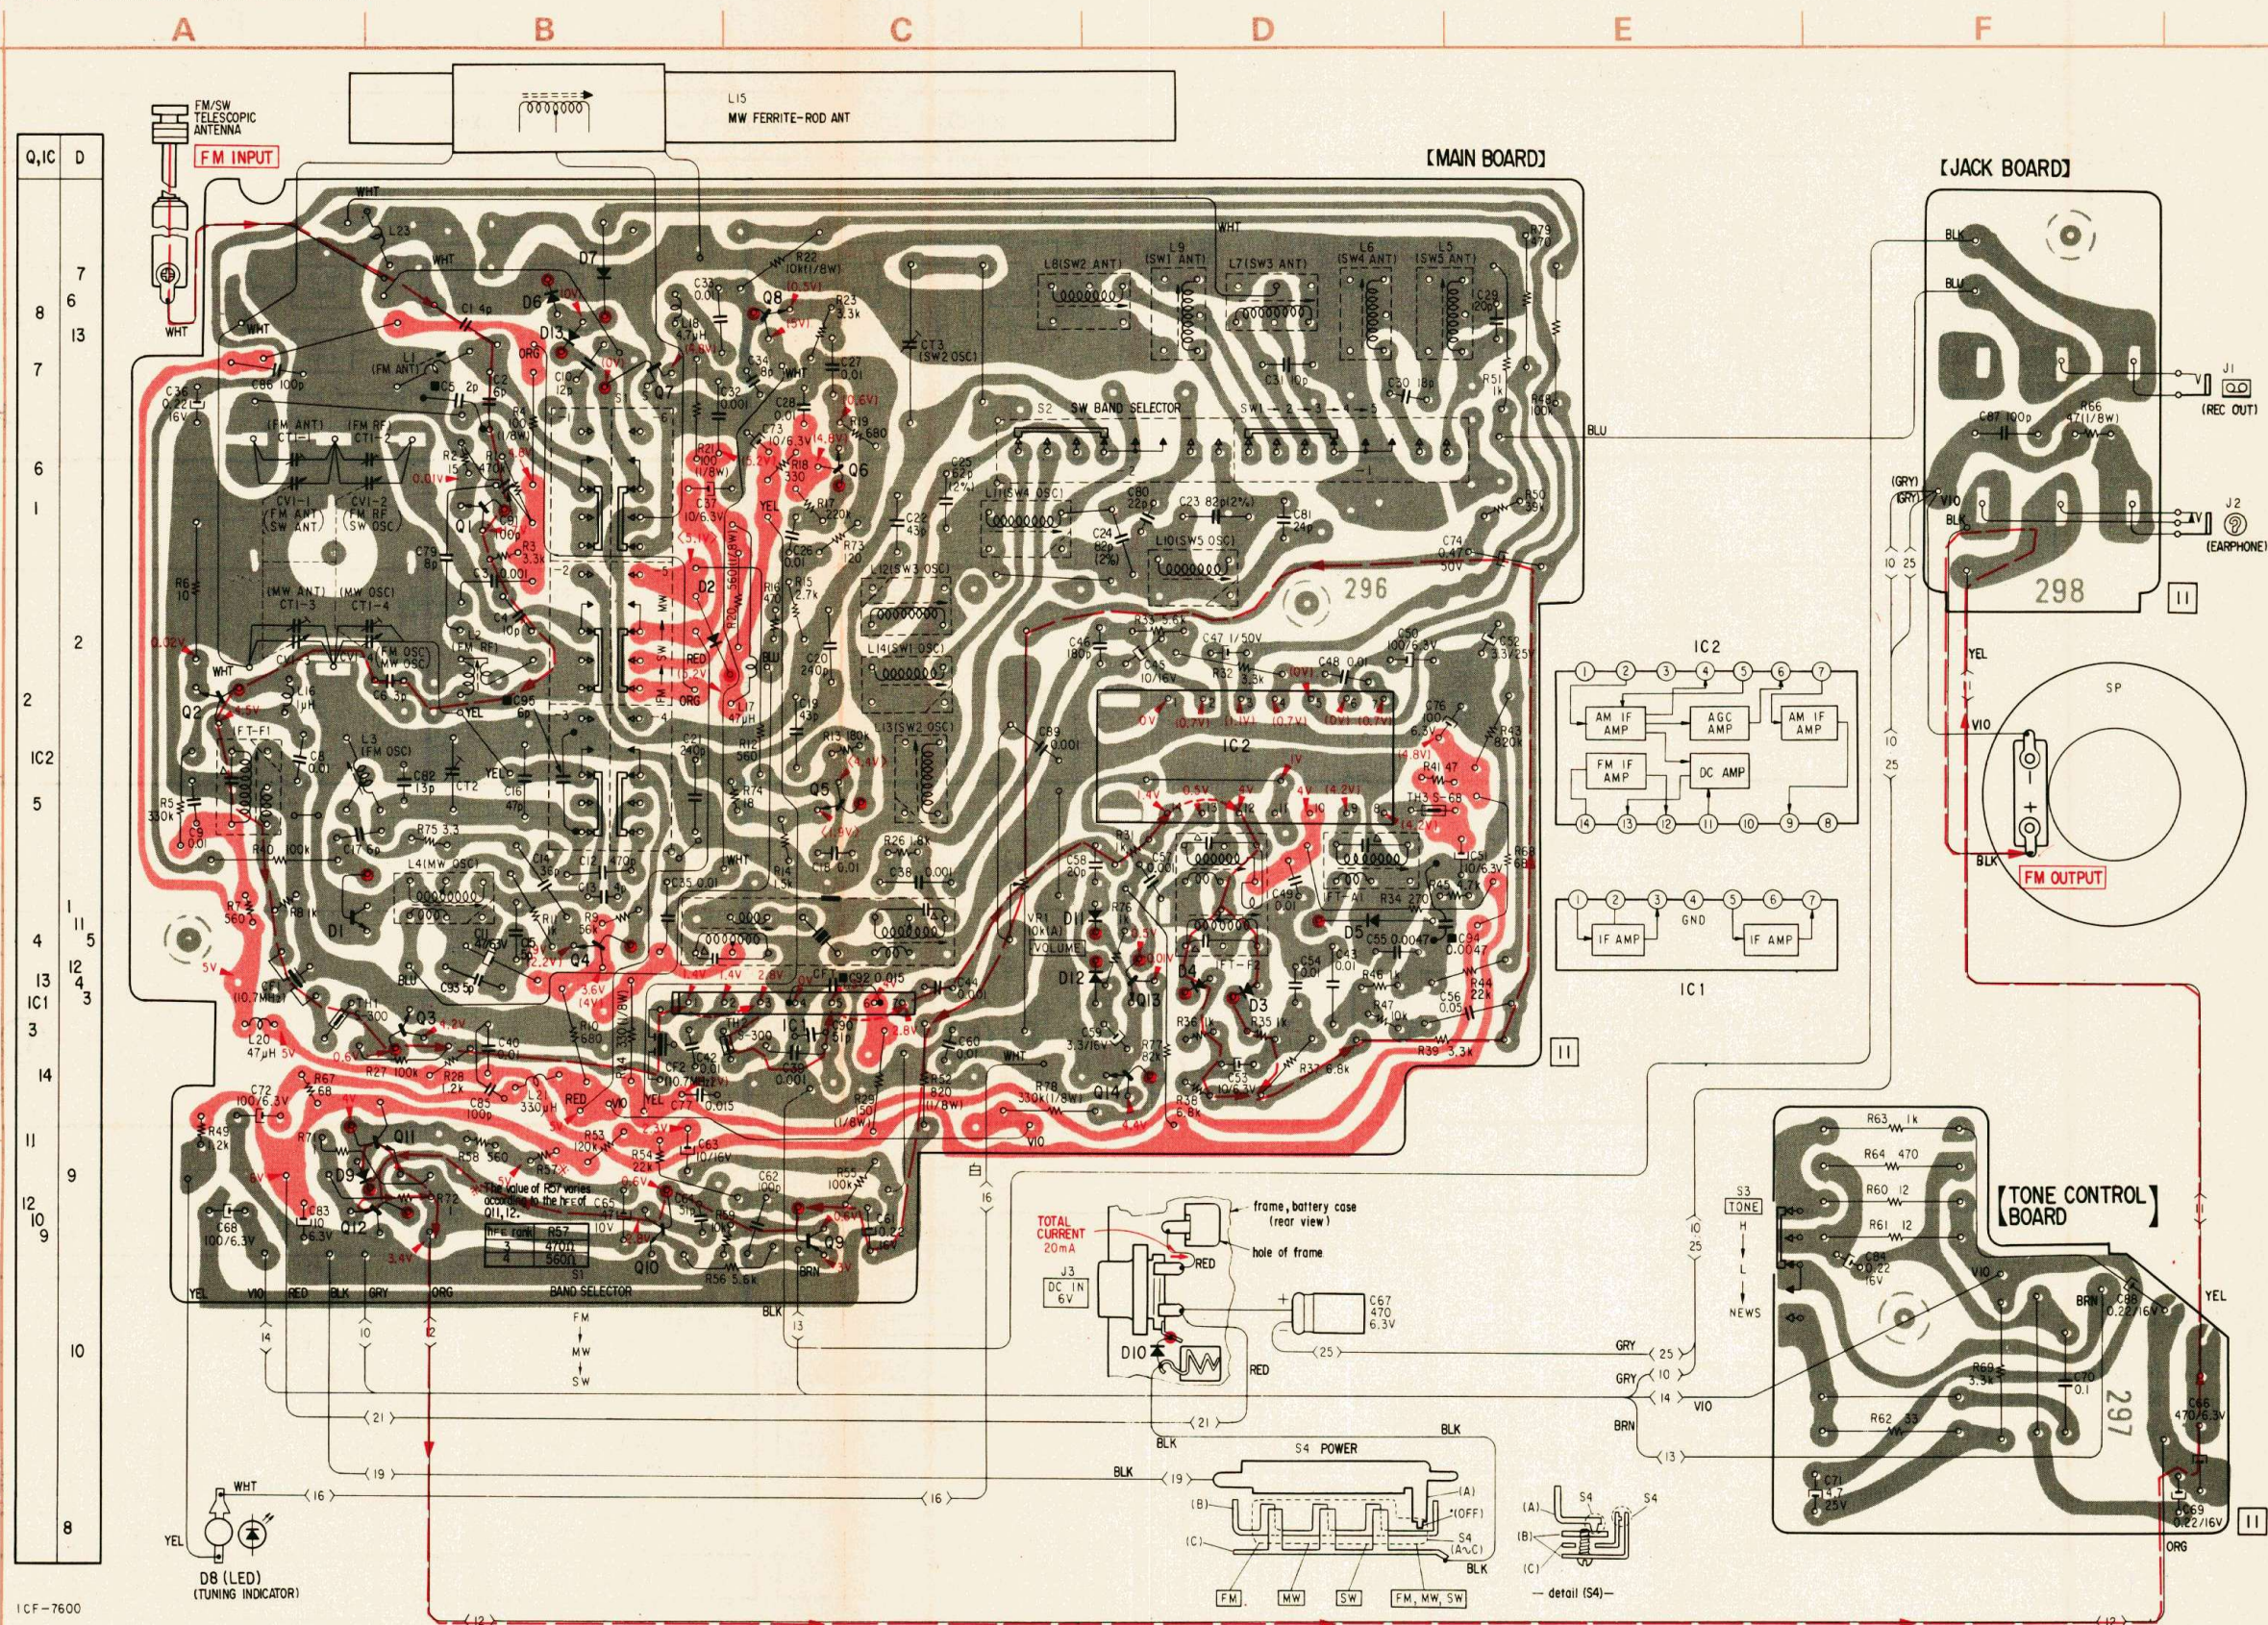

**Note:**  
 ● [ ] : indicates side identified with part number.  
 ● [ ] : B + pattern.  
 ● [ ] : signal path.  
 ● [ ] : grounding lead mark.  
 ● ( ) : MW  
 ● < > : SW  
 ● [ ] : 印はパターン面側取付部品。

● Installation of C91  
 C91  
 100P  
 R2 15  
 R1 470K

4-4. SCHEMATIC DIAGRAM (LATER E MODEL, UK MODEL, AEP MODEL)

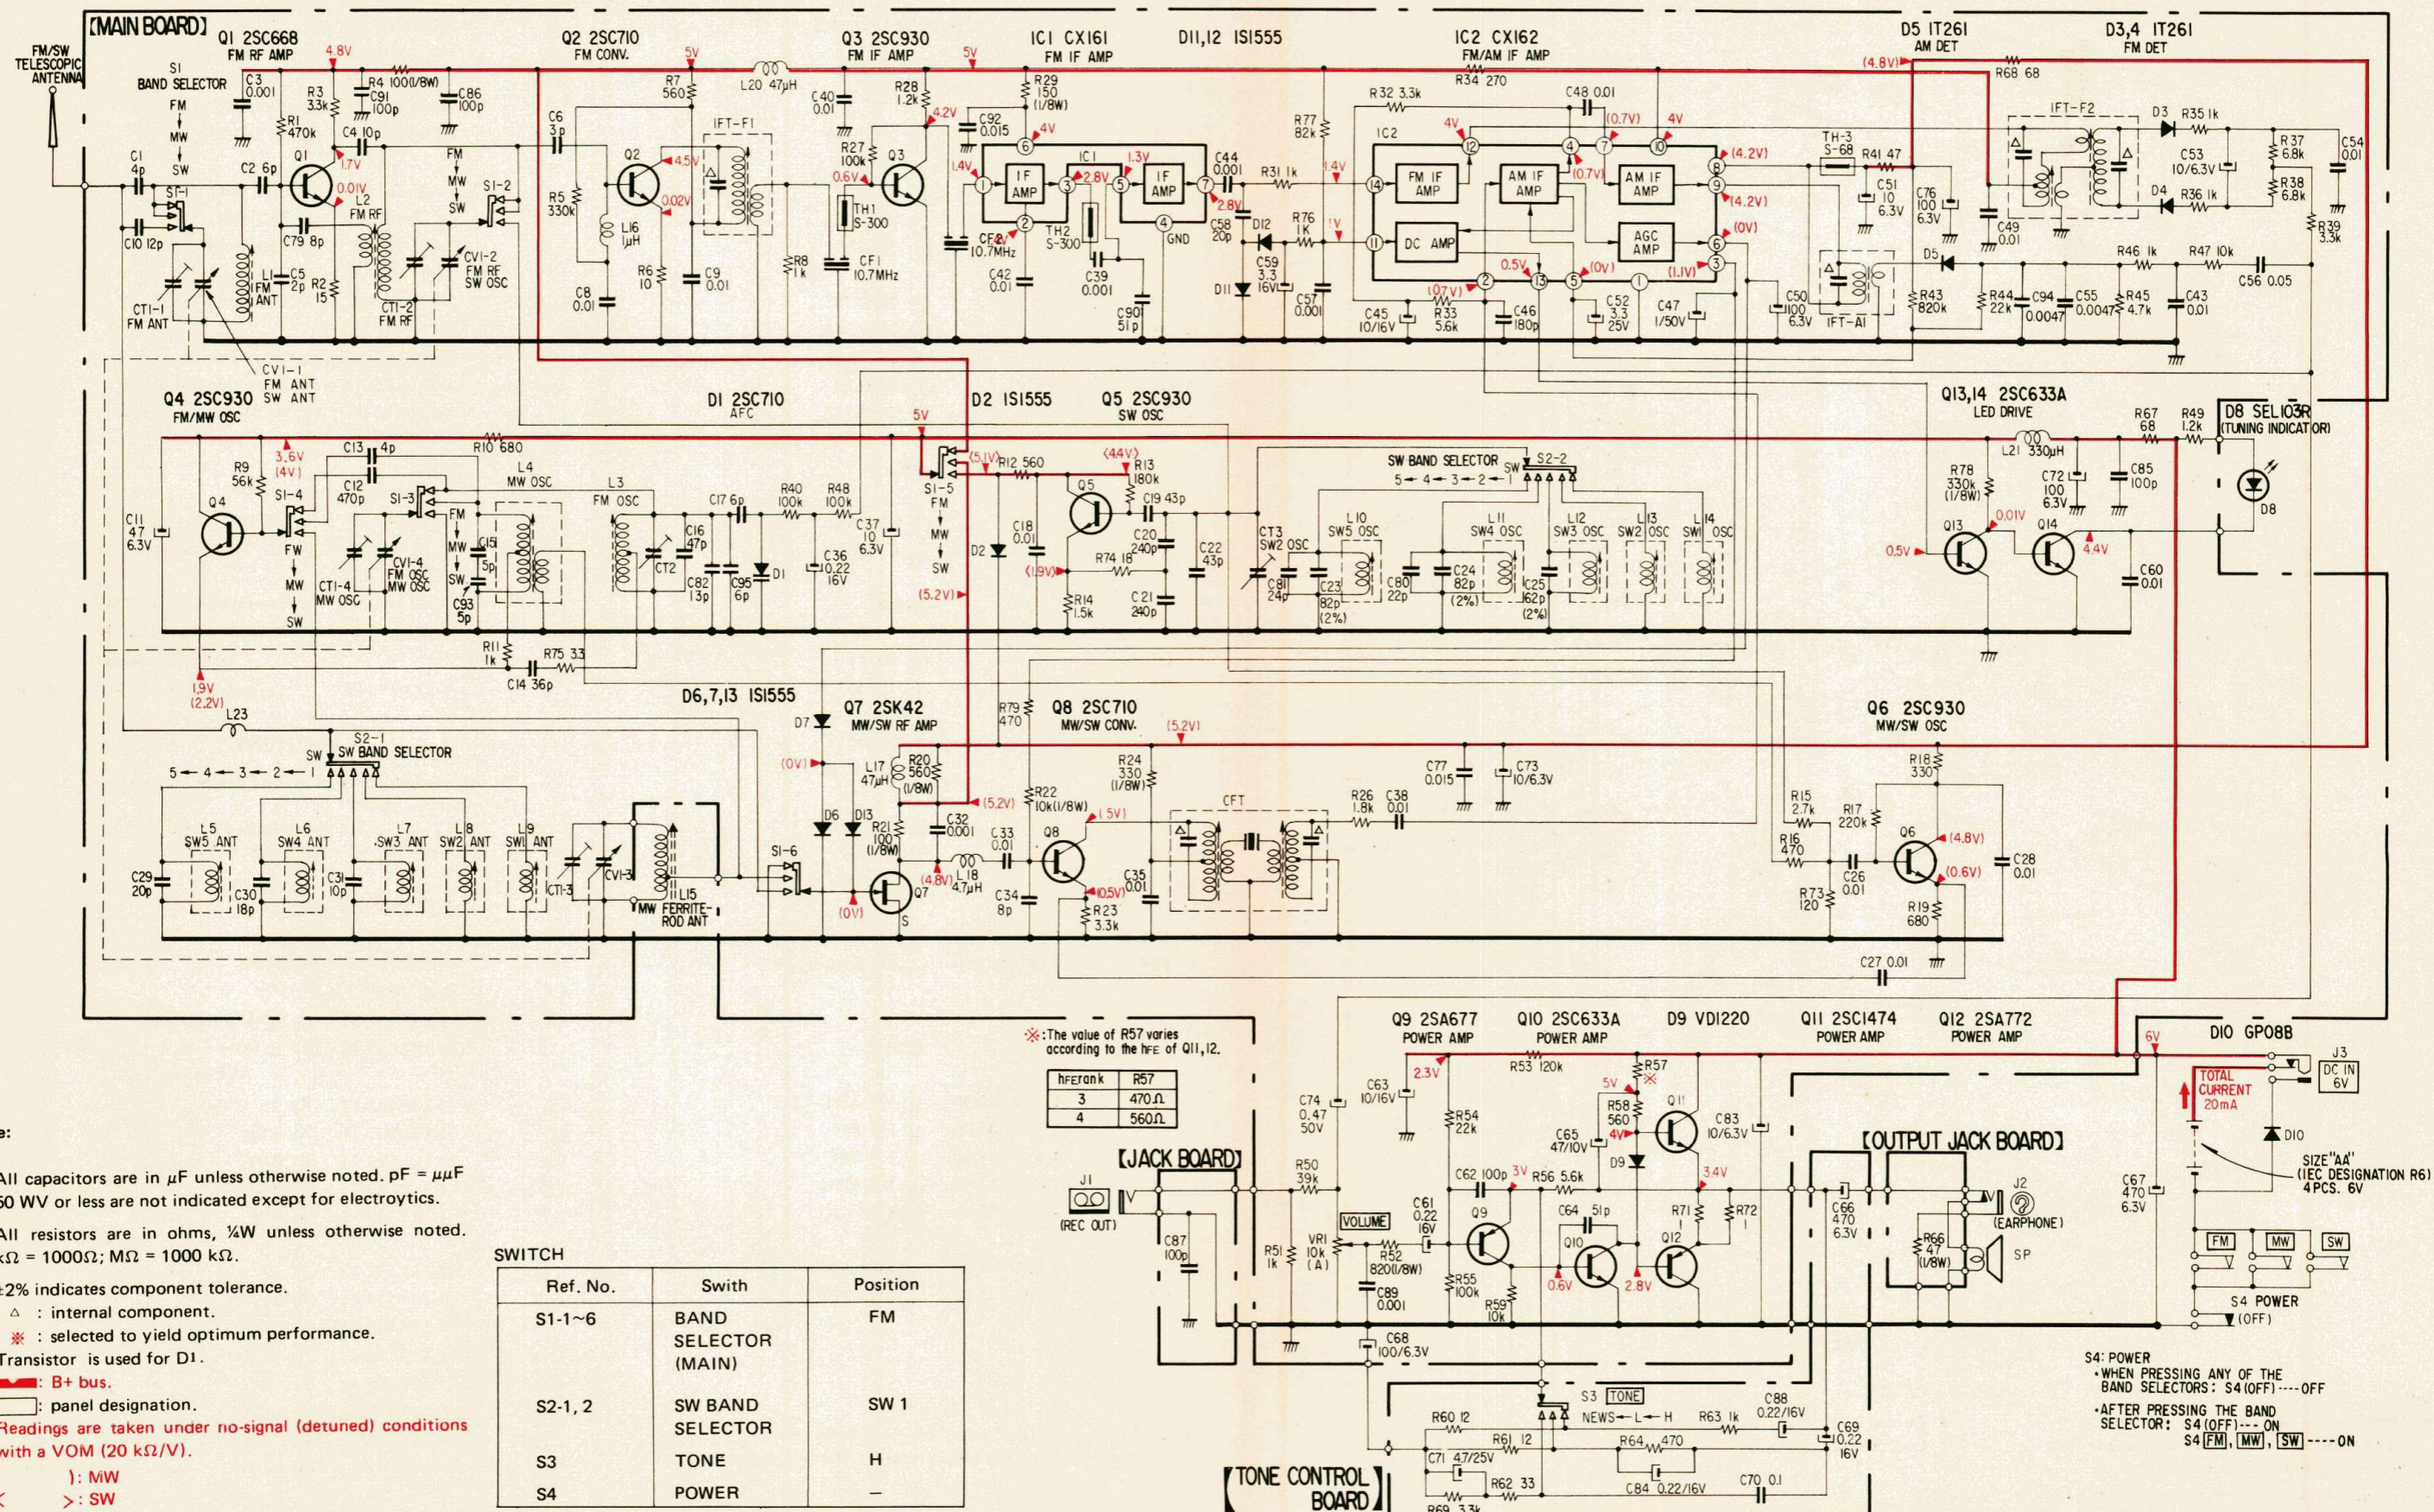

SECTION 5

EXPLODED VIEWS


A B C D

1

2

3

4

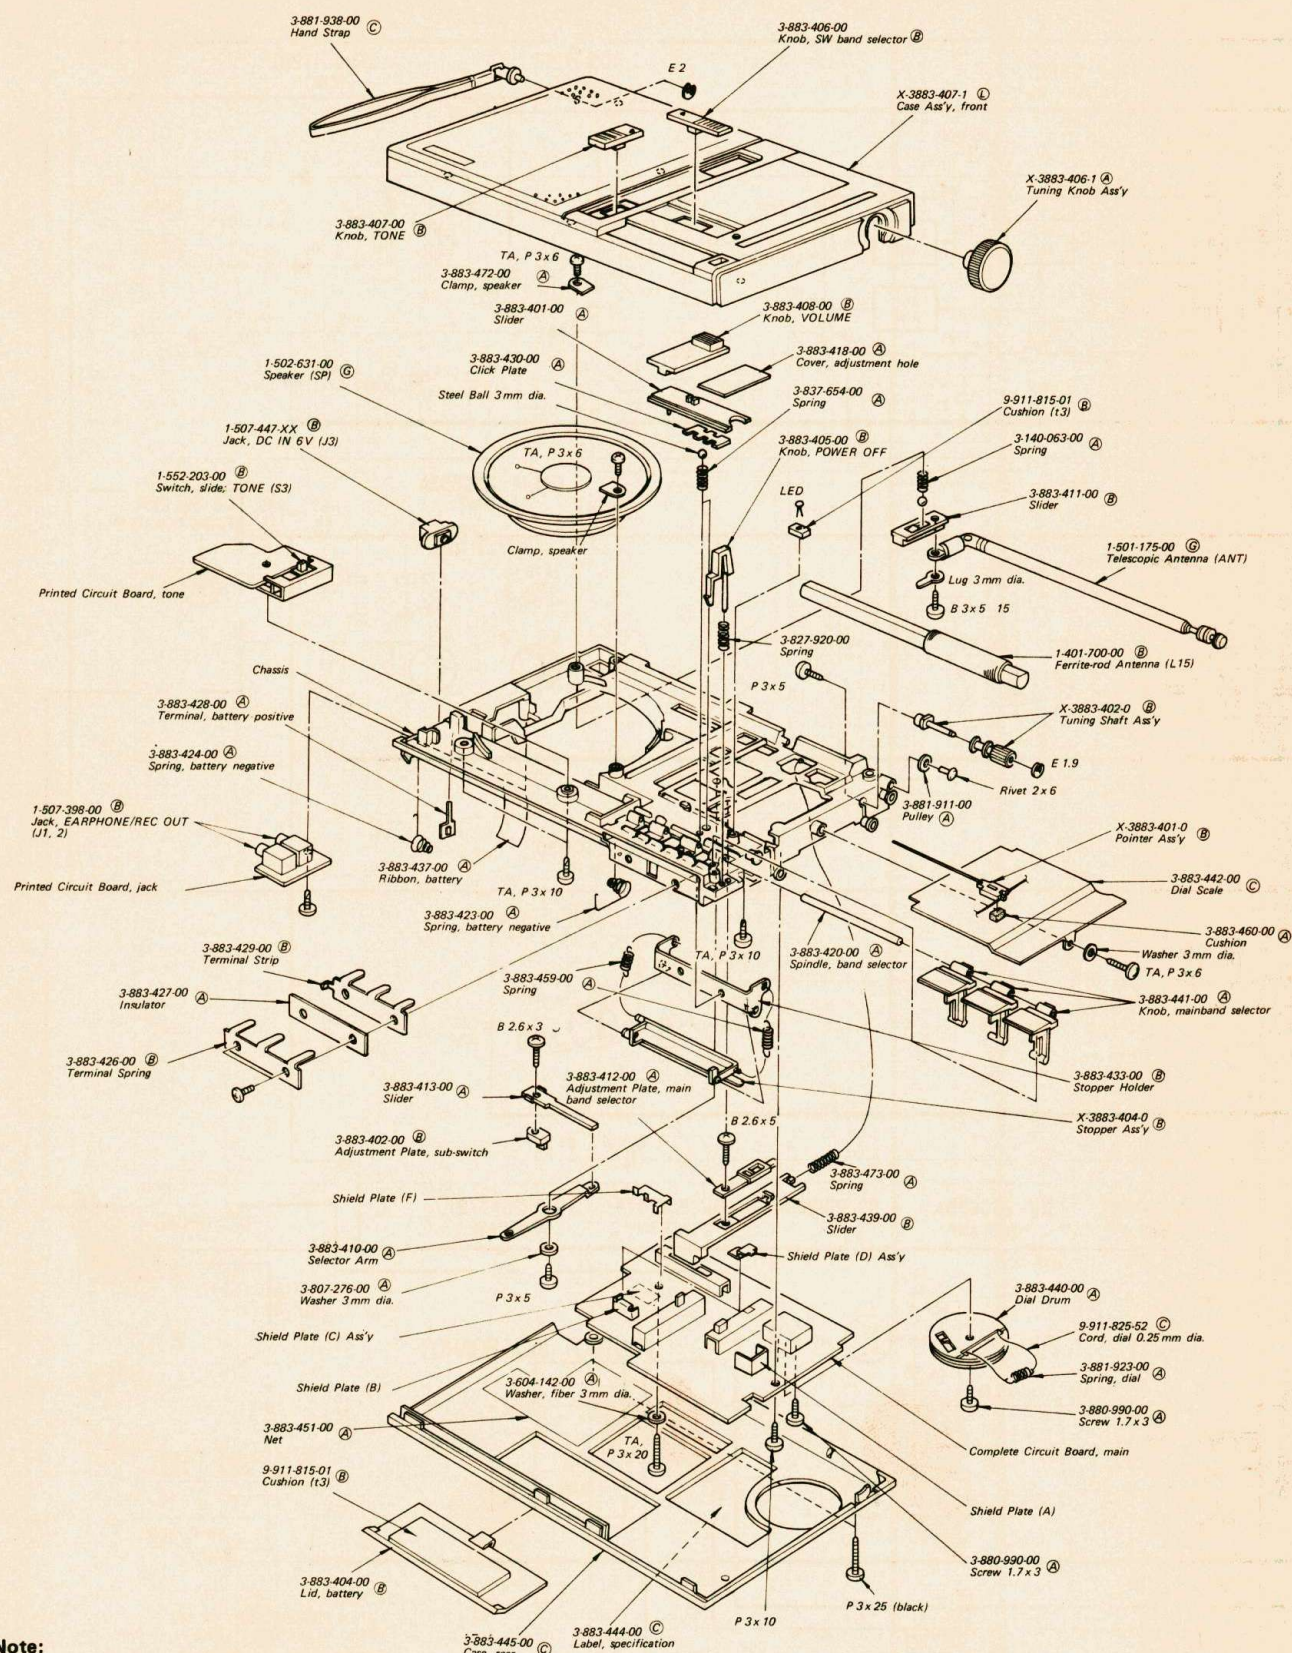

Note:

- Items with no part number and/or no description are not stocked because they are seldom required for routine service.
- All screws are Phillips (cross recess) type unless otherwise noted. (—) = slotted head.
- Circled letters (A) to (Z) are applicable to European models only.

SECTION 6  
ELECTRICAL PARTS LIST

Note: Circled letters (A) to (Z) are applicable to European models only.

| Ref. No.              | Part No.     | Description | Ref. No. | Part No.     | Description                                 |
|-----------------------|--------------|-------------|----------|--------------|---|
| <b>SEMICONDUCTORS</b> |              |             |          |              |   |
| <b>Transistors</b>    |              |             |          |              |   |
| ⇒ Q1                  | (C) 2SC1129  |             | L8       | 1-401-702-00 | (B) SW2 ANT                                 |
| Q2                    | (B) 2SC710   |             | L9       | 1-401-701-00 | (B) SW1 ANT                                 |
| Q3-6                  | (B) 2SC930   |             | L10      | 1-405-768-00 | (B) SW5 OSC                                 |
| Q7                    | (C) 2SK42    |             | L11      | 1-405-767-00 | (B) SW4 OSC                                 |
| Q8                    | (B) 2SC710   |             | L12      | 1-405-766-00 | (B) SW3 OSC                                 |
| ⇒ Q9                  | (C) 2SA678   |             | L13      | 1-405-765-00 | (B) SW2 OSC                                 |
| ⇒ Q10                 | (B) 2SC634A  |             | L14      | 1-405-764-00 | (B) SW1 OSC                                 |
| Q11                   | (B) 2SC1474  |             | L15      | 1-405-700-00 | (B) Ferrite-rod Antenna                     |
| ⇒ Q12                 | (C) 2SA684   |             | L16      | 1-407-882-00 | (B) Coil, 1μH                               |
| ⇒ Q13,14              | (B) 2SC634A  |             | L17      | 1-407-471-00 | (B) Microinductor, 47μH                     |
| <b>ICs</b>            |              |             |          |              |   |
| IC1                   | (E) CX-161   |             | L18      | 1-407-186-XX | (A) Microinductor, 4.7μH                    |
| IC2                   | (H) CX-162   |             | L20      | 1-407-165-XX | (A) Microinductor, 47μH                     |
| <b>Diodes</b>         |              |             |          |              |   |
| D1                    | (B) 2S710    |             | L21      | 1-407-481-00 | (B) Microinductor, 330μH                    |
| D2                    | (B) 1S1555   |             | L23      | 1-407-882-00 | (B) Coil, 1μH                               |
| D3-5                  | (B) 1T261    |             | IFT A-1  | 1-404-022-00 | (B) AM IFT                                  |
| D6,7                  | (B) 1S1555   |             | IFT F-1  | 1-404-063-00 | (B) FM IFT                                  |
| D8                    | (D) SEL103R  |             | IFT F-2  | 1-404-032-00 | (C) FM Discriminator                        |
| D9                    | (B) VD1220   |             | CF1,2    | 1-527-184-XX | (B) Ceramic Filter, 10.7 MHz                |
| ⇒ D10                 | (C) U05G     |             | CFT      | 1-404-070-00 | (E) Ceramic Filter, 468 kHz (AEP, UK model) |
| D11-13                | (B) 1S1555   |             |          | 1-527-273-00 | Ceramic Filter, 455 kHz (E model)           |
| <b>COILS</b>          |              |             |          |              |   |
| L1                    | 1-459-182-00 | (B) FM ANT  | C1       | 1-102-941-11 | (A) 4p                                      |
| L2                    | 1-459-206-00 | (B) FM RF   | C2       | 1-102-940-11 | (A) 6p                                      |
| L3                    | 1-459-204-00 | (B) FM OSC  | C3       | 1-161-001-11 | (A) 0.001 (boundary layer)                  |
| L4                    | 1-405-747-00 | (B) MW OSC  | C4       | 1-102-947-11 | (A) 10p                                     |
| L5                    | 1-401-705-00 | (B) SW5 ANT | C5       | 1-102-941-11 | (A) 4p (Former E model)                     |
| L6                    | 1-401-704-00 | (B) SW4 ANT |          | 1-102-939-11 | (A) 2p (New E model, UK model, AEP model)   |
| L7                    | 1-401-703-00 | (B) SW3 ANT | C6       | 1-102-940-11 | (A) 3p                                      |
|                       |              |             | C7       | 1-101-837-11 | (A) 0.5p                                    |
|                       |              |             | C8       | 1-161-013-11 | (A) 0.01                                    |
|                       |              |             | C9       | 1-161-013-11 | (A) 0.01 (boundary layer)                   |
|                       |              |             | C10      | 1-102-949-11 | (A) 12p                                     |
|                       |              |             | C11      | 1-131-191-11 | (B) 47 6.3V elect                           |
|                       |              |             | C12      | 1-102-114-11 | (A) 470p                                    |
|                       |              |             | C13      | 1-102-941-11 | (A) 4p                                      |
|                       |              |             | C14      | 1-102-964-11 | (A) 36p                                     |
|                       |              |             | C15      | 1-102-998-11 | (A) 5p                                      |
|                       |              |             | C16      | 1-102-887-11 | (A) 62p                                     |
|                       |              |             | C17      | 1-102-943-11 | (A) 6p                                      |
|                       |              |             | C18      | 1-161-013-11 | (A) 0.01 (boundary layer)                   |

⇒: Due to standardization, interchangeable replacements may be substituted for parts specified in the diagrams.

Note: Circled letters (A to Z) are applicable to European models only.

| Ref. No. | Part No.         | Description  | Ref. No.   | Part No.         | Description                            |
|----------|------------------|--|--|------------------|--|
| C19      | 1-102-755-11 (A) | 43p  | C63  | 1-131-228-11 (B) | 10 6.3V tantalum                       |
| C20,21   | 1-102-740-11 (A) | 240p   | C64  | 1-108-882-11 (A) | 51p                                    |
| C22      | 1-102-755-11 (A) | 43p  | C65  | 1-131-191-11 (B) | 47 6.3V tantalum                       |
| C23      | 1-107-260-11 (B) | 82p (2%) silvered mica                                     | C66,67   | 1-121-424-11 (B) | 470 6.3V elect                         |
| C24      | 1-107-260-11 (B) | 82p (2%) silvered mica                                     | C68  | 1-123-201-11 (A) | 100 6.3V elect                         |
| C25      | 1-107-259-11 (B) | 62p (2%) silvered mica                                     | C69  | 1-127-046-11 (A) | 0.22 16V solid aluminum                |
| C26-28   | 1-161-013-11 (A) | 0.01 (boundary layer)                                      | C70  | 1-101-797-11 (A) | 0.1 (boundary layer)                   |
| C29      | 1-102-958-11 (A) | 20p  | C71  | 1-121-395-11 (A) | 4.7 25V elect                          |
| C30      | 1-102-953-11 (A) | 18p  | C72  | 1-123-201-11 (A) | 100 6.3V elect                         |
| C31      | 1-102-947-11 (A) | 10p  | C73  | 1-131-228-11 (B) | 10 6.3V tantalum                       |
| C32      | 1-161-001-11 (A) | 0.001 (boundary layer)                                     | C74  | 1-127-048-11 (B) | 0.47 16V elect                         |
| C33      | 1-101-004-11 (A) | 0.01   | C76  | 1-131-295-11 (C) | 100 6.3V tantalum                      |
| C34      | 1-102-945-11 (A) | 8p   | C77  | 1-161-015-11 (A) | 0.015 (boundary layer)                 |
| C35      | 1-161-013-11 (A) | 0.01 (boundary layer)                                      | C78  | 1-161-013-11 (A) | 0.01 (boundary layer)                  |
| C36      | 1-127-046-11 (A) | 0.22 16V solid aluminum                                    | C79  | 1-102-945-11 (A) | 8p                                     |
| C37      | 1-131-228-11 (B) | 10 6.3V tantalum   | C80  | 1-102-959-11 (A) | 22p                                    |
| C38      | 1-101-004-11 (A) | 0.01   | C81  | 1-102-960-11 (A) | 24p                                    |
| C39      | 1-101-001-11 (A) | 0.001  | C82  | 1-102-950-11 (A) | 13p (New E model, AE' model, UK model) |
| C40      | 1-161-013-11 (A) | 0.01 (boundary layer)                                      | C83  | 1-131-228-11 (B) | 10 6.3V tantalum                       |
| C41      | 1-161-013-11 (A) | 0.01 (boundary layer) (Former E model)                     | C84  | 1-127-046-11 (A) | 0.22 16V solid aluminum                |
| C42      | 1-161-013-11 (A) | 0.01 (boundary layer)                                      | C85-87   | 1-102-975-11 (A) | 100p                                   |
| C43      | 1-161-013-11 (A) | 0.01 (boundary layer)                                      | C88  | 1-127-046-11 (A) | 0.22 16V solid aluminum                |
| C44      | 1-161-001-11 (A) | 0.001 (boundary layer)                                     | C89  | 1-161-001-11 (A) | 0.001                                  |
| C45      | 1-121-651-11 (A) | 10 16V elect   | C90  | 1-102-729-11 (A) | 51p                                    |
| C46      | 1-102-109-11 (A) | 180p   | C91  | 1-102-964-11 (A) | 100p                                   |
| C47      | 1-121-391-11 (A) | 1 50V elect  | C92  | 1-161-015-11 (A) | 0.015 (boundary layer)                 |
| C48      | 1-101-004-11 (A) | 0.01   | C93  | 1-102-998-11 (A) | 5p                                     |
| C49      | 1-101-004-11 (A) | 0.01   | C94  | 1-161-030-11 (A) | 0.0047 (boundary layer)                |
| C50      | 1-131-295-11 (C) | 100 6.3V tantalum  | C95  | 1-102-943-11 (A) | 6p                                     |
| C51      | 1-131-228-11 (B) | 10 6.3V tantalum   | CT1-4  | 1-151-317-00 (H) | Tuning                                 |
| C52      | 1-121-392-11 (A) | 3.3 25V elect  | CV1-4  |                  |  |
| C53      | 1-121-651-11 (A) | 10 16V elect   | CT2  | 1-141-171-00 (B) | Trimmer                                |
| C54      | 1-161-013-11 (A) | 0.01 (boundary layer)                                      | CT3  | 1-141-181-11 (E) | Trimmer                                |
| C55      | 1-161-013-11 (A) | 0.01 (boundary layer) (Former E model)                     | <b>RESISTORS</b>   |                  |  |
|          | 1-161-030-11 (A) | 0.0047 (boundary layer) (New E model, AEP model, UK model) | All resistors are in ohms. Common 1/4W carbon resistors are omitted. Refer to the list on the last page for their part number. |                  |  |
| C56      | 1-101-796-11 (A) | 0.05 (boundary layer)                                      | R10  | 1-201-626-11 (A) | 680 1/8W composition                   |
| C57      | 1-161-001-11 (A) | 0.001 (boundary layer)                                     | R20  | 1-201-622-11 (A) | 560 1/8W composition                   |
| C58      | 1-102-958-11 (A) | 20p  | R24  | 1-201-400-11 (A) | 330 1/8W composition                   |
| C59      | 1-131-197-11 (B) | 3.3 16V tantalum   | R25  | 1-202-005-11 (A) | 2.2 k 1/8W composition                 |
| C60      | 1-161-013-11 (A) | 0.01 (boundary layer)                                      |  |                  |  |
| C61      | 1-127-046-11 (A) | 0.22 16V elect   |  |                  |  |
| C62      | 1-102-975-11 (A) | 100p   |  |                  |  |

Note: Circled letters (A to Z) are applicable to European models only.

| Ref. No. | Part No.         | Description  |
|----------|------------------|--|
| R28      | 1-201-643-11 (A) | 1.5 k 1/8W composition (Former E model)                  |
|          | 1-201-639-11 (A) | 1.2 k 1/8W composition (New E model, AEP model, E model) |
| R29      | 1-201-350-11 (A) | 150 1/8W composition                                     |
| R50      | 1-202-073-11 (A) | 39 k 1/8W composition                                    |
| R51      | 1-201-634-11 (A) | 1 k 1/8W composition                                     |
| R52      | 1-201-630-11 (A) | 820 1/8W composition                                     |
| R58      | 1-201-622-11 (A) | 560 1/8W composition                                     |
| R66      | 1-201-382-11 (A) | 47 1/8W composition                                      |
| VR1      | 1-226-103-00 (C) | 10 k, variable; VOLUME                                   |

**SWITCHES**

|    |                  |                         |
|----|------------------|-------------------------|
| S1 | 1-552-218-00 (C) | Slide, BAND SELECTOR    |
| S2 | 1-552-202-00 (B) | Slide, SW BAND SELECTOR |
| S3 | 1-552-203-00 (B) | Slide, TONE             |

**JACKS**

|      |                  |                   |
|------|------------------|-------------------|
| J1,2 | 1-507-398-00 (B) | REC OUT, EARPHONE |
| J3   | 1-507-447-XX (B) | DC IN 6V          |

| Ref. No.             | Part No.         | Description              |
|----------------------|------------------|--------------------------|
| <b>MISCELLANEOUS</b> |                  |                          |
| ANT                  | 1-501-175-00 (C) | FM/SW Telescopic Antenna |
| SP                   | 1-502-631-00 (C) | Speaker                  |

**ACCESSORIES & PACKING MATERIALS**

| Part No.         | Description                         |
|------------------|-------------------------------------|
| X-3883-409-0 (E) | Carton Ass'y                        |
| X-3883-410-0 (B) | Cushion (top) Ass'y                 |
| 1-504-059-11 (C) | Earphone, ME-20H                    |
| 3-701-622-00 (A) | Bag, plastic                        |
| 3-816-719-00 (B) | Case, earphone                      |
| 3-883-469-00 (A) | Bag, protection                     |
| 3-883-470-00 (B) | Sleeve                              |
| 3-995-789-02     | Manual, instruction (AEP, UK model) |
| 3-995-789-01     | Manual, instruction (E model)       |

**1/4 WATT CARBON RESISTORS**

| Ω   | Part No.     | Ω  | Part No.     | Ω   | Part No.     | Ω    | Part No.     | Ω   | Part No.     | Ω    | Part No.     | Ω    | Part No.     |
|-----|--------------|----|--------------|-----|--------------|------|--------------|-----|--------------|------|--------------|------|--------------|
| 1.0 | 1-244-601-11 | 10 | 1-244-625-11 | 100 | 1-244-649-11 | 1.0k | 1-244-673-11 | 10k | 1-244-697-11 | 100k | 1-244-721-11 | 1.0M | 1-244-745-11 |
| 1.1 | 1-244-602-11 | 11 | 1-244-626-11 | 110 | 1-244-650-11 | 1.1k | 1-244-674-11 | 11k | 1-244-698-11 | 110k | 1-244-722-11 | 1.1M | 1-244-746-11 |
| 1.2 | 1-244-603-11 | 12 | 1-244-627-11 | 120 | 1-244-651-11 | 1.2k | 1-244-675-11 | 12k | 1-244-699-11 | 120k | 1-244-723-11 | 1.2M | 1-244-747-11 |
| 1.3 | 1-244-604-11 | 13 | 1-244-628-11 | 130 | 1-244-652-11 | 1.3k | 1-244-676-11 | 13k | 1-244-700-11 | 130k | 1-244-724-11 | 1.3M | 1-244-748-11 |
| 1.5 | 1-244-605-11 | 15 | 1-244-629-11 | 150 | 1-244-653-11 | 1.5k | 1-244-677-11 | 15k | 1-244-701-11 | 150k | 1-244-725-11 | 1.5M | 1-244-749-11 |
| 1.6 | 1-244-606-11 | 16 | 1-244-630-11 | 160 | 1-244-654-11 | 1.6k | 1-244-678-11 | 16k | 1-244-702-11 | 160k | 1-244-726-11 | 1.6M | 1-244-750-11 |
| 1.8 | 1-244-607-11 | 18 | 1-244-631-11 | 180 | 1-244-655-11 | 1.8k | 1-244-679-11 | 18k | 1-244-703-11 | 180k | 1-244-727-11 | 1.8M | 1-244-751-11 |
| 2.0 | 1-244-608-11 | 20 | 1-244-632-11 | 200 | 1-244-656-11 | 2.0k | 1-244-680-11 | 20k | 1-244-704-11 | 200k | 1-244-728-11 | 2.0M | 1-244-752-11 |
| 2.2 | 1-244-609-11 | 22 | 1-244-633-11 | 220 | 1-244-657-11 | 2.2k | 1-244-681-11 | 22k | 1-244-705-11 | 220k | 1-244-729-11 | 2.2M | 1-244-753-11 |
| 2.4 | 1-244-610-11 | 24 | 1-244-634-11 | 240 | 1-244-658-11 | 2.4k | 1-244-682-11 | 24k | 1-244-706-11 | 240k | 1-244-730-11 | 2.4M | 1-244-754-11 |
| 2.7 | 1-244-611-11 | 27 | 1-244-635-11 | 270 | 1-244-659-11 | 2.7k | 1-244-683-11 | 27k | 1-244-707-11 | 270k | 1-244-731-11 | 2.7M | 1-244-755-11 |
| 3.0 | 1-244-612-11 | 30 | 1-244-636-11 | 300 | 1-244-660-11 | 3.0k | 1-244-684-11 | 30k | 1-244-708-11 | 300k | 1-244-732-11 | 3.0M | 1-244-756-11 |
| 3.3 | 1-244-613-11 | 33 | 1-244-637-11 | 330 | 1-244-661-11 | 3.3k | 1-244-685-11 | 33k | 1-244-709-11 | 330k | 1-244-733-11 | 3.3M | 1-244-757-11 |
| 3.6 | 1-244-614-11 | 36 | 1-244-638-11 | 360 | 1-244-662-11 | 3.6k | 1-244-686-11 | 36k | 1-244-710-11 | 360k | 1-244-734-11 | 3.6M | 1-244-758-11 |
| 3.9 | 1-244-615-11 | 39 | 1-244-639-11 | 390 | 1-244-663-11 | 3.9k | 1-244-687-11 | 39k | 1-244-711-11 | 390k | 1-244-735-11 | 3.9M | 1-244-759-11 |
| 4.3 | 1-244-616-11 | 43 | 1-244-640-11 | 430 | 1-244-664-11 | 4.3k | 1-244-688-11 | 43k | 1-244-712-11 | 430k | 1-244-736-11 | 4.3M | 1-244-760-11 |
| 4.7 | 1-244-617-11 | 47 | 1-244-641-11 | 470 | 1-244-665-11 | 4.7k | 1-244-689-11 | 47k | 1-244-713-11 | 470k | 1-244-737-11 | 4.7M | 1-244-761-11 |
| 5.1 | 1-244-618-11 | 51 | 1-244-642-11 | 510 | 1-244-666-11 | 5.1k | 1-244-690-11 | 51k | 1-244-714-11 | 510k | 1-244-738-11 | 5.1M | 1-244-762-11 |
| 5.6 | 1-244-619-11 | 56 | 1-244-643-11 | 560 | 1-244-667-11 | 5.6k | 1-244-691-11 | 56k | 1-244-715-11 | 560k | 1-244-739-11 |      |              |
| 6.2 | 1-244-620-11 | 62 | 1-244-644-11 | 620 | 1-244-668-11 | 6.2k | 1-244-692-11 | 62k | 1-244-716-11 | 620k | 1-244-740-11 |      |              |
| 6.8 | 1-244-621-11 | 68 | 1-244-645-11 | 680 | 1-244-669-11 | 6.8k | 1-244-693-11 | 68k | 1-244-717-11 | 680k | 1-244-741-11 |      |              |
| 7.5 | 1-244-622-11 | 75 | 1-244-646-11 | 750 | 1-244-670-11 | 7.5k | 1-244-694-11 | 75k | 1-244-718-11 | 750k | 1-244-742-11 |      |              |
| 8.2 | 1-244-623-11 | 82 | 1-244-647-11 | 820 | 1-244-671-11 | 8.2k | 1-244-695-11 | 82k | 1-244-719-11 | 820k | 1-244-743-11 |      |              |
| 9.1 | 1-244-624-11 | 91 | 1-244-648-11 | 910 | 1-244-672-11 | 9.1k | 1-244-696-11 | 91k | 1-244-720-11 | 910k | 1-244-744-11 |      |              |

Sony Corporation

© 1978