




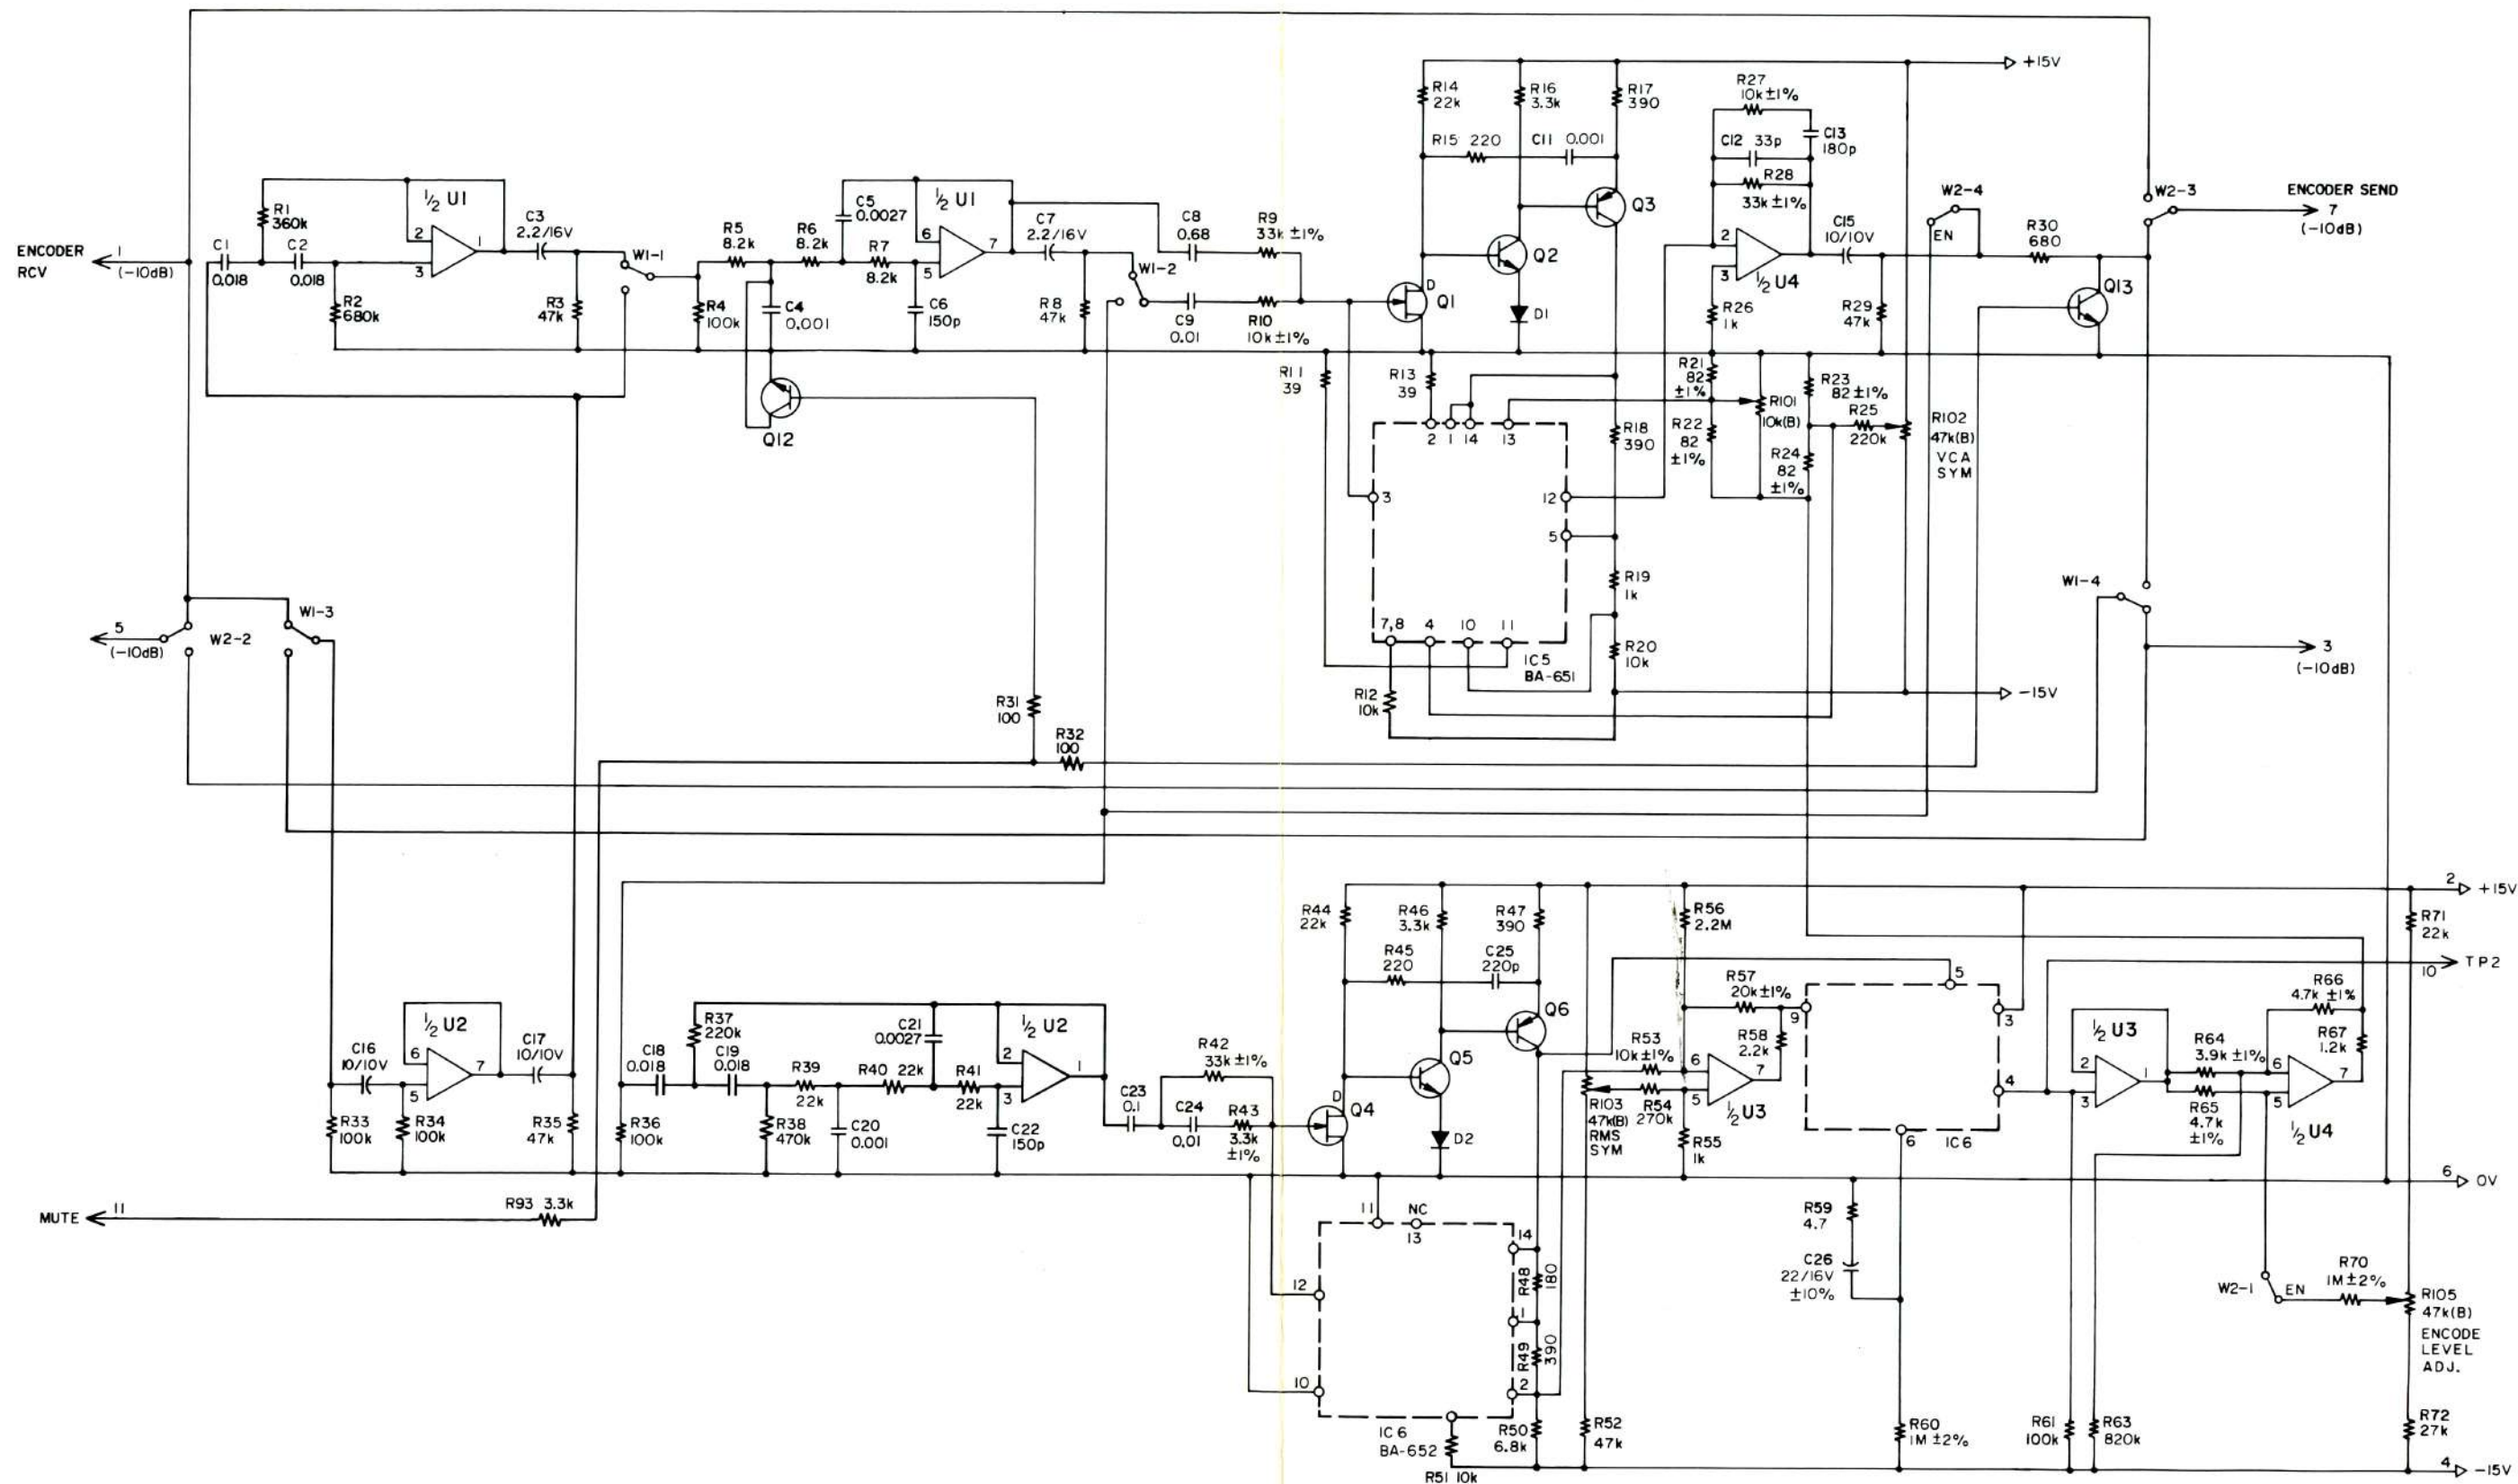

NOTES


1. ALL RESISTORS ARE 1/4 WATT, 5%, UNLESS MARKED OTHERWISE. RESISTOR VALUES ARE IN OHMS (k=1,000 OHMS, M=1,000,000 OHMS).
2. ALL CAPACITOR VALUES ARE IN MICROFARADS (p=PICOFARADS).

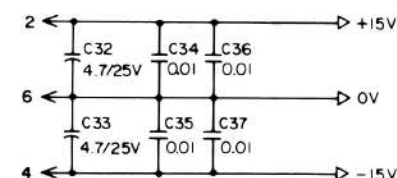


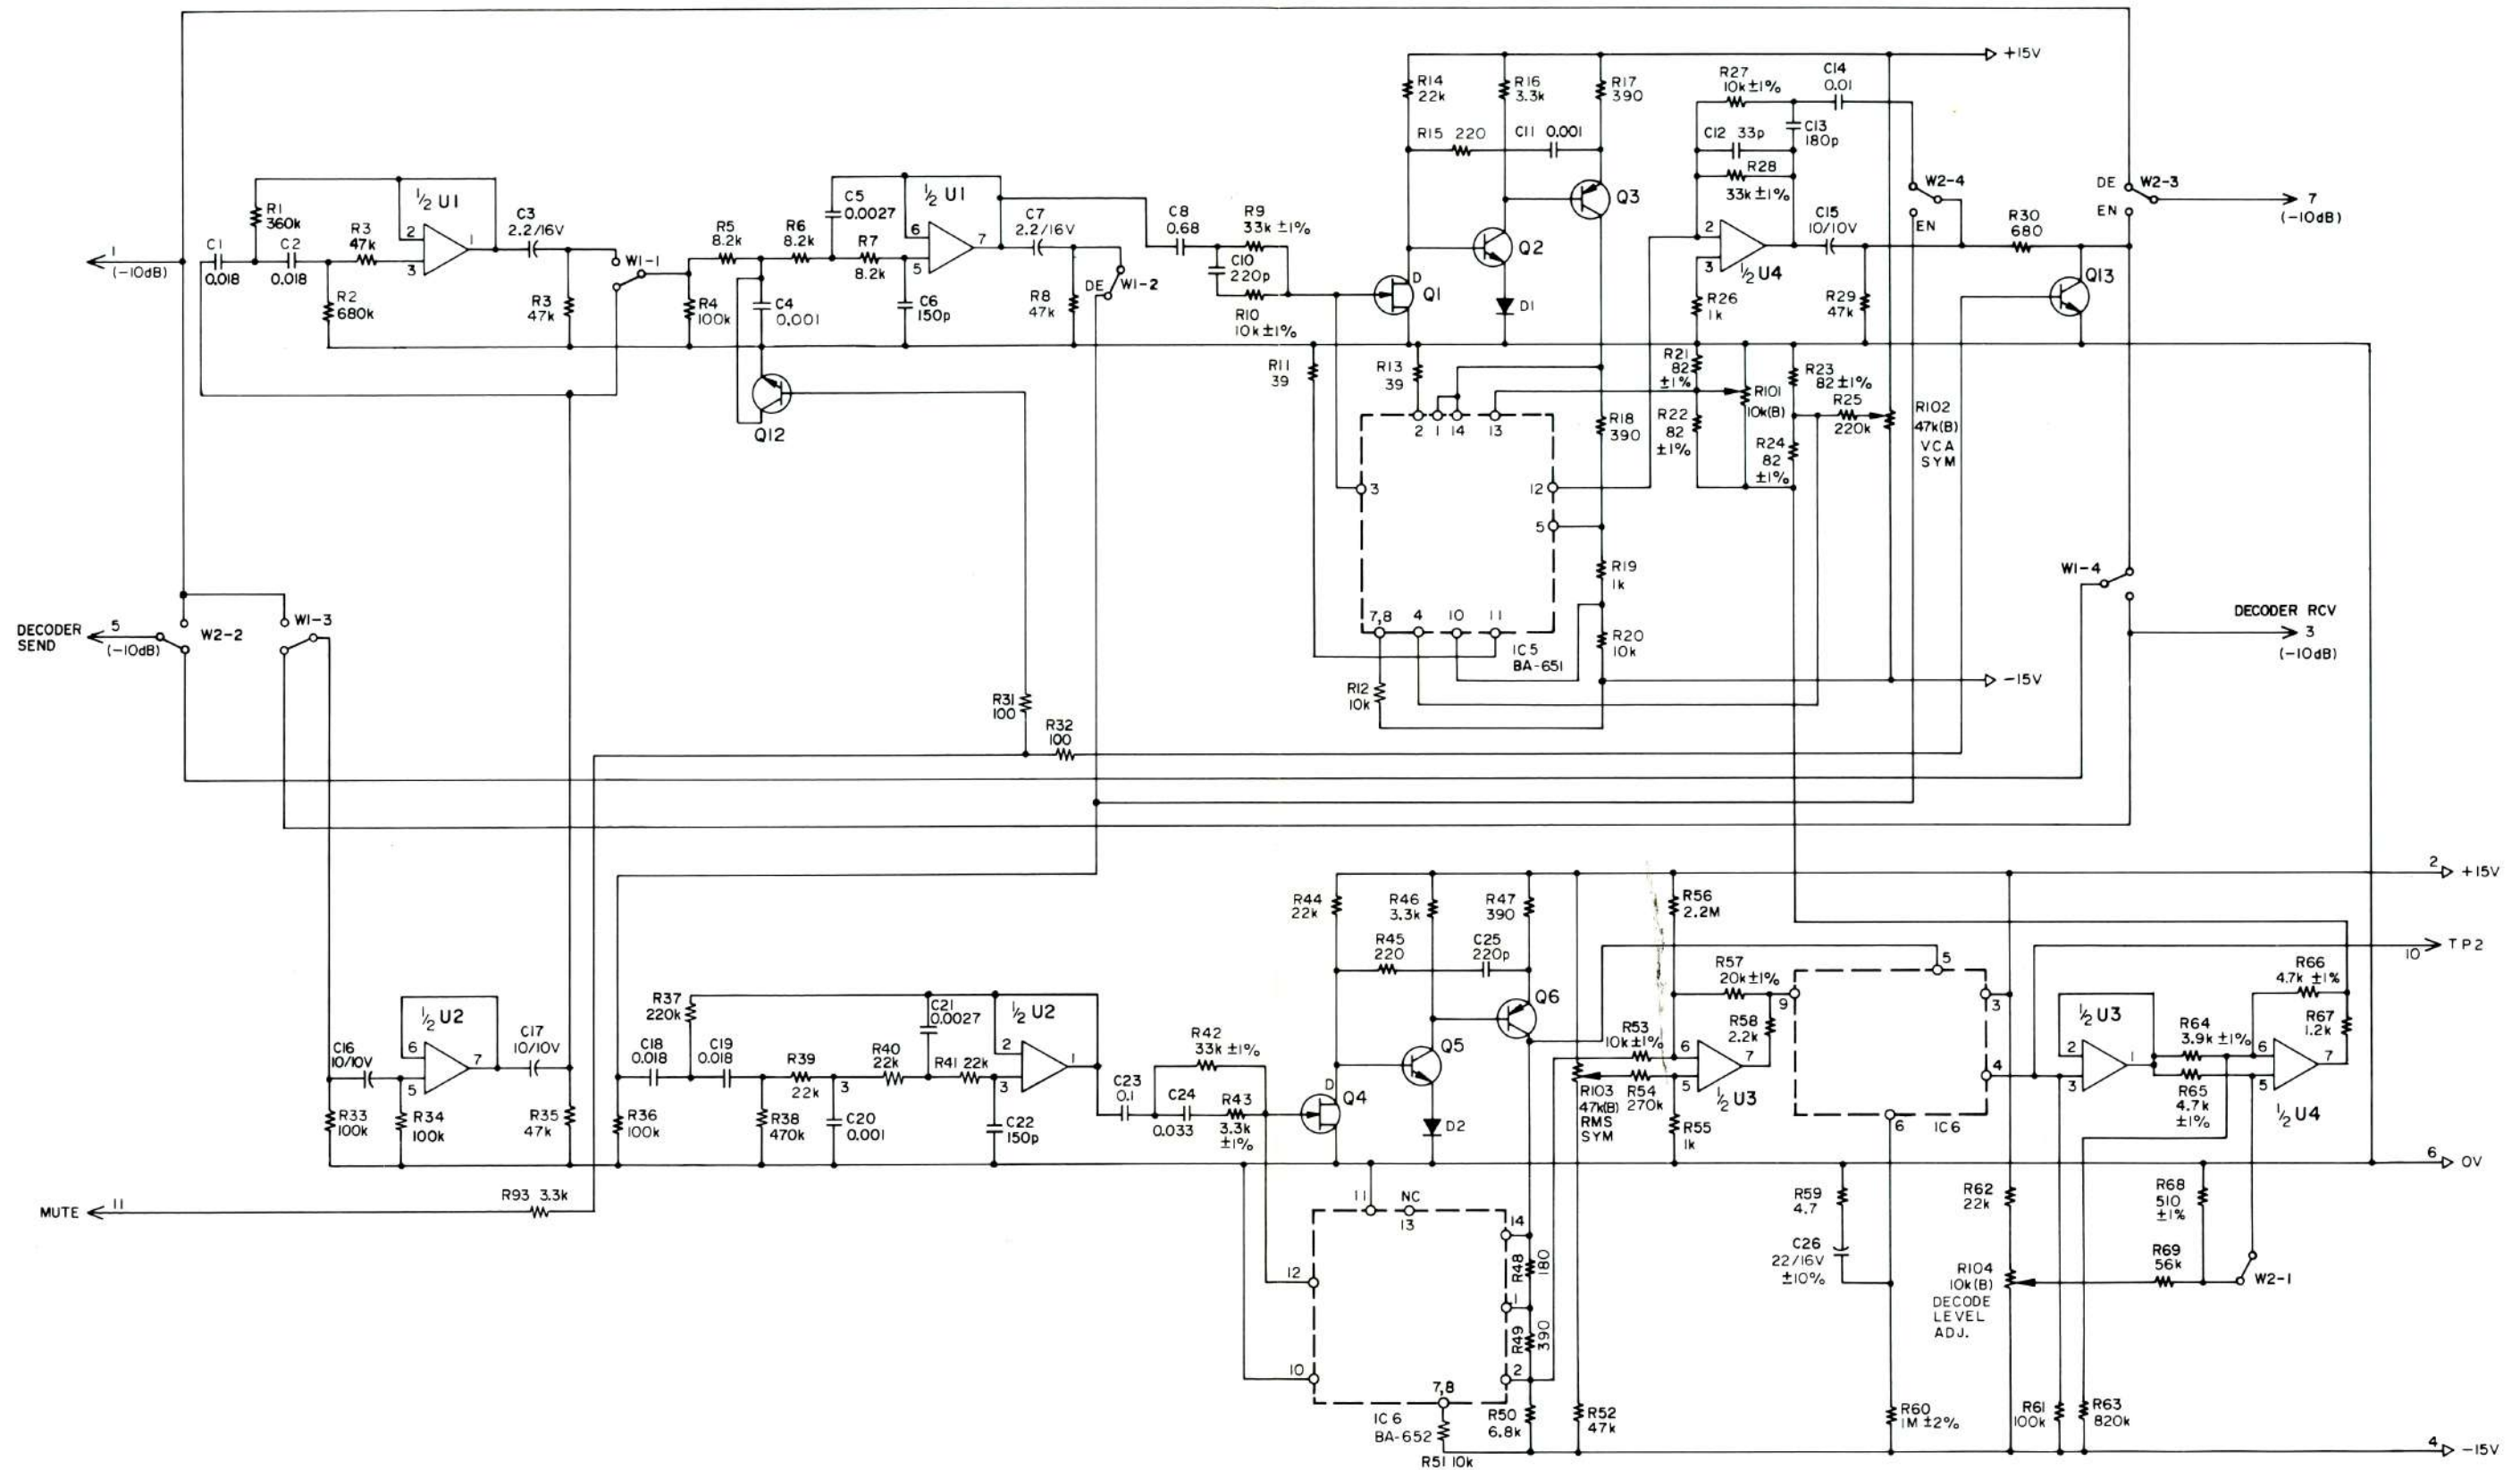

NOTES

- ALL RESISTORS ARE 1/2 WATT, 5%, UNLESS MARKED OTHERWISE. RESISTOR VALUES ARE IN OHMS (K=1,000 OHMS, M=1,000,000 OHMS).
- ALL CAPACITOR VALUES ARE IN MICROFARADS (P=PICOFARADS).

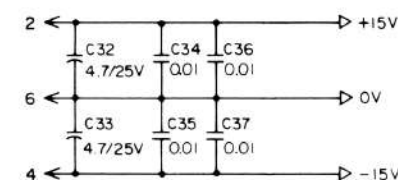

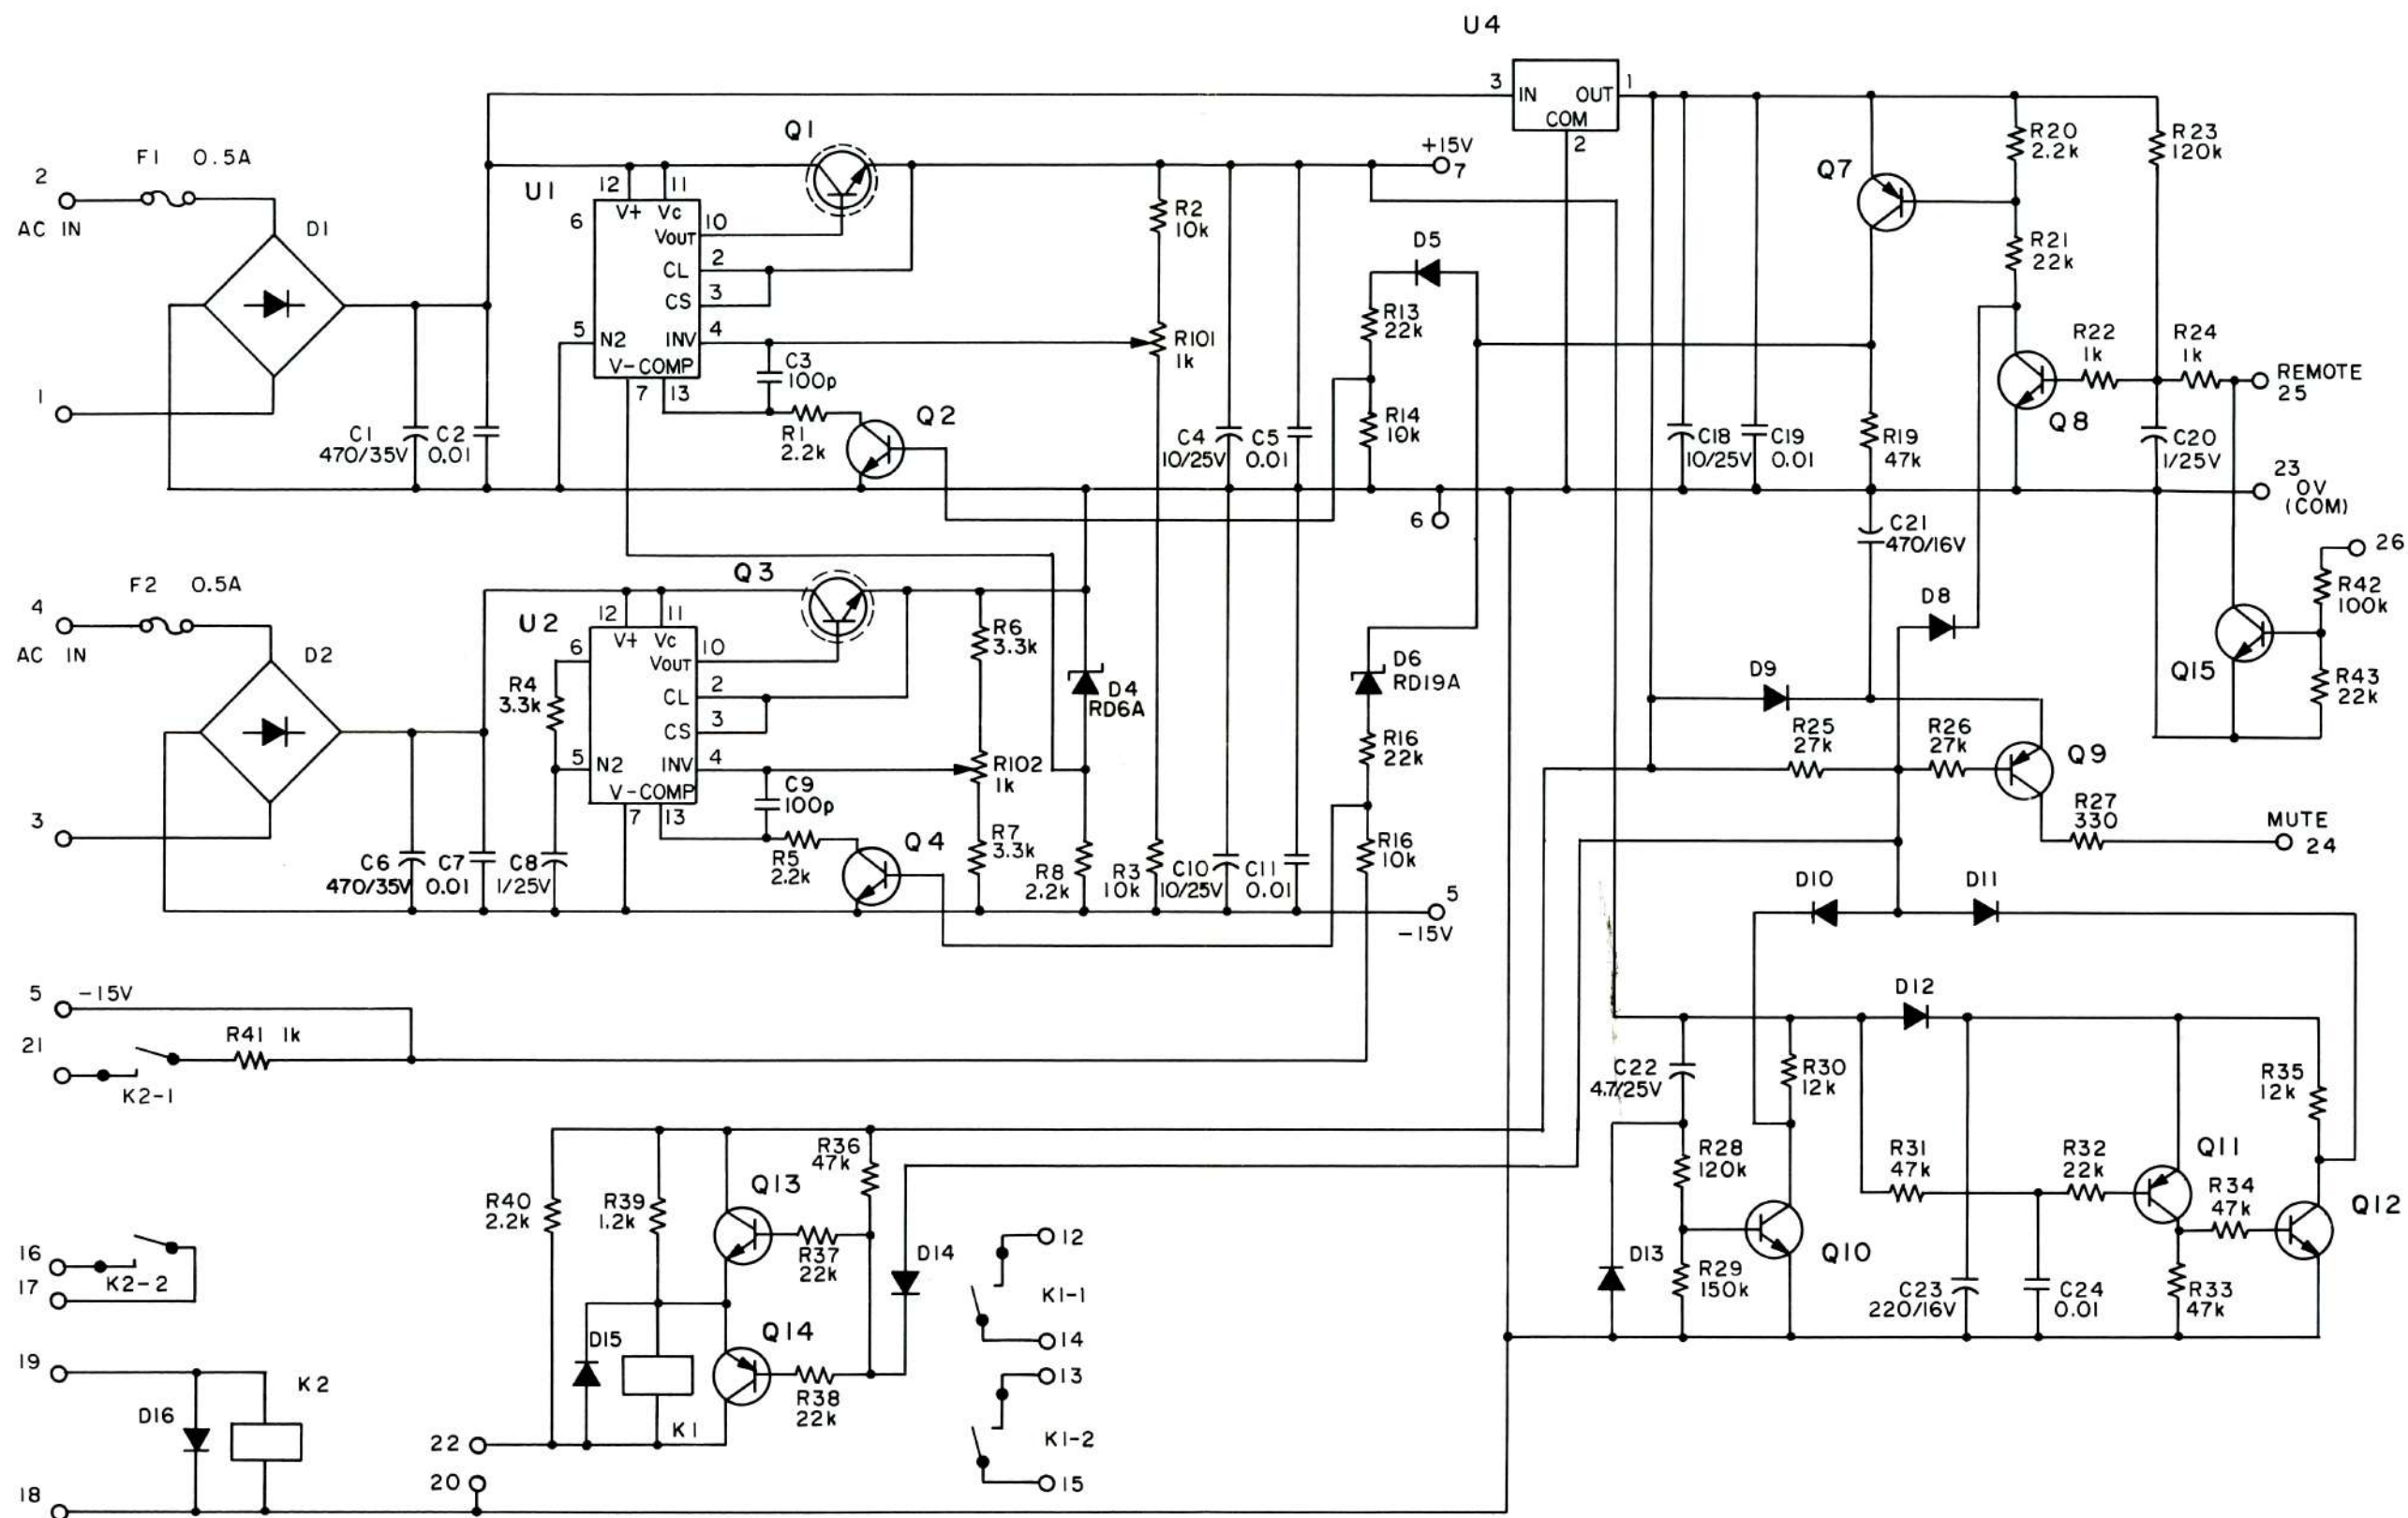

NOTES

- ALL RESISTORS ARE 1/4 WATT, 5%, UNLESS MARKED OTHERWISE. RESISTOR VALUES ARE IN OHMS (k=1,000 OHMS, M=1,000,000 OHMS).
- ALL CAPACITOR VALUES ARE IN MICROFARADS (p=PICOFARADS).

6					
5					
4					
3					
2					
1	07-78				
REVISION	DATE	CHANGE NO.			


S-231

POWER SUPPLY

MODEL NO. **RX-8**

TEAC CORPORATION

SHEET NO.

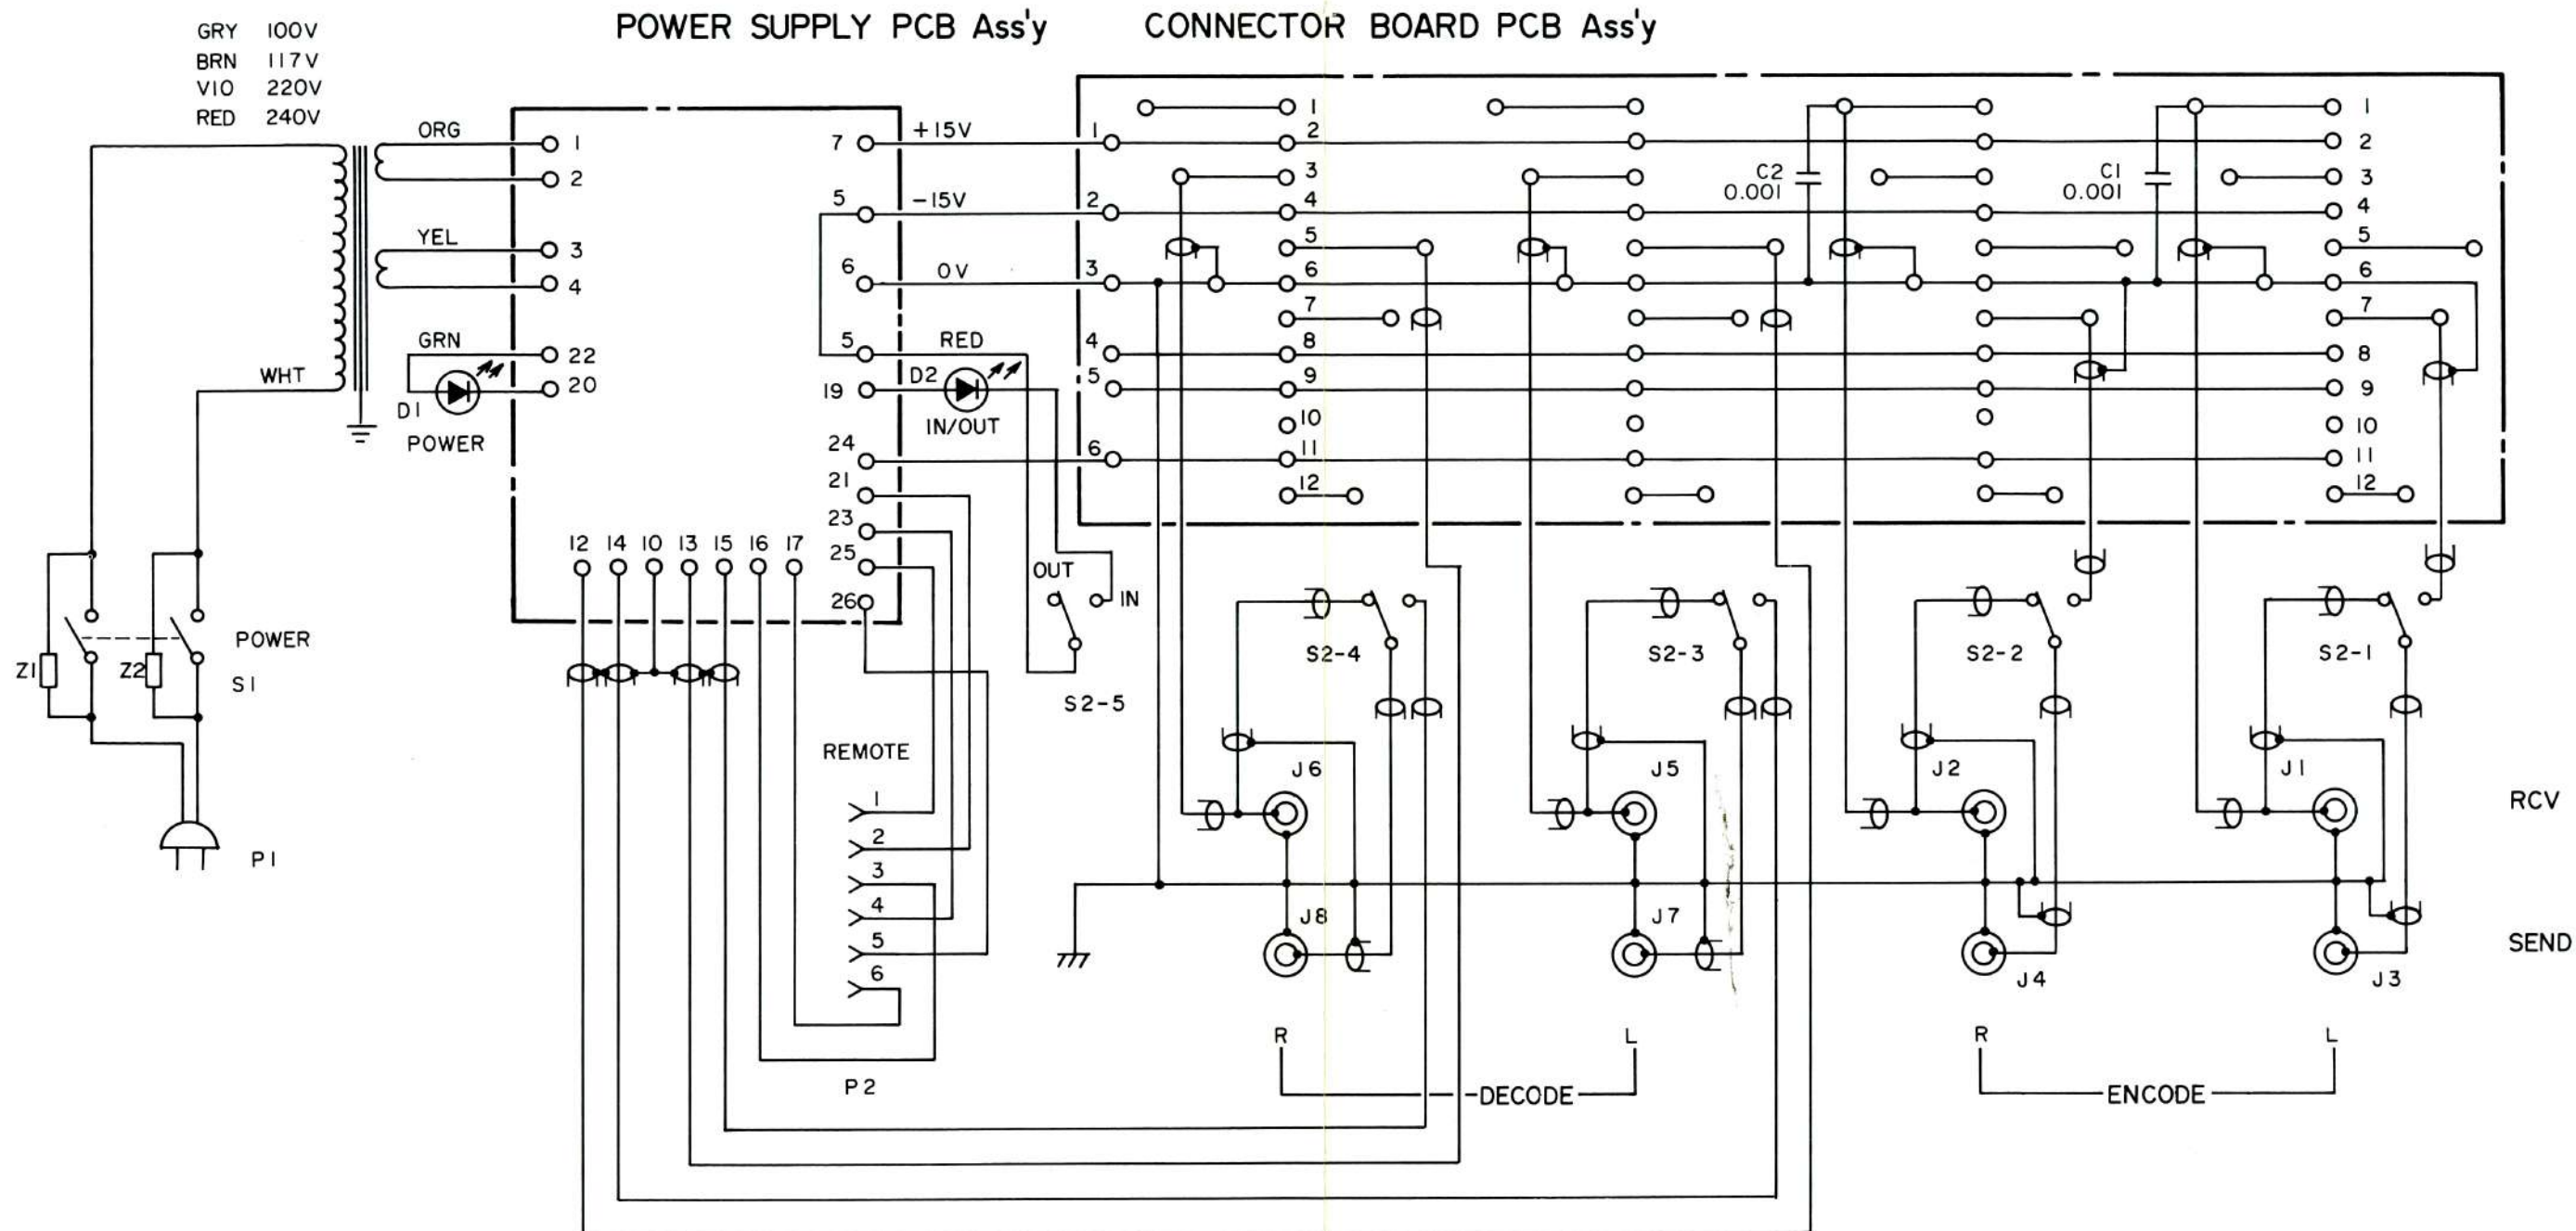

	Z1	Z2
JAPAN U.S.A.	125VAC 0.033 + 120	SHORT
CANADA	250VAC 0.033 + 120	SHORT
GENERAL EXPORT	250VAC 4700p	SHORT
EUROPE, U.K. AUSTRALIA	250VAC 4700p	250VAC 4700p

REVISION	DATE	CHANGE NO.
6		
5		
4		
3		
2		
1	07-78	

S-232

WIRING DIAGRAM

MODEL NO. **RX-8** SHEET NO.

TEAC CORPORATION