


Service
Service
Service

Volume : 41 L
Dimensions : 584x390x270 mm
Weight : 14 kg
Rated impedance : 8 Ω
Power handling capacity : 80 W
Cross-over frequencies : 600 - 7000 Hz
Resonance frequency : 54 Hz
Frequency range : 35 - 20.000 Hz





18385A2

Service Manual


51 4822 492 60268
52 4822 413 40848
53 4822 535 91133
54 4822 240 70041
56 4822 240 50131
57 4822 240 60112
58 4822 466 60806
59 4822 466 80724
61 4822 103 30105
62 4822 103 30104

63 4822 325 60204
64 4822 322 20014
66 4822 264 30041
67 4822 325 80187
68 4822 532 80644
69 4822 214 30458

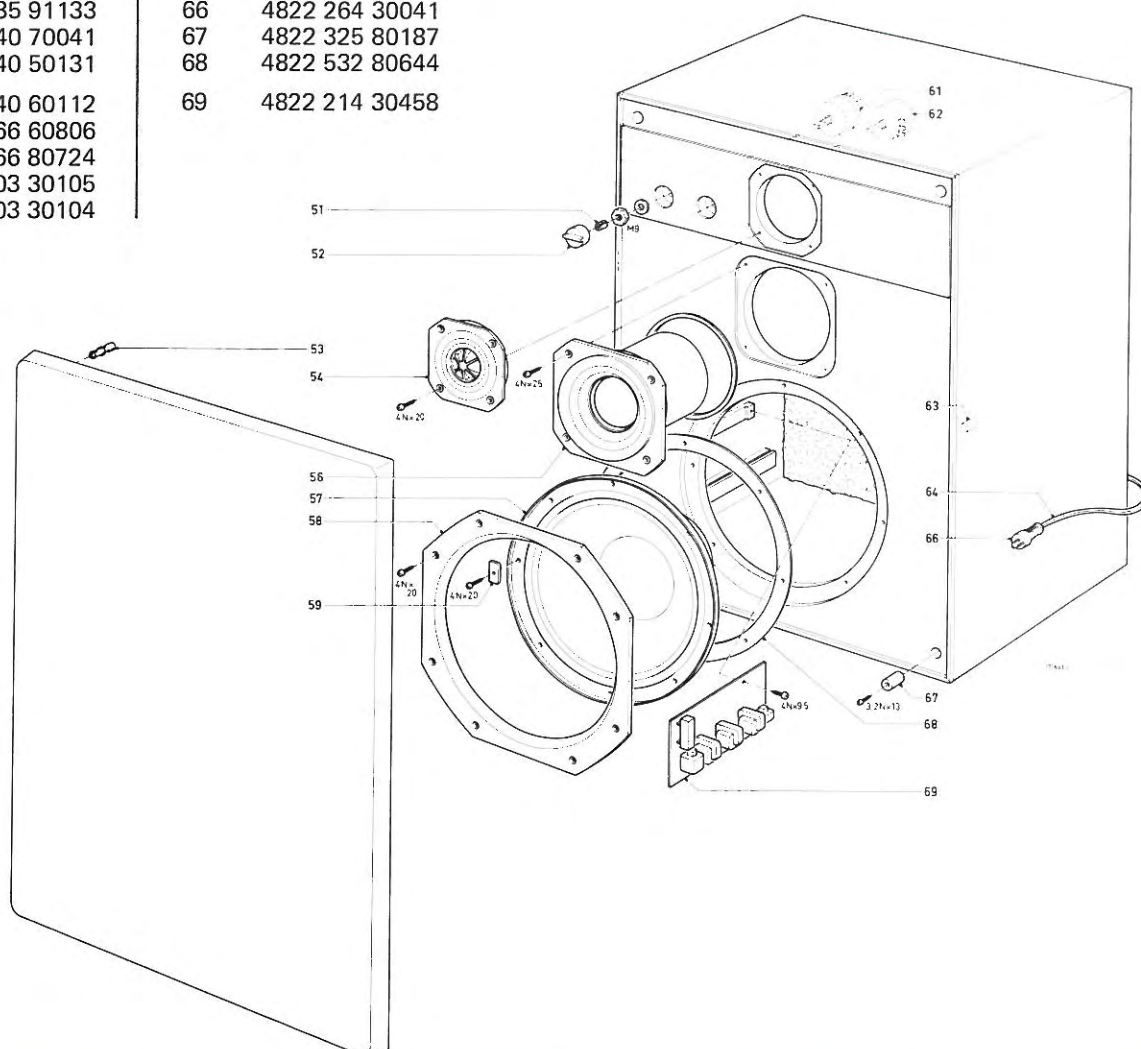


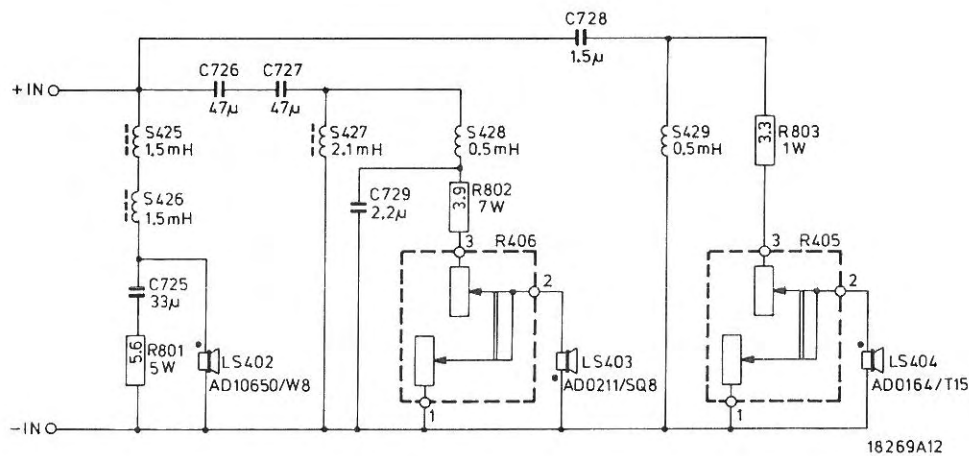

18269A12




18450A12

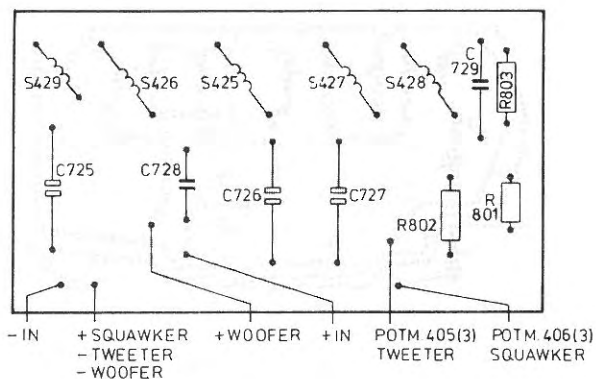

18354A12

C725	4822 124 20754
C726,727	4822 124 20755
C728	4822 121 40452
C729	4822 121 40456
R801	4822 112 21047
R802	4822 113 80182
R803	4822 110 23041
S425,426	4822 157 51017
S427	4822 152 20486
S428	4822 157 50775
S429	4822 156 10427
LS402	4822 240 60112 AD10650/W8
LS403	4822 240 50131 AD02111/SQ8
LS404	4822 240 70041 AD0164/T15

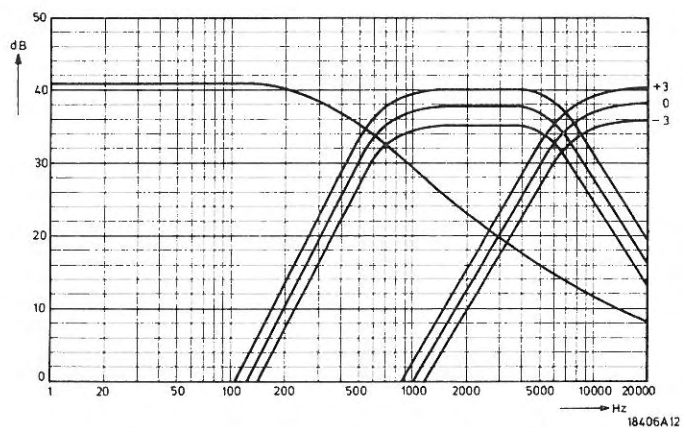

As from PL01032... resistor 802, 3E9 Ω - 7 W, codenumber 4822 113 80182, has been changed to 2E2 Ω - 7 W, codenumber 4822 113 80266.

Resistor 803, 3E3 Ω , codenumber 4822 110 23041 has been changed to 1E5 Ω , codenumber 4822 110 43032.

Clamping grommet 4822 325 80187 has been replaced by grommet 4822 325 80192.

Note:

If replacement of clamping grommet is required, always mount a grommet identical to the remaining three or replace all four grommets by new ones !