

PHILIPS SERVICE

BX 182 U

185—580 m (1620—517 kc/s)


9730 X

Z = 5 Ω


127 V

452 kc/s


35 W

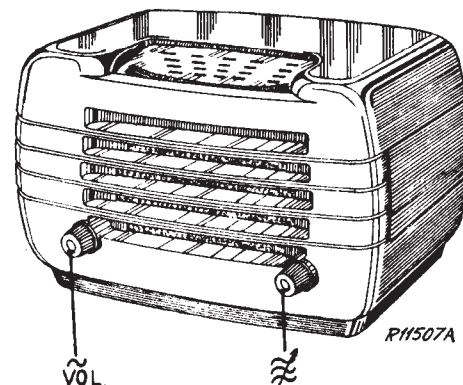

185—580 m	I	185—580 m	III
VOL. max		VOL. max	
C3, C4 max		C3, C4 max	
452 kc/s-33000 pF-g1B1		0	
S9/S9a max		1550 kc/s	
S7/S8 max		1550 kc/s—	
S5/S5a max		C9, C7 max	
S6/S6a max		550 kc/s	
		550 kc/s—	
		C10 max	

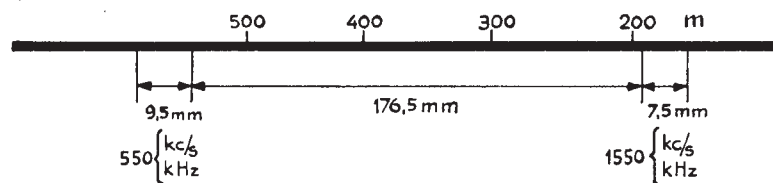

R11568A

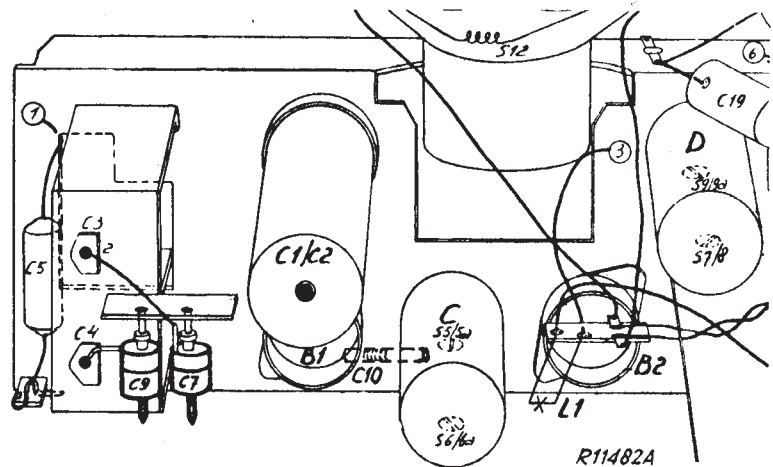

R11482A

R1	1000 Ω	48 467 10/1K	C1	50 μ F	48 317 58/50 + 50
R2	130 Ω	49 364 70.0	C2	50 μ F	
R3	2800 Ω	48 555 10/22K	C3	12-492 pF	49 001 13.2
R4	22000 Ω	48 556 10/10K	C4	12-492 pF	48 757 20/1K
R5	10000 Ω	48 555 10/1M5	C5	1000 pF	48 750 10/47K
R6	1.5 M Ω	48 427 10/10M	C6	47000 pF	28 212 36.4
R7	10 M Ω	48 555 10/47K	C7	30 pF	48 751 10/47K
R8	47000 Ω	49 500 11.0	C8	47000 pF	28 212 36.4
R9	0.5 M Ω	48 555 10/680K	C9	30 pF	49 035 55.2
R10	0.68 M Ω	48 426 10/100E	C10	400-575 pF	48 751 10/100K
R11	100 Ω	48 555 10/18K	C11	0.1 μ F	
R12	18000 Ω	48 426 10/4M7	C12	115 pF	
R13	4.7 M Ω		C13	115 pF	
			C14	115 pF	
			C15	115 pF	
			C16	82 pF	48 203 10/82E
			C17	10000 pF	48 750 10/10K
			C18	100 μ F	48 313 22/100
			C19	4700 pF	48 757 20/4K7
			C20	1000 pF	43 757 20/1K
			C21	470 pF	48 203 10/470E

S1, S2	A3 111 17.1		
S3, S4	A3 111 18.1		
S5, S6, C12, C13	A3 121 94.2		
S7, S8, S9,	A3 121 94.2		
C14, C15	A3 151 61.1		
S10, S11			
L1	7121D-00		

	B1	B2	B3	
	UCH 41	UAF 42	UL 41	
Va	H 130 T 69	130	128	V
Vg2(4)	69	69	130	V
Ia	H 2,5 T 2,8	3,5	47	mA
Ig2(4)	2,4	1,1	7,5	mA

VC1 = 150 V,

VC2 = 130 V

93 953 32.1

BX 182 U

