



ZF = 455 kHz

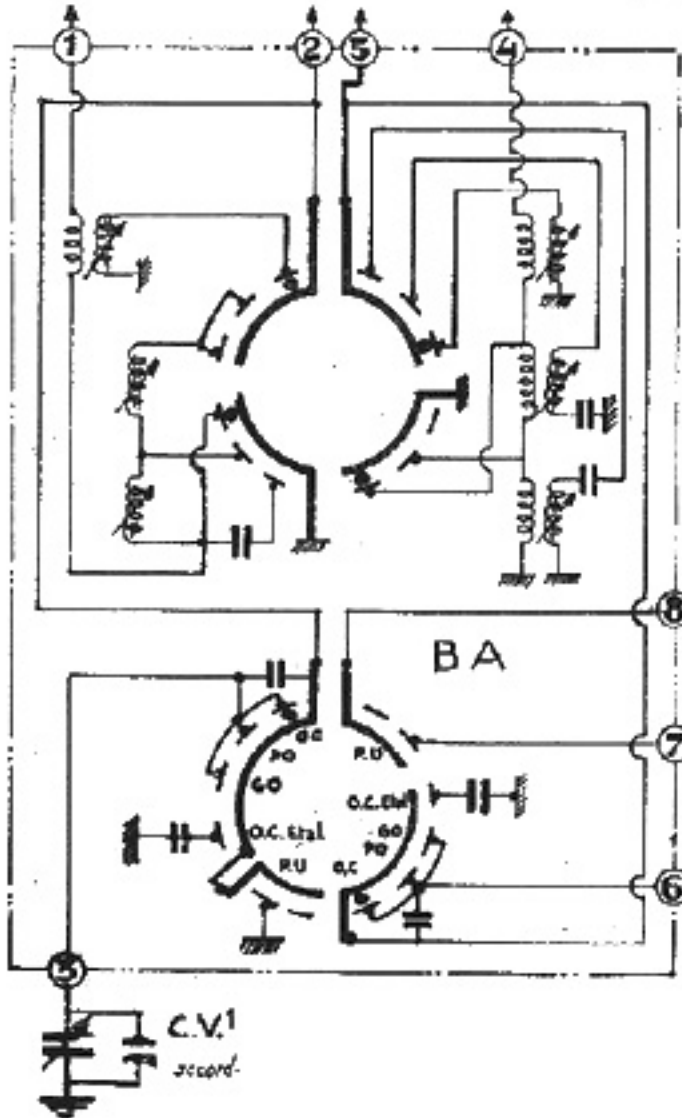

BROCHAGE DES LAMPES
VUE DE DESSOUS

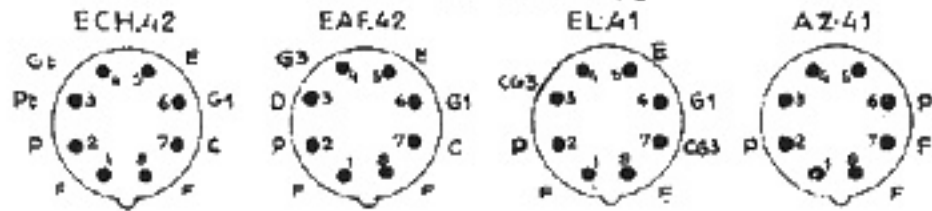

C.1	500nF ±20% - papier - 150V	61210	R.1	20KΩ ±10%	1/4W	e0192	CV1	Condensat. variable accord.	62610
C.2	30nF ±10% - mica - 500V	44242	R.2	500KΩ ±10%	1/4W	46575	CV2	Condensat. variable oscill.	
C.3	450nF ±10% - mica - 500V	63796	R.3	20KΩ ±10%	1/4W	60392	BA	Bloc accord	63774
C.4	0,1µF ±10% - papier - 750V	43135	R.4	30KΩ ±10%	1/2W	45404	M.F.1	Transfo moy. fréquence 1	63562
C.5	50nF ±10% - mica - 500V	44419	R.5	30KΩ ±10%	1W	45565	M.F.2	Transfo moy. fréquence 2	63563
C.6	450nF ±10% - mica - 500V	63796	R.6	30KΩ ±10%	1/4W	46345	T.A.	Transfo d'alimentation 30V	63744
C.7	50.000nF ±10% - papier - 750V	41988	R.7	2MΩ ±10%	1/4W	46572	T.S.	Transfo de sortie	63746
C.8	500nF ±20% - papier - 1500V	61210	R.8	2MΩ ±10%	1/4W	46572	P.	Potentiomètre interne	61653
C.9	0,1µF ±10% - papier - 750V	43135	R.9	1MΩ ±10%	1/4W	46815	F.M.F.	Filtre moyenne fréquence	63485
C.10	10.000nF ±20% - papier - 1500V	43490	R.10	100KΩ ±10%	1/4W	46574	L.C.	Lampe cadran 6,3V 0,8A	41096
C.11	100nF ±10% - mica - 500V	80827	R.11	200KΩ ±10%	1/4W	46536	Fu	Fusible 1 amp (jonc)	62870
C.12	200nF ±10% - mica - 500V	61041	R.12	50KΩ ±10%	1/4W	45013	H.P.	Haut-Parleur	63407
C.13	25.000nF ±20% - papier - 1500V	46669	R.13	1MΩ ±10%	1/4W	46815			
C.14	3500nF ±10% - papier - 1500V	60605	R.14	100KΩ ±10%	1/4W	46574			
C.15	32µF ±5% Elect. - 450V	63440	R.15	200KΩ ±10%	1/4W	46536			
C.16	50µF ±5% Elect. 350/400V	63588	R.16	3KΩ ±10%	2W	63004			
C.17	10.000nF ±20% papier 3000V	45637	R.17	120Ω ±5%	1/2W	63633			

MARCONI PATHÉ 450