








BX 130

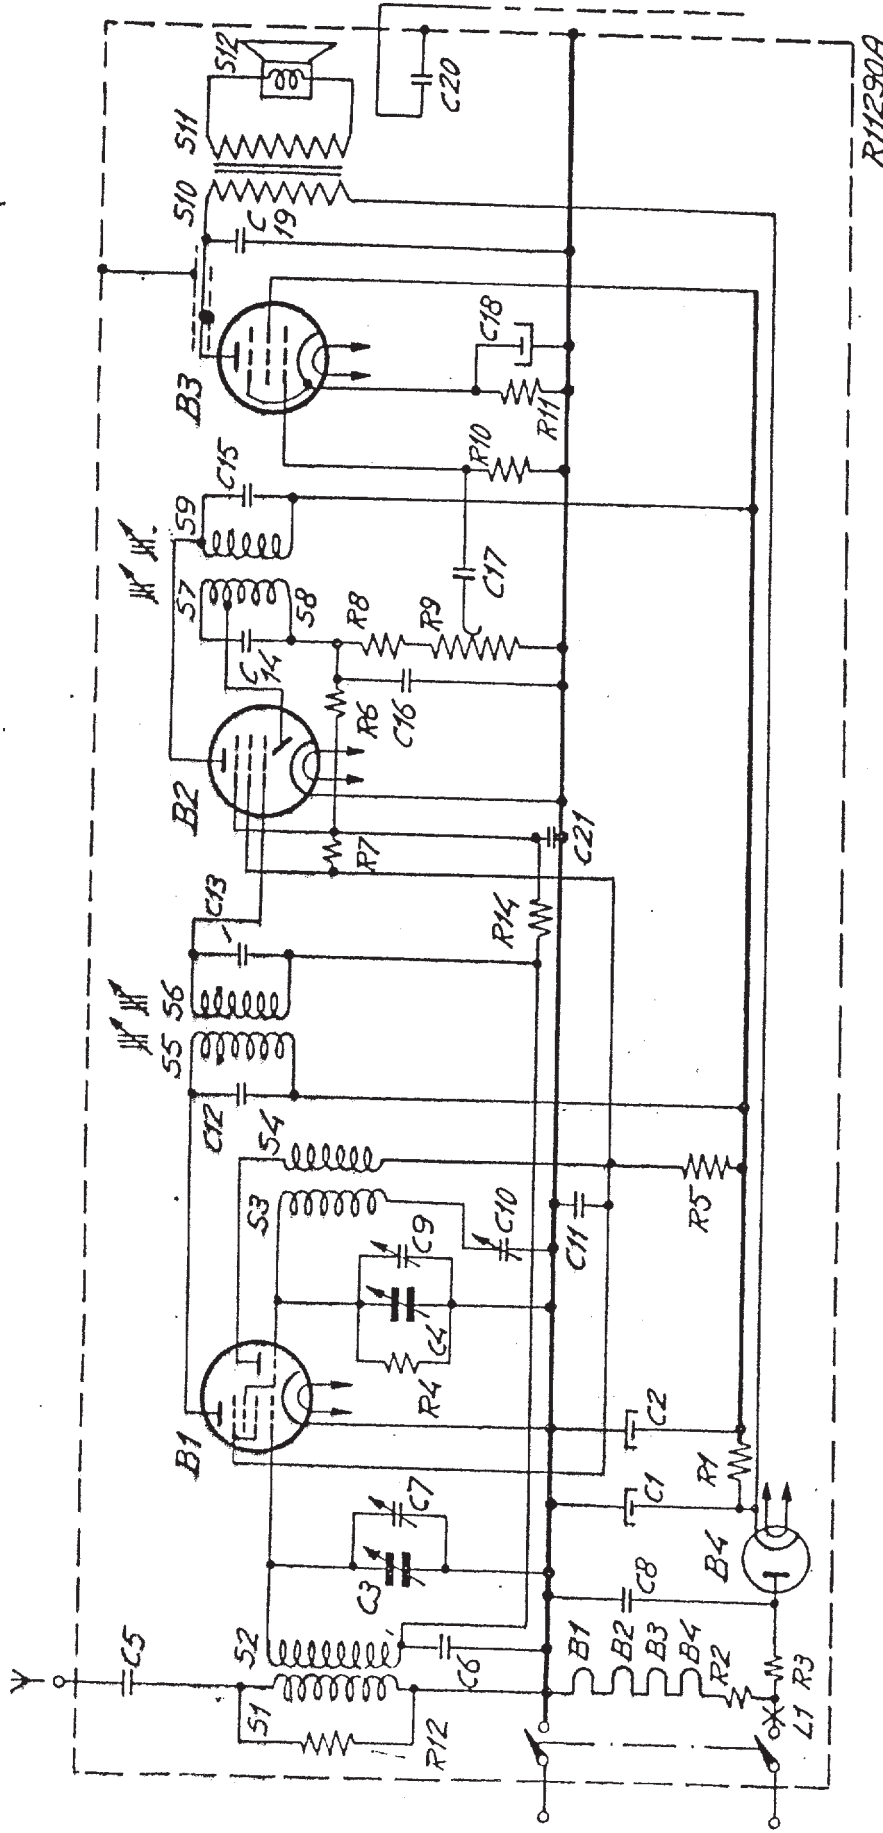

PHILIPS SERVICE

BX 180 U-00,-03,-04

185—580 m (1620—517 kc/s)

9730 X


Z = 5 Ω

220 V


38 W

452 kc/s


185—580 m	I	185—580 m	III
VOL max		VOL max	
C3, C4 max		C3, C4 max	
452 kc/s-33000 pF-g1B1		0	
S9/S9a max		1350 kc/s	
S7/S8 max		1350 kc/s—	Y
S5/S5a max		C9, C7 max.	
S6/S6a max		550 kc/s	
		550 kc/s—	Y
		C10 max	

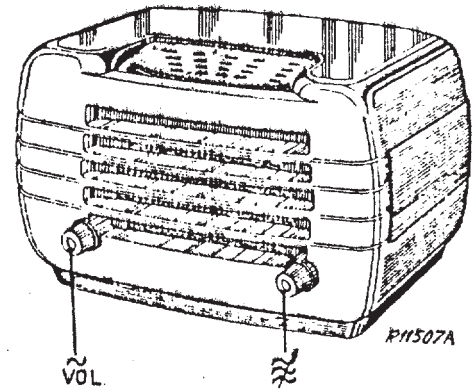

1948

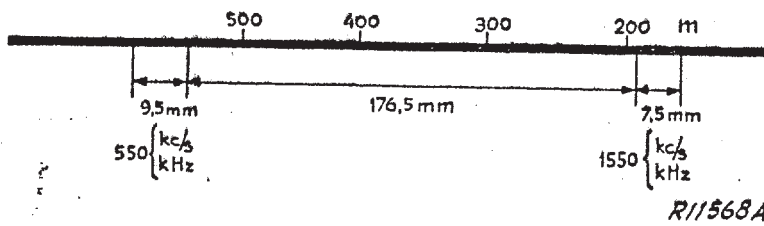

R11568A

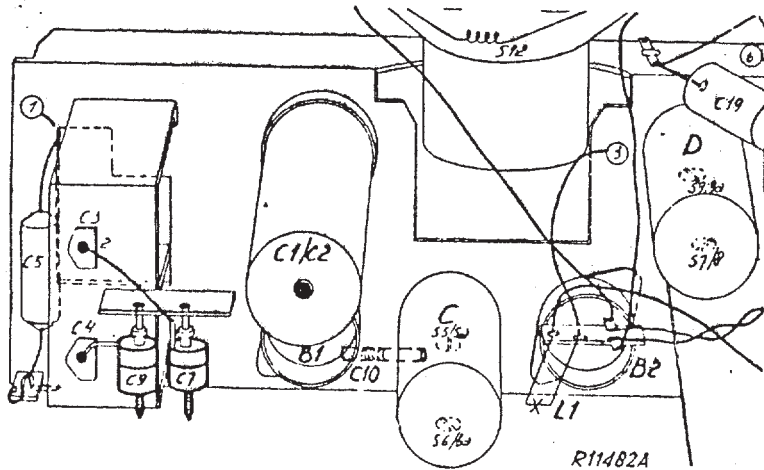

R11482A

R1	4700 Ω	48 468 10/4K7	C1	50 μ F	48 317 08/50+50
R2	1080 Ω	49 364 69.2	C2	50 μ F	
R3	180 Ω		C3	12-492 pF	49 001 13.2
R4	22000 Ω	48 555 10/22K	C4	12-492 pF	48 757 20/1K
R5	10000 Ω	48 427 10/10K	C5	1000 pF	48 750 10/47K
R6	1.5 M Ω	48 555 10/1M5	C6	47000 pF	48 752 10/33K
R7	10 M Ω	48 427 10/10M1	C7	30 pF	48 752 10/33K
R8	47000 Ω	48 555 10/47K	C8	33000 pF	48 752 10/33K
R9	0.5 M Ω	49 500 11.0	C9	30 pF	48 752 10/33K
R10	0.68 M Ω	48 555 10/680K	C10	400-575 pF	49 005 55.2
R11	330 Ω	48 426 10/330E	C11	0.1 μ F	48 751 10/100K
R12	18000 Ω	48 555 10/18K	C12	115 pF	
R14	4.7 M Ω	48 426 10/4M7	C13	115 pF	
			C14	115 pF	
			C15	115 pF	
			C16	82 pF	48 203 10/82E
			C17	10000 pF	48 750 10/10K
			C18	50 μ F	48 313 22/50
			C19	4700 pF	48 757 20/4K7
			C20	1000 pF	48 757 20/1K
			C21	470 pF	48 203 10/470E

	B1	B2	B3	
	UCH 41	UAF 42	UL 41	
Va	H 94 T 67	94	150	V
Vg2(4)	67	67	94	V
Ia	H 2,35 T 2,5	4,3	27,5	mA
Ig2(4)	2,7	1,3	3,3	mA

VC1 = 186 V, VC2 = 94 V

S1, S2	A3 111 17.1
S3, S4	A3 111 18.1
S5, S6, C12, C13	A3 121 94.2
S7, S8, S9, C14, C15	A3 121 94.2
S10, S11	A3 151 57.1
L1	8034D-00