



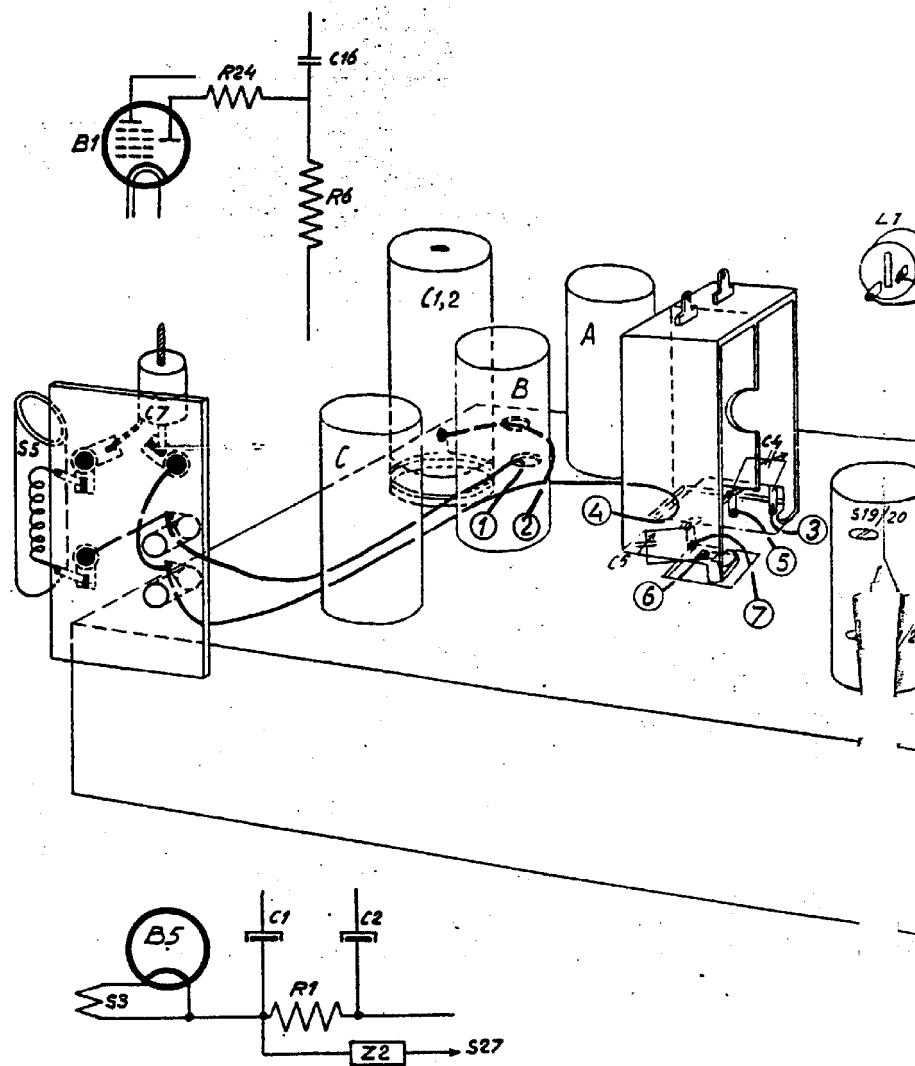


ad verb lyst:


ad principeschema:

[illegible]


S:					E	27.29.30.
C:	39	38.47.36.35.37	40.41.42.31.		34.	
R:		17.16.23.15.3.18.2.12.11.	14.13	21.22.	19.20.	6.7.10.

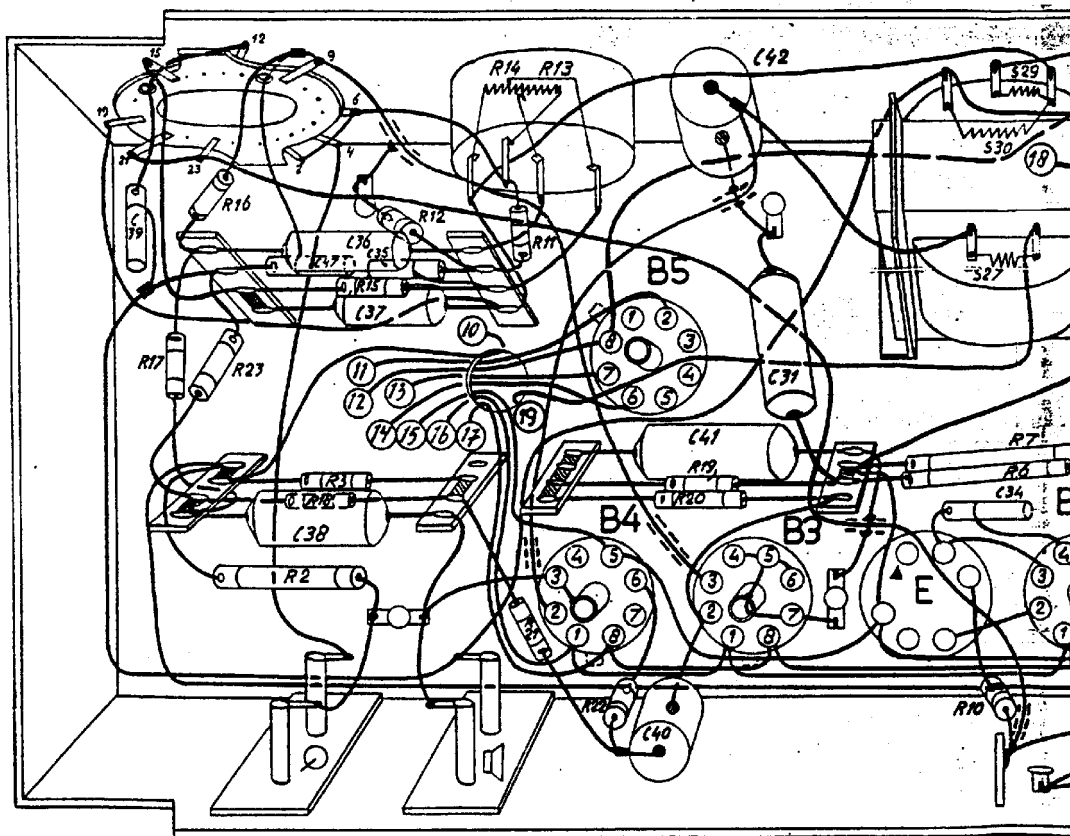


B5




B4



B3



B2





B1



S24

9.30.	D	A.B.C.
32.	33. 14. 16. 8. 9.	15. 18. 25. 11. 12. 13. 26. 20. 22. 21. 17. 24. 10. 19. 23. 1. 2. 3. 43.
1.	0. 5. 24. 4.	9.

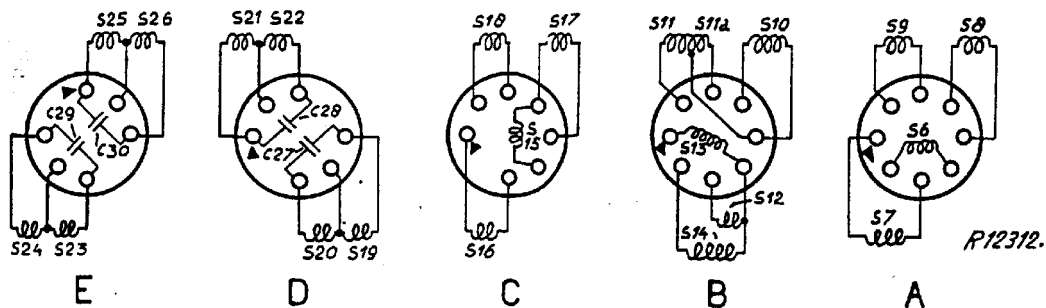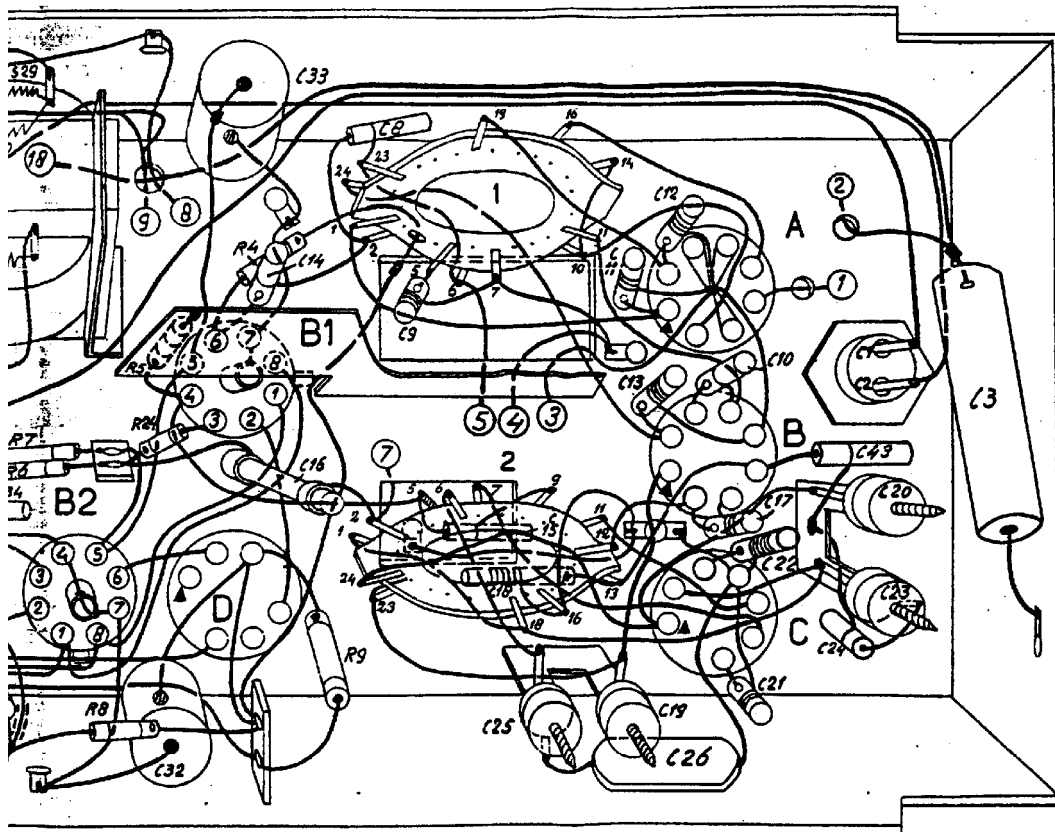




102
106
210
214
292
429

Voor BX390A/19 afroeren:
 428g 8B5-2 l.s. trafo.
 1160g 161-2 l.s. trafo
 4624g 8B5-1 unit 4.
 4640g 1 unit 4-12 nettrafo.

d.d. verb. lijst: 30.01.21

d.d. principeschema: 1-2

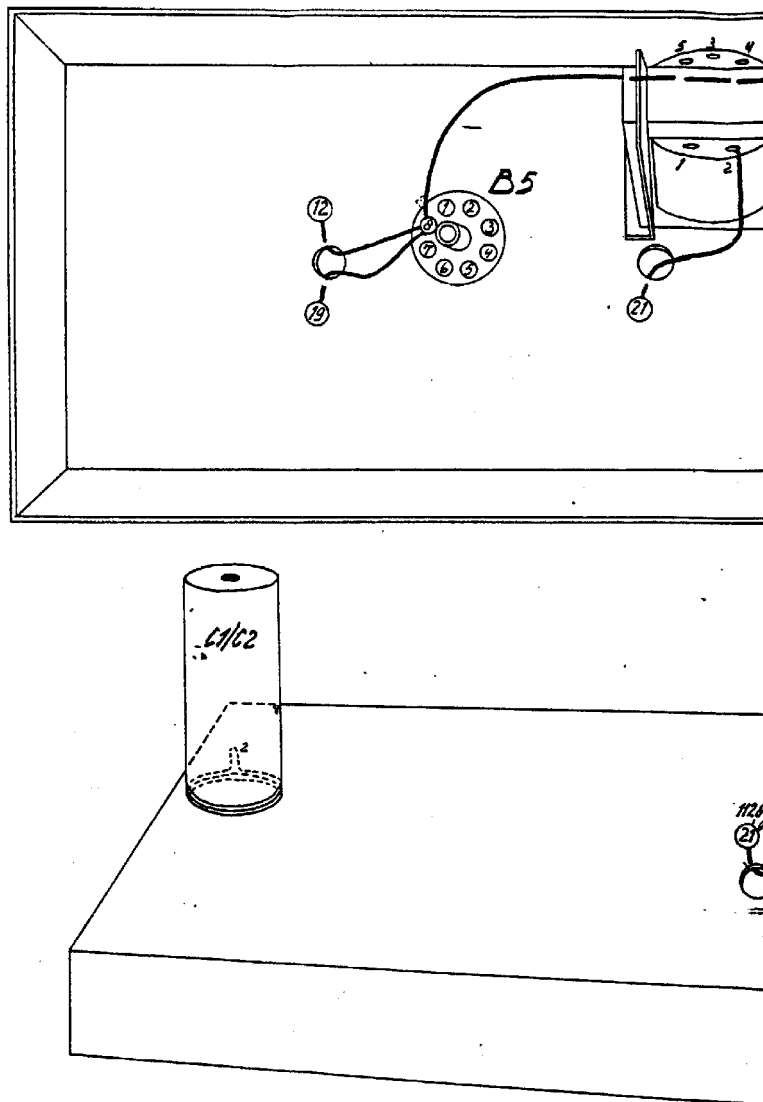

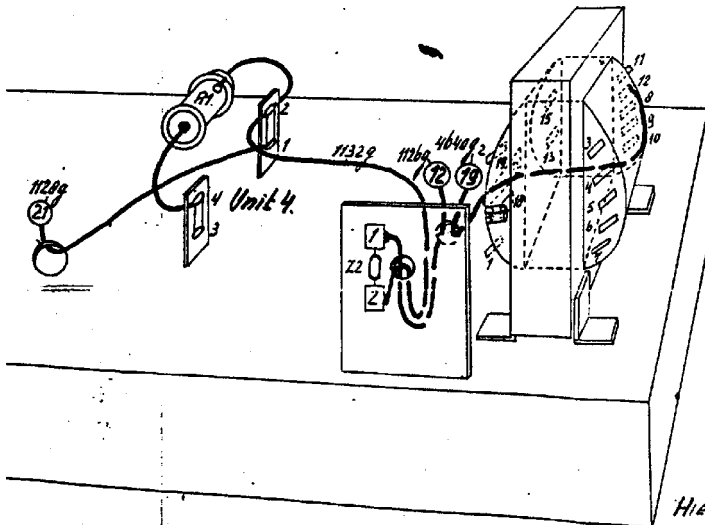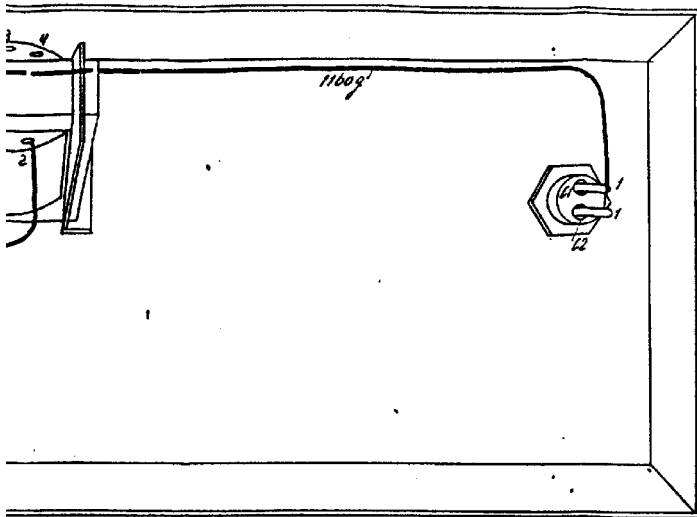

Hierbij gebruiken BX390A bl. 22 en 23.

AANTAL ANZ. QUANT.	A/RENN S/RENN O/UNIT	OMSCHRIJVING + AFMETING + MATERIAAL UMS-DES ABM.-DIM MAT.	NORMAANDUIDING OF DOOR AFMETING NR TEEK (CODE) TECH. DESIG.-DRAW	OPMERKING REMARKS CODE NR	MODEL NR PATTERN	POS NR
SAMENST. NR-NO D'ASSEMBL SAMMEL. NR-COMP. NR		AANT. QUANT ANZ. QUANT.				
BEHAND.-TRAIT. TREATMENT		COMM. NR			MODEL NR	
MAT.		AANT.	DAT.		VERP.	
	SCHAAL MASSE ECHELLE SCALE	Ontranger 49/50		BX390A/19		
	LENN.-EINH. UNITE-UNIT	Montageschema.		22V		
BEWERKING BEARBEITUNG USINAGE OPERATION	VERVOER-REPL. VERS.O-SUPERS	OVERGEM-PAIS O. OBERN-PAIS O.		27.7.49		
				v. Heijst.		
				ERS SUPERS		

N.V. PHILIPS' GLOEI LAMPENFABRIEKEN TE EINDHOVEN - HOLLAND. 17-20-51