

BX 426U

S1)	5	Ω	A1 000 34.0	C15	30	pF	28 212 36.4
S2)	6	Ω		C16	30	pF	28 212 36.4
S5)	1,5	Ω	A3 125 25.0	C17	50	pF	49 005 50.2
S6)	<1	Ω		C18	18	pF	48 201 10/18E
S7)	4,5	Ω	A3 125 35.0	C19	430	pF	48 203 01/430E
S8)	2,8	Ω		C20	1800	pF	48 751 20/1K8
S10)	2,8	Ω		C21	115	pF	bobinages-
S11)	<1	Ω	A3 125 50.0	C22	115	pF	coils-bobinas
S12)	<1	Ω		C23	47000	pF	48 750 10/47K
S13)	10	Ω	A3 125 73.0	C24	0,1	μF	48 751 10/100K
S14)	12	Ω		C25	115	pF	bobinages-
S15)	2,8	Ω		C26	115	pF	coils-bobinas
S16)	4,6	Ω		C27	82	pF	48 203 10/82E
S17)	2,8	Ω	A3 121 94.2	C28	5600	pF	48 751 10/5K6
S18)	4,6	Ω		C29	68000	pF	48 750 20/68K
C21)	115	pF		C32	10000	pF	48 751 10/10K
C22)	115	pF		C33	10000	pF	48 757 20/10K
S19)	2,8	Ω		C34	0,1	μF	48 751 10/100K
S20)	4,6	Ω		C35	330	pF	48 336 01/330E
S21)	2,8	Ω	A3 121 94.2	C36	150	pF	48 336 01/150E
S22)	4,6	Ω		C37	583	pF	48 336 01/583E
C25)	115	pF		C38	47000	pF	48 752 10/47K
C26)	115	pF		C39	220	pF	48 203 20/220E
S23)				C40	225	pF	48 203 01/225E
S24)			A3 169 47.0	C41	150	pF	48 203 01/150E
S27)				C42	600	pF	48 203 01/600E
S32)				C45	39	pF	48 203 10/39E
S33)				C46	25	pF	49 005 49.2
				C47	2700	pF	48 751 10/2K7
				C48	68	pF	48 203 10/68E
				C50	100	pF	48 203 10/100E
				C51	10000	pF	48 750 10/10K
				C52	0,22	μF	48 751 10/220K
				C60	1000	pF	48 757 20/1K
				C61	4700	pF	48 757 20/4K7
				C62	30	pF	28 212 36.4
				C63	30	pF	28 212 36.4
				C64	4700	pF	48 757 20/4K7
S26	7	Ω	A3 125 86.0	C65	22000	pF	48 750 10/22K
S28)	6	Ω	A3 125 30.0	C66	100	μF	48 313 22/100
S29)	<1	Ω		C67	1200	pF	48 751 20/1K2
S30a)	<1	Ω		C68	0,8	pF	48 203 20/E8
S30)	<1	Ω	A3 125 62.0				
S31)	<1	Ω		R1	1000	Ω	49 379 81.0
				R4	0,82	MΩ	A9 999 00/820K
				R5	22000	Ω	A9 999 00/22K
				R6	10000	Ω	A9 999 00/10K
C1	50	μF	48 317 08/50+50	R7	1,5	MΩ	A9 999 00/1M5
C2	50	μF		R8	22000	Ω	A9 999 00/22K
C5	11-500	pF	49 001 56.1	R9	47000	Ω	A9 999 00/47K
C6	11-500	pF		R10	1	MΩ	A9 999 00/1M
C7	18	pF	48 201 10/18E	R11	6800	Ω	A9 999 00/6K8
C9	30	pF	28 212 36.4	R12	0,45	MΩ	49 500 34.0
C11	220	pF	48 203 20/220E	R13	0,05	MΩ	
C12	470	pF	48 203 10/470E	R14	680	Ω	A9 999 00/680E
C13	56	pF	48 203 10/56E	R15	0,15	MΩ	A9 999 00/150K
C14	280	pF	48 203 01/280E				

BK 426U

R16	1000	Ω	B1 639 06.0	R28	220	Ω	49 379 62.0
R18	1,2	MΩ	A9 999 00/1M2	R29	180	Ω	48 494 10/180E
R19	0,68	MΩ	A9 999 00/680K	R30			49 379 67.2
R20	1000	Ω	A9 999 00/1K	R31	0,27	MΩ	A9 999 00/270K
R21	150	Ω	A9 999 00/150E	R32	0,15	MΩ	A9 999 00/150K
R24	260	Ω	49 364 61.0	R33	22000	Ω	A9 999 00/22K
R25	75	Ω		R45	0,1	MΩ	A9 999 00/100K
R26	180	Ω	48 494 10/180E	R46	33000	Ω	A9 999 00/33K
R27	180	Ω	48 494 10/180E				
Z1	315	mA	08 141 34.3				

BX426U

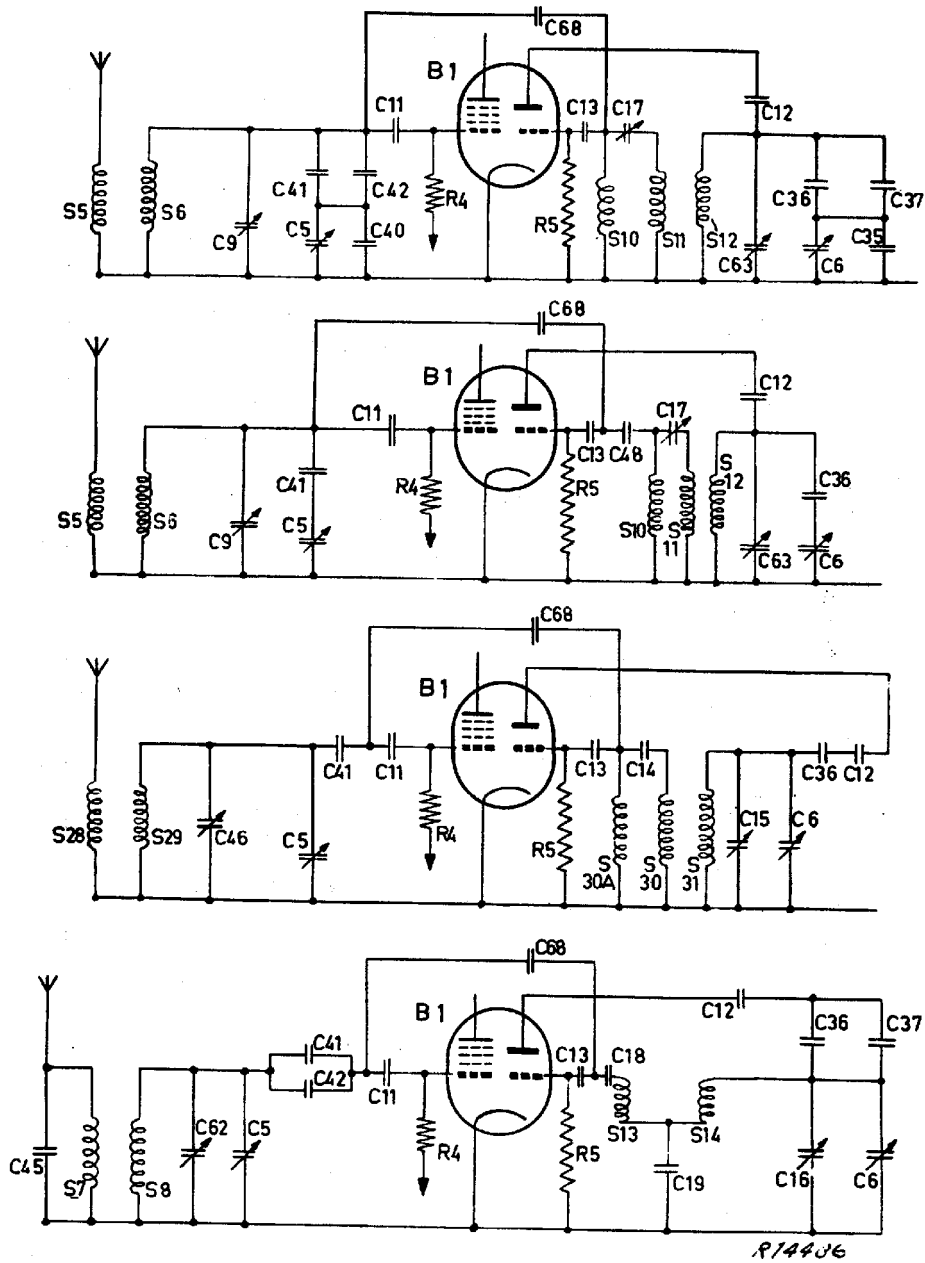


Fig.1

BX426U

II

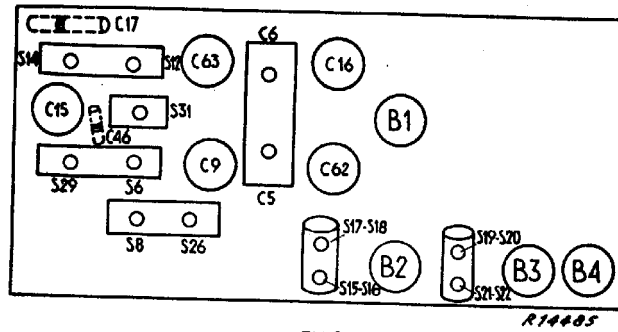


Fig.2

R14485

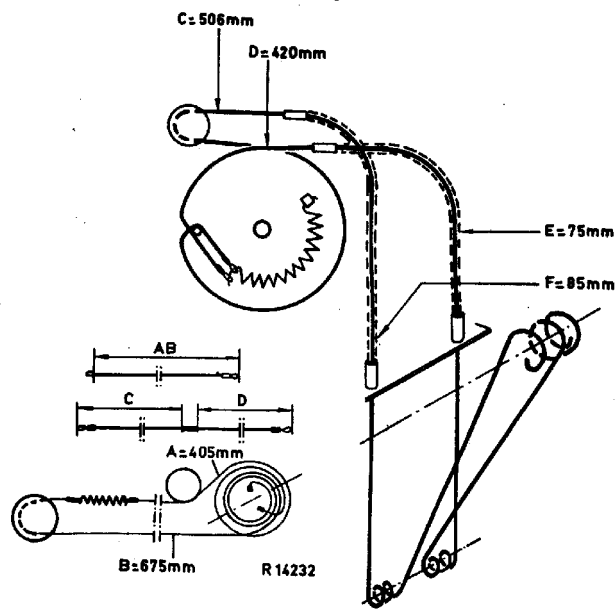


Fig.3




Fig.4

BX426U

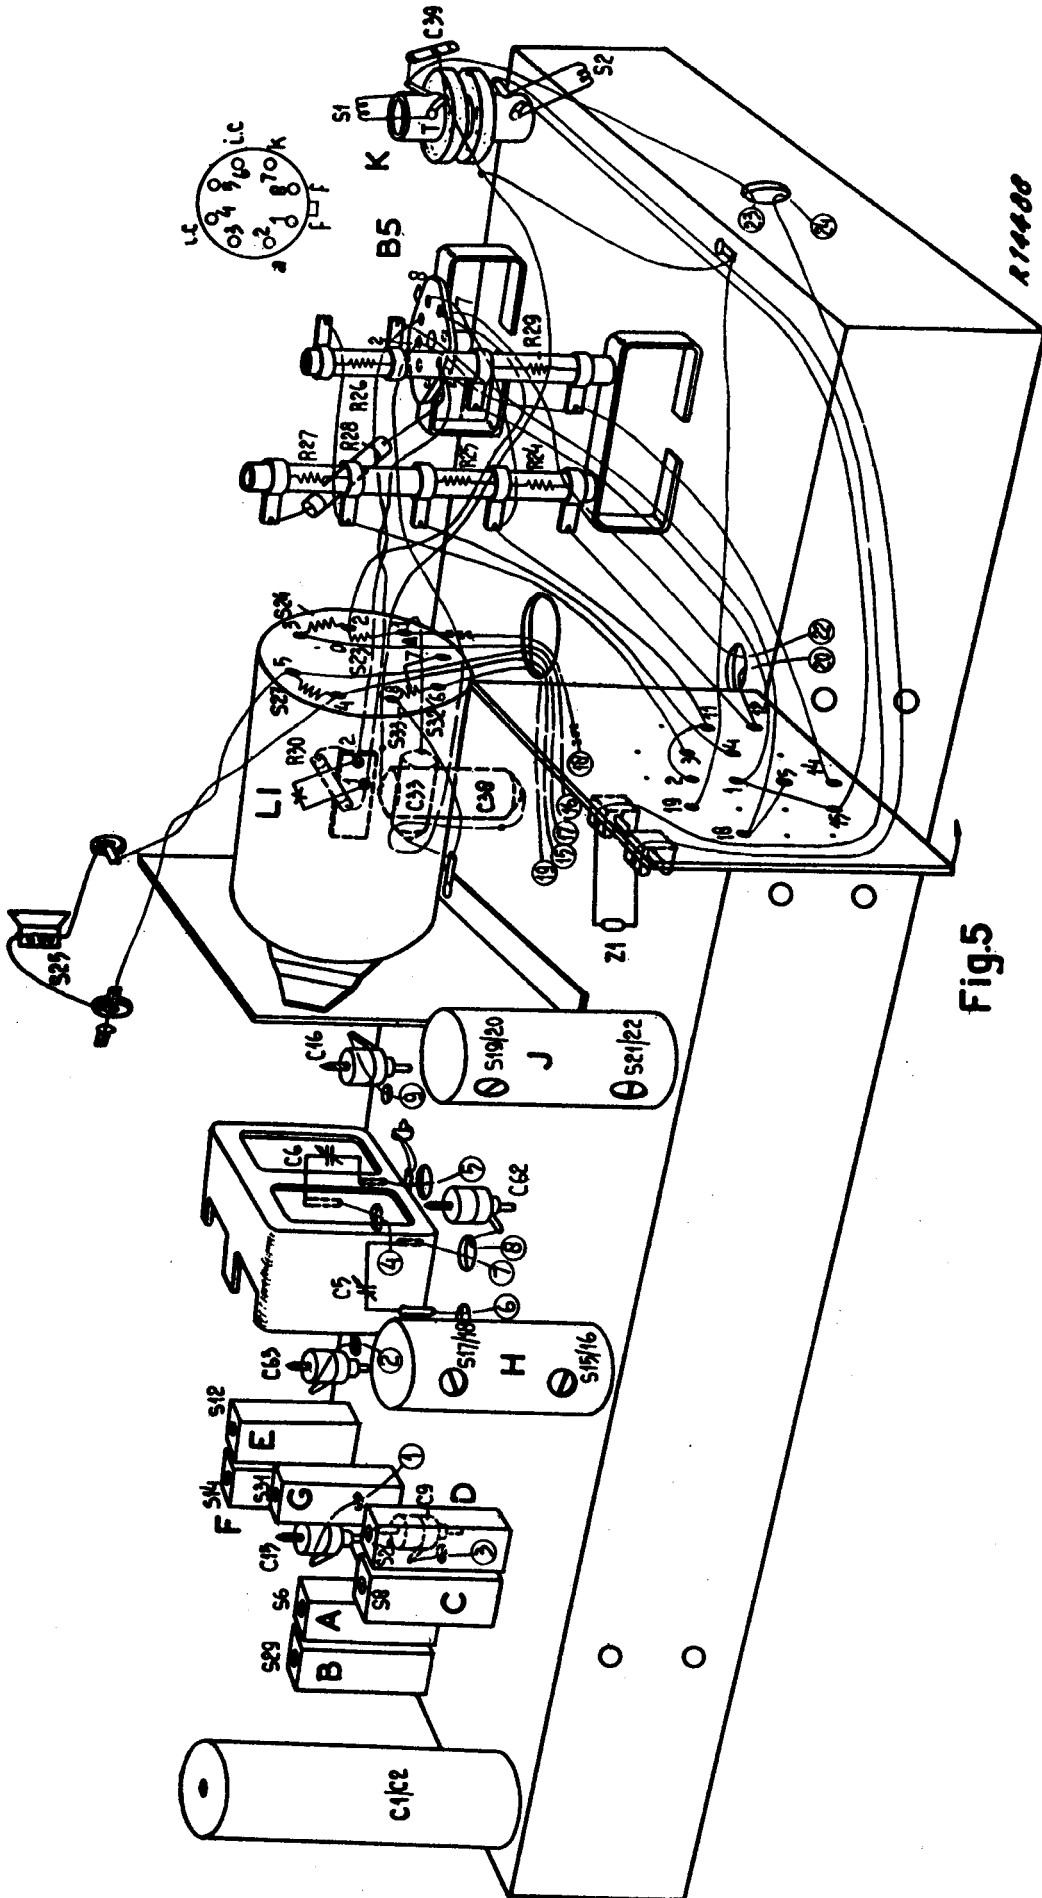


Fig. 5

