

N.V. PHILIPS EINDHOVEN HOLLAND	MEETTABEL TABLEAU DE MESURAGE MESSTABELLE MEASURING TABLE	BX480A	NR.: DAT:
SERVICE			

R													
9	16	23	26	16/26	23/26	32	33	35	36	43	P/U		
	40	100	50	150	95	315	280	175	65	173	275		
10	13	14	15	17	14/19	17/19	25	33					
	230	155	220	165	155	155	80	150					
11	42	52	53	55	58	C4	Y	1	1	2			
	445	420	420	280	280	90	23	100					
12	12	19	22	24	27	34	37	45	46	47	C4		
	200	5	210	5	5	5	5	5	5	5	2		
12	3	4	5	6	4/5								
	10	10	10	10	30								

C													
9	44	52											
	475	475											
10													
11	25	35											
	115	115											
12	32	32/43											
	330	260											

1 = 714 - 2000 m. G = Gramophone
 2 = 185 - 580 m. Ra = Radio
 3 = 32 - 50 m.
 4 = 21,6 - 32 m.
 5 = 17 - 26 m.
 6 = 13,5 - 20 m.

GM 4256

R11749

BK 480A

7

CONDENSERS-CONDENSATOREN-CONDENSATEURS-KONDENSATOREN

Nr.	Value Waarde Valeur Wert	Codenummer Codenummer No. de code Kodenummer	Nr.	Value Waarde Valeur Wert	Codenummer Codenummer No. de code Kodenummer
C1	50 uF)	48 317 09/50-50	C25	4,7 pF	48 406 99/4E7
C2	50 uF)		C27	30 pF	28 212 36.4
C3	100 uF)	28 185 66.1	C29	115 pF)	See coils
C4	12-492 pF)	49 001 23.1	C30	115 pF)	Zie spoelen
C5	12-492 pF)				Voir Bobines
C7	30 pF	28 212 36.4			Siehe Spulen
C8	12 pF	48 406 99/12E	C31	18 pF	48 406 10/18E
C9	30 pF	28 212 36.4	C32	3300 pF	48 751 10/3K3
C10	30 pF	28 212 36.4	C33	15000 pF	48 750 10/15K
C11	30 pF	28 212 36.4	C34	3.9 pF	48 406 99/3E9
C12	220 pF	48 406 20/22CE	C35	4700 pF	48 751 10/4K7
C13	47000 pF	48 750 20/47K	C36	56000 pF	48 750 10/56K
C14	47000 pF	48 751 20/47K	C37	330 pF	48 406 10/330E
C15	115 pF	48 406 01/115E	C38	47 pF	48 406 10/47E
C16	470 pF	48 410 20/47CE	C39	0,1 uF	48 751 20/100K
C17	56 pF	48 410 10/56E	C40	10000 pF	48 751 20/10K
C18	115 pF	48 429 99/115E	C41	2200 pF	48 757 20/2K2
C19	30 pF	28 212 36.4	C42	22000 pF	48 756 20/22K
C20	350-575 pF	49 005 46.1	C48	47000 pF	48 751 20/47K
C21	200 pF	28 212 66.2	C49	22 pF	48 406 20/22E
C22	30 pF	28 212 36.4	C50	47000 pF	48 751 20/47K
C23	115 pF)	See coils	C44	10 pF	48 406 99/10E
C24	115 pF)	Zie spoelen			
		Voir Bobines			
		Siehe Spulen			

BX 480A
COILS-SPOEIEN-BOBINES-SPULEN

Nr.	Value Waarde Valeur Wert	Codenummer Codenummer No.de code Kodenummer	Nr.	Value Waarde Valeur Wert	Codenummer Codenummer No.de code Kodenummer
S1	Ohm)		S26	< 1 Ohm)	
S2	Ohm)		S26	< 1 Ohm)	A3 110 34.0
S3	< 1 Ohm)	A3 141 44.0	S27	2,5 Ohm)	
S4	< 1 Ohm)		S28	6,7 Ohm)	
Z1	)		S29	4,8 Ohm)	A3 122 21.0
S5	< 1 Ohm)		S30	19 Ohm)	
S6	< 1 Ohm)	A3 110 77.0	S17	35 Ohm)	A3 110 60.0
S7	< 1 Ohm)		S31	3 Ohm)	
S8	< 1 Ohm)	A3 110 78.0	S32	5 Ohm)	
S9	< 1 Ohm)		S33	4 Ohm)	A3 121 94.1
S10	< 1 Ohm)	A3 110 79.0	S34	5 Ohm)	
S11	< 1 Ohm)		C23	115 pF)	
S12	< 1 Ohm)	A3 110 80.0	C24	115 pF)	
S13	100 Ohm)		S41	4 Ohm)	
S14	5 Ohm)		S42	5 Ohm)	
S15	170 Ohm)	A3 122 20.0	S43	3 Ohm)	A3 121 94.1
S16	44 Ohm)		S44	5 Ohm)	
S16a	6,5 Ohm)		C29	115 pF)	
S19	< 1 Ohm)		C30	115 pF)	
S20	< 1 Ohm)	A3 110 81.0	S45	700 Ohm)	
S21	< 1 Ohm)		S46	15 Ohm)	
S22	< 1 Ohm)	A3 110 82.0	S47		
S23	< 1 Ohm)		S48	< 1 Ohm)	A3 151 47.0
S24	< 1 Ohm)	A3 110 83.0	S49	< 1 Ohm)	
			S50	< 1 Ohm)	
			S55	< 1 Ohm)	
			S51	4 Ohm)	28 220 51.1

RESISTANCES-WEERSTANDEN-RESISTANCES-WIDERSTÄNDE

Nr.	Value Waarde Valeur Wert	Codenummer Codenummer No.de code Kodenummer	Nr.	Value Waarde Valeur Wert	Codenummer Codenummer No.de code Kodenummer
R1	1200 Ohm	48 468 10/1K2	R17	0,2 MOhm)	
R2	0,82 MOhm	48 42510/820K	R18	2 MOhm)	
R3	47000 Ohm	48 425 10/47K	R19	0,02 MOhm)	49 475 14.0
R4	22000 Ohm	48 427 10/22K	R20	0,39 MOhm)	48 42510/390K
R5	82 Ohm	48 426 05/82E	R21	1,5 MOhm)	48 426 10/1M5
R6	33 Ohm	48 425 10/33E	R22	0,1 MOhm)	48 42510/100K
R7	47000/2 Ohm	48 427 10/47K	R23	1,5 MOhm)	48 426 10/1M5
R8	0,1 MOhm	48 42710/100K	R24	0,1 MOhm)	48 425 10/100K
R9	0,47 MOhm	48 42510/470K	R25	0,56 MOhm)	48 42510/560K
R10	18000 Ohm	48 42510/18K	R26	1000 Ohm	48 425 10/1K
R11	47000 Ohm	48 42510/47K	R28	0,68 MOhm)	48 42510/680K
R13	22000 Ohm	48 425 10/22K	R29	0,15 MOhm)	48 42510/150K
R14	0,65 MOhm)				
R15	2 MOhm)	49 500 33.0			
R16	0.22 MOhm)	48 425 10/220K			

BX480A

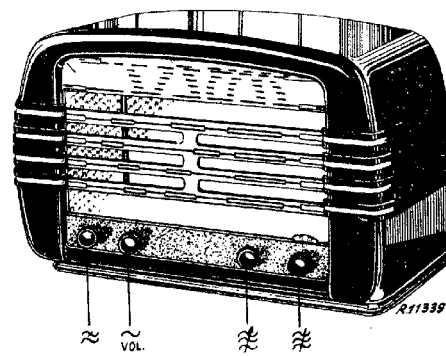


Fig. 6

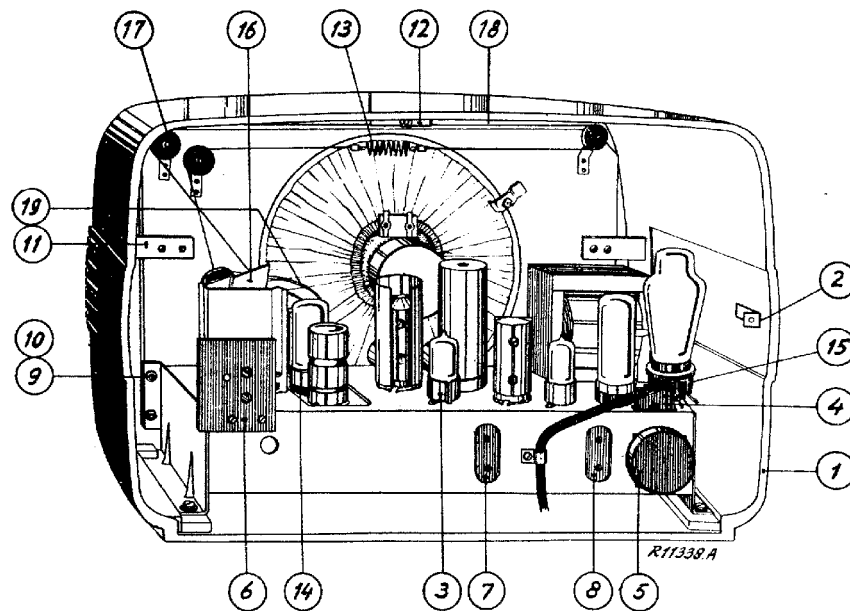


Fig. 7

BX480A