

SPOELEN

S11	1,5	Ohm)		S51	11,5	Ohm)	
S12	0,5	Ohm)		S52	7	Ohm)	DK 800 95.0
S13	3	Ohm)	DK 800 90.0	S53	1	Ohm)	
S14	0,5	Ohm)		C51			
				C52			
S17	42	Ohm)		S61	3	Ohm)	
S18	6	Ohm)		S62	4	Ohm)	
S19	160	Ohm)	DK 800 91.0	S63	3	Ohm)	DK 800 81.0
S20	48	Ohm)		S64	4	Ohm)	
				C61			
S31	0,5	Ohm)		C62			
S32	0,4	Ohm)					
S33	1	Ohm)	DK 800 92.0	S71	750	Ohm)	DK 820 06.0
S34	0,1	Ohm)		S74	2,9	Ohm)	
S100	1	Ohm)		S75	2,9	Ohm)	DK 800 89.0
S37	3	Ohm)		S81	190	Ohm)	
S38	6,5	Ohm)	DK 800 93.0	S82	190	Ohm)	
S39	5	Ohm)		S83	6,5	Ohm)	DK 830 52.0
S40	18	Ohm)		S84	1	Ohm)	
				S85	6,5	Ohm)	
				S91	12	Ohm)	DK 800 07.0
				S101	255	Ohm)	DK 801 86.0



WEERSTANDEN

R1	180	Ohm	48 494 05/180E	R57	0,47 MOhm	48 425 10/470K
R2	180	Ohm	48 494 05/180E	R58	6800	Ohm 48 425 10/6K8
R3	1800	Ohm	48 426 10/1KB	R60	1	MOhm 48 426 10/1M
R4	100	Ohm	48 495 05/100E	R61	1	MOhm 48 426 10/1M
R11	0,65	MOhm)	49 501 07.0	R64	1	MOhm 48 425 10/1M
R12	0,2	MOhm)		R65	0,82	MOhm 48 426 10/820K
R13	0,65	MOhm)	49 473 00.0	R66	1,2	MOhm 48 426 10/1M2
R14	0,2	MOhm)		R67	0,1	MOhm 48 552 10/100K
R31	0,1	MOhm	48 425 10/100K	R68	0,1	MOhm 48 552 10/100K
R32	1,8	MOhm	48 427 10/1M8	R69	0,68	MOhm 48 425 10/680K
R33	18000	Ohm	48 426 10/18K	R70	0,68	MOhm 48 425 10/680K
R35	1	MOhm	48 425 10/1M	R72	150	Ohm 48 425 10/150E
R36	10	MOhm	48 427 10/10M	R73	220	Ohm 48 425 10/220E
R37	1,8	MOhm	48 425 10/1M8	R74	680	Ohm 48 425 10/680E
R38	0,22	MOhm	48 425 10/220K	R81	47000	Ohm 48 425 10/47K
R39	1	MOhm	48 425 10/1M	R83	1000	Ohm 48 425 10/1K
R40	1	MOhm	48 425 10/1M	R84	1000	Ohm 48 425 10/1K
R41	0,56	MOhm	48 425 10/560K	R85	4700	Ohm 48 425 10/4K7
R42	56000	Ohm	48 425 10/56K	R86	4700	Ohm 48 425 10/4K7
R43	0,1	MOhm	48 425 10/100K	R87	2,7	MOhm 48 426 10/2M7
R46	550	Ohm)		R88	22	Ohm 48 469 10/22E
R47	150	Ohm)	DK 650 42.0	R89	0,15	MOhm 48 425 10/150K
R48	100	Ohm)		R122	15000	Ohm 48 427 10/15K
R49	0,27	MOhm	48 425 10/270K	R123	22000	Ohm 48 426 10/22K
R50	0,56	MOhm	48 425 10/560K	R124	0,18	MOhm 48 425 10/180K
R51	5600	Ohm	48 425 10/5K6	R126	2,2	MOhm 48 425 10/2M2
R52	1000	Ohm	48 425 10/1K	R127	0,47	MOhm 48 425 10/470K
R53	1000	Ohm	48 425 10/1K	R128	0,1	MOhm 48 425 10/100K
R54	150	Ohm	48 425 10/150E	R132	39	Ohm 48 425 10/39E
R55	56000	Ohm	48 425 10/56K	R133	0,1	MOhm 48 425 10/100K
R56	15000	Ohm	48 425 10/15K	Z1	0,5	A 08 140 43.1

CONDENSATOREN

C1	50	uF	48 312 09/50	C113	120	pF	48 429 01/120E
C2	25	uF)	48 317 09/25+25	C114	20	pF	49 005 05.2
C3	25	uF)		C115	110	pF	48 429 02/110E
C6	11-490	pF)	49 001 13.2	C116	20	pF	49 005 05.2
C8	11-490	pF)		C117	20	pF	49 005 05.2
C12	20	pF	49 005 05.2	C118	195	pF	48 429 02/195E
C14	20	pF	49 005 05.2	C119	20	pF	49 005 05.2
C17	47	pF	48 601 10/47E	C120	20	pF	49 005 05.2
C18	20	pF	49 005 05.2	C121	20	pF	49 005 05.2
C19	47	pF	48 601 10/47E	C122	47000	pF	48 751 20/47K
C20	22	pF	48 601 99/22E	C123	47000	pF	48 751 20/47K
C38	20	pF	49 005 05.2	C124	0,47	uF	48 751 20/470K
C40	33	pF	48 406 05/33E	C125	47	pF	48 601 10/47E
C47	390	pF	48 406 10/390E	C126	10000	pF	48 757 20/10K
C48	275-200	pF	49 005 53.0	C127	4700	pF	48 757 20/4K7
C20	200-275	pF	49 005 53.0	C128	47000	pF	48 757 20/47K
C51	100	pF	Zie. Spoelen	C129	22000	pF	48 750 20/22K
C52	100	pF	"	C130	2200	pF	48 751 20/2K2
C61	100	pF	"	C131	56000	pF	48 750 10/56K
C62	100	pF	"	C132	22000	pF	48 750 20/22K
C72	47000	pF	48 750 20/47K	C133	1000	pF	48 751 20/1K
C73	47000	pF	48 750 20/47K	C134	0,18	uF	48 750 10/180K
C74	50	uF	48 313 02/50	C135	10000	pF	48 750 20/10K
C81	22	pF	48 406 10/22E	C136	0,1	uF	48 750 10/100K
C82	82	pF	48 601 10/82E	C137	1000	pF	48 751 20/1K
C83	10000	pF	48 751 20/10K	C138	10000	pF	48 750 10/10K
C84	10000	pF	48 751 20/10K	C139	8	pF	DK 890 46.0
C85	2200	pF	48 757 20/2K2	C140	390	pF	48 406 10/390E
C86	2200	pF	48 757 20/2K2	C141	10000	pF	48 751 20/10K
C91	50	pF	48 601 99/50E	C142	4700	pF	48 757 20/4K7
C100	1000	pF	48 757 20/1K	C143	4700	pF	48 757 20/4K7
C101	4700	pF	48 757 20/4K7	C144	22000	pF	48 750 20/22K
C102	22000	pF	48 758 20/22K	C145	47000	pF	48 750 20/47K
C103	50	pF	48 601 99/50E	C146	50	pF	48 601 99/50E
C104	470	pF	48 601 20/470E	C147	4700	pF	48 757 20/4K7
C105	100	pF	48 406 10/100E	C148	560	pF	48 406 10/560E
C106	100	pF	48 406 10/100E	C149	2200	pF	48 751 10/2K2
C107	39	pF	48 406 10/39E	C150	10000	pF	48 750 20/10K
C108	7½-100	pF	49 005 51.2	C151	4700	pF	48 751 10/4K7
C109	20-275	pF	49 005 53.2	C152	1000	pF	48 751 20/1K
C110	20-275	pF	49 005 53.2	C156	0,1	uF	48 751 20/100K
C111	20-275	pF	49 005 53.2	C164	10000	pF	48 751 10/10K
C112	350	pF	48 429 02/350E	C174	47	pF	48 601 10/47E

BX694

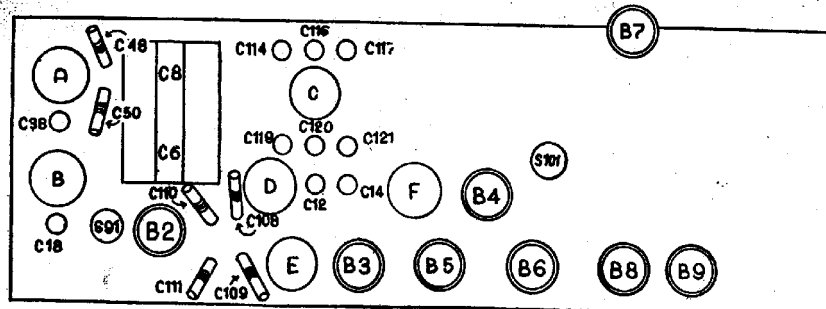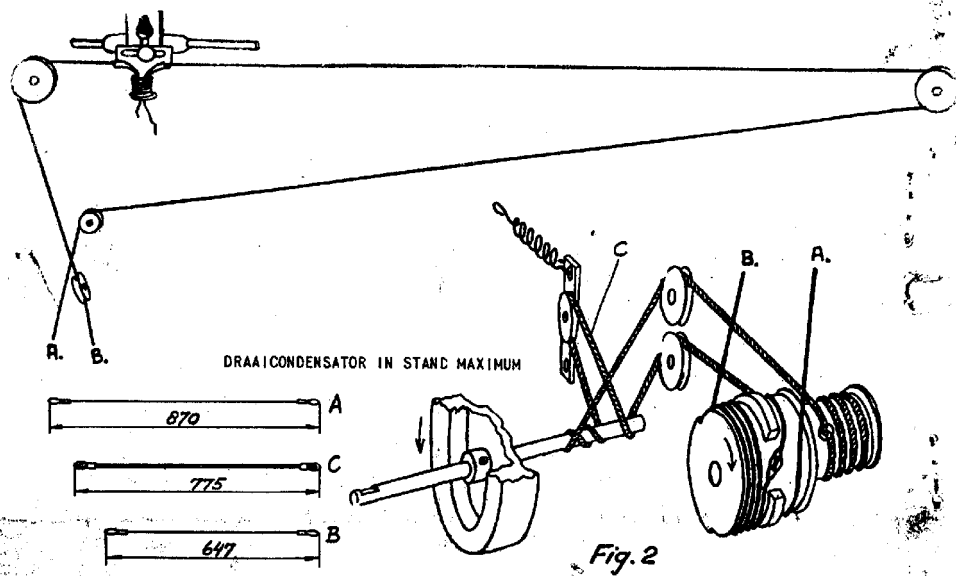

R12431

BX694U

