

C66	6800 pF	48 206 50/6K8	C81	47000 pF	48 751 10/47K
C67	110 pF	zie, voir S49, S50	C82	0,33 μ F	48 751 10/330K
C68	110 pF	zie, voir S49, S50	C83	120 pF	48 203 10/120E
C69	82 pF	48 203 10/82E	C84	15000 pF	48 751 10/15K
C70	68 pF	48 203 10/68E	C85	33000 pF	48 750 10/33K
C71	39 pF	zie, voir S51, S52	C86	15000 pF	48 751 10/15K
C72	0,1 μ F	48 750 10/100K	C87	390 pF	48 203 10/390E
C73	330 pF	48 203 10/330E	C88	22000 pF	48 750 10/22K
C74	330 pF	48 203 10/330E	C89	10000 pF	48 750 10/10K
C75	33000 pF	48 750 10/33K	C90	0,27 μ F	48 750 10/270K
C76	5 μ F	49 027 37.0	C91	9-130 pF	WN 400 18.0
C77	1500 pF	48 206 50/1K5	C92	470 pF	48 203 10/470E
C78	150 pF	48 203 10/150E	C93	390 pF	48 203 10/390E
C79	27000 pF	48 750 10/27K	C102	1500 pF	48 336 02/1K5
C80	10000 pF	48 750 10/10K	C104	1500 pF	48 336 02/1K5
			C105	100 pF	48 203 10/100E
					JSt/TV









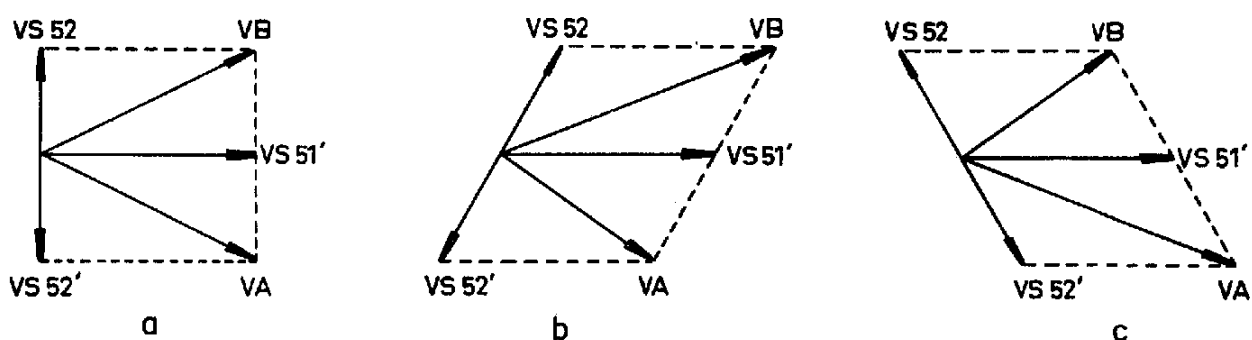


Fig.2

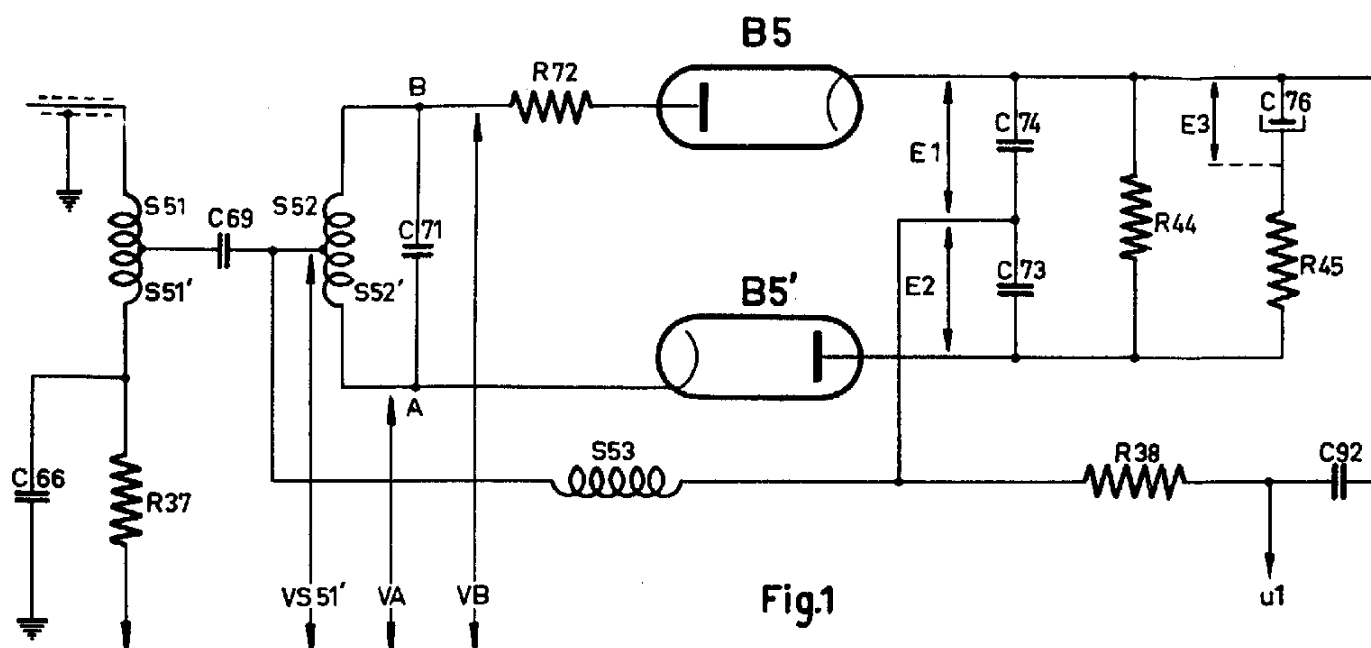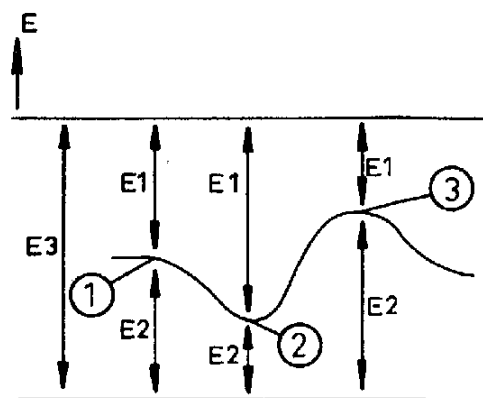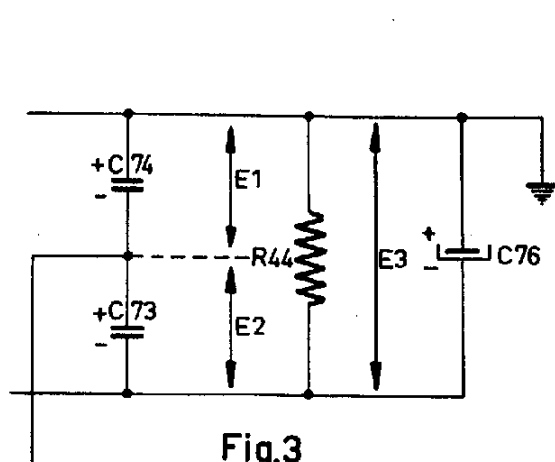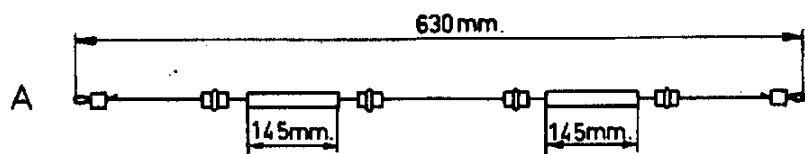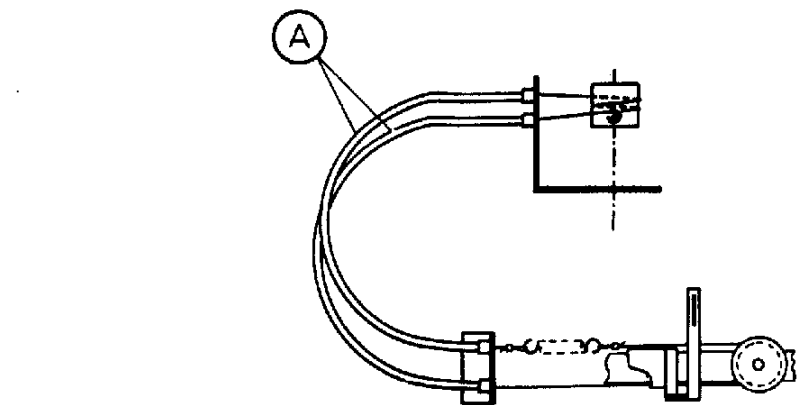

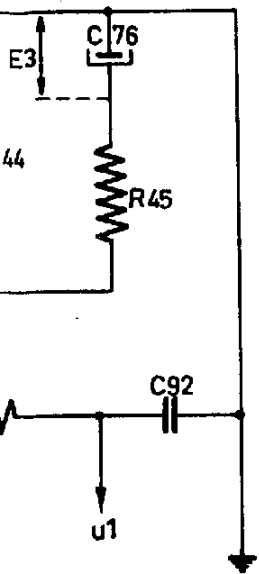

R 147 09

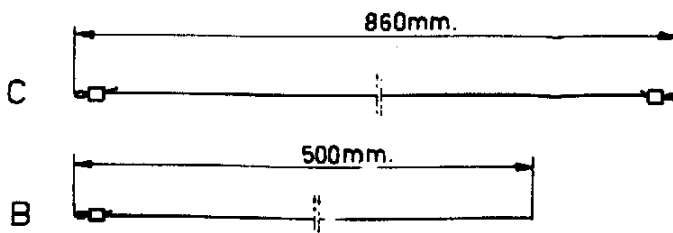
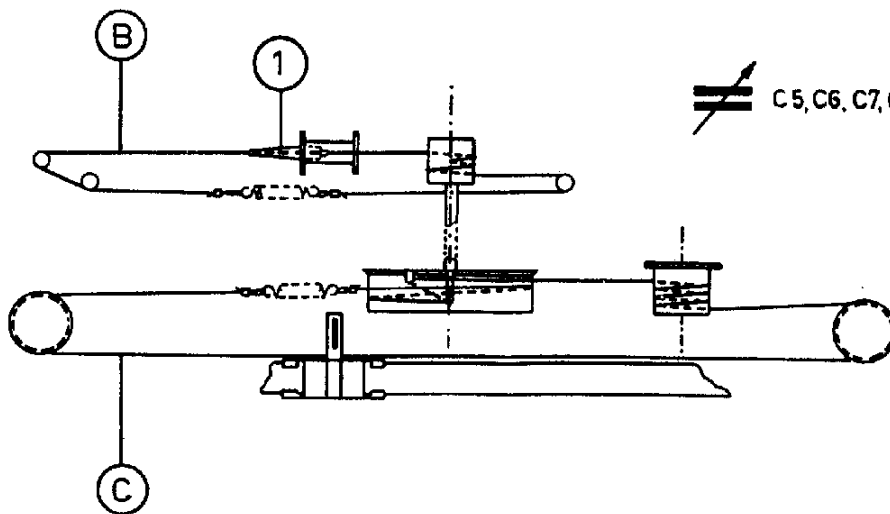


Fig.5a

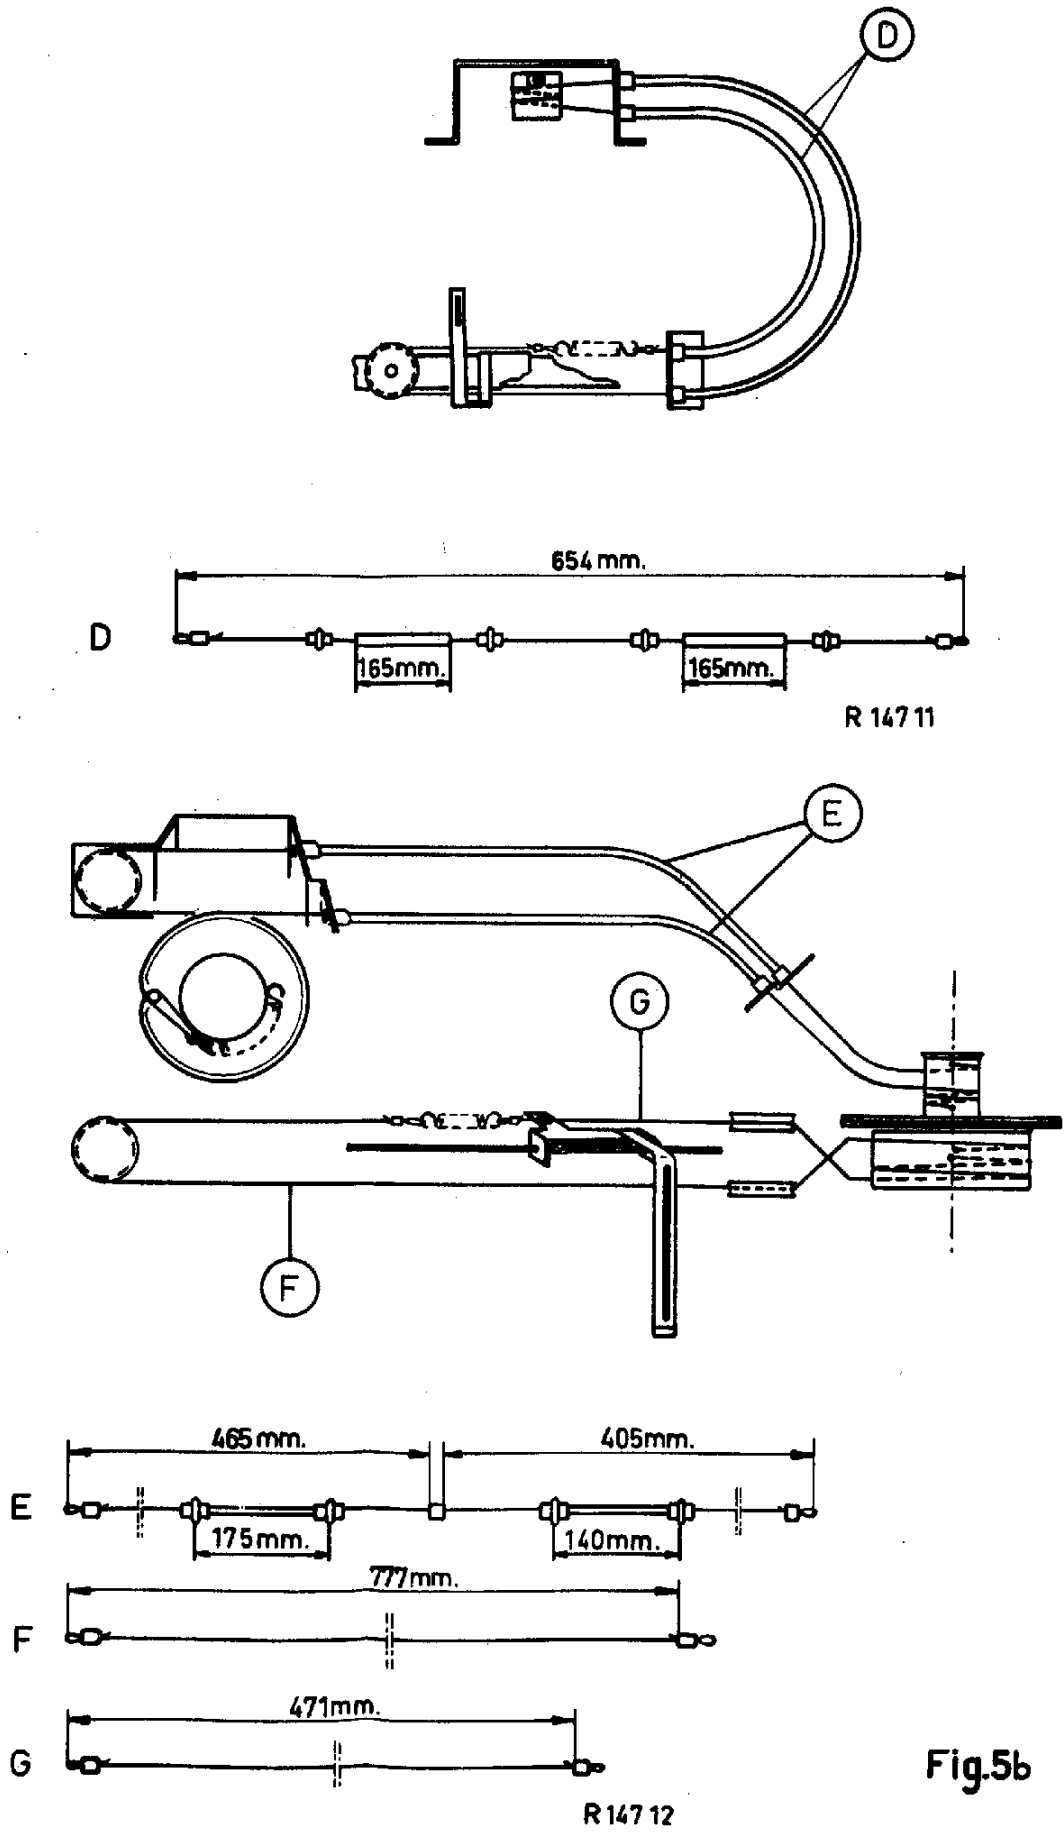


Fig.5b









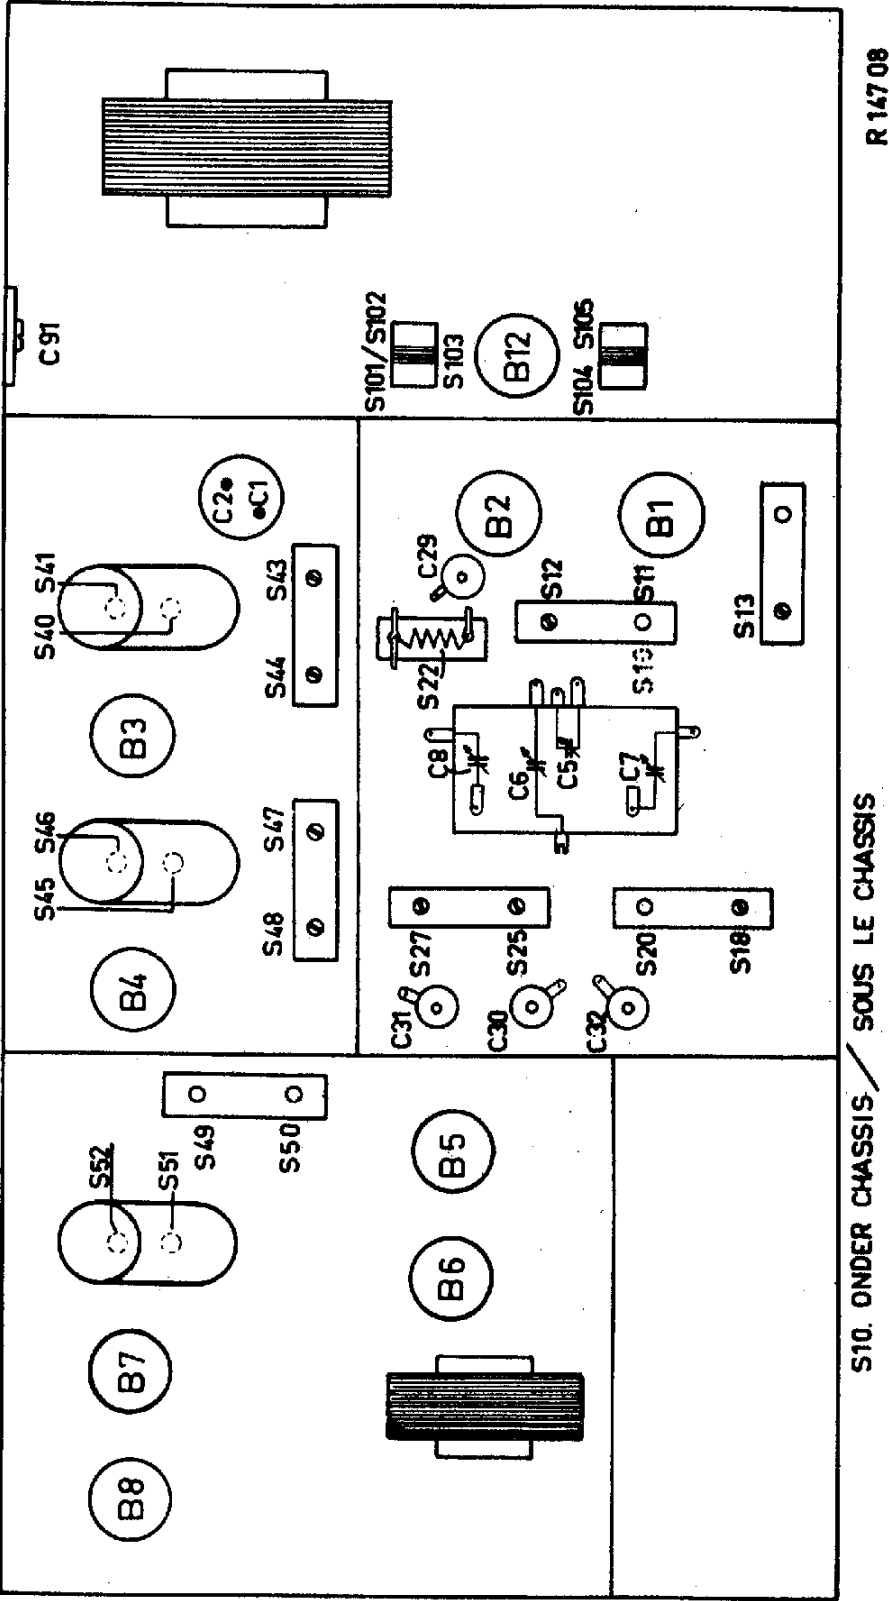






Fig. 6

R 147 08

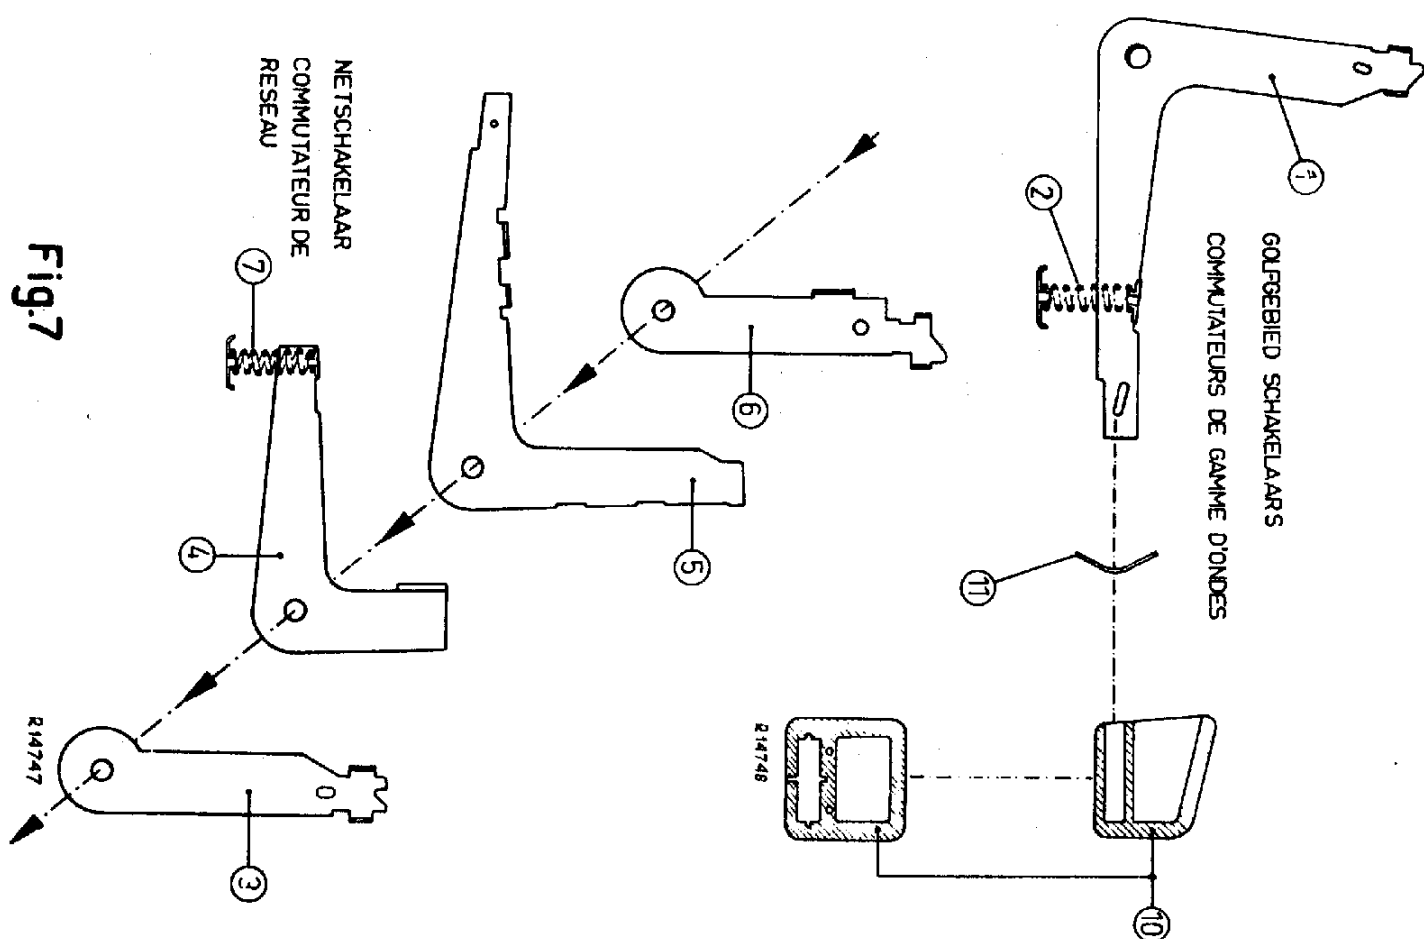

SCHAKELAAR	UIT	GRAM.	K.G.	M.G.	L.G.	F.M.
SEGMENT	a	p	k	m	l	u
DOORVERBINDINGEN IN INGEDRUKTE STAND						

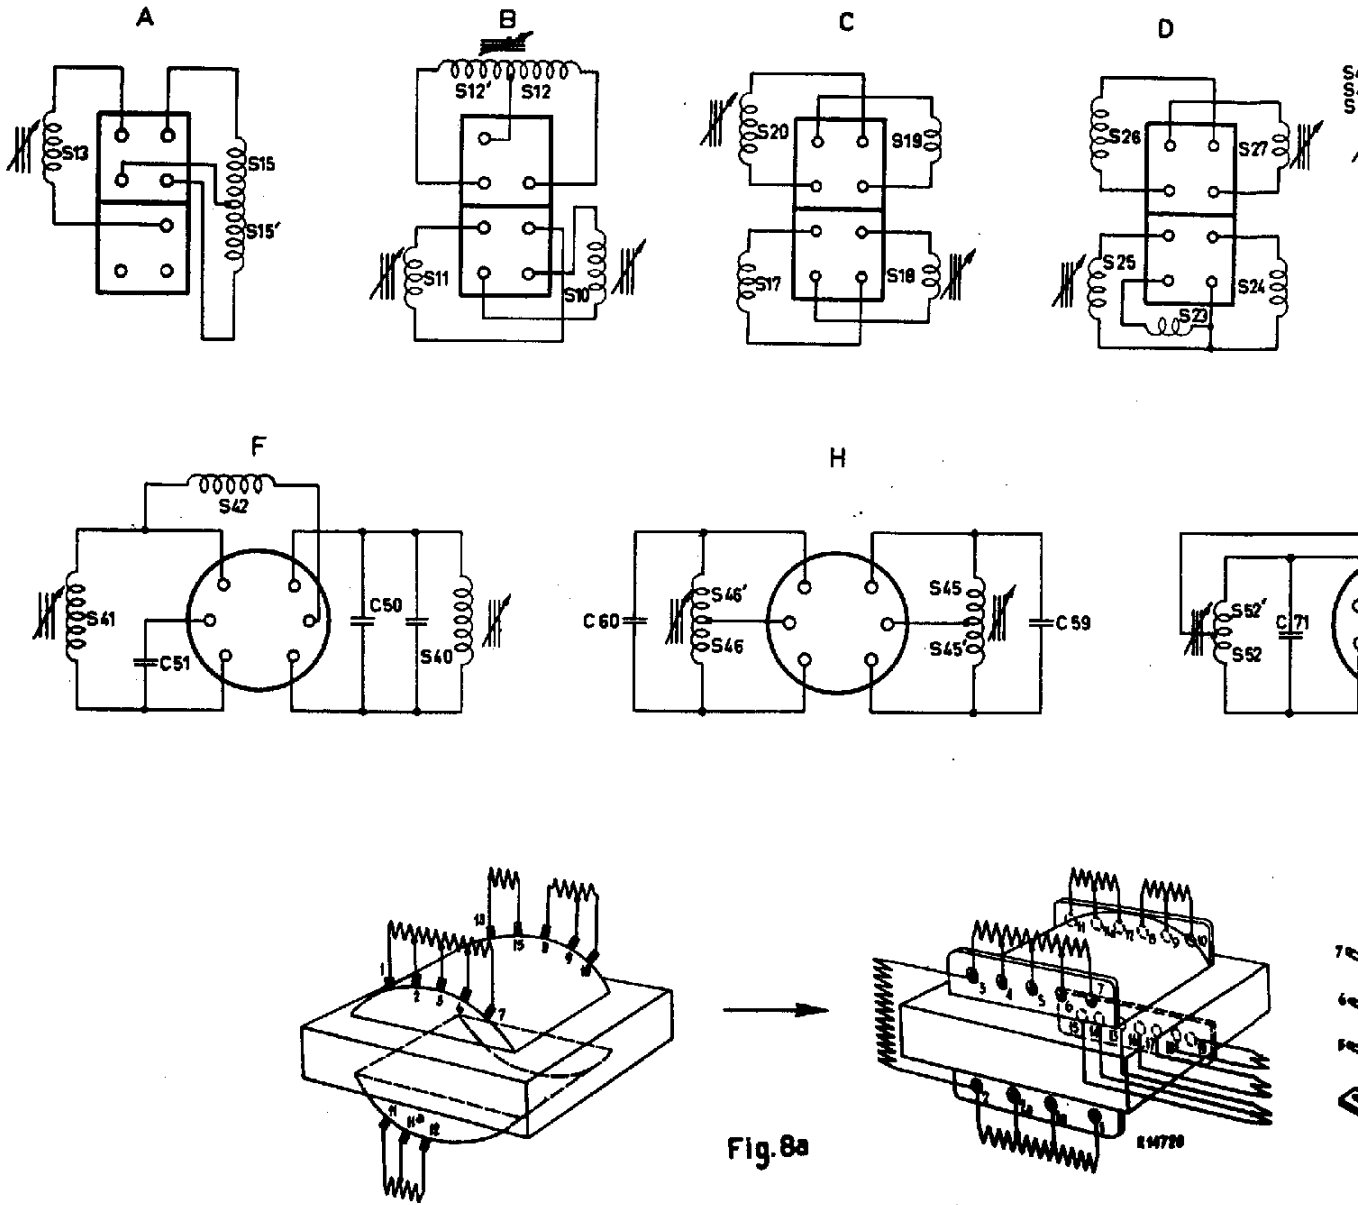

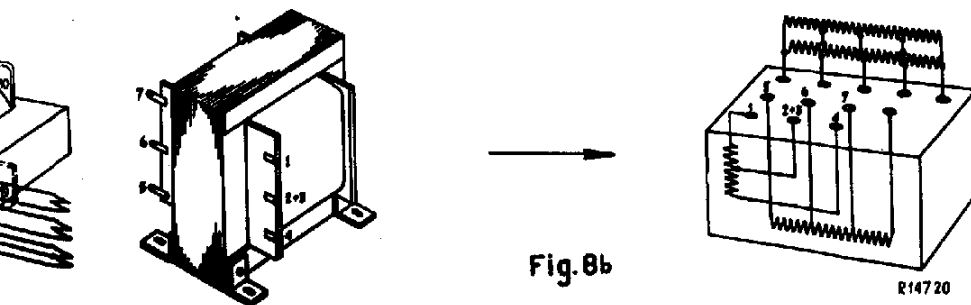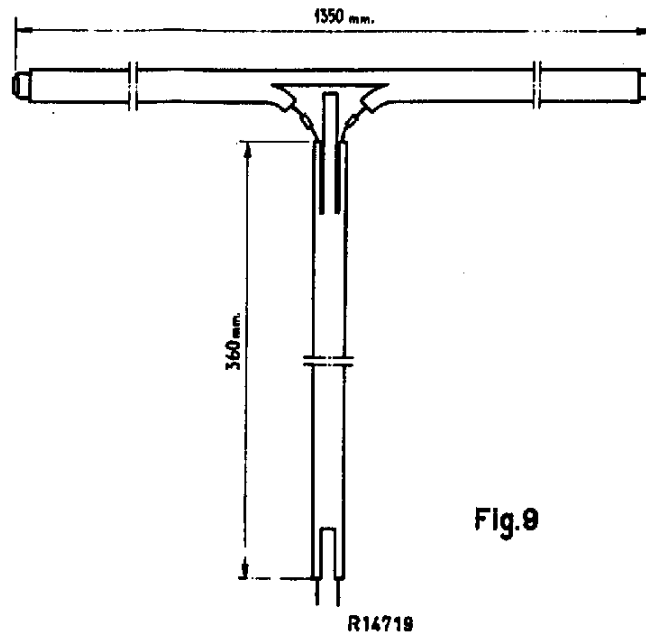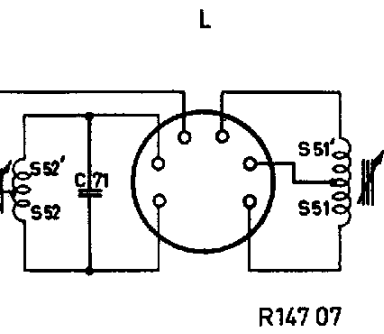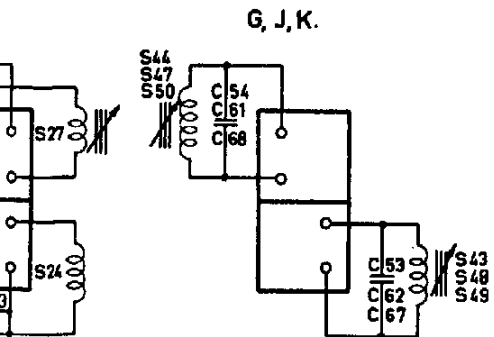

S:	60, 14,	101, 102,	103,	104, 105,	15, 12,	10,	17, 18, 1, 3, 4, 12, 12', 18, 20, 11, 5, 6, 7, 8, 9,	63,	28, 25, 27, 26, 28, 22, 23,				
C:	91,		102, 104,	37, 105,		10, 11, 12,	15, 13,	16, 5, 18, 22, 21,	17, 19,	7, 20, 32,	27, 1, 9, 30, 24, 31, 2, 23, 6, 28, 26, 24,	20,	25, 6, 28,
R:		101,	102,		11,	12,	10,	13,	14,	15, 16, 20,	17,	18, 19,	
R:													

