




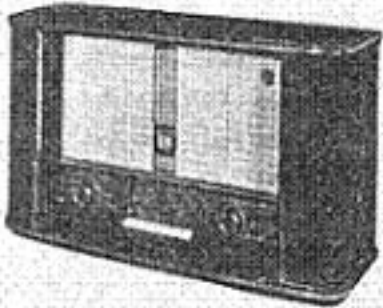


A	454mm	454mm
B	178mm	
C	218mm	
D	130 ± 10mm	
E	770mm	
F	589mm	
G	1074mm	
H	707mm	

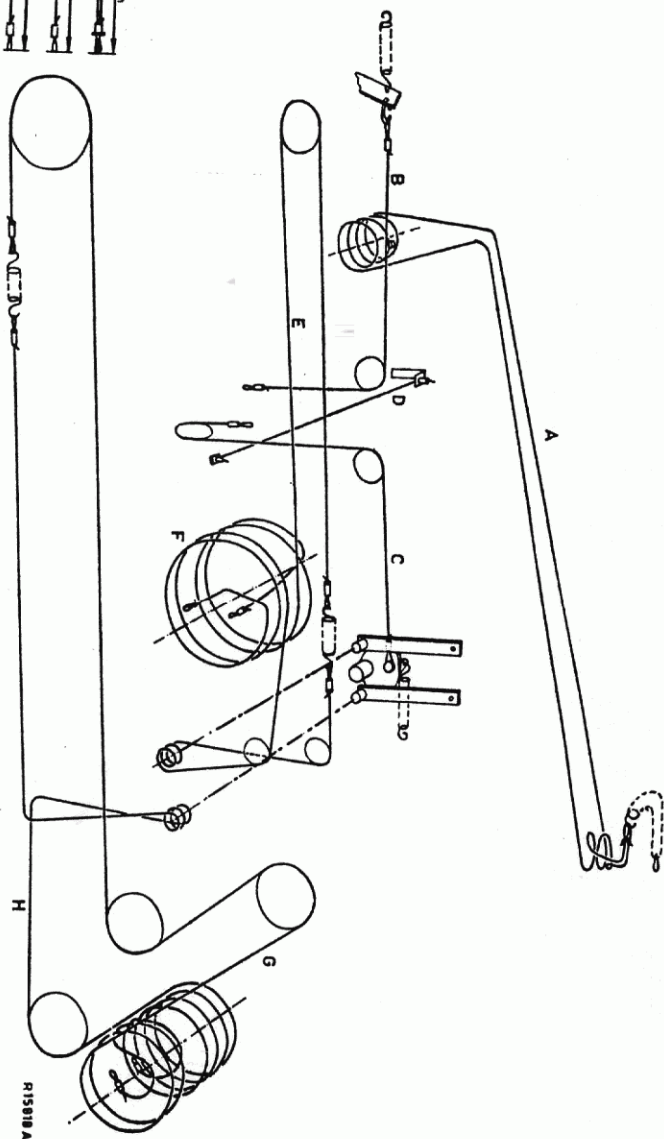

S	10	9	50	51	52	456789a	50	53	54	55	1112 13 14 15 16 17 18	21 25	26 28 27 29				30 32 31 33																							
C	7	5	6			80 82 95 67	81 9	90	97	89	91 3	439	87 93	86	88	67 83	84	85	16 149a	97	20	13 15	69 31	18	18	24	34 35 38	35 37 48	40	42	44	41	43	45	47	46	4			
R						63	41 3			66	85							64			27	28		10	5	6	43 7	8	9	14	12	18	16		39 17	17	47	11	60	2
C						3	29	26	67	112	8	9	22					10	96	4	14	20	67	18	37	32	32a	23	29	21					33					

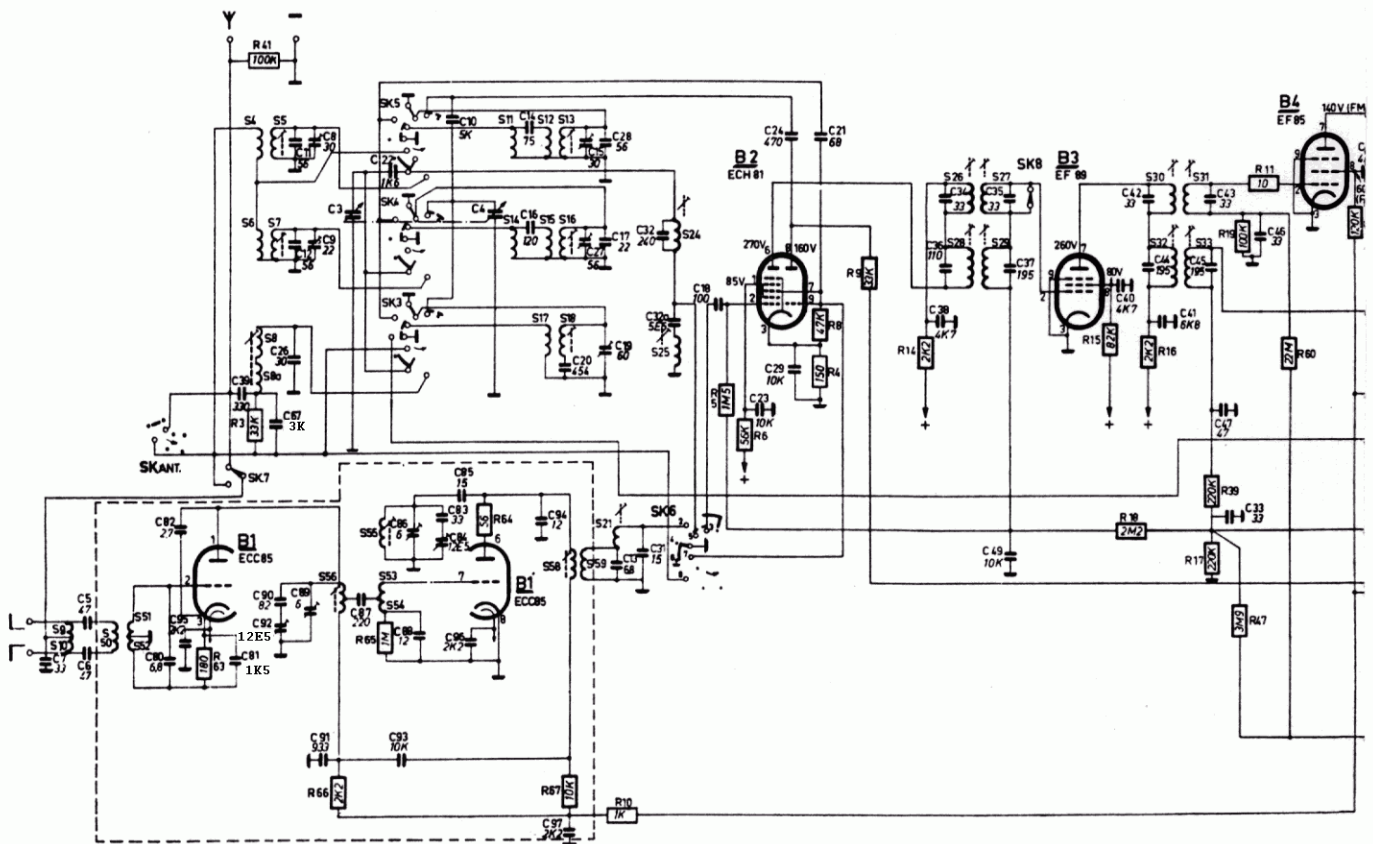

Receptor de radiodifusão sonora PHILIPS
Tipo BX 758 A

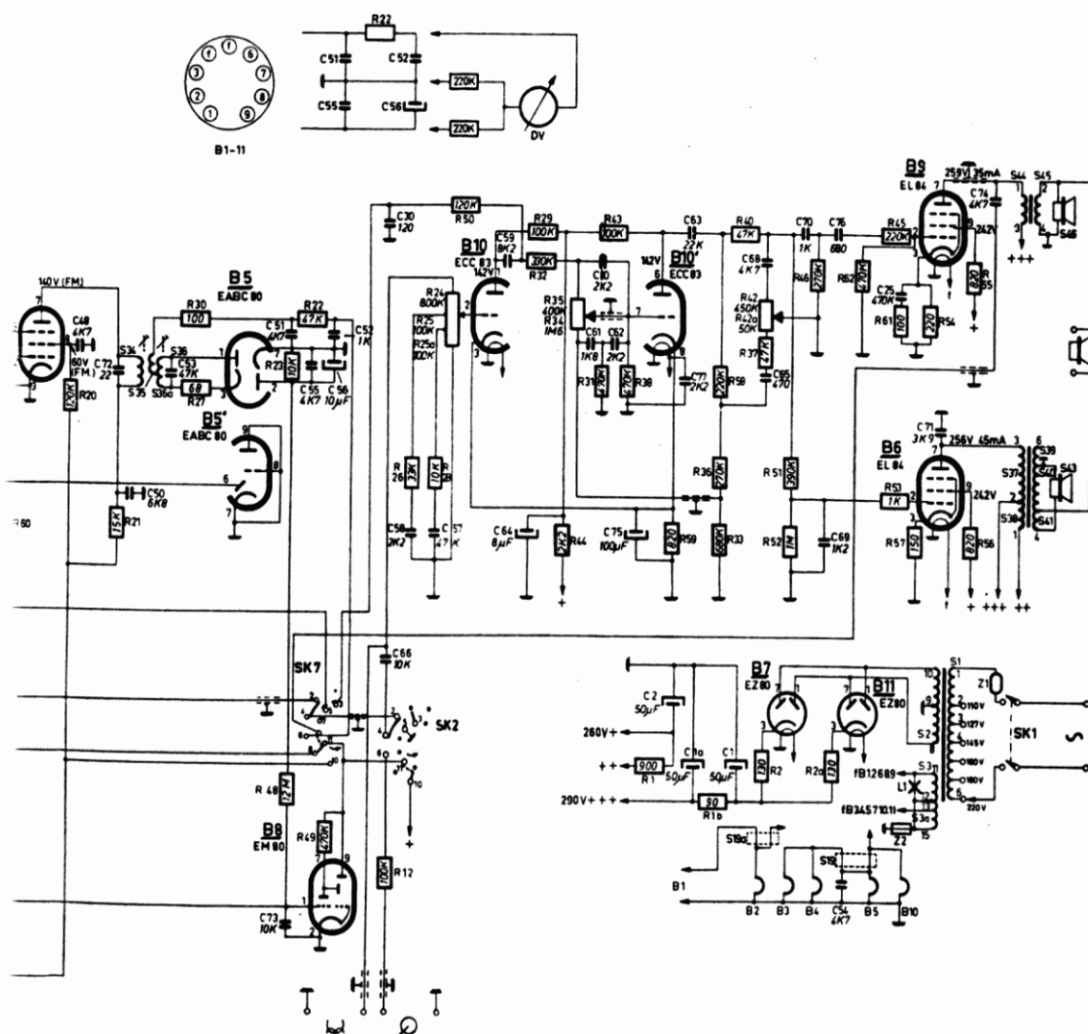[illegible]

FI: AM — 452 kHz
FM — 10,7 MHz

Altifalante: AD 3700 M ($Z = 5\Omega$)
9754 ($Z = 7\Omega$)

Consumo: aprox. 60 W

Lâmpada do quadrante: L1 = 8024 N-91