


MONTAGESCHMA

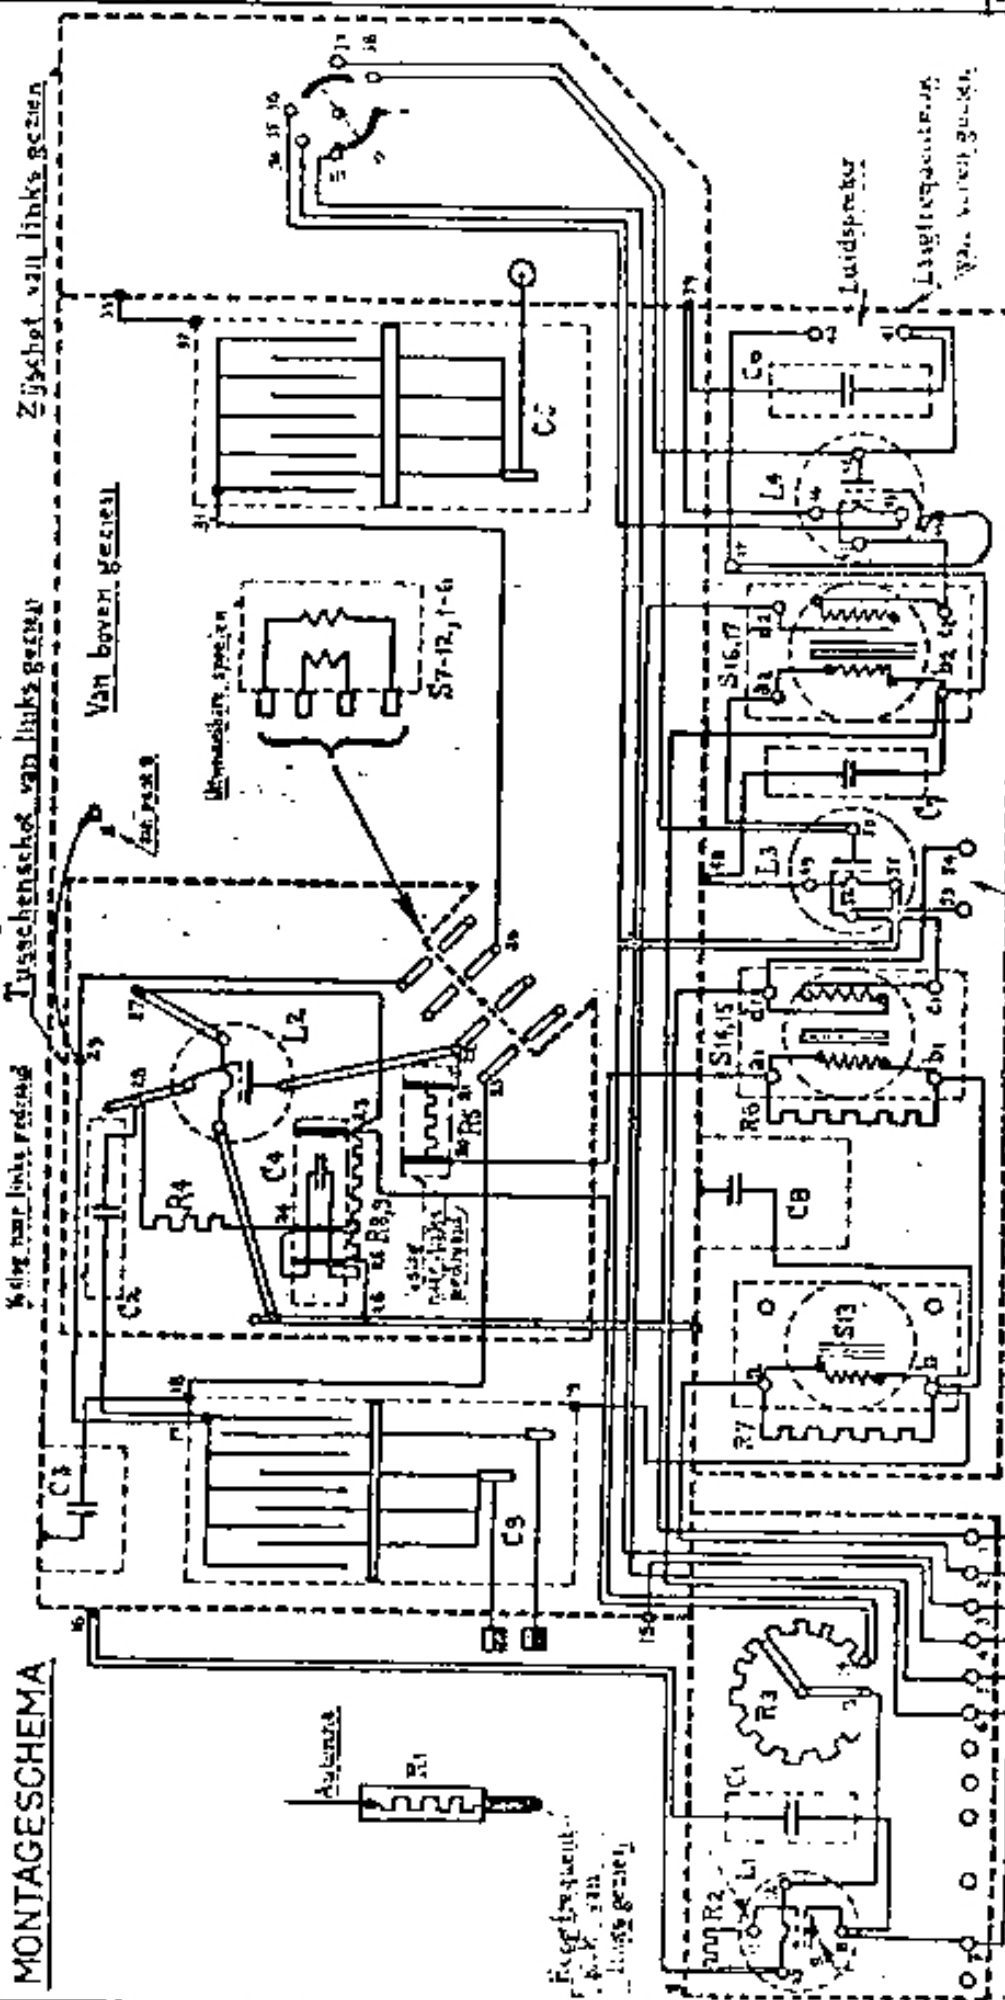

Verbinding

1	1-11
2	2-11
3	3-11
4	4-11
5	5-11
6	6-11
7	14-11
8	14-51
9	35-51
10	36-43
11	37-50
12	38-42
13	12-13
14	7-8
15	10-16
16	19-b-b1
17	52-53
18	20-a1
19	52-a1
20	49-48
21	50-a2
22	40-47-b2
23	45-c2
24	39-46
25	41-42
26	17-29-56
27	18-55
28	30-31
29	32-33
30	54-d1

x Met kroonverb. geëm. koper draad lms.

- groter afbinden
- rood
 - bruin
 - geel
 - groen
 - zwart
 - wit
 - blauw

**SCHEMA
PHILIPS'
APPARATEN**


Apparaat: Ontvangapparaat 2802.

Onderdeel:

S 10011.

Stad 1.
Datum 31-10-25

PRINCIPESCHEMA.

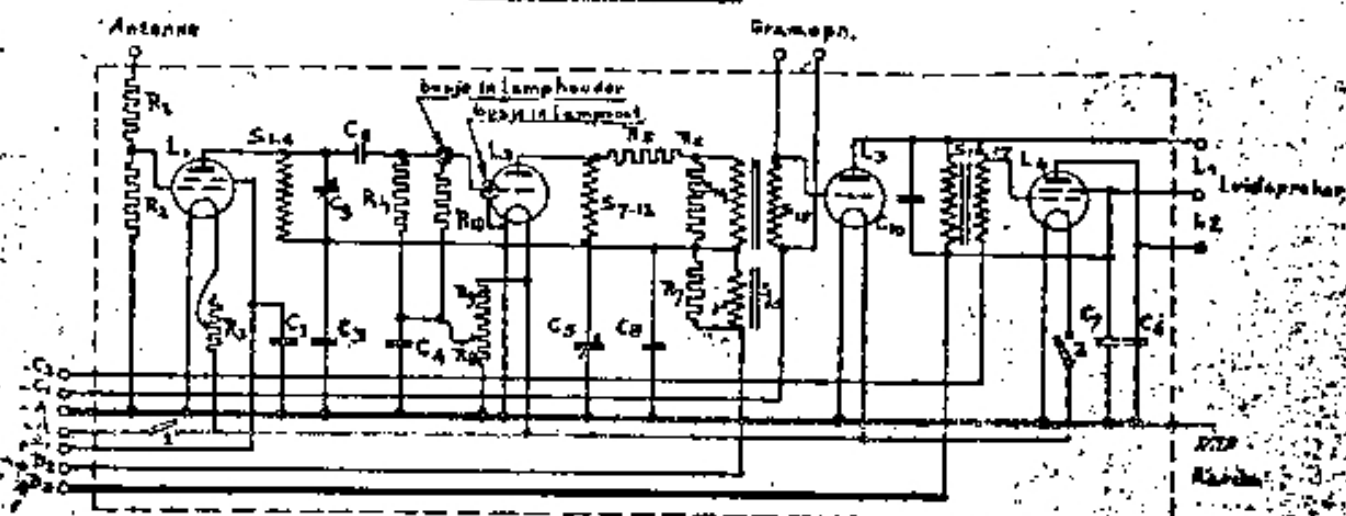

SPOELN:	BEREKEN:	CONDENSATOREN:	BEREKEN:	VERSTANDEN:	BEREKEN:
S1 = 2 wdg. S2 = 4 S3 = 13 S4 = 25 S5 = 65 S6 = 120 S7 = 3 S8 = 3 S9 = 5 S10 = 10 S11 = 15 S12 = 30 S13 = 4000 wdg. S14 = 4000 S15 = 11000-11500-12000 S16 = 4000 wdg. S17 = 11000-11500-12000	A 33017 A 10168 A 32000	C1 = 4000 cm. C2 = 100 cm. C3 = 0,5 pF. C4 = 1000 cm. C5 = 250 cm. C6 = 1000 cm. C7 = 1000 cm. C8 = 0,5 pF. C9 = 750 cm. C10 = 1000 cm.	C 10018 C 10012 C 10011 C 10013 C 10002 C 10002 C 10011 C 10002	E1 = 250 cm. E2 = 2500 cm. E3 = 60 cm. E4 = 0,21 cm. E5 = 1000 cm. E6 = 20000 E7 = 20000 E8 = 5x12 cm. E9 = 420 cm. E10 = 20.000	W 10022 W 10023 W 10115 W 10117 W 10021 W 10021 W 10118 W 10021
LAMPEN:					
L1 = A 412 L2 = A 414 L3 = A 415 L4 = E413					

BAKERT. TECH. P. 2903.

De afde... wordt op evenal wijzigen
niet veranderen.

MONTAGE SCHEMA

