

Data Sheet Model No.: GP908S

Description : Super Heavy Duty 6V Lantern Battery

Chemical System : Carbon Zinc Nominal Voltage : 6.0 Volts

Nominal Dimensions: 66 mm x 66 mm x 111 mm

Terminals : Coil Spring

Jacket : Black Plastic Jacket, Ultrasonic Welded
Applications : Lanterns, road lamps and other heavy duty

lighting devices


Shelf Life : 12 months Average Weight : 600g

Date Code : Unless otherwise specified, every battery

will carry an expiry date code for 12 months. (e.g. a battery manufactured on January 1999 will carry an expiry code of 01-00.) 01 stands for January, 00 stands for 2000

Estimated Service:

Discharge Resistance	Discharge Condition	End Point Voltage	Average Service Life
6.8 Ohms	30 Mins/ Hr 8 Hrs/ Day	3.6V	240 Mins
8.2 Ohms	30 Mins/ Day	3.6V	10.5 Hrs
120 Ohms	12 Hrs/ Day	3.6V	180 Hrs

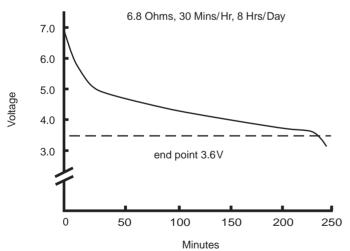

At 20°C within 30 days of manufacture

Cross References:

GP	JIS	IEC	Eveready	Duracell/Mallory
908S	4R25X	4R25	509/1209	M908

