


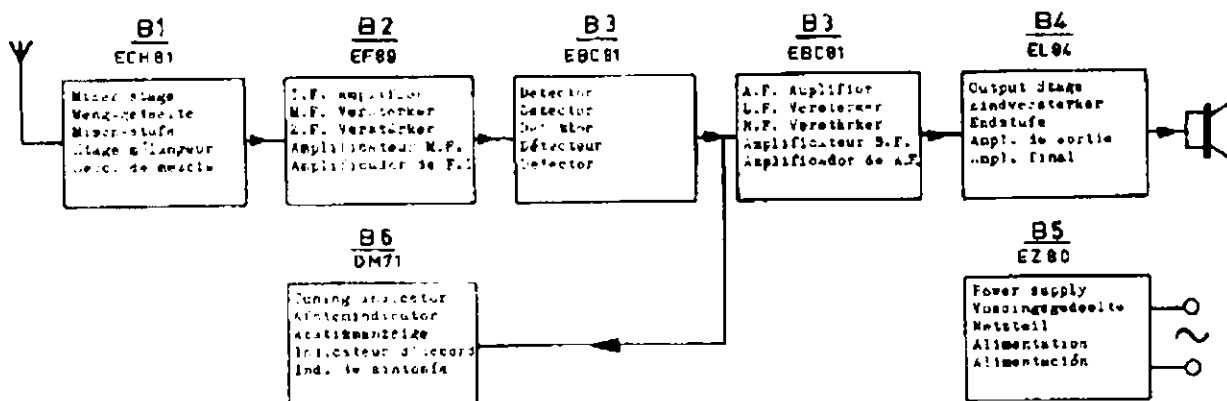


Serv-o-Mac S-a-1 S-a-2	Push button Drucktoets Touche pousseur Drucktaste Pulsador	Trimming point Triempunt Point de réglage Triempunkt Punto de ajuste	Signal Signaal Signal Signal Senal	Trim afregelen Régler Abgleichen Ajustar	Indication aanwijzing Indication Anzeige Indicación
L.F.-M.F.-V.L.F.-P.I.	2	1620 kc/s	452 kc/s - g1B1 via 33000 pF	S20, S19 S18, S17	Max.
R.F. H.F. H.F. HF R.F.	2	550 kc/s	550 kc/s	S16, S9	Max.
		1500 kc/s	1500 kc/s	C23, C6	
	3	550 kc/s	3.4 Mc/s	S14, S7	
		1500 kc/s	9.4 Mc/s	C22, C8	
	4	550 kc/s	13 Mc/s	S12, S5	
		1500 kc/s	25 Mc/s	C21, C7	
	5	1500 kc/s	17 Mc/s	C17, C9	

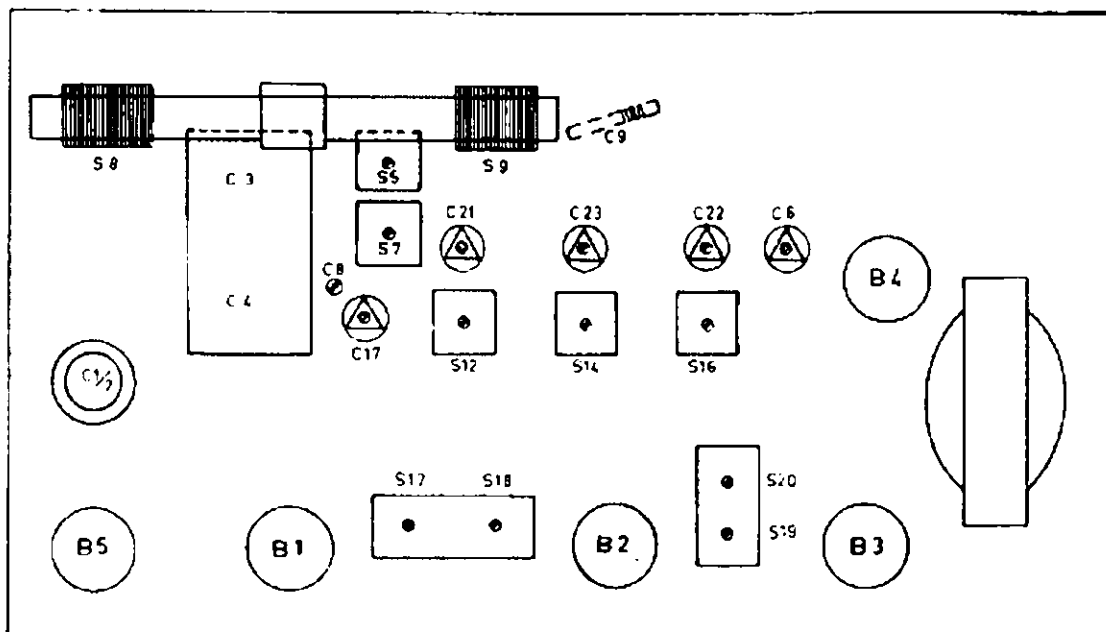

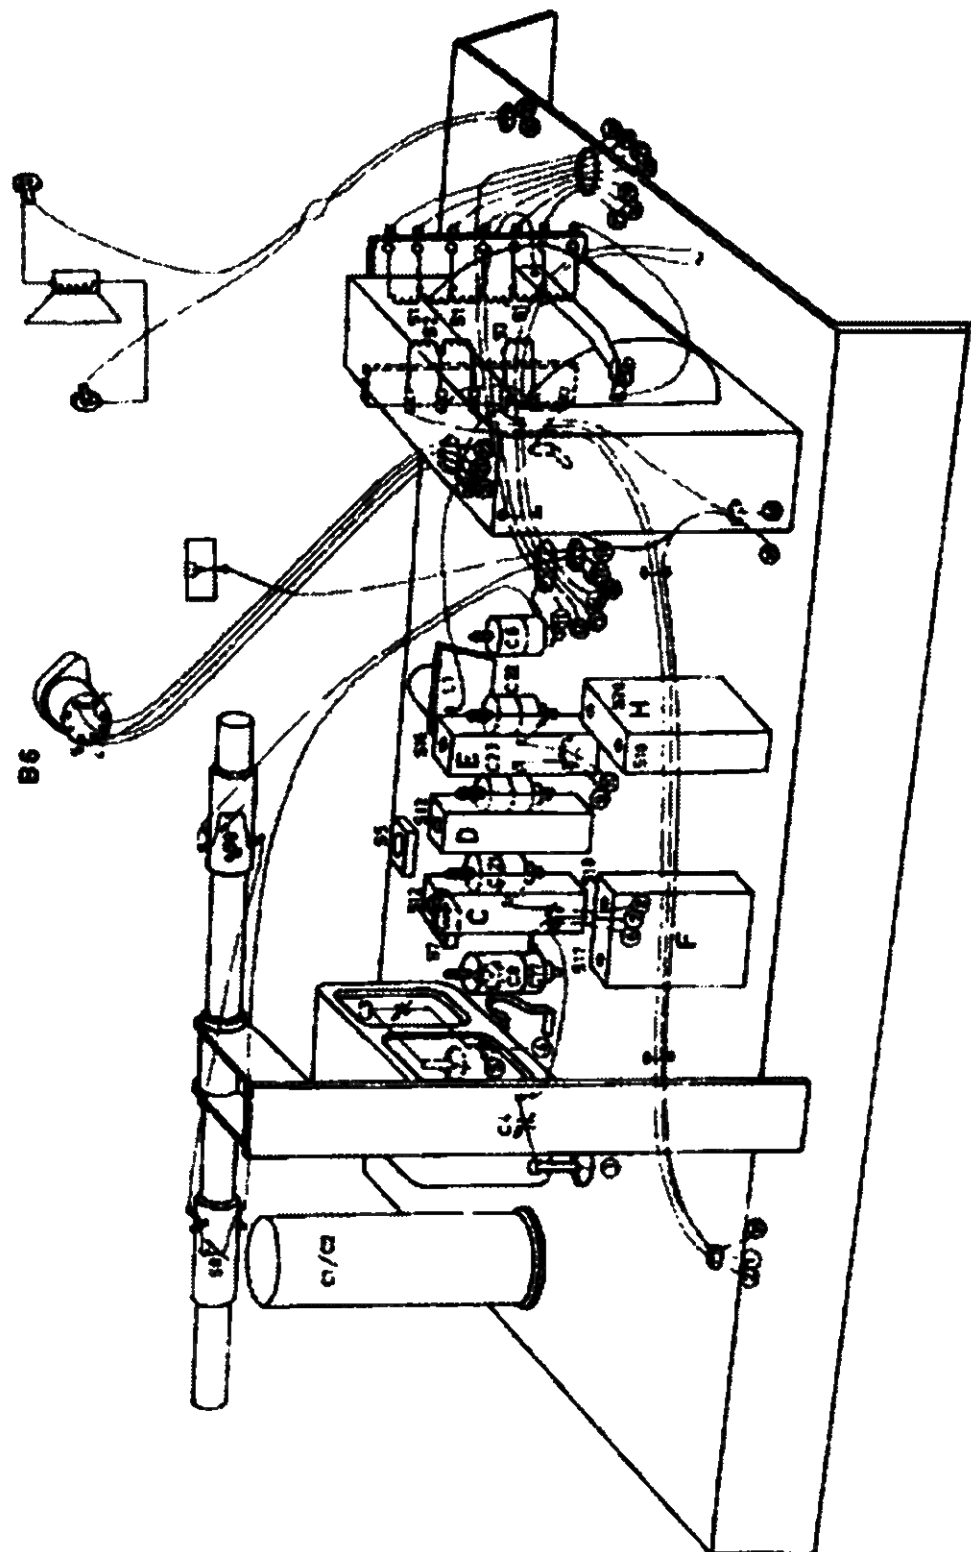


S	9.6.4.8.7.5.										13a	10.15.13.11.16.14.12.			
C	9.	5.	6.39.7.8.	36.38.3.			12.	10.	11.	13.15.14.	16.4.	18.	20.19.22.21.23.		
R	2.			3			4.	5.	6.	22.15.			23.25.24.		


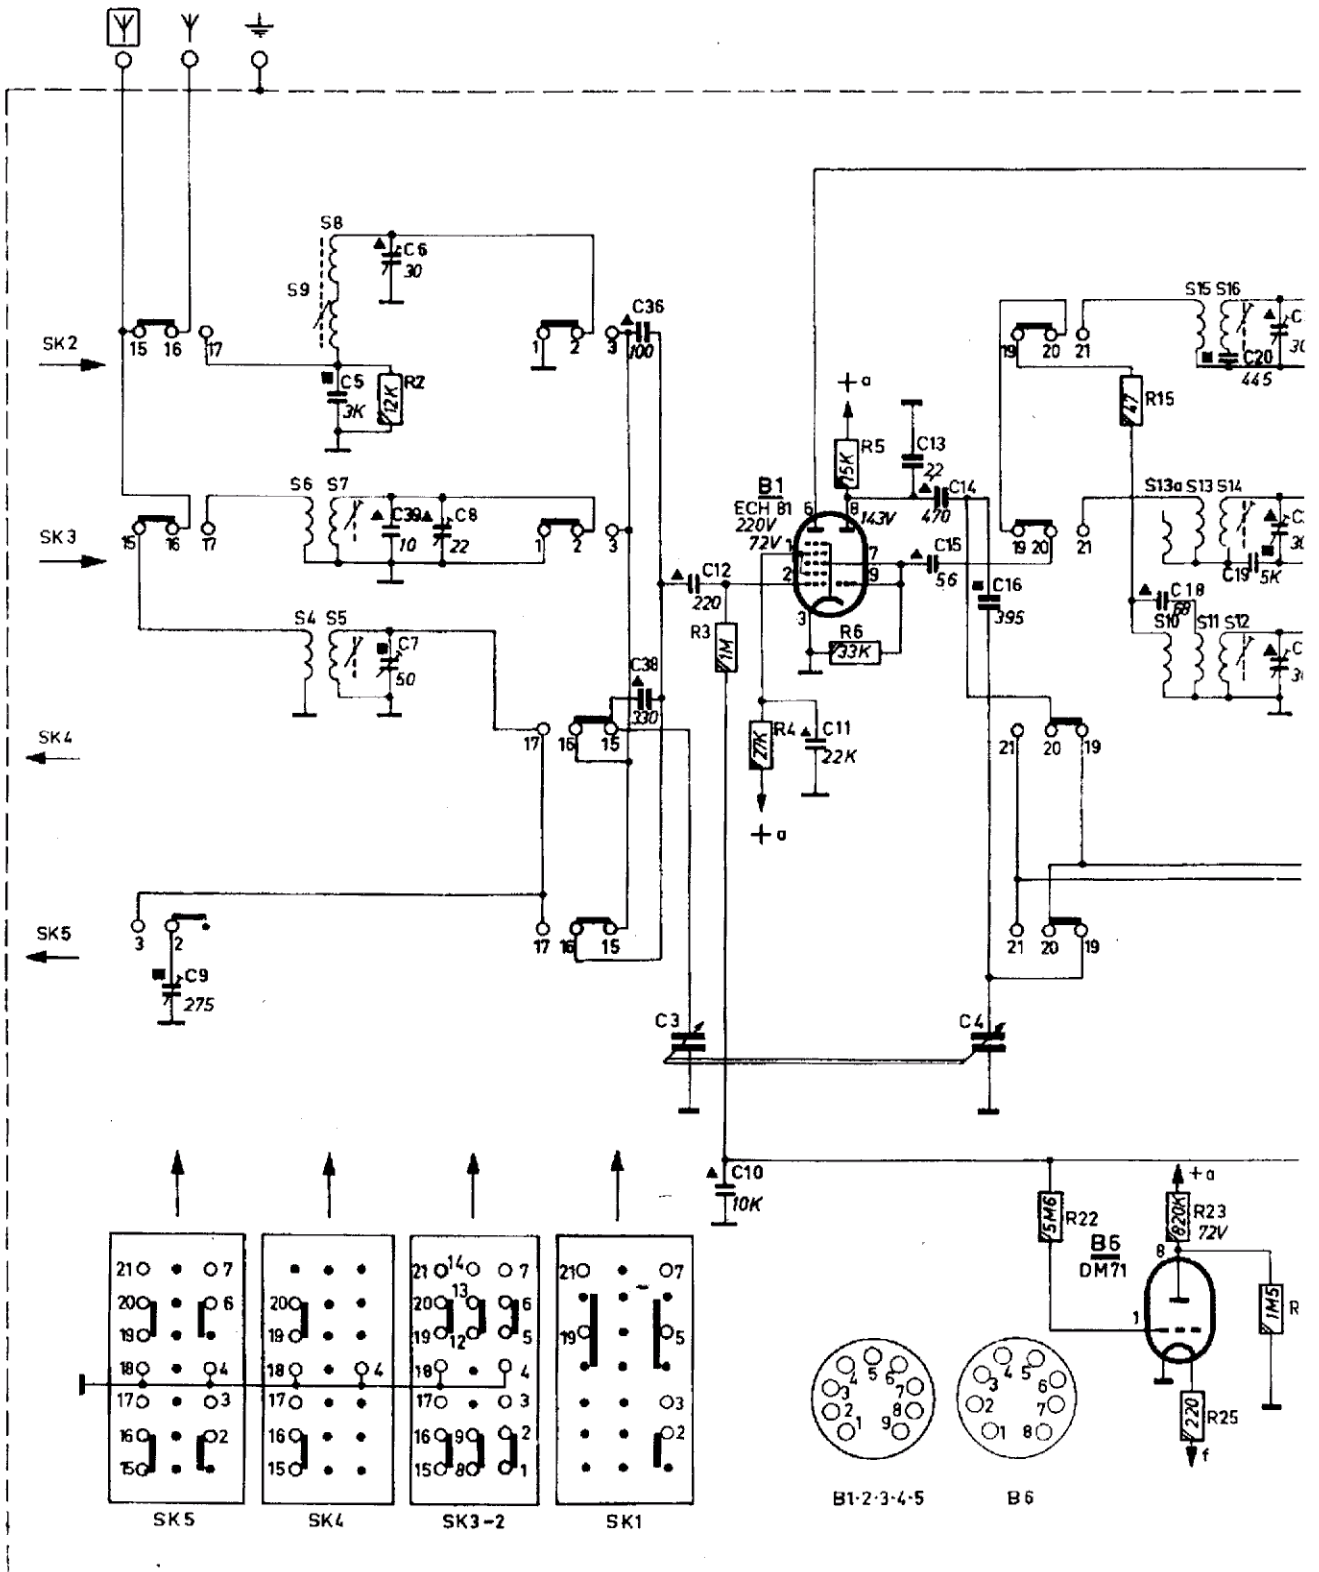


Receptor de radiodifusão sonora PHILIPS
Tipo B3 LN 36A



2.	17. 18.	19. 20.	23. 21. 1.	23.25.24.22.
22.21.23. 24.37.17.	25.	26.42. 41.28.29. 30.27.33.	31. 2. 1.	40. 32. 34.35.
25. 24.	8. 27. 26.	9. 10. 16. 13.14.1.	11.	12. 17. 18. 20.

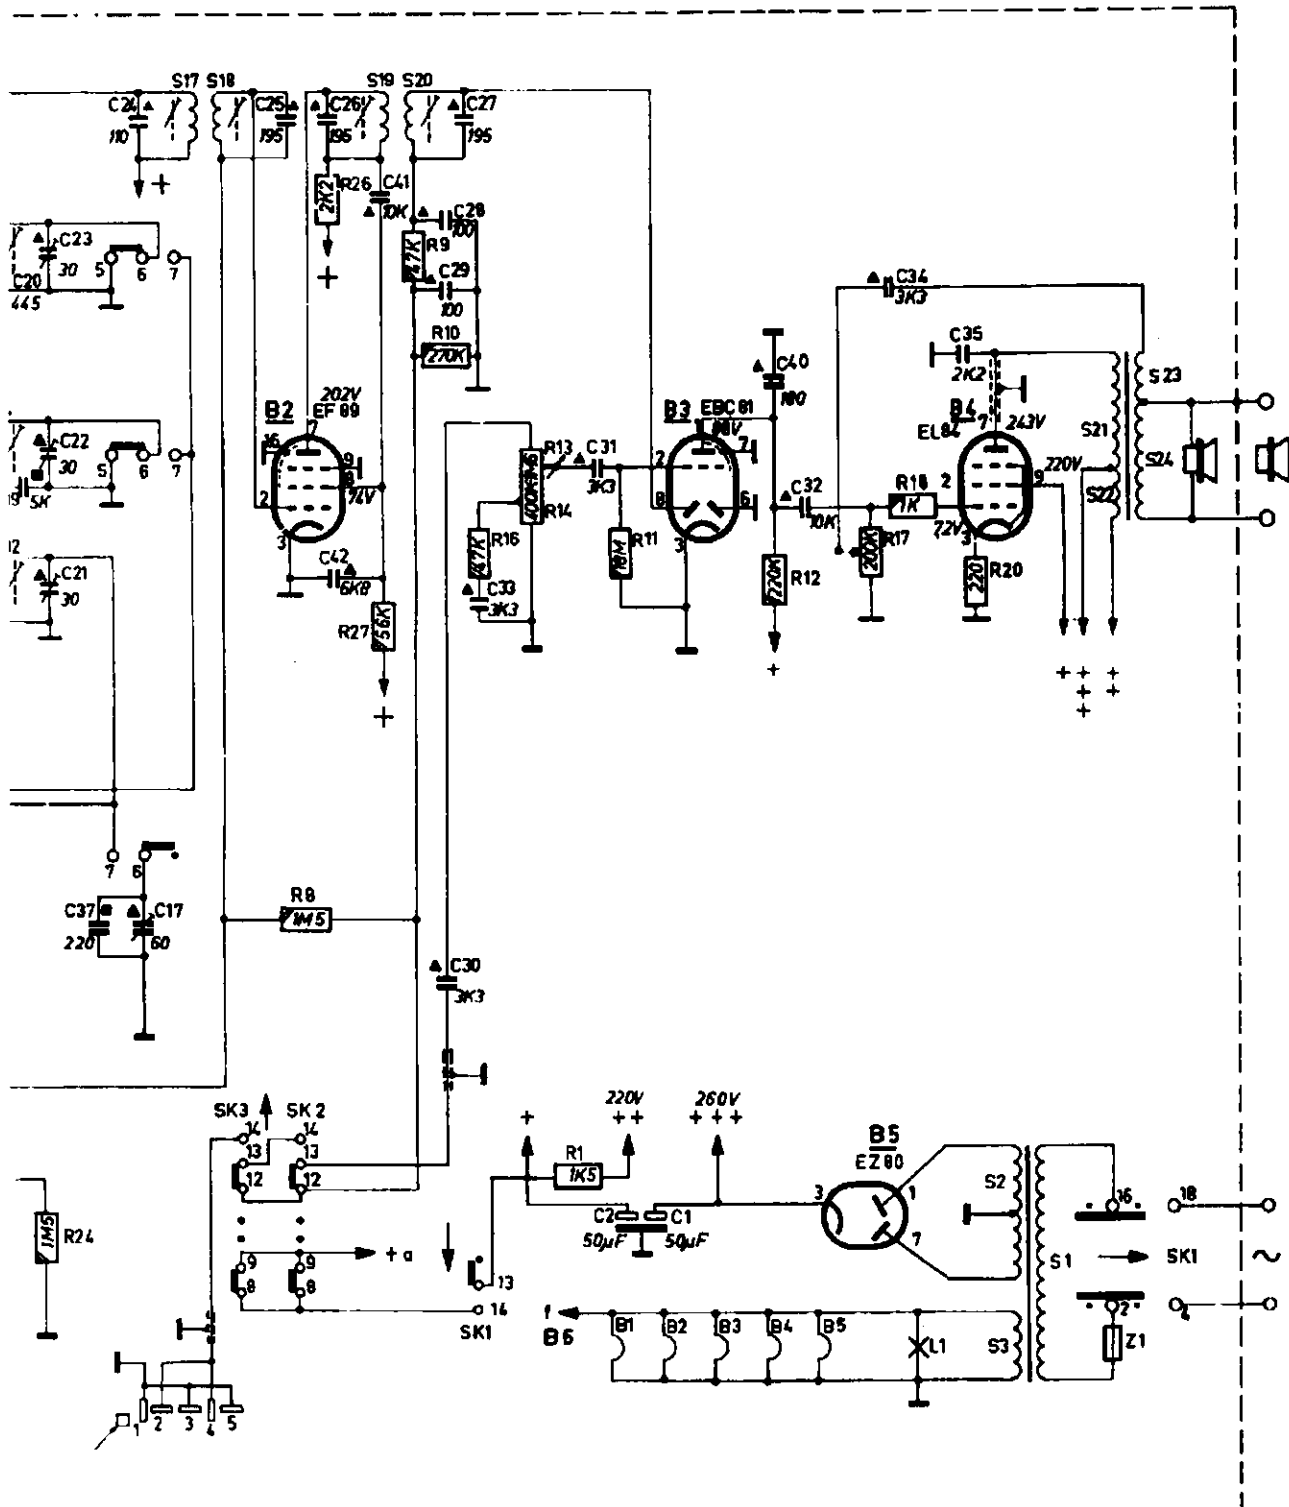

S	21.24, 23, 22.						H.	E.	D.
C	35.	34	30 33.	32 31.	40.			415 20	19.42 9
R		16 14 13.17	18.20	11. 24. 25.10.22 8.23.	2	26.12. 27.			

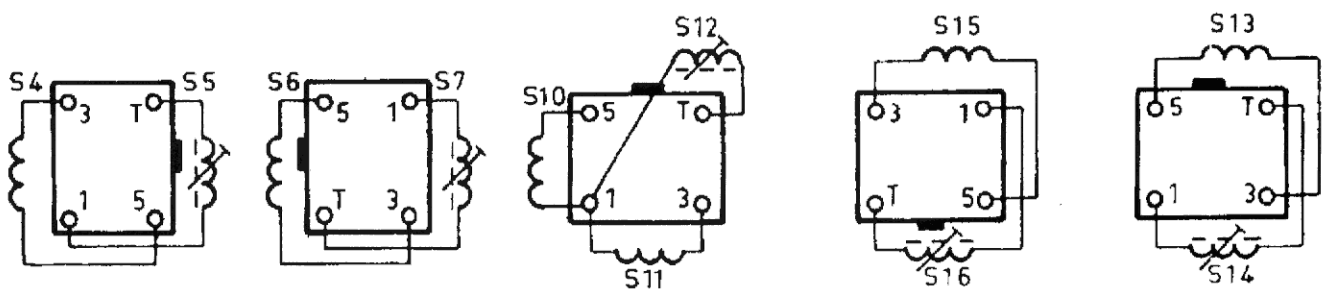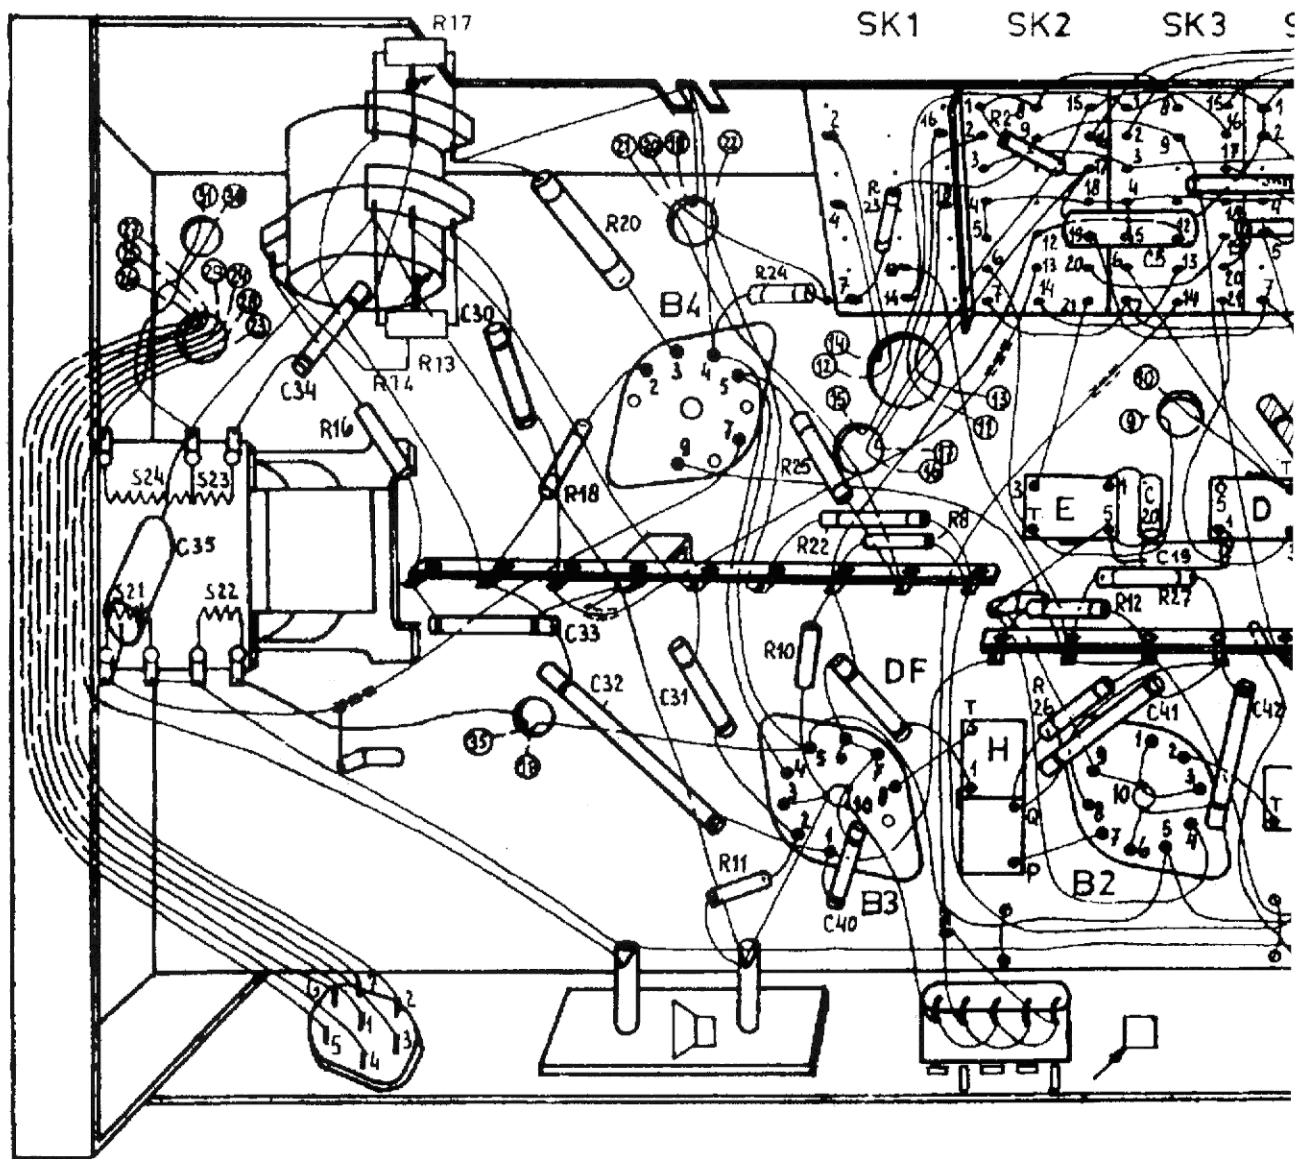

D.	F.	C.	A.	B.	
19.42 9 15	14.	18.16 37.38.36.13 10	B 39.11 7.	12.	2. 1.
	15 5.	3.	6	4 4.	1.

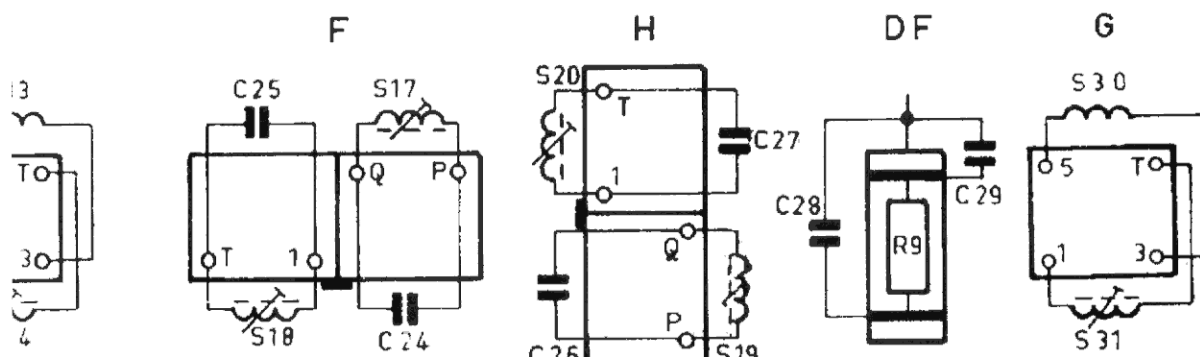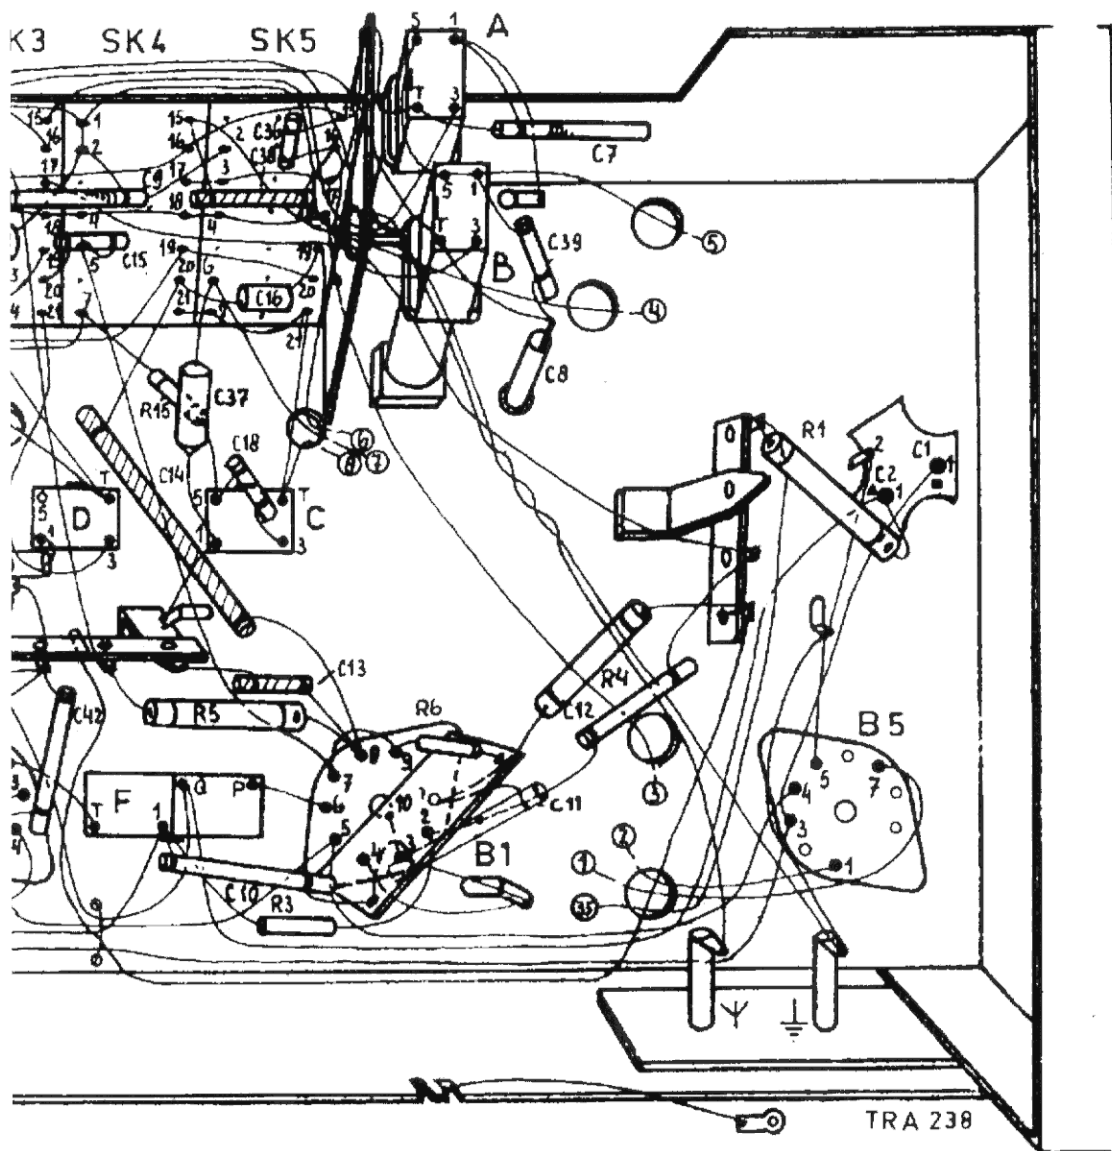

R 18809