

CDP-M11/M12/M21/M41

SERVICE MANUAL

AEP Model

UK Model

E Model

Australian Model

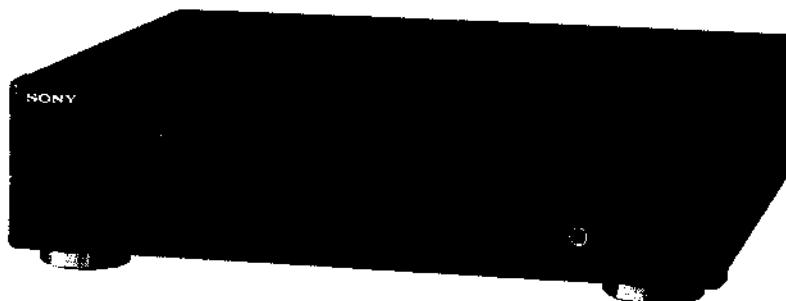


Photo : CDP-M21

SPECIFICATIONS

Compact disc player

Frequency response	2 Hz – 20 kHz ± 0.5 dB
Signal to noise ratio	More than 100 dB
Dynamic range	More than 97 dB
Harmonic distortion	Less than 0.005%
Channel separation	More than 95 dB

Outputs

LINE OUT (phono jacks)	Output level 2 V (at 50 kilohms) Load impedance over 10 kilohms
PHONES(for CDP-195) HEADPHONES (for CDP-M11) (stereo phone jack)	Output level max. 10 mW Load impedance 32 ohms

General

Power requirements	Model for Continental Europe (CDP-M11,M12,M21) 220-230V AC, 50/60Hz Model for the United Kingdom (CDP-M21,M41) 240V AC, 50/60Hz
Power consumption	12W
Dimensions (approx., including Projections)	355×95×305 mm (w/h/d) (14×33/4×121/8 inches)
Weight (approx.)	3.2kg (7 lbs 1 oz)


Model Name Using Similar Mechanism	CDP-291/391
CD Mechanism Type	CDM14-5BD1
Optical Pick-Up Block Type	BU-5BD1

Supplied accessories

Audio cord	1 (2 phono plugs – 2 phono plugs)
------------	--------------------------------------

Design and specifications subject to change without notice.

For the United Kingdom and
European countries

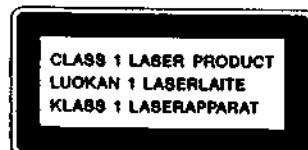

This Compact Disc player is
classified as a CLASS 1
LASER product.
The CLASS 1 LASER
PRODUCT label is located
on the rear exterior.

COMPACT DISC PLAYER
SONY®



SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY MARK \triangle OR DOTTED LINE WITH MARK \triangle ON THE SCHEMATIC DIAGRAMS AND IN THE PARTS LIST ARE CRITICAL TO SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY.

PROTECTION OF EYES FROM LASER BEAM DURING SERVICING

This set employs a laser. Therefore, be sure to follow carefully the instructions below when servicing.

CAUTION

Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

NOTES ON HANDLING THE OPTICAL PICK-UP BLOCK OR BASE UNIT

The laser diode in the optical pick-up block may suffer electrostatic breakdown because of the potential difference generated by the charged electrostatic load, etc. on clothing and the human body. During repair, pay attention to electrostatic breakdown and also use the procedure in the printed matter which is included in the repair parts. The flexible board is easily damaged and should be handled with care.

1. Laser Diode Properties


- Material: GaAlAs
- Wavelength: 780nm
- Emission Duration: continuous
- Laser Output: max.44.6 μ W*

* This output is the value measured at a distance of about 200mm from the objective lens surface on the Optical Pick-up Block.

2. During service, do not take the Optical Pick-up Block apart, and do not adjust the APC circuit. If there is a breakdown in the APC circuit (including laser diode), replace the entire Optical Pick-up Block (including APC board).

TABLE OF CONTENTS

<u>Section</u>	<u>Title</u>	<u>Page</u>	<u>Section</u>	<u>Title</u>	<u>Page</u>
1. GENERAL		4	4-1. Block Diagrams		10
1-1. Location of Controls		4	4-2. Waveforms		13
1-2. Pin Function		5	4-3. Printed Wiring Boards		14
2. ELECTRICAL BLOCK CHECKING	7		4-4. Schematic diagram		17
3. DISASSEMBLY	9		4-5. Semiconductor Lead Layout		21
4. DIAGRAMS	10		4-6. IC Block Diagrams		22
			5. EXPLODED VIEWS		24
			6. ELECTRICAL PARTS LIST		27

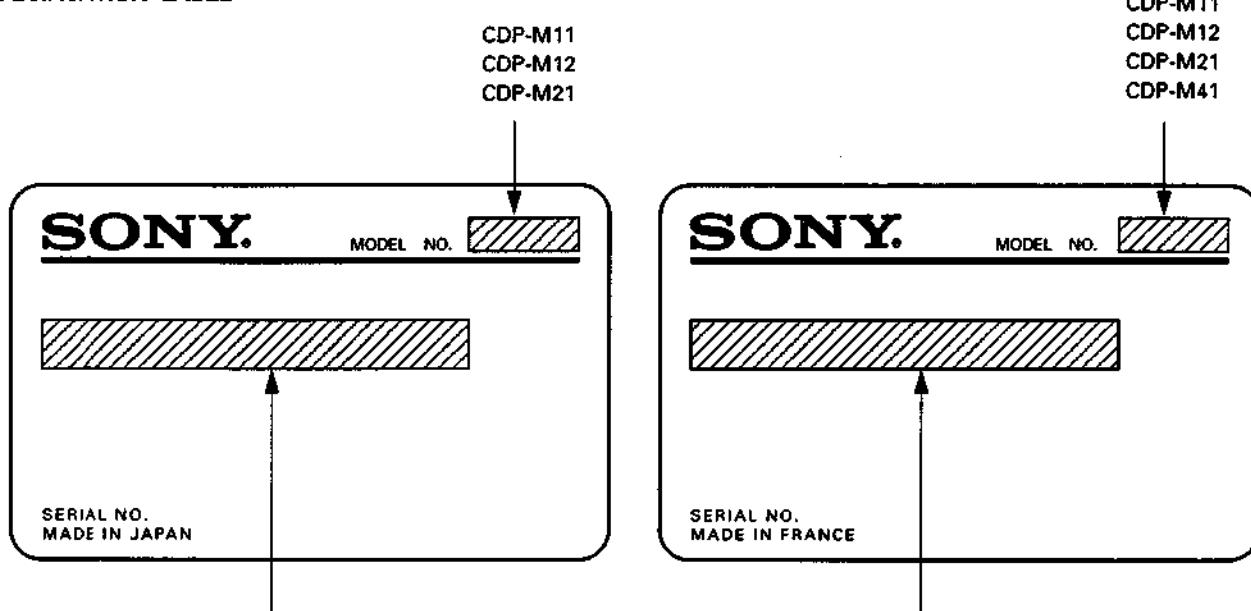MODEL IDENTIFICATION**- SPECIFICATION LABEL -**

AEP MODEL: AC220-230V, 50/60Hz
 Australian MODEL: AC240V, 50/60Hz
 E, Saudi Arabian MODEL: AC110-120, 220-240V, 50/60Hz, 12W

AEP MODEL: AC220-230V, 50/60Hz
 UK MODEL: AC240V, 50/60Hz

SAFETY CHECK-OUT

After correcting the original service problem, perform the following safety check before releasing the set to the customer: Check the antenna terminals, metal trim, "metallized" knobs, screws, and all other exposed metal parts for AC leakage. Check leakage as described below.

LEAKAGE TEST

The AC leakage from any exposed metal part to earth ground and from all exposed metal parts to any exposed metal part having a return to chassis, must not exceed 0.5mA (500 microamperes). Leakage current can be measured by any one of three methods.

1. A commercial leakage tester, such as the Simpson 229 or RCA WT-540A. Follow the manufacturers' instructions to use these instruments.
2. A battery-operated AC milliammeter. The Data Precision 245 digital multimeter is suitable for this job.

3. Measuring the voltage drop across a resistor by means of a VOM or battery-operated AC voltmeter. The "limit" indication is 0.75V, so analog meters must have an accurate low-voltage scale. The Simpson 250 and Sanwa SH-63Trd are examples of a passive VOM that is suitable. Nearly all battery operated digital multimeters that have a 2V AC range are suitable. (See Fig.A)

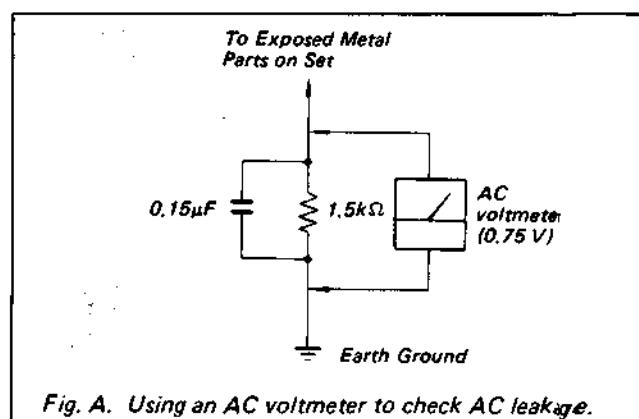



Fig. A. Using an AC voltmeter to check AC leakage.

SECTION 1

GENERAL

1-1. LOCATION OF CONTROLS

This section is extracted from instruction manual.

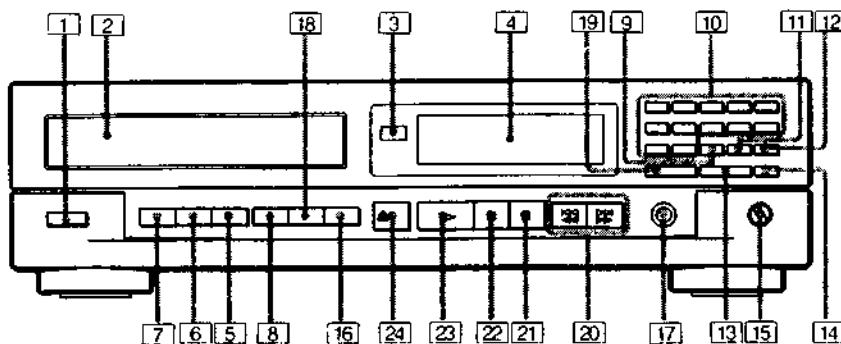**CDP-M11**

- [1] POWER switch
- [2] Disc tray
- [3] Remote sensor
- [4] Display window
- [5] PROGRAM button
- [6] SHUFFLE button
- [7] CONTINUE button
- [8] TIME button
- [9] CHECK (program check) button
- [10] Numeric buttons
- [11] CLEAR (program clear) button
- [12] >12 (over 12) button
- [13] MUSIC SCAN button
- [14] P.SEARCH button
- [15] PHONE LEVEL control
- [16] FADER button
- [17] HEADPHONES jack (EXCEPT CDP-M12)
- [18] REPEAT button
- [19] EDIT/TIME FADE button
- [20] <</>>/>> (AMS**/RMS***/manual search) buttons
- [21] ■ (stop) button
- [22] ▶ (pause) button
- [23] ▶ (play) button
- [24] ▲ (open/close) button

1-2. PIN FUNCTION OF IC101 AND IC401

• IC101 (CXA1372Q) PIN FUNCTION

Pin No.	Pin Name	I/O	Description
1	VC	—	GND when two (\pm) dual power supplies are in use, or the center voltage (2.5V) when a single power supply is in use.
2	FGD	I	Time constants for gain switching in normal mode/down mode and for focus gain are connected between the FGD and FS3 pins.
3	FS3	I	
4	FLB	I	The capacitor for low frequency boost in the focus servo loop is connected.
5	FEO	O	Focus drive output.
6	FE-	I	Inverted input to focus amplifier.
7	SRCH	I	Time constants to generate the focus search waveform are connected.
8	TGU	I	Time constants for gain switching in normal mode/up mode and for tracking gain are connected between TGU pin and TG2 pin.
9	TG2	I	
10	AVCC	—	Analog power supply (5V when \pm dual power supplies are in use, 5V when a single power supply is in use.)
11	TAO	O	Tracking drive output.
12	TA-	I	Inverted input to tracking amplifier.
13	SL+	I	Non-inverted input to sled amplifier.
14	SLO	O	Sled drive output.
15	SL-	I	Non-inverted input to sled amplifier.
16	ESET	I	The 610k Ω phase compensator resistor is connected to this pin.
17	ISET	I	The current setting resistor is connected to this pin.
18	SSTOP	I	The limit switch is connected to this pin.
19	AVEE	—	Analog power supply (-5V when \pm dual power supplies are in use, or GND when a single power supply is in use.)
20	DIRC	I	Direct control pin.
21	LOCK	I	Sled run-away prevention circuit operates when this signal is "L".
22	CLK	I	Serial data transfer clock input that is supplied from CPU (or DSP).
23	XLT	I	Latch input from CPU (or DSP).
24	DATA	I	Serial data input from CPU (or DSP).
25	XRST	I	System reset. "L" to reset.
26	C.OUT	O	Output to tracking counter.
27	SENS	O	SENS output.
28	DGND	—	Digital ground (GND). (GND when \pm dual power supplies are in use. GND when a single power supply is in use.)
29	MIRR	O	Mirror output.
30	DFCT	O	Defect output. "H" when defective.
31	ASY	I	Auto-assymmetry control input.
32	EFM	O	EFM comparator output.
33	FOK	O	Focus OK.
34	CC2	I	Defect-bottom-hold input (inout by capacitive coupling).
35	CC1	O	Defect-bottom-hold output.
36	DVCC	—	Digital power supply. (+5V when \pm dual power supplies in use. +5V when a single power supply is in use.)
37	CB	I	The defect-bottom-hold capacitor is connected to this pin.
38	CP	I	The mirror hold capacitor is connected to this pin.
39	RF1	I	RF signal input (input by capacitive coupling).
40	RF0	I	RF signal input (input by DC coupling).
41	DVEE	—	Digital power supply (-5V when \pm dual power supplies are in use. GND when a single power supply is in use.)
42	TZC	I	Tracking zero-cross comparator input.
43	TE	I	Tracking error input.
44	TDFCT	I	The defect prevention hold capacitor is connected to this pin.
45	ATSC	I	Anti-shock input.
46	FZC	I	Focus zero-cross comparator input.
47	FE	I	Focus error input.
48	FDFCT	I	The defect prevention hold capacitor is connected to this pin.

•IC401 (CXP50112-097Q) PIN FUNCTION


Pin No.	Pin Name	I/O	Description
1 - 4	—	—	Not used (open).
5 - 20	S1 - S16	O	Segment output to FL tube.
21 - 28	1G - 8G	O	Common output to FL tube.
29	SCOR	I	Subcode sync signal S0 + S1 detection input from IC301 (CXD2500AQ).
30	—	—	Not used (open).
31	+5V	--	+5V
32	RST	I	Reset input.
33	+5V	--	+5V
34	VDD	--	Power voltage terminal (+5V).
35 - 40	KEY0 - KEY5	I	Key A/D input.
41	—	—	Not used (Ground).
42	TIMER SW	I	Auto play select input (Auto play "L").
43	—	—	Not used (Ground).
44	CLK	O	Serial data transfer clock output to IC301 (CXD2500AQ).
45	DATA	O	Serial data output to IC301 (CXD2500AQ).
46	—	—	Not used (Ground).
47	FOK	I	Focus OK signal input from IC101 (CXA1372Q).
48	GFS	I	Frame sync signal clock status input from IC301 (CXD2500AQ).
49	SUBQ	I	Sub code (Q data) serial input from IC301 (CXD2500AQ).
50	SQCLK	O	Sub code (Q data) readout clock output to IC301 (CXD2500AQ).
51	XLT	O	Serial data latch output.
52	PRGL	O	Attenuate data latch clock output to IC302 (CXD2554P).
53	LDON	O	Laser diode ON/OFF select output of optical pick-up.
54	AMUT	O	Muting output for IC301 (CXD2500AQ) and Q344 (2SC3399). Muting on by "H", Muting off by "L".
55 - 58	B0 - B3	—	Not used (+5V)
59	DEFECT SW	O	Defect circuit ON/OFF select output to IC101 (CXA1372Q).
60	—	—	Not used (open).
61	SENSE	I	SENS signal input from IC301 (CXD2500AQ).
62	RMC	I	Remote control signal input.
63	INSW	I	Input for loading out switch.
64	OUTSW	I	Output for loading in switch.
65	ADJ	I	Tset mode input. GFS check will not activate by "L".
66	AFADJ	I	Test mode input. All test operation will be activate by "L" mode when power on.
67	LODIN	O	Output for turn the loading motor to loading.
68	LODOUT	O	Output for turn the loading motor to un loading.
69	LED	O	Output for motor volume LED lighting.
70	—	—	Not used (open).
71	Vss	—	Ground.
72	XTAL	O	Clock output.
73	+5V	—	+5V
74	EXTAL	I	Clock input. (4MHz)
75	+5V	—	+5V
76	-30V	I	Power voltage -30V for built in FL tube controller.
77	—	O	Not used (open).
78	—	O	Not used (open).
79	VDL DOWN	O	Output for motor volume down. (This set is not used).
80	VOL UP	O	Output for motor volume up. (This set is not used).

SECTION 2


ELECTRICAL BLOCK CHECKING

Note :

1. CD Block basically constructed to operate without adjustment. Therefore, check each item in order given.
2. Use YEDS-18 disc (3-702-101-01) unless otherwise indicated.
3. Use the oscilloscope with more than $10M\Omega$ impedance.
4. Clean an object lens by an applicator with neutral detergent when the signal level is low than specified value with the following checks.

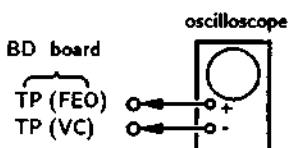S Curve Check**Procedure :**


1. Connect oscilloscope to test point TP (FEO) on BD board.
2. Connect between test point TP (FES) and TP (VC) by lead wire.
3. Turned Power switch on and actuate the focus serch. (actuate the focus serch when disc table is moving in and out.)
4. Check the oscilloscope waveform (S curve) is symmetrical between A and B. And confirm peak to peak level within $3 \pm 1V_{p-p}$.

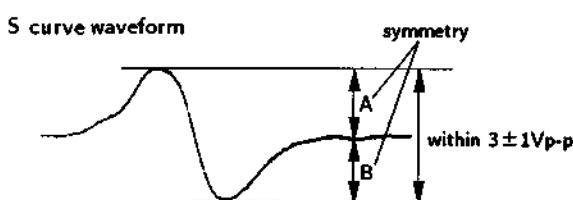

5. After check, remove the lead wire connected in step 2.

Note :

- Try to mesure several times to make sure that the ratio of A : B or B : A is more than 10 : 7.
- Take sweep time as long as possible and light up the brightness to obtain best waveform.


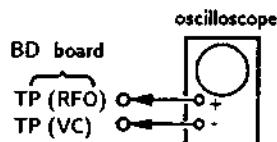
RF Level Check**Procedure :**

1. Connect oscilloscope to test point TP (RFO) on BD board.
2. Turn Power switch on.
3. Put disc (YEDS-18) in and playback.
4. Confirm that oscilloscope waveform is clear and check RF signal level is correct or not.

Note :

Clear RF signal waveform means that the shape "◇" can be clearly distinguished at the center of the waveform.

RF signal waveform VOLT/DIV : 200mV
TIME/DIV : 500nS

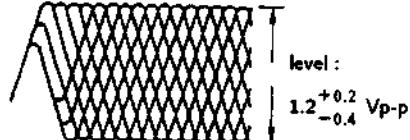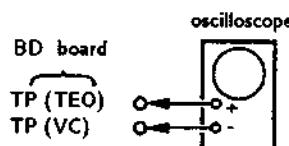**E-F Balance Check****Procedure :**


1. Connect test point TP (ADJ) to ground and TP (TES) to TP (VC) with lead wire.
2. Connect oscilloscope to test point TP (TEO) on BD board.
3. Turn Power switch on.
4. Put disc (YEDS-18) in and playback.
5. Confirm that the osilloscope waveform is symmetrical on the top and bottom in relation to 0V, and check this level.

Traverse oscilloscope

6. Remove the lead wire connected in step 1.

RF PLL Free-run Frequency Check**Procedure :**

1. Connect frequency counter to test point (PLCK) with lead wire.

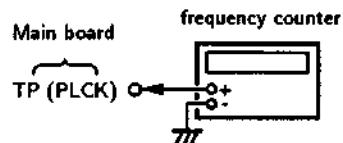



2. Turn Power switch on.
3. Confirm that reading on frequency counter is
4. 3218MHz.

Focus/Tracking Gain

This gain has a margin, so even if it is slightly off. There is no problem.

Therefore, do not perform, this adjustment.

Please note that it should be fixed to mechanical center position when you moved and do not know original position.

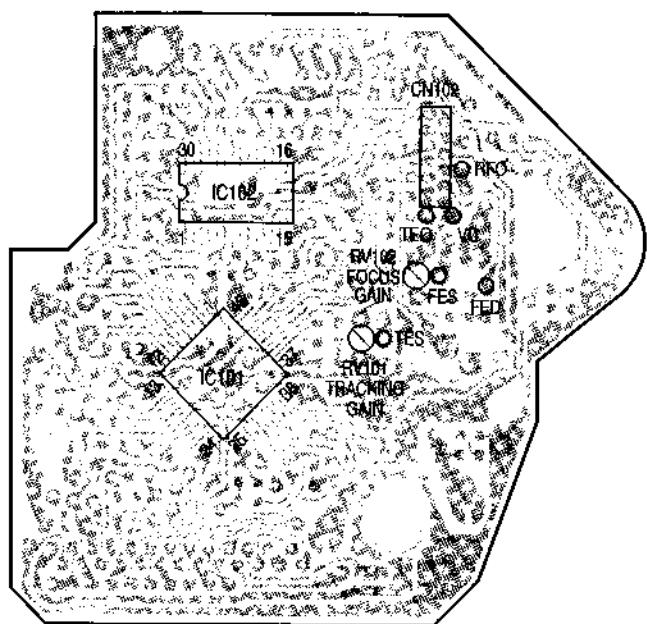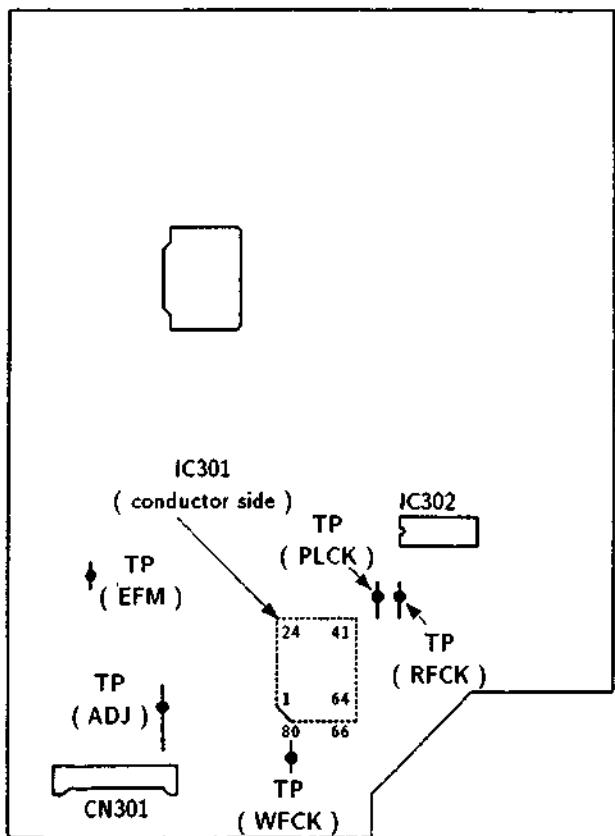
[BD BOARD] – Component Side –**Adjustment Location ;****[MAIN BOARD] – Component Side –**

SECTION 3
DISASSEMBLY OF BASEUNIT


Note :


Follow the disassembly procedure in the numerical order given.

- ① Turn the cam to the direction of arrow (Counter clock wise) by minus screw driver.
- ② Take off the disc table.
- ③ Remove the yoke bracket.
- ④ Remove the MD (BU-5BD1) to the direction of arrow.






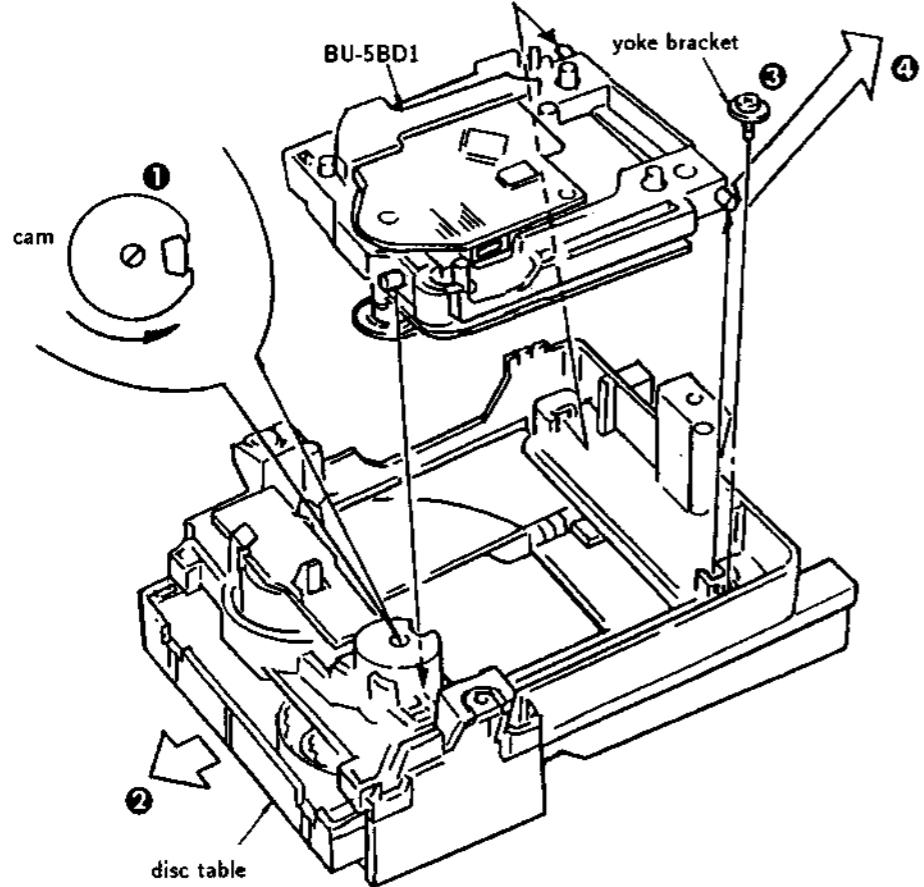


SECTION 4
DIAGRAMS

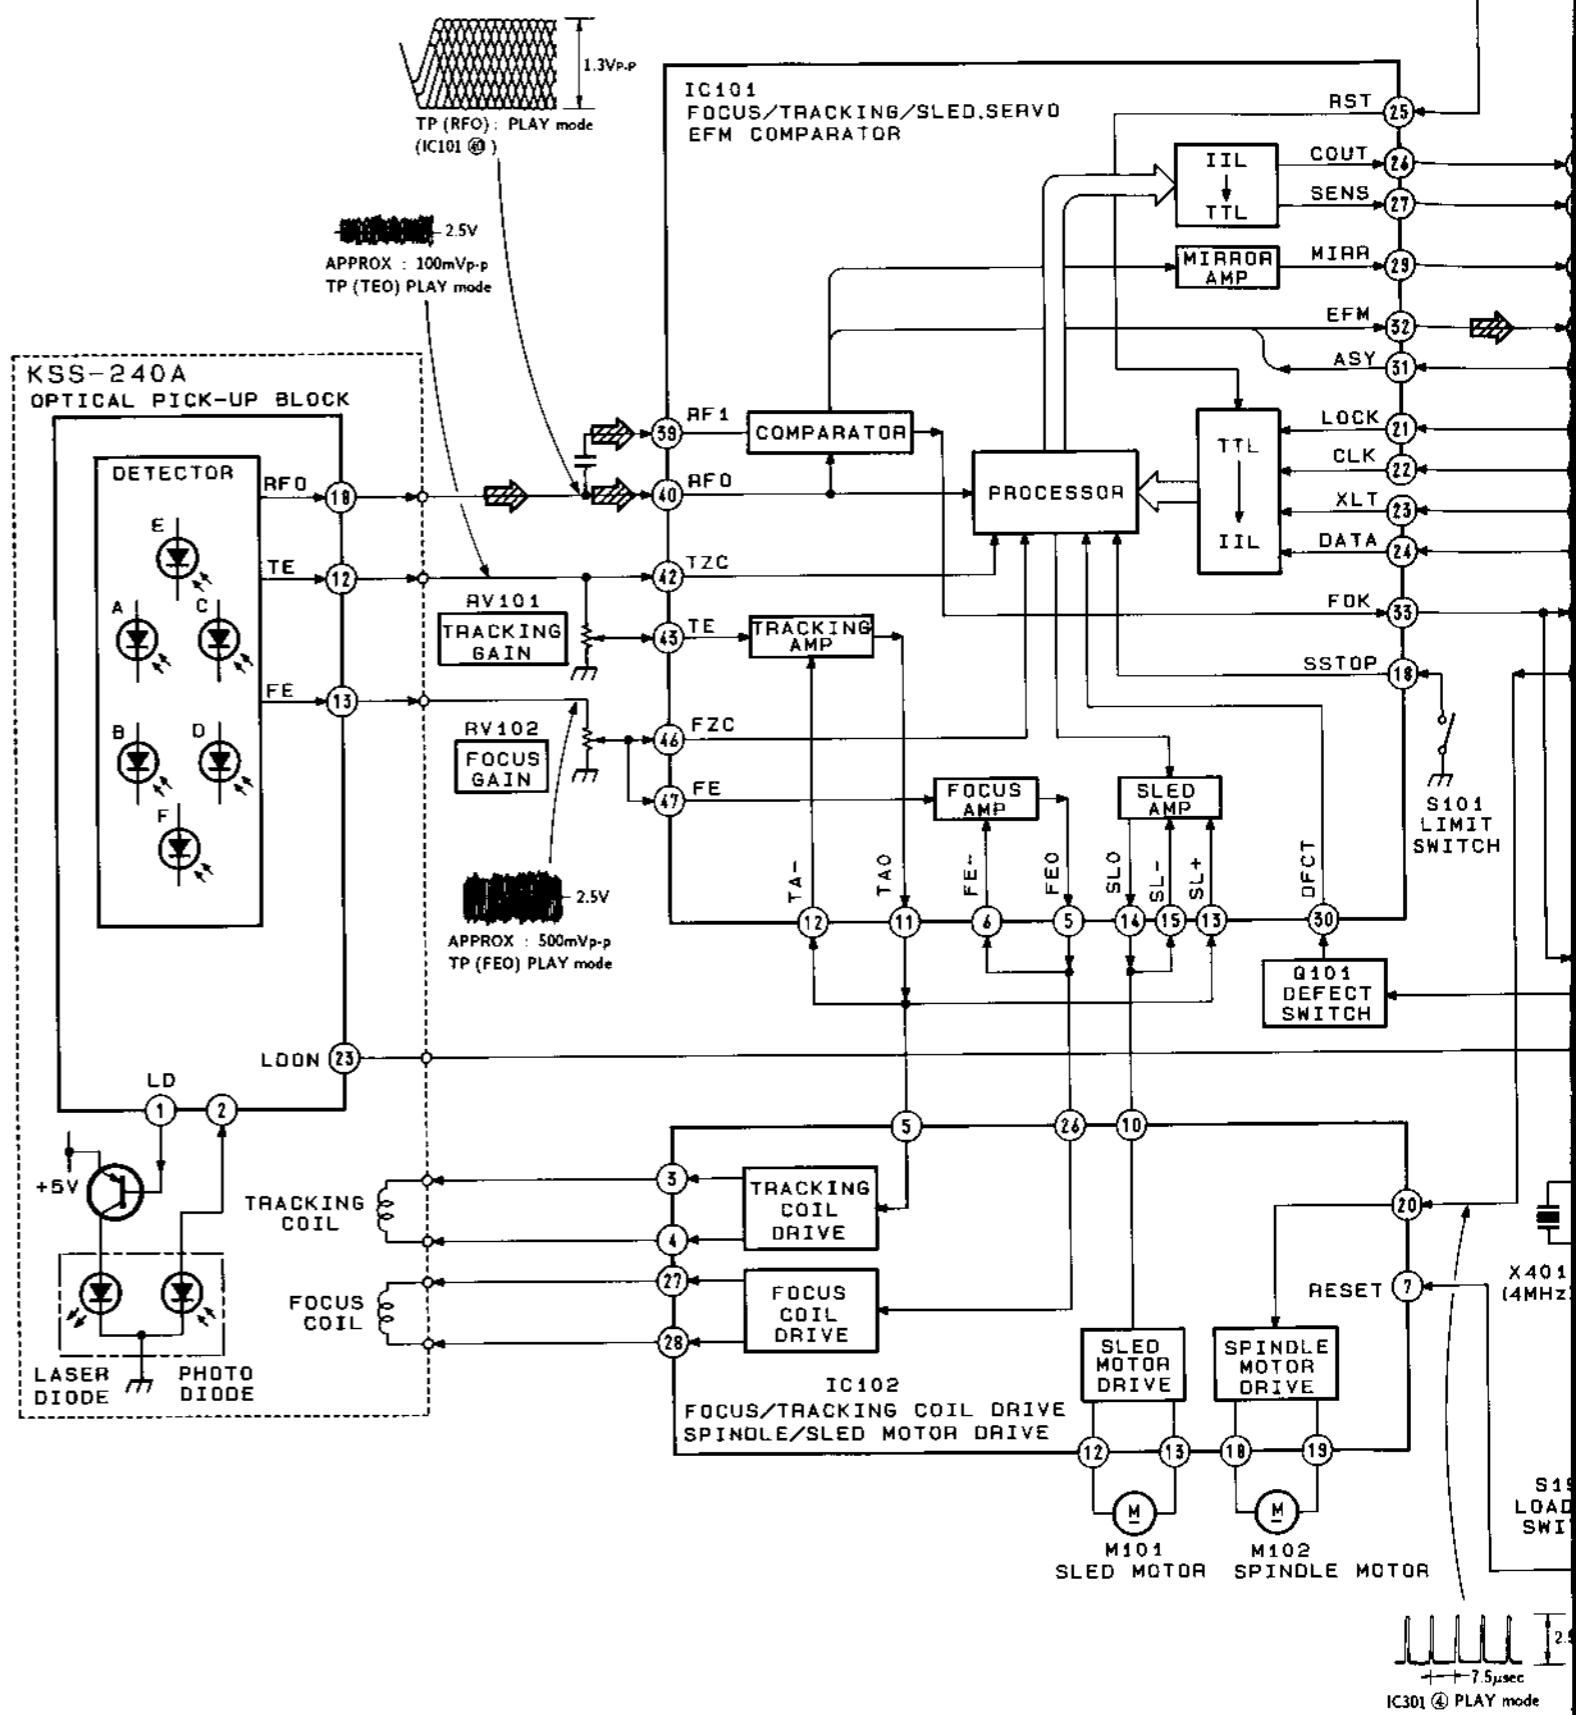4-1. BLOCK DIAGRAM

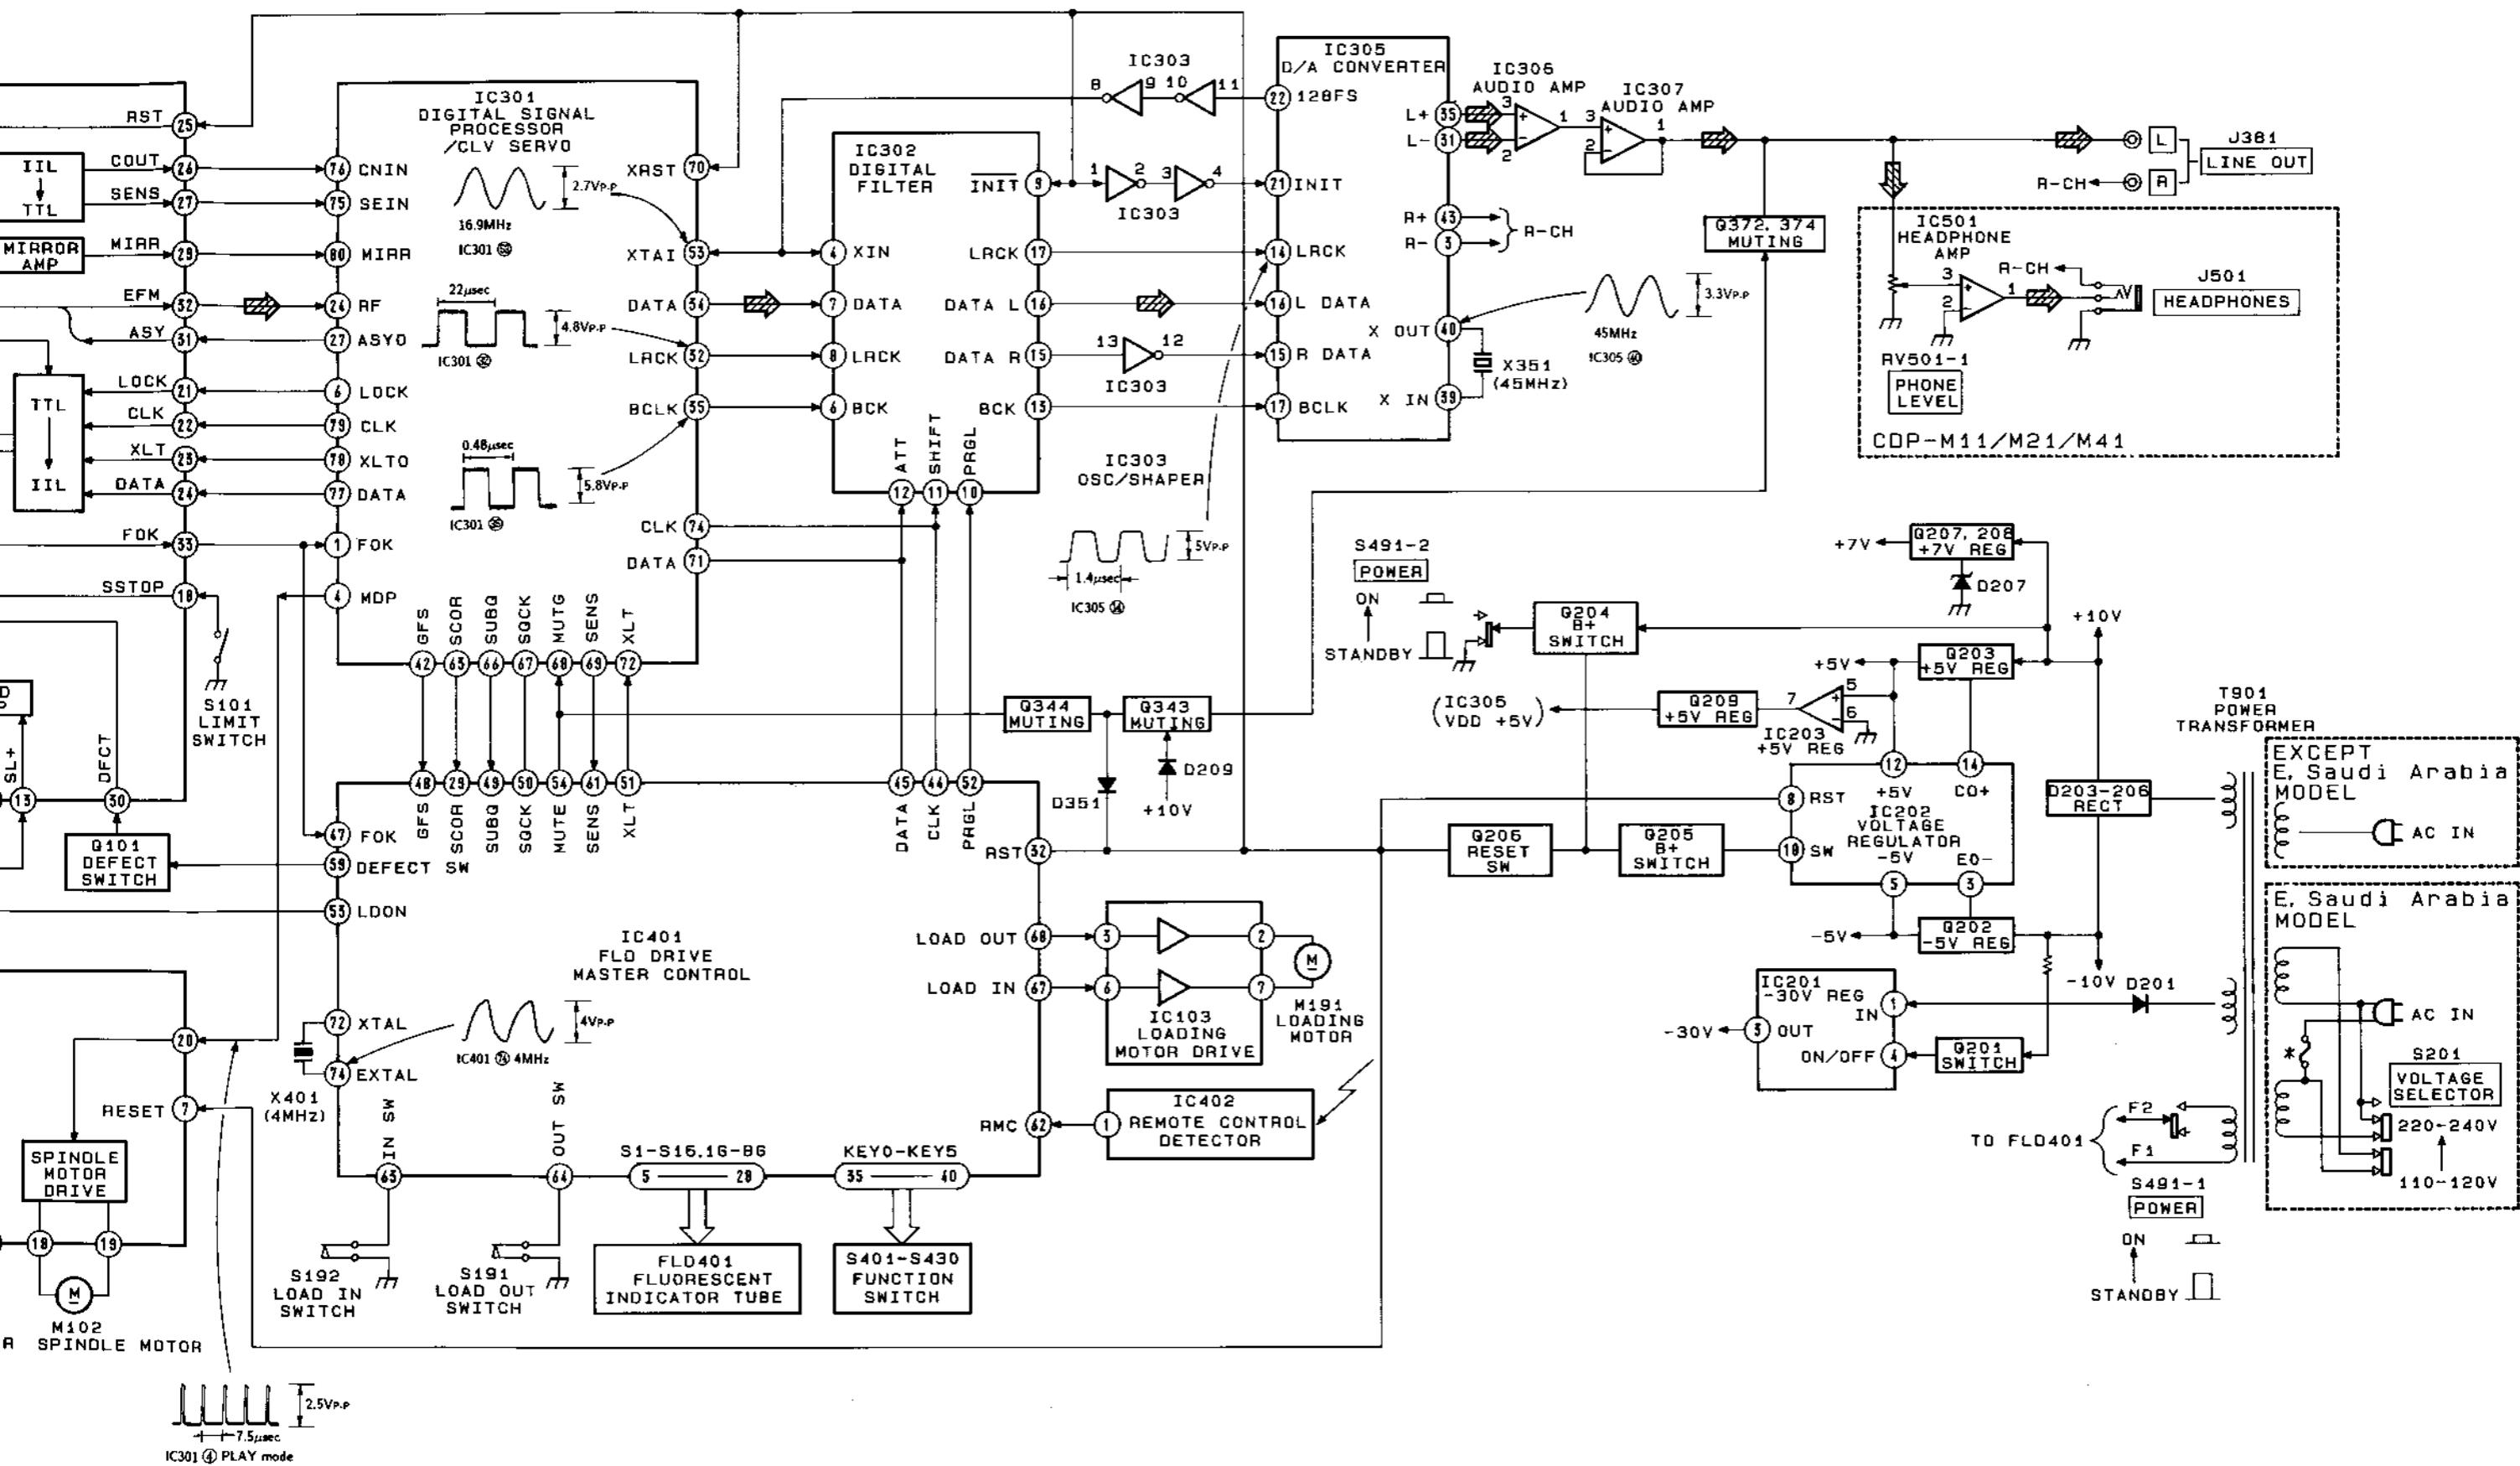

4-2. WAVEFORMS

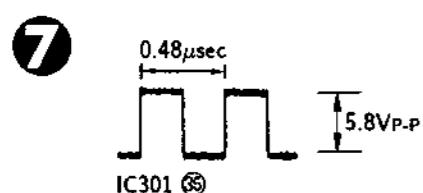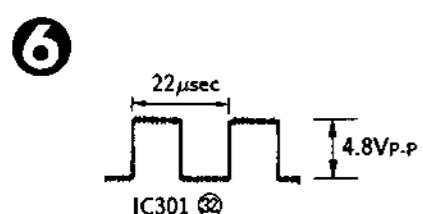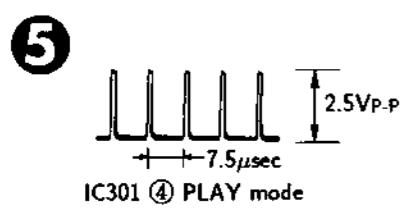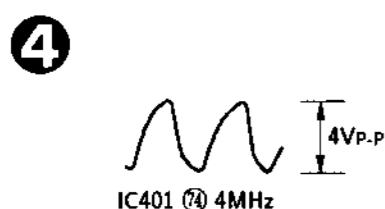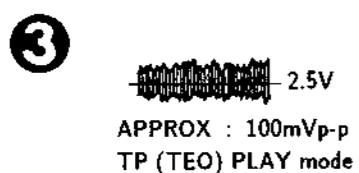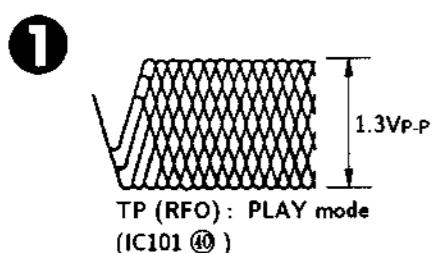

• SEMICONDUCTOR LOCATION


Ref. No.	LOCATION No.	Ref. No.	LOCATION No.
D101	F-4	IC306	C-16
D201	E-20	IC307	C-16
D202	I-20	IC401	C-7
D203	E-19	IC402	C-6
D204	E-19	IC501	H-11
D205	E-19	Q101	I-3
D206	E-19	Q201	F-20
D207	G-20	Q202	G-19
D208	F-18	Q203	F-19
D209	F-18	Q204	H-19
D341	F-17	Q205	H-19
D351	G-15	Q206	H-19
IC101	H-3	Q207	G-20
IC102	G-3	Q208	F-20
IC103	F-3	Q209	F-17
IC201	F-20	Q343	D-15
IC202	G-19	Q344	G-14
IC203	G-17	Q371	B-16
IC301	H-17	Q372	C-17
IC302	G-16	Q373	B-16
IC303	F-15	Q374	C-17
IC305	F-16		

Note:


- : indicated a lead wire mounted on the component side.
- : indicated a lead wire mounted on the conductor side.
- : Through hole.
- : Pattern from the side which enables seeing.
- ▨ : Pattern of the rear side.

"Semiconductor Lead Layouts" is inserted on P21.

4-3. PRINTED WIRING BOARDS

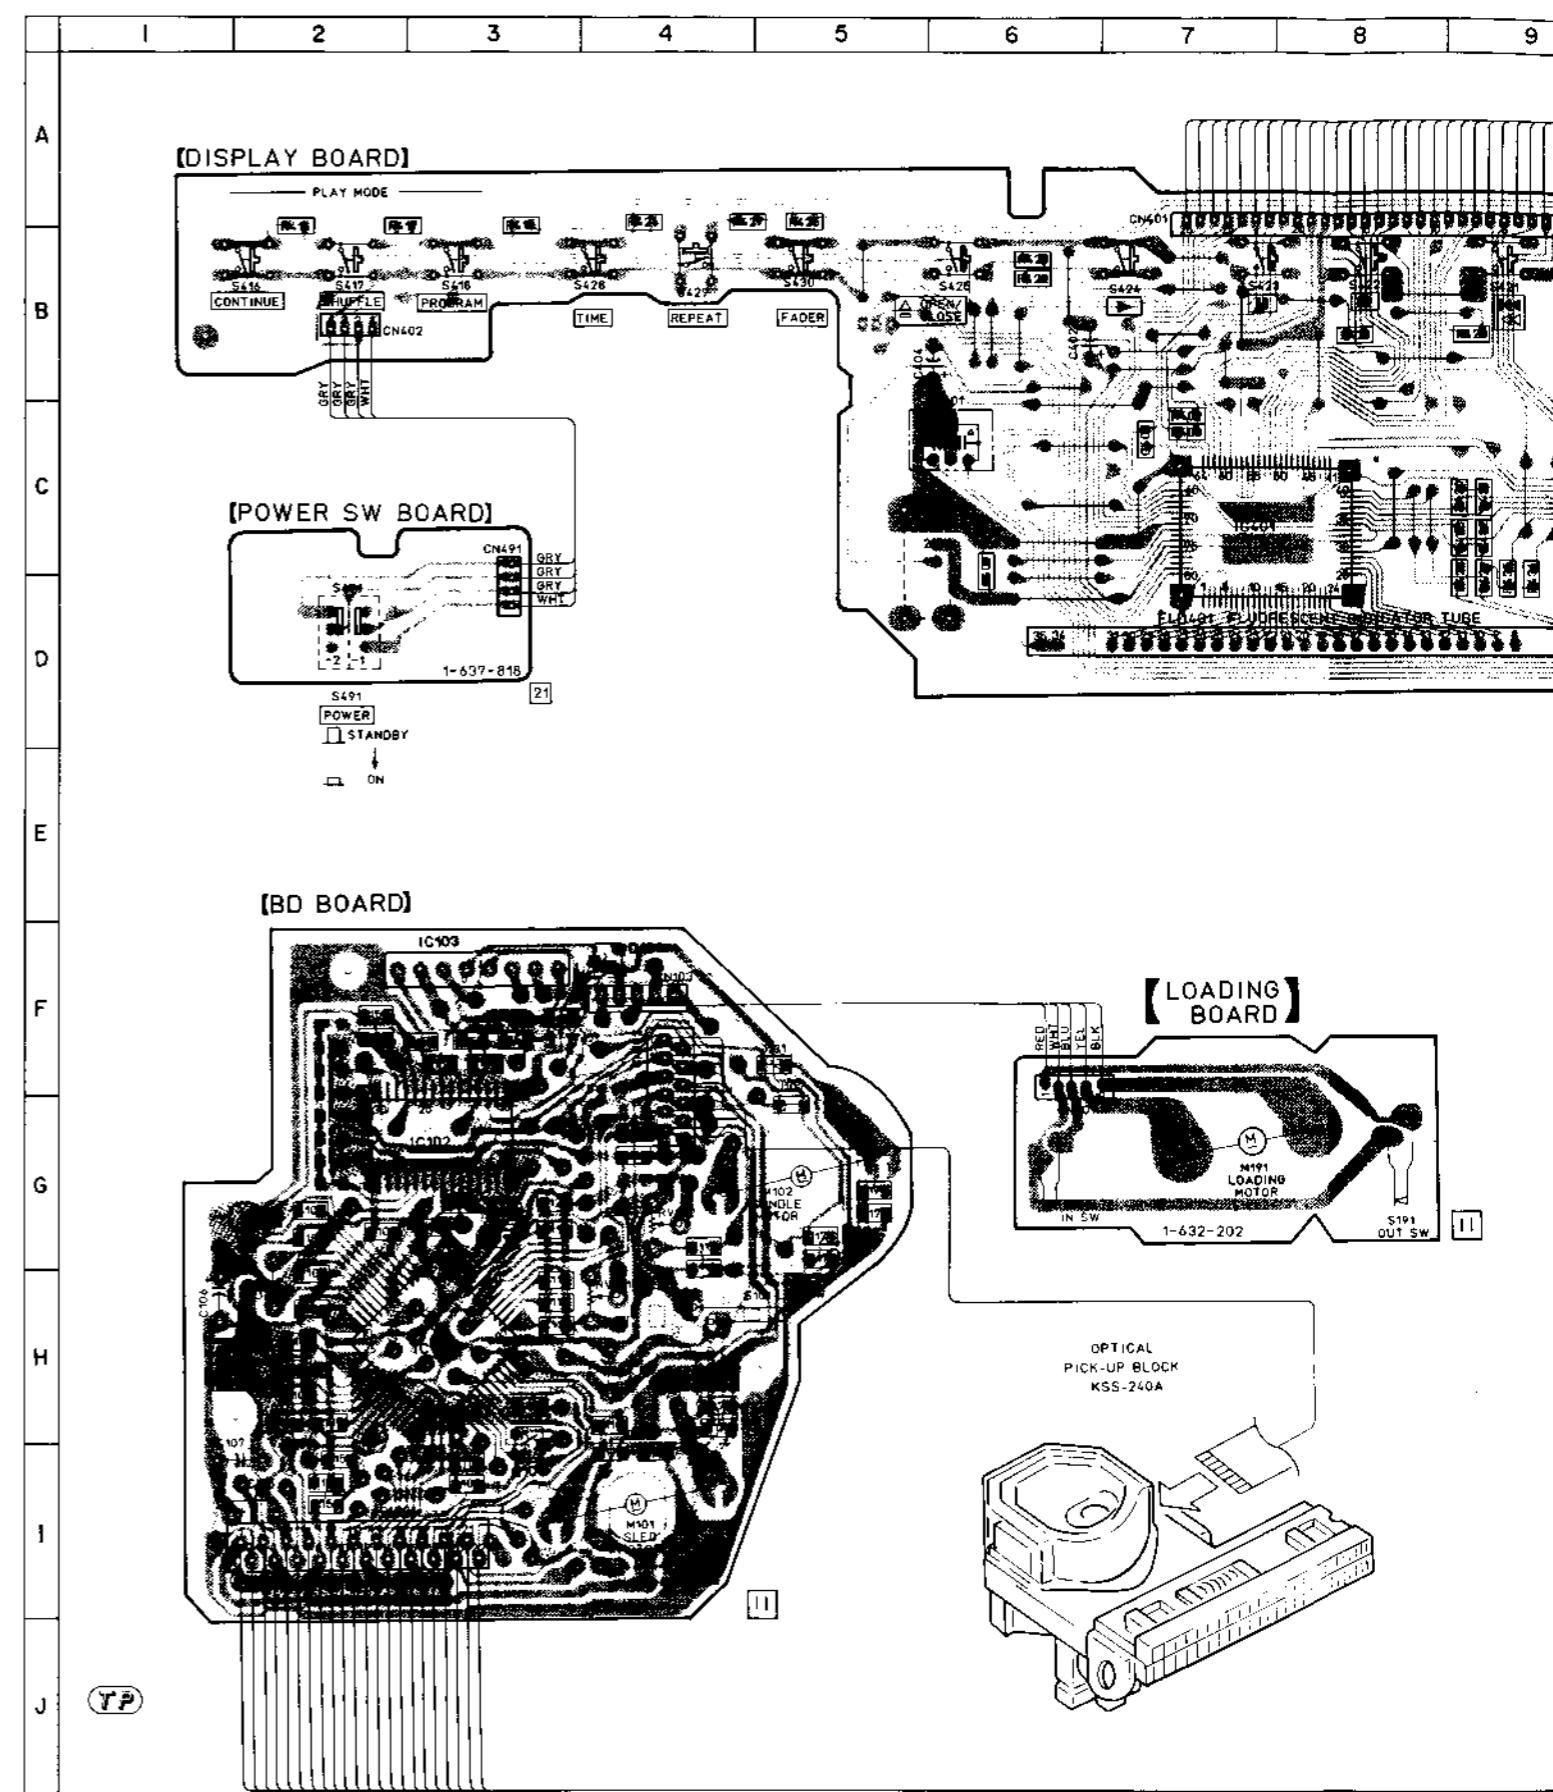

7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24


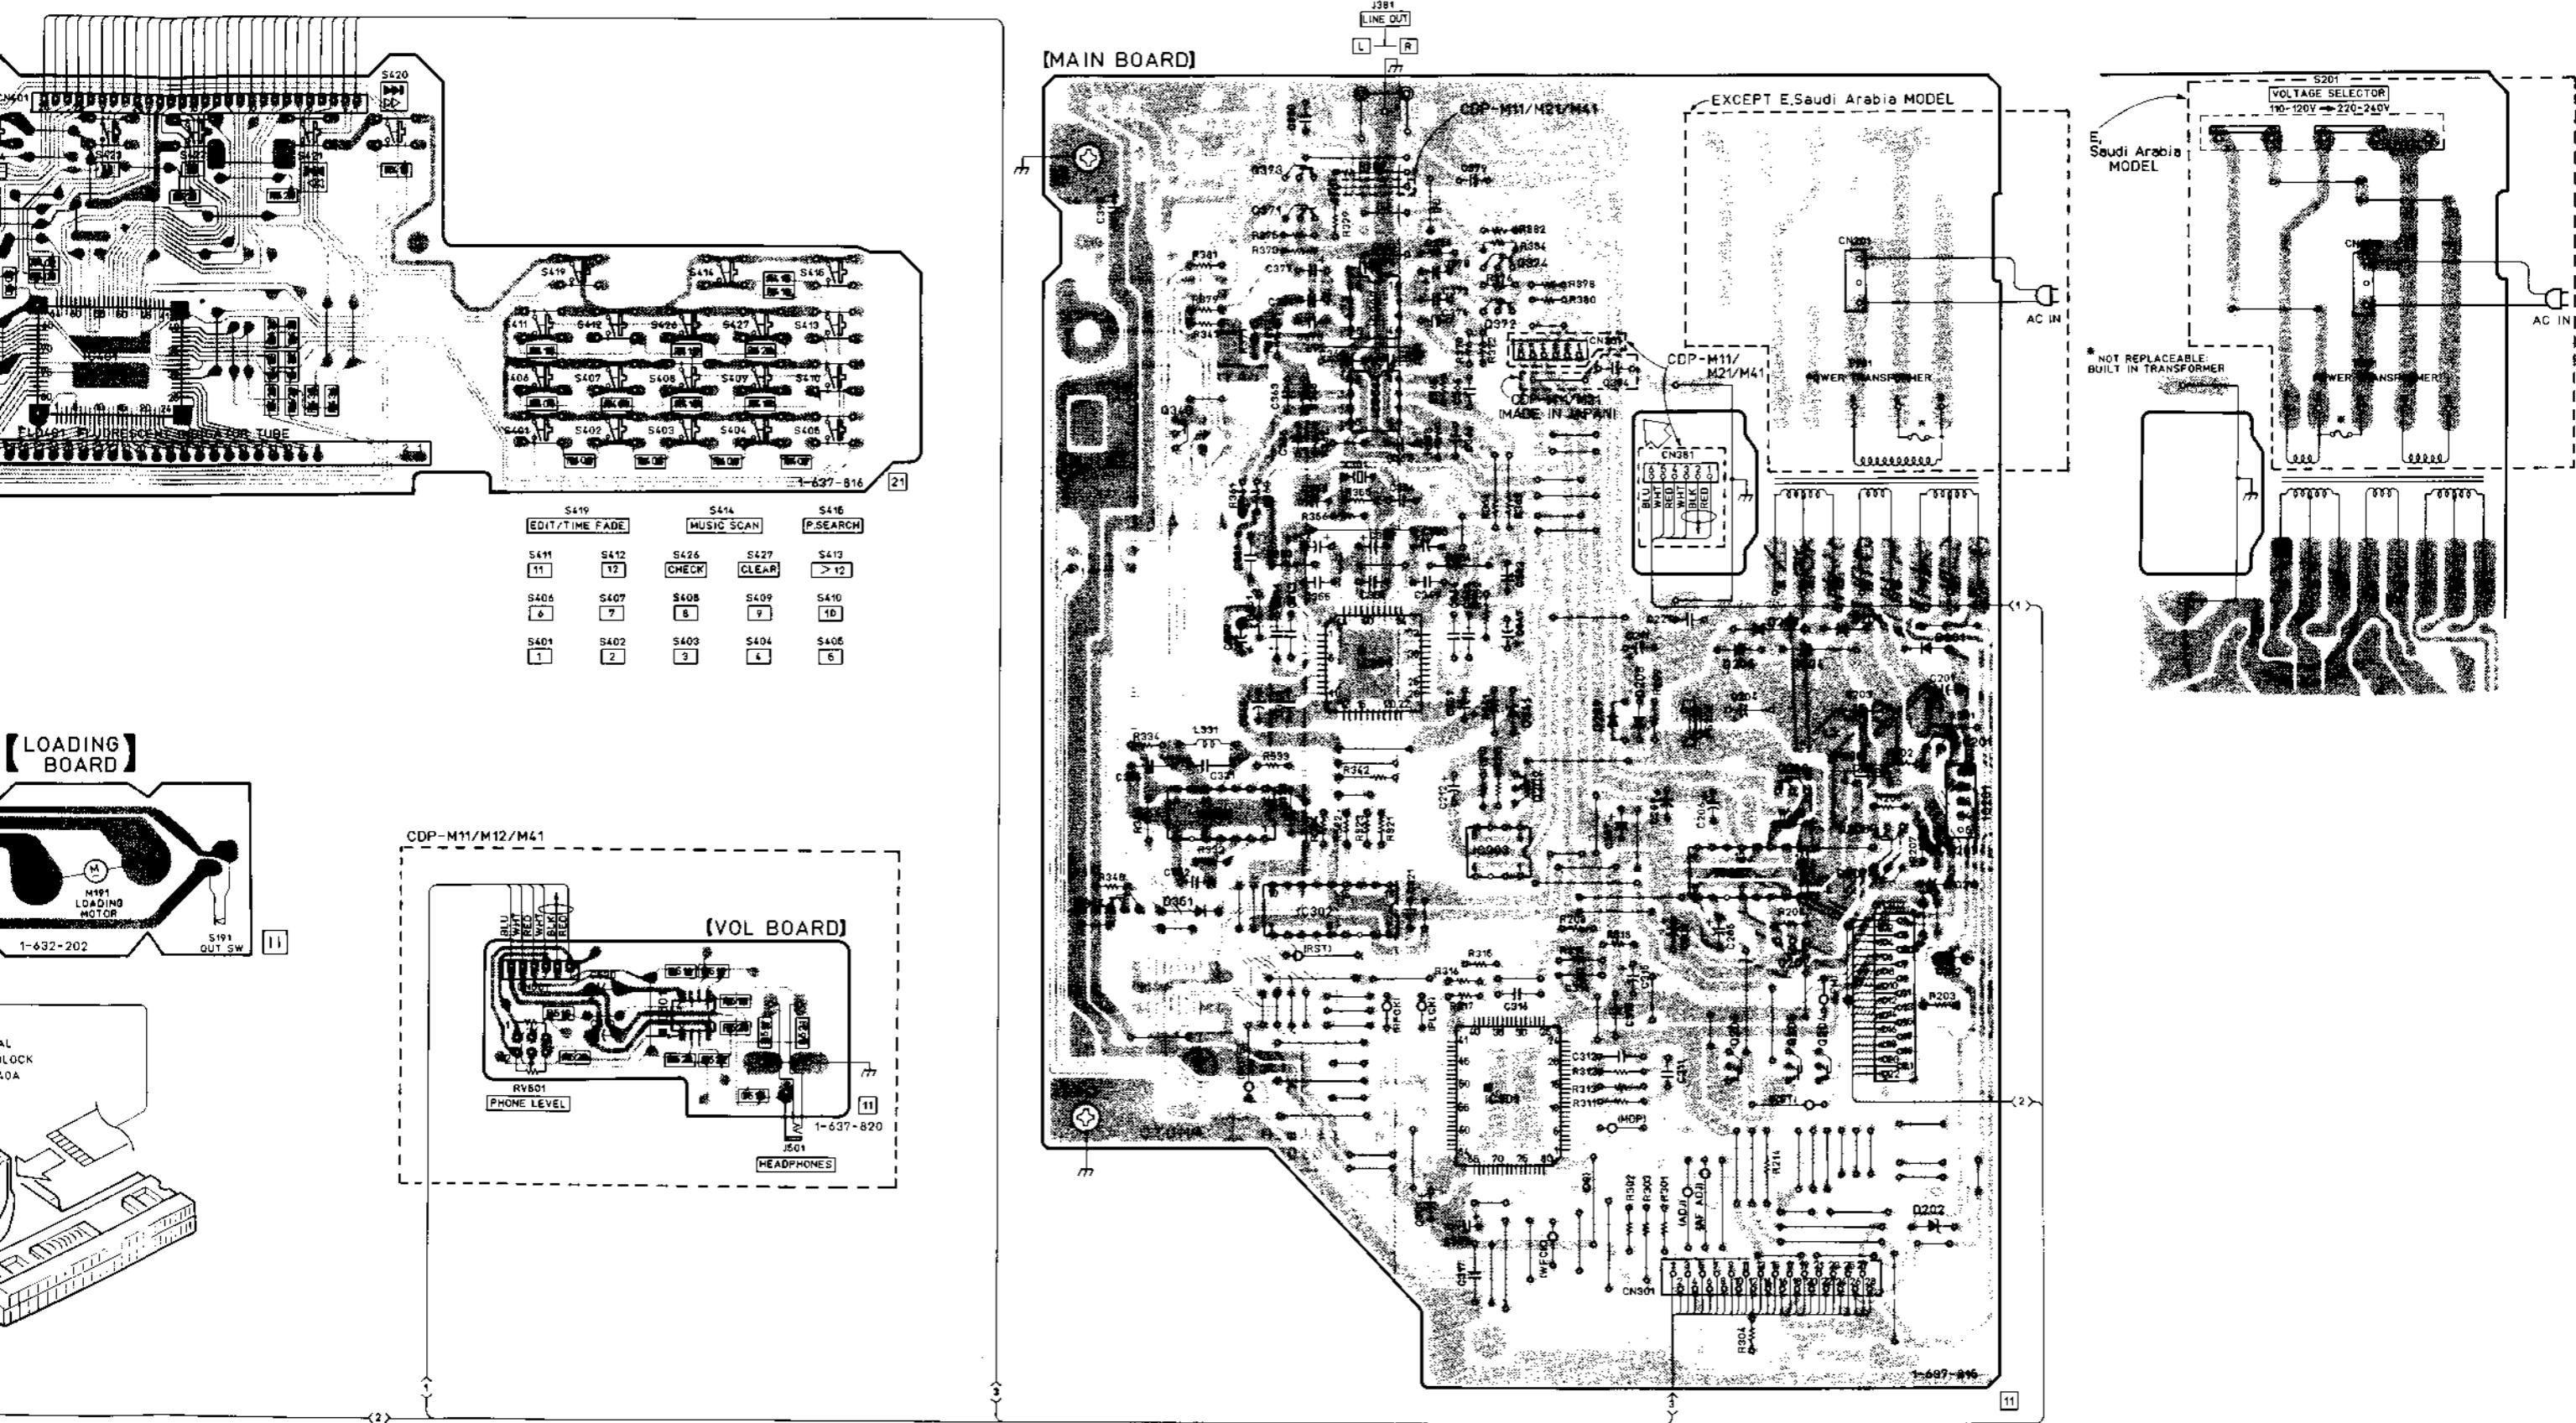


4-4. SCHEMATIC DIAGRAM

1 2 3 4 5 6 7 8 9 10 11

A
B
C
D
E
F
G
H
I
J
K


[DISPLAY BOARD]

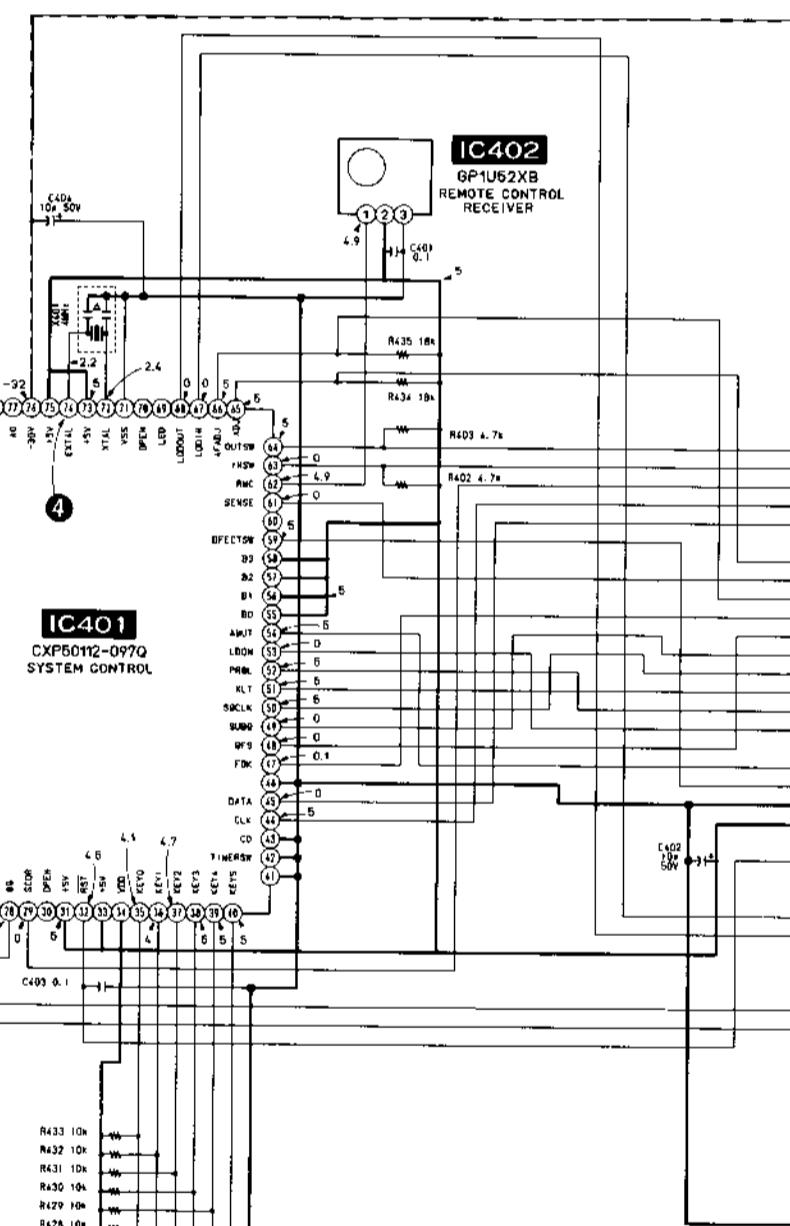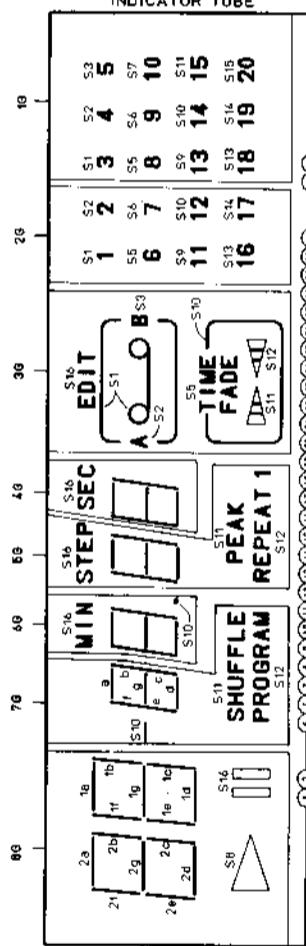FLD401
FLUORESCENT
INDICATOR TUBE


- | | | | | | |
|------|------|------|------|------|------|
| S406 | S410 | S416 | S420 | S425 | S430 |
| S404 | S409 | S414 | S419 | S424 | S429 |
| S403 | S408 | S413 | S418 | S423 | S428 |
| S402 | S407 | S412 | S417 | S422 | S427 |
| S401 | S406 | S411 | S416 | S421 | S426 |

PLAY MODE

[BD BOARD]

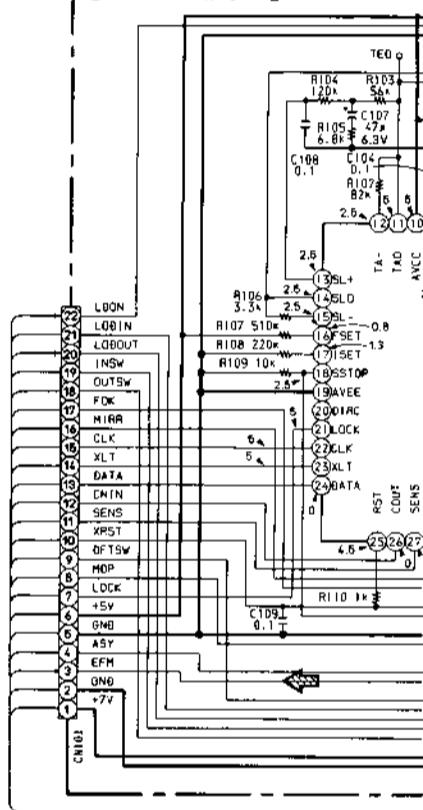

[POWER SW BOARD]



(TP)


Note:

- All capacitors are in μF unless otherwise noted. μF : μF 50WV or less are not indicated except for electrolytics and tantalums.
- All resistors are in ohms, 1/4W or less unless otherwise noted.
- Δ : internal component.

The components identified by mark Δ or dotted line with mark Δ are critical for safety.
Replace only with part number specified.

- : B+ Line.
- : B- Line.
- : adjustment for repair.
- Voltages are DC between measurement points no-signal (STOP) conditions.
- no mark : PB mode
- Voltages are taken with a VOM (input is grounded). Voltage variations may be noted due to tolerances.
- Waveforms are taken with an oscilloscope. Voltage variations may be noted due to tolerances.
- Circle numbers refer to waveforms.
- Signal path
-  : CD

11 12 13 14 15 16 17 18 19 20 21 22

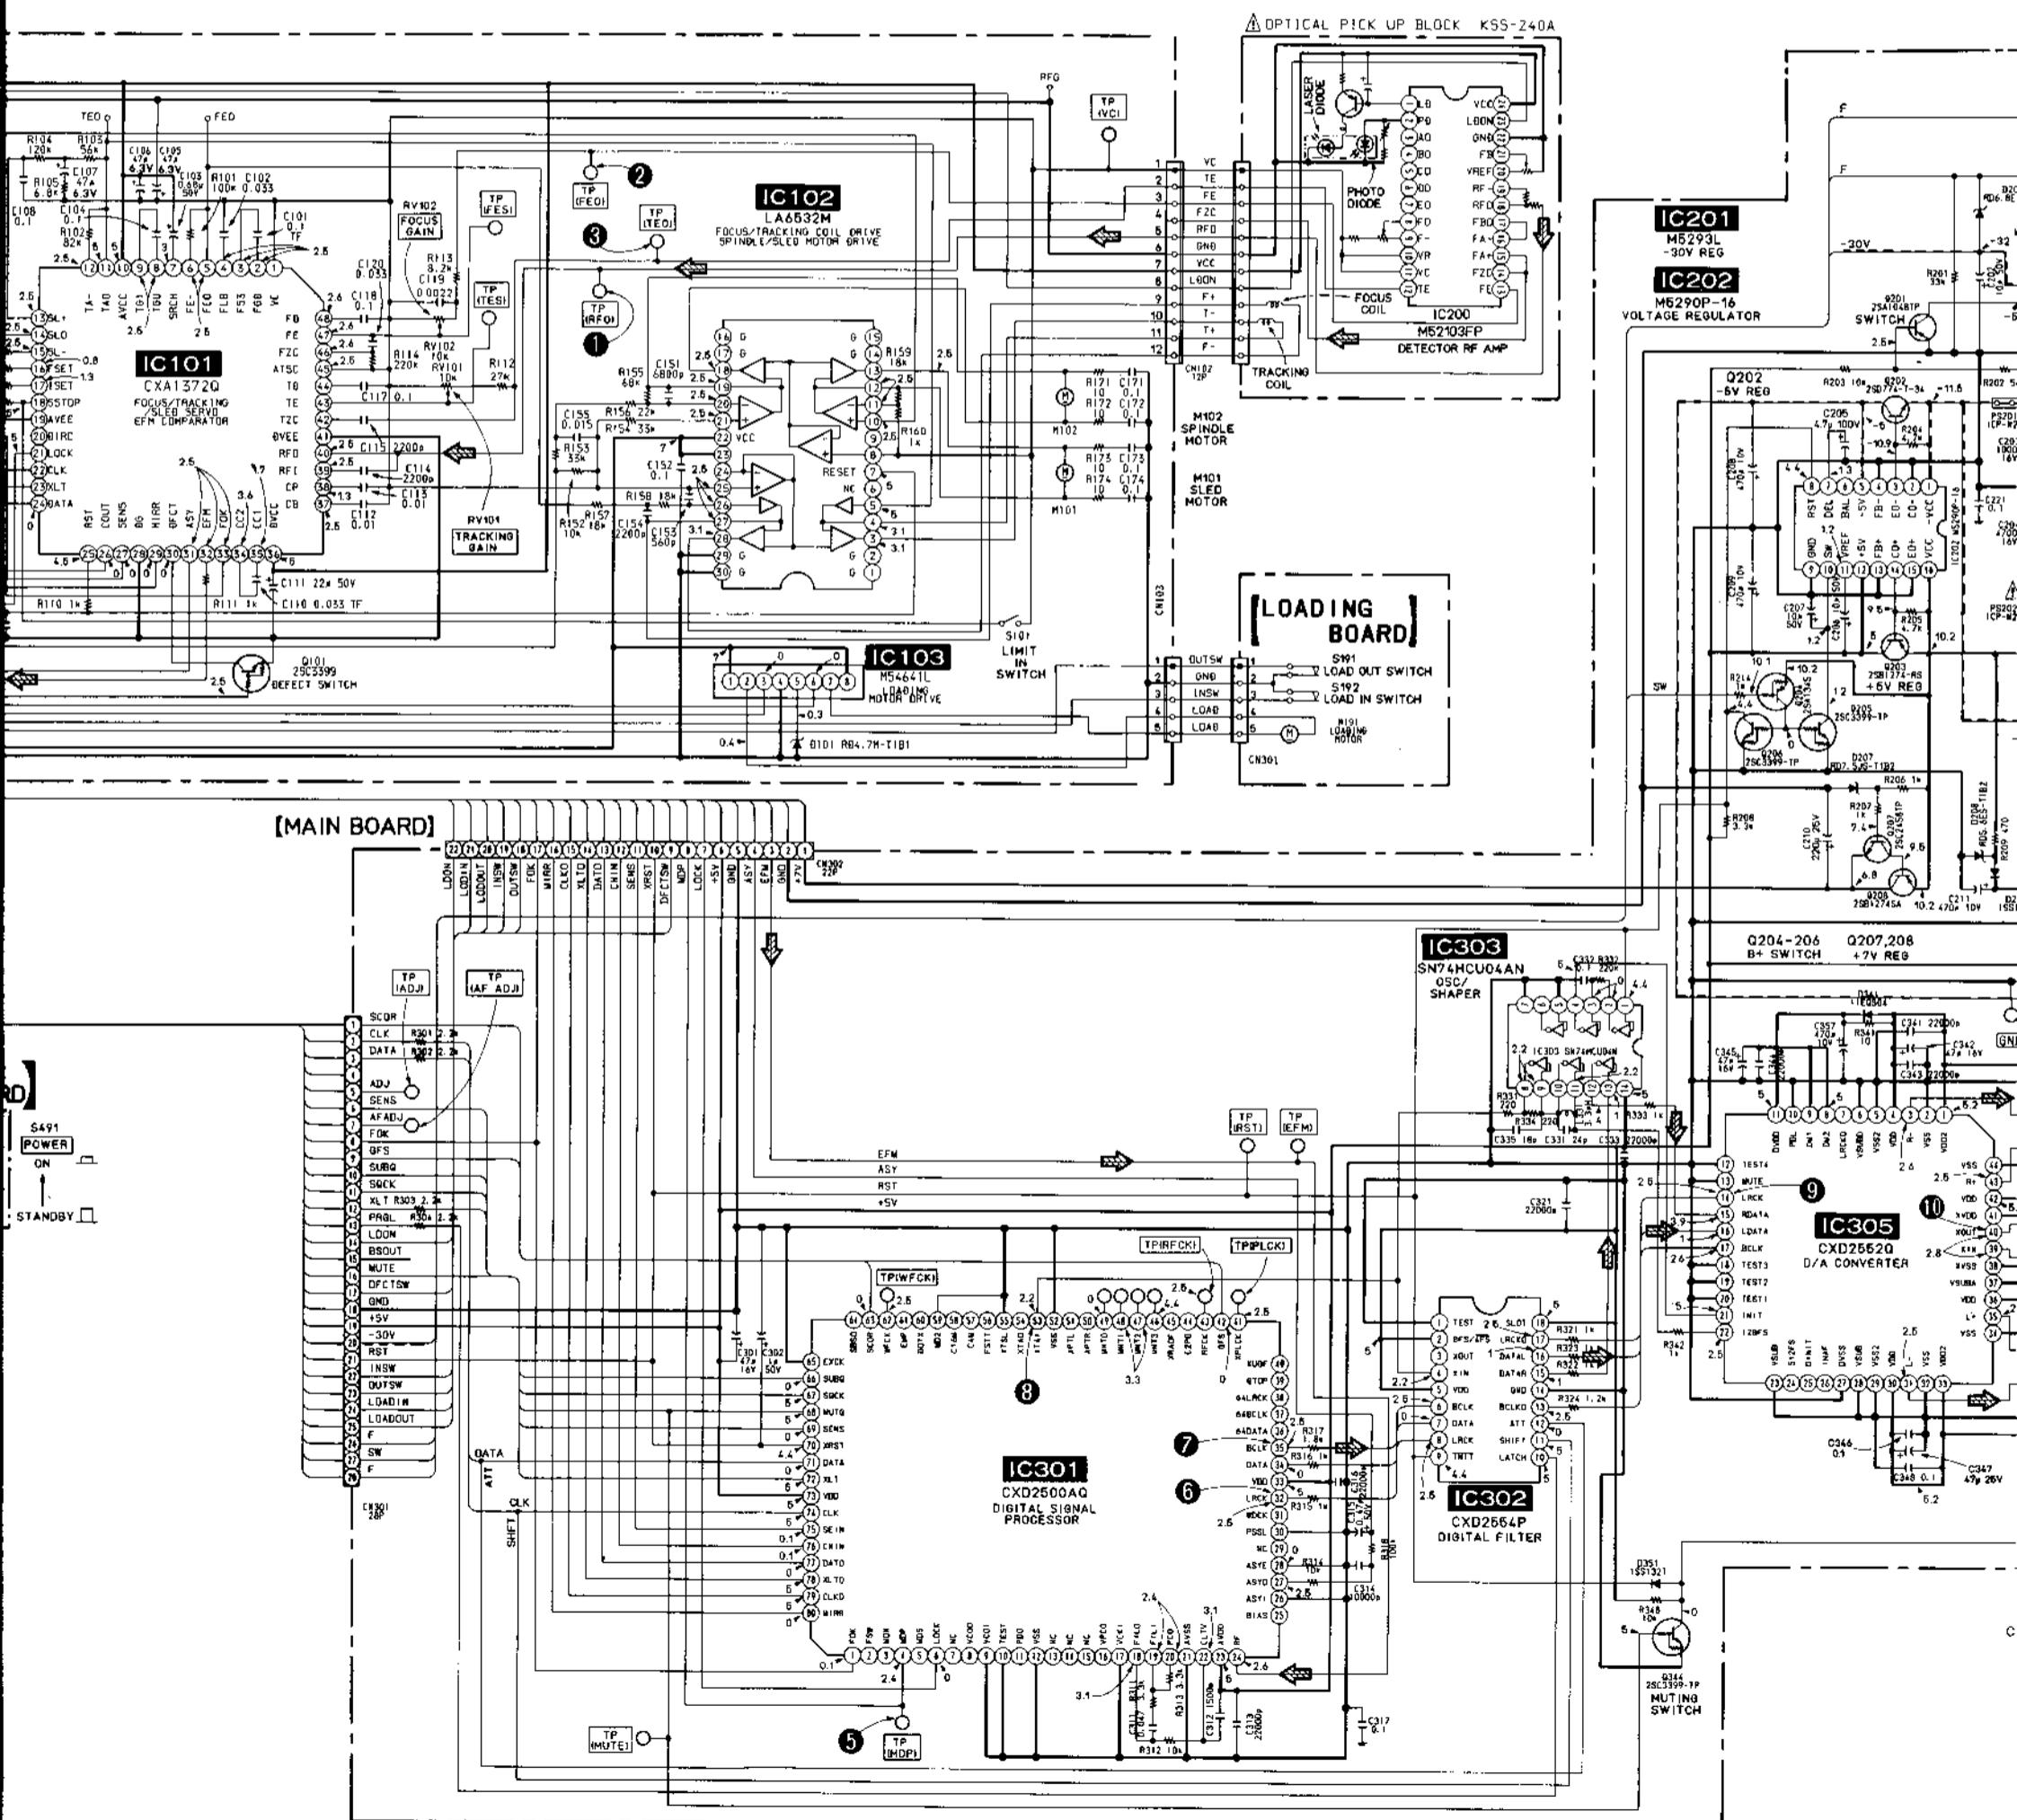


capacitors are in μF unless otherwise noted. pF: $\mu\mu\text{F}$ 50WV less are not indicated except for electrolytics and tantalums. resistors are in ohms, 1/4W or less unless otherwise noted.

Δ : internal component.




components identified by mark Δ or line with mark Δ are critical for safety. see only with part number specified.

- : B+ Line.
- : B- Line.
- : adjustment for repair.
- Voltages are DC between measurement points and ground under no-signal (STOP) conditions.
- no mark : PB mode
- Voltages are taken with a VOM (input impedance 10M Ω). Voltage variations may be noted due to normal production tolerances.
- Waveforms are taken with a oscilloscope. Voltage variations may be noted due to normal production tolerances.
- Circled numbers refer to waveforms.
- Signal path
- : CD


17 18 19 20 21 22 23 24 25 26 27

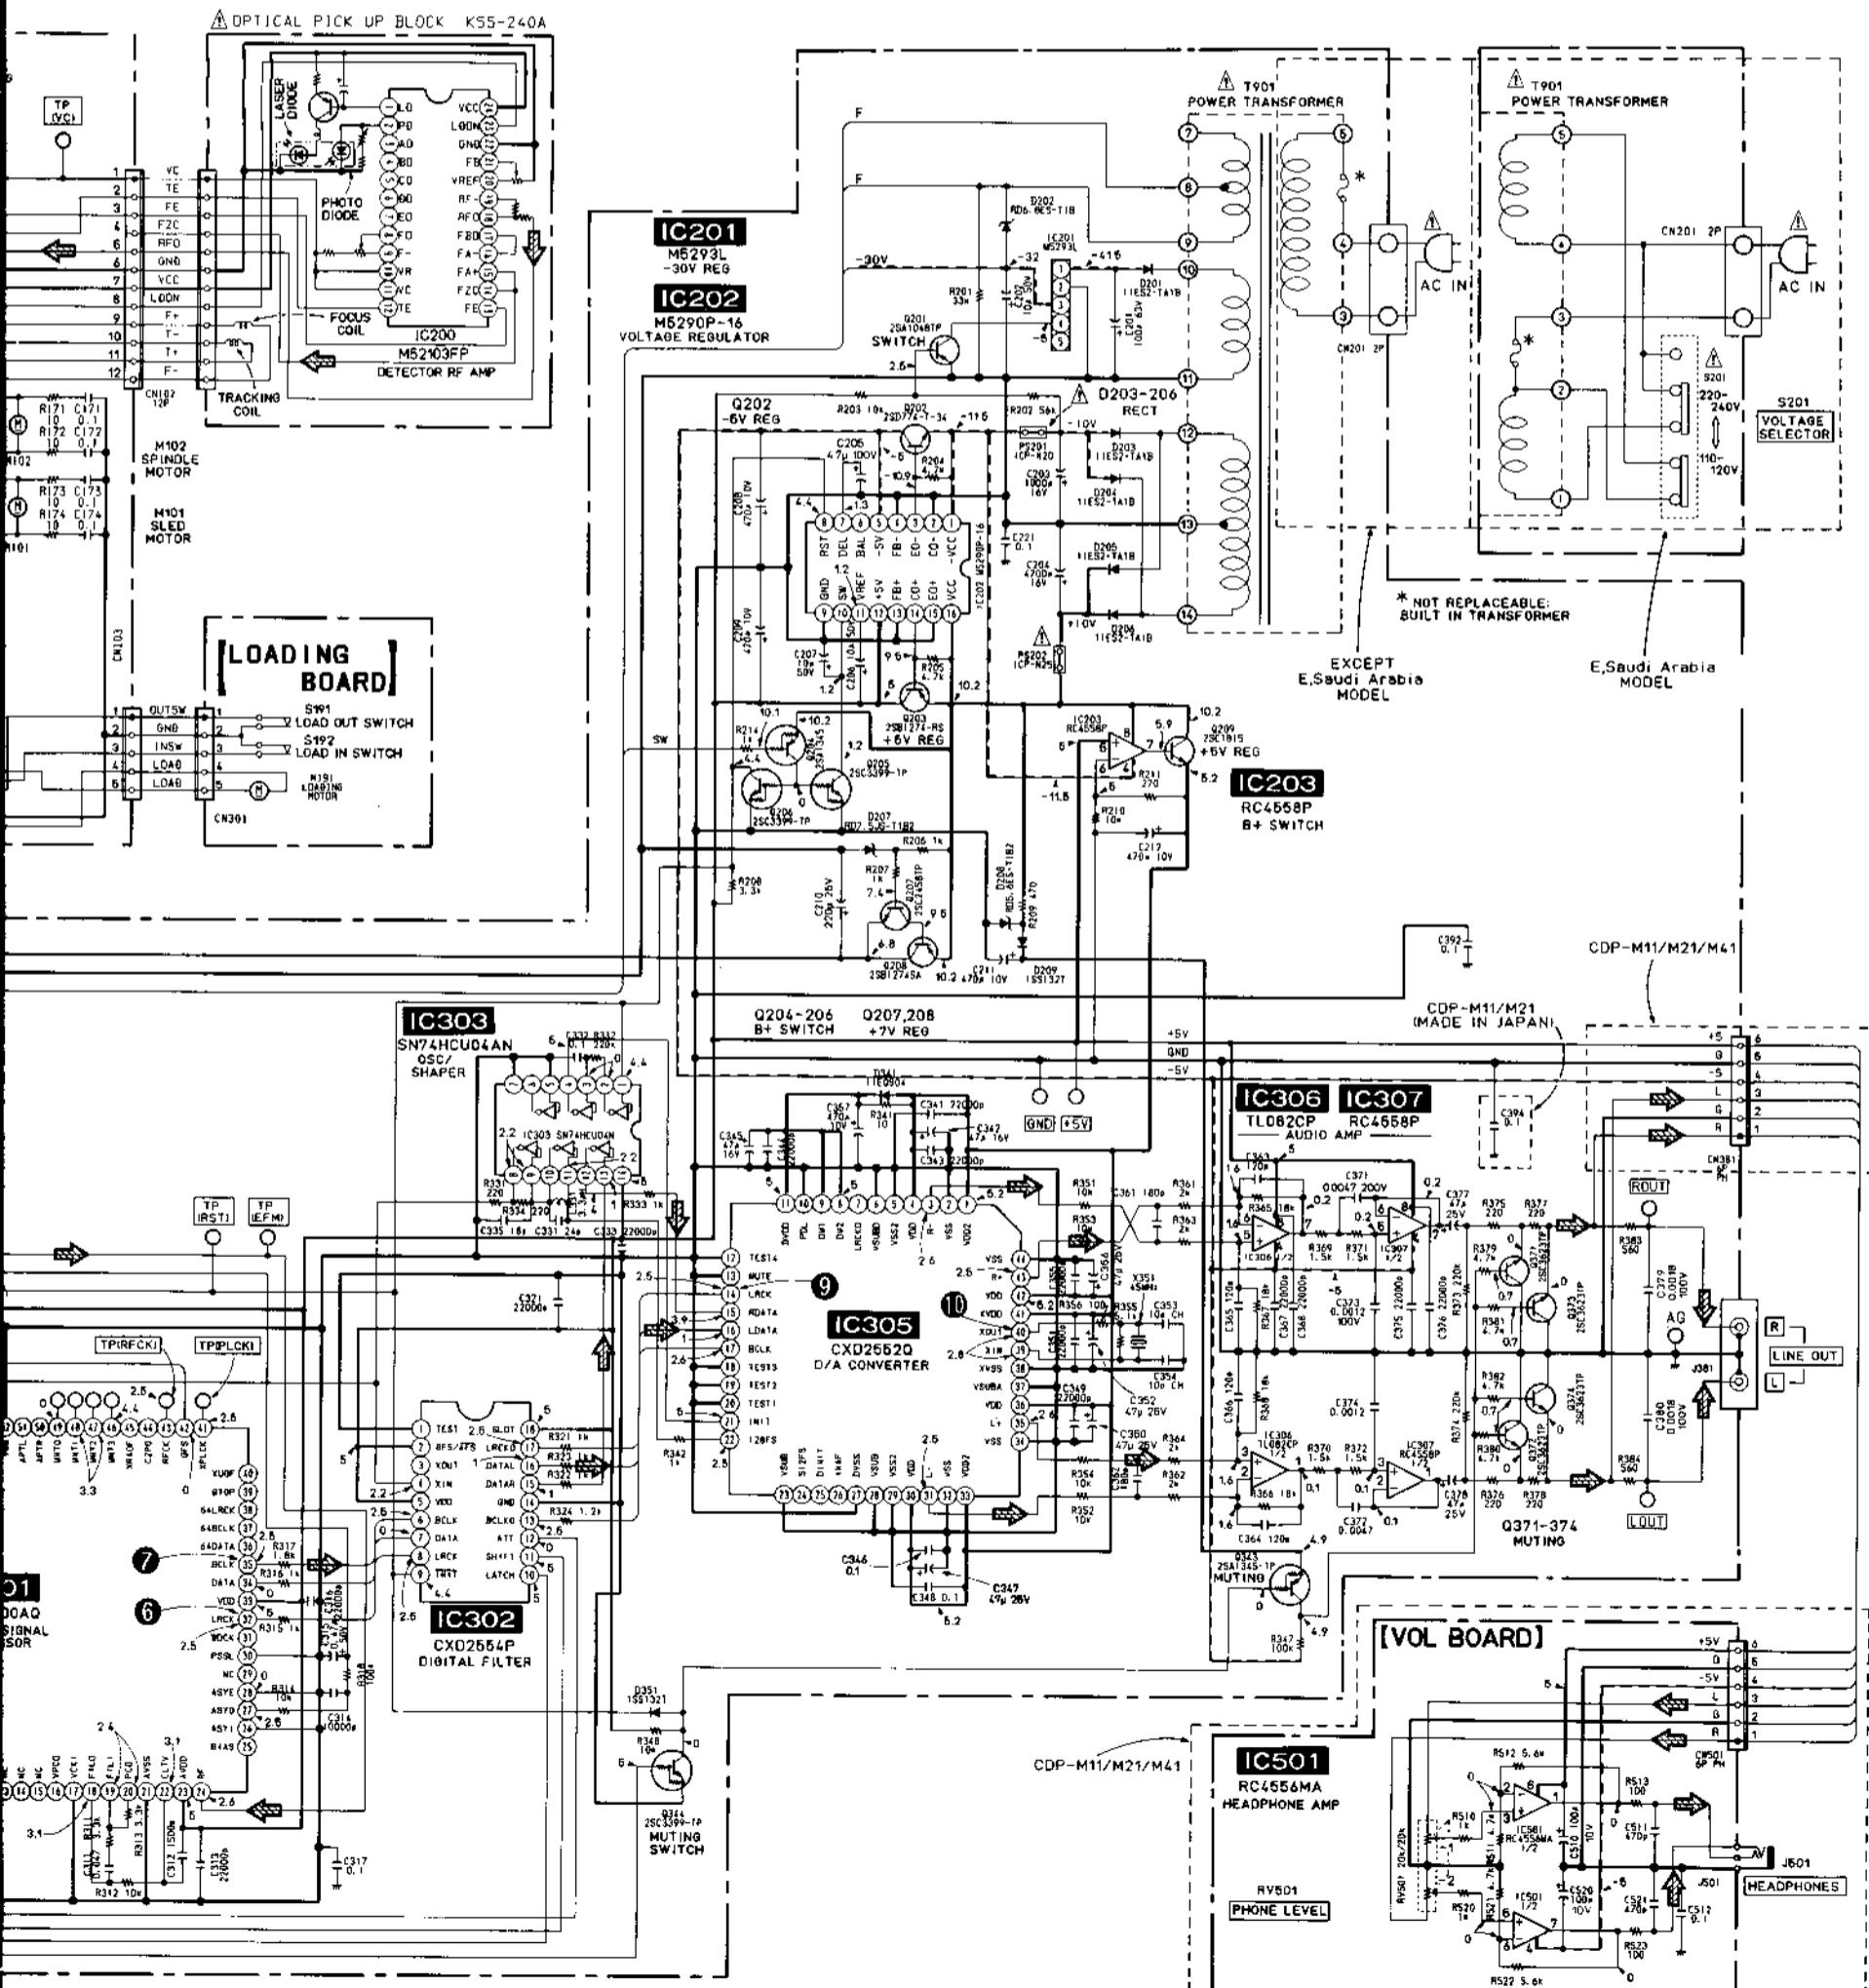


4-5. SEMICONDUCTOR LEAD LAYOUTS

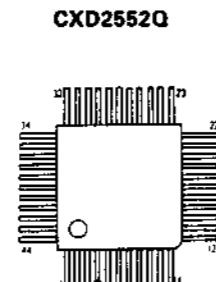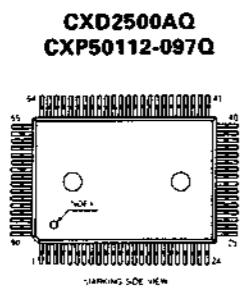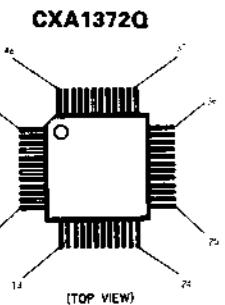


GP1U52XB




IN4148M





RD4.7M-B1



RD5.6ES-B2
RD6.8ES-B1
RD7.5JS-B2
ISS202-1
11ES2
11EQS04




2SA1175-HFE

2SB1094-L
2SB1274SA-RS

2SC1815-Y




2SD774-34




4-6. IC BLOCK DIAGRAMS


IC101 CXA1372Q

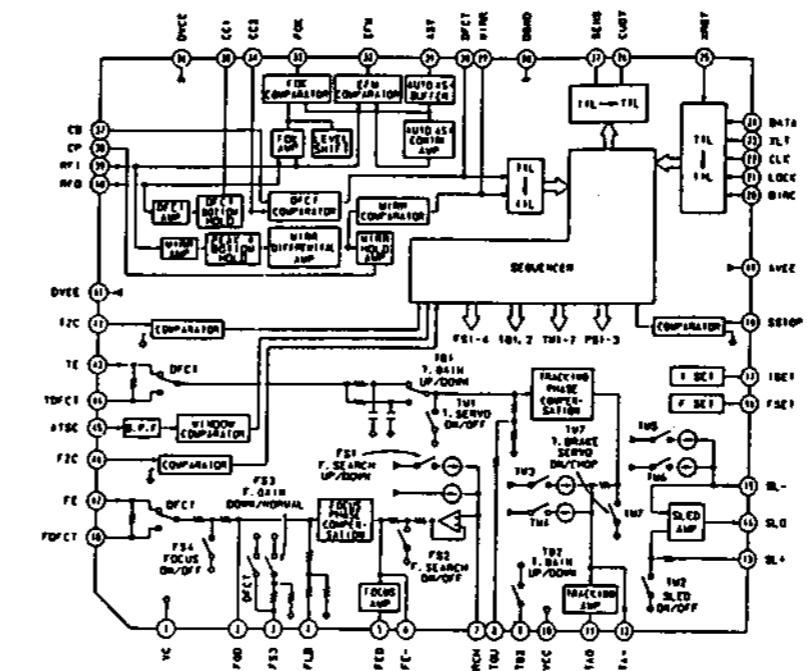


IC103 M54641L

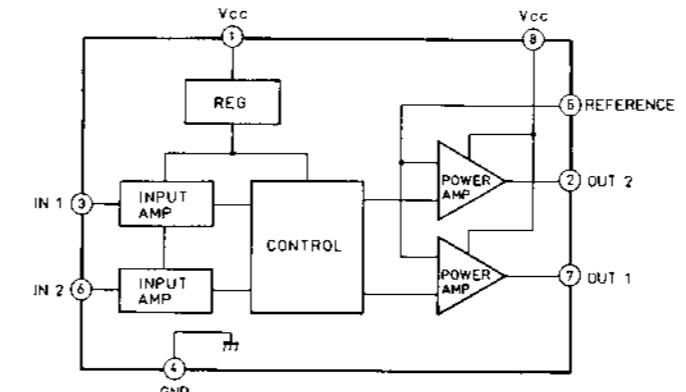


IC201 M5293L

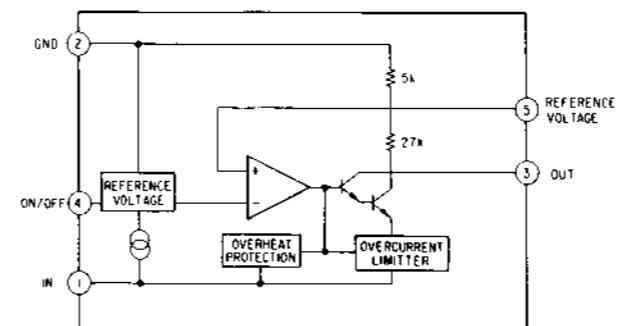

IC202 M5290P-16

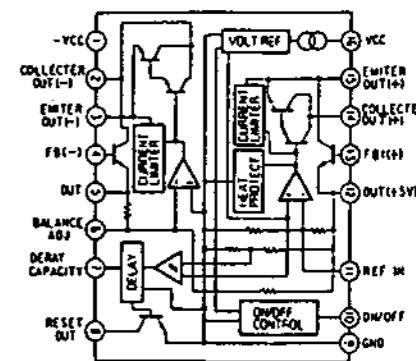

IC301 CXD2500AQ

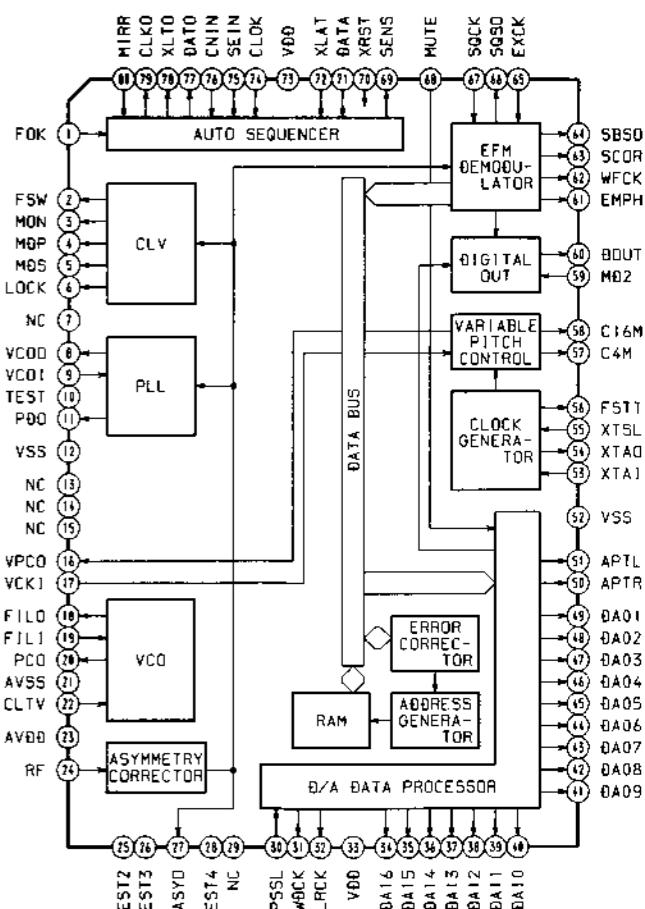

SECTION 5 EXPLODED VIEW


NOTE:

- -XX, -X mean standardized parts, so they may have some differences from the original one.
- The construction parts of an assembled part are indicated with a collection number in the remark column.
- Color Indication of Appearance Parts Example:
KNOB,BALANCE(WHITE)...(RED)
↑ ↑
Parts color Cabinet's color
- Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- The mechanical parts with no reference number in the exploded views are not supplied.
- Hardware(# mark) list is given in the last of this parts list.


The components identified by mark Δ or dotted line with mark Δ are critical for safety.
Replace only with part number specified.

IC302 CXD2554P



IC202 M5290P-16

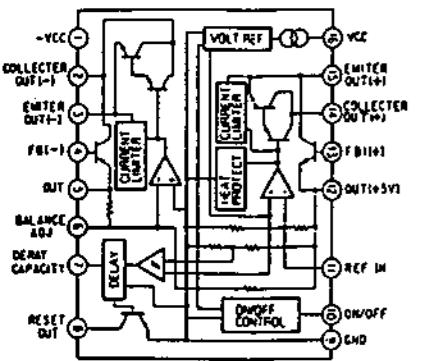

IC301 CXD2500AQ

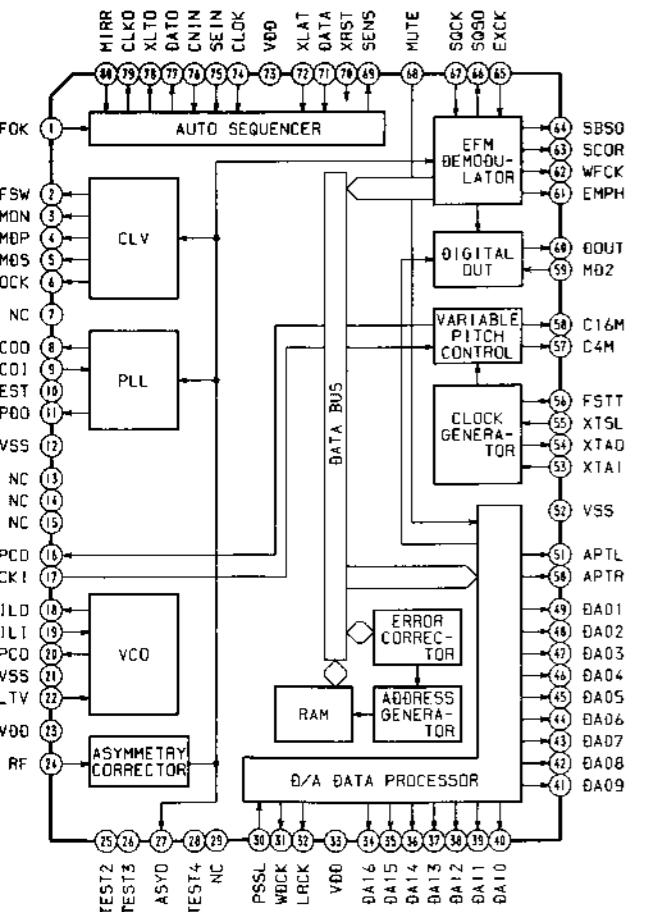


IC305 CXD2552AQ

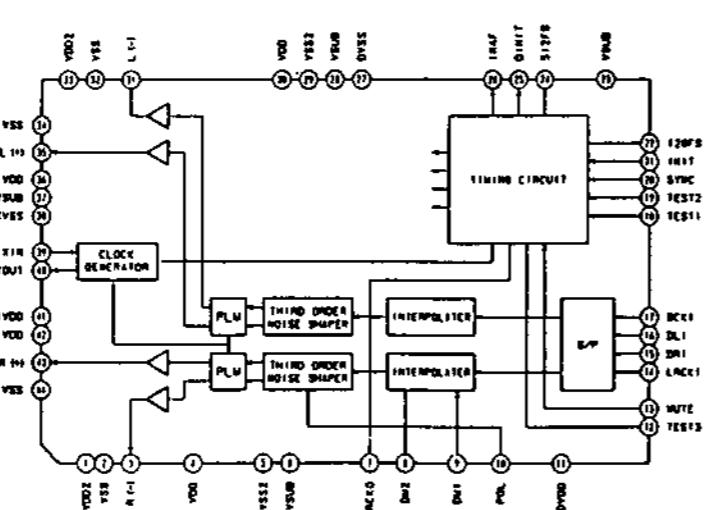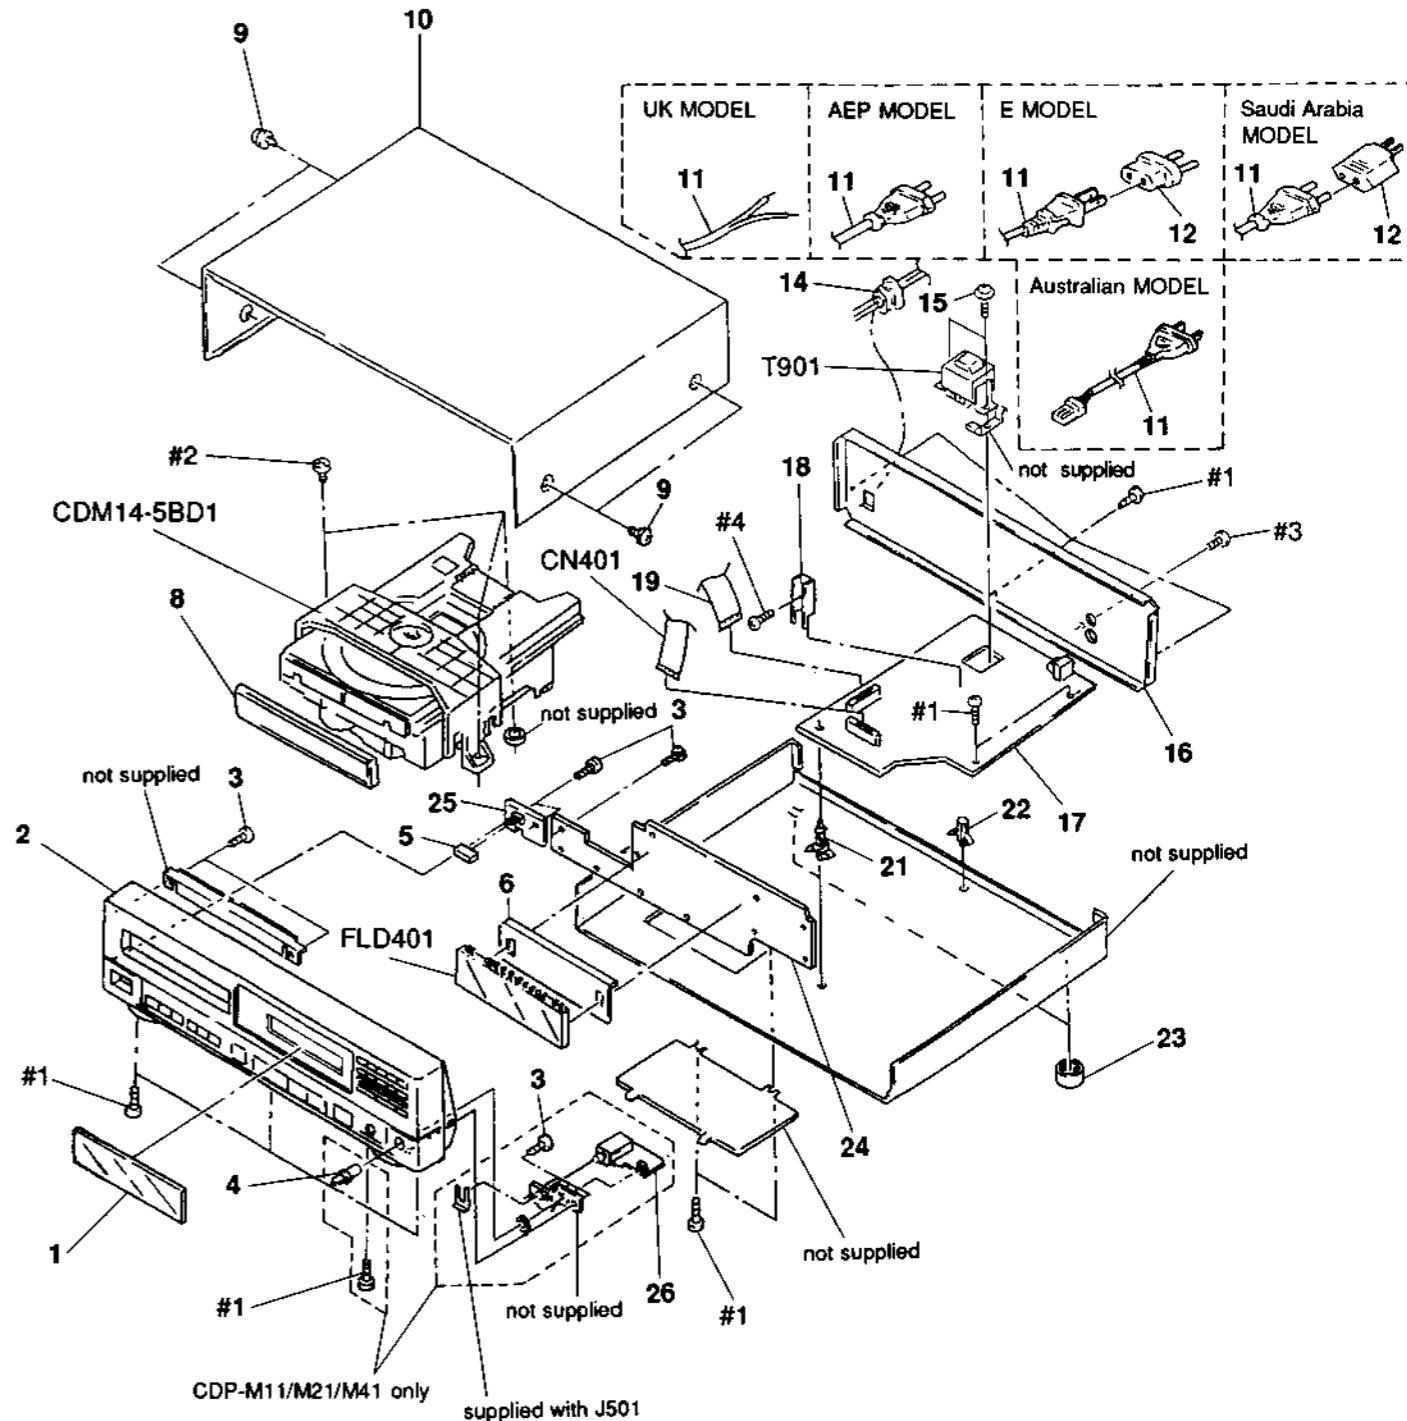**(1) CABINET SECTION**

Ref. No.	Part No.	Description	Remark
1	4-942-977-01	PLATE, INDICATION (M21:AEP/M41:UK)	
1	4-942-977-11	PLATE, INDICATION (M11:AEP/M12:AEP, UK)	
1	4-942-983-01	PLATE, INDICATION (M21:E, Australian)	
1	4-942-983-11	PLATE, INDICATION (M11:E, Australian, Saudi Arabia)	
2	X-4941-318-1	PANEL ASSY, FRONT (M21:AEP)	
2	X-4941-319-1	PANEL ASSY, FRONT (M11:AEP)	
2	X-4941-320-1	PANEL ASSY, FRONT (M12:AEP, UK)	
2	X-4941-325-1	PANEL ASSY, FRONT (M21:E, Australian)	
2	X-4941-327-1	PANEL ASSY, FRONT (M11:E, Australian, Saudi Arabia)	
2	X-4941-455-1	PANEL ASSY, FRONT (M41:UK)	
2	X-4941-557-1	PANEL ASSY, FRONT (GRAY) (M11:AEP)	
3	4-928-635-01	SCREW, #BV (2.6X8) TAPPING	
4	4-922-531-01	KNOB (A TYPE), LOV (M11/M21/M41)	
5	4-927-341-01	BUTTON (POWER)	
6	* 4-923-103-01	HOLDER, FL TUBE	
8	4-942-979-11	PANEL, LOADING (M21:AEP/M41:UK)	
8	4-942-979-21	PANEL, LOADING (M11:AEP)	
8	4-942-979-31	PANEL, LOADING (GRAY) (M11:AEP/M12:AEP, UK)	
8	4-942-979-51	PANEL, LOADING (M21:E, Australian)	
8	4-942-979-61	PANEL, LOADING (M11:E, Australian, Saudi Arabia)	
9	3-704-366-01	SCREW (CASE) (M3X8)	
10	4-919-376-31	CASE (MADE IN JAPAN M11/M21)	
10	4-919-376-51	CASE (MADE IN FRANCE M11/M12:AEP/M41:UK)	
10	4-919-376-61	CASE (MADE IN FRANCE M12:AEP, UK)	
10	4-919-376-81	CASE (MADE IN JAPAN M12:AEP)	
11	⚠ 1-574-127-31	CORD, POWER (MADE IN FRANCE M11/M12/M21:AEP)	
11	⚠ 1-574-35B-31	CORD, POWER (WITH CONNECTOR) (M11/M21:Australian)	
11	⚠ 1-574-390-31	CORD, POWER (M12/M41:UK)	
11	⚠ 1-575-651-21	CORD, POWER (MADE IN JAPAN M11/M12/M21:AEP/M11:Saudi Arabia)	
11	⚠ 1-575-653-21	CORD, POWER (M11/M21:E)	
12	⚠ 1-569-007-11	ADAPTOR, CONVERSION 2P (M11/M21:E)	
12	⚠ 1-569-008-11	ADAPTOR, CONVERSION 2P (M11:Saudi Arabia)	
14	* 3-703-244-00	BUSHING (2104), CORD	
15	2-383-566-01	SCREW #PTTWH 3X8 S TIGHT (Saudi Arabia)	
15	4-886-821-11	SCREW, S TIGHT, #PTTWH 3X6 (EXCEPT Saudi Arabia)	

Ref. No.	Part No.	Description	Remark
16	* 4-941-467-11	PANEL, BACK (MADE IN FRANCE M12:UK)	
16	* 4-941-467-21	PANEL (ALSACE), BACK (MADE IN FRANCE)	
16	* 4-942-980-31	PANEL, BACK (MADE IN JAPAN M21:AEP)	
16	* 4-942-980-61	PANEL, BACK (M21:E)	
16	* 4-942-981-01	PANEL, BACK (MADE IN JAPAN M11:AEP)	
16	* 4-942-981-11	PANEL, BACK (M11:Australian)	
16	* 4-942-981-31	PANEL, BACK (M11:E, Saudi Arabia)	
16	* 4-942-981-41	PANEL, BACK (M21:Australian)	
17	* A-4617-692-A	MAIN BOARD, COMPLÉTE (MADE IN FRANCE)	
17	* A-4617-706-A	MAIN BOARD, COMPLETE (MADE IN JAPAN M11/M21:AEP, Australian)	
17	* A-4617-708-A	MAIN BOARD, COMPLETE (MADE IN JAPAN M11:E, Saudi Arabia/M21:E)	
17	* A-4617-771-A	MAIN BOARD, COMPLETE (MADE IN JAPAN M12:AEP)	
18	4-902-345-01	HEAT SINK	
19	1-575-160-11	WIRE, FLAT TYPE (22 CORE)	
21	* 4-924-098-31	HOLDER, PC BOARD (EXCEPT M12:AEP)	
21	* 4-924-098-41	HOLDER, PC BOARD (M12:AEP)	
22	* 3-349-025-41	HOLDER, PC BOARD	
23	4-933-601-01	FOOT	
24	* A-4617-690-A	DISP BOARD, COMPLETE (MADE IN FRANCE)	
24	* A-4617-770-A	DISP BOARD, COMPLETE (MADE IN JAPAN M12:AEP)	
24	* A-4617-777-A	DISP BOARD, COMPLETE (MADE IN JAPAN M11/M21)	
25	* 1-637-818-11	POWER SW BOARD (MADE IN JAPAN)	
25	* 1-637-818-21	POWER SW BOARD (MADE IN FRANCE)	
26	* 1-637-820-11	VOL BOARD (MADE IN FRANCE EXCEPT M12)	
26	* 1-637-820-21	VOL BOARD (MADE IN JAPAN EXCEPT M12)	
CN401	1-535-883-11	JUMPER, FILM (WITH TERMINAL)	
FLD401	1-519-611-11	INDICATOR TUBE, FLUORESCENT	
T901	⚠ 1-449-922-11	TRANSFORMER, POWER (MADE IN JAPAN M11/M21:AEP, Australian/M12:AEP)	
T901	⚠ 1-449-923-11	TRANSFORMER, POWER (MADE IN JAPAN M11:E, Saudi Arabia/M21:E)	
T901	⚠ 1-449-925-11	TRANSFORMER, POWER (MADE IN FRANCE AEP, UK)	


(2) MD SECTION (CDM14-5BD1)

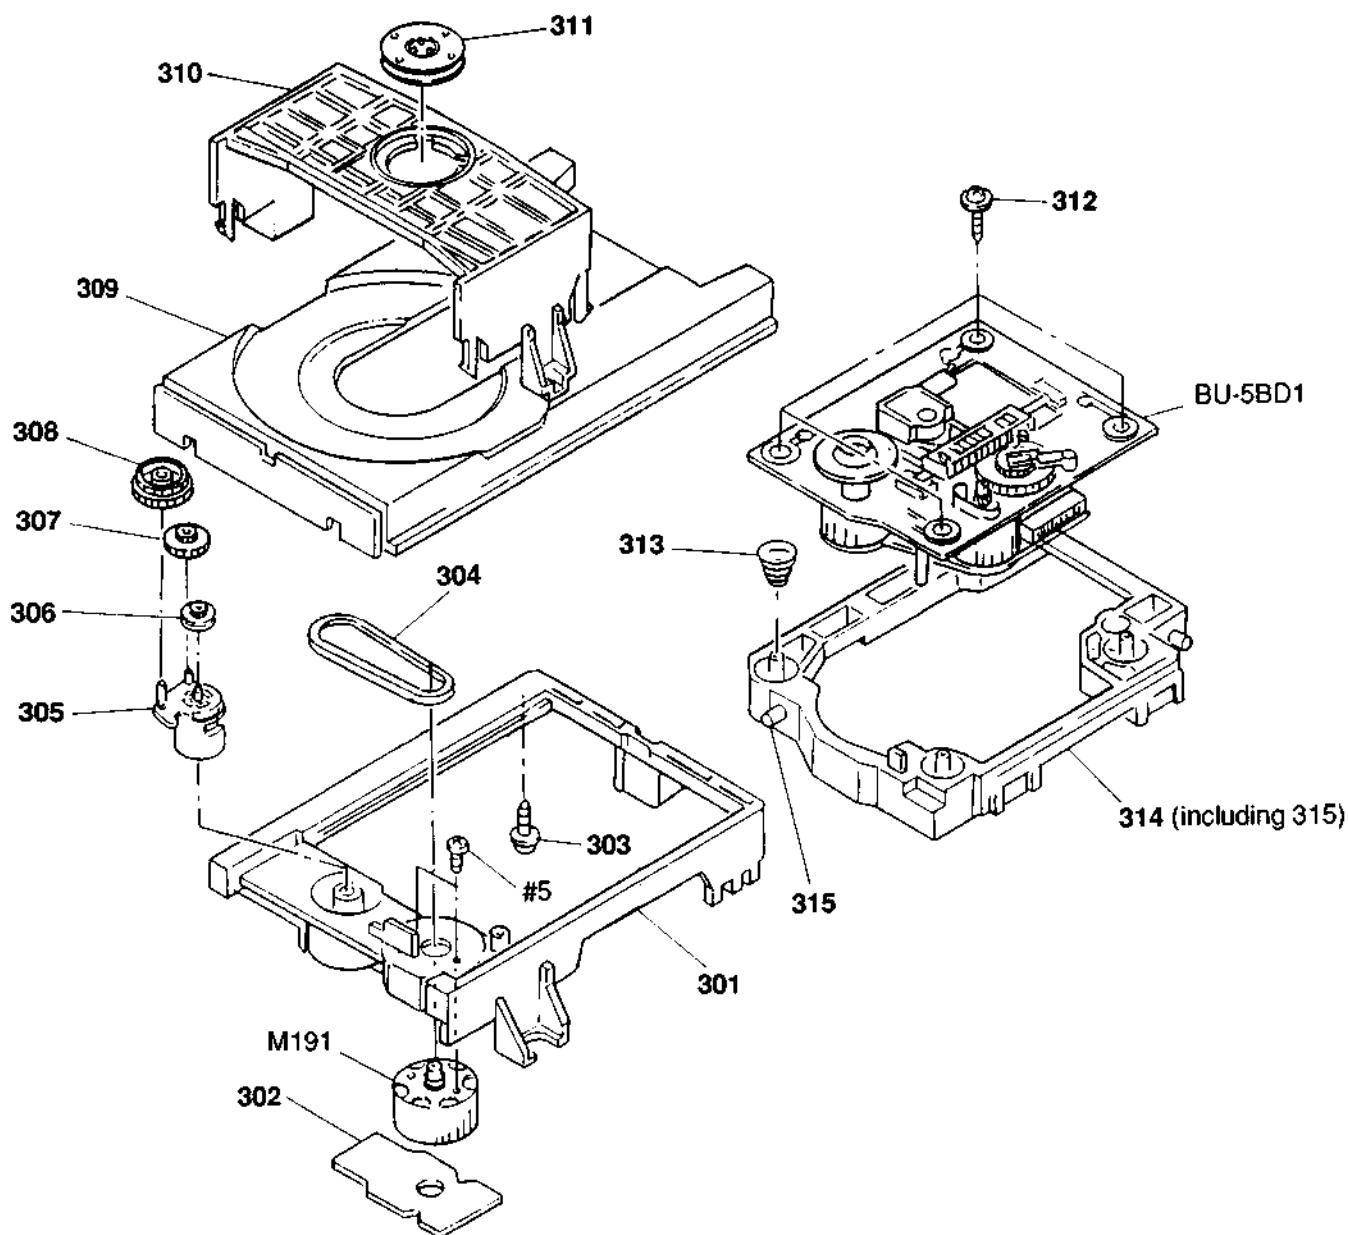

Ref. No.	Part No.	Description
301	4-933-111-01	CHASSIS (MD)
302	* 1-632-202-11	LOADING BOARD
303	* 4-917-583-21	BRACKET, YOKE
304	4-927-649-01	BELT
305	4-933-109-01	CAM
306	4-927-651-01	PULLEY (S)
307	4-927-628-01	GEAR (C)
308	4-933-107-01	GEAR (PL)

Ref. No.	Part No.	Description
309	4-933-112-01	TABLE, DISK
310	4-933-110-01	HOLDER (MD)
311	* 1-452-538-11	MAGNET
312	4-933-134-01	SCREW (+PTPWH M2.6X6)
313	4-917-541-01	SPRING (B)
314	4-933-129-01	HOLDER (BU)
315	4-933-108-01	SHAFT (CAM)
M191	A-4604-363-A	MOTOR (L) ASSY (LOADING)

(3) PICK-UP BLOCK (BU-5BD1)

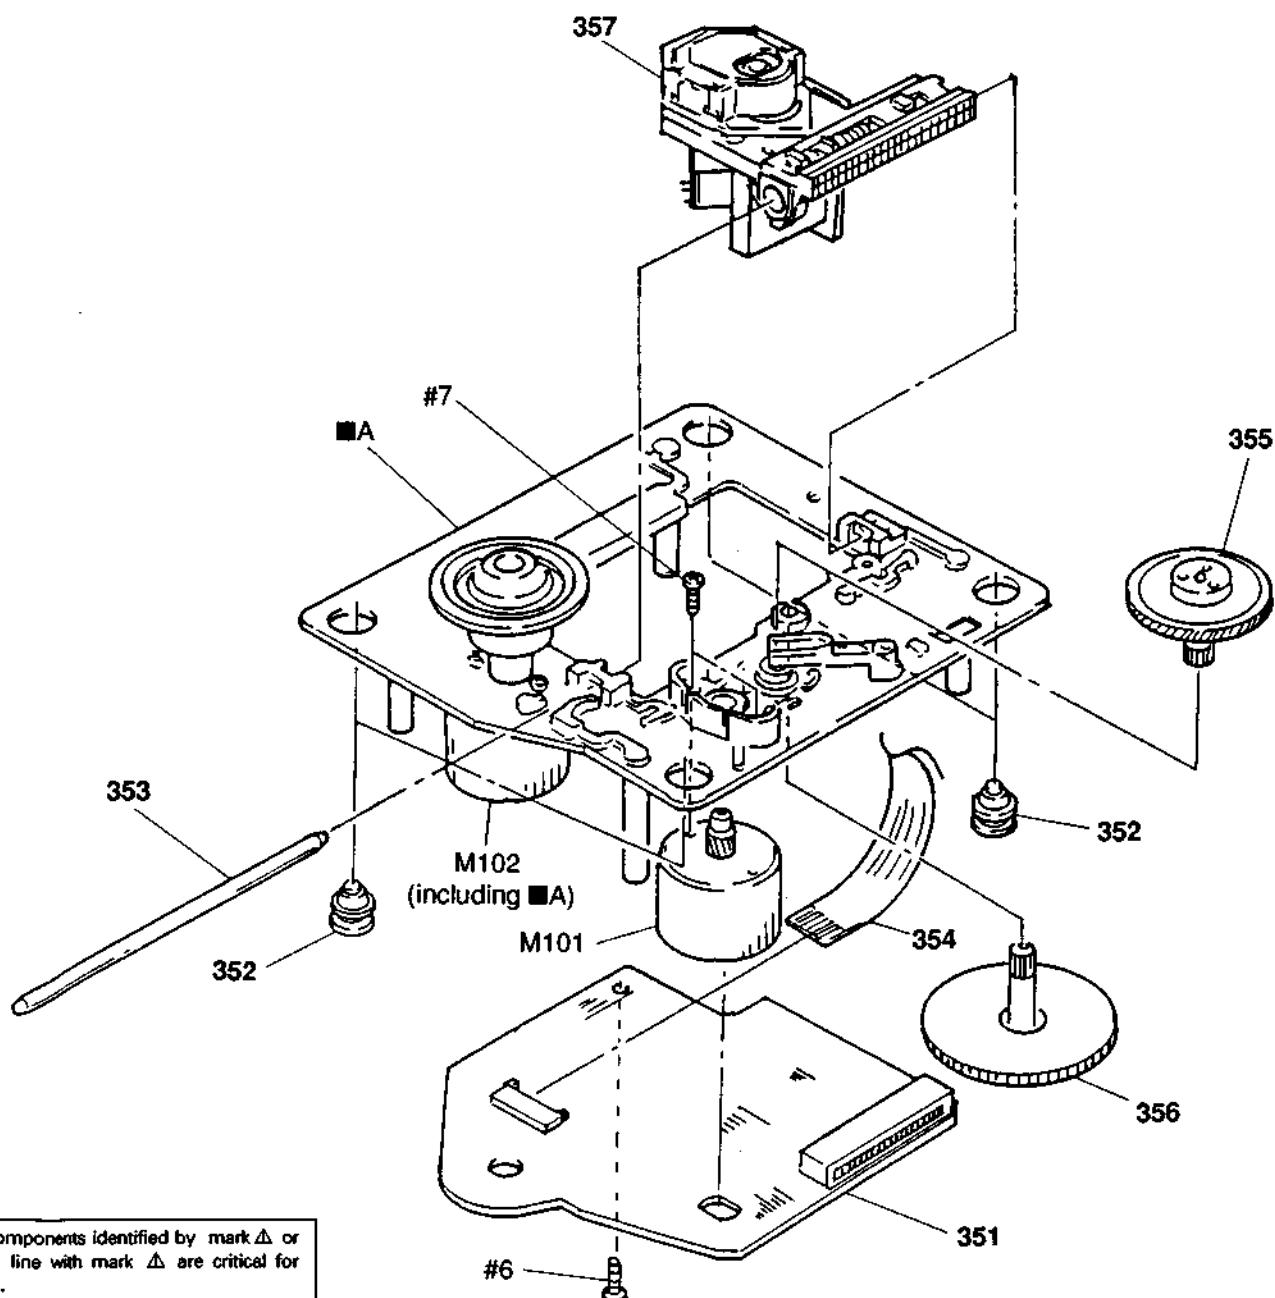

Ref. No.	Part No.	Description	Remark
351	A-4617-161-A	BD BOARD, COMPLETE	
352	4-933-126-01	INSULATOR (A)	
353	4-917-565-01	SHAFT, SLED	
354	1-675-001-11	WIRE, FLAT TYPE (12 CORE)	
355	4-917-567-01	GEAR (M)	
356	4-917-564-01	GEAR (P), FLATNESS	
357	8-848-144-11	DEVICE, OPTICAL KSS-240A	
M101	X-4917-504-1	MOTOR ASSY (SLED)	
M102	X-4917-523-3	MOTOR ASSY (SPINDLE)	

BD

SECTION 6

ELECTRICAL PARTS LIST

NOTE:

The components identified by mark Δ or dotted line with mark Δ are critical for safety.
Replace only with part number specified.

When indicating parts by reference number, please include the board name.

- Due to standardization, replacements in the parts list may be different from the parts specified in the diagrams or the components used on the set.
- -XX, -X mean standardized parts, so they may have some difference from the original one.
- **RESISTORS**
All resistors are in ohms
METAL : Metal-film resistor
METAL OXIDE : Metal Oxide-film resistor
F : nonflammable
- Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- **SEMICONDUCTORS**
In each case, u : μ , for example :
uA... : μ A..., uPA... : μ PA...
uPB... : μ PB..., uPC... : μ PC...
uPD... : μ PD...
- **CAPACITORS**
uF : μ F
- **COILS**
uH : μ H
- Hardware(# mark) list is given in the last of this parts list.

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark		
A-4617-161-A BD BOARD, COMPLETE *****									
< CAPACITOR >									
C101	1-163-038-00	CERAMIC CHIP	0.1uF 25V	CH101	1-568-796-11	SOCKET, CONNECTOR 22P			
C102	1-163-989-11	CERAMIC CHIP	0.033uF 10% 25V	CH102	1-568-795-11	SOCKET, CONNECTOR 12P			
C103	1-126-163-11	ELECT	0.68uF 20% 50V	CH103	* 1-564-721-11	PIN, CONNECTOR (SMALL TYPE) 5P			
C104	1-163-038-00	CERAMIC CHIP	0.1uF 25V	< DIODE >					
C105	1-126-154-11	ELECT	47uF 20% 6.3V	D101	8-719-105-72	D10DE RD4.7M-B1			
C106	1-126-154-11	ELECT	47uF 20% 6.3V	< IC >					
C107	1-126-154-11	ELECT	47uF 20% 6.3V	IC101	8-752-050-82	IC SC CXA1372Q			
C108	1-163-038-00	CERAMIC CHIP	0.1uF 25V	IC102	8-759-822-36	IC LA6532M			
C109	1-163-038-00	CERAMIC CHIP	0.1uF 25V	IC103	8-759-633-65	IC M54641L			
C110	1-163-989-11	CERAMIC CHIP	0.033uF 10% 25V	< JACK >					
C111	1-131-367-00	TANTALUM	22uF 10% 20V	J101	1-216-295-00	METAL CHIP	0 5% 1/10W		
C112	1-164-232-11	CERAMIC CHIP	0.01uF 50V	J102	1-216-295-00	METAL CHIP	0 5% 1/10W		
C113	1-164-232-11	CERAMIC CHIP	0.01uF 50V	< TRANSISTOR >					
C114	1-164-161-11	CERAMIC CHIP	0.0022uF 10% 100V	Q101	8-729-901-01	TRANSISTOR DTC144EK			
C115	1-164-161-11	CERAMIC CHIP	0.0022uF 10% 100V	< RESISTOR >					
C117	1-163-038-00	CERAMIC CHIP	0.1uF 25V	R101	1-216-097-00	METAL CHIP	100K 5% 1/10W		
C118	1-163-038-00	CERAMIC CHIP	0.1uF 25V	R102	1-216-095-00	METAL CHIP	82K 5% 1/10W		
C119	1-164-161-11	CERAMIC CHIP	0.0022uF 10% 100V	R103	1-216-091-00	METAL CHIP	56K 5% 1/10W		
C120	1-163-989-11	CERAMIC CHIP	0.033uF 10% 25V	R104	1-216-099-00	METAL CHIP	120K 5% 1/10W		
C151	1-163-019-00	CERAMIC CHIP	0.0068uF 10% 50V	R105	1-216-069-00	METAL CHIP	6.8K 5% 1/10W		
C152	1-163-038-00	CERAMIC CHIP	0.1uF 25V	R106	1-216-061-00	METAL CHIP	3.3K 5% 1/10W		
C153	1-163-006-11	CERAMIC CHIP	560PF 10% 50V	R107	1-216-114-00	METAL GLAZE	510K 5% 1/10W		
C154	1-164-161-11	CERAMIC CHIP	0.0022uF 10% 100V	R108	1-216-105-00	METAL CHIP	220K 5% 1/10W		
C155	1-163-023-00	CERAMIC CHIP	0.015uF 5% 50V	R109	1-216-061-00	METAL CHIP	3.3K 5% 1/10W		
C171	1-163-038-00	CERAMIC CHIP	0.1uF 25V	R110	1-216-049-00	METAL CHIP	1K 5% 1/10W		
C172	1-163-038-00	CERAMIC CHIP	0.1uF 25V						
C173	1-163-038-00	CERAMIC CHIP	0.1uF 25V						
C174	1-163-038-00	CERAMIC CHIP	0.1uF 25V						

BD	DISP
-----------	-------------

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
R111	1-216-049-00	METAL CHIP	1K 5% 1/10W			< IC >	
R112	1-216-083-00	METAL CHIP	27K 5% 1/10W	IC401	8-752-817-41	IC CXP50112-097Q	
R113	1-216-071-00	METAL CHIP	8.2K 5% 1/10W	IC402	8-749-920-83	IC GP1U52XB	
R114	1-216-105-00	METAL CHIP	220K 5% 1/10W			< RESISTOR >	
R152	1-216-073-00	METAL CHIP	10K 5% 1/10W	R402	1-216-065-00	METAL CHIP	4.7K 5% 1/10W
R153	1-216-085-00	METAL CHIP	33K 5% 1/10W	R403	1-216-065-00	METAL CHIP	4.7K 5% 1/10W
R154	1-216-085-00	METAL CHIP	33K 5% 1/10W	R404	1-216-079-00	METAL CHIP	18K 5% 1/10W
R155	1-216-093-00	METAL CHIP	68K 5% 1/10W	R405	1-216-069-00	METAL CHIP	6.8K 5% 1/10W
R156	1-216-081-00	METAL CHIP	22K 5% 1/10W	R406	1-216-063-00	METAL CHIP	3.9K 5% 1/10W
R157	1-216-079-00	METAL CHIP	18K 5% 1/10W	R407	1-216-059-00	METAL CHIP	2.7K 5% 1/10W
R158	1-216-079-00	METAL CHIP	18K 5% 1/10W	R408	1-216-079-00	METAL CHIP	18K 5% 1/10W
R159	1-216-079-00	METAL CHIP	18K 5% 1/10W	R409	1-216-069-00	METAL CHIP	6.8K 5% 1/10W
R160	1-216-049-00	METAL CHIP	1K 5% 1/10W	R410	1-216-063-00	METAL CHIP	3.9K 5% 1/10W
R171	1-216-001-00	METAL CHIP	10 5% 1/10W	R411	1-216-059-00	METAL CHIP	2.7K 5% 1/10W
R172	1-216-001-00	METAL CHIP	10 5% 1/10W	R412	1-216-079-00	METAL CHIP	18K 5% 1/10W
R173	1-216-001-00	METAL CHIP	10 5% 1/10W	R413	1-216-069-00	METAL CHIP	6.8K 5% 1/10W
R174	1-216-001-00	METAL CHIP	10 5% 1/10W	R414	1-216-063-00	METAL CHIP	3.9K 5% 1/10W
			< VARIABLE RESISTOR >	R415	1-216-059-00	METAL CHIP	2.7K 5% 1/10W
RV101	1-238-016-11	RES. ADJ. CARBON 10K (TRACKING GAIN)	R416	1-216-079-00	METAL CHIP	18K 5% 1/10W	
RV102	1-238-016-11	RES. ADJ. CARBON 10K (FOCUS GAIN)	R417	1-216-069-00	METAL CHIP	6.8K 5% 1/10W	
			R418	1-216-063-00	METAL CHIP	3.9K 5% 1/10W	
S101	1-572-085-11	SWITCH, LEAF (LIMIT IN)	R419	1-216-059-00	METAL CHIP	2.7K 5% 1/10W	
			R420	1-216-079-00	METAL CHIP	18K 5% 1/10W	
			R421	1-216-069-00	METAL CHIP	6.8K 5% 1/10W	
			R422	1-216-063-00	METAL CHIP	3.9K 5% 1/10W	
			R423	1-216-059-00	METAL CHIP	2.7K 5% 1/10W	
			R424	1-216-079-00	METAL CHIP	18K 5% 1/10W	
			R425	1-216-069-00	METAL CHIP	6.8K 5% 1/10W	
			R426	1-216-063-00	METAL CHIP	3.9K 5% 1/10W	
			R427	1-216-059-00	METAL CHIP	2.7K 5% 1/10W	
			R428	1-216-073-00	METAL CHIP	10K 5% 1/10W	
			R429	1-216-073-00	METAL CHIP	10K 5% 1/10W	
			R430	1-216-073-00	METAL CHIP	10K 5% 1/10W	
			R431	1-216-073-00	METAL CHIP	10K 5% 1/10W	
			R432	1-216-073-00	METAL CHIP	10K 5% 1/10W	
			R433	1-216-073-00	METAL CHIP	10K 5% 1/10W	
			R434	1-216-079-00	METAL CHIP	18K 5% 1/10W	
			R435	1-216-079-00	METAL CHIP	18K 5% 1/10W	
						< CONNECTOR >	(MADE IN JAPAN)
CN401	1-535-883-11	JUMPER, FILM (WITH TERMINAL)	S401	1-554-303-52	SWITCH, KEY BOARD (1)		
			S402	1-554-303-52	SWITCH, KEY BOARD (2)		
			S403	1-554-303-52	SWITCH, KEY BOARD (3)		
			S404	1-554-303-52	SWITCH, KEY BOARD (4)		
			S405	1-554-303-52	SWITCH, KEY BOARD (5)		
FLD401	1-519-611-11	INDICATOR TUBE, FLUORESCENT					

When indicating parts by reference number, please include the board name.

DISP LOADING MAIN

Ref. No.	Part No.	Description	Remark
S406	1-554-303-52	SWITCH, KEY BOARD (6)	
S407	1-554-303-52	SWITCH, KEY BOARD (7)	
S408	1-554-303-52	SWITCH, KEY BOARD (8)	
S409	1-554-303-52	SWITCH, KEY BOARD (9)	
S410	1-554-303-52	SWITCH, KEY BOARD (10)	
S411	1-554-303-52	SWITCH, KEY BOARD (11)	
S412	1-554-303-52	SWITCH, KEY BOARD (12)	
S413	1-554-303-52	SWITCH, KEY BOARD (>12)	
S414	1-554-303-52	SWITCH, KEY BOARD (MUSIC SCAN)	
S415	1-554-303-52	SWITCH, KEY BOARD (P. SEARCH)	
S416	1-554-303-52	SWITCH, KEY BOARD (CONTINUE)	
S417	1-554-303-52	SWITCH, KEY BOARD (SHUFFLE)	
S418	1-554-303-52	SWITCH, KEY BOARD (PROGRAM)	
S419	1-554-303-52	SWITCH, KEY BOARD (EDIT/TIME FADE)	
S420	1-554-303-52	SWITCH, KEY BOARD (▶▶▶, ▶▶▶)	
S421	1-554-303-52	SWITCH, KEY BOARD (◀◀◀, ◀◀◀)	
S422	1-554-303-52	SWITCH, KEY BOARD (■■)	
S423	1-554-303-52	SWITCH, KEY BOARD (II)	
S424	1-554-303-52	SWITCH, KEY BOARD (▶)	
S425	1-554-303-52	SWITCH, KEY BOARD (OPEN/CLOSE▲)	
S426	1-554-303-52	SWITCH, KEY BOARD (CHECK)	
S427	1-554-303-52	SWITCH, KEY BOARD (CLEAR)	
S428	1-554-303-52	SWITCH, KEY BOARD (TIME)	
S429	1-554-303-52	SWITCH, KEY BOARD (REPEAT)	
S430	1-554-303-52	SWITCH, KEY BOARD (FADER)	
< SWITCH > (MADE IN FRANCE)			
S401	1-554-303-81	SWITCH, KEY BOARD (1)	
S402	1-554-303-81	SWITCH, KEY BOARD (2)	
S403	1-554-303-81	SWITCH, KEY BOARD (3)	
S404	1-554-303-81	SWITCH, KEY BOARD (4)	
S405	1-554-303-81	SWITCH, KEY BOARD (5)	
S406	1-554-303-81	SWITCH, KEY BOARD (6)	
S407	1-554-303-81	SWITCH, KEY BOARD (7)	
S408	1-554-303-81	SWITCH, KEY BOARD (8)	
S409	1-554-303-81	SWITCH, KEY BOARD (9)	
S410	1-554-303-81	SWITCH, KEY BOARD (10)	
S411	1-554-303-81	SWITCH, KEY BOARD (11)	
S412	1-554-303-81	SWITCH, KEY BOARD (12)	
S413	1-554-303-81	SWITCH, KEY BOARD (>12)	
S414	1-554-303-81	SWITCH, KEY BOARD (MUSIC SCAN)	
S415	1-554-303-81	SWITCH, KEY BOARD (P. SEARCH)	
S416	1-554-303-81	SWITCH, KEY BOARD (CONTINUE)	
S417	1-554-303-81	SWITCH, KEY BOARD (SHUFFLE)	
S418	1-554-303-81	SWITCH, KEY BOARD (PROGRAM)	
S419	1-554-303-81	SWITCH, KEY BOARD (EDIT/TIME FADE)	
S420	1-554-303-81	SWITCH, KEY BOARD (▶▶▶, ▶▶▶)	

Ref. No.	Part No.	Description	Remark
S421	1-554-303-81	SWITCH, KEY BOARD (◀◀◀, ◀◀◀)	
S422	1-554-303-81	SWITCH, KEY BOARD (■■)	
S423	1-554-303-81	SWITCH, KEY BOARD (II)	
S424	1-554-303-81	SWITCH, KEY BOARD (▶)	
S425	1-554-303-81	SWITCH, KEY BOARD (OPEN/CLOSE▲)	
S426	1-554-303-81	SWITCH, KEY BOARD (CHECK)	
S427	1-554-303-81	SWITCH, KEY BOARD (CLEAR)	
S428	1-554-303-81	SWITCH, KEY BOARD (TIME)	
S429	1-554-303-81	SWITCH, KEY BOARD (REPEAT)	
S430	1-554-303-81	SWITCH, KEY BOARD (FADER)	
< CERAMIC >			
X401	1-577-358-21	VIBRATOR, CERAMIC (4MHz)	

* 1-632-202-11 LOADING BOARD			

< CONNECTOR >			
CN301	* 1-564-707-11	PIN, CONNECTOR (SMALL TYPE) 5P	
< SWITCH >			
S191	1-572-086-11	SWITCH, LEAF (OUT SW)	
S192	1-572-086-11	SWITCH, LEAF (IN SW)	

* A-4617-692-A MAIN BOARD, COMPLETE (MADE IN FRANCE)			
* A-4617-706-A MAIN BOARD, COMPLETE (MADE IN JAPAN M11/M21:AEP, Australian)			
* A-4617-708-A MAIN BOARD, COMPLETE (MADE IN JAPAN M11:E, Saudi Arabia)			
* A-4617-771-A MAIN BOARD, COMPLETE (MADE IN JAPAN M12:AEP)			

4-902-345-01 HEAT SINK			
7-682-547-09 SCREW #8 3X6			
< CAPACITOR >			
C201	1-124-572-11	ELECT	100uF 20% 63V
C202	1-123-875-11	ELECT	10uF 20% 50V
C203	1-124-360-00	ELECT	1000uF 20% 16V
C204	1-124-898-11	ELECT	4700uF 20% 16V
C205	1-124-927-11	ELECT	4.7uF 20% 100V
C206	1-123-875-11	ELECT	10uF 20% 50V
C207	1-123-875-11	ELECT	10uF 20% 50V
C208	1-124-472-11	ELECT	470uF 20% 10V
C209	1-124-472-11	ELECT	470uF 20% 10V
C210	1-124-120-11	ELECT	220uF 20% 25V

When indicating parts by reference number, please include the board name.

MAIN

Ref. No.	Part No.	Description	Remark			Ref. No.	Part No.	Description	Remark		
C211	1-124-472-11	ELECT	47uF	20%	10V	C377	1-124-477-11	ELECT	47uF	20%	25V
C212	1-124-472-11	ELECT	47uF	20%	10V	C378	1-124-477-11	ELECT	47uF	20%	25V
C221	1-164-159-11	CERAMIC	0.1uF		50V	C379	1-106-349-00	NYLAR	0.0018uF	5%	100V
C301	1-124-477-11	ELECT	47uF	20%	25V	C380	1-106-349-00	NYLAR	0.0018uF	5%	100V
C302	1-124-791-11	ELECT	1.0uF	20%	100V	C392	1-164-159-11	CERAMIC	0.1uF		50V
C311	1-106-383-00	NYLAR	0.047uF	5%	200V	C394	1-164-159-11	CERAMIC	0.1uF		50V
C312	1-161-374-11	CERAMIC	0.0015uF	20%	50V				(MADE IN JAPAN M11/M21)		
C313	1-161-494-00	CERAMIC	0.022uF		25V				< CONNECTOR >		
C314	1-162-306-11	CERAMIC	0.01uF	20%	16V	CN201	* 1-580-230-11	PIN, CONNECTOR (PC BOARD) 3P			
C315	1-124-902-00	ELECT	0.47uF	20%	50V	CN301	* 1-568-843-11	SOCKET, CONNECTOR 28P			
C316	1-161-494-00	CERAMIC	0.022uF		25V	CN302	* 1-568-822-11	SOCKET, CONNECTOR 22P			
C317	1-164-159-11	CERAMIC	0.1uF		50V	CN381	* 1-564-708-11	PIN, CONNECTOR (SMALL TYPE) 6P			
C321	1-161-494-00	CERAMIC	0.022uF		25V				(EXCEPT M12)		
C331	1-162-208-31	CERAMIC	24PF	5%	50V				< DIODE >		
C332	1-106-220-00	NYLAR	0.1uF	5%	100V	D201	8-719-200-82	DIODE 11ES2			
C333	1-161-494-00	CERAMIC	0.022uF		25V	D202	8-719-109-96	DIODE RD6.8ES-81			
C335	1-162-205-31	CERAMIC	18PF	5%	50V	D203	8-719-200-82	DIODE 11ES2			
C341	1-161-494-00	CERAMIC	0.022uF		25V	D204	8-719-200-82	DIODE 11ES2			
C342	1-124-477-11	ELECT	47uF	20%	25V	D205	8-719-200-82	DIODE 11ES2			
C343	1-161-494-00	CERAMIC	0.022uF		25V	D206	8-719-200-82	DIODE 11ES2			
C344	1-161-494-00	CERAMIC	0.022uF		25V	D207	8-719-114-49	DIODE RD7.5JS-B2			
C345	1-124-477-11	ELECT	47uF	20%	25V	D208	8-719-109-89	DIODE RD5.6ES-B2			
C346	1-164-159-11	CERAMIC	0.1uF		50V	D209	8-719-107-94	DIODE 1SS202-1 (MADE IN JAPAN M12: Saudi Arabia/M12:AEP)			
C347	1-124-477-11	ELECT	47uF	20%	25V	D209	8-719-987-63	DIODE 1N4148M (MADE IN JAPAN M11: Saudi Arabia/M12:AEP)			
C348	1-164-159-11	CERAMIC	0.1uF		50V	D341	8-719-210-21	DIODE 11EOS04-TA1B			
C349	1-161-494-00	CERAMIC	0.022uF		25V	D351	8-719-107-94	DIODE 1SS202-1 (MADE IN JAPAN EXCEPT M11: Saudi Arabia/M12:AEP)			
C350	1-124-477-11	ELECT	47uF	20%	25V	D351	8-719-987-63	DIODE 1N4148M (MADE IN JAPAN M11: Saudi Arabia/M12:AEP)			
C351	1-161-494-00	CERAMIC	0.022uF		25V				< IC >		
C352	1-124-477-11	ELECT	47uF	20%	25V	IC201	8-759-633-42	IC M5293L			
C353	1-162-199-31	CERAMIC	10PF	5%	50V	IC202	8-759-630-21	IC M5290P-16			
C354	1-162-199-31	CERAMIC	10PF	5%	50V	IC203	8-759-945-58	IC RC4558P			
C355	1-161-494-00	CERAMIC	0.022uF		25V	IC301	8-752-337-26	IC CXD2500AQ			
C356	1-124-477-11	ELECT	47uF	20%	25V	IC302	8-752-337-09	IC CXD2554P			
C357	1-124-472-11	ELECT	47uF	20%	10V	IC303	8-759-917-18	IC SN74HCU04AN			
C361	1-162-285-31	CERAMIC	180PF	10%	50V	IC305	8-752-334-87	IC CXD25520			
C362	1-162-285-31	CERAMIC	180PF	10%	50V	IC306	8-759-990-82	IC TL082CP			
C363	1-162-283-31	CERAMIC	120PF	10%	50V	IC307	8-759-945-58	IC RC4558P			
C364	1-162-283-31	CERAMIC	120PF	10%	50V				< JACK >		
C365	1-162-283-31	CERAMIC	120PF	10%	50V	J381	1-569-442-11	JACK, PIN 2P (LINE OUT)			
C366	1-162-283-31	CERAMIC	120PF	10%	50V						
C367	1-161-494-00	CERAMIC	0.022uF		25V						
C368	1-161-494-00	CERAMIC	0.022uF		25V						
C371	1-106-359-00	NYLAR	4700PF	5%	200V						
C372	1-106-359-00	NYLAR	4700PF	5%	200V						
C373	1-106-345-00	NYLAR	0.0012uF	5%	100V						
C374	1-106-345-00	NYLAR	0.0012uF	5%	100V						
C375	1-161-494-00	CERAMIC	0.022uF		25V						
C376	1-161-494-00	CERAMIC	0.022uF		25V						

When indicating parts by reference number, please include the board name.

MAIN

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
< COIL >							
L331	1-408-403-00	INDUCTOR	3.3uH	R315	1-249-417-11	CARBON	1K 5% 1/4W
< IC LINK >							
PS201	1-532-685-00	LINK, IC		R316	1-249-417-11	CARBON	1K 5% 1/4W
PS202	1-532-637-00	LINK, IC	1.0A	R317	1-249-420-11	CARBON	1.8K 5% 1/4W
< TRANSISTOR >							
Q201	8-729-119-76	TRANSISTOR 2SA1175-HFE		R318	1-249-441-11	CARBON	100K 5% 1/4W
Q202	8-729-140-96	TRANSISTOR 2SD774-34		R321	1-249-417-11	CARBON	1K 5% 1/4W
Q203	8-729-111-67	TRANSISTOR 2SB1094-L		R322	1-249-417-11	CARBON	1K 5% 1/4W
Q204	8-729-900-65	TRANSISTOR DTA144ES		R323	1-249-417-11	CARBON	1K 5% 1/4W
Q205	8-729-900-89	TRANSISTOR DTC144ES		R324	1-249-418-11	CARBON	1.2K 5% 1/4W
Q206	8-729-900-89	TRANSISTOR DTC144ES		R331	1-249-409-11	CARBON	220 5% 1/4W
Q207	8-729-230-45	TRANSISTOR 2SC2458TP-YGR		R332	1-247-887-00	CARBON	220K 5% 1/4W
Q208	8-729-111-67	TRANSISTOR 2SB1094-L (MADE IN JAPAN M12:AEP)		R333	1-249-417-11	CARBON	1K 5% 1/4W
Q208	8-729-821-73	TRANSISTOR 2SB1274SA-RS (MADE IN JAPAN EXCEPT M12:AEP)		R334	1-249-409-11	CARBON	220 5% 1/4W
Q209	8-729-281-52	TRANSISTOR 2SC1815-Y		R341	1-249-393-11	CARBON	10 5% 1/4W
Q343	8-729-900-65	TRANSISTOR DTA144ES		R342	1-249-417-11	CARBON	1K 5% 1/4W
Q344	8-729-900-89	TRANSISTOR DTC144ES		R347	1-249-441-11	CARBON	100K 5% 1/4W
Q371	8-729-141-30	TRANSISTOR 2SC3623A-LK		R348	1-249-429-11	CARBON	10K 5% 1/4W
Q372	8-729-141-30	TRANSISTOR 2SC3623A-LK		R351	1-249-429-11	CARBON	10K 5% 1/4W
Q373	8-729-141-30	TRANSISTOR 2SC3623A-LK		R352	1-249-429-11	CARBON	10K 5% 1/4W
Q374	8-729-141-30	TRANSISTOR 2SC3623A-LK		R353	1-249-429-11	CARBON	10K 5% 1/4W
< RESISTOR >							
R201	1-249-435-11	CARBON	33K 5% 1/4W	R354	1-249-429-11	CARBON	10K 5% 1/4W
R202	1-249-438-11	CARBON	56K 5% 1/4W	R355	1-247-848-11	CARBON	5.1K 5% 1/4W
R203	1-249-429-11	CARBON	10K 5% 1/4W	R356	1-249-405-11	CARBON	100 5% 1/4W
R204	1-249-425-11	CARBON	4.7K 5% 1/4W	R361	1-247-838-00	CARBON	2K 5% 1/4W
R205	1-249-425-11	CARBON	4.7K 5% 1/4W	R362	1-247-838-00	CARBON	2K 5% 1/4W
R206	1-249-417-11	CARBON	1K 5% 1/4W	R363	1-247-838-00	CARBON	2K 5% 1/4W
R207	1-249-417-11	CARBON	1K 5% 1/4W	R364	1-247-838-00	CARBON	2K 5% 1/4W
R208	1-249-423-11	CARBON	3.3K 5% 1/4W	R365	1-249-432-11	CARBON	18K 5% 1/4W
R209	1-249-413-11	CARBON	470 5% 1/4W	R366	1-249-432-11	CARBON	18K 5% 1/4W
R210	1-249-429-11	CARBON	10K 5% 1/4W	R367	1-249-432-11	CARBON	18K 5% 1/4W
R211	1-249-410-11	CARBON	270 5% 1/4W	R368	1-249-432-11	CARBON	18K 5% 1/4W
R214	1-249-417-11	CARBON	1K 5% 1/4W	R369	1-249-419-11	CARBON	1.5K 5% 1/4W
R301	1-249-421-11	CARBON	2.2K 5% 1/4W	R370	1-249-419-11	CARBON	1.5K 5% 1/4W
R302	1-249-421-11	CARBON	2.2K 5% 1/4W	R371	1-249-419-11	CARBON	1.5K 5% 1/4W
R303	1-249-421-11	CARBON	2.2K 5% 1/4W	R372	1-249-419-11	CARBON	1.5K 5% 1/4W
R304	1-249-421-11	CARBON	2.2K 5% 1/4W	R373	1-247-887-00	CARBON	220K 5% 1/4W
R311	1-249-423-11	CARBON	3.3K 5% 1/4W	R374	1-247-887-00	CARBON	220K 5% 1/4W
R312	1-249-429-11	CARBON	10K 5% 1/4W	R375	1-249-409-11	CARBON	220 5% 1/4W
R313	1-249-423-11	CARBON	3.3K 5% 1/4W	R376	1-249-409-11	CARBON	220 5% 1/4W
R314	1-249-429-11	CARBON	10K 5% 1/4W	R377	1-249-409-11	CARBON	220 5% 1/4W
				R378	1-249-409-11	CARBON	220 5% 1/4W
				R379	1-249-425-11	CARBON	4.7K 5% 1/4W
				R380	1-249-425-11	CARBON	4.7K 5% 1/4W
				R381	1-249-425-11	CARBON	4.7K 5% 1/4W
				R382	1-249-425-11	CARBON	4.7K 5% 1/4W
				R383	1-249-414-11	CARBON	560 5% 1/4W
				R384	1-249-414-11	CARBON	560 5% 1/4W

The components identified by mark Δ or dotted line with mark Δ are critical for safety.
Replace only with part number specified.

When indicating parts by reference number, please include the board name.

		MAIN		POWER SW		VOL	
Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
----- < SWITCH >							
S201 1-571-722-11 SWITCH, VOLTAGE SELECTION (E, Saudi Arabia)							
----- < CRYSTAL >							
X351	1-579-161-11	VIBRATOR, CRYSTAL (45MHz)		RV501	1-241-386-11	RES, VAR, CARBON 20K/20K (PHONE LEVEL)	
***** * 1-637-818-11 POWER SW BOARD (MADE IN JAPAN) * 1-637-818-21 POWER SW BOARD (MADE IN FRANCE) *****							
----- < CONNECTOR >							
CN491	* 1-568-953-11	PIN, CONNECTOR 4P		11	1-574-127-31	CORD, POWER (MADE IN FRANCE M11/M12/M21:AEP)	
----- < SWITCH >							
S491	1-554-118-00	SWITCH, PUSH (1 KEY) (POWER)		11	1-574-358-31	CORD, POWER (WITH CONNECTOR) (M11/M21:Australian)	
***** * 1-637-820-11 VOL BOARD (MADE IN JAPAN EXCEPT M12) * 1-637-820-21 VOL BOARD (MADE IN FRANCE EXCEPT M12) *****							
----- < CAPACITOR >							
C510	1-124-584-00	ELECT 100uF 20% 10V		12	1-569-007-11	ADAPTOR, CONVERSION 2P (M11/M21:E)	
C511	1-163-133-00	CERAMIC CHIP 470PF 5% 50V		12	1-569-008-11	ADAPTOR, CONVERSION 2P (M11:Saudi Arabia)	
C512	1-163-038-00	CERAMIC CHIP 0.1uF 25V		19	1-575-160-11	WIRE, FLAT TYPE (22 CORE)	
C520	1-124-584-00	ELECT 100uF 20% 10V		25	* 1-637-818-11	POWER SW BOARD (MADE IN JAPAN)	
C521	1-163-133-00	CERAMIC CHIP 470PF 5% 50V		25	* 1-637-818-21	POWER SW BOARD (MADE IN FRANCE)	
----- < CONNECTOR >							
CN501	* 1-564-708-11	PIN, CONNECTOR (SMALL TYPE) 6P		26	* 1-637-820-11	VOL BOARD (MADE IN FRANCE EXCEPT M12)	
----- < IC >							
IC501	8-759-981-86	IC RC4556MA		26	* 1-637-820-21	VOL BOARD (MADE IN JAPAN EXCEPT M12)	
----- < JACK >							
J501	1-568-519-41	JACK, LARGE TYPE (HEADPHONES)		311	* 1-452-538-11	MAGNET	
----- < RESISTOR >				354	1-575-001-11	WIRE, FLAT TYPE (12 CORE)	
R510	1-216-049-00	METAL CHIP 1K 5% 1/10W		357	8-848-144-11	DEVICE, OPTICAL KSS-240A	
R511	1-216-065-00	METAL CHIP 4.7K 5% 1/10W		CN401	1-535-883-11	JUMPER, FILM (WITH TERMINAL)	
R512	1-216-067-00	METAL CHIP 5.6K 5% 1/10W		FLD401	1-519-611-11	INDICATOR TUBE, FLUORESCENT	
R513	1-216-025-00	METAL CHIP 100 5% 1/10W		T901	1-449-922-11	TRANSFORMER, POWER (MADE IN JAPAN M11/M21:AEP, Australian/M12:AEP)	
R520	1-216-049-00	METAL CHIP 1K 5% 1/10W		T901	1-449-923-11	TRANSFORMER, POWER (MADE IN JAPAN M11:E, Saudi Arabia/M21:E)	
----- *****							

The components identified by mark or dotted line with mark are critical for safety.
Replace only with part number specified.

When indicating parts by reference number, please include the board name.

Ref. No.	Part No.	Description	Remark
----- ACCESSION & PACKING MATERIAL			
	1-465-635-11	REMOTE, COMMANDER RM-D295	(MADE IN JAPAN M12)
	1-465-635-21	REMOTE, COMMANDER RM-D295	(MADE IN FRANCE M12)
	1-558-271-11	CORD, CONNECTION	
	3-752-961-11	MANUAL, INSTRUCTION (MADE IN JAPAN M21)	
	3-752-961-41	MANUAL, INSTRUCTION	(MADE IN JAPAN M21:AEP)
	3-752-961-51	MANUAL, INSTRUCTION (E, F, SP, P)	(MADE IN FRANCE M21:AEP/M41:UX)
	3-752-961-61	MANUAL, INSTRUCTION (G, D, SW, I)	(MADE IN FRANCE M21:AEP)
	3-752-962-11	MANUAL, INSTRUCTION (MADE IN JAPAN M11)	
	3-752-962-41	MANUAL, INSTRUCTION (G, D, SW, I)	(MADE IN JAPAN M11:AEP)
	3-752-962-51	MANUAL, INSTRUCTION (E, F, SP, P)	(MADE IN FRANCE M11:AEP)
	3-752-962-61	MANUAL, INSTRUCTION (G, D, SW, I)	(MADE IN FRANCE M11:AEP)
*	3-795-629-15	INSTRUCTION (MADE IN JAPAN M11/M12/ M21:AEP)	
*	3-795-629-45	INSTRUCTION (MADE IN FRANCE M12:AEP)	
*	4-922-998-03	CUSHION (MADE IN JAPAN M11/M12/M21)	
*	4-927-355-02	CUSHION (MADE IN FRANCE:AEP, UK)	
*	4-941-548-01	LABEL, CLASS 1	
*	4-942-898-21	INDIVIDUAL CARTON (MADE IN FRANCE M11:AEP)	
*	4-942-898-31	INDIVIDUAL CARTON (MADE IN FRANCE M12:AEP, UK)	
*	4-944-042-01	INDIVIDUAL CARTON (MADE IN JAPAN M11)	
*	4-944-042-11	INDIVIDUAL CARTON (MADE IN JAPAN M12)	
*	4-944-042-21	INDIVIDUAL CARTON (MADE IN JAPAN M21)	
*	4-942-898-11	INDIVIDUAL CARTON (MADE IN FRANCE M12)	

HARDWARE LIST

#1	7-682-548-09	SCREW #BVTT 3X8 (S)
#2	7-682-547-04	SCREW #BVTT 3X6 (S)
#3	7-685-646-79	SCREW #BVTP 3X8 TYPE2 N-S
#4	7-682-547-09	SCREW #B 3X6
#5	7-621-775-10	SCREW #B 2.6X4
#6	7-685-134-19	SCREW #BTP 2.6X8 TYPE2 N-S
#7	7-621-255-15	SCREW #P 2X3

D: DUTCH

E: ENGLISH

F: FRENCH

G: GERMAN

I: ITALIAN

P: PORTUGUESE

SP: SPANISH

SW: SWEDISH

Sony Corporation

Audio Group

English
91B1969-1
Printed in Japan
© 1991.2