

CDX-GT50W/GT500/ GT500EE/GT550

SERVICE MANUAL

Ver. 1.0 2005. 12



Photo: CDX-GT500

US Model
CDX-GT50W/GT500

Canadian Model

AEP Model

UK Model

CDX-GT500

E Model

CDX-GT550

East European Model

CDX-GT500EE

Chinese Model

CDX-GT550

- The tuner and CD sections have no adjustments.

AUDIO POWER SPECIFICATIONS (US Model)

POWER OUTPUT AND TOTAL HARMONIC DISTORTION
23.2 watts per channel minimum continuous average power into
4 ohms, 4 channels driven from 20 Hz to 20 kHz with no more
than 5% total harmonic distortion.

CD player section

Signal-to-noise ratio: 120 dB
Frequency response: 10 – 20,000 Hz
Wow and flutter: Below measurable limit

Tuner section

FM

Tuning range: CDX-GT50W/GT500: US Canadian model
87.5 – 107.9 MHz
CDX-GT500: AEP, UK model
87.5 – 108.0 MHz
CDX-GT500EE:
FM1/FM2: 87.5 – 108.0 MHz (at 50 kHz step)
FM3: 65 – 74 MHz (at 30 kHz step)
CDX-GT550:
87.5 – 108.0 MHz (at 50 kHz step)
87.5 – 107.9 MHz (at 200 kHz step)

FM tuning interval (CDX-GT550 only):
50 kHz/200 kHz switchable

Antenna terminal: External antenna connector
Intermediate frequency: 10.7 MHz/450 kHz
Usable sensitivity: 9 dBf
Selectivity: 75 dB at 400 kHz
Signal-to-noise ratio: 67 dB (stereo), 69 dB (mono)
Harmonic distortion at 1 kHz:

0.5 % (stereo), 0.3 % (mono)

Separation: 35 dB at 1 kHz
Frequency response: 30 – 15,000 Hz

| | |
|------------------------------------|-----------------|
| Model Name Using Similar Mechanism | CDX-A250/A250EE |
| CD Drive Mechanism Type | MG-611WA-186//Q |
| Optical Pick-up Name | KSS1000E |

SPECIFICATIONS

AM (CDX-GT50W/GT500: US, Canadian model/GT500EE/GT550)

Tuning range: CDX-GT50W/GT500: US, Canadian model:
530 – 1,710 kHz
CDX-GT500EE:
531 – 1,602 kHz
CDX-GT550:
531 – 1,602 kHz (at 9 kHz step)
530 – 1,710 kHz (at 10 kHz step)

AM tuning interval (CDX-GT550 only):
9 kHz/10 kHz switchable

Antenna terminal: External antenna connector
Intermediate frequency: 10.7 MHz/450 kHz
Sensitivity: 30 µV

MW/LW (CDX-GT500: AEP, UK model)

Tuning range: MW: 531 – 1,602 kHz
LW: 153 – 279 kHz
Aerial terminal: External aerial connector
Intermediate frequency: 10.7 MHz/450 kHz
Sensitivity: MW: 30 µV, LW: 40 µV

– Continued on next page –

FM/AM COMPACT DISC PLAYER
CDX-GT50W/GT500: US, Canadian MODEL/GT500EE/GT550
FM/MW/LW COMPACT DISC PLAYER
CDX-GT500: AEP, UK MODEL

9-887-003-01

2005L04-1

© 2005. 12

Sony Corporation

eVehicle Division

Published by Sony Engineering Corporation

SONY®

CDX-GT50W/GT500/GT500EE/GT550

Power amplifier section

Outputs: Speaker outputs (sure seal connectors)
Speaker impedance: 4 – 8 ohms
Maximum power output: 52 W × 4 (at 4 ohms)

General

Outputs: Audio outputs terminal (front/rear)
Subwoofer output terminal (mono)
Power antenna relay control terminal
Power amplifier control terminal

Inputs: Telephone ATT control terminal
Illumination control terminal
BUS control input terminal
BUS audio input/AUX IN terminal
Remote controller input terminal
Antenna input terminal

Tone controls: Low: ±10 dB at 60 Hz or 100 Hz (XPLOD)
Mid: ±10 dB at 500 Hz or 1 kHz (XPLOD)
High: ±10 dB at 10 kHz or 12.5 kHz (XPLOD)

Power requirements: 12 V DC car battery (negative ground)
Dimensions: Approx. 178 × 50 × 181 mm
(7 1/8 × 2 × 7 1/4 in) (w/h/d)

Mounting dimensions: Approx. 182 × 53 × 162 mm
(7 1/4 × 2 1/8 × 6 1/2 in) (w/h/d)

Mass: Approx. 1.2 kg (2 lb 11 oz)
Supplied accessories: Parts for installation and connections (1 set)
Card remote commander: RM-X151

Design and specifications are subject to change without notice.

SERVICE NOTES

CAUTION

Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

(GT500: AEP/UK/GT500EE/GT550)

This compact disc player is classified as a CLASS 1 LASER product. The CLASS 1 LASER PRODUCT label is located on the exterior.

Except Chinese model

**CLASS 1
LASER PRODUCT**

This label is located on the bottom of the chassis.

Chinese model

1类激光产品

此标签位于机壳的底部。

SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY MARK \triangle OR DOTTED LINE WITH MARK \triangle ON THE SCHEMATIC DIAGRAMS AND IN THE PARTS LIST ARE CRITICAL TO SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY.

NOTES ON HANDLING THE OPTICAL PICK-UP BLOCK OR BASE UNIT

The laser diode in the optical pick-up block may suffer electrostatic breakdown because of the potential difference generated by the charged electrostatic load, etc. on clothing and the human body.

During repair, pay attention to electrostatic breakdown and also use the procedure in the printed matter which is included in the repair parts.

The flexible board is easily damaged and should be handled with care.

NOTES ON LASER DIODE EMISSION CHECK


The laser beam on this model is concentrated so as to be focused on the disc reflective surface by the objective lens in the optical pick-up block. Therefore, when checking the laser diode emission, observe from more than 30 cm away from the objective lens.

Notes on Chip Component Replacement

- Never reuse a disconnected chip component.
- Notice that the minus side of a tantalum capacitor may be damaged by heat.

If the optical pick-up block is defective, please replace the whole optical pick-up block.

Never turn the semi-fixed resistor located at the side of optical pick-up block.

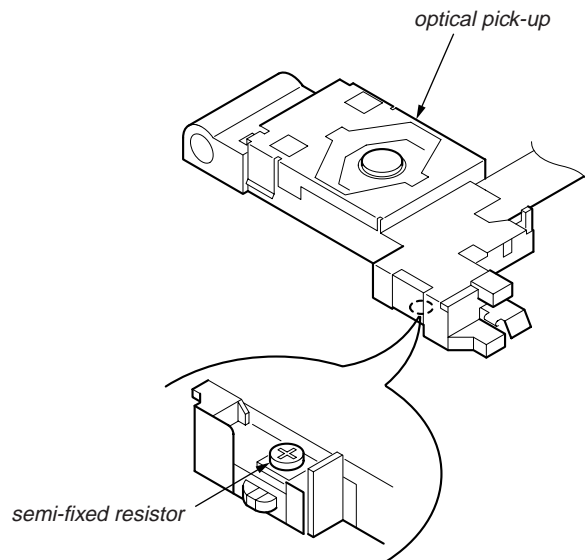

TEST DISCS

This set can playback CD-R and CD-ROM discs. The following test discs should be used to check the capability:







CD-R test disc TCD-R082LMT (Part No. J-2502-063-1)
CD-RW test disc TCD-W082L (Part No. J-2502-063-2)

ATTENTION AU COMPOSANT AYANT RAPPORT À LA SÉCURITÉ!!

LES COMPOSANTS IDENTIFIÉS PAR UNE MARQUE \triangle SUR LES DIAGRAMMES SCHÉMATIQUES ET LA LISTE DES PIÈCES SONT CRITIQUES POUR LA SÉCURITÉ DE FONCTIONNEMENT. NE REMPLACER CES COMPOSANTS QUE PAR DES PIÈCES SONY DONT LES NUMÉROS SONT DONNÉS DANS CE MANUEL OU DANS LES SUPPLÉMENTS PUBLIÉS PAR SONY.

• **CD playback**

You can play CD-DA (also containing CD TEXT*), CD-R/CD-RW (MP3/WMA files also containing Multi Session and ATRAC CD (ATRAC3 and ATRAC3plus format).

| Type of discs | Label on the disc |
|------------------------|--|
| CD-DA |   |
| MP3 WMA ATRAC CD |     |

* A CD TEXT disc is a CD-DA that includes information such as disc, artist and track name.

EXTENSION CABLE AND SERVICE POSITION

When repairing or servicing this set, connect the jig (extension cable) as shown below.

- Connect the MAIN board (CN400) and the SERVO board (CN2) with the extension cable (Part No. J-2502-076-1).

• **UNLEADED SOLDER**

Boards requiring use of unleaded solder are printed with the lead free mark (LF) indicating the solder contains no lead. (Caution: Some printed circuit boards may not come printed with the lead free mark due to their particular size.)



Unleaded solder has the following characteristics.

- Unleaded solder melts at a temperature about 40°C higher than ordinary solder.
Ordinary soldering irons can be used but the iron tip has to be applied to the solder joint for a slightly longer time. Soldering irons using a temperature regulator should be set to about 350°C.
Caution: The printed pattern (copper foil) may peel away if the heated tip is applied for too long, so be careful!
- Strong viscosity
Unleaded solder is more viscous (sticky, less prone to flow) than ordinary solder so use caution not to let solder bridges occur such as on IC pins, etc.
- Usable with ordinary solder
It is best to use only unleaded solder but unleaded solder may also be added to ordinary solder.

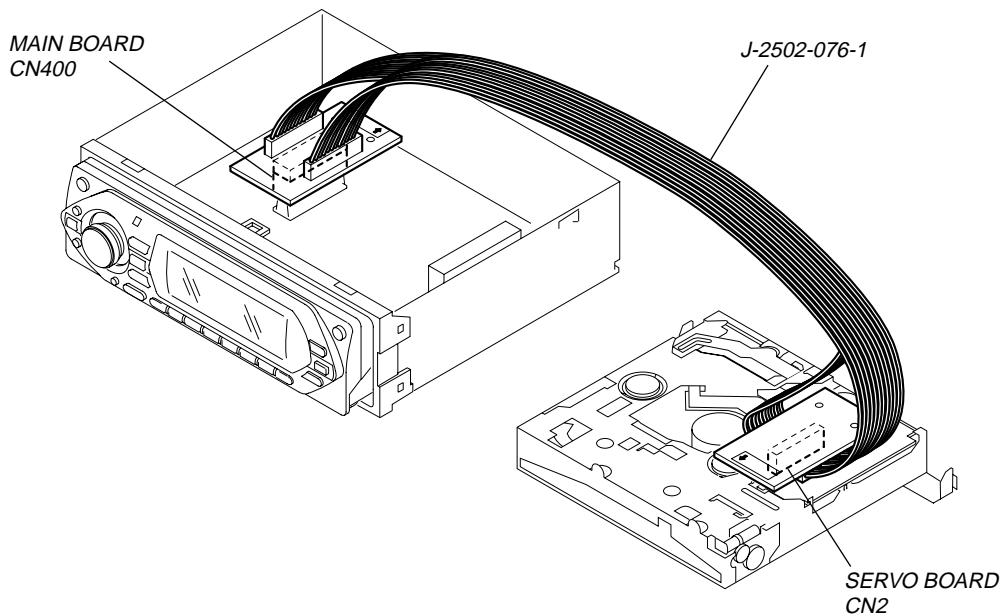


TABLE OF CONTENTS

1. GENERAL

Location of controls and basic operations 5
 Connections 7

2. DISASSEMBLY

2-1. Sub (FL) Panel Assy 12
 2-2. CD Mechanism Block 12
 2-3. Main Board 13
 2-4. Chassis (T) Sub Assy 13
 2-5. Roller Arm Assy 14
 2-6. Chassis (OP) Assy 14
 2-7. Optical Pick-up 15
 2-8. SL Motor Assy (M902) 15
 2-9. LE Motor Assy (M903) 16
 2-10. Servo Board 16

3. DIAGRAMS

3-1. Block Diagram – CD Section – 17
 3-2. Block Diagram – Main Section – 18
 3-3. Block Diagram – Display Section – 19
 3-4. Circuit Boards Location 20
 3-5. Printed Wiring Boards – CD Mechanism Section – 21
 3-6. Schematic Diagram – CD Mechanism Section (1/2) – 22
 3-7. Schematic Diagram – CD Mechanism Section (2/2) – 23
 3-8. Printed Wiring Board – Main Section – 24
 3-9. Schematic Diagram – Main Section (1/3) – 26
 3-10. Schematic Diagram – Main Section (2/3) – 27
 3-11. Schematic Diagram – Main Section (3/3) – 28
 3-12. Printed Wiring Board – Sub Section – 29
 3-13. Schematic Diagram – Sub Section – 30
 3-14. Printed Wiring Board – Key Section – 31
 3-15. Schematic Diagram – Key Section – 32

4. EXPLODED VIEWS

4-1. Main Section 40
 4-2. Front Panel Section 41
 4-3. CD Mechanism Section (1) (MG-611WA-186//Q) 42
 4-4. CD Mechanism Section (2) (MG-611WA-186//Q) 43
 4-5. CD Mechanism Section (3) (MG-611WA-186//Q) 44
 4-6. CD Mechanism Section (4) (MG-611WA-186//Q) 45

5. ELECTRICAL PARTS LIST 46


SECTION 1
GENERAL

This section is extracted from instruction manual.


• CDX-GT50W/GT500: US, Canadian Model

Location of controls and basic operations


Main unit

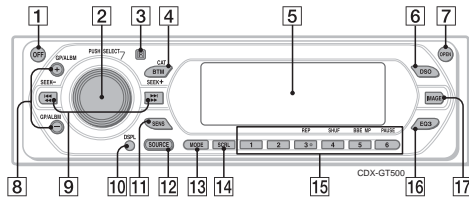

Front panel removed

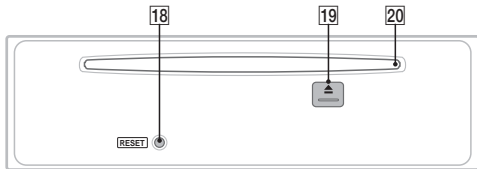

Card remote commander
RM-X151



Refer to the pages listed for details. The corresponding buttons on the card remote commander control the same functions as those on the unit.

- 1 **OFF button**
To power off; stop the source.
- 2 **Volume control dial/select button 9**
To adjust volume (rotate); select setup items (press and rotate).
- 3 **Receptor for the card remote commander**
- 4 **BTM/CAT*1 button 8**
To start the BTM function (press and hold).
- 5 **Display window**
- 6 **DSO button 2**
To select the DSO mode (1, 2, 3 or off). The larger the number, the more enhanced the effect.
- 7 **OPEN button 5**

6

- 8 **GP*2/ALBM*3 +/- buttons*4**
To skip groups/albums (press); skip groups/albums continuously (press and hold).
- 9 **SEEK +/- buttons**
CD:
To skip tracks (press); skip tracks continuously (press, then press again within about 1 second and hold); reverse/fast-forward a track (press and hold).
Radio:
To tune in stations automatically (press); find a station manually (press and hold).
- 10 **DSPL (display) button 8**
To change display items.
- 11 **SENS button**
To improve weak reception: Local/Mono.
- 12 **SOURCE button**
To power on; change the source (Radio/CD/MD*5)/AUX/SAT*1).
- 13 **MODE button 8, 10**
To select the radio band (FM/AM)/select the SAT tuner band (mode)*1/select the unit*6.
- 14 **SCRL (scroll) button**
To scroll the display item.
- 15 **Number buttons**
CD/MD*5:
(3) **REP 8, 10**
(4) **SHUF 8, 10**
(5) **BBE MP*7 2**
To activate the BBE MP function, set "BBE MP on." To cancel, set "BBE MP off."
(6) **PAUSE*7**
To pause playback. To cancel, press again.
Radio:
To receive stored stations (press); store stations (press and hold).
- 16 **EQ3 (equalizer) button 9**
To select an equalizer type (Xplod, Vocal, Edge, Cruise, Space, Gravity, Custom or Off).
- 17 **IMAGE button 2**
To select the display image.
Movie mode 1-3 → Spectrum analyzer mode 1-5 → Space Producer mode → Wall paper mode 1-3 → Normal play/reception mode
- 18 **RESET button 4**

- 19 **(eject) button 5**
To eject the disc.
 - 20 **Disc slot 5**
To insert the disc.
- The following buttons on the card remote commander have also different buttons/functions from the unit.
- 21 **(Left/Right) buttons**
To control CD/radio, the same as (SEEK) +/- on the unit.
 - 22 **VOL (volume) +/- button**
To adjust volume.
 - 23 **ATT (attenuate) button**
To attenuate the sound. To cancel, press again.
 - 24 **SEL (select) button**
The same as the select button on the unit.
 - 25 **(+/-) buttons**
To control CD, the same as (GP/ALBM) +/- on the unit.
 - 26 **Number buttons**
To receive stored stations (press); store stations (press and hold).

*1 When the SAT tuner is connected.
*2 When an ATRAC CD is played.
*3 When an MP3/WMA is played.
*4 If the changer is connected, the operation is different, see page 10.
*5 When an MD changer is connected.
*6 When a CD/MD changer is connected.
*7 When playing back on this unit.

Note
If the unit is turned off and the display disappears, it cannot be operated with the card remote commander unless (SOURCE) on the unit is pressed, or a disc is inserted to activate the unit first.


Tip
For details on how to replace the battery, see "Replacing the lithium battery of the card remote commander" on page 13.

7


• CDX-GT500: AEP, UK Model

Location of controls and basic operations


Main unit

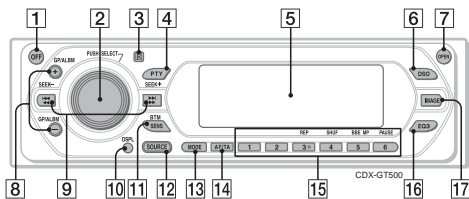

Front panel removed

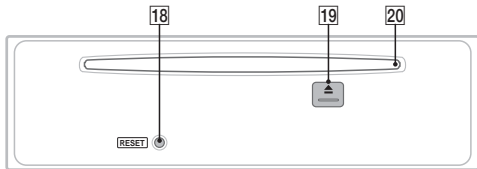

Card remote commander
RM-X151



Refer to the pages listed for details. The corresponding buttons on the card remote commander control the same functions as those on the unit.

- 1 **OFF button**
To power off; stop the source.
- 2 **Volume control dial/select button 11**
To adjust volume (rotate); select setup items (press and rotate).
- 3 **Receptor for the card remote commander**
- 4 **PTY (Programme Type) button 10**
To select PTY in RDS.
- 5 **Display window**
- 6 **DSO button 2**
To select the DSO mode (1, 2, 3 or off). The larger the number, the more enhanced the effect.
- 7 **OPEN button 5**

6

- 8 **GP*1/ALBM*2 +/- buttons*3**
To skip groups/albums (press); skip groups/albums continuously (press and hold).
- 9 **SEEK +/- buttons**
CD:
To skip tracks (press); skip tracks continuously (press, then press again within about 1 second and hold); reverse/fast-forward a track (press and hold).
Radio:
To tune in stations automatically (press); find a station manually (press and hold).
- 10 **DSPL (display) button 8**
To change display items.
- 11 **SENS/BTM button**
To improve weak reception: Local/Mono (press); start the BTM function (press and hold).
- 12 **SOURCE button**
To power on; change the source (Radio/CD/MD*4)/AUX).
- 13 **MODE button 8, 12**
To select the radio band (FM/MW/LW)/select the unit*5.
- 14 **AF (Alternative Frequencies)/TA (Traffic Announcement) button 9**
To set AF and TA/TP in RDS.
- 15 **Number buttons**
CD/MD*4:
(3) **REP 8, 12**
(4) **SHUF 8, 12**
(5) **BBE MP*6 3**
To activate the BBE MP function, set "BBE MP on." To cancel, set "BBE MP off."
(6) **PAUSE*6**
To pause playback. To cancel, press again.
Radio:
To receive stored stations (press); store stations (press and hold).
- 16 **EQ3 (equalizer) button 11**
To select an equalizer type (Xplod, Vocal, Edge, Cruise, Space, Gravity, Custom or Off).
- 17 **IMAGE button 2**
To select the display image.
Movie mode 1-3 → Spectrum analyzer mode 1-5 → Space Producer mode → Wall paper mode 1-3 → Normal play/reception mode
- 18 **RESET button 4**

- 19 **(eject) button 5**
To eject the disc.
 - 20 **Disc slot 5**
To insert the disc.
- The following buttons on the card remote commander have also different buttons/functions from the unit.
- 21 **(Left/Right) buttons**
To control CD/radio, the same as (SEEK) +/- on the unit.
 - 22 **VOL (volume) +/- button**
To adjust volume.
 - 23 **ATT (attenuate) button**
To attenuate the sound. To cancel, press again.
 - 24 **SEL (select) button**
The same as the select button on the unit.
 - 25 **(+/-) buttons**
To control CD, the same as (GP/ALBM) +/- on the unit.
 - 26 **SCRL (scroll) button**
To scroll display item.
 - 27 **Number buttons**
To receive stored stations (press); store stations (press and hold).

*1 When an ATRAC CD is played.
*2 When an MP3/WMA is played.
*3 If the changer is connected, the operation is different, see page 12.
*4 When an MD changer is connected.
*5 When a CD/MD changer is connected.
*6 When playing back on this unit.

Note
If the unit is turned off and the display disappears, it cannot be operated with the card remote commander unless (SOURCE) on the unit is pressed, or a disc is inserted to activate the unit first.


Tip
For details on how to replace the battery, see "Replacing the lithium battery of the card remote commander" on page 15.

7


• CDX-GT500EE

Location of controls and basic operations

Main unit

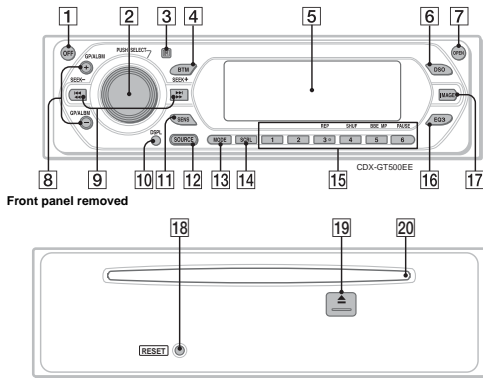

Card remote commander RM-X151



Refer to the pages listed for details. The corresponding buttons on the card remote commander control the same functions as those on the unit.

- 1 **OFF button**
To power off; stop the source.
- 2 **Volume control dial/select button 9**
To adjust volume (rotate); select setup items (press and rotate).
- 3 **Receptor for the card remote commander**
- 4 **BTM button 8**
To start the BTM function (press and hold).
- 5 **Display window**
- 6 **DSO button 2**
To select the DSO mode (1, 2, 3 or off). The larger the number, the more enhanced the effect.
- 7 **OPEN button 5**

- 8 **GP*/ALBM*2 +/- buttons*3**
To skip groups/albums (press); skip groups/albums continuously (press and hold).
- 9 **SEEK +/- buttons**
CD:
To skip tracks (press); skip tracks continuously (press, then press again within about 1 second and hold); reverse/fast-forward a track (press and hold).
Radio:
To tune in stations automatically (press); find a station manually (press and hold).
- 10 **DSPL (display) button 8**
To change display items.
- 11 **SENS button**
To improve weak reception: Local/Mono.
- 12 **SOURCE button**
To power on; change the source (Radio/CD/MD*/AUX).
- 13 **MODE button 8, 10**
To select the radio band (FM/AM)/select the unit*5.
- 14 **SCRL (scroll) button**
To scroll display item.
- 15 **Number buttons**
CD/MD*4:
③: **REP** 8, 10
④: **SHUF** 8, 10
⑤: **BBE MP***2
To activate the BBE MP function, set "BBE MP on." To cancel, set "BBE MP off."
⑥: **PAUSE***6
To pause playback. To cancel, press again.
Radio:
To receive stored stations (press); store stations (press and hold).
- 16 **EQ3 (equalizer) button 9**
To select an equalizer type (Xplod, Vocal, Edge, Cruise, Space, Gravity, Custom or Off).
- 17 **IMAGE button 2**
To select the display image.
Movie mode 1-3 → Spectrum analyzer mode 1-5 → Space Producer mode → Wall paper mode 1-3 → Normal play/reception mode


- 18 **RESET button 4**
 - 19 **(eject) button 5**
To eject the disc.
 - 20 **Disc slot 5**
To insert the disc.
- The following buttons on the card remote commander have also different buttons/functions from the unit.
- 21 **(◀◀) / (▶▶) buttons**
To control CD/radio, the same as (SEEK) +/- on the unit.
 - 22 **VOL (volume) +/- button**
To adjust volume.
 - 23 **ATT (attenuate) button**
To attenuate the sound. To cancel, press again.
 - 24 **SEL (select) button**
The same as the select button on the unit.
 - 25 **↑ (+) / ↓ (-) buttons**
To control CD, the same as (GP/ALBM) +/- on the unit.
 - 26 **Number buttons**
To receive stored stations (press); store stations (press and hold).

*1 When an ATRAC CD is played.
*2 When an MP3/WMA is played.
*3 If the changer is connected, the operation is different, see page 10.
*4 When an MD changer is connected.
*5 When a CD/MD changer is connected.
*6 When playing back on this unit.
Note
If the unit is turned off and the display disappears, it cannot be operated with the card remote commander unless (SOURCE) on the unit is pressed, or a disc is inserted to activate the unit first.
Tip
For details on how to replace the battery, see "Replacing the lithium battery of the card remote commander" on page 13.


• CDX-GT550

Location of controls and basic operations

Main unit

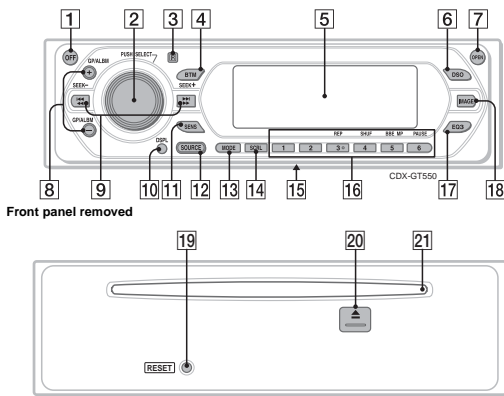

Card remote commander RM-X151




Refer to the pages listed for details. The corresponding buttons on the card remote commander control the same functions as those on the unit.

- 1 **OFF button**
To power off; stop the source.
- 2 **Volume control dial/select button 9**
To adjust volume (rotate); select setup items (press and rotate).
- 3 **Receptor for the card remote commander**
- 4 **BTM button 8**
To start the BTM function (press and hold).
- 5 **Display window**
- 6 **DSO button 2**
To select the DSO mode (1, 2, 3 or off). The larger the number, the more enhanced the effect.
- 7 **OPEN button 5**

- 8 **GP*/ALBM*2 +/- buttons*3**
To skip groups/albums (press); skip groups/albums continuously (press and hold).
 - 9 **SEEK +/- buttons**
CD:
To skip tracks (press); skip tracks continuously (press, then press again within about 1 second and hold); reverse/fast-forward a track (press and hold).
Radio:
To tune in stations automatically (press); find a station manually (press and hold).
 - 10 **DSPL (display) button 8**
To change display items.
 - 11 **SENS button**
To improve weak reception: Local/Mono.
 - 12 **SOURCE button**
To power on; change the source (Radio/CD/MD*/AUX).
 - 13 **MODE button 8, 10**
To select the radio band (FM/AM)/select the unit*5.
 - 14 **SCRL (scroll) button**
To scroll display item.
 - 15 **Frequency select switch (located on the bottom of the unit)**
See "Frequency Select switch" in the supplied installation/connections manual.
 - 16 **Number buttons**
CD/MD*4:
③: **REP** 8, 10
④: **SHUF** 8, 10
⑤: **BBE MP***2
To activate the BBE MP function, set "BBE MP on." To cancel, set "BBE MP off."
⑥: **PAUSE***6
To pause playback. To cancel, press again.
Radio:
To receive stored stations (press); store stations (press and hold).
 - 17 **EQ3 (equalizer) button 9**
To select an equalizer type (Xplod, Vocal, Edge, Cruise, Space, Gravity, Custom or Off).
 - 18 **IMAGE button 2**
To select the display image.
Movie mode 1-3 → Spectrum analyzer mode 1-5 → Space Producer mode → Wall paper mode 1-3 → Normal play/reception mode
 - 19 **RESET button 4**
 - 20 **(eject) button 5**
To eject the disc.
 - 21 **Disc slot 5**
To insert the disc.
- The following buttons on the card remote commander have also different buttons/functions from the unit.
- 22 **(◀◀) / (▶▶) buttons**
To control CD/radio, the same as (SEEK) +/- on the unit.
 - 23 **VOL (volume) +/- button**
To adjust volume.
 - 24 **ATT (attenuate) button**
To attenuate the sound. To cancel, press again.
 - 25 **SEL (select) button**
The same as the select button on the unit.
 - 26 **↑ (+) / ↓ (-) buttons**
To control CD, the same as (GP/ALBM) +/- on the unit.
 - 27 **Number buttons**
To receive stored stations (press); store stations (press and hold).

*1 When an ATRAC CD is played.
*2 When an MP3/WMA is played.
*3 If the changer is connected, the operation is different, see page 10.
*4 When an MD changer is connected.
*5 When a CD/MD changer is connected.
*6 When playing back on this unit.
Note
If the unit is turned off and the display disappears, it cannot be operated with the card remote commander unless (SOURCE) on the unit is pressed, or a disc is inserted to activate the unit first.
Tip
For details on how to replace the battery, see "Replacing the lithium battery of the card remote commander" on page 13.

• CONNECTIONS
 • CDX-GT50W/GT500: US, Canadian Model

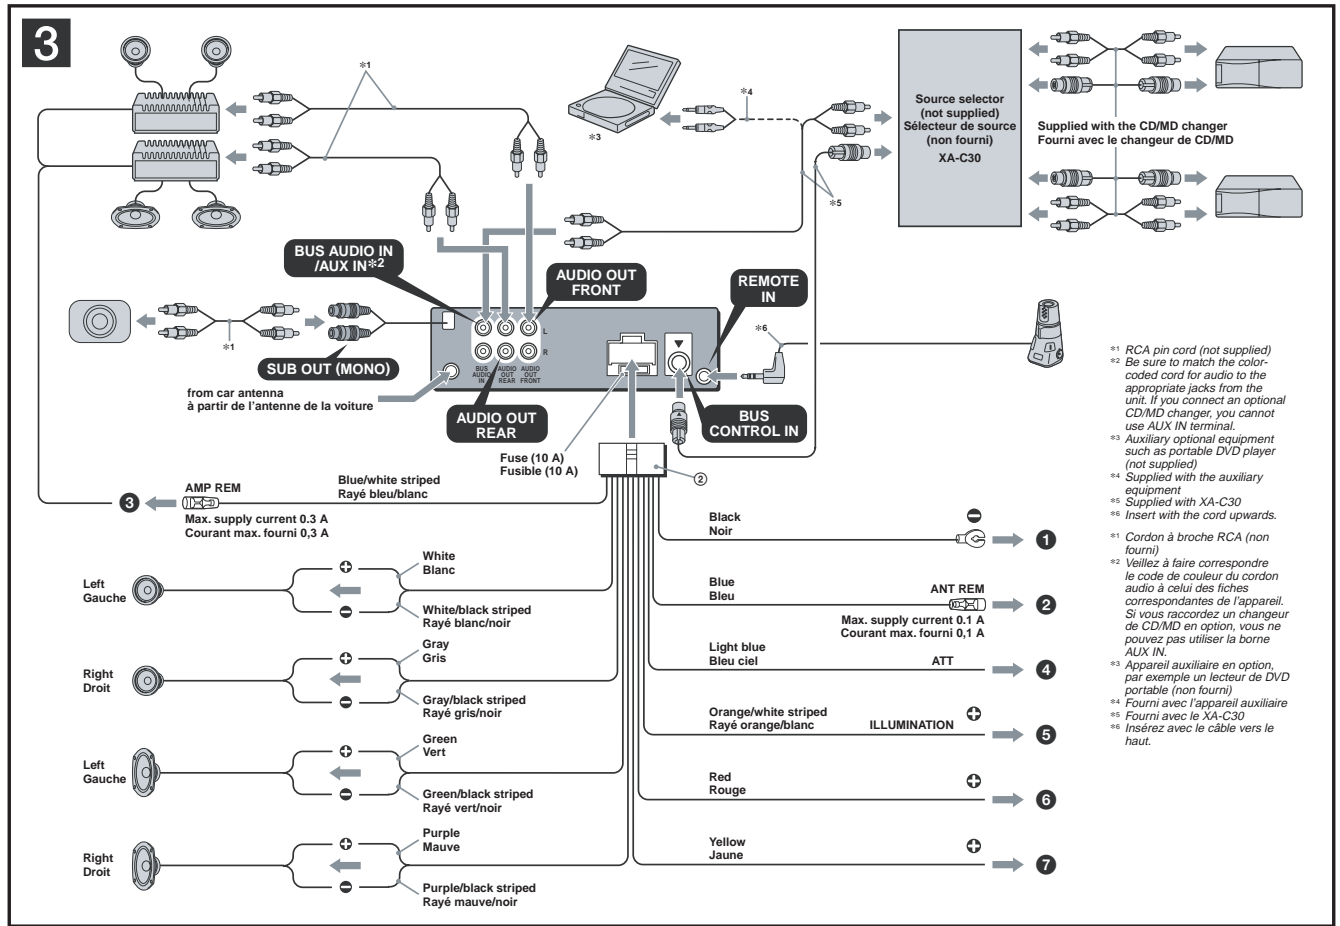

Connection diagram 3

- 1 To a metal surface of the car
 First connect the black ground lead, then connect the orange/white striped, yellow, and red power input leads.
- 2 To the power antenna control lead or power supply lead of antenna booster amplifier
 Notes
 • It is not necessary to connect this lead if there is no power antenna or antenna booster, or with a manually-operated telescopic antenna.
 • When your car has a built-in FM/AM antenna in the rear/side glass, see "Notes on the control and power supply leads."
- 3 To AMP REMOTE IN of an optional power amplifier
 This connection is only for amplifiers. Connecting any other system may damage the unit.
- 4 To the interface cable of a car telephone
- 5 To a car's illumination signal
 Be sure to connect the black ground lead to a metal surface of the car first.
- 6 To the +12 V power terminal which is energized in the accessory position of the ignition key switch
 Notes
 • If there is no accessory position, connect to the +12 V power (battery) terminal which is energized at all times. Be sure to connect the black ground lead to a metal surface of the car first.
 • When your car has a built-in FM/AM antenna in the rear/side glass, see "Notes on the control and power supply leads."
- 7 To the +12 V power terminal which is energized at all times
 Be sure to connect the black ground lead to a metal surface of the car first.

Notes on the control and power supply leads

- The power antenna control lead (blue) supplies +12 V DC when you turn on the tuner.
- When your car has built-in FM/AM antenna in the rear/side glass, connect the power antenna control lead (blue) or the accessory power input lead (red) to the power terminal of the existing antenna booster. For details, consult your dealer.
- A power antenna without a relay box cannot be used with this unit.

Memory hold connection

When the yellow power input lead is connected, power will always be supplied to the memory circuit even when the ignition switch is turned off.

Notes on speaker connection

- Before connecting the speakers, turn the unit off.
- Use speakers with an impedance of 4 to 8 ohms, and with adequate power handling capacities to avoid its damage.
- Do not connect the speaker terminals to the car chassis, or connect the terminals of the right speakers with those of the left speaker.
- Do not connect the ground lead of this unit to the negative (-) terminal of the speaker.
- Do not attempt to connect the speakers in parallel.
- Connect only passive speakers. Connecting active speakers (with built-in amplifiers) to the speaker terminals may damage the unit.
- To avoid a malfunction, do not use the built-in speaker leads installed in your car if the unit shares a common negative (-) lead for the right and left speakers.
- Do not connect the unit's speaker leads to each other.

Note on connection

If speaker and amplifier are not connected correctly, "Failure" appears in the display. In this case, make sure the speaker and amplifier are connected correctly.

Schéma de raccordement 3

- 1 À un point métallique de la voiture
 Branchez d'abord le fil de masse noir et, ensuite, les fils d'entrée d'alimentation rayé orange/blanc, jaune, et rouge.
- 2 Vers le câble de commande d'antenne électrique ou le câble d'alimentation de l'amplificateur d'antenne
 Remarques
 • Il n'est pas nécessaire de raccorder ce câble s'il n'y a pas d'antenne électrique ni d'amplificateur d'antenne, ou avec une antenne télescopique manuelle.
 • Si votre voiture est équipée d'une antenne FM/AM intégrée dans la vitre arrière/latérale, voir « Remarques sur les câbles de commande et d'alimentation ».
- 3 Au niveau de AMP REMOTE IN de l'amplificateur de puissance en option
 Ce raccordement s'applique uniquement aux amplificateurs. Le branchement de tout autre système risque d'endommager l'appareil.
- 4 Vers le cordon de liaison d'un téléphone de voiture
- 5 Vers le connecteur du signal d'éclairage de la voiture
 Raccordez d'abord le câble de mise à la masse noir à un point métallique du véhicule.
- 6 À la borne +12 V qui est alimentée quand la clé de contact est sur la position accessoires
 Remarques
 • S'il n'y a pas de position accessoires, raccordez la borne d'alimentation (batterie) +12 V qui est alimentée en permanence.
 Raccordez d'abord le câble de mise à la masse noir à un point métallique du véhicule.
 • Si votre voiture est équipée d'une antenne FM/AM intégrée dans la vitre arrière/latérale, voir « Remarques sur les câbles de commande et d'alimentation ».
- 7 À la borne +12 V qui est alimentée en permanence
 Raccordez d'abord le câble de mise à la masse noir à un point métallique du véhicule.

Remarques sur les câbles de commande et d'alimentation

- Le câble de commande d'antenne électrique (bleu) fournit une alimentation de +12 V CC lorsque vous mettez la radio sous tension.
- Lorsque votre voiture est équipée d'une antenne FM/AM intégrée dans la vitre arrière/latérale, raccordez le câble de commande d'antenne (bleu) ou l'entrée d'alimentation des accessoires (rouge) à la borne d'alimentation de l'amplificateur d'antenne existant. Pour plus de détails, consultez votre détaillant.
- Une antenne électrique sans boîtier de relais ne peut pas être utilisée avec cet appareil.

Raccordement pour la conservation de la mémoire

Lorsque le câble d'entrée d'alimentation jaune est raccordé, le circuit de la mémoire est alimenté en permanence même si la clé de contact est sur la position d'arrêt.


Remarques sur le raccordement des haut-parleurs

- Avant de raccorder les haut-parleurs, mettez l'appareil hors tension.
- Utilisez des haut-parleurs ayant une impédance de 4 à 8 ohms avec une capacité électrique adéquate pour éviter de les endommager.
- Ne raccordez pas les bornes du système de haut-parleurs au châssis de la voiture et ne raccordez pas les bornes des haut-parleurs droit à celles du haut-parleur gauche.
- Ne raccordez pas le câble de mise à la masse de cet appareil à la borne négative (-) du haut-parleur.
- N'essayez pas de raccorder les haut-parleurs en parallèle.
- Raccordez uniquement des haut-parleurs passifs. Le raccordement de haut-parleurs actifs (avec amplificateurs intégrés) aux bornes des haut-parleurs peut endommager l'appareil.
- Pour éviter tout problème de fonctionnement, n'utilisez pas les câbles des haut-parleurs intégrés installés dans votre voiture si l'appareil partage un câble négatif commun (-) pour les haut-parleurs droit et gauche.
- Ne raccordez pas entre eux les cordons des haut-parleurs de l'appareil.

Remarque sur le raccordement

Si les haut-parleurs et l'amplificateur ne sont pas raccordés correctement, le message « Failure » s'affiche. Dans ce cas, assurez-vous que les haut-parleurs et l'amplificateur sont bien raccordés.

• CDX-GT500: AEP, UK Model

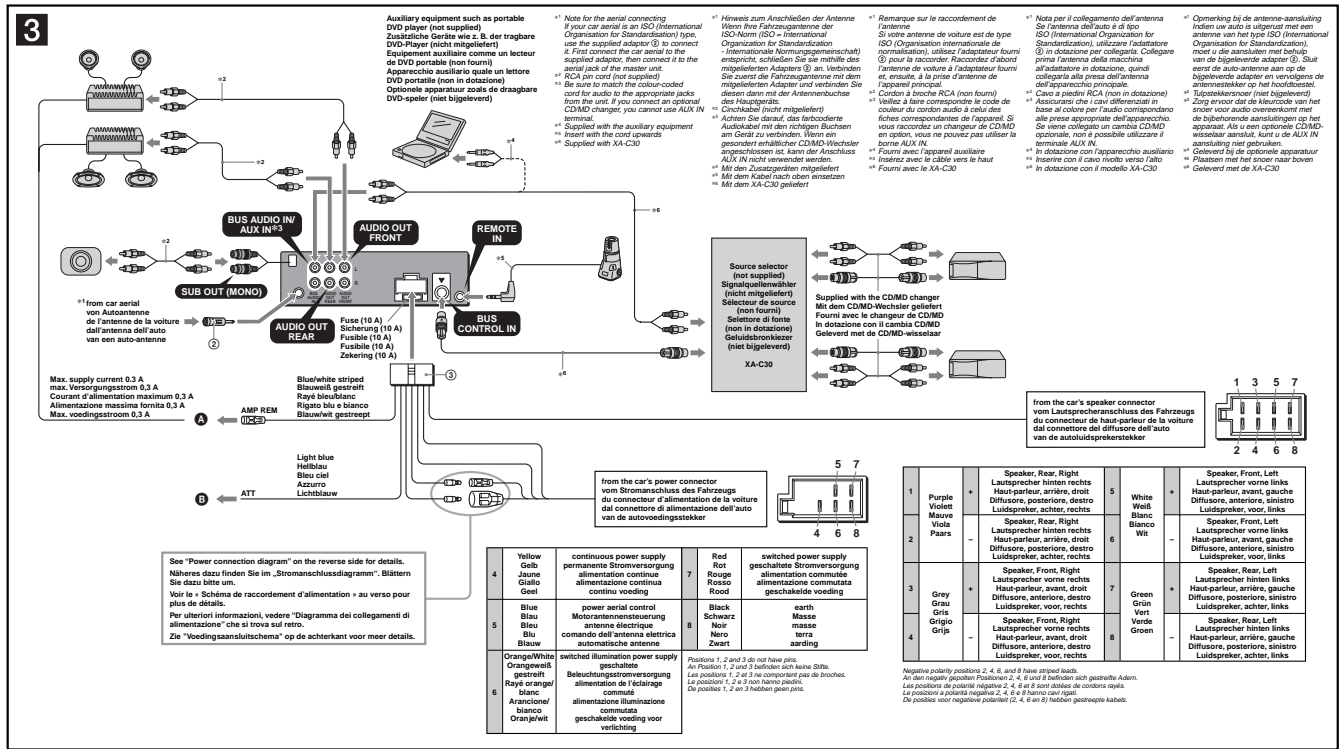

Connection diagram 3

- To AMP REMOTE IN of an optional power amplifier
- To the interface cable of a car telephone

Warning

If you have a power aerial without a relay box, connecting this unit with the supplied power connecting lead (3) may damage the aerial.

Notes on the control power and supply leads

- The power aerial control lead (built-in supply) +12 V DC when you turn on the tuner, or when you activate the AF (Alternative Frequency) or TA (Traffic Announcement) function.
- When your car has built-in FM/AM/LW aerial in the rear parcel shelf, connect the power aerial lead (blue) or the accessory power input lead (red) to the power terminal of the existing aerial socket. For details, consult your dealer.
- A power aerial without a relay box cannot be used with this unit.

Memory hold connection

When the yellow power input lead is connected, power will always be supplied to the memory circuit even when the ignition switch is turned off.

Notes on speaker connection

- Before connecting the speakers, turn the unit off.
- Use speakers with an impedance of 4 to 8 ohms, and with adequate power handling capacities to avoid its damage.
- Do not connect the speaker terminals to the car chassis, or connect the terminals of the right speakers with those of the left speaker.
- Do not connect the earth lead of this unit to the negative (-) terminal of the speaker.
- Do not attempt to connect the speakers in parallel.
- Connect only passive speakers. Connecting active speakers (with built-in amplifiers) to the speaker terminals may damage the unit.
- To avoid a malfunction, do not use the built-in speaker leads installed in your car if the unit shares a common reference (-) lead for the right and left speakers.
- Do not connect the unit's speaker leads to each other.

Note on connection

If speaker and amplifier are not connected correctly, "Failure" appears in the display. In this case, make sure the speaker and amplifier are interconnected correctly.

Anschlussdiagramm 3

- AMP REMOTE IN des gesondert erhältlichen Endverstärkers
- Anschnittstellenkabel eines Autotelefons

Warnung

Wenn Sie ein Motorantenne ohne Relaiskasten verwenden, kann durch Anschließen dieses Geräts mit dem mitgelieferten Stromverbindungskabel (3) die Antenne beschädigt werden.

Hinweise zu den Steuer- und Stromversorgungslösungen

- Die Motorantennen-Steuerung (blau) liefert +12 V Gleichstrom, wenn Sie den Tuner einschalten oder die AF (Alternativfrequenzwahl) oder die TA (Verkehrsinformationen) aktivieren.
- Wenn das Fahrzeug mit einer in der Heckklappe/Scheinwerferhaube integrierten FM (UKW)/MW/LW-Antenne ausgestattet ist, schließen Sie die Motorantennen-Steuerung (blau) oder die Zubehörentwicklungslösung (rot) an den Stromversorgungsterminal des vorhandenen Antennenstrahlers an. Näheres dazu erfahren Sie bei Ihrem Händler.
- Es kann nur eine Motorantenne mit Relaiskasten angeschlossen werden.

Stromversorgung des Speichers

Wenn die gelbe Stromversorgungslösung angeschlossen ist, wird der Speicher stets (auch bei ausgeschalteter Zündung) mit Strom versorgt.

Hinweise zum Lautsprecheranschluss

- Schalten Sie das Gerät aus, bevor Sie die Lautsprecher anschließen.
- Verwenden Sie Lautsprecher mit einer Impedanz zwischen 4 und 8 Ohm und ausreichender Belastbarkeit. Ansonsten können die Lautsprecher beschädigt werden.
- Verbinden Sie die Lautsprecheranschlüsse nicht mit dem Wagenchassis und verbinden Sie auch nicht die Anschlüsse des rechten mit denen des linken Lautspeakers.
- Verbinden Sie die Masseleitungs-Lösung nicht mit dem negativen (-) Lautsprecheranschluss.
- Verbinden Sie nicht Lautsprecher parallel.
- An die Lautsprecheranschlüsse dieses Geräts dürfen nur Passivlautsprecher angeschlossen werden. Schließen Sie keine Aktivlautsprecher (Lautsprecher mit eingebautem Verstärker) an, da das Gerät sonst beschädigt werden kann.
- Um Fehlfunktionen zu vermeiden, verwenden Sie nicht die im Fahrzeug installierten, wenn diese eine gemeinsame Referenz (-) Leitung für den rechten und den linken Lautsprecher verwenden.
- Verbinden Sie nicht die Lautsprecherkabel des Geräts miteinander.

Hinweise zum Anschließen

Wenn Lautsprecher und Verstärker nicht richtig angeschlossen sind, erscheint "Failure" im Display. Vergewissern Sie sich in diesem Fall, dass Lautsprecher und Verstärker richtig angeschlossen sind.

Schémas de raccordement 3

- AMP REMOTE IN d'un amplificateur de puissance facultatif
- Vers le cordon de liaison d'un téléphone de voiture

Attention

Si vous disposez d'une antenne électrique sans boîtier de relais, le branchement de ce appareil au moyen du cordon d'alimentation fourni (3) risque d'endommager l'antenne.

Remarques sur les câbles de commande et d'alimentation

Le câble de commande (bleu) fournit du courant continu de +12 V lorsque vous activez le tuner ou lorsque vous activez la fonction AF (fréquence alternative) ou la TA (information de circulation).

Lorsque votre voiture est équipée d'une antenne FM/AM (OU) LW (PO) intégrée dans la vitre arrière latérale, raccordez le câble de commande d'antenne (bleu) ou l'entrée d'alimentation de secours (rouge) au borne de l'amplificateur d'antenne existant. Pour plus de détails, consultez votre revendeur.

Une antenne électrique sans boîtier de relais ne peut pas être utilisée avec cet appareil.

Raccordez pour la conservation de la mémoire

Lorsque le câble de commande d'antenne jaune est connecté, le circuit de la mémoire est alimenté en permanence même si la clé de contact est en position d'arrêt.

Remarques sur le raccordement des haut-parleurs

- Avant de raccorder les haut-parleurs, mettez l'appareil hors tension.
- Utilisez des haut-parleurs ayant une impédance de 4 à 8 ohms et une capacité adéquate sous peine de les endommager.
- Né pas raccorder les bornes du système de haut-parleurs au châssis de la voiture ni ne pas raccorder les bornes de haut-parleur droit à celles de haut-parleur gauche.
- Né pas raccorder le câble de masse à la masse de ce appareil à la borne négative (-) du haut-parleur.
- Né pas tenter de raccorder les haut-parleurs en parallèle.
- Connexion interdite des haut-parleurs passifs.
- Les connecteurs de haut-parleurs actifs (avec des amplificateurs intégrés) aux bornes des haut-parleurs peuvent endommager l'appareil.
- Pour éviter tout problème de fonctionnement, n'utilisez pas les câbles de haut-parleurs installés dans votre véhicule si l'appareil dispose d'un câble négatif commun (-) pour les haut-parleurs droit et gauche.
- Né pas raccorder pas entre eux les cordons des haut-parleurs de l'appareil.

Remarque sur le raccordement

Si les haut-parleurs et l'amplificateur ne sont pas raccordés correctement, le message "Failure" s'affiche. Dans ce cas, assurez-vous que les enceintes et l'amplificateur sont raccordés correctement.

Schema di collegamento 3

- AMP REMOTE IN di un amplificatore di potenza opzionale
- Al cavo di interfaccia di un telefono per auto

Avvertenza

Quando si collega l'apparecchio con il cavo di alimentazione in dotazione (3), si potrebbe danneggiare l'antenna elettrica se questa non dispone di scatola a relé.

Note sul cavo di controllo e di alimentazione

- Il cavo (blu) di controllo dell'antenna fornisce l'alimentazione per la +12 V CC quando si attiva il sintonizzatore oppure la funzione TA (notiziario sui traffici) o AF (frequenza alternativa).
- Se l'automobile è dotata di antenna FM/AM/LW incorporata nel vetro posteriore laterale, collegare il cavo (blu) di controllo dell'antenna elettrica o il cavo (rosso) di ingresso dell'alimentazione di riserva al terminale di alimentazione dell'amplificatore dell'antenna esistente. Per ulteriori informazioni, consultare il proprio rivenditore.
- Non è possibile usare un'antenna elettrica senza scatola a relé con questo apparecchio.

Collegamento per la conservazione della memoria

Quando il cavo di ingresso alimentazione giallo è collegato, viene sempre fornita alimentazione al circuito di memoria anche quando l'interruttore di accensione è spento.

Note sul collegamento dei diffusori

- Prima di collegare i diffusori spegnere l'apparecchio.
- Usare diffusori di impedenza compresa tra 4 e 8 Ohm e con capacità di potenza adeguata, altrimenti i diffusori potrebbero venire danneggiati.
- Non collegare i terminali del sistema diffusori al telaio dell'auto o non collegare i terminali dei diffusori destro a quelli del diffusore sinistro.
- Non collegare il cavo di terra di questo apparecchio al terminale negativo (-) del diffusore.
- Assicurarsi di collegare soltanto diffusori passivi, poiché il collegamento di diffusori attivi, ossia di amplificatori incorporati, ai terminali dei diffusori potrebbe danneggiare l'apparecchio.
- Per evitare problemi di funzionamento, non utilizzare i cavi dei diffusori incorporati installati nell'automobile se l'apparecchio condivide un cavo comune negativo (-) per i diffusori destro e sinistro.
- Non collegare fra loro i cavi dei diffusori dell'apparecchio.

Note sui collegamenti

Se l'amplificatore e i diffusori non sono collegati correttamente, "Failure" viene visualizzato nel display. In tal caso, accertarsi che l'amplificatore e i diffusori siano collegati correttamente.

Aansluitschema 3

- Naar AMP REMOTE IN van een optionele eindversterker
- Naar het interfacecavo van een autotelefoon

Waarschuwing

Indien u een elektrisch antenne behuizing hebt zonder relaiskast, kan het aansluiten van dit apparaat met het bijgeleverde netsnoer (3) de antenne beschadigen.

Opmerkingen betreffende de bedienings- en voedingskabel

- De antennevoedingskabel (blauw) levert +12 V gelijkstroom wanneer u de tuner inschakelt of de AF (Alternatieve Frequentie) of TA (Traffic Announcement) functie activeert.
- Wanneer uw auto is uitgerust met een FM/AM/LW antenne in de achterruit/wijk, moet u de antennevoedingskabel (blauw) of de hulpvoeding (rood) aansluiten op de voedingsgang van de bestaande antenneversterker. Raadpleeg uw dealer voor meer details.
- Met dit apparaat is het niet mogelijk een automatische antenne zonder relaiskast te gebruiken.

Inhoudsopbouw van het geheugen

Zolang de gele stroomvoeding is aangesloten, blijft de stroomvoeding van het geheugen open, ook wanneer het contact van de auto wordt uitgeschakeld.


Opmerkingen betreffende het aansluiten van de luidsprekers

- Zorg dat het apparaat is uitgeschakeld, alvorens de luidsprekers aan te sluiten.
- Gebruik luidsprekers met een impedantie van 4 tot 8 Ohm en let op dat die het vermogen van de versterker kunnen verwerken. Als dit niet doet, kunnen de luidsprekers ernstig beschadigd raken.
- Verbind in geen geval de aansluitingen van de luidsprekers niet met chassis van de auto en sluit de aansluitingen van de rechter en linker luidspreker niet op elkaar aan.
- Verbind de aansluitingen van dit apparaat niet met de negatieve (-) aansluiting van de luidspreker.
- Probeer nooit de luidsprekers parallel aan te sluiten.
- Sluit geen actieve luidsprekers (met ingebouwde versterkers) aan op de luidsprekeransluiting van dit apparaat. Dit zal leiden tot beschadiging van de actieve luidsprekers. Sluit dus altijd uitsluitend luidsprekers zonder ingebouwde versterker aan.
- Om defecten te vermijden mag u de bestaande luidsprekerbedrading in uw auto niet gebruiken wanneer er een gemeenschappelijke negatieve (-) draad is voor de rechter en linker luidsprekers.

Opmerking over aansluiten

Als de luidspreker en versterker niet correct zijn aangesloten, wordt "Failure" in het display weergegeven. In dit geval moet u zorgen dat de luidspreker en versterker correct zijn aangesloten.

• CDX-GT500EE

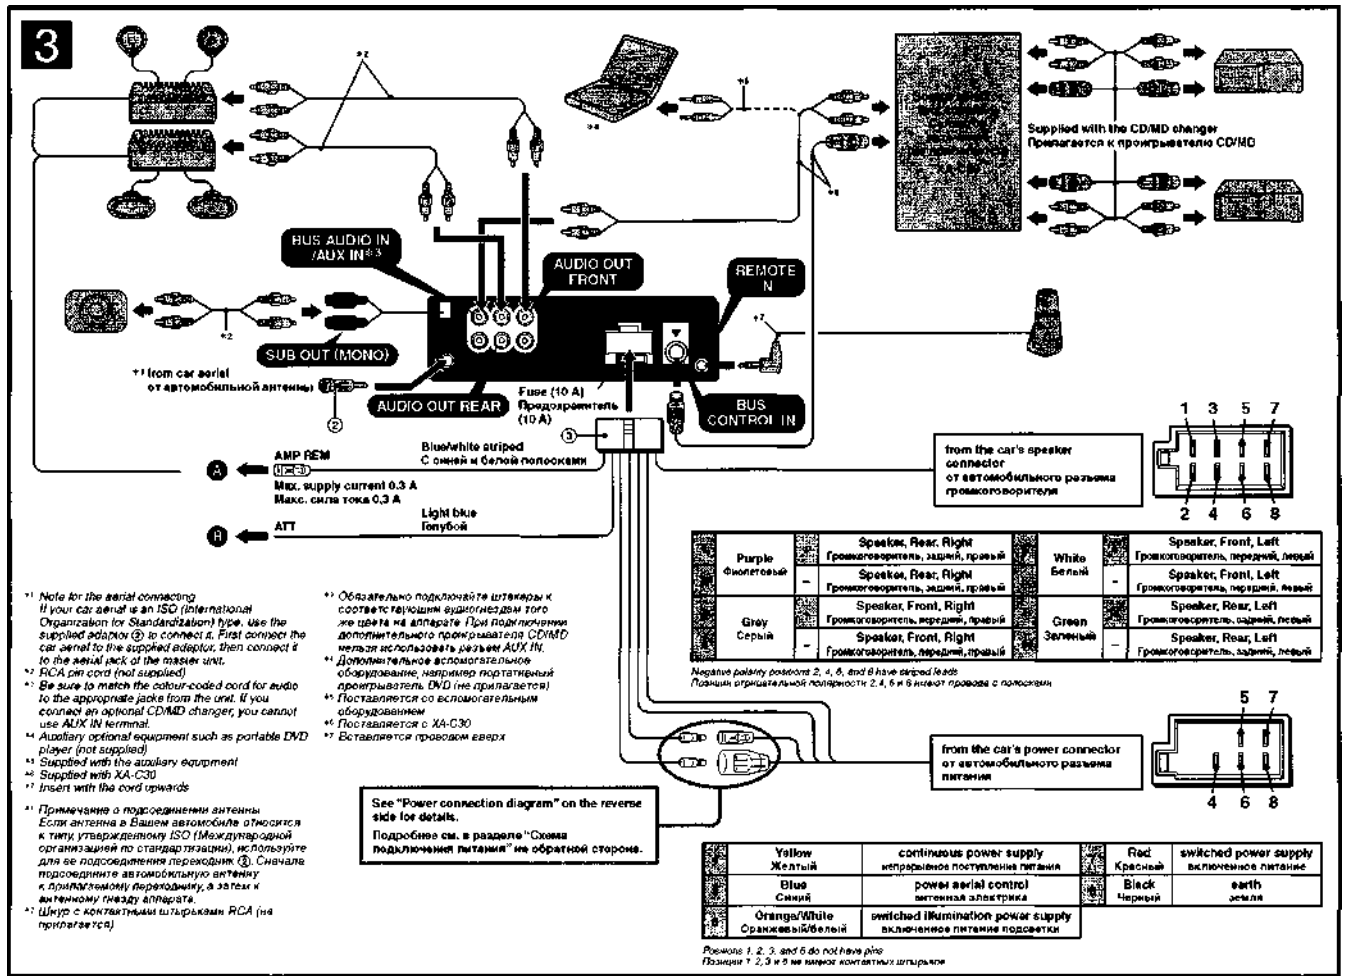

Connection diagram 3

- To AMP REMOTE IN of an optional power amplifier
This connection is only for amplifiers. Connecting any other system may damage the unit.
- To the interface cable of a car telephone

Warning

If you have a power aerial without a relay box, connecting this unit with the supplied power connecting lead ③ may damage the aerial.

Notes on the control and power supply leads

- The power aerial control lead (blue) supplies +12 V DC when you turn on the tuner.
- When your car has built-in FM/AM aerial in the rear/side glass, connect the power aerial control lead (blue) or the accessory power input lead (red) to the power terminal of the existing aerial booster. For details, consult your dealer.
- A power aerial without a relay box cannot be used with this unit.

Memory hold connection

When the yellow power input lead is connected, power will always be supplied to the memory circuit even when the ignition switch is turned off.

Notes on speaker connection

- Before connecting the speakers, turn the unit off.
- Use speakers with an impedance of 4 to 8 ohms, and with adequate power handling capacities to avoid its damage.
- Do not connect the speaker terminals to the car chassis, or connect the terminals of the right speakers with those of the left speaker.
- Do not connect the earth lead of this unit to the negative (-) terminal of the speaker.
- Do not attempt to connect the speakers in parallel.
- Connect only passive speakers. Connecting active speakers (with built-in amplifiers) to the speaker terminals may damage the unit.
- To avoid a malfunction, do not use the built-in speaker leads installed in your car if the unit shares a common negative (-) lead for the right and left speakers.
- Do not connect the unit's speaker leads to each other.

Note on connection

If speaker and amplifier are not connected correctly, "Failure" appears in the display. In this case, make sure the speaker and amplifier are connected correctly.

Схема подсоединения 3

- Подключение к входу AMP REMOTE IN дополнительного усилителя мощности
Этот вариант подсоединения используется только для усилителей. Подсоединение любой другой системы может привести к повреждению аппарата.
- К интерфейсному кабелю автомобильного телефона

Предостережение

Если Вы используете антенну с электрическим приводом без реле-блока, подсоединение этого аппарата посредством прилагаемого шпура питания ③ может привести к повреждению антенны.

О проводах управления и питания

- При включении тюнера по проводу питания приходит +12 В постоянного тока.
- Если на заднем/боковом стекле автомобиля установлено встроенное антенно-дискорное FM/AM, подсоедините провод питания приемной антенны (синий) или провод питания аппарата (красный) к клемме питания существующего усилителя антенны. Чтобы получить дополнительные сведения, обратитесь к своему дилеру.
- Антенна с электрическим приводом, не снабженная реле-блоком, с этим аппаратом использоваться не может.

Подсоединение для поддержки памяти

Когда к аппарату подсоединен желтый электрический провод, блок памяти будет постоянно получать питание даже при выключенном зажигании.


Примечания относительно подсоединения громкоговорителей

- Полноценно подсоединить громкоговорителем, включенного аппарата
- Используйте громкоговорители с полным сопротивлением 4 - 8 Ом, обладающие способностью принимать достаточно мощный сигнал. В противном случае они могут быть повреждены.
- Не подсоединяйте контактные гнезда громкоговорителя к высокому напряжению и не соединяйте гнезда правого громкоговорителя с гнездами левого.
- Не подсоединяйте провод заземления аппарата к отрицательному (-) контакту громкоговорителя.
- Не пытайтесь подсоединить громкоговорители параллельно.
- Подсоединять можно только пассивные громкоговорители. Подсоединение активных громкоговорителей (со встроенными усилителями) к гнездам для громкоговорителей может привести к повреждению аппарата.
- Во избежание неправильной работы аппарата не используйте в автомобиле провода громкоговорителей, если используется общий отрицательный провод (-) для правого и левого громкоговорителей.
- Не подсоединяйте в друг к другу провода громкоговорительного аппарата.

Примечание относительно подсоединения

Если громкоговоритель и усилитель подсоединены неправильно, на дисплее отобразится надпись "Failure". В этом случае проверьте правильность подсоединения громкоговорителя и усилителя.

• CDX-GT550

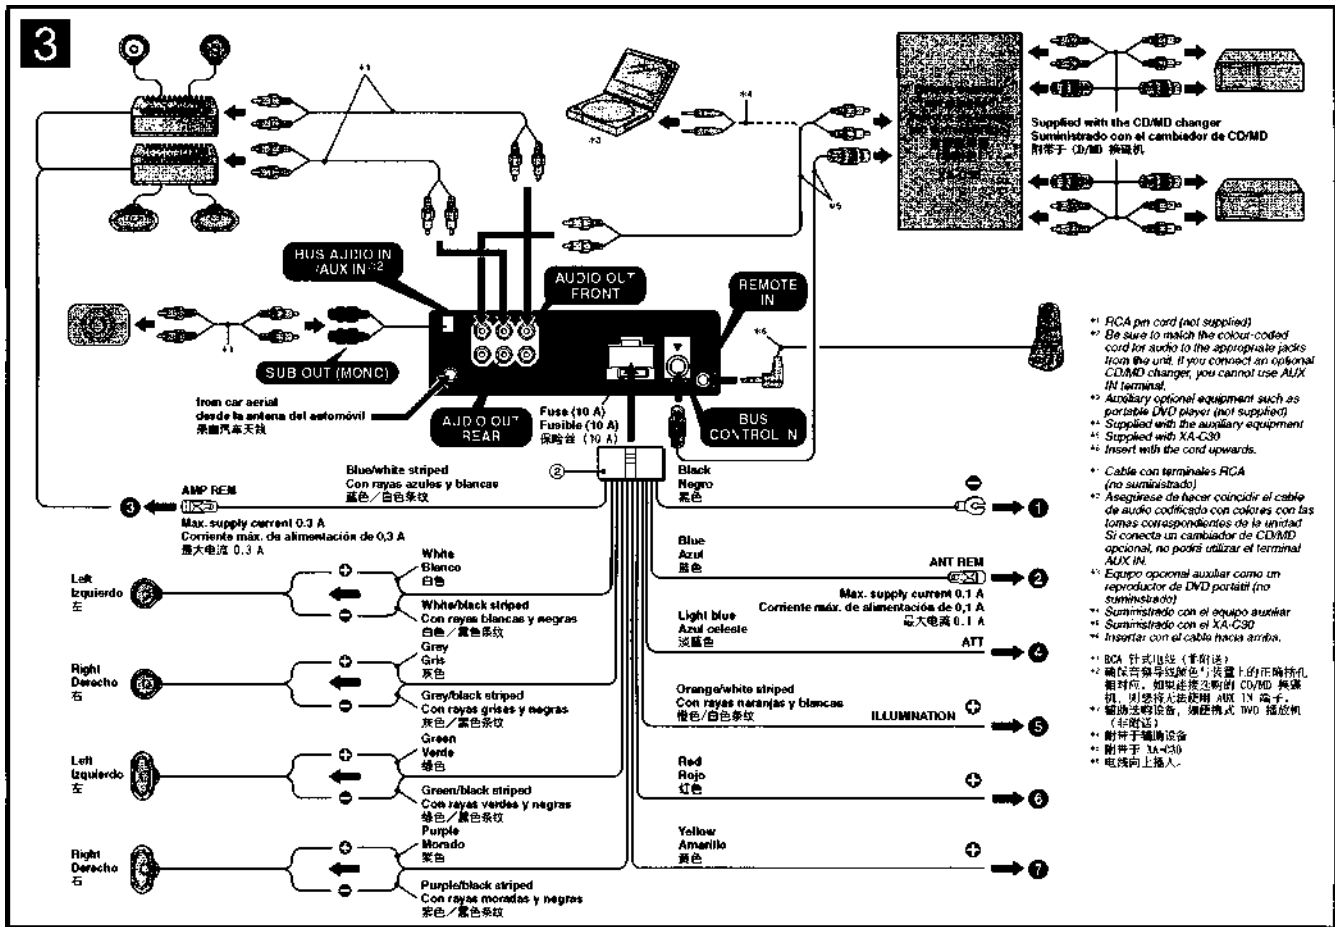

- *1 RCA pin cord (not supplied)
- *2 Be sure to match the colour-coded cord for audio to the appropriate ports from the unit. If you connect an optional CD/MD changer, you cannot use AUX IN terminals.
- *3 Auxiliary optional equipment such as portable DVD player (not supplied)
- *4 Supplied with XA-C30
- *5 Insert with the cord upwards.
- *6 Cable con terminales RCA (no suministrado)
- *7 Asegúrese de hacer coincidir el cable de audio codificado por colores con las tomas correspondientes de la unidad. Si conecta un cambiador de CD/MD opcional, no podrá utilizar el terminal AUX IN.
- *8 Equipo opcional auxiliar como un reproductor de DVD portátil (no suministrado)
- *9 Suministrado con el equipo auxiliar
- *10 Suministrado con el XA-C30
- *11 Insertar con el cable hacia arriba.
- *12 RCA 针式线材 (未附送)
- *13 确保音频导线颜色与装置上的插孔相对应。如果连接选装的 CD/MD 换碟机, 则无法使用 AUX IN 端子。
- *14 随车配备附件, 请在汽车 DVD 播放机 (未附送)
- *15 附件于随车设备
- *16 附件于 XA-C30
- *17 电线向上插入。

Connection diagram 3

- 1 To a metal surface of the car
First connect the black earth lead, then connect the orange/white striped, yellow, and red power input leads.
 - 2 To the power aerial control lead or power supply lead of aerial booster amplifier
Notes
• It is not necessary to connect this lead if there is no power aerial or aerial booster, or with a manually-operated telescopic aerial.
• When your car has a built-in FM/AM aerial in the rear/side glass, see "Notes on the control and power supply leads."
 - 3 To AMP REMOTE IN of an optional power amplifier
This connection is only for amplifiers. Connecting any other system may damage the unit.
 - 4 To the interface cable of a car telephone
 - 5 To a car's illumination signal
Be sure to connect the black earth lead to a metal surface of the car first.
 - 6 To the +12 V power terminal which is energized in the accessory position of the ignition key switch
Notes
• If there is no accessory position, connect to the +12 V power (battery) terminal which is energized at all times.
• Be sure to connect the black earth lead to a metal surface of the car first.
• When your car has a built-in FM/AM aerial in the rear/side glass, see "Notes on the control and power supply leads."
 - 7 To the +12 V power terminal which is energized at all times
Be sure to connect the black earth lead to a metal surface of the car first.
- Notes on the control and power supply leads**
- The power aerial control lead (blue) supplies +12 V DC when you turn on the tuner.
 - When your car has built-in FM/AM aerial in the rear/side glass, connect the power aerial control lead (blue) or the accessory power input lead (red) to the power terminal of the existing aerial booster. For details, consult your dealer.
 - A power aerial without a relay box cannot be used with this unit.
- Memory hold connection**
- When the yellow power lead is connected, power will always be supplied to the memory circuit even when the ignition switch is turned off.
- Notes on speaker connection**
- Before connecting the speakers, turn the unit off.
 - Use speakers with an impedance of 4 to 8 ohms, and with adequate power handling capacities to avoid its damage.
 - Do not connect the speaker terminals to the car chassis, or connect the terminals of the right speakers with those of the left speaker.
 - Do not connect the earth lead of this unit to the negative (-) terminal of the speaker.
 - Do not attempt to connect the speakers in parallel. Connect only passive speakers. Connecting active speakers (with built-in amplifiers) to the speaker terminals may damage the unit.
 - To avoid a malfunction, do not use the built-in speaker leads installed in your car if the unit shares a common negative (-) lead for the right and left speakers.
 - Do not connect the unit's speaker leads to each other.
- Notes on connection**
- If speaker and amplifier are not connected correctly, "Failure" appears in the display. In this case, make sure the speaker and amplifier are connected correctly.

Diagrama de conexión 3


- 1 A una superficie metálica del automóvil
Conecte primero el cable de conexión a masa negro, y después los cables con rayas naranjas y blancas, amarillo, y rojo de entrada de alimentación.
 - 2 Al cable de control de la antena motorizada o al cable de fuente de alimentación del amplificador de señal de la antena
Notas
• Si no se dispone de antena motorizada ni de amplificador de antena, o se utiliza una antena telescópica accionada manualmente, no será necesario conectar este cable.
• Si el automóvil incorpora una antena de FM/AM en el cristal trasero o lateral, consulte "Notas sobre los cables de control y de fuente de alimentación."
 - 3 Al AMP REMOTE IN de un amplificador de potencia opcional
Esta conexión es sólo para amplificadores. La conexión de cualquier otro sistema puede dañar la unidad.
 - 4 Al cable de interfaz de un teléfono para automóvil
 - 5 A una señal de iluminación del automóvil
Asegúrese de conectar primero el cable de conexión a masa negro a una superficie metálica del automóvil.
 - 6 Al terminal de alimentación de +12 V que recibe energía en la posición de accesorio del interruptor de la llave de encendido
Notas
• Si no hay posición de accesorio, conéctelo al terminal de alimentación (batería) de +12 V que recibe energía sin interrupción.
• Asegúrese de conectar primero el cable de conexión a masa negro a una superficie metálica del automóvil.
• Si el automóvil incorpora una antena de FM/AM en el cristal trasero o lateral, consulte "Notas sobre los cables de control y de fuente de alimentación."
 - 7 Al terminal de alimentación de +12 V que recibe energía sin interrupción
Asegúrese de conectar primero el cable de conexión a masa negro a una superficie metálica del automóvil.
- Notas sobre los cables de control y de fuente de alimentación**
- El cable de control de la antena motorizada (azul) suministrará cc de +12 V cuando conecte la alimentación del sintonizador.
 - Si el automóvil dispone de una antena de FM/AM incorporada en el cristal trasero o lateral, conecte el cable de control de antena motorizada (azul) o el cable de entrada de alimentación auxiliar (rojo) al terminal de alimentación del amplificador de antena existente. Para obtener más información, consulte a su distribuidor.
 - Con esta unidad no es posible utilizar una antena motorizada sin caja de relé.
- Nota sobre protección de la memoria**
- Si conecta el cable de entrada de alimentación amarillo, el circuito de la memoria recibirá siempre alimentación, aunque apague el interruptor de encendido.
- Notas sobre la conexión de los altavoces**
- Antes de conectar los altavoces, desconecte la alimentación de la unidad.
 - Utilice altavoces con una impedancia de 4 a 8 Ω con la capacidad de potencia adecuada para evitar que se dañen.
 - No conecte los terminales de altavoz al chasis del automóvil, ni conecte los terminales del altavoz derecho con los del izquierdo.
 - No conecte el cable de conexión a masa de esta unidad al terminal negativo (-) del altavoz.
 - No intente conectar los altavoces en paralelo.
 - Conecte solamente altavoces pasivos. Si conecta altavoces activos (con amplificadores incorporados) a los terminales de altavoz, puede dañar la unidad.
 - Para evitar fallos de funcionamiento, no utilice los cables de altavoz incorporados instalados en el automóvil si la unidad comparte un cable negativo común (-) para los altavoces derecho e izquierdo.
 - No conecte los cables de altavoz de la unidad entre sí.
- Nota sobre la conexión**
- Si el altavoz y el amplificador no están conectados correctamente, aparecerá "Failure" en la pantalla. En tal caso compruebe la conexión de ambos dispositivos.

线路连接图 3

- 1 至汽车金属表面
首先连接黑色接地导线, 然后连接橙色/白色导线、黄色以及红色电源线。
 - 2 至带天线控制或天线放大器电源导线的蓝色控制线或天线放大器电源线
注
• 如果没有电动天线或天线放大器, 或者手动伸缩式天线, 则不需要连接此导线。
• 若汽车配备有内置 FM/AM 天线, 请参阅“关于控制线和电源线连接的注意事项”。
 - 3 至选装的功率放大器的 AMP REMOTE IN 接口
此连接仅适用于功率放大器。连接任何其他系统可能会损坏本机。
 - 4 至汽车电话接口
 - 5 至汽车照明信号
必须首先将黑色接地导线连接到汽车金属表面。
 - 6 至 +12 V 电源端子, 该端子在点火开关附件位置通电
注
• 如果没有附件位置, 请连接到 +12 V 电源 (蓄电池) 端子, 该端子随时处于通电状态。
• 确保首先将黑色接地导线连接到汽车金属表面。
• 若汽车配备有内置 FM/AM 天线, 请参阅“关于控制线和电源线连接的注意事项”。
 - 7 至 +12 V 电源端子, 该端子随时处于通电状态
请首先将黑色接地导线连接到汽车金属表面。
- 关于控制线和电源线连接的注意事项**
- 天线控制线 (蓝色) 将为电动天线 (天线) 提供 +12 V 直流电。
 - 当汽车的天线/天线放大器安装在后窗玻璃或侧窗玻璃上时, 请将天线控制线 (蓝色) 或天线放大器电源线 (红色) 连接到现有的天线放大器电源线端子, 并确保与天线放大器共用同一接地线。
 - 请勿使用不具备高电压耐受能力的电动机。
- 关于记忆电路的连接方法**
- 当连接了黄色电源线时, 即使点火开关关闭, 电路仍可记忆电台记忆。
- 关于扬声器连接的注意事项**
- 连接扬声器之前, 请务必关闭电源。
 - 使用阻抗为 4 Ω 至 8 Ω 且具有足够功率容量的扬声器, 以免损坏。
 - 请勿将扬声器端子直接连接到汽车金属上, 或者在扬声器端子与汽车金属之间进行连接。
 - 请勿将右声道扬声器端子与左声道扬声器端子 (-) 端子连接。
 - 扬声器不可并联连接。
 - 仅连接被动扬声器。如果连接主动扬声器 (具有内置放大器) 至扬声器端子, 可能会损坏本机。
 - 为避免故障, 请勿使用安装在汽车上的扬声器, 如果该扬声器共用同一接地线。
 - 请勿将左右声道扬声器端子相互连接。
- 连接错误的故障排除**
- 如果未正确连接扬声器和放大器, 显示屏上会出现 "Failure"。这样, 请确认扬声器和放大器是否正确连接。

SECTION 2 DISASSEMBLY


Note : This set can be disassemble according to the following sequence.

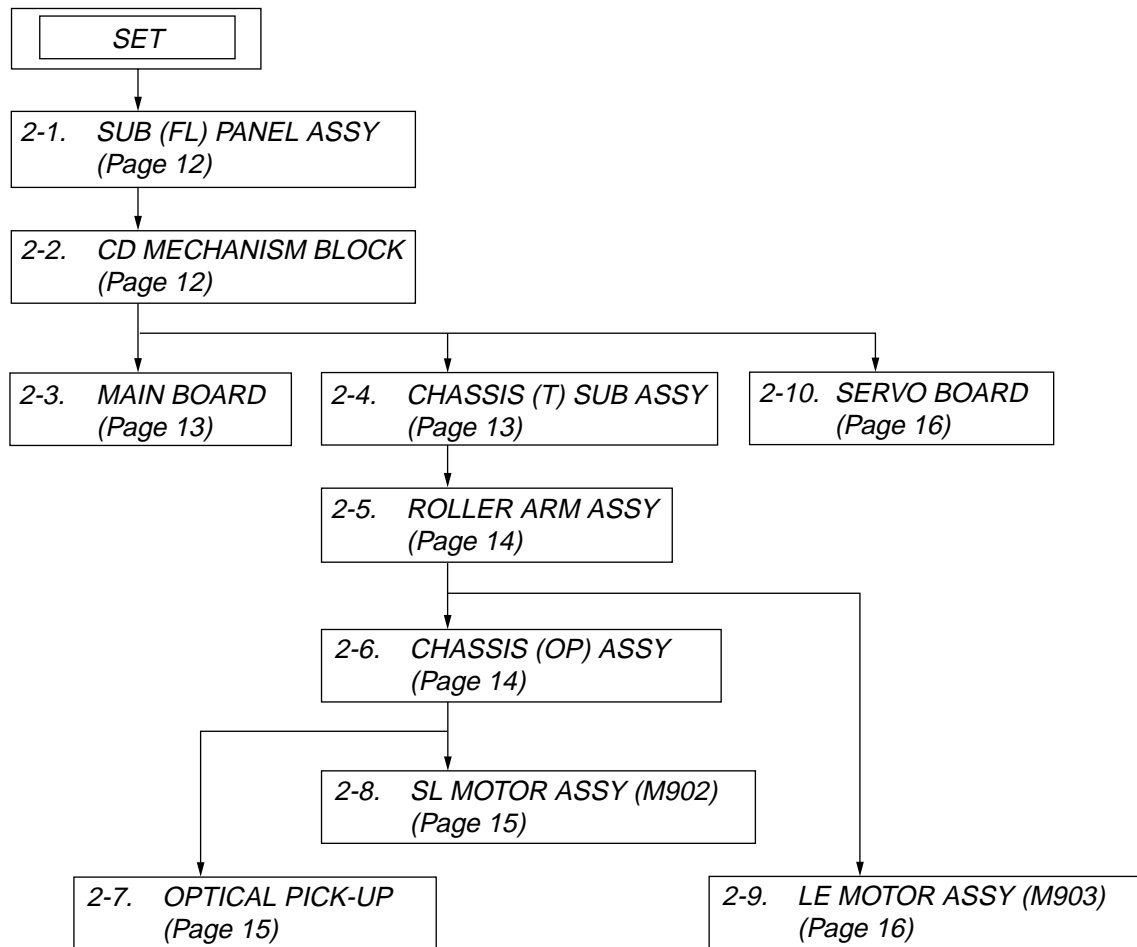


CDX-GT50W/GT500/GT500EE/GT550

Note : Follow the disassembly procedure in the numerical order given.


2-1. SUB (FL) PANEL ASSY

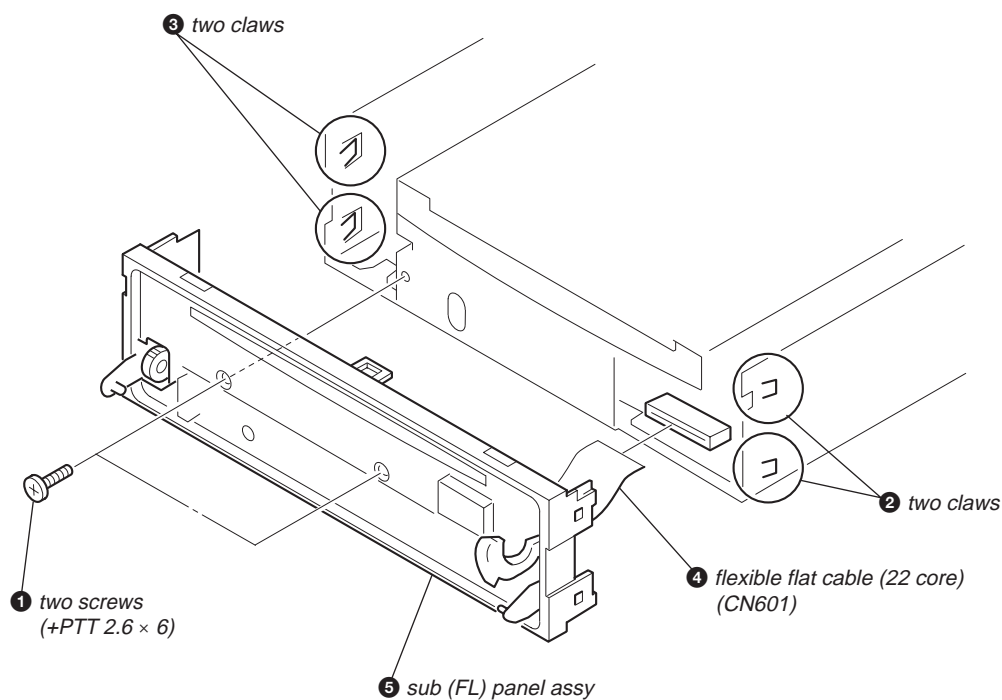


2-2. CD MECHANISM BLOCK

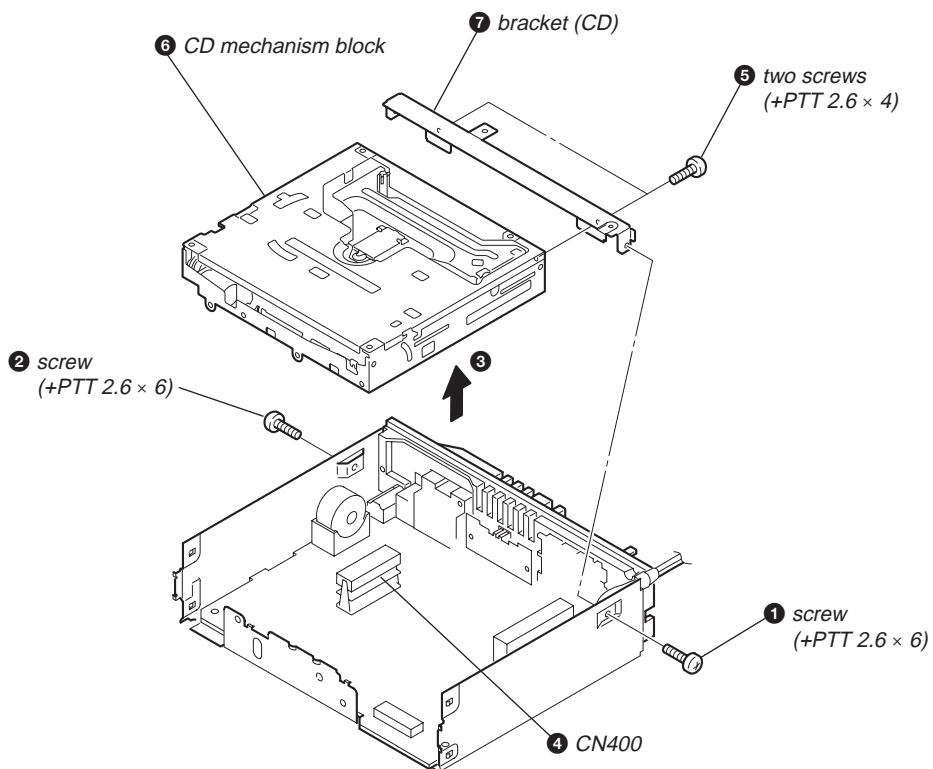


2-3. MAIN BOARD

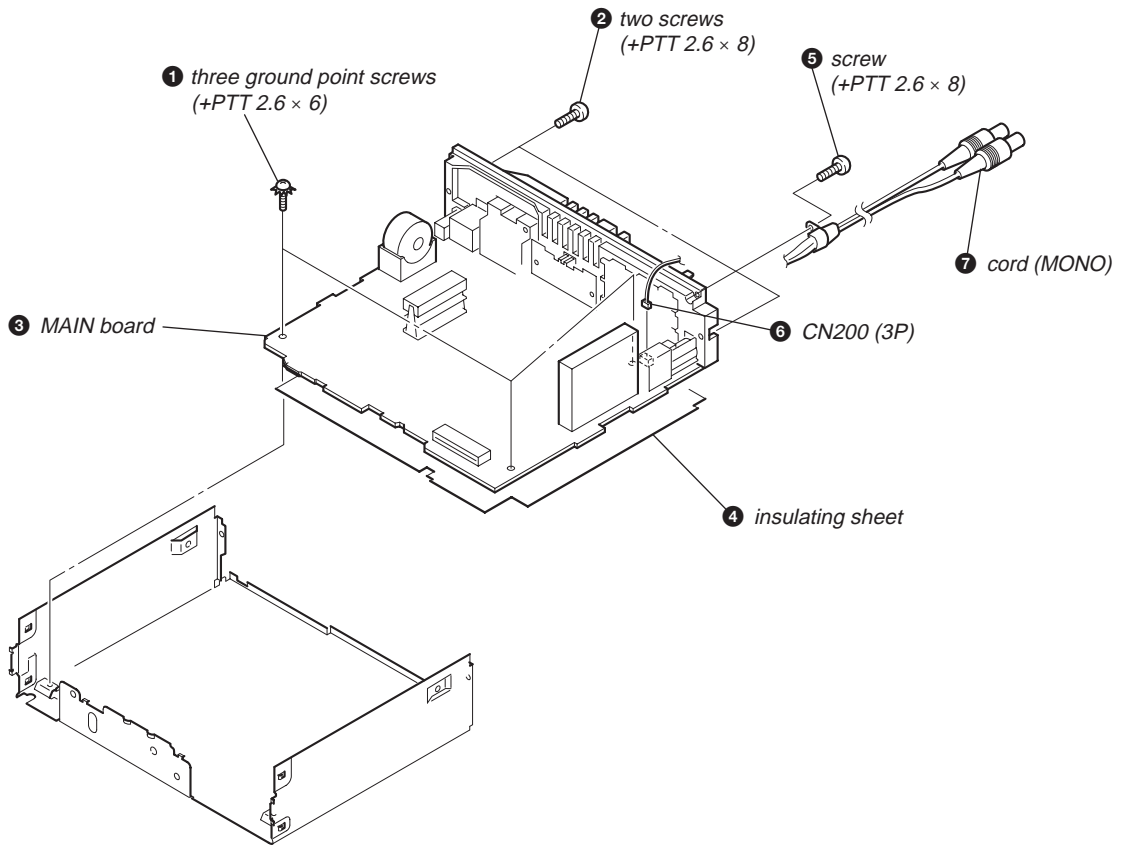


2-4. CHASSIS (T) SUB ASSY

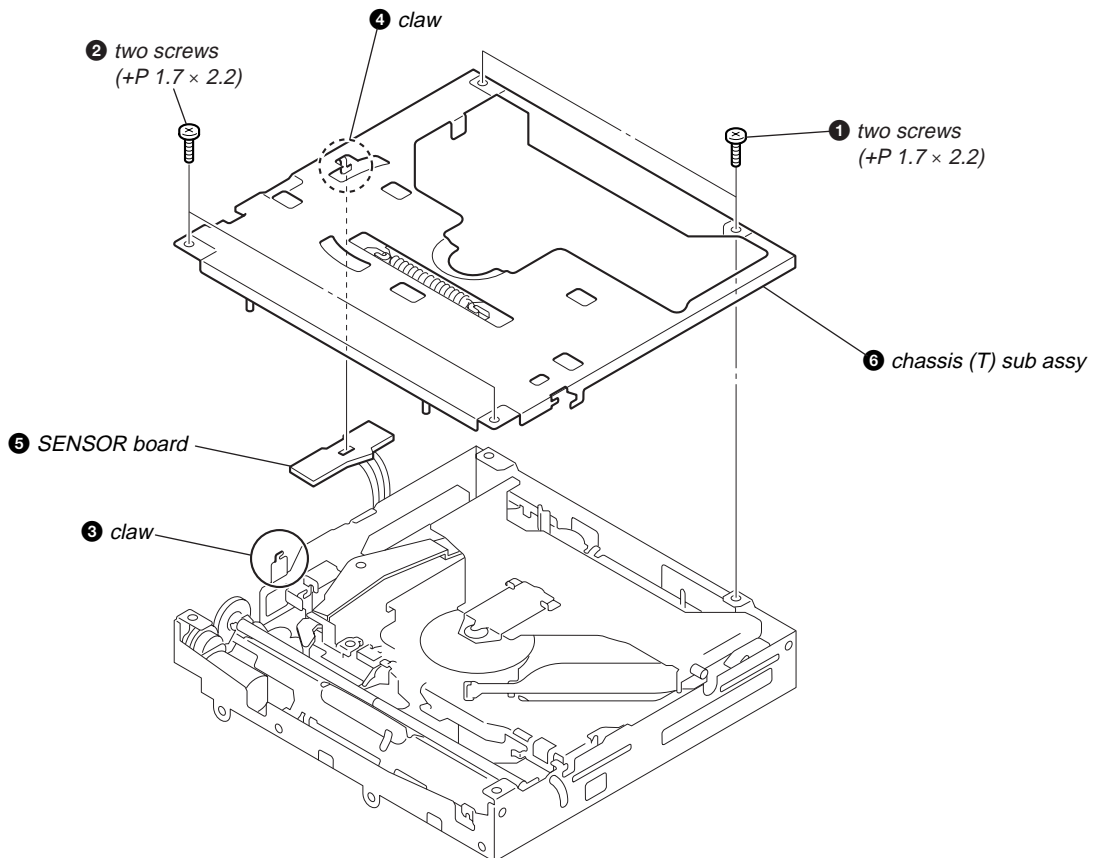


2-5. ROLLER ARM ASSY

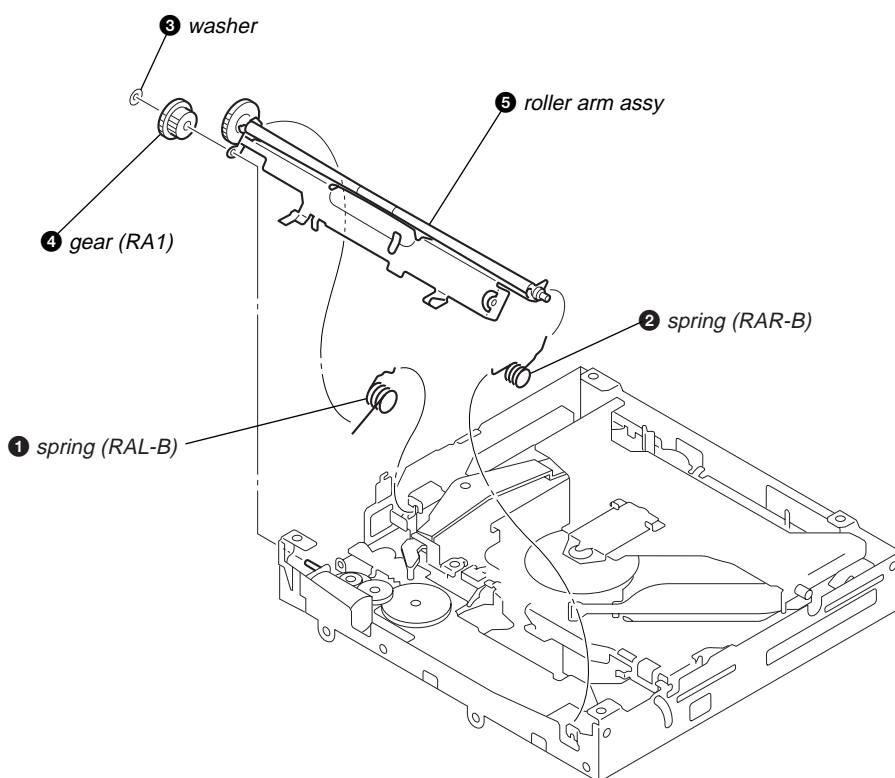


2-6. CHASSIS (OP) ASSY

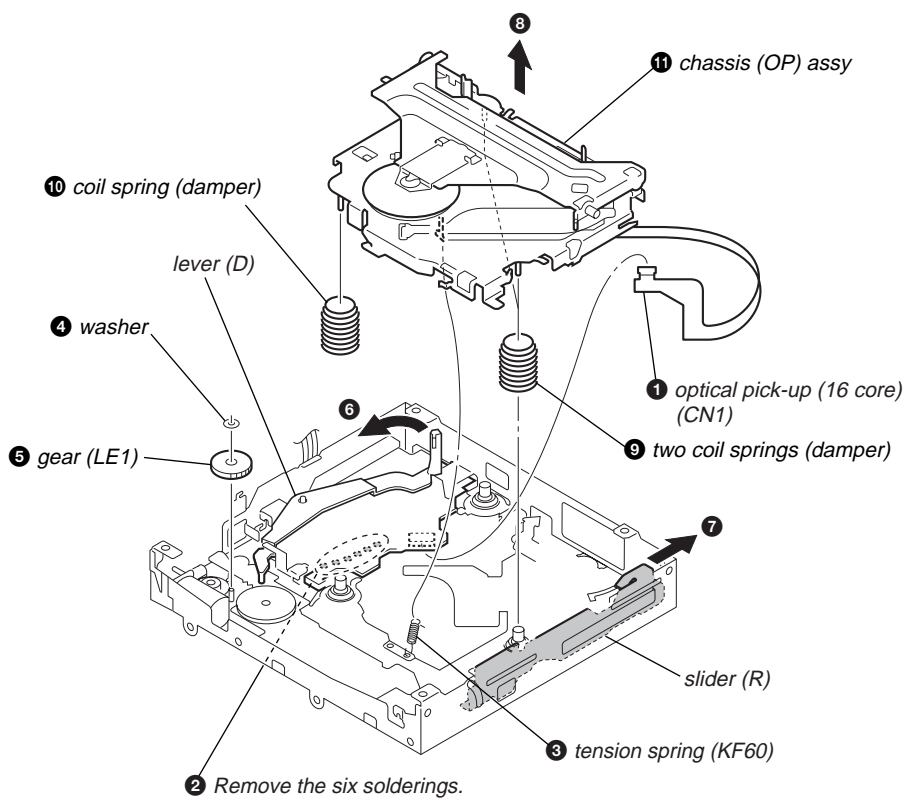


2-7. OPTICAL PICK-UP

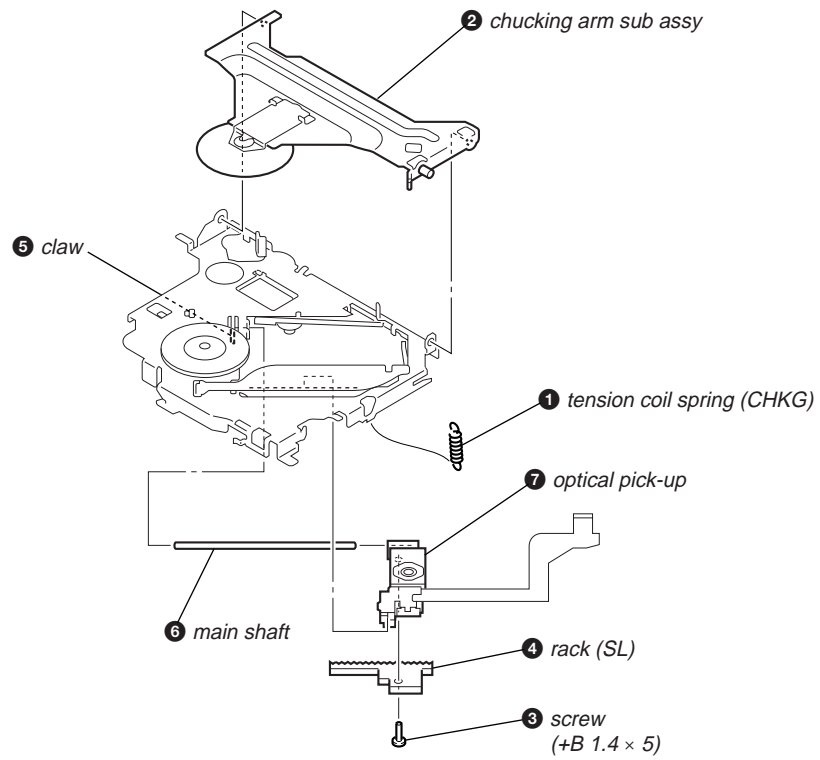


2-8. SL MOTOR ASSY (M902)

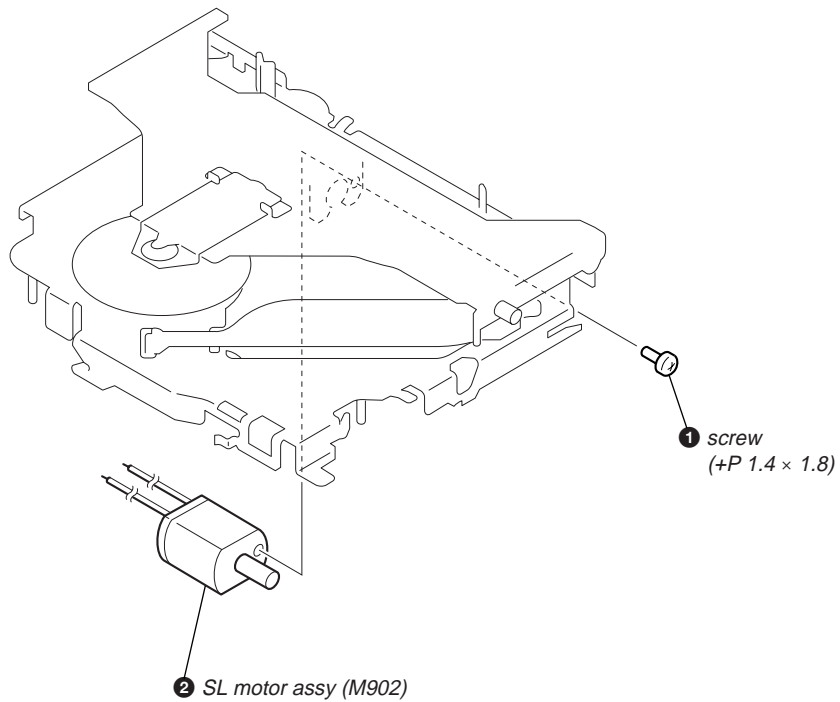

2-9. LE MOTOR ASSY (M903)

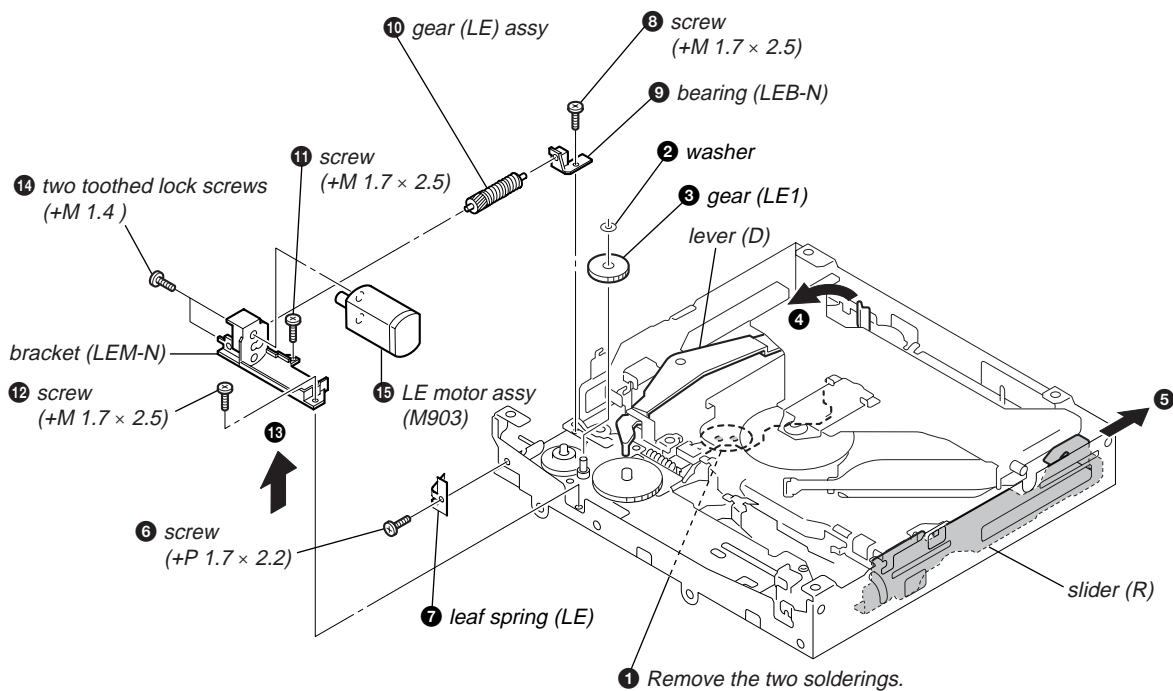


2-10. SERVO BOARD

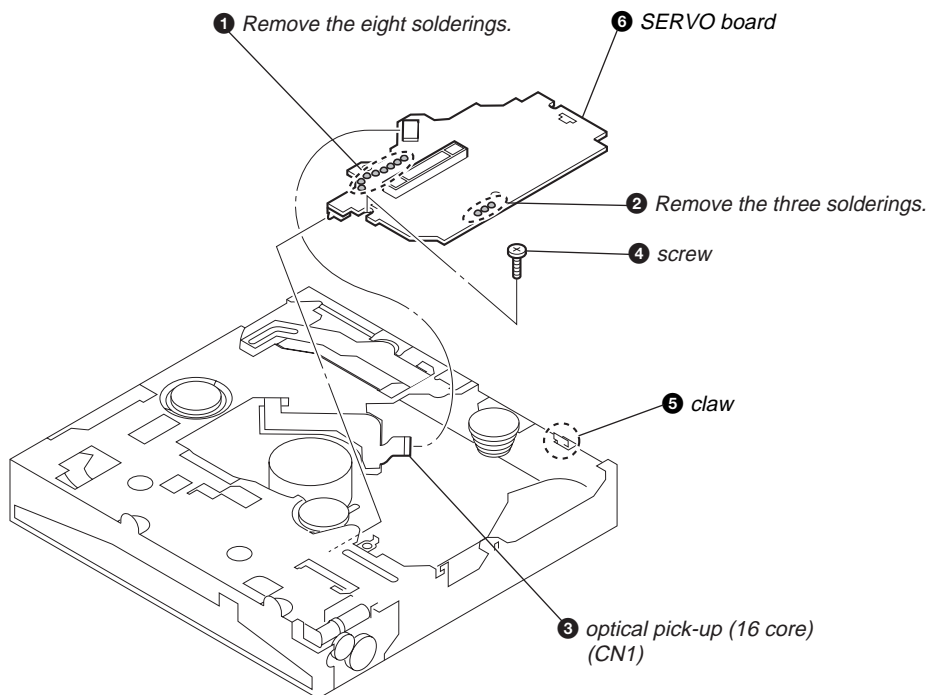


SECTION 3
DIAGRAMS


3-1. BLOCK DIAGRAM — CD SECTION —

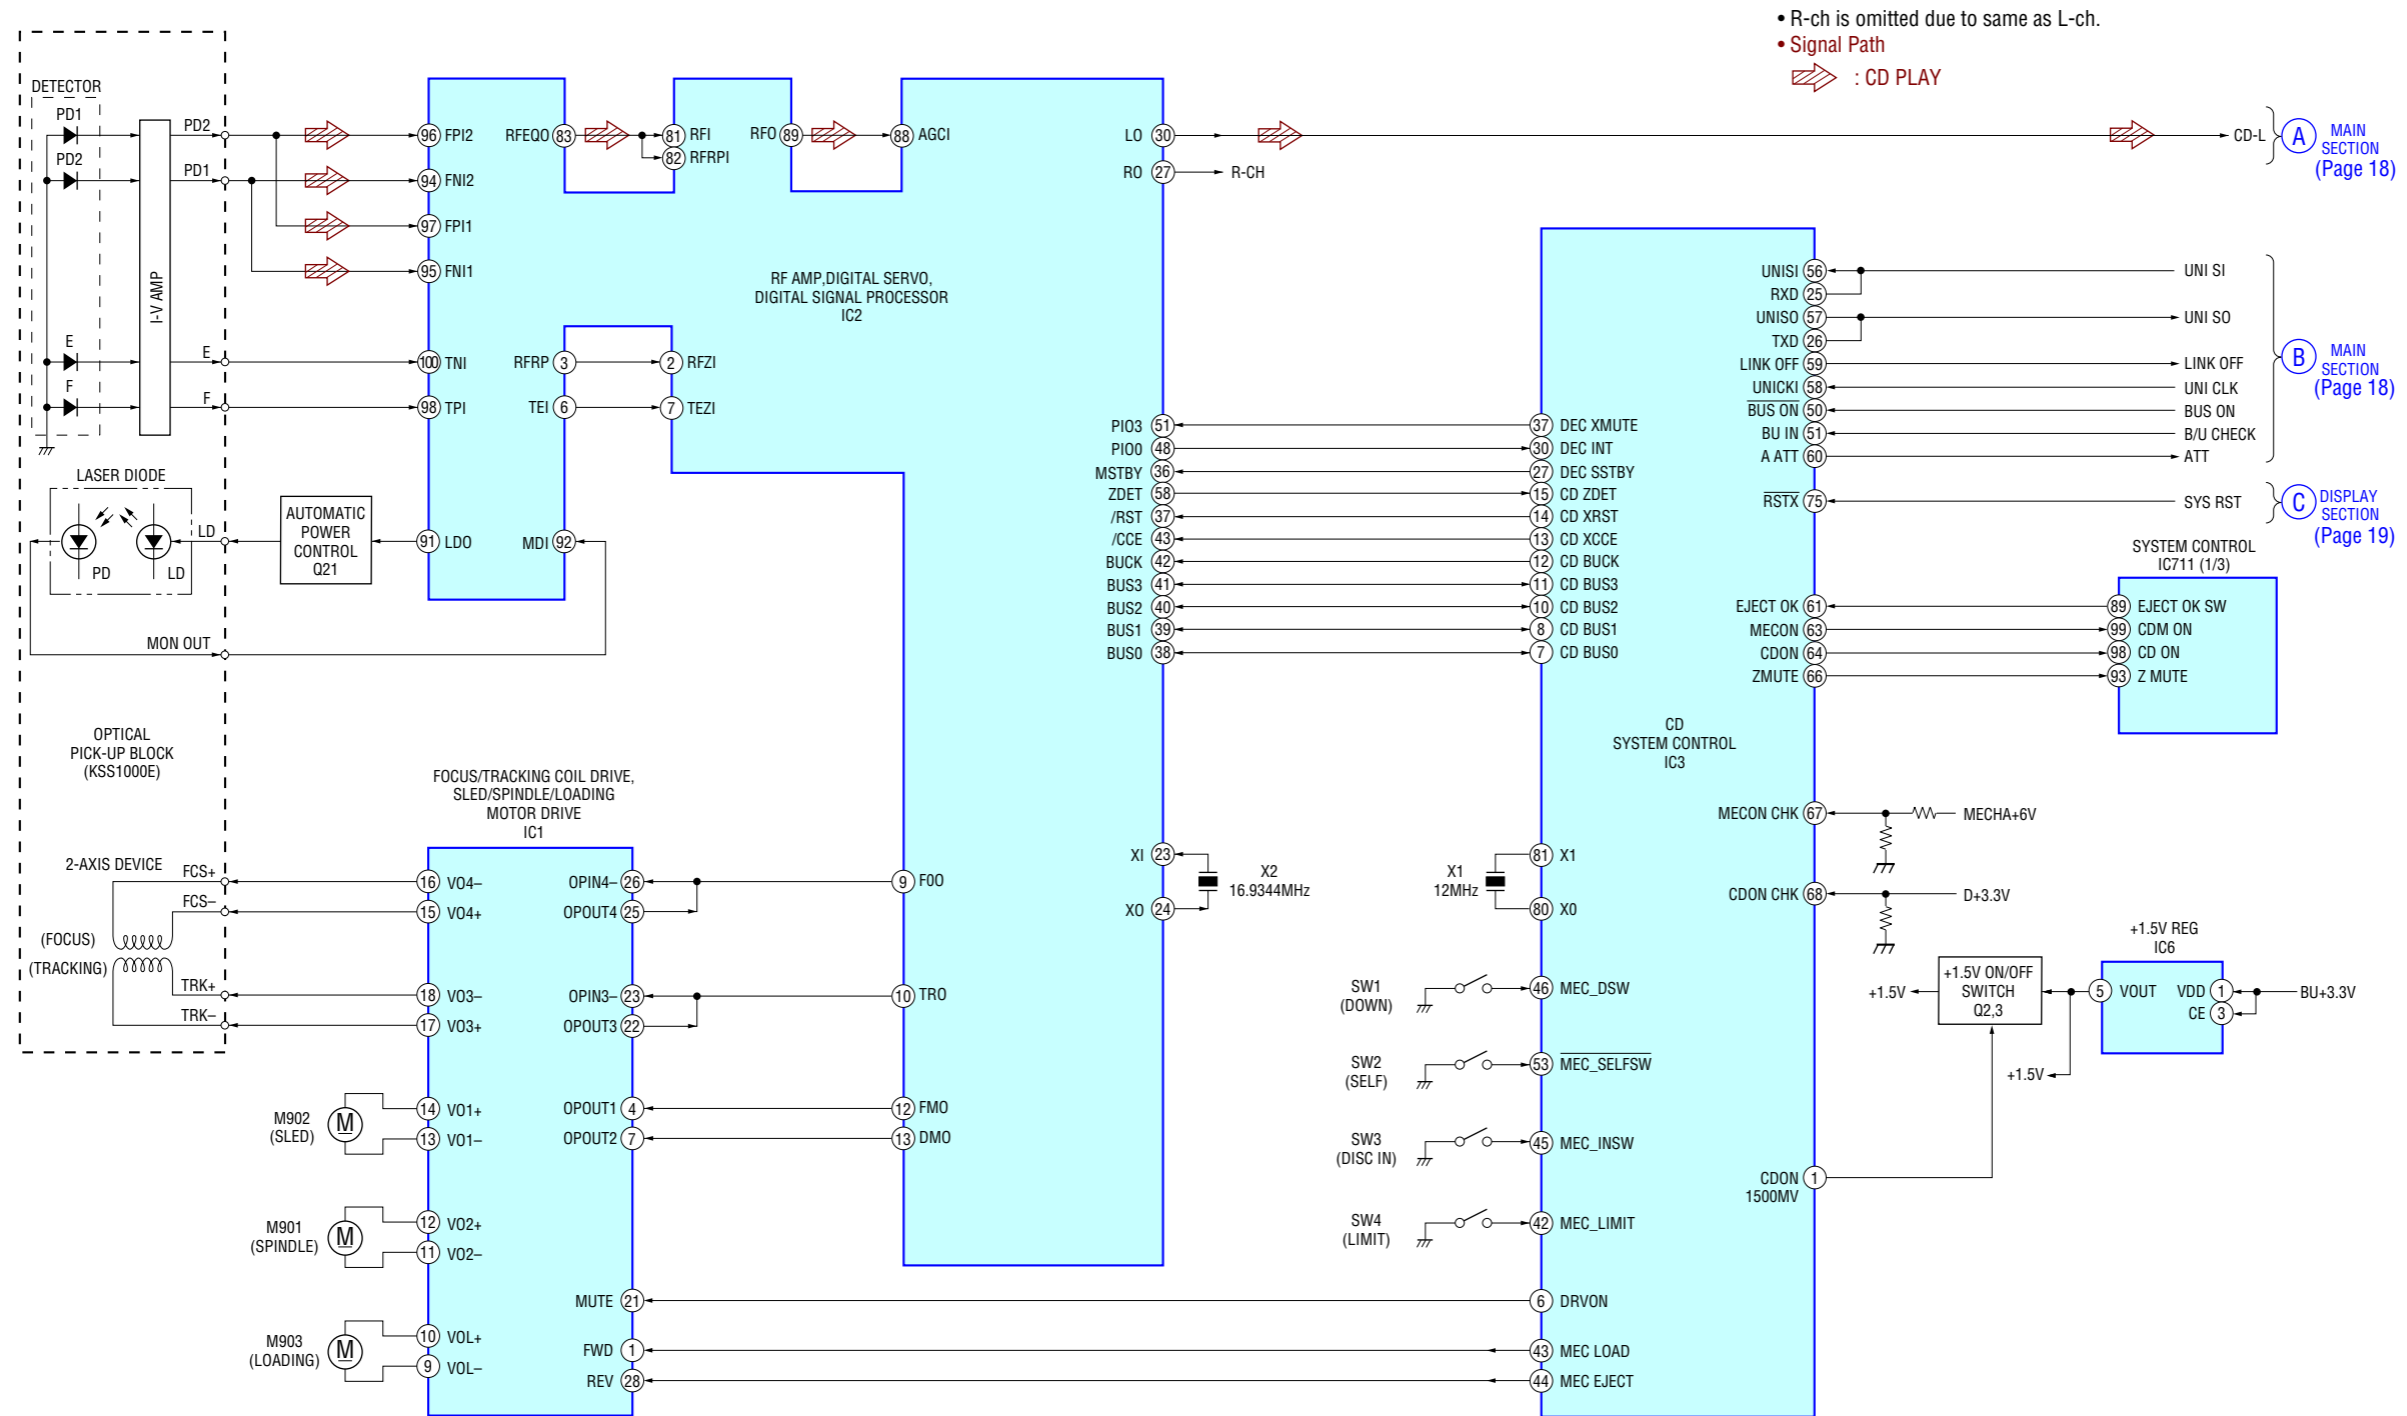

3-2. BLOCK DIAGRAM — MAIN SECTION —

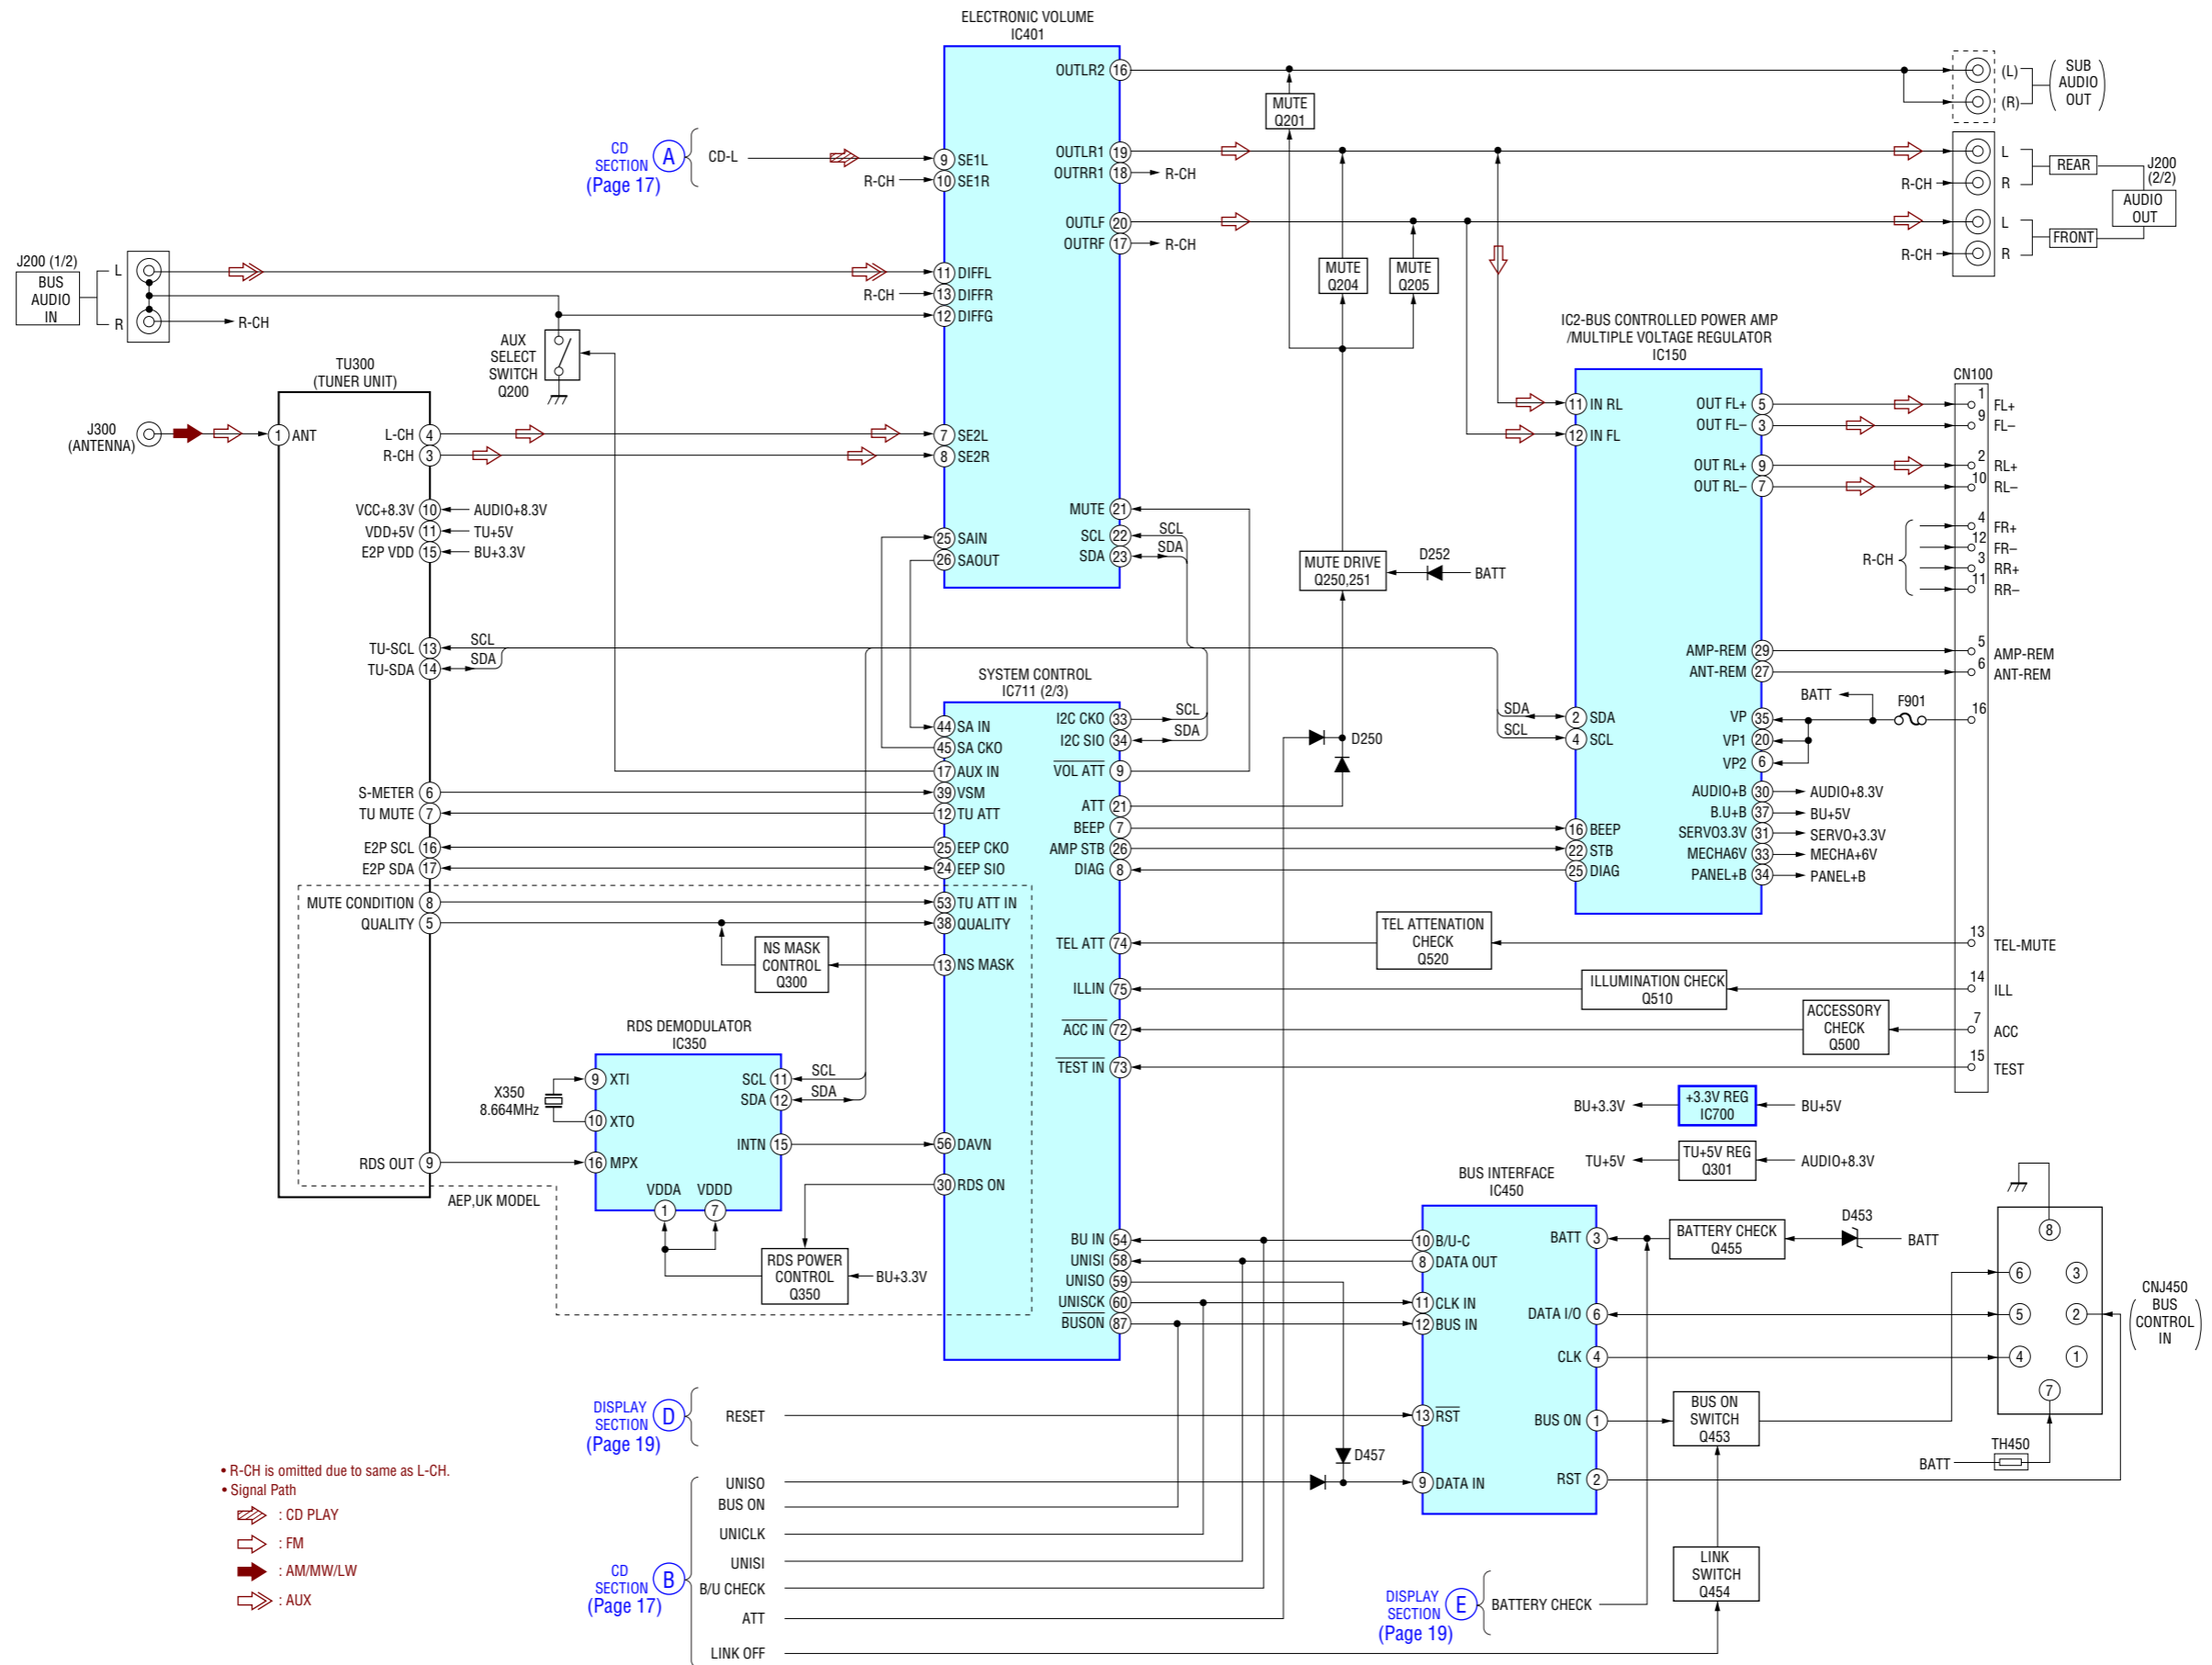

3-3. BLOCK DIAGRAM — DISPLAY SECTION —

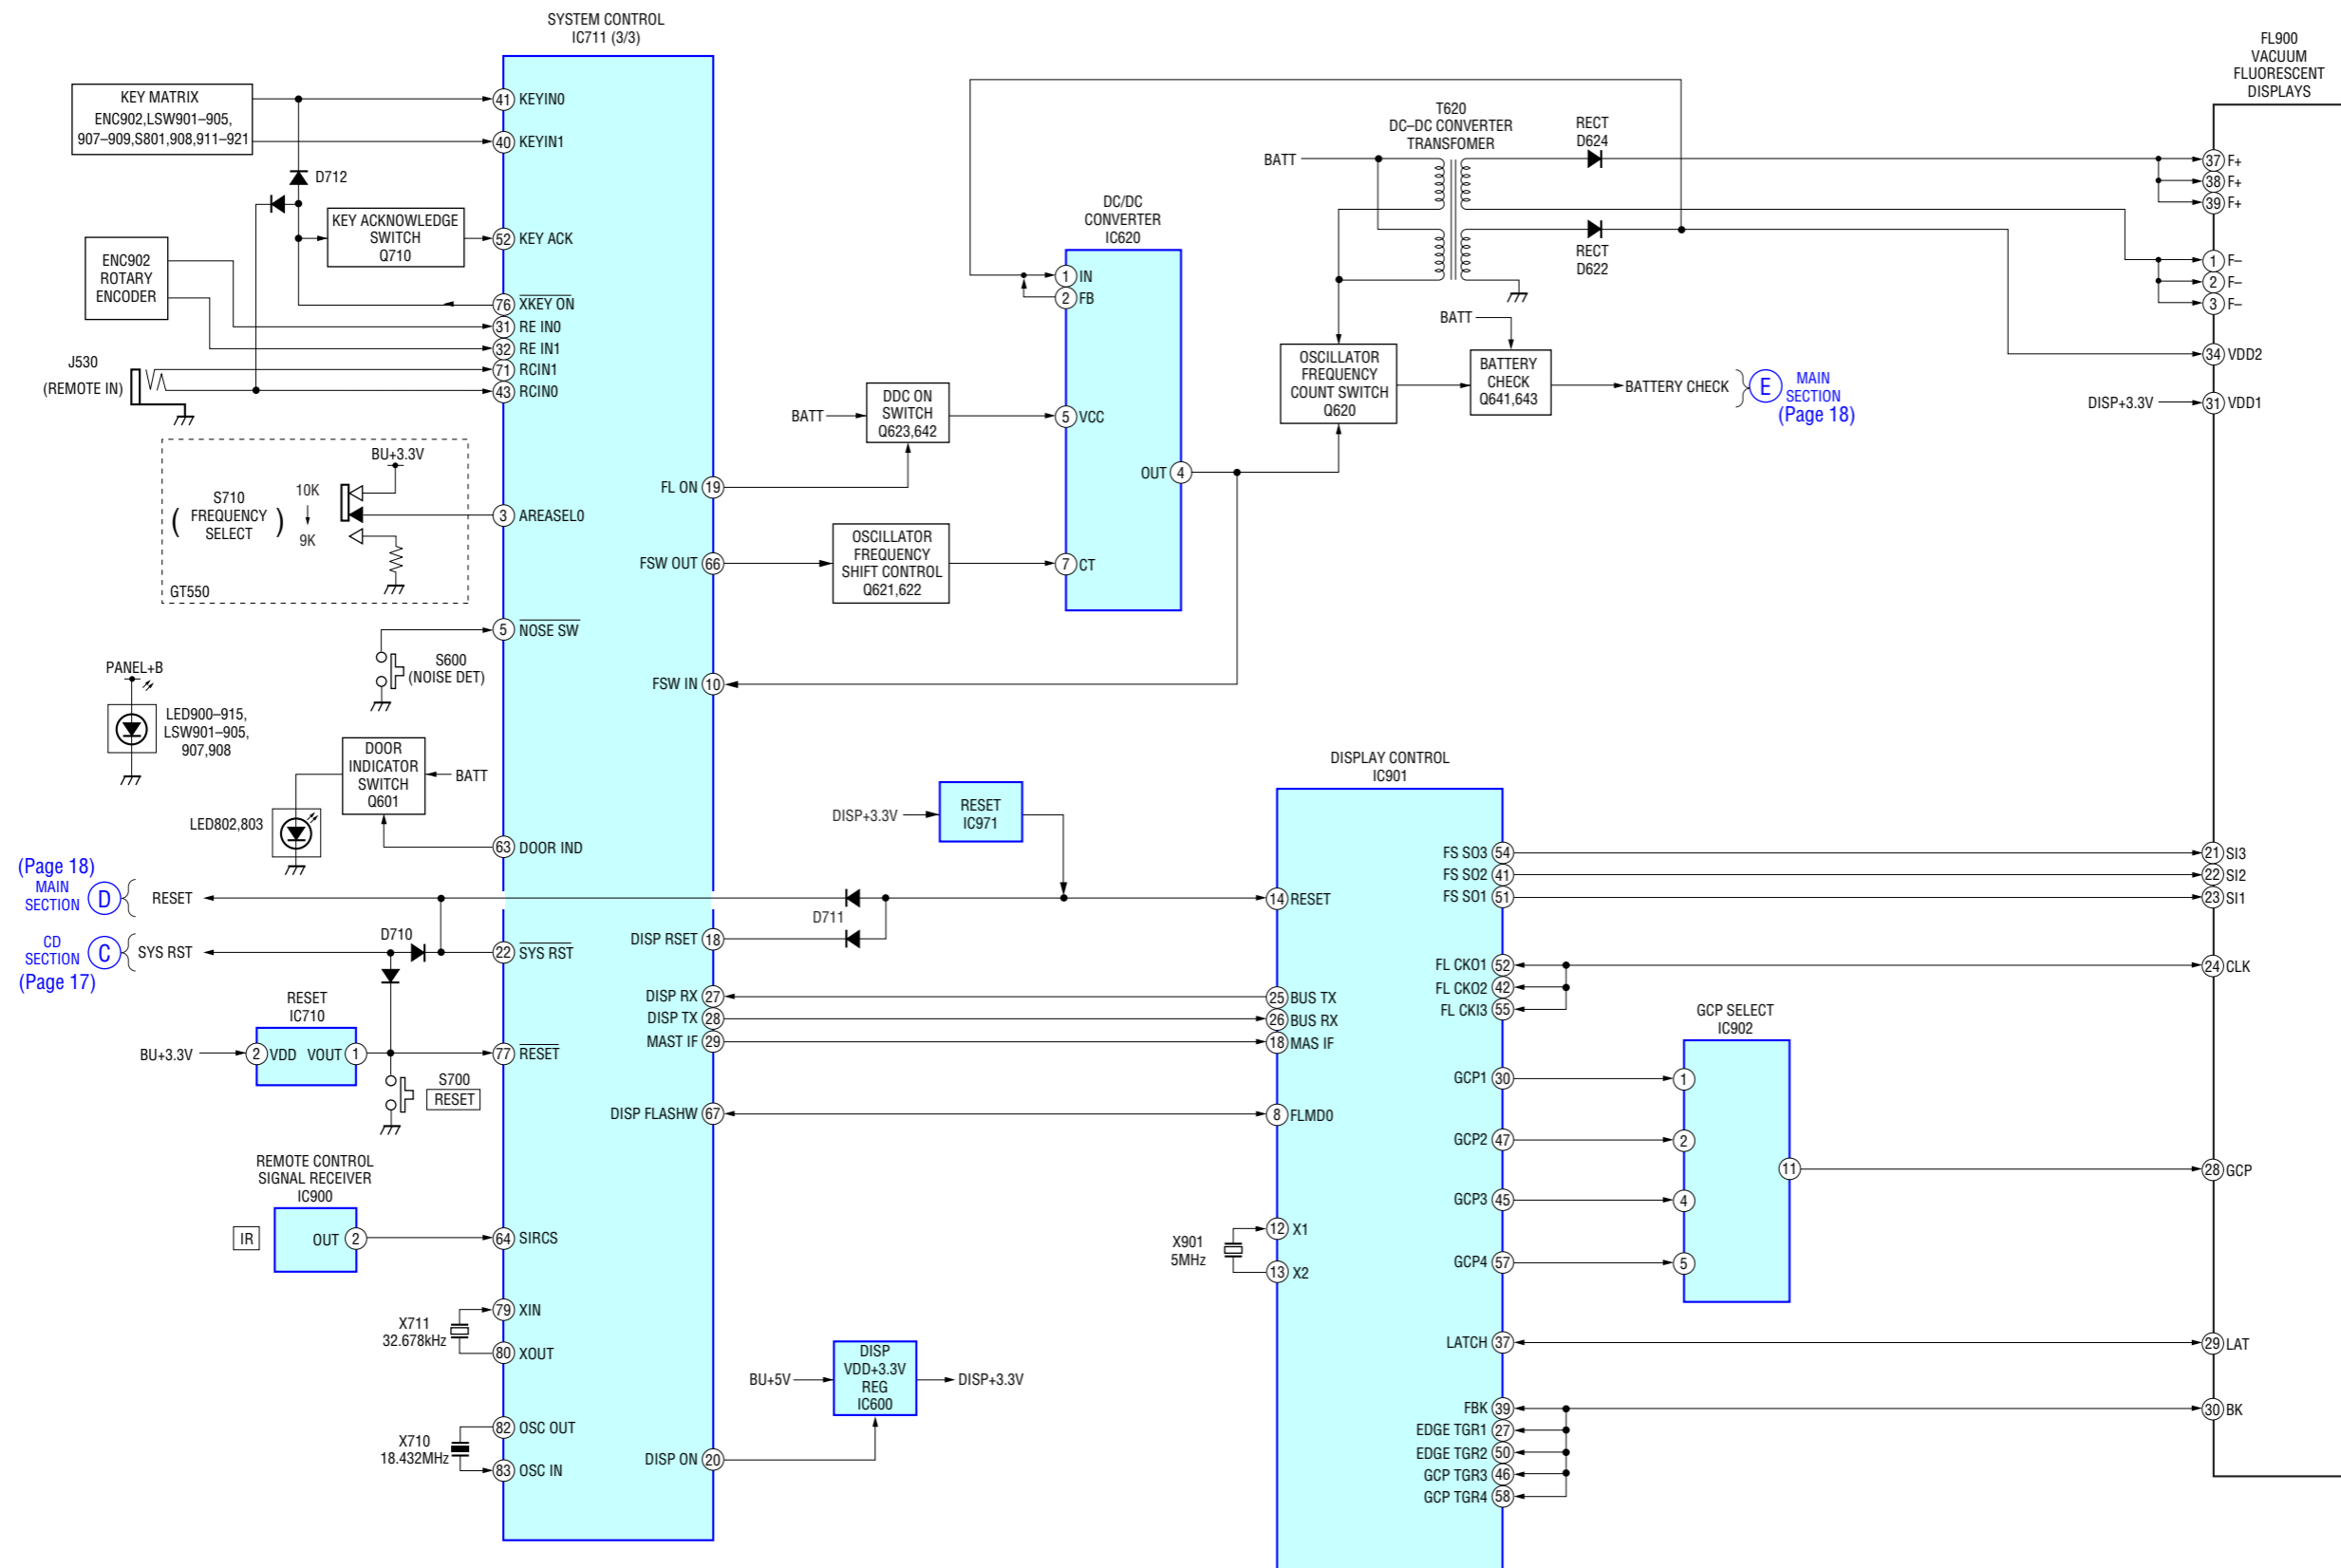

• NOTE FOR PRINTED WIRING BOARDS AND SCHEMATIC DIAGRAMS

THIS NOTE IS COMMON FOR PRINTED WIRING BOARDS AND SCHEMATIC DIAGRAMS.
(In addition to this, the necessary note is printed in each block.)

For schematic diagrams.

- Note:**
- All capacitors are in μF unless otherwise noted. (p: pF) 50 WV or less are not indicated except for electrolytics and tantalums.
 - All resistors are in Ω and $\frac{1}{4}W$ or less unless otherwise specified.
 - Δ : internal component.
 - \square : panel designation.

Note:
The components identified by mark Δ or dotted line with mark Δ are critical for safety. Replace only with part number specified.




Note:
Les composants identifiés par une marque Δ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

- : B+ Line.
- : B- Line.
- : adjustment for repair.
- Voltages and waveforms are dc with respect to ground under no-signal (detuned) conditions.
- CD mechanism (1/2) and (2/2) sections
no mark : CD PLAY
- Main (1/3), (2/3), (3/3), Sub and Display sections
no mark : FM
() : AM/MW/LW
< > : CD PLAY
* : Impossible to measure
- Voltages are taken with a VOM (Input impedance 10 M Ω). Voltage variations may be noted due to normal production tolerances.
- Waveforms are taken with an oscilloscope. Voltage variations may be noted due to normal production tolerances.
- Circled numbers refer to waveforms.
- Signal path.
 : CD PLAY
 : FM
 : AM/MW/LW
 : AUX

For printed wiring boards.


- Note:**
- : parts extracted from the component side.
 - : parts extracted from the conductor side.
 - : Through hole.
 - : Pattern from the side which enables seeing. (The other layers' patterns are not indicated.)

Caution:
Pattern face side: Parts on the pattern face side seen from the (Side B) pattern face are indicated.
Parts face side: Parts on the parts face side seen from the (Side A) parts face are indicated.

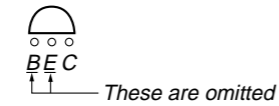


- Abbreviation
CND : Canadian model
EE : East European model
MX : Mexican model
CH : Chinese model

3-4. CIRCUIT BOARDS LOCATION

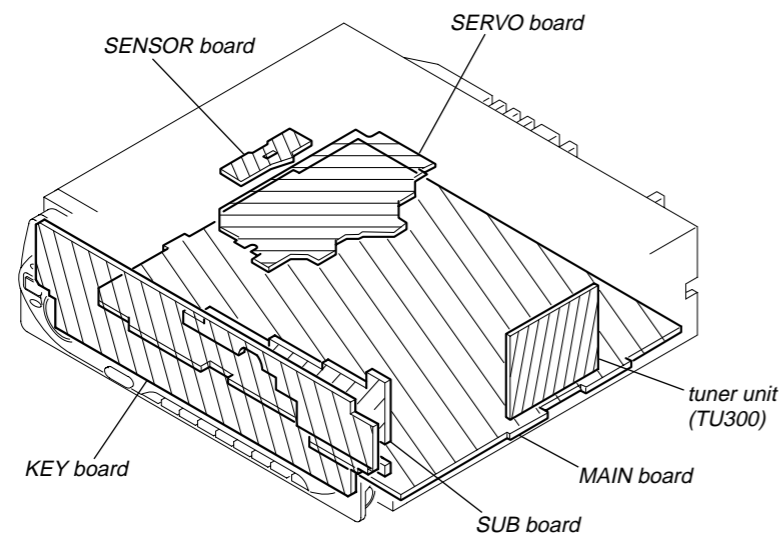


• WAVEFORMS


— SERVO BOARD — (CD PLAY)

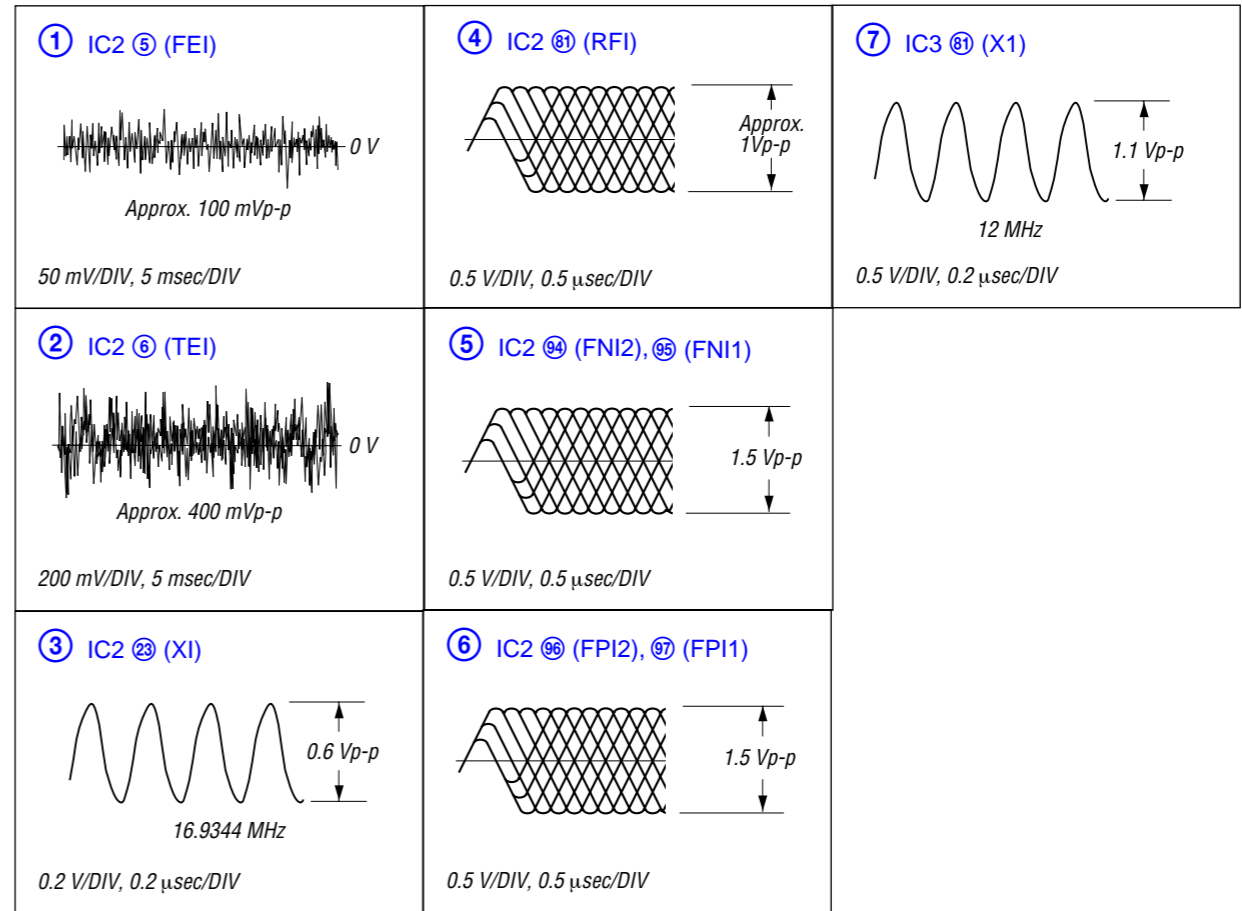


— MAIN BOARD —

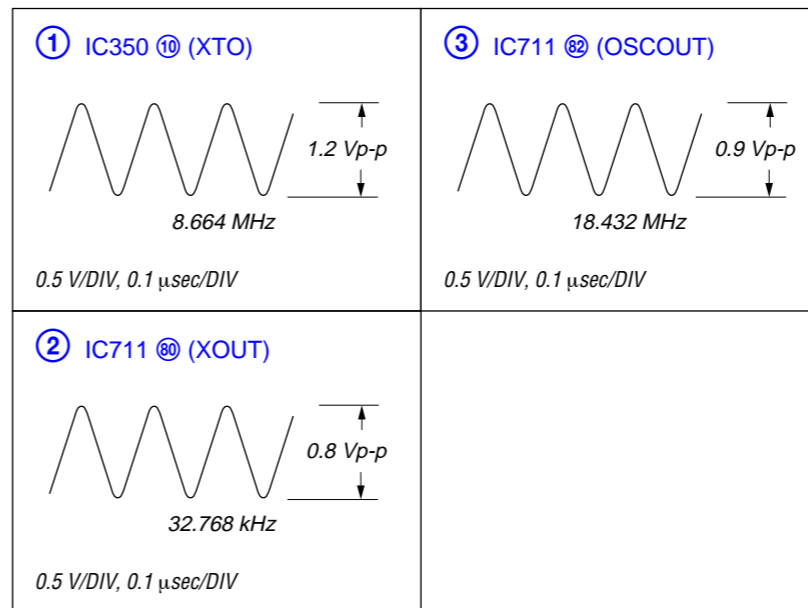

— KEY BOARD —

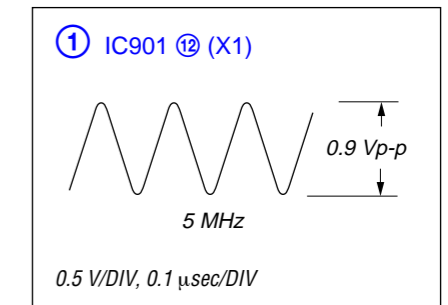


3-5. PRINTED WIRING BOARDS — CD MECHANISM SECTION — • Refer to page 20 for Circuit Boards Location.  : Uses unleaded solder.

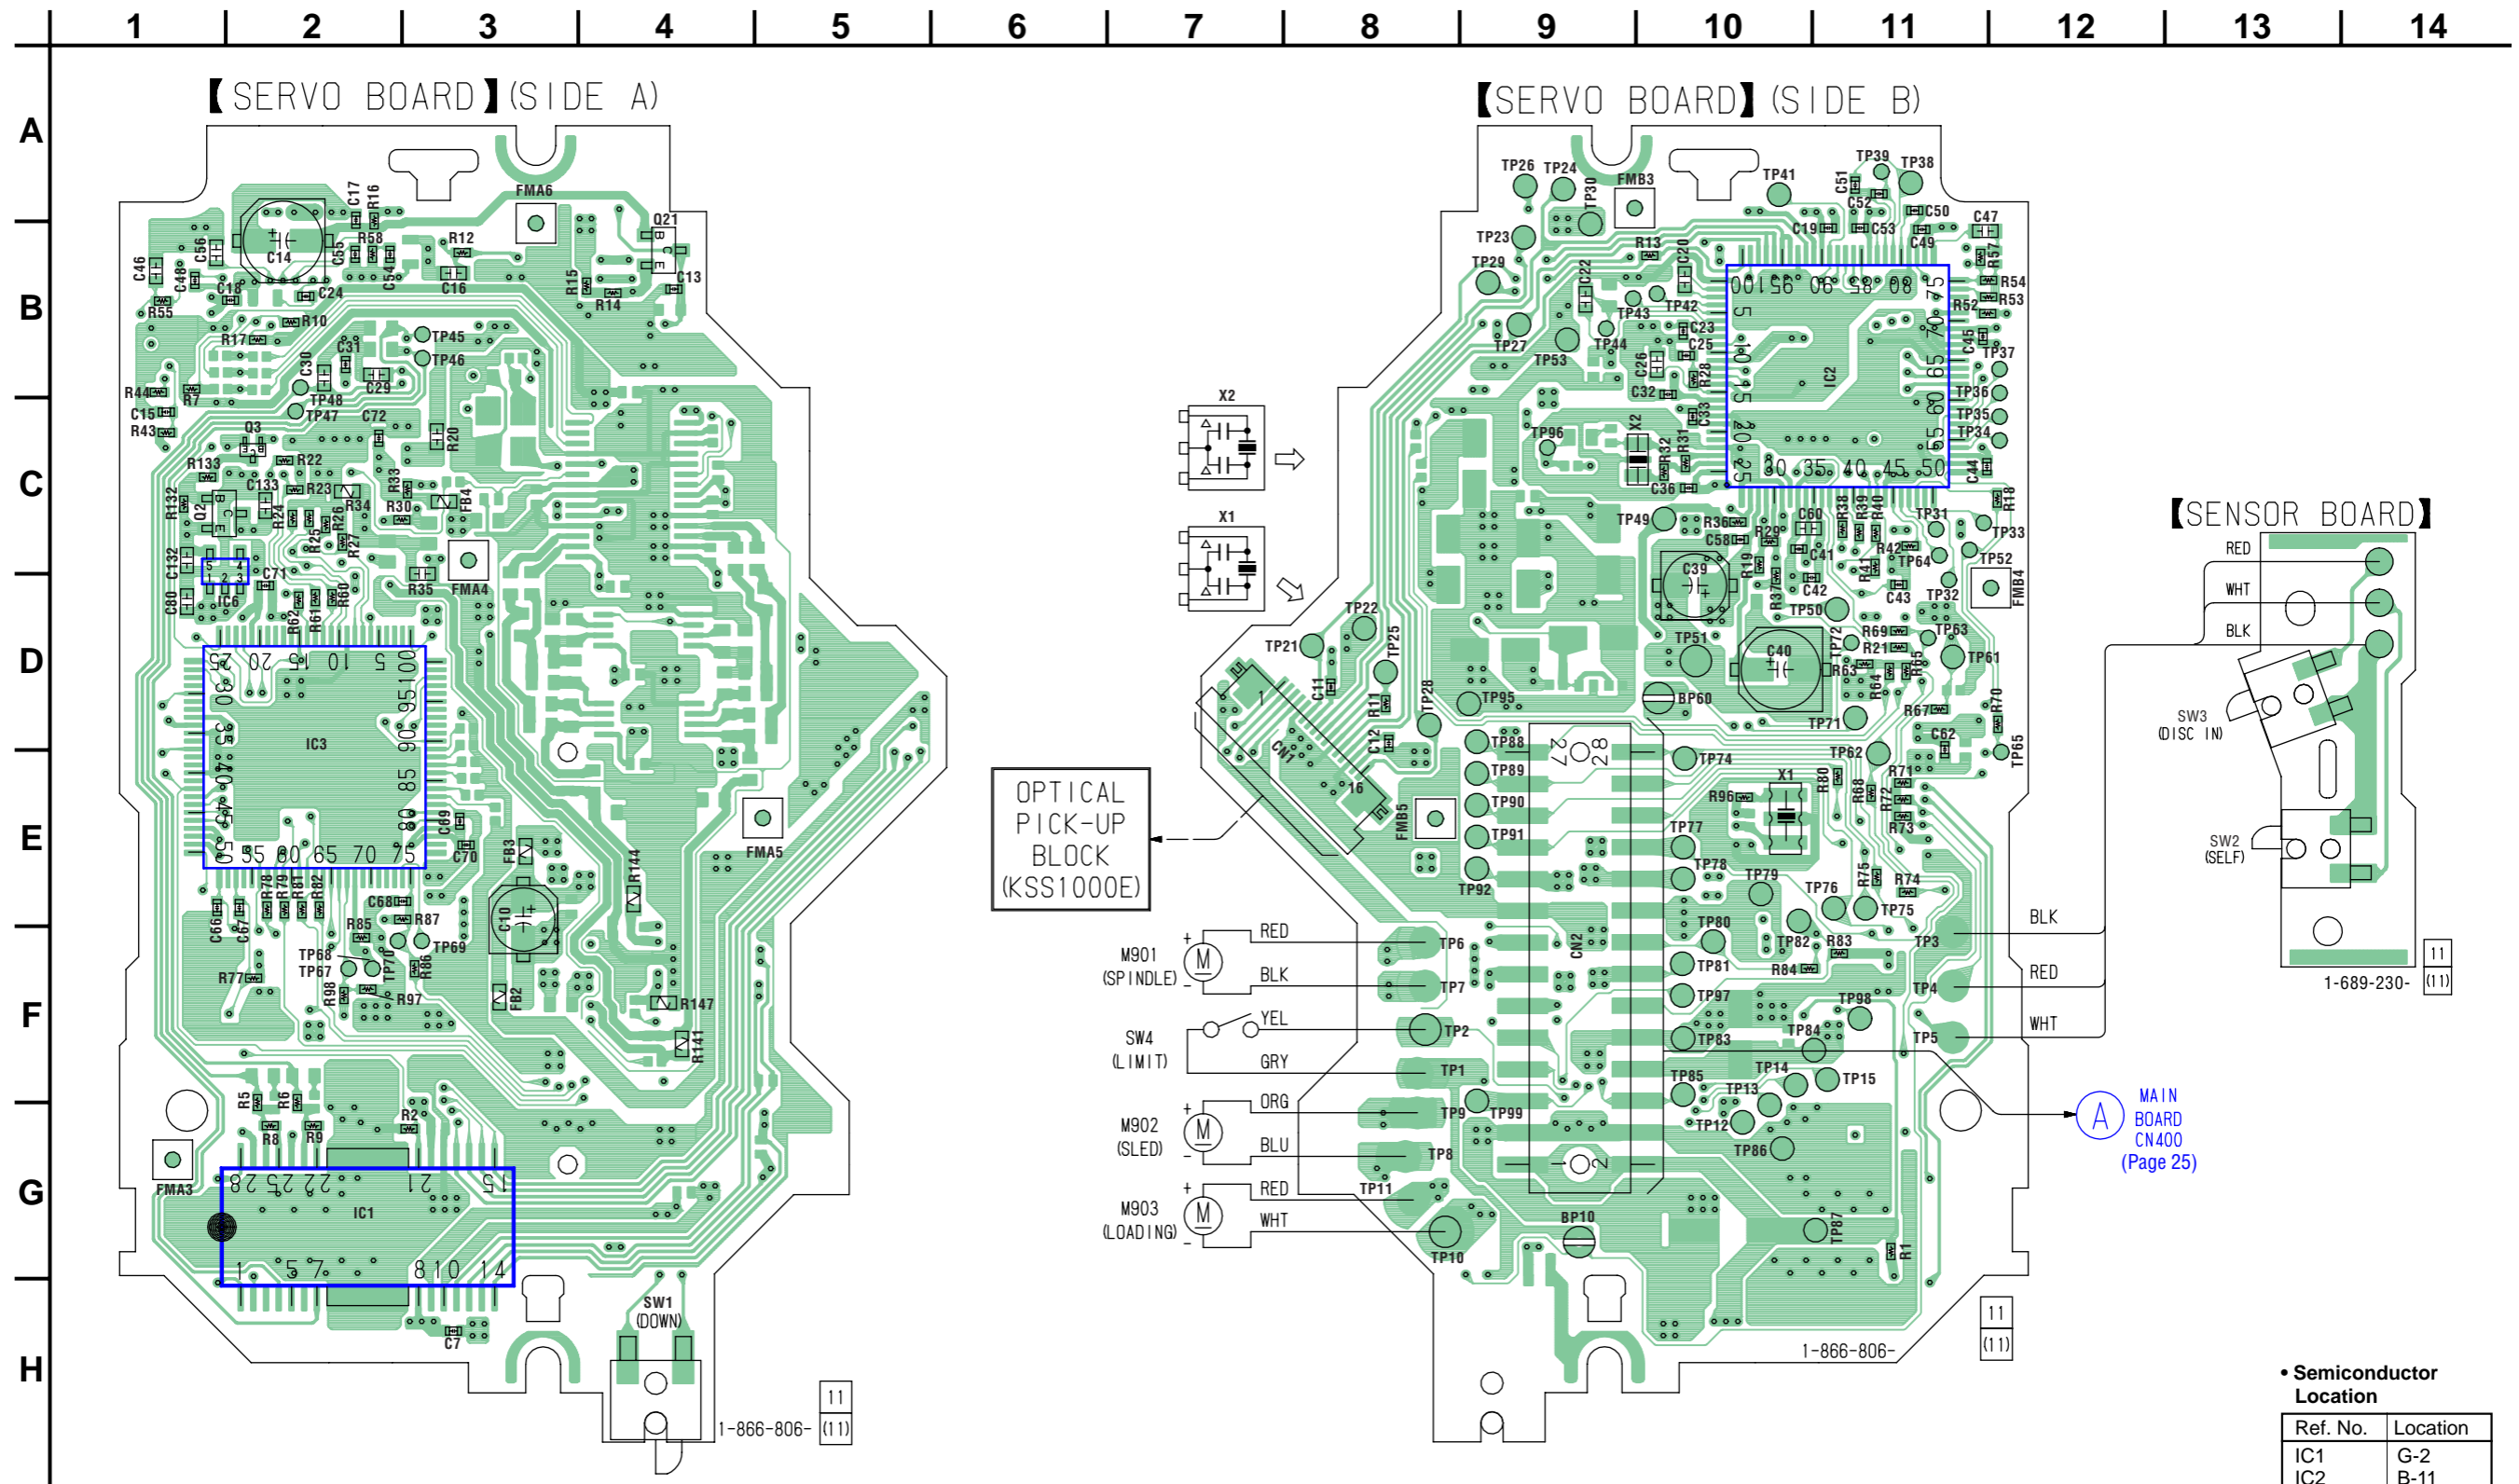

• Semiconductor Location

| Ref. No. | Location |
|----------|----------|
| IC1 | G-2 |
| IC2 | B-11 |
| IC3 | D-2 |
| IC6 | D-1 |
| Q2 | C-1 |
| Q3 | C-2 |
| Q21 | B-4 |


3-6. SCHEMATIC DIAGRAM — CD MECHANISM SECTION (1/2) — • Refer to page 20 for Waveforms.

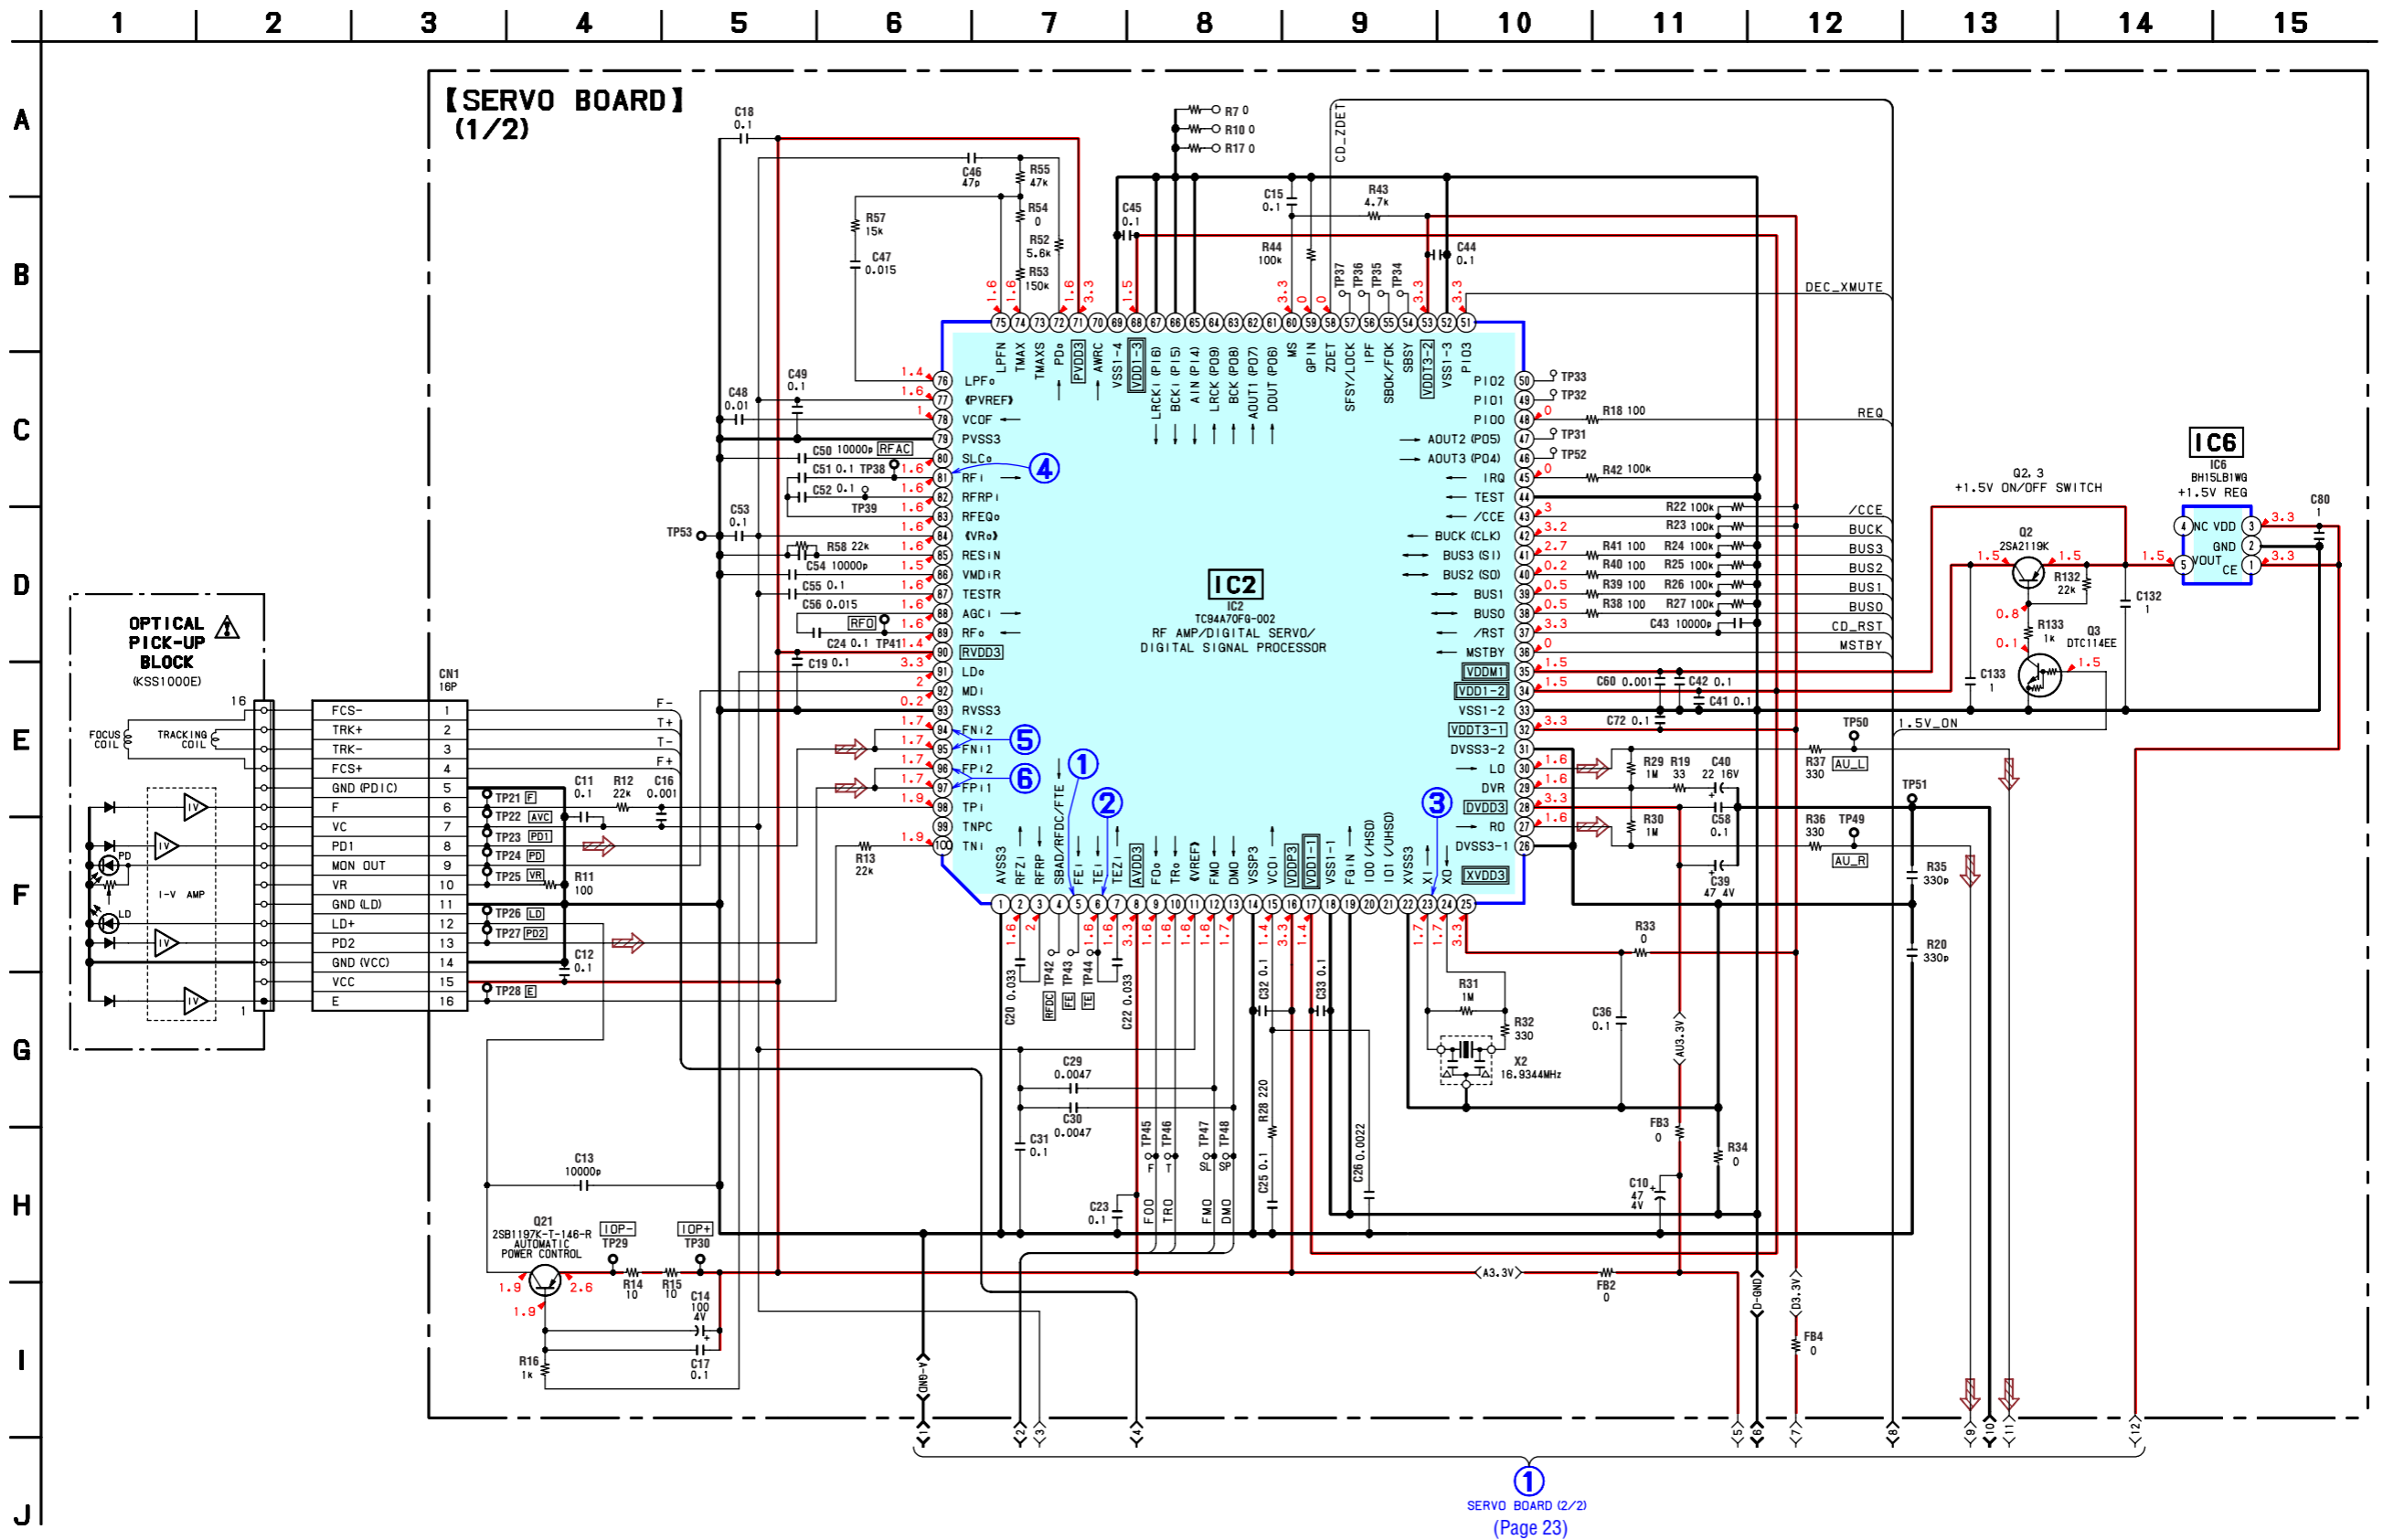

① SERVO BOARD (2/2)
(Page 23)

3-7. SCHEMATIC DIAGRAM — CD MECHANISM SECTION (2/2) —

- Refer to page 20 for Waveforms.
- Refer to page 33 for IC Block Diagrams.
- Refer to page 36 for IC Pin Description of IC3.

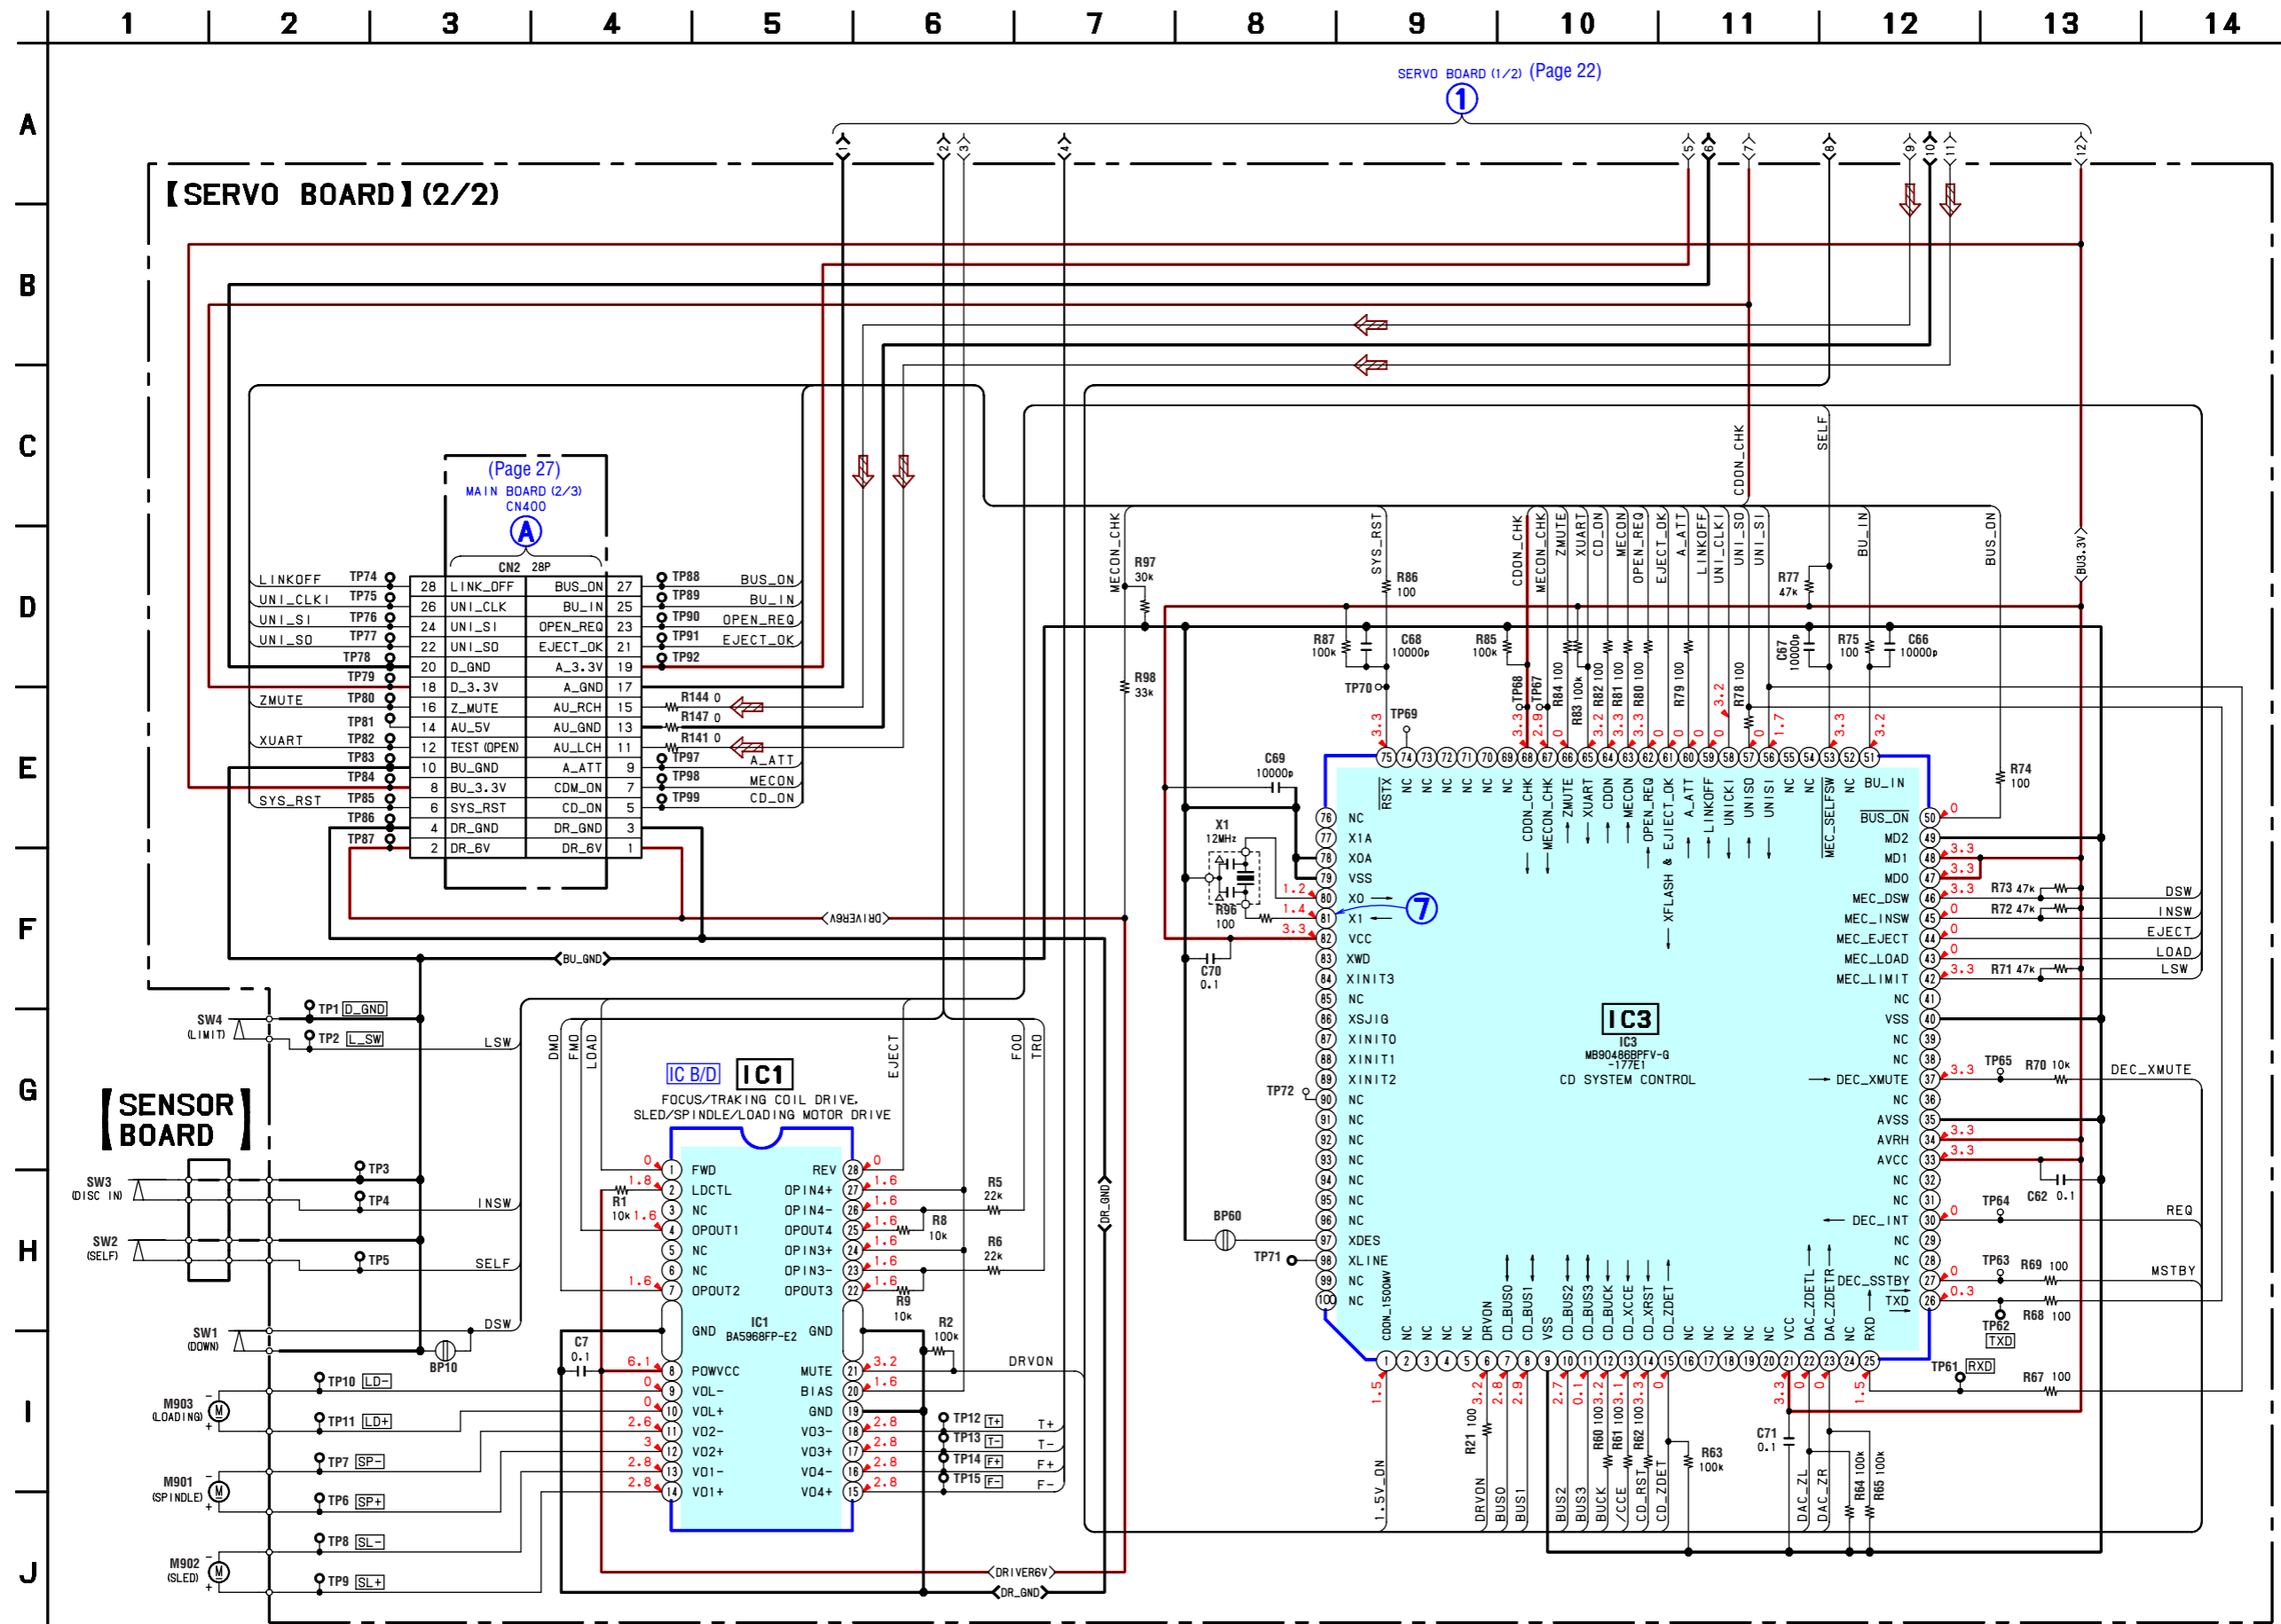

3-8. PRINTED WIRING BOARD — MAIN SECTION — • Refer to page 20 for Circuit Boards Location.  : Uses unleaded solder.

14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1


A
B
C
D
E
F
G
H
I
J

• Semiconductor Location


| Ref. No. | Location | Ref. No. | Location |
|----------|----------|----------|----------|
| D100 | D-9 | D627 | F-10 |
| D101 | (D-9) | D710 | F-7 |
| D102 | D-9 | D711 | I-5 |
| D103 | D-8 | D712 | H-5 |
| D104 | D-8 | D713 | G-5 |
| D105 | D-8 | | |
| D106 | D-8 | IC150 | (B-6) |
| D107 | (D-7) | IC350 | H-2 |
| D108 | (C-6) | IC401 | E-3 |
| D109 | (D-6) | IC450 | E-9 |
| D110 | (C-6) | IC600 | I-5 |
| D111 | (C-5) | IC620 | G-10 |
| D112 | (C-6) | IC700 | E-5 |
| D113 | (C-7) | IC710 | G-7 |
| D114 | (C-6) | IC711 | H-7 |
| D115 | (C-7) | | |
| D116 | (C-6) | Q200 | C-3 |
| D117 | (C-7) | Q201 | D-3 |
| D118 | (C-7) | Q202 | C-4 |
| D200 | C-3 | Q203 | C-4 |
| D250 | E-7 | Q204 | C-3 |
| D252 | D-7 | Q205 | C-4 |
| D300 | F-3 | Q250 | D-7 |
| D450 | C-10 | Q251 | D-7 |
| D452 | C-10 | Q300 | E-2 |
| D453 | D-10 | Q301 | F-3 |
| D454 | D-9 | Q350 | H-3 |
| D455 | E-10 | Q453 | D-10 |
| D456 | E-10 | Q454 | D-9 |
| D457 | E-9 | Q455 | D-9 |
| D510 | D-8 | Q500 | D-8 |
| D610 | I-3 | Q510 | D-8 |
| D611 | I-3 | Q520 | D-8 |
| D612 | I-2 | Q601 | I-5 |
| D613 | I-2 | Q620 | G-10 |
| D614 | I-4 | Q621 | F-11 |
| D616 | J-2 | Q622 | F-10 |
| D620 | I-9 | Q623 | F-10 |
| D621 | I-9 | Q641 | E-10 |
| D622 | H-9 | Q642 | F-10 |
| D624 | H-9 | Q643 | G-9 |
| D625 | F-10 | Q710 | G-5 |
| D626 | G-10 | | |

() : SIDE B


【MAIN BOARD】(SIDE A)

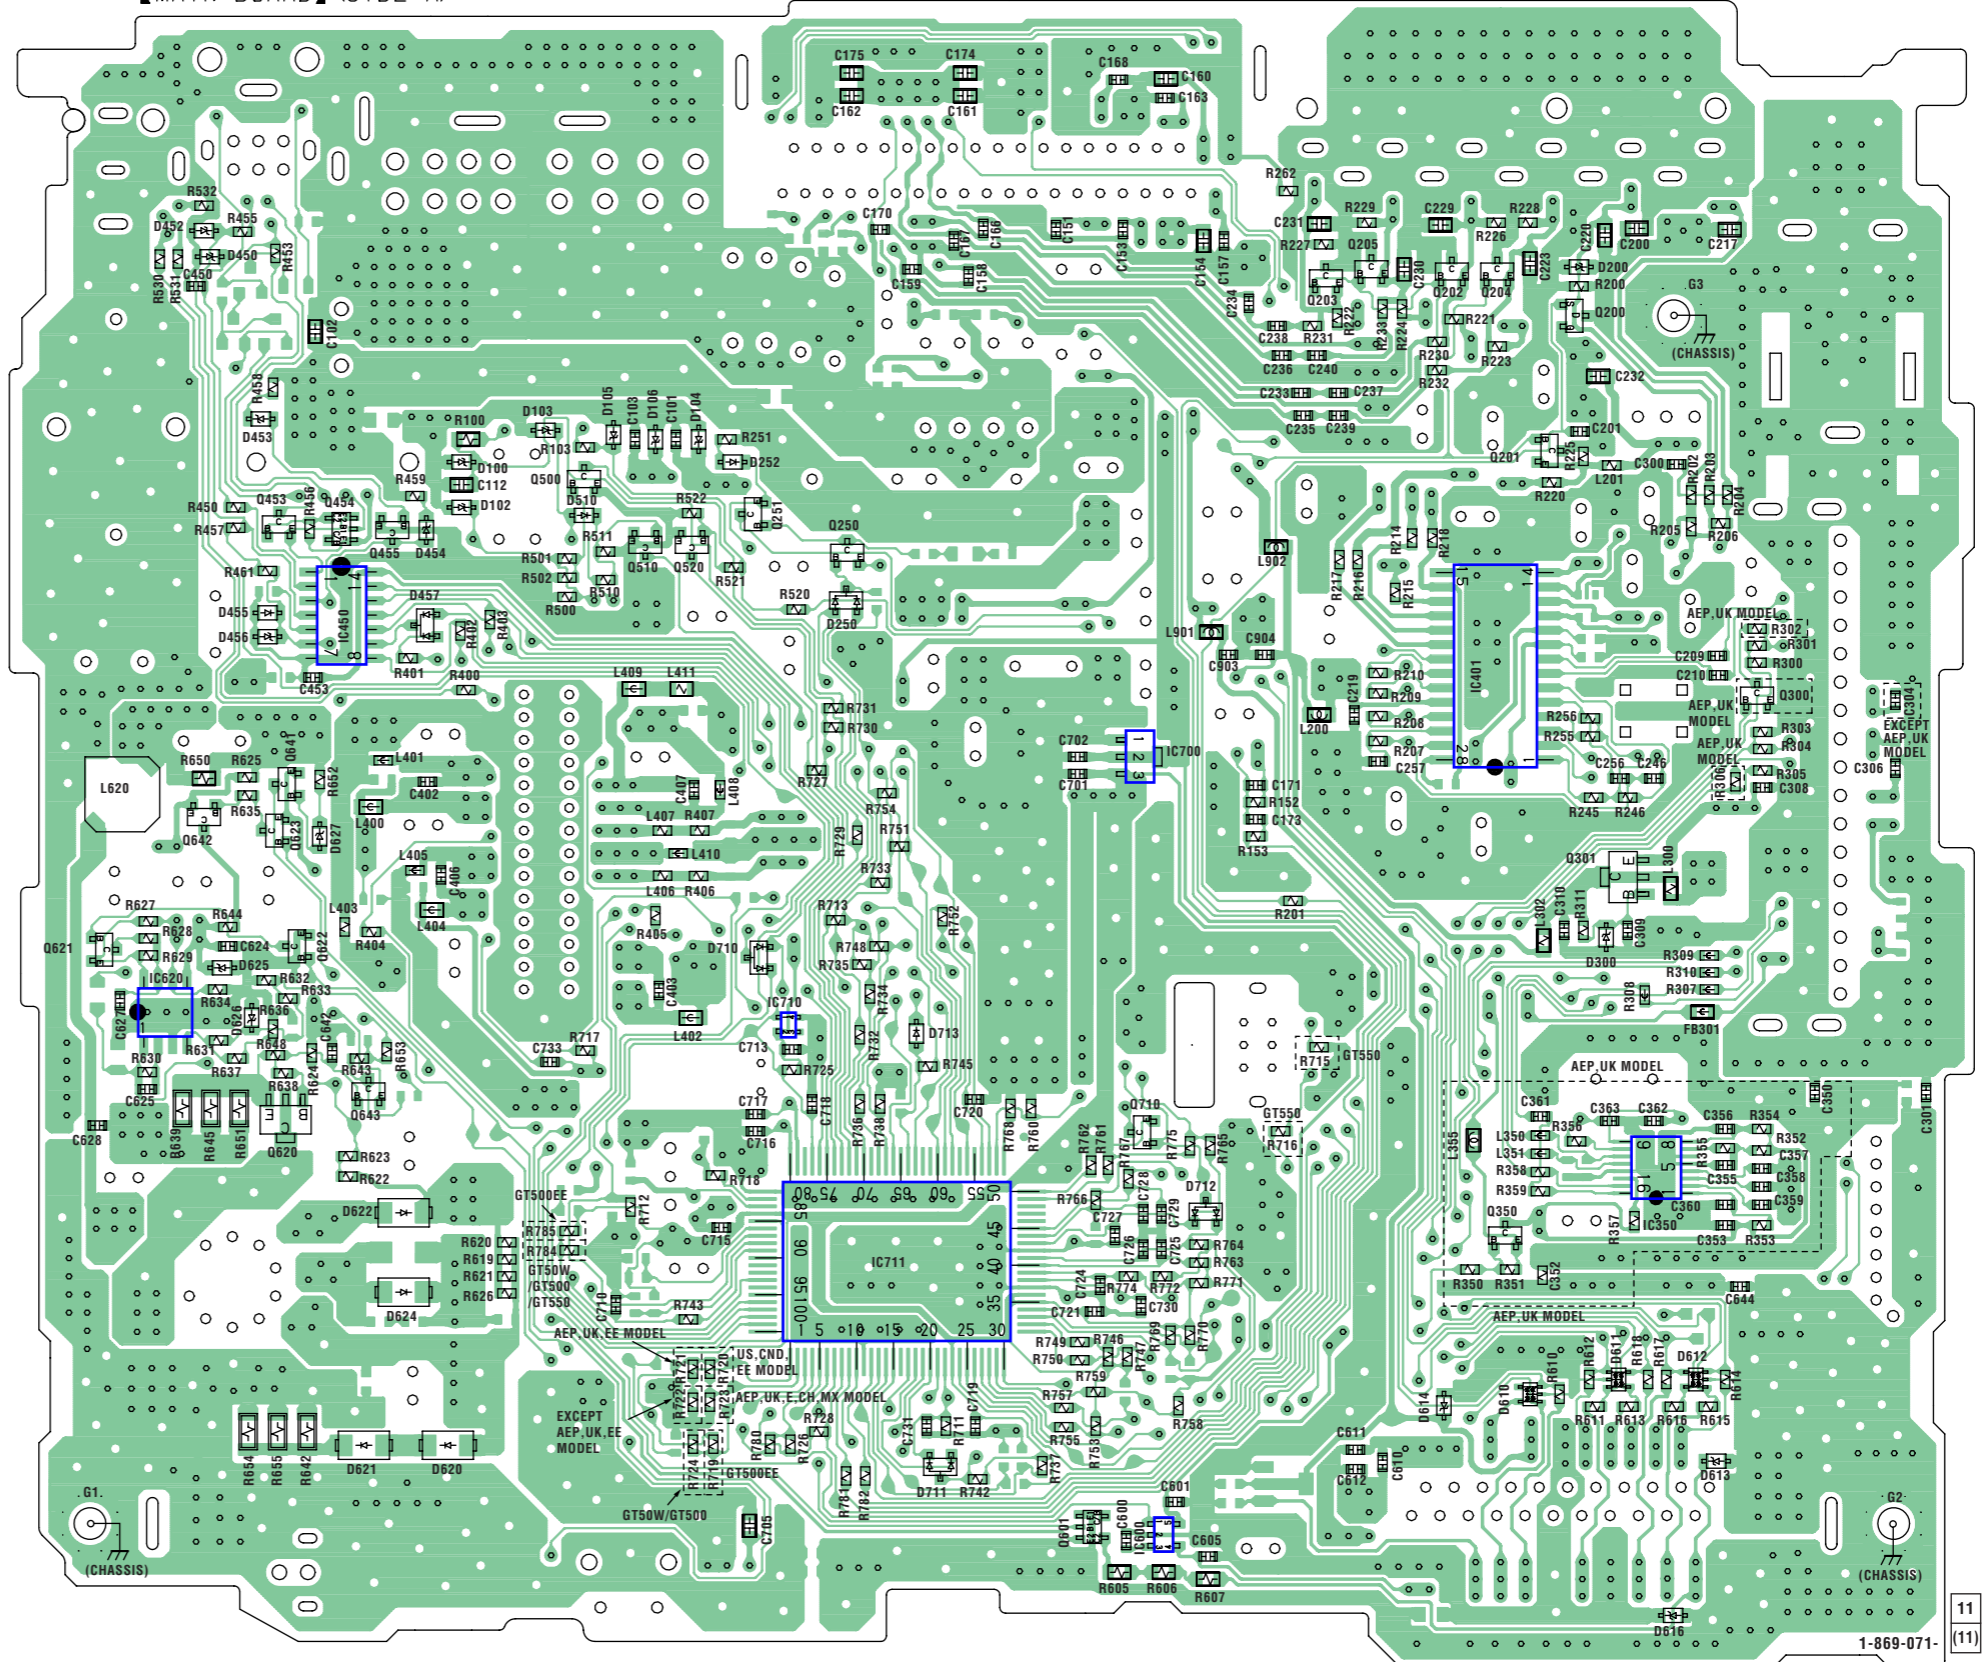


3-12. PRINTED WIRING BOARD — SUB SECTION — • Refer to page 20 for Circuit Boards Location. **LF** : Uses unleaded solder.

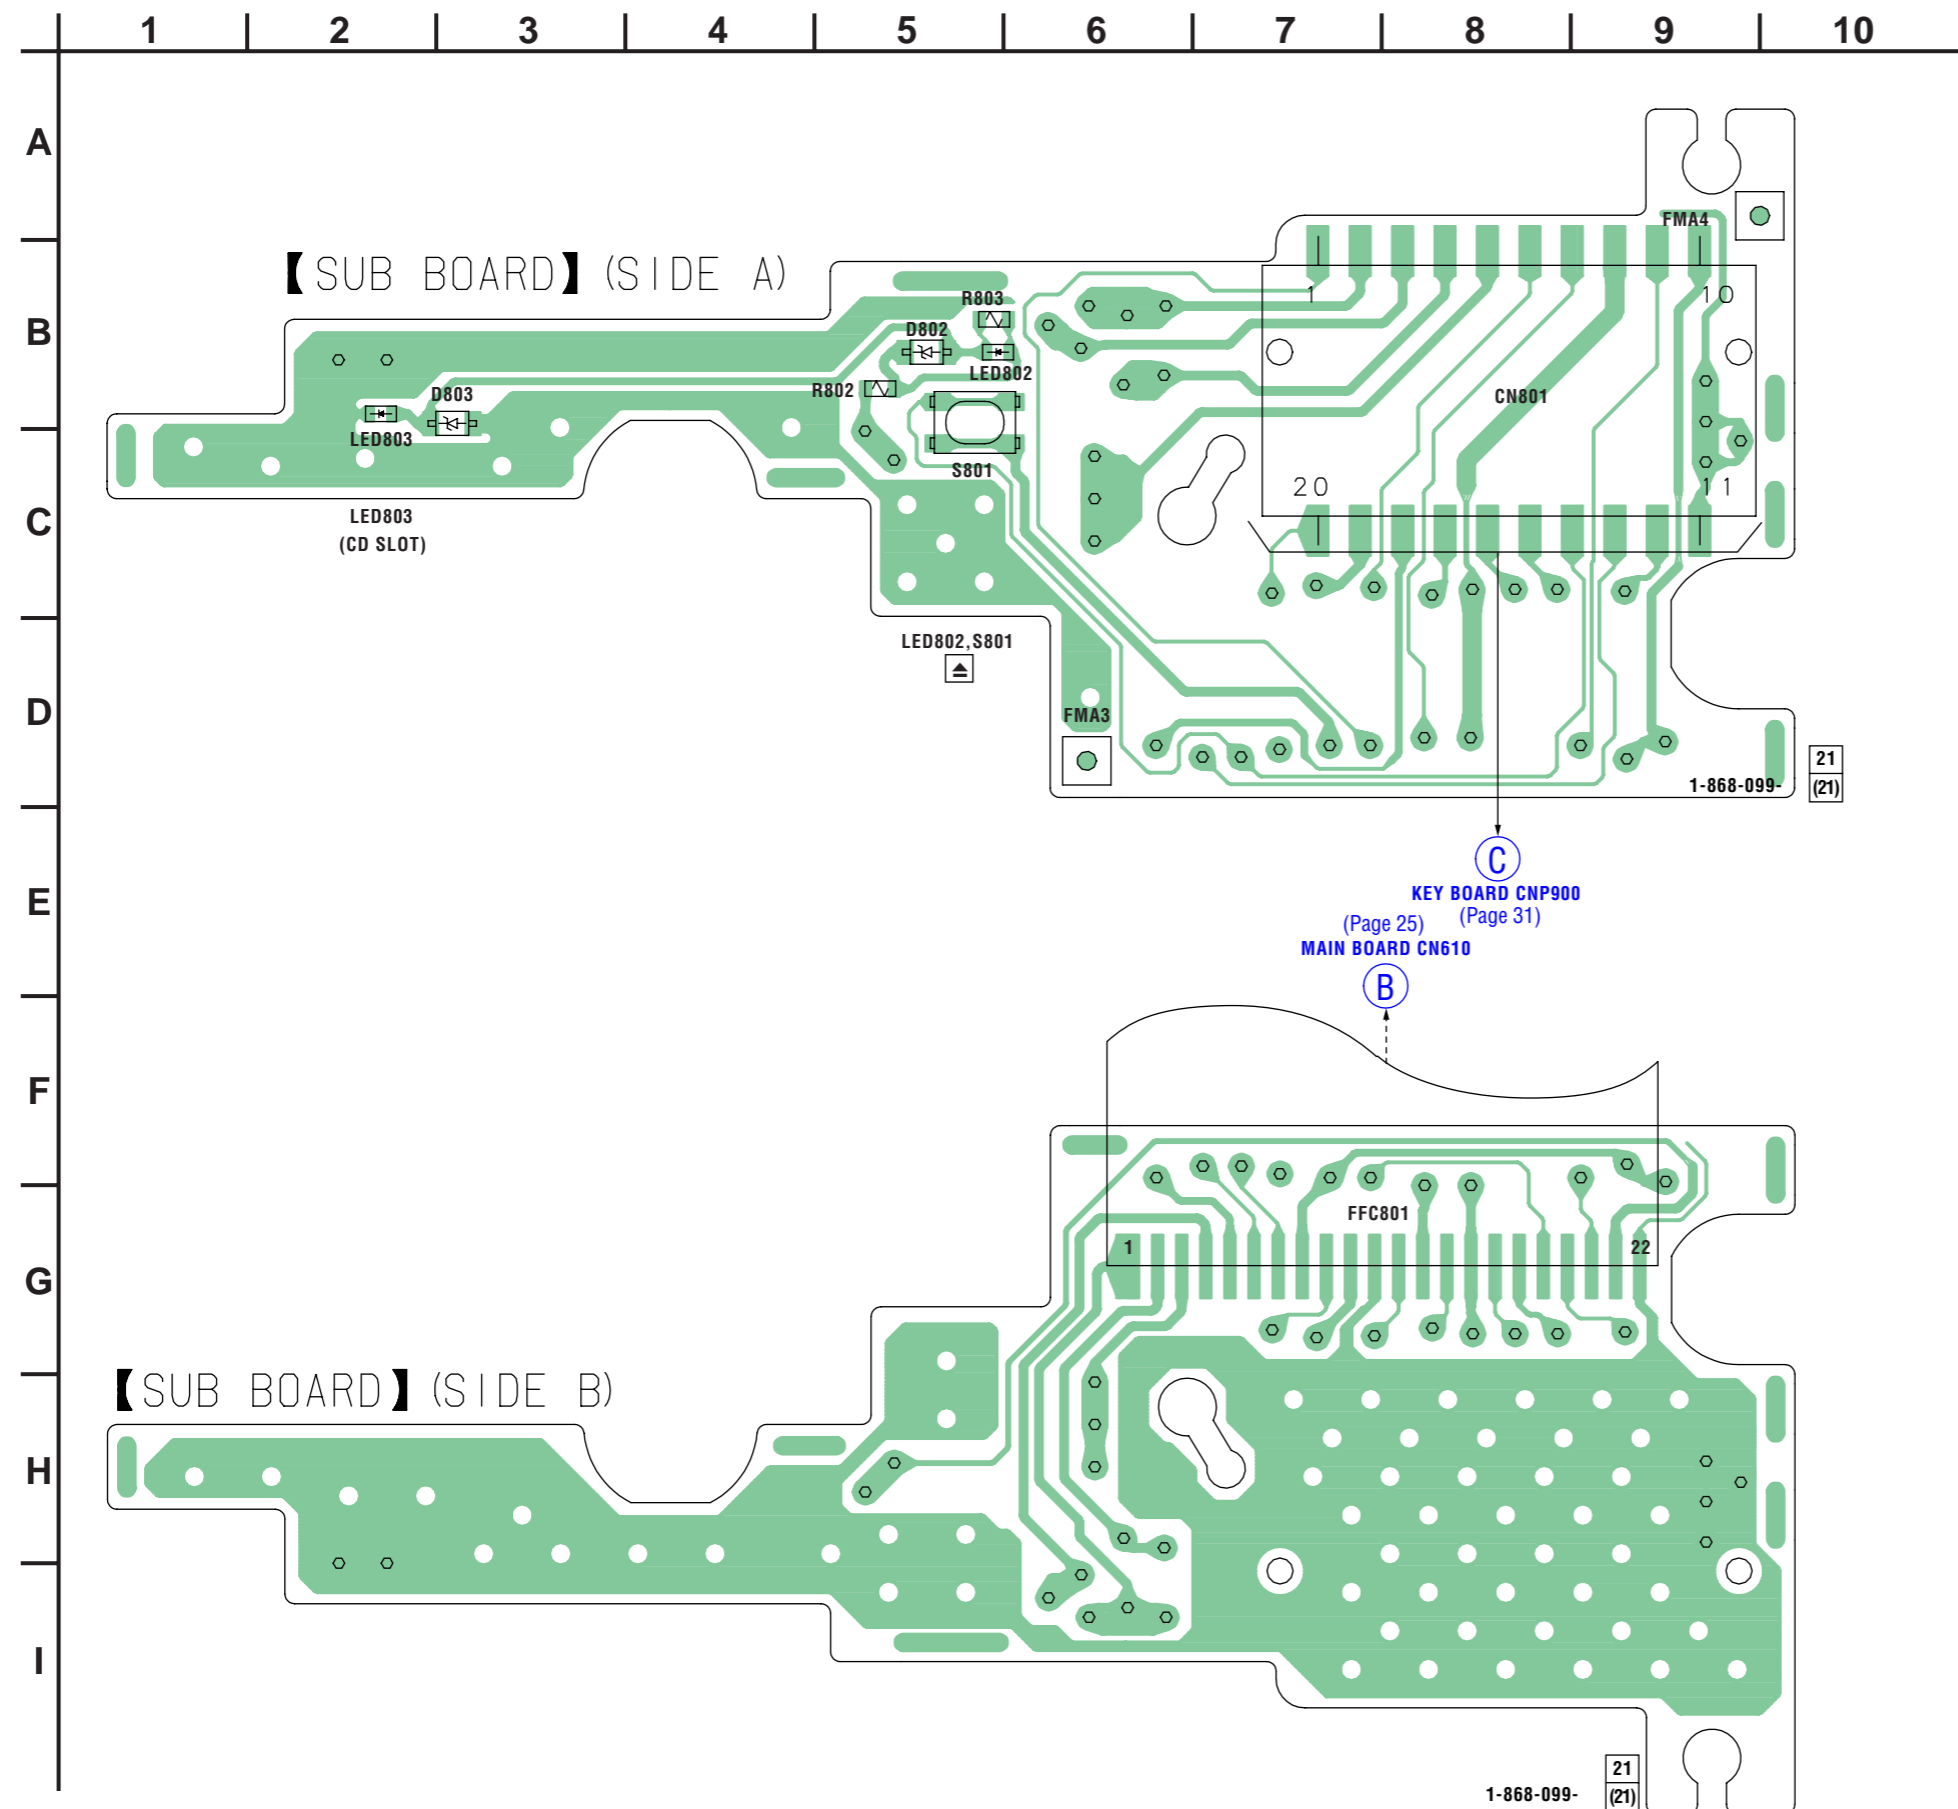

3-13. SCHEMATIC DIAGRAM — SUB SECTION —

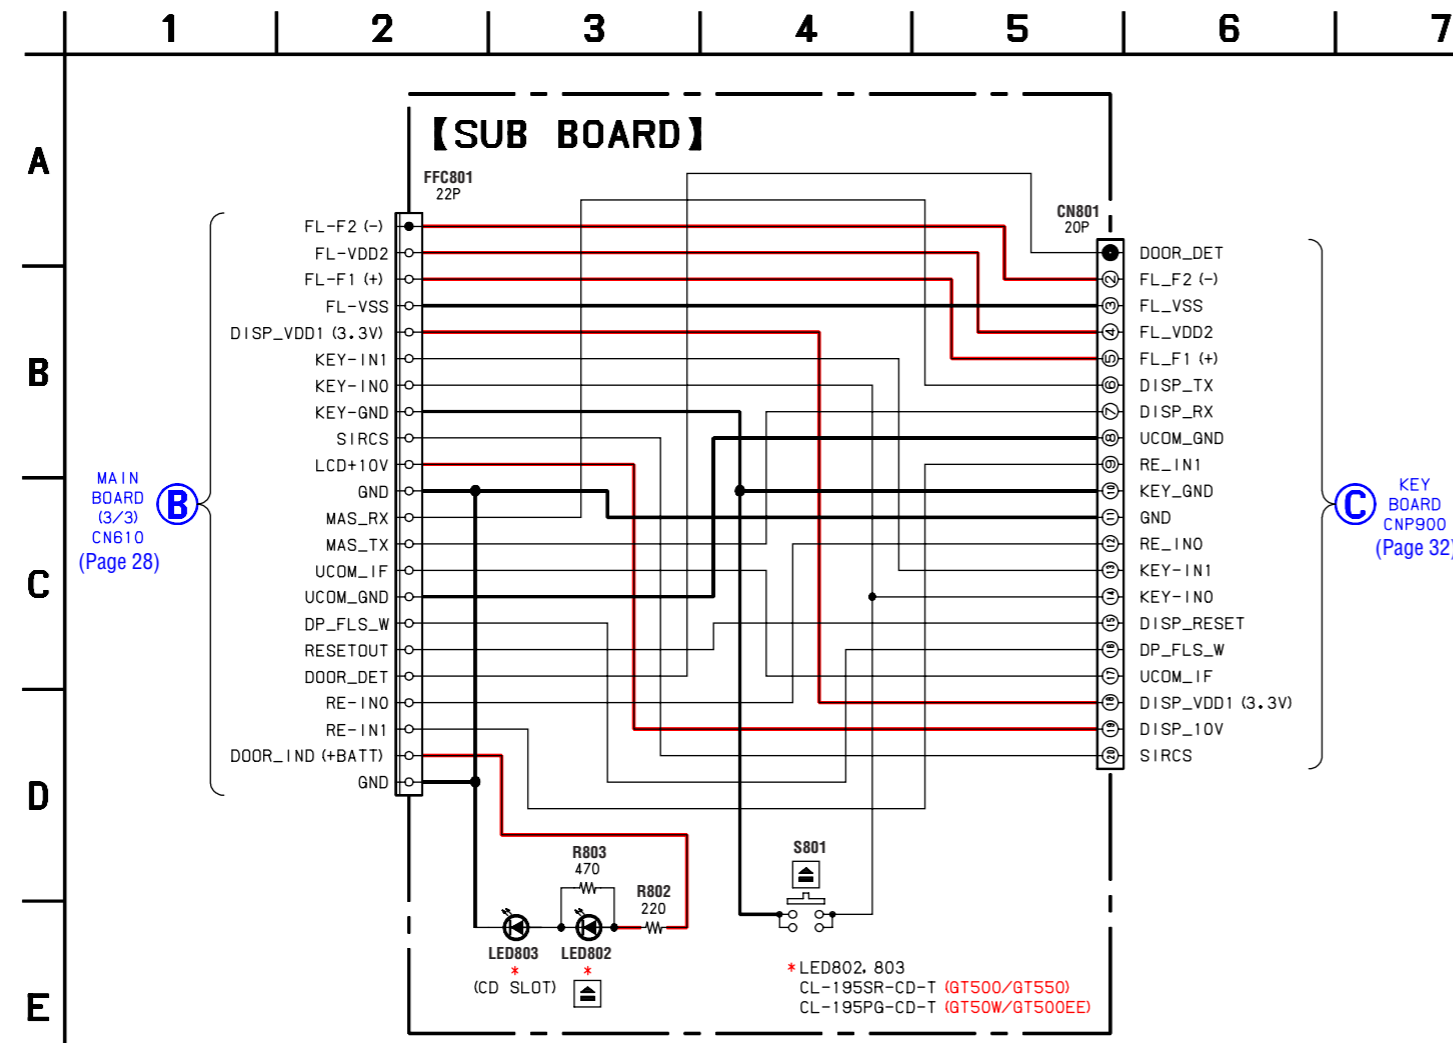

3-14. PRINTED WIRING BOARD — KEY SECTION — • Refer to page 20 for Circuit Boards Location.

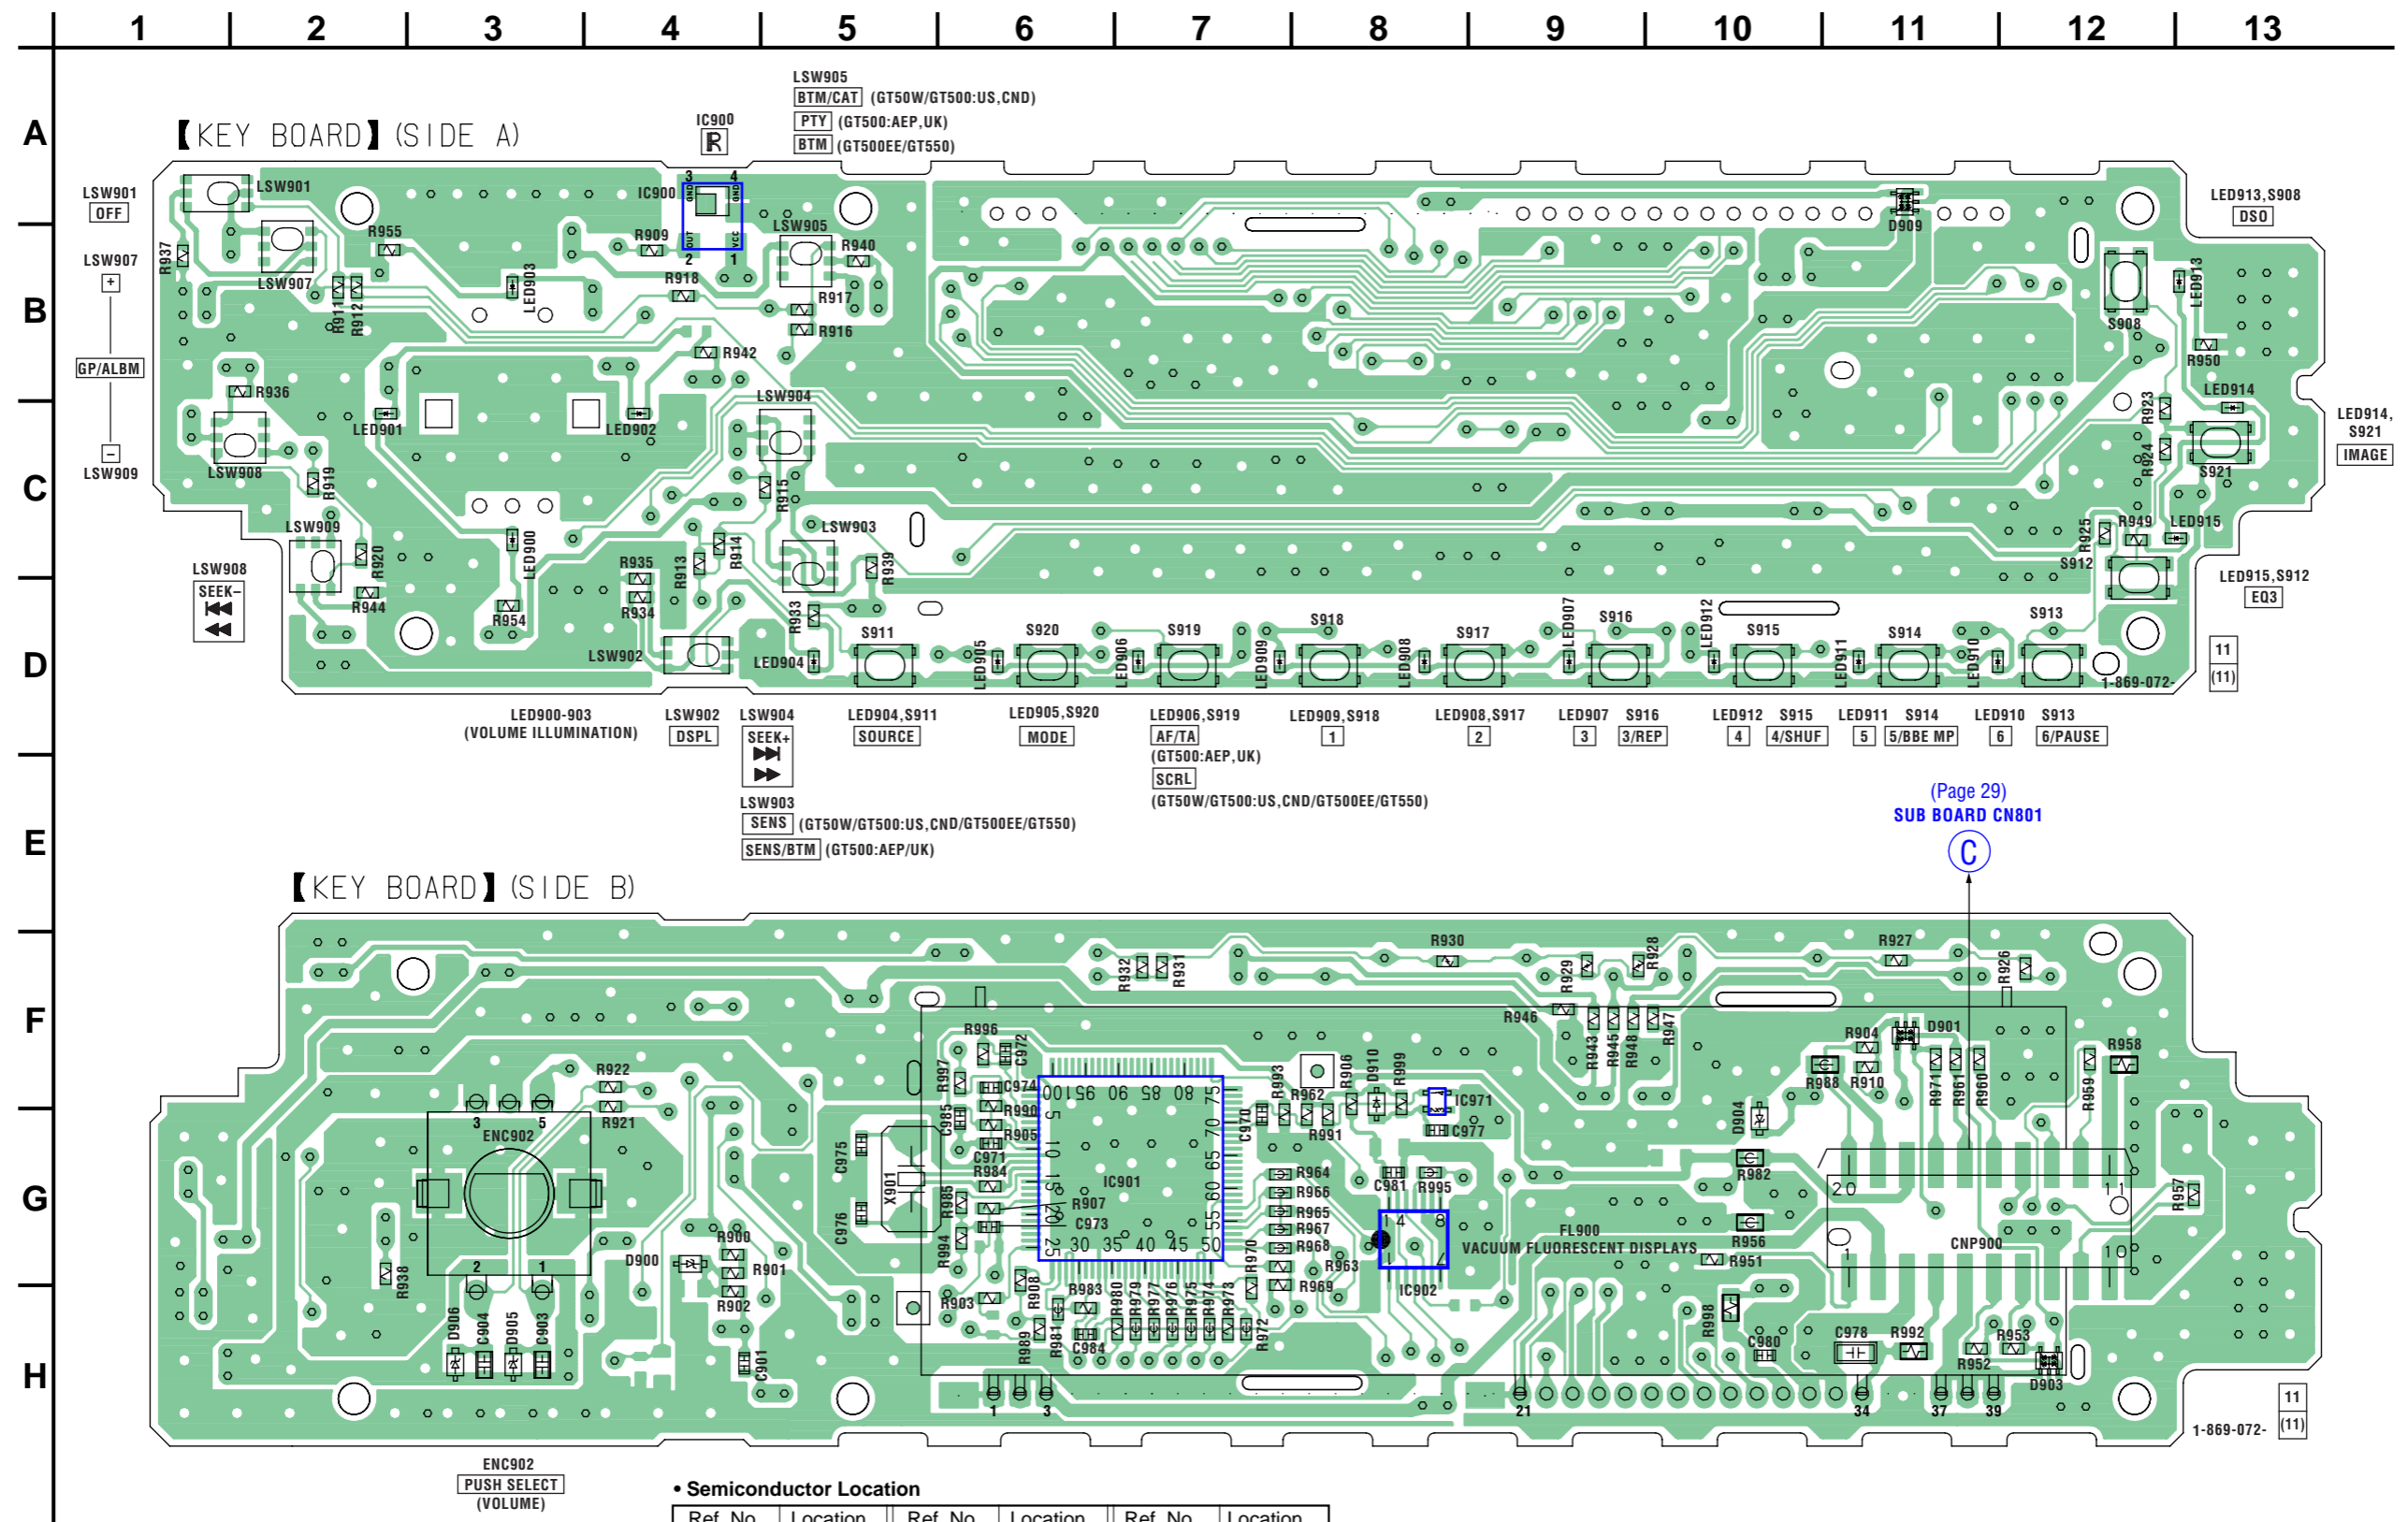


(Page 29)
SUB BOARD CN801

• Semiconductor Location


| Ref. No. | Location | Ref. No. | Location | Ref. No. | Location |
|----------|----------|----------|----------|----------|----------|
| D900 | G-4 | IC901 | G-7 | LED906 | D-7 |
| D901 | F-11 | IC902 | G-8 | LED907 | D-9 |
| D903 | H-12 | IC971 | F-8 | LED908 | D-8 |
| D904 | G-10 | | | LED909 | D-7 |
| D905 | H-3 | LED900 | C-3 | LED910 | D-11 |
| D906 | H-3 | LED901 | C-2 | LED911 | D-11 |
| D909 | A-11 | LED902 | C-4 | LED912 | D-10 |
| D910 | F-8 | LED903 | B-3 | LED913 | B-13 |
| | | LED904 | D-5 | LED914 | C-13 |
| | | LED905 | D-6 | LED915 | C-13 |

3-15. SCHEMATIC DIAGRAM — KEY SECTION — • Refer to page 20 for Waveforms.

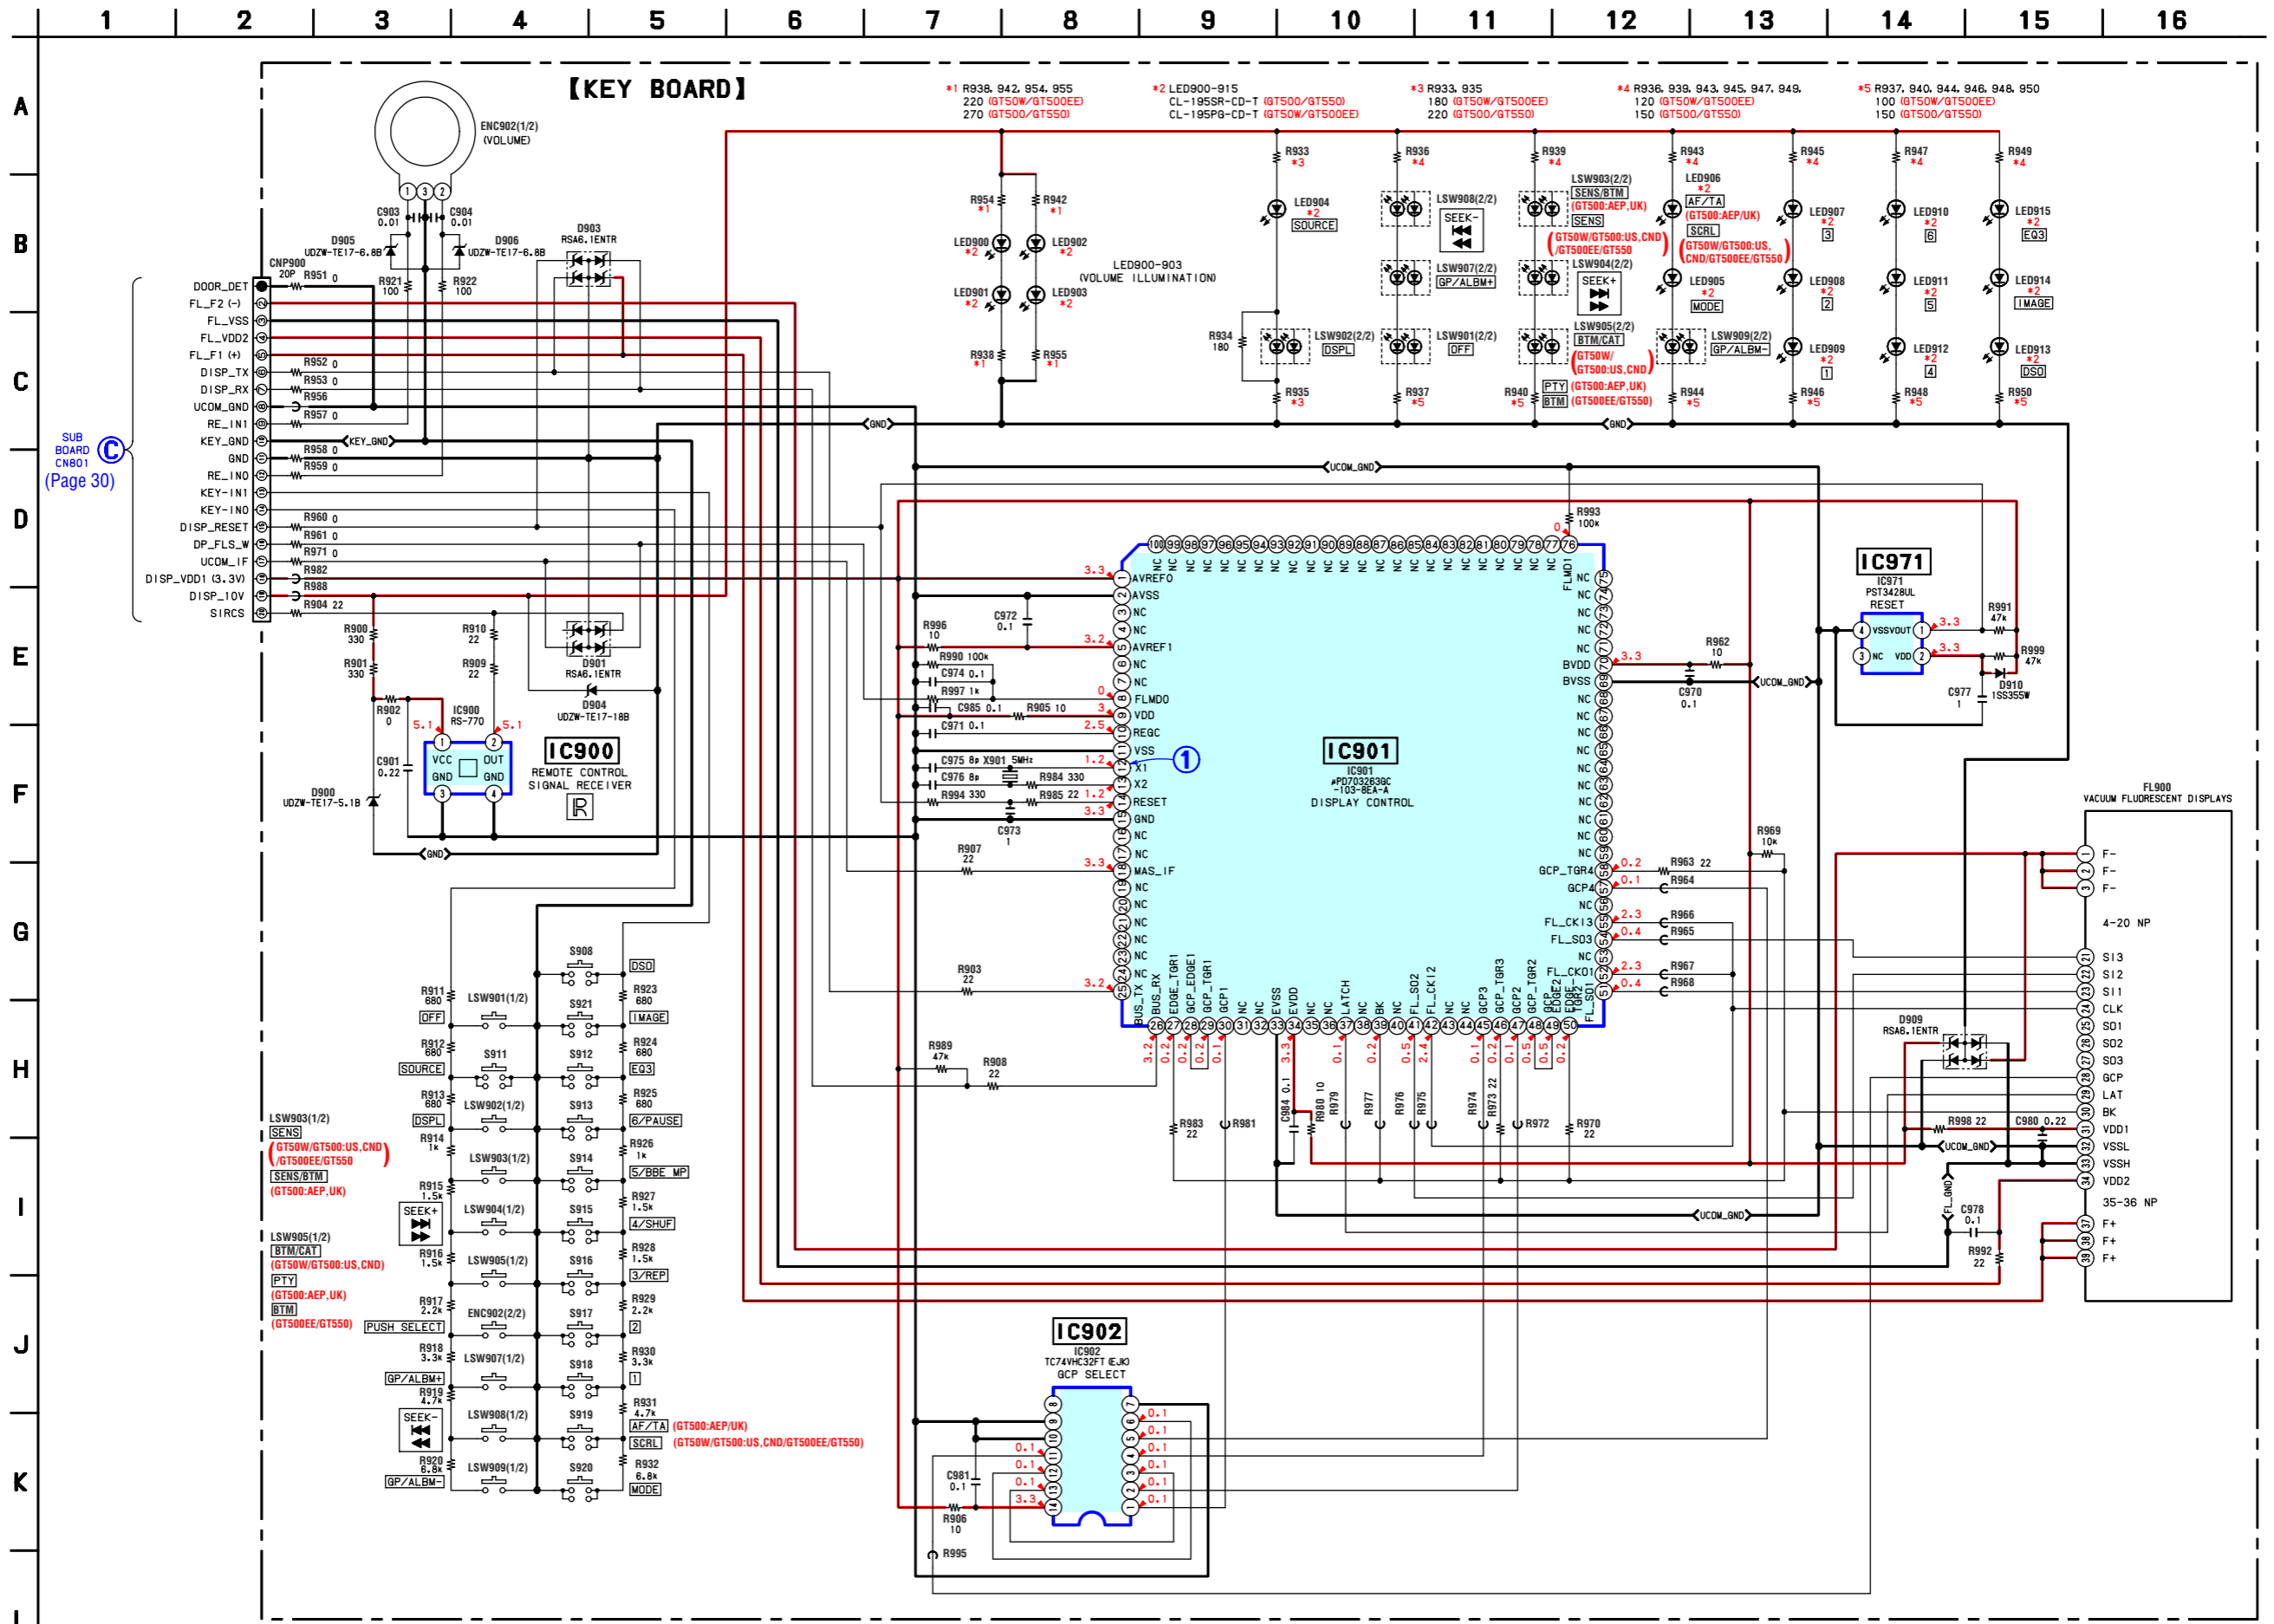


• IC Block Diagrams


IC1 BA5968FP-E2 (SERVO Board (2/2))

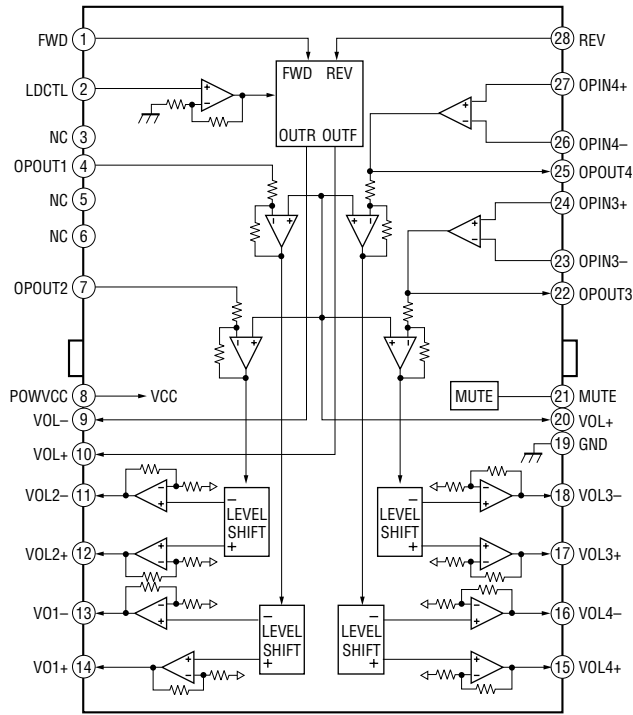


IC350 TDA7333013TR (MAIN Board (1/3))

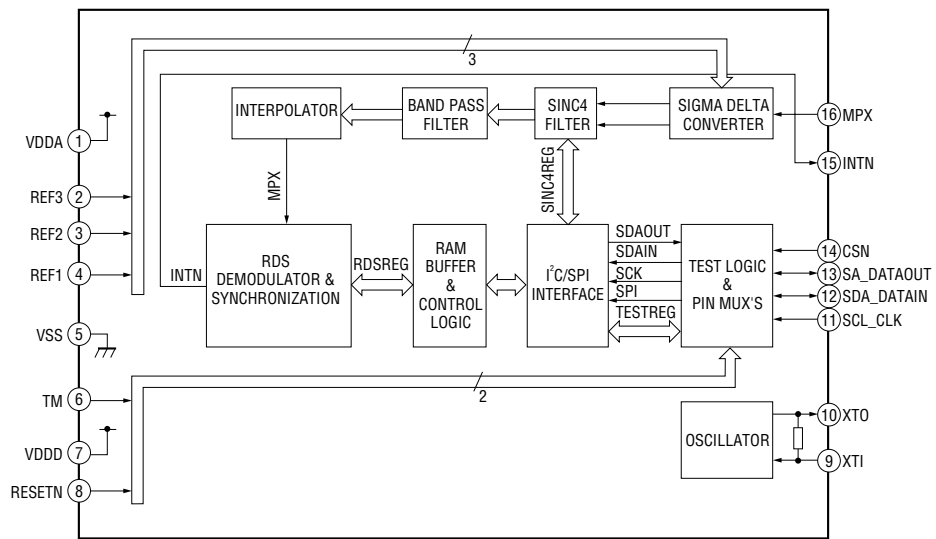


IC150 TDA8588AJ/N2/R1 (MAIN Board (1/3))

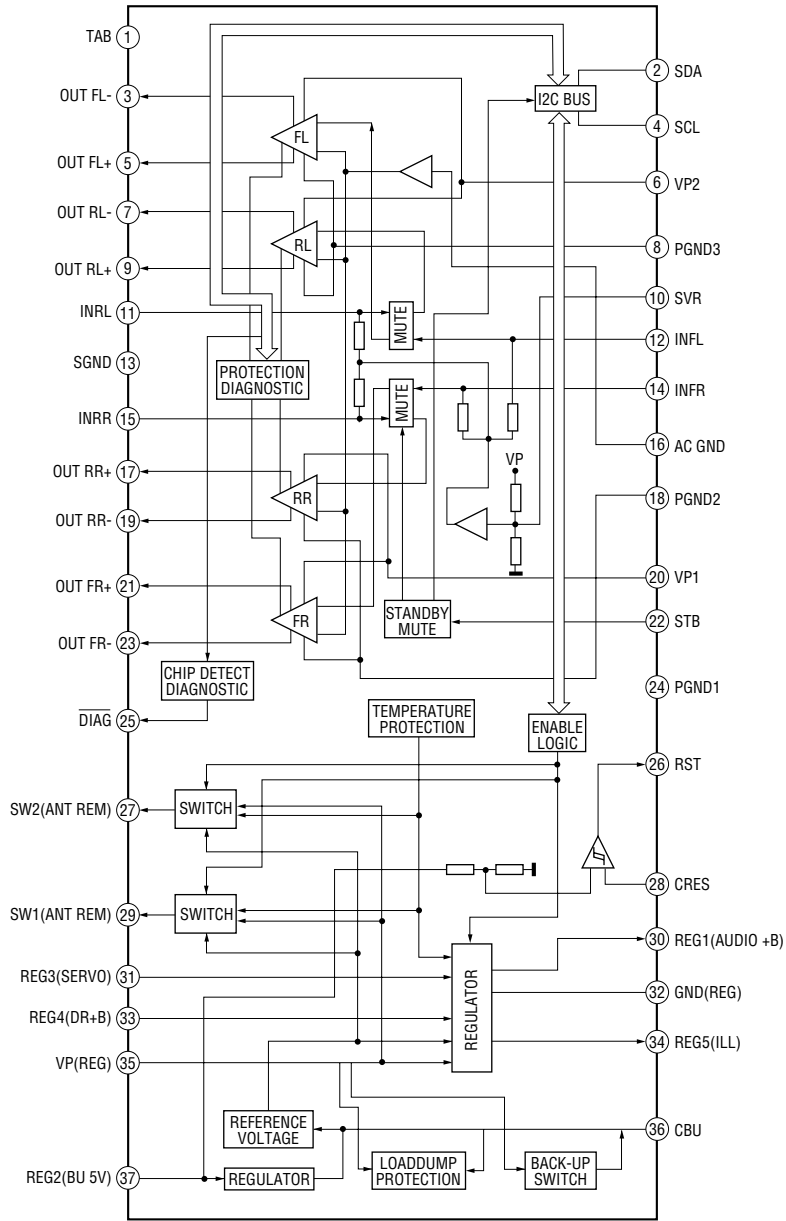

IC450 BA8271F-E2 (MAIN Board (2/3))

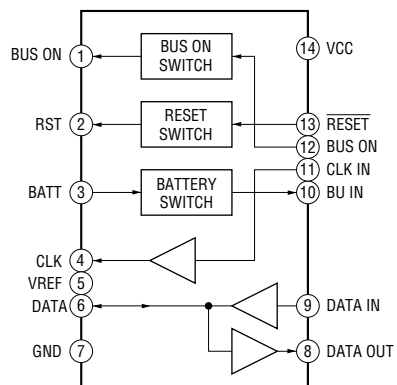

IC401 TDA7419TR (MAIN Board (1/3))

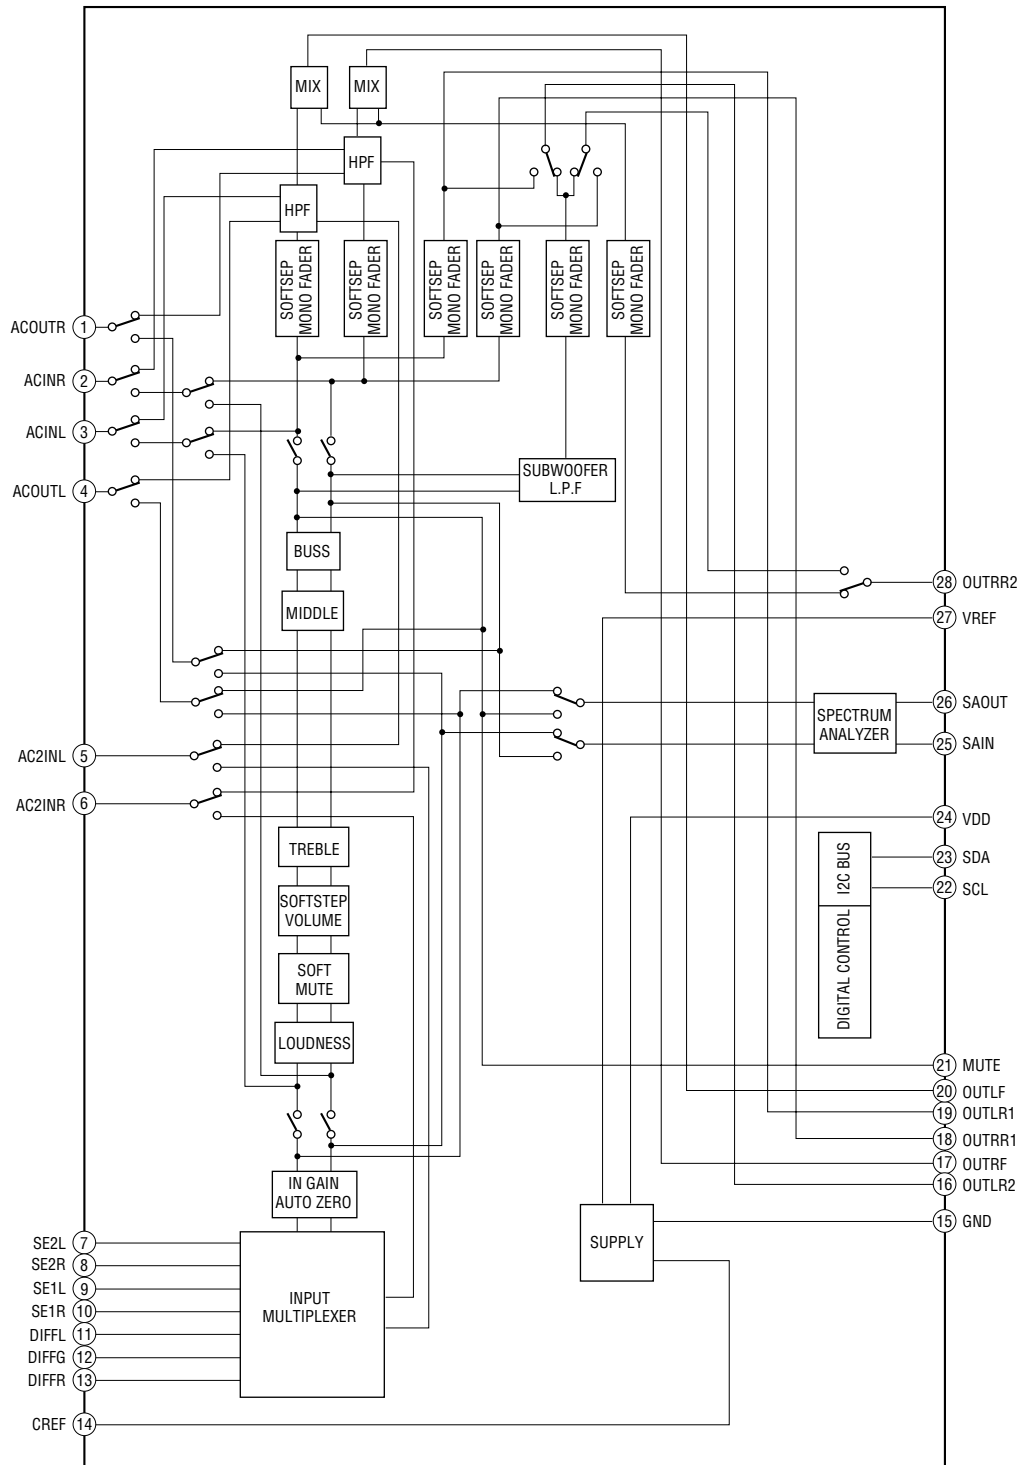

CDX-GT50W/GT500/GT500EE/GT550

• IC Pin Descriptions

IC3 MB90486BPFV-G-177E1 (CD SYSTEM CONTROL) (SERVO BOARD (2/2))

| Pin No. | Pin Name | I/O | Pin Description |
|----------|-------------|-----|---|
| 1 | CDON 1500MV | O | Servo 1.5 V power supply control signal output |
| 2 to 5 | NC | — | Not used. (Open) |
| 6 | DRVON | O | Motor drive on/off control signal output |
| 7 | CD BUS0 | I/O | Bus data signal input/output 0 |
| 8 | CD BUS1 | I/O | Bus data signal input/output 1 |
| 9 | VSS | — | Ground pin |
| 10 | CD BUS2 | I/O | Bus data signal input/output 2 |
| 11 | CD BUS3 | I/O | Bus data signal input/output 3 |
| 12 | CD BUCK | O | Bus clock signal output |
| 13 | CD XCCE | O | Chip enable signal output |
| 14 | CD XRST | O | Reset signal output |
| 15 | CD ZDET | I | Zero detection signal input |
| 16 to 20 | NC | — | Not used. (Open) |
| 21 | VCC | — | Power supply pin (+3.3 V) |
| 22 | DAC ZDETL | I | Zero data detection signal input (L-ch) |
| 23 | DAC ZDETR | I | Zero data detection signal input (R-ch) |
| 24 | NC | — | Not used. (Open) |
| 25 | RXD | I | UART RXD data signal input (MCBUS/Flash data input) |
| 26 | TXD | O | UART TXD data signal output (MCBUS/Flash data output) |
| 27 | DEC SSTBY | O | SRAM STANDBY mode control signal output |
| 28, 29 | NC | — | Not used. (Open) |
| 30 | DEC INT | I | Request signal input |
| 31, 32 | NC | — | Not used. (Open) |
| 33 | AVCC | — | Power supply pin (+3.3 V) for A/D converter |
| 34 | AVRH | — | External reference voltage for A/D converter |
| 35 | AVSS | — | Ground pin |
| 36 | NC | — | Not used. (Open) |
| 37 | DEC XMUTE | O | Mute signal output L: mute |
| 38, 39 | NC | — | Not used. (Open) |
| 40 | VSS | — | Ground pin |
| 41 | NC | — | Not used. (Open) |
| 42 | MEC LIMIT | I | Sled limit in detection switch signal input |
| 43 | MEC LOAD | O | Loading motor signal output (Load direction) |
| 44 | MEC EJECT | O | Loading motor signal output (Eject direction) |
| 45 | MEC INSW | I | Pack-in detection signal input |
| 46 | MEC DSW | I | Chucking end detection switch signal input |
| 47, 48 | MD0, MD1 | I | CPU operation mode designation signal input (Connect to Vcc.) |
| 49 | MD2 | I | CPU operation mode designation signal input (Connect to Vss.) |
| 50 | BUS ON | I | Bus on signal input L: bus on |
| 51 | BU IN | I | Backup on/off signal input H: backup on, L: backup off |
| 52 | NC | — | Not used. (Open) |
| 53 | MEC SELFSW | I | Disc insert detection switch signal input L: disc in interruption |
| 54, 55 | NC | — | Not used. (Open) |
| 56 | UNISI | I | Serial data signal input |
| 57 | UNISO | O | Serial data signal output |
| 58 | UNICKI | I | Serial clock signal input |
| 59 | LINKOFF | O | Line off signal output |
| 60 | A ATT | O | Audio attenuation signal output H: ATT on |
| 61 | EJECT OK | I | Front panel open signal input H: eject |
| 62 | OPEN REQ | O | Front panel open/close request signal output H: open request |
| 63 | MECON | O | Mechanism deck power supply control signal output |

| Pin No. | Pin Name | I/O | Pin Description |
|----------|--------------------------|-----|---|
| 64 | CDON | O | Servo power supply control signal output H: power on |
| 65 | XUART | I | Sony-Bus/MC-Bus change signal input H: Sony-Bus, L: MC-Bus |
| 66 | ZMUTE | O | Zero detection mute signal output |
| 67 | MECON CHK | I | MECON rising detection signal input |
| 68 | CDON CHK | I | CDON rising detection signal input |
| 69 to 74 | NC | — | Not used. (Open) |
| 75 | $\overline{\text{RSTX}}$ | I | System reset signal input |
| 76 | NC | — | Not used. (Open) |
| 77 | X1A | — | Sub-clock connect pin Not used in this set. (Open) |
| 78 | X0A | — | Sub-clock connect pin Not used in this set. (Connect to Vss.) |
| 79 | VSS | — | Ground pin |
| 80 | X0 | I | Main-clock connect pin (12 MHz) |
| 81 | X1 | O | Main-clock connect pin (12 MHz) |
| 82 | VCC | — | Power supply pin (+3.3 V) |
| 83 | XWD | I | Not used in this set. (Open) |
| 84 | XINIT3 | I | Not used in this set. (Open) |
| 85 | NC | — | Not used. (Open) |
| 86 | XSJIG | I | Not used in this set. (Open) |
| 87 to 89 | XINIT0 to 2 | I | Not used in this set. (Open) |
| 90 to 96 | NC | — | Not used. (Open) |
| 97 | XDES | I | Mode select pin |
| 98 | XLINE | I | Not used in this set. (Open) |
| 99, 100 | NC | — | Not used. (Open) |

CDX-GT50W/GT500/GT500EE/GT550

IC711 MB90487APF-G-162E1 (SYSTEM CONTROL) (MAIN BOARD (3/3))

| Pin No. | Pin Name | I/O | Pin Description |
|----------|------------|-----|--|
| 1 | AREASEL2 | I | Destination setting pin |
| 2 | AREASEL1 | I | Destination setting pin |
| 3 | AREASEL0 | I | Destination setting pin |
| 4 | NCO | O | Not used. (Open) |
| 5 | NOSE SW | I | Front panel open/close detect signal input L: Panel on, H: Panel off |
| 6 | NCO | O | Not used. (Open) |
| 7 | BEEP | O | Beep signal output |
| 8 | DIAG | I | Power AMP status signal input |
| 9 | VOL ATT | O | Electronic volume attenuate control signal output |
| 10 | FSW IN | I | D/D converter oscillator frequency count signal input |
| 11 | VSS | — | Ground pin |
| 12 | TUATT | O | Tuner mute control signal output |
| 13 | NSMASK | O | Noise mask signal output (AEP, UK model only) |
| 14 | ILLUMI SEL | I | Illumination voltage setting signal input |
| 15 | SEL1 | O | Not used in this set. (Open) |
| 16 | NCO | O | Not used. (Open) |
| 17 | AUXIN | O | AUX select signal output L: AUX, H: BUS IN |
| 18 | DISP RSET | O | Display reset signal output |
| 19 | FL ON | O | D/D converter control signal output H: On |
| 20 | DISP ON | O | Display control signal output H: On |
| 21 | ATT | O | Audio mute control signal output |
| 22 | SYSRST | O | System control reset signal output |
| 23 | VCC5 | — | Power supply pin (+3.3 V) |
| 24 | EEP SIO | I/O | EEPROM bus serial data input/output |
| 25 | EEP CKO | O | EEPROM bus serial clock output |
| 26 | AMPSTB | O | Power AMP standby signal output |
| 27 | DISP RX | I/O | Display IC communication signal input/output |
| 28 | DISP TX | O | Display IC communication signal output |
| 29 | MAST IF | O | Display IC communication start signal output |
| 30 | RDS ON | O | RDS ON signal output (AEP, UK model only) |
| 31 | RE IN0 | I | Rotary encoder signal input 0 |
| 32 | RE IN1 | I | Rotary encoder signal input 1 |
| 33 | I2C SCK | O | I2C bus serial clock signal output |
| 34 | I2C SIO | I/O | I2C bus serial data signal input/output |
| 35 | DAVDD | — | A/D converter power supply pin (+3.3 V) |
| 36 | AVRH | — | A/D converter external reference power supply pin (+3.3 V) |
| 37 | DAVSS | — | Ground pin |
| 38 | QUALITY | I | Noise detect signal input (AEP, UK model only) |
| 39 | VSM | I | S-meter voltage detect signal input |
| 40 | KEYIN1 | I | Key signal input 1 |
| 41 | KEYIN0 | I | Key signal input 0 |
| 42 | VSS | — | Ground pin |
| 43 | RC IN0 | I | Rotary commander key signal input |
| 44 | SA IN | I | Spectrum analyzer signal input |
| 45 | SA CKO | O | Spectrum analyzer clock signal output |
| 46 to 48 | NCO | O | Not used. (open) |
| 49 | MD0 | I | Operation mode setting pin (Connect to VDD.) |
| 50 | MD1 | I | Operation mode setting pin (Connect to VDD.) |
| 51 | MD2 | I | Operation mode setting pin (Connect to VSS.) |

| Pin No. | Pin Name | I/O | Pin Description |
|----------|-------------|-----|--|
| 52 | KEYACK | I | Key acknowledgment detect signal input |
| 53 | TU ATTIN | I | Tuner mute zero cross detect signal input (AEP, UK model only) |
| 54 | BUIN | I | Back-up power supply detect signal input |
| 55 | NCO | O | Not used. (Open) |
| 56 | DAVN | I | RDS data block synchronized detect signal input (AEP, UK model only) |
| 57 | NCO | O | Not used. (Open) |
| 58 | UNISI | I | SONY bus data signal input |
| 59 | UNISO | O | SONY bus data signal output |
| 60 | UNISCK | O | SONY bus clock signal output |
| 61 | NCO | O | Not used. (Open) |
| 62 | NCO | O | Not used. (Open) |
| 63 | DOOR IND | O | CD IN LED control signal output H: On |
| 64 | SIRCS | I | Remote control signal input |
| 65 | NCO | O | Not used. (Open) |
| 66 | FSW OUT | O | D/D converter oscillator frequency shift control signal output L: 300 kHz, H: 400 kHz |
| 67 | DISP FLASHW | I | Display IC flash ROM write signal input |
| 68 | FLASH W | I | Memory mode select signal input L: Write mode |
| 69 | NCO | O | Not used. (Open) |
| 70 | DOOR SW | I | Panel open/ close detect signal input H: Panel open |
| 71 | RC IN1 | I | Rotary commander shift key signal input |
| 72 | ACC IN | I | Accessory power supply detect signal input |
| 73 | TESTIN | I | Test mode detect signal input |
| 74 | TELATT | I | Telephone attenuate detect signal input |
| 75 | ILUIN | I | Auto dimmer illumination detect signal input H: Ill off |
| 76 | XKEYON | O | A/D converter power supply control signal output |
| 77 | RESET | I | CPU reset signal input |
| 78 | NCO | O | Not used. (Open) |
| 79 | XIN | I | Sub-clock input (32.768 kHz) |
| 80 | XOUT | O | Sub-clock output (32.768 kHz) |
| 81 | VSS1 | — | Ground pin |
| 82 | OSC OUT | O | Main-clock output (18.432 MHz) |
| 83 | OSC IN | I | Main-clock input (18.432 MHz) |
| 84 | VCC3 | — | Power supply pin (+3.3 V) |
| 85 | SEL2 | O | Not used in this set. (Open) |
| 86 | SEL5 | O | Not used in this set. (Open) |
| 87 | BUSON | O | Bus on signal output |
| 88 | SEL3 | O | Not used in this set. (Open) |
| 89 | EJECT OK | O | Eject OK signal output |
| 90 to 92 | NCO | O | Not used. (Open) |
| 93 | Z-MUTE | I | CD zero cross mute detect signal input |
| 94, 95 | NCO | O | Not used. (Open) |
| 96 | CYRIL SEL | I | Cyril select signal input L: Cyril off, H: Cyril on |
| 97 | SEL4 | O | Not used in this set. (Open) |
| 98 | CD ON | I | CD mechanism power control request signal input |
| 99 | CDM ON | I | CD mechanism deck power control request signal input |
| 100 | NCO | O | Not used. (Open) |

SECTION 4
EXPLODED VIEWS

NOTE:


- The mechanical parts with no reference number in the exploded views are not supplied.
- Items marked “*” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- -XX and -X mean standardized parts, so they may have some difference from the original one.

- Color Indication of Appearance Parts
Example :
KNOB, BALANCE (WHITE) ... (RED)
Parts Color Cabinet's Color
- Accessories are given in the last of this parts list.
- Abbreviation
CND: Canadian model
EE : East European model
MX : Mexican model
CH : Chinese model

The components identified by mark Δ or dotted line with mark Δ are critical for safety. Replace only with part number specified.

Les composants identifiés par une marque Δ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.


4-1. MAIN SECTION

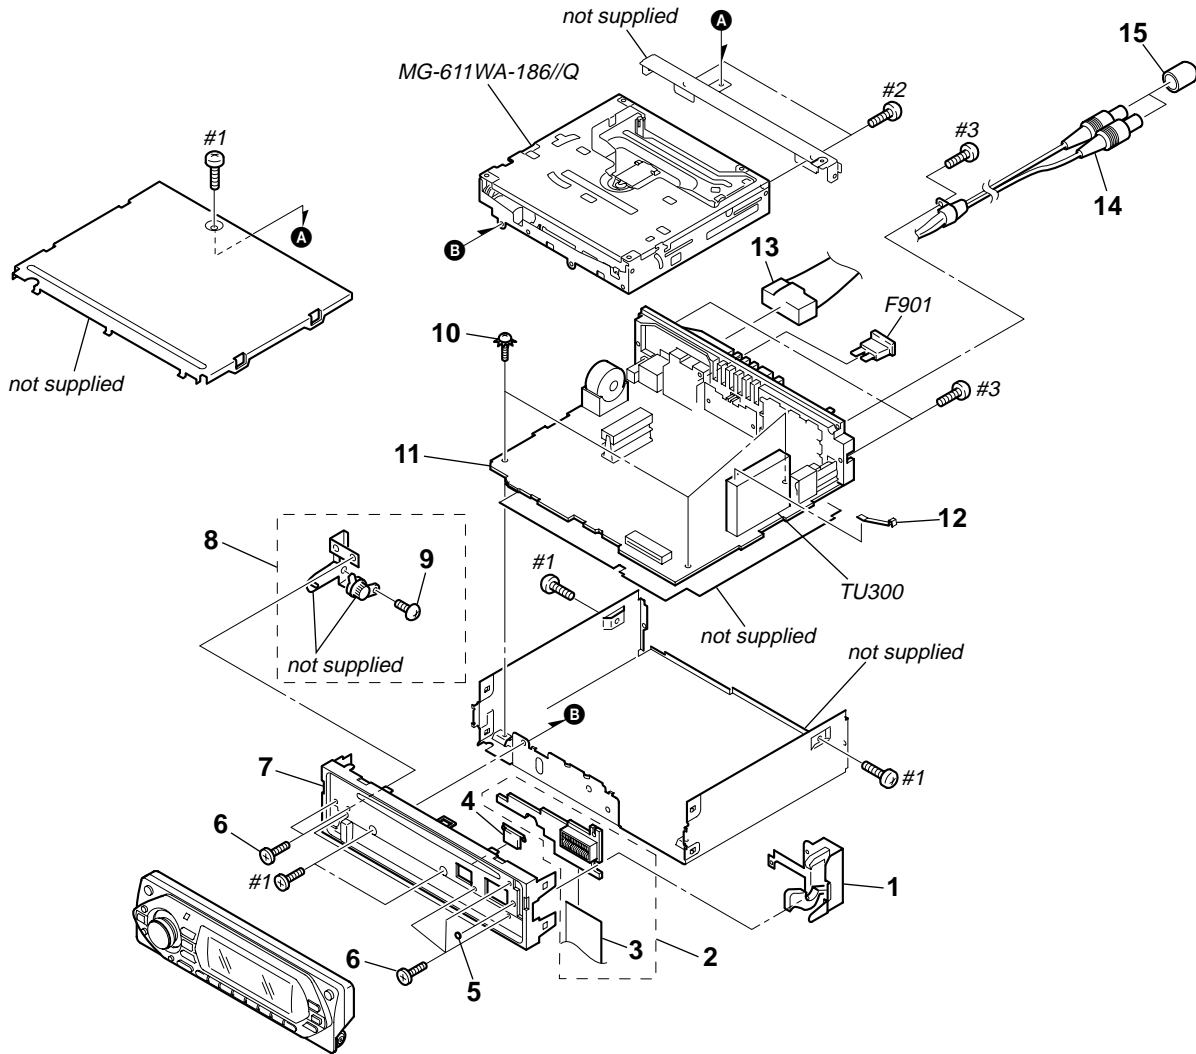

| Ref. No. | Part No. | Description | Remark |
|----------|--------------|-------------------------------------|--------|
| 1 | X-3384-259-1 | LOCK ASSY | |
| 2 | A-1156-589-A | SUB BOARD, COMPLETE (GT500/GT550) | |
| 2 | A-1158-907-A | SUB BOARD, COMPLETE (GT50W/GT500EE) | |
| 3 | 1-831-502-11 | CABLE, FLEXIBLE FLAT (22 CORE) | |
| 4 | 3-246-441-01 | BUTTON (EJECT) | |
| 5 | 3-260-247-01 | CUSHION (SUB PANEL) | |
| 6 | 3-042-244-01 | SCREW (T) | |
| 7 | X-2067-744-1 | PANEL ASSY, SUB (FL) | |
| 8 | X-3384-203-1 | GEAR ASSY | |
| 9 | 3-713-786-51 | SCREW +P 2X3 | |
| 10 | 3-376-464-11 | SCREW (+PTT 2.6X6), GROUND POINT | |
| 11 | A-1156-591-A | MAIN BOARD, COMPLETE (US,CND) | |
| 11 | A-1158-884-A | MAIN BOARD, COMPLETE (AEP,UK) | |
| 11 | A-1158-896-A | MAIN BOARD, COMPLETE (GT550) | |
| 11 | A-1158-918-A | MAIN BOARD, COMPLETE (GT500EE) | |


| Ref. No. | Part No. | Description | Remark |
|----------|--------------|-----------------------------------|---------------------|
| 12 | 2-021-848-01 | SHEET (TU), GROUND | |
| 13 | 1-776-207-72 | CORD (WITH CONNECTOR) (POWER) | (EXCEPT AEP,UK,EE) |
| 13 | 1-776-527-71 | CORD (WITH CONNECTOR) (ISO) | (POWER) (AEP,UK,EE) |
| 14 | 1-790-355-54 | CORD (WITH CONNECTOR) (RCA) | (SUB OUT (MONO)) |
| 15 | 3-264-798-01 | CAP | |
| F901 | 1-532-877-11 | FUSE (BLADE TYPE) (AUTO FUSE) 10A | |
| TU300 | A-3220-961-B | TUNER UNIT (TUX-032) | |
| #1 | 7-685-792-09 | SCREW +PTT 2.6X6 (S) | |
| #2 | 7-685-790-01 | SCREW +PTT 2.6X4 (S) | |
| #3 | 7-685-793-09 | SCREW +PTT 2.6X8 (S) | |

4-2. FRONT PANEL SECTION

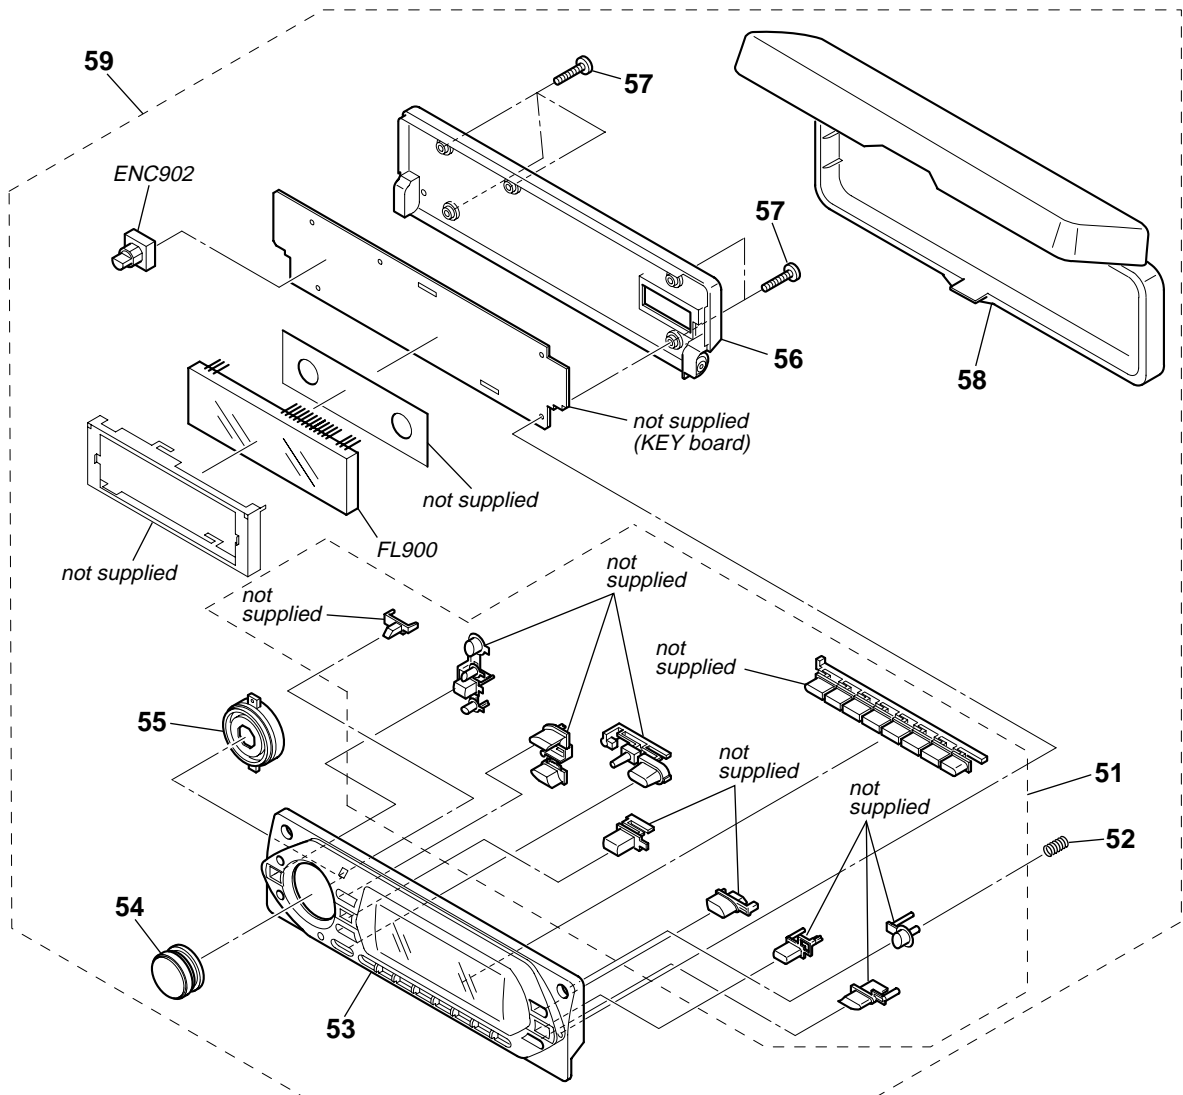


| Ref. No. | Part No. | Description | Remark | Ref. No. | Part No. | Description | Remark |
|----------|--------------|---------------------------------------|--------|----------|--------------|---|--------|
| 51 | X-2103-564-1 | BUTTON ASSY (S) (EXCEPT AEP,UK) | | 57 | 3-250-543-21 | SCREW (+B P-TITE M2) | |
| 51 | X-2103-565-1 | BUTTON ASSY (S) (AEP,UK) | | 58 | X-2055-358-1 | CASE ASSY (for FRONT PANEL) (EXCEPT US) | |
| 52 | 3-264-712-01 | SPRING (OPEN) | | 59 | A-1156-594-A | PANEL COMPLETE ASSY, FRONT (GT500:US) | |
| 53 | X-2103-559-1 | PANEL (SV) ASSY, FRONT (GT500:US,CND) | | 59 | A-1158-887-A | PANEL COMPLETE ASSY, FRONT (GT500:AEP,UK) | |
| 53 | X-2103-560-1 | PANEL (SV) ASSY, FRONT (GT500:AEP,UK) | | 59 | A-1158-899-A | PANEL COMPLETE ASSY, FRONT (GT550) | |
| 53 | X-2103-561-1 | PANEL (SV) ASSY, FRONT (GT550) | | 59 | A-1158-910-A | PANEL COMPLETE ASSY, FRONT (GT50W) | |
| 53 | X-2103-562-1 | PANEL (SV) ASSY, FRONT (GT50W) | | 59 | A-1158-922-A | PANEL COMPLETE ASSY, FRONT (GT500EE) | |
| 53 | X-2103-563-1 | PANEL (SV) ASSY, FRONT (GT500EE) | | 59 | A-1173-675-A | PANEL COMPLETE ASSY, FRONT (GT500:CND) | |
| 54 | X-2103-060-1 | KNOB ASSY (S) | | ENC902 | 1-479-481-12 | ENCODER, ROTARY (PUSH SELECT/VOLUME) | |
| 55 | 2-630-985-01 | LIGHT GUIDE (VOLUME) | | FL900 | 1-519-842-11 | VACUUM FLUORESCENT DISPLAY | |
| 56 | X-2067-746-1 | PANEL ASSY, FRONT BACK | | | | | |

4-3. CD MECHANISM SECTION (1)
(MG-611WA-186//Q)

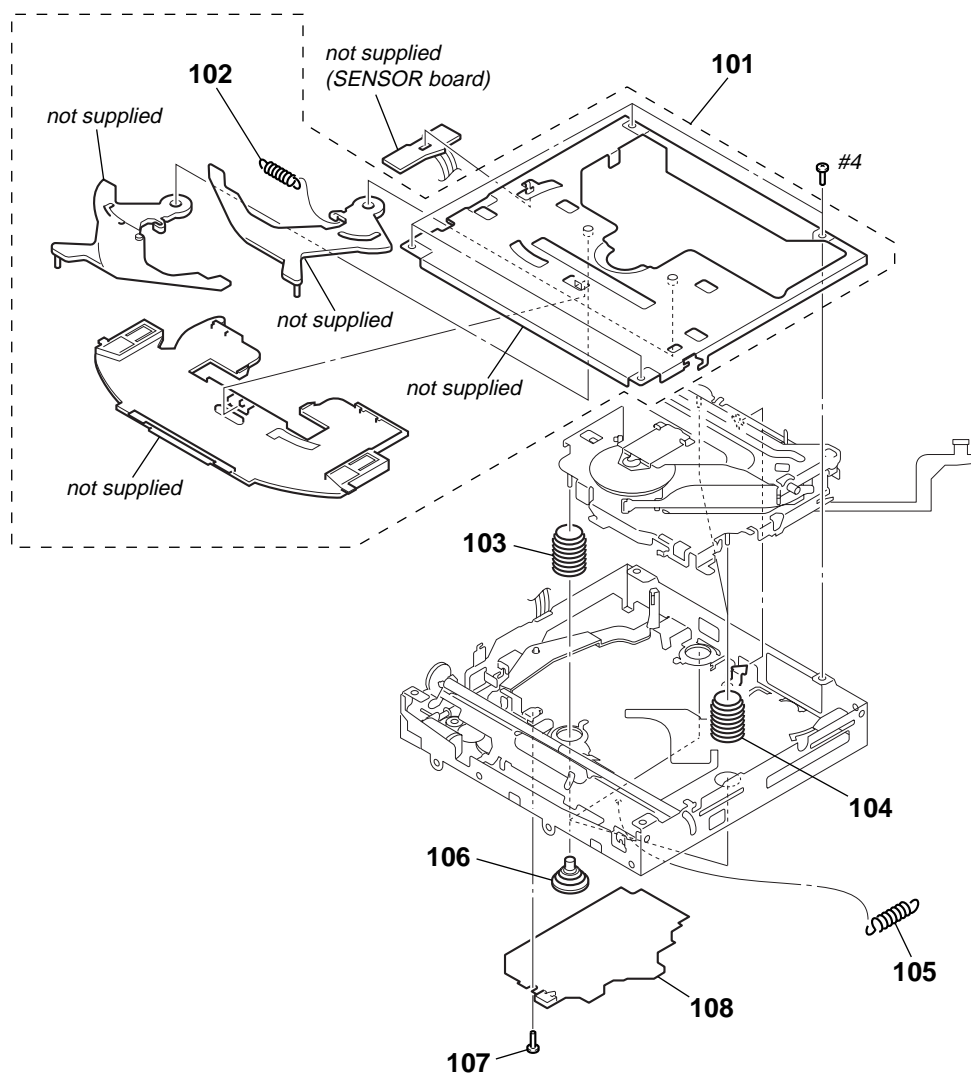


| Ref. No. | Part No. | Description | Remark | Ref. No. | Part No. | Description | Remark |
|----------|--------------|---------------------------------|--------|----------|--------------|-----------------------------|--------|
| 101 | A-3372-444-C | CHASSIS (T) SUB ASSY | | 106 | 3-259-033-01 | DAMPER (S) | |
| 102 | 3-253-729-11 | SPRING (LR), TENSION COIL | | 107 | 2-587-505-01 | SCREW | |
| 103 | 3-257-892-12 | SPRING (DAMPER), COIL (GREEN) | | 108 | A-1132-412-A | SERVO BOARD, COMPLETE | |
| 104 | 3-257-892-01 | SPRING (DAMPER), COIL (NATURAL) | | #4 | 7-627-552-87 | SCREW, PRECISION +P 1.7X2.2 | |
| 105 | 2-345-767-11 | SPRING (KF60), TENSION | | | | | |

4-4. CD MECHANISM SECTION (2)
(MG-611WA-186//Q)

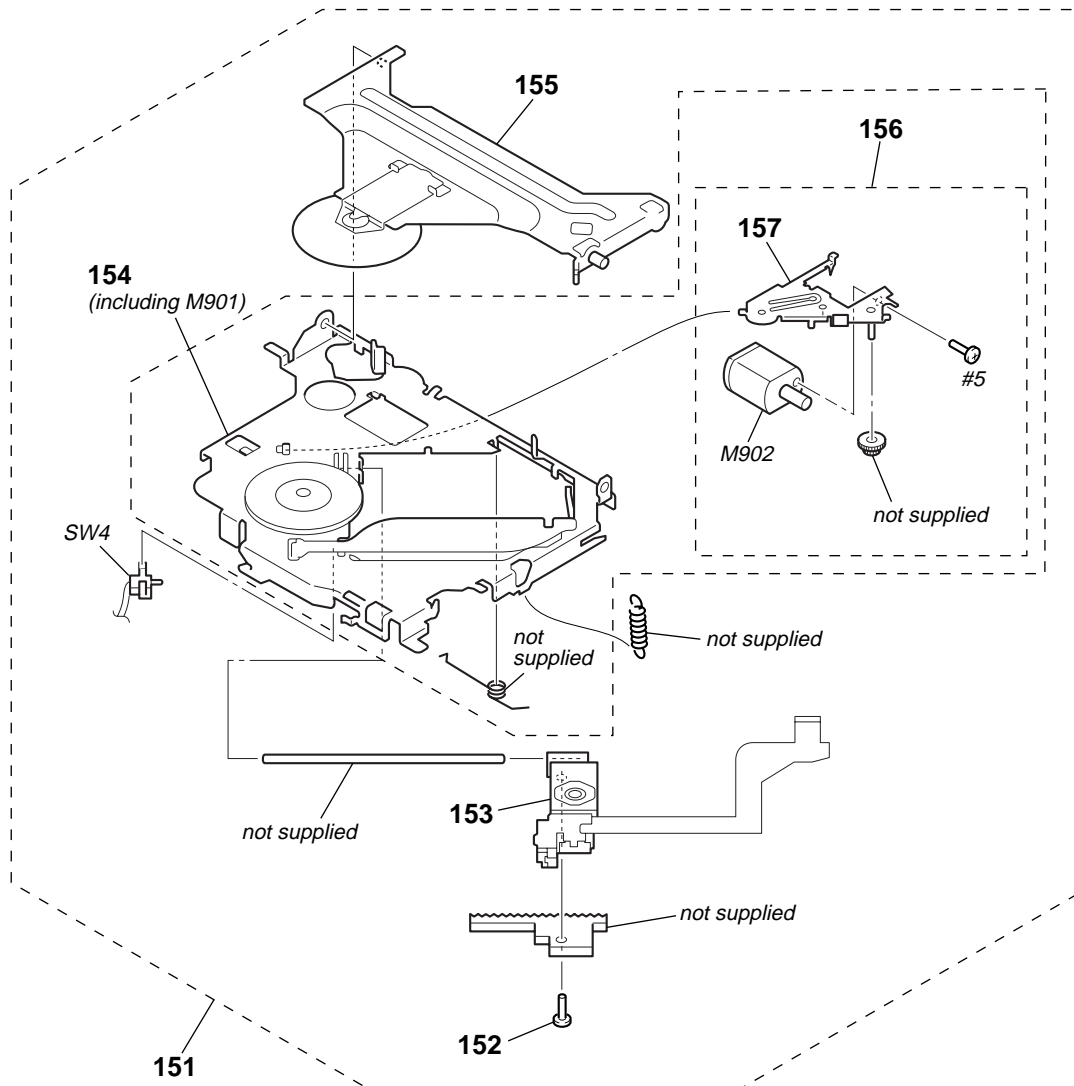


| Ref. No. | Part No. | Description | Remark | Ref. No. | Part No. | Description | Remark |
|----------|--------------|--|--------|----------|--------------|-----------------------------|--------|
| 151 | A-1075-644-A | CHASSIS (OP) COMPLETE ASSY | | 156 | A-3372-446-A | LEVER (SL) SUB ASSY | |
| 152 | 3-316-938-91 | SCREW (B1.4X5), TAPPING | | 157 | X-3384-090-3 | LEVER (SL) ASSY | |
| △ 153 | 8-820-207-12 | OPTICAL PICK-UP (KSS1000E/K1RP) | | M902 | A-3372-447-A | MOTOR ASSY, SL (SLED) | |
| 154 | A-1075-645-A | CHASSIS (OP) SUB ASSY (including M901) | | SW4 | 1-571-099-11 | SWITCH (1 KEY) (LIMIT) | |
| 155 | A-3372-449-A | ARM SUB ASSY, CHUCKING | | #5 | 7-627-850-77 | SCREW, PRECISION +P 1.4X1.8 | |

4-5. CD MECHANISM SECTION (3)
(MG-611WA-186//Q)

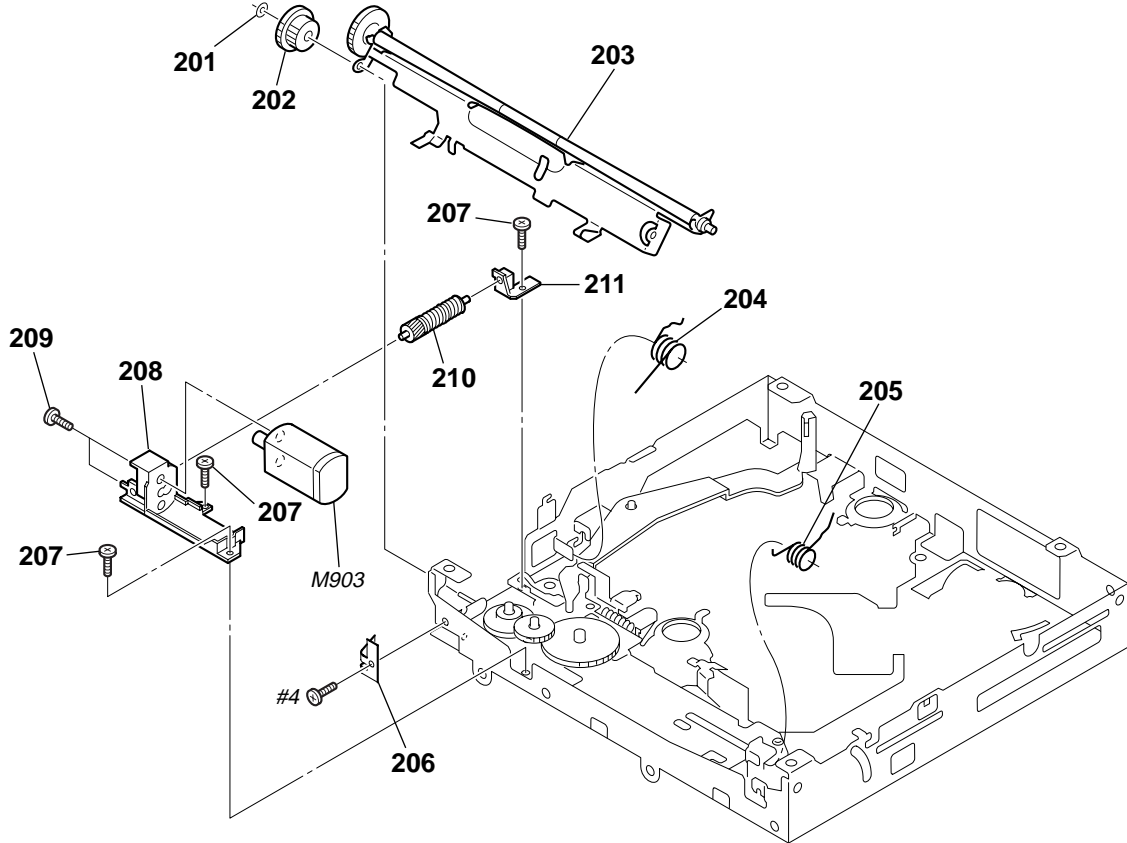

| Ref. No. | Part No. | Description | Remark | Ref. No. | Part No. | Description | Remark |
|----------|--------------|-------------------|--------|----------|--------------|------------------------------|--------|
| 201 | 3-348-993-01 | WASHER | | 208 | 2-186-696-02 | BRACKET (LEM-N) | |
| 202 | 2-186-699-01 | GEAR (RA1) | | 209 | 3-345-648-91 | SCREW (M1.4), TOOTHED LOCK | |
| 203 | A-1075-641-C | ARM ASSY, ROLLER | | 210 | A-1083-636-A | GEAR (LE) ASSY | |
| 204 | 2-635-295-01 | SPRING (RAL-B) | | 211 | 2-186-697-01 | BEARING (LEB-N) | |
| 205 | 2-635-296-01 | SPRING (RAR-B) | | M903 | A-1166-300-A | MOTOR ASSY (B), LE (LOADING) | |
| 206 | 3-259-469-12 | SPRING (LE), LEAF | | #4 | 7-627-552-87 | SCREW, PRECISION +P 1.7X2.2 | |
| 207 | 2-134-636-21 | SCREW (M1.7X2.5) | | | | | |

4-6. CD MECHANISM SECTION (4)
(MG-611WA-186//Q)

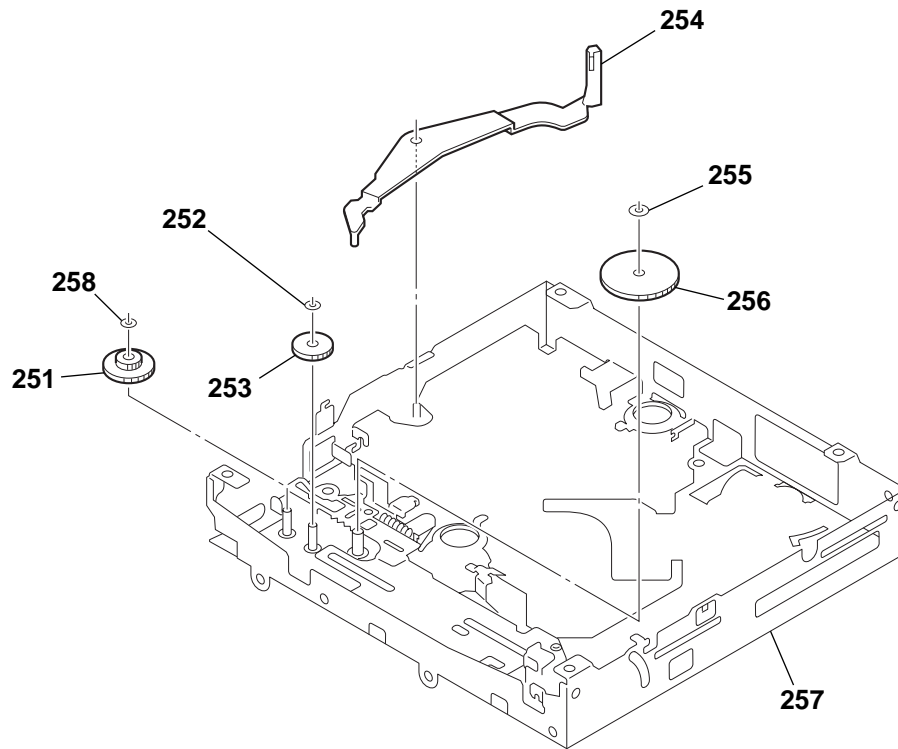

| Ref. No. | Part No. | Description | Remark | Ref. No. | Part No. | Description | Remark |
|----------|--------------|-------------|--------|----------|--------------|------------------------|--------|
| 251 | 2-186-700-01 | GEAR (CHK1) | | 255 | 2-630-962-01 | WASHER (SLIT) | |
| 252 | 3-344-223-01 | WASHER | | * 256 | 2-590-545-01 | GEAR (LE2-M) | |
| 253 | 3-259-470-12 | GEAR (LE1) | | 257 | A-1075-640-B | CHASSIS (M) BLOCK ASSY | |
| 254 | 3-253-755-41 | LEVER (D) | | 258 | 3-348-993-01 | WASHER | |

SECTION 5
ELECTRICAL PARTS LIST

KEY

NOTE:

- Due to standardization, replacements in the parts list may be different from the parts specified in the diagrams or the components used on the set.
- -XX and -X mean standardized parts, so they may have some difference from the original one.
- RESISTORS
All resistors are in ohms.
METAL: Metal-film resistor.
METAL OXIDE: Metal oxide-film resistor.
F: nonflammable

- Items marked “**” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- SEMICONDUCTORS
In each case, u : μ , for example:
uA.. : μ A.. uPA.. : μ PA..
uPB.. : μ PB.. uPC.. : μ PC.. uPD.. : μ PD..
- CAPACITORS
uF : μ F
- COILS
uH : μ H
- Abbreviation
CND: Canadian model
EE : East European model
MX : Mexican model
CH : Chinese model

The components identified by mark Δ or dotted line with mark Δ are critical for safety. Replace only with part number specified.

Les composants identifiés par une marque Δ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

When indicating parts by reference number, please include the board.

| Ref. No. | Part No. | Description | Remark |
|----------|--------------|--------------------------------------|-----------|
| | | KEY BOARD ***** | |
| | | < CAPACITOR > | |
| C901 | 1-127-715-11 | CERAMIC CHIP 0.22uF | 10% 16V |
| C903 | 1-163-021-11 | CERAMIC CHIP 0.01uF | 10% 50V |
| C904 | 1-163-021-11 | CERAMIC CHIP 0.01uF | 10% 50V |
| C970 | 1-107-826-11 | CERAMIC CHIP 0.1uF | 10% 16V |
| C971 | 1-107-826-11 | CERAMIC CHIP 0.1uF | 10% 16V |
| C972 | 1-107-826-11 | CERAMIC CHIP 0.1uF | 10% 16V |
| C973 | 1-125-837-11 | CERAMIC CHIP 1uF | 10% 6.3V |
| C974 | 1-107-826-11 | CERAMIC CHIP 0.1uF | 10% 16V |
| C975 | 1-162-913-11 | CERAMIC CHIP 8PF | 0.5PF 50V |
| C976 | 1-162-913-11 | CERAMIC CHIP 8PF | 0.5PF 50V |
| C977 | 1-125-837-11 | CERAMIC CHIP 1uF | 10% 6.3V |
| C978 | 1-100-623-11 | CERAMIC CHIP 0.1uF | 10% 100V |
| C980 | 1-127-715-11 | CERAMIC CHIP 0.22uF | 10% 16V |
| C981 | 1-107-826-11 | CERAMIC CHIP 0.1uF | 10% 16V |
| C984 | 1-107-826-11 | CERAMIC CHIP 0.1uF | 10% 16V |
| C985 | 1-107-826-11 | CERAMIC CHIP 0.1uF | 10% 16V |
| | | < CONNECTOR > | |
| CNP900 | 1-818-141-11 | PLUG, CONNECTOR 20P | |
| | | < DIODE > | |
| D900 | 6-501-167-01 | DIODE UDZW-TE17-5.1B | |
| D901 | 6-500-886-01 | DIODE RSA6.1ENTR | |
| D903 | 6-500-886-01 | DIODE RSA6.1ENTR | |
| D904 | 6-501-180-01 | DIODE UDZW-TE17-18B | |
| D905 | 6-501-170-01 | DIODE UDZW-TE17-6.8B | |
| D906 | 6-501-170-01 | DIODE UDZW-TE17-6.8B | |
| D909 | 6-500-886-01 | DIODE RSA6.1ENTR | |
| D910 | 6-501-193-01 | DIODE 1SS355WTE-17 | |
| | | < ROTARY ENCODER > | |
| ENC902 | 1-479-481-12 | ENCODER, ROTARY (PUSH SELECT/VOLUME) | |
| | | < VACUUM FLUORESCENT DISPLAY > | |
| FL900 | 1-519-842-11 | VACUUM FLUORESCENT DISPLAY | |
| | | < IC > | |
| IC900 | 6-600-163-01 | IC RS-770 (IR) | |
| IC901 | 6-806-178-01 | IC uPD703263GC-103-8EA-A | |

| Ref. No. | Part No. | Description | Remark |
|----------|--------------|----------------------------|--|
| IC902 | 6-707-877-01 | IC TC74VHC32FT(EKJ) | |
| IC971 | 8-759-659-13 | IC PST3428UL | |
| | | < LED > | |
| LED900 | 6-500-450-01 | LED CL-195SR-CD-T | (VOLUME ILLUMINATION) (GT500/GT550) |
| LED900 | 6-500-510-01 | LED CL-195PG-CD-T | (VOLUME ILLUMINATION) (GT50W/GT500EE) |
| LED901 | 6-500-450-01 | LED CL-195SR-CD-T | (VOLUME ILLUMINATION) (GT500/GT550) |
| LED901 | 6-500-510-01 | LED CL-195PG-CD-T | (VOLUME ILLUMINATION) (GT50W/GT500EE) |
| LED902 | 6-500-450-01 | LED CL-195SR-CD-T | (VOLUME ILLUMINATION) (GT500/GT550) |
| LED902 | 6-500-510-01 | LED CL-195PG-CD-T | (VOLUME ILLUMINATION) (GT50W/GT500EE) |
| LED903 | 6-500-450-01 | LED CL-195SR-CD-T | (VOLUME ILLUMINATION) (GT500/GT550) |
| LED903 | 6-500-510-01 | LED CL-195PG-CD-T | (VOLUME ILLUMINATION) (GT50W/GT500EE) |
| LED904 | 6-500-450-01 | LED CL-195SR-CD-T (SOURCE) | (GT500/GT550) |
| LED904 | 6-500-510-01 | LED CL-195PG-CD-T (SOURCE) | (GT50W/GT500EE) |
| LED905 | 6-500-450-01 | LED CL-195SR-CD-T (MODE) | (GT500/GT550) |
| LED905 | 6-500-510-01 | LED CL-195PG-CD-T (MODE) | (GT50W/GT500EE) |
| LED906 | 6-500-450-01 | LED CL-195SR-CD-T (SCRL) | (GT500:US,CND/GT550) |
| LED906 | 6-500-450-01 | LED CL-195SR-CD-T (AF/TA) | (GT500:AEP,UK) |
| LED906 | 6-500-510-01 | LED CL-195PG-CD-T (SCRL) | (GT50W/GT500EE) |
| LED907 | 6-500-450-01 | LED CL-195SR-CD-T (3) | (GT500/GT550) |
| LED907 | 6-500-510-01 | LED CL-195PG-CD-T (3) | (GT50W/GT500EE) |
| LED908 | 6-500-450-01 | LED CL-195SR-CD-T (2) | (GT500/GT550) |
| LED908 | 6-500-510-01 | LED CL-195PG-CD-T (2) | (GT50W/GT500EE) |
| LED909 | 6-500-450-01 | LED CL-195SR-CD-T (1) | (GT500/GT550) |
| LED909 | 6-500-510-01 | LED CL-195PG-CD-T (1) | (GT50W/GT500EE) |
| LED910 | 6-500-450-01 | LED CL-195SR-CD-T (6) | (GT500/GT550) |

| Ref. No. | Part No. | Description | Remark | Ref. No. | Part No. | Description | Remark |
|----------|--------------|--|--------|----------|--------------|-----------------|------------|
| LED910 | 6-500-510-01 | LED CL-195PG-CD-T (6) (GT50W/GT500EE) | | | | < RESISTOR > | |
| LED911 | 6-500-450-01 | LED CL-195SR-CD-T (5) (GT500/GT550) | | R900 | 1-216-815-11 | METAL CHIP 330 | 5% 1/10W |
| LED911 | 6-500-510-01 | LED CL-195PG-CD-T (5) (GT50W/GT500EE) | | R901 | 1-216-815-11 | METAL CHIP 330 | 5% 1/10W |
| LED912 | 6-500-450-01 | LED CL-195SR-CD-T (4) (GT500/GT550) | | R902 | 1-216-864-11 | SHORT CHIP 0 | |
| LED912 | 6-500-510-01 | LED CL-195PG-CD-T (4) (GT50W/GT500EE) | | R903 | 1-216-801-11 | METAL CHIP 22 | 5% 1/10W |
| LED913 | 6-500-450-01 | LED CL-195SR-CD-T (DSO) (GT500/GT550) | | R904 | 1-216-801-11 | METAL CHIP 22 | 5% 1/10W |
| LED913 | 6-500-510-01 | LED CL-195PG-CD-T (DSO) (GT50W/GT500EE) | | R905 | 1-216-797-11 | METAL CHIP 10 | 5% 1/10W |
| LED914 | 6-500-450-01 | LED CL-195SR-CD-T (IMAGE) (GT500/GT550) | | R906 | 1-216-797-11 | METAL CHIP 10 | 5% 1/10W |
| LED914 | 6-500-510-01 | LED CL-195PG-CD-T (IMAGE) (GT50W/GT500EE) | | R907 | 1-216-801-11 | METAL CHIP 22 | 5% 1/10W |
| LED915 | 6-500-450-01 | LED CL-195SR-CD-T (EQ3) (GT500/GT550) | | R908 | 1-216-801-11 | METAL CHIP 22 | 5% 1/10W |
| LED915 | 6-500-510-01 | LED CL-195PG-CD-T (EQ3) (GT50W/GT500EE) | | R909 | 1-216-801-11 | METAL CHIP 22 | 5% 1/10W |
| | | < SWITCH > | | R910 | 1-216-801-11 | METAL CHIP 22 | 5% 1/10W |
| LSW901 | 1-786-800-11 | SWITCH, TACTILE (WITH LED) (OFF) (GT500/GT550) | | R911 | 1-216-819-11 | METAL CHIP 680 | 5% 1/10W |
| LSW901 | 1-786-801-11 | SWITCH, TACTILE (WITH LED) (OFF) (GT50W/GT500EE) | | R912 | 1-216-819-11 | METAL CHIP 680 | 5% 1/10W |
| LSW902 | 1-786-800-11 | SWITCH, TACTILE (WITH LED) (DSPL) (GT500/GT550) | | R913 | 1-216-819-11 | METAL CHIP 680 | 5% 1/10W |
| LSW902 | 1-786-801-11 | SWITCH, TACTILE (WITH LED) (DSPL) (GT50W/GT500EE) | | R914 | 1-216-821-11 | METAL CHIP 1K | 5% 1/10W |
| LSW903 | 1-786-805-11 | SWITCH, TACTILE (WITH LED) (SENS) (GT500:US,CND/GT550) | | R915 | 1-216-823-11 | METAL CHIP 1.5K | 5% 1/10W |
| LSW903 | 1-786-805-11 | SWITCH, TACTILE (WITH LED) (SENS/BTM) (GT500:AEP,UK) | | R916 | 1-216-823-11 | METAL CHIP 1.5K | 5% 1/10W |
| LSW903 | 1-786-806-11 | SWITCH, TACTILE (WITH LED) (SENS) (GT50W/GT500EE) | | R917 | 1-216-825-11 | METAL CHIP 2.2K | 5% 1/10W |
| LSW904 | 1-786-805-11 | SWITCH, TACTILE (WITH LED) (SEEK + ►►►►) (GT500/GT550) | | R918 | 1-216-827-11 | METAL CHIP 3.3K | 5% 1/10W |
| LSW904 | 1-786-806-11 | SWITCH, TACTILE (WITH LED) (SEEK + ►►►►) (GT50W/GT500EE) | | R919 | 1-216-829-11 | METAL CHIP 4.7K | 5% 1/10W |
| LSW905 | 1-786-805-11 | SWITCH, TACTILE (WITH LED) (BTM/CAT) (GT500:US,CND) | | R920 | 1-218-867-11 | METAL CHIP 6.8K | 0.5% 1/10W |
| LSW905 | 1-786-805-11 | SWITCH, TACTILE (WITH LED) (PTY) (GT500:AEP,UK) | | R921 | 1-216-809-11 | METAL CHIP 100 | 5% 1/10W |
| LSW905 | 1-786-805-11 | SWITCH, TACTILE (WITH LED) (BTM) (GT550) | | R922 | 1-216-809-11 | METAL CHIP 100 | 5% 1/10W |
| LSW905 | 1-786-806-11 | SWITCH, TACTILE (WITH LED) (BTM/CAT) (GT50W) | | R923 | 1-216-819-11 | METAL CHIP 680 | 5% 1/10W |
| LSW905 | 1-786-806-11 | SWITCH, TACTILE (WITH LED) (BTM) (GT500EE) | | R924 | 1-216-819-11 | METAL CHIP 680 | 5% 1/10W |
| LSW907 | 1-786-805-11 | SWITCH, TACTILE (WITH LED) (GP/ALBM +) (GT500/GT550) | | R925 | 1-216-819-11 | METAL CHIP 680 | 5% 1/10W |
| LSW907 | 1-786-806-11 | SWITCH, TACTILE (WITH LED) (GP/ALBM +) (GT50W/GT500EE) | | R926 | 1-216-821-11 | METAL CHIP 1K | 5% 1/10W |
| LSW908 | 1-786-805-11 | SWITCH, TACTILE (WITH LED) (SEEK - ◄◄◄◄) (GT500/GT550) | | R927 | 1-216-823-11 | METAL CHIP 1.5K | 5% 1/10W |
| LSW908 | 1-786-806-11 | SWITCH, TACTILE (WITH LED) (SEEK - ◄◄◄◄) (GT50W/GT500EE) | | R928 | 1-216-823-11 | METAL CHIP 1.5K | 5% 1/10W |
| LSW909 | 1-786-805-11 | SWITCH, TACTILE (WITH LED) (GP/ALBM -) (GT500/GT550) | | R929 | 1-216-825-11 | METAL CHIP 2.2K | 5% 1/10W |
| LSW909 | 1-786-806-11 | SWITCH, TACTILE (WITH LED) (GP/ALBM -) (GT50W/GT500EE) | | R930 | 1-216-827-11 | METAL CHIP 3.3K | 5% 1/10W |
| | | | | R931 | 1-216-829-11 | METAL CHIP 4.7K | 5% 1/10W |
| | | | | R932 | 1-218-867-11 | METAL CHIP 6.8K | 0.5% 1/10W |
| | | | | R933 | 1-216-812-11 | METAL CHIP 180 | 5% 1/10W |
| | | | | R933 | 1-216-813-11 | METAL CHIP 220 | 5% 1/10W |
| | | | | | | (GT50W/GT500EE) | |
| | | | | | | (GT500/GT550) | |
| | | | | R934 | 1-216-812-11 | METAL CHIP 180 | 5% 1/10W |
| | | | | R935 | 1-216-812-11 | METAL CHIP 180 | 5% 1/10W |
| | | | | | | (GT50W/GT500EE) | |
| | | | | R935 | 1-216-813-11 | METAL CHIP 220 | 5% 1/10W |
| | | | | | | (GT500/GT550) | |
| | | | | R936 | 1-216-810-11 | METAL CHIP 120 | 5% 1/10W |
| | | | | R936 | 1-216-811-11 | METAL CHIP 150 | 5% 1/10W |
| | | | | | | (GT500/GT550) | |
| | | | | R937 | 1-216-809-11 | METAL CHIP 100 | 5% 1/10W |
| | | | | R937 | 1-216-811-11 | METAL CHIP 150 | 5% 1/10W |
| | | | | | | (GT500/GT550) | |
| | | | | R938 | 1-216-813-11 | METAL CHIP 220 | 5% 1/10W |
| | | | | | | (GT50W/GT500EE) | |
| | | | | R938 | 1-216-814-11 | METAL CHIP 270 | 5% 1/10W |
| | | | | | | (GT500/GT550) | |
| | | | | R939 | 1-216-810-11 | METAL CHIP 120 | 5% 1/10W |
| | | | | | | (GT50W/GT500EE) | |
| | | | | R939 | 1-216-811-11 | METAL CHIP 150 | 5% 1/10W |
| | | | | | | (GT500/GT550) | |

CDX-GT50W/GT500/GT500EE/GT550

KEY

| Ref. No. | Part No. | Description | Remark | Ref. No. | Part No. | Description | Remark |
|----------|--------------|------------------------|---------------------------------|--------------|--------------|--|----------|
| R940 | 1-216-809-11 | METAL CHIP | 100 5% 1/10W (GT50W/GT500EE) | R967 | 1-414-760-21 | INDUCTOR, FERRITE BEAD | |
| R940 | 1-216-811-11 | METAL CHIP | 150 5% 1/10W (GT500/GT550) | R968 | 1-414-760-21 | INDUCTOR, FERRITE BEAD | |
| R942 | 1-216-813-11 | METAL CHIP | 220 5% 1/10W (GT50W/GT500EE) | R969 | 1-216-833-11 | METAL CHIP 10K | 5% 1/10W |
| R942 | 1-216-814-11 | METAL CHIP | 270 5% 1/10W (GT500/GT550) | R970 | 1-216-801-11 | METAL CHIP 22 | 5% 1/10W |
| R943 | 1-216-810-11 | METAL CHIP | 120 5% 1/10W (GT50W/GT500EE) | R971 | 1-216-864-11 | SHORT CHIP 0 | |
| R943 | 1-216-811-11 | METAL CHIP | 150 5% 1/10W (GT500/GT550) | R972 | 1-414-760-21 | INDUCTOR, FERRITE BEAD | |
| R944 | 1-216-809-11 | METAL CHIP | 100 5% 1/10W (GT50W/GT500EE) | R973 | 1-216-801-11 | METAL CHIP 22 | 5% 1/10W |
| R944 | 1-216-811-11 | METAL CHIP | 150 5% 1/10W (GT500/GT550) | R974 | 1-414-760-21 | INDUCTOR, FERRITE BEAD | |
| R945 | 1-216-810-11 | METAL CHIP | 120 5% 1/10W (GT50W/GT500EE) | R975 | 1-414-760-21 | INDUCTOR, FERRITE BEAD | |
| R945 | 1-216-811-11 | METAL CHIP | 150 5% 1/10W (GT500/GT550) | R976 | 1-414-760-21 | INDUCTOR, FERRITE BEAD | |
| R946 | 1-216-809-11 | METAL CHIP | 100 5% 1/10W (GT50W/GT500EE) | R977 | 1-414-760-21 | INDUCTOR, FERRITE BEAD | |
| R946 | 1-216-811-11 | METAL CHIP | 150 5% 1/10W (GT500/GT550) | R979 | 1-414-760-21 | INDUCTOR, FERRITE BEAD | |
| R947 | 1-216-810-11 | METAL CHIP | 120 5% 1/10W (GT50W/GT500EE) | R980 | 1-216-797-11 | METAL CHIP 10 | 5% 1/10W |
| R947 | 1-216-811-11 | METAL CHIP | 150 5% 1/10W (GT500/GT550) | R981 | 1-414-760-21 | INDUCTOR, FERRITE BEAD | |
| R948 | 1-216-809-11 | METAL CHIP | 100 5% 1/10W (GT50W/GT500EE) | R982 | 1-414-235-22 | INDUCTOR, FERRITE BEAD | |
| R948 | 1-216-811-11 | METAL CHIP | 150 5% 1/10W (GT500/GT550) | R983 | 1-216-801-11 | METAL CHIP 22 | 5% 1/10W |
| R949 | 1-216-810-11 | METAL CHIP | 120 5% 1/10W (GT50W/GT500EE) | R984 | 1-216-815-11 | METAL CHIP 330 | 5% 1/10W |
| R949 | 1-216-811-11 | METAL CHIP | 150 5% 1/10W (GT500/GT550) | R985 | 1-216-801-11 | METAL CHIP 22 | 5% 1/10W |
| R950 | 1-216-809-11 | METAL CHIP | 100 5% 1/10W (GT50W/GT500EE) | R988 | 1-414-235-22 | INDUCTOR, FERRITE BEAD | |
| R950 | 1-216-811-11 | METAL CHIP | 150 5% 1/10W (GT500/GT550) | R989 | 1-216-841-11 | METAL CHIP 47K | 5% 1/10W |
| R951 | 1-216-864-11 | SHORT CHIP | 0 | R990 | 1-216-845-11 | METAL CHIP 100K | 5% 1/10W |
| R952 | 1-216-864-11 | SHORT CHIP | 0 | R991 | 1-216-841-11 | METAL CHIP 47K | 5% 1/10W |
| R953 | 1-216-864-11 | SHORT CHIP | 0 | R992 | 1-216-009-11 | RES-CHIP 22 | 5% 1/10W |
| R954 | 1-216-813-11 | METAL CHIP | 220 5% 1/10W (GT50W/GT500EE) | R993 | 1-216-845-11 | METAL CHIP 100K | 5% 1/10W |
| R954 | 1-216-814-11 | METAL CHIP | 270 5% 1/10W (GT500/GT550) | R994 | 1-216-815-11 | METAL CHIP 330 | 5% 1/10W |
| R955 | 1-216-813-11 | METAL CHIP | 220 5% 1/10W (GT50W/GT500EE) | R995 | 1-414-760-21 | INDUCTOR, FERRITE BEAD | |
| R955 | 1-216-814-11 | METAL CHIP | 270 5% 1/10W (GT500/GT550) | R996 | 1-216-797-11 | METAL CHIP 10 | 5% 1/10W |
| R956 | 1-414-234-22 | INDUCTOR, FERRITE BEAD | | R997 | 1-216-821-11 | METAL CHIP 1K | 5% 1/10W |
| R957 | 1-216-864-11 | SHORT CHIP | 0 | R998 | 1-216-009-11 | RES-CHIP 22 | 5% 1/10W |
| R958 | 1-216-295-11 | SHORT CHIP | 0 | R999 | 1-216-841-11 | METAL CHIP 47K | 5% 1/10W |
| R959 | 1-216-864-11 | SHORT CHIP | 0 | < SWITCH > | | | |
| R960 | 1-216-864-11 | SHORT CHIP | 0 | S908 | 1-786-653-21 | SWITCH, TACTILE (DSO) | |
| R961 | 1-216-864-11 | SHORT CHIP | 0 | S911 | 1-786-653-21 | SWITCH, TACTILE (SOURCE) | |
| R962 | 1-216-797-11 | METAL CHIP | 10 5% 1/10W | S912 | 1-786-653-21 | SWITCH, TACTILE (EQ3) | |
| R963 | 1-216-801-11 | METAL CHIP | 22 5% 1/10W | S913 | 1-786-653-21 | SWITCH, TACTILE (6/PAUSE) | |
| R964 | 1-414-760-21 | INDUCTOR, FERRITE BEAD | | S914 | 1-786-653-21 | SWITCH, TACTILE (5/BBE MP) | |
| R965 | 1-414-760-21 | INDUCTOR, FERRITE BEAD | | S915 | 1-786-653-21 | SWITCH, TACTILE (4/SHUF) | |
| R966 | 1-414-760-21 | INDUCTOR, FERRITE BEAD | | S916 | 1-786-653-21 | SWITCH, TACTILE (3/REP) | |
| | | | | S917 | 1-786-653-21 | SWITCH, TACTILE (2) | |
| | | | | S918 | 1-786-653-21 | SWITCH, TACTILE (1) | |
| | | | | S919 | 1-786-653-21 | SWITCH, TACTILE (SCRL) (GT50W/GT500:US,CND/GT500EE/GT550) | |
| | | | | S919 | 1-786-653-21 | SWITCH, TACTILE (AF/TA) (GT500:AEP,UK) | |
| | | | | S920 | 1-786-653-21 | SWITCH, TACTILE (MODE) | |
| | | | | S921 | 1-786-653-21 | SWITCH, TACTILE (IMAGE) | |
| | | | | < VIBRATOR > | | | |
| | | | | X901 | 1-813-487-21 | VIBRATOR, CRYSTAL (5MHz) | |
| | | | | ***** | | | |

| Ref. No. | Part No. | Description | Remark | Ref. No. | Part No. | Description | Remark |
|----------|--------------|--------------------------------|--------------------------------------|----------|--------------|--------------|-------------------------------------|
| | A-1156-591-A | MAIN BOARD, COMPLETE (US,CND) | | C206 | 1-126-960-11 | ELECT | 1uF 20% 50V (EXCEPT AEP,UK,EE) |
| | A-1158-884-A | MAIN BOARD, COMPLETE (AEP,UK) | | C209 | 1-165-908-11 | CERAMIC CHIP | 1uF 10% 10V |
| | A-1158-896-A | MAIN BOARD, COMPLETE (GT550) | | C210 | 1-165-908-11 | CERAMIC CHIP | 1uF 10% 10V |
| | A-1158-918-A | MAIN BOARD, COMPLETE (GT500EE) | ***** | C211 | 1-124-721-85 | ELECT | 10uF 20% 50V (AEP,UK,EE) |
| | 7-621-284-40 | SCREW +P 2.6X10 | | C211 | 1-126-964-11 | ELECT | 10uF 20% 50V (EXCEPT AEP,UK,EE) |
| | 7-685-134-19 | SCREW +P 2.6X8 TYPE2 NON-SLIT | | | | | |
| | 7-685-793-09 | SCREW +PTT 2.6X8 (S) | | | | | |
| | 7-685-795-09 | SCREW +PTT 2.6X12 (S) | | | | | |
| | | < CAPACITOR > | | | | | |
| C100 | 1-112-302-11 | ELECT | 3300uF 20% 16V (AEP,UK,EE) | C217 | 1-163-251-11 | CERAMIC CHIP | 100PF 5% 50V |
| C100 | 1-131-868-81 | ELECT | 3300uF 20% 16V (EXCEPT AEP,UK,EE) | C219 | 1-162-970-11 | CERAMIC CHIP | 0.01uF 10% 25V |
| C101 | 1-162-964-11 | CERAMIC CHIP | 0.001uF 10% 50V | C220 | 1-163-251-11 | CERAMIC CHIP | 100PF 5% 50V |
| C102 | 1-115-340-11 | CERAMIC CHIP | 0.22uF 10% 25V | C221 | 1-124-673-85 | ELECT | 100uF 20% 10V (AEP,UK,EE) |
| C103 | 1-162-964-11 | CERAMIC CHIP | 0.001uF 10% 50V | C221 | 1-126-933-11 | ELECT | 100uF 20% 16V (EXCEPT AEP,UK,EE) |
| C112 | 1-163-009-11 | CERAMIC CHIP | 0.001uF 10% 50V | C223 | 1-163-251-11 | CERAMIC CHIP | 100PF 5% 50V |
| C150 | 1-126-964-11 | ELECT | 10uF 20% 50V | C224 | 1-124-721-85 | ELECT | 10uF 20% 50V (AEP,UK,EE) |
| C151 | 1-162-970-11 | CERAMIC CHIP | 0.01uF 10% 25V | C224 | 1-126-964-11 | ELECT | 10uF 20% 50V (EXCEPT AEP,UK,EE) |
| C152 | 1-126-964-11 | ELECT | 10uF 20% 50V | C225 | 1-124-721-85 | ELECT | 10uF 20% 50V (AEP,UK,EE) |
| C153 | 1-162-970-11 | CERAMIC CHIP | 0.01uF 10% 25V | C225 | 1-126-964-11 | ELECT | 10uF 20% 50V (EXCEPT AEP,UK,EE) |
| C154 | 1-115-340-11 | CERAMIC CHIP | 0.22uF 10% 25V | C226 | 1-124-721-85 | ELECT | 10uF 20% 50V (AEP,UK,EE) |
| C155 | 1-126-964-11 | ELECT | 10uF 20% 50V | C226 | 1-126-964-11 | ELECT | 10uF 20% 50V (EXCEPT AEP,UK,EE) |
| C156 | 1-126-964-11 | ELECT | 10uF 20% 50V | C227 | 1-124-721-85 | ELECT | 10uF 20% 50V (AEP,UK,EE) |
| C157 | 1-162-970-11 | CERAMIC CHIP | 0.01uF 10% 25V | C227 | 1-126-964-11 | ELECT | 10uF 20% 50V (EXCEPT AEP,UK,EE) |
| C158 | 1-162-927-11 | CERAMIC CHIP | 100PF 5% 50V | C227 | 1-126-964-11 | ELECT | 10uF 20% 50V (EXCEPT AEP,UK,EE) |
| C159 | 1-162-927-11 | CERAMIC CHIP | 100PF 5% 50V | C228 | 1-124-721-85 | ELECT | 10uF 20% 50V (AEP,UK,EE) |
| C160 | 1-115-340-11 | CERAMIC CHIP | 0.22uF 10% 25V | C228 | 1-126-964-11 | ELECT | 10uF 20% 50V (EXCEPT AEP,UK,EE) |
| C161 | 1-115-340-11 | CERAMIC CHIP | 0.22uF 10% 25V | C229 | 1-163-251-11 | CERAMIC CHIP | 100PF 5% 50V |
| C162 | 1-115-340-11 | CERAMIC CHIP | 0.22uF 10% 25V | C230 | 1-163-251-11 | CERAMIC CHIP | 100PF 5% 50V |
| C163 | 1-162-970-11 | CERAMIC CHIP | 0.01uF 10% 25V | C231 | 1-163-251-11 | CERAMIC CHIP | 100PF 5% 50V |
| C164 | 1-126-964-11 | ELECT | 10uF 20% 50V | C232 | 1-163-009-11 | CERAMIC CHIP | 0.001uF 10% 50V |
| C165 | 1-126-961-11 | ELECT | 2.2uF 20% 50V | C233 | 1-165-908-11 | CERAMIC CHIP | 1uF 10% 10V |
| C166 | 1-162-927-11 | CERAMIC CHIP | 100PF 5% 50V | C234 | 1-165-908-11 | CERAMIC CHIP | 1uF 10% 10V |
| C167 | 1-162-927-11 | CERAMIC CHIP | 100PF 5% 50V | C235 | 1-165-908-11 | CERAMIC CHIP | 1uF 10% 10V |
| C168 | 1-162-970-11 | CERAMIC CHIP | 0.01uF 10% 25V | C236 | 1-165-908-11 | CERAMIC CHIP | 1uF 10% 10V |
| C169 | 1-126-964-11 | ELECT | 10uF 20% 50V | C237 | 1-165-908-11 | CERAMIC CHIP | 1uF 10% 10V |
| C170 | 1-162-970-11 | CERAMIC CHIP | 0.01uF 10% 25V | C238 | 1-165-908-11 | CERAMIC CHIP | 1uF 10% 10V |
| C171 | 1-162-923-11 | CERAMIC CHIP | 47PF 5% 50V | C239 | 1-165-908-11 | CERAMIC CHIP | 1uF 10% 10V |
| C172 | 1-128-551-11 | ELECT | 22uF 20% 63V (EXCEPT AEP,UK,EE) | C240 | 1-165-908-11 | CERAMIC CHIP | 1uF 10% 10V |
| C172 | 1-124-695-85 | ELECT | 22uF 20% 25V (AEP,UK,EE) | C245 | 1-136-154-00 | FILM | 0.012uF 5% 50V |
| C173 | 1-127-715-11 | CERAMIC CHIP | 0.22uF 10% 16V | C246 | 1-162-965-11 | CERAMIC CHIP | 0.0015uF 10% 50V |
| C174 | 1-115-340-11 | CERAMIC CHIP | 0.22uF 10% 25V | C250 | 1-126-947-11 | ELECT | 47uF 20% 35V |
| C175 | 1-115-340-11 | CERAMIC CHIP | 0.22uF 10% 25V | C255 | 1-136-154-00 | FILM | 0.012uF 5% 50V |
| C200 | 1-163-009-11 | CERAMIC CHIP | 0.001uF 10% 50V | C256 | 1-162-965-11 | CERAMIC CHIP | 0.0015uF 10% 50V |
| C201 | 1-107-826-11 | CERAMIC CHIP | 0.1uF 10% 16V | C257 | 1-162-927-11 | CERAMIC CHIP | 100PF 5% 50V |
| C202 | 1-126-960-11 | ELECT | 1uF 20% 50V | C300 | 1-162-964-11 | CERAMIC CHIP | 0.001uF 10% 50V |
| C203 | 1-126-960-11 | ELECT | 1uF 20% 50V | C301 | 1-162-964-11 | CERAMIC CHIP | 0.001uF 10% 50V |
| C204 | 1-126-960-11 | ELECT | 1uF 20% 50V | C302 | 1-126-963-11 | ELECT | 4.7uF 20% 50V (AEP,UK) |
| C205 | 1-124-717-85 | ELECT | 1uF 20% 50V (AEP,UK,EE) | C304 | 1-107-826-11 | CERAMIC CHIP | 0.1uF 10% 16V (EXCEPT AEP,UK) |
| C205 | 1-126-960-11 | ELECT | 1uF 20% 50V (EXCEPT AEP,UK,EE) | C305 | 1-126-947-11 | ELECT | 47uF 20% 35V |
| C206 | 1-124-717-85 | ELECT | 1uF 20% 50V (AEP,UK,EE) | | | | |

CDX-GT50W/GT500/GT500EE/GT550

MAIN

| Ref. No. | Part No. | Description | | | Remark | Ref. No. | Part No. | Description | | | Remark |
|----------|--------------|--------------|------------|-----|---------------------------|----------|--------------|----------------------------------|---------|-----|--------|
| C306 | 1-162-970-11 | CERAMIC CHIP | 0.01uF | 10% | 25V | C628 | 1-107-826-11 | CERAMIC CHIP | 0.1uF | 10% | 16V |
| C307 | 1-126-947-11 | ELECT | 47uF | 20% | 35V | C629 | 1-126-933-11 | ELECT | 100uF | 20% | 16V |
| C308 | 1-162-970-11 | CERAMIC CHIP | 0.01uF | 10% | 25V | C642 | 1-107-826-11 | CERAMIC CHIP | 0.1uF | 10% | 16V |
| C309 | 1-162-970-11 | CERAMIC CHIP | 0.01uF | 10% | 25V | C644 | 1-162-964-11 | CERAMIC CHIP | 0.001uF | 10% | 50V |
| C310 | 1-107-826-11 | CERAMIC CHIP | 0.1uF | 10% | 16V | C700 | 1-126-933-11 | ELECT | 100uF | 20% | 16V |
| C350 | 1-162-923-11 | CERAMIC CHIP | 47PF | 5% | 50V (AEP,UK) | C701 | 1-162-970-11 | CERAMIC CHIP | 0.01uF | 10% | 25V |
| C352 | 1-216-864-11 | SHORT CHIP | 0 (AEP,UK) | | | C702 | 1-162-970-11 | CERAMIC CHIP | 0.01uF | 10% | 25V |
| C353 | 1-162-970-11 | CERAMIC CHIP | 0.01uF | 10% | 25V (AEP,UK) | C703 | 1-126-924-11 | ELECT | 330uF | 20% | 10V |
| C354 | 1-126-947-11 | ELECT | 47uF | 20% | 35V (AEP,UK) | C704 | 1-126-926-11 | ELECT | 1000uF | 20% | 10V |
| C355 | 1-107-826-11 | CERAMIC CHIP | 0.1uF | 10% | 16V (AEP,UK) | C705 | 1-163-009-11 | CERAMIC CHIP | 0.001uF | 10% | 50V |
| C356 | 1-107-826-11 | CERAMIC CHIP | 0.1uF | 10% | 16V (AEP,UK) | C710 | 1-162-927-11 | CERAMIC CHIP | 100PF | 5% | 50V |
| C357 | 1-107-826-11 | CERAMIC CHIP | 0.1uF | 10% | 16V (AEP,UK) | C713 | 1-107-826-11 | CERAMIC CHIP | 0.1uF | 10% | 16V |
| C358 | 1-107-826-11 | CERAMIC CHIP | 0.1uF | 10% | 16V (AEP,UK) | C714 | 1-126-964-11 | ELECT | 10uF | 20% | 50V |
| C359 | 1-107-826-11 | CERAMIC CHIP | 0.1uF | 10% | 16V (AEP,UK) | C715 | 1-162-970-11 | CERAMIC CHIP | 0.01uF | 10% | 25V |
| C360 | 1-107-826-11 | CERAMIC CHIP | 0.1uF | 10% | 16V (AEP,UK) | C716 | 1-162-917-11 | CERAMIC CHIP | 15PF | 5% | 50V |
| C361 | 1-162-959-11 | CERAMIC CHIP | 330PF | 5% | 50V (AEP,UK) | C717 | 1-162-917-11 | CERAMIC CHIP | 15PF | 5% | 50V |
| C362 | 1-164-237-11 | CERAMIC CHIP | 16PF | 5% | 50V (AEP,UK) | C718 | 1-162-970-11 | CERAMIC CHIP | 0.01uF | 10% | 25V |
| C363 | 1-164-237-11 | CERAMIC CHIP | 16PF | 5% | 50V (AEP,UK) | C719 | 1-162-970-11 | CERAMIC CHIP | 0.01uF | 10% | 25V |
| C401 | 1-128-551-11 | ELECT | 22uF | 20% | 63V | C720 | 1-162-970-11 | CERAMIC CHIP | 0.01uF | 10% | 25V |
| C402 | 1-162-970-11 | CERAMIC CHIP | 0.01uF | 10% | 25V | C721 | 1-162-970-11 | CERAMIC CHIP | 0.01uF | 10% | 25V |
| C403 | 1-162-970-11 | CERAMIC CHIP | 0.01uF | 10% | 25V | C724 | 1-162-970-11 | CERAMIC CHIP | 0.01uF | 10% | 25V |
| C404 | 1-126-964-11 | ELECT | 10uF | 20% | 50V | C725 | 1-162-964-11 | CERAMIC CHIP | 0.001uF | 10% | 50V |
| C405 | 1-128-551-11 | ELECT | 22uF | 20% | 63V | C726 | 1-162-964-11 | CERAMIC CHIP | 0.001uF | 10% | 50V |
| C406 | 1-162-970-11 | CERAMIC CHIP | 0.01uF | 10% | 25V | C727 | 1-162-964-11 | CERAMIC CHIP | 0.001uF | 10% | 50V |
| C407 | 1-162-970-11 | CERAMIC CHIP | 0.01uF | 10% | 25V | C728 | 1-162-964-11 | CERAMIC CHIP | 0.001uF | 10% | 50V |
| C408 | 1-124-673-85 | ELECT | 100uF | 20% | 10V (AEP,UK,EE) | C729 | 1-162-964-11 | CERAMIC CHIP | 0.001uF | 10% | 50V |
| C408 | 1-126-933-11 | ELECT | 100uF | 20% | 16V (EXCEPT AEP,UK,EE) | C730 | 1-162-964-11 | CERAMIC CHIP | 0.001uF | 10% | 50V |
| C450 | 1-162-970-11 | CERAMIC CHIP | 0.01uF | 10% | 25V | C731 | 1-162-964-11 | CERAMIC CHIP | 0.001uF | 10% | 50V |
| C451 | 1-126-935-11 | ELECT | 470uF | 20% | 16V | C733 | 1-162-970-11 | CERAMIC CHIP | 0.01uF | 10% | 25V |
| C453 | 1-162-970-11 | CERAMIC CHIP | 0.01uF | 10% | 25V | C903 | 1-162-970-11 | CERAMIC CHIP | 0.01uF | 10% | 25V |
| C500 | 1-126-961-11 | ELECT | 2.2uF | 20% | 50V | C904 | 1-162-970-11 | CERAMIC CHIP | 0.01uF | 10% | 25V |
| C510 | 1-126-963-11 | ELECT | 4.7uF | 20% | 50V | | | < CONNECTOR > | | | |
| C600 | 1-162-970-11 | CERAMIC CHIP | 0.01uF | 10% | 25V | CN100 | 1-774-701-21 | PIN, CONNECTOR 16P | | | |
| C601 | 1-162-970-11 | CERAMIC CHIP | 0.01uF | 10% | 25V | * CN200 | 1-564-506-11 | PLUG, CONNECTOR 3P | | | |
| C604 | 1-126-933-11 | ELECT | 100uF | 20% | 16V | CN400 | 1-817-536-11 | CONNECTOR, BOARD TO BOARD 28P | | | |
| C605 | 1-162-970-11 | CERAMIC CHIP | 0.01uF | 10% | 25V | CN610 | 1-569-915-11 | SOCKET, CONNECTOR 22P | | | |
| C610 | 1-135-834-11 | CERAMIC CHIP | 2.2uF | | 6.3V | CNJ450 | 1-580-907-41 | PLUG, CONNECTOR (BUS CONTROL IN) | | | |
| C611 | 1-135-834-11 | CERAMIC CHIP | 2.2uF | | 6.3V | | | < DIODE > | | | |
| C612 | 1-162-964-11 | CERAMIC CHIP | 0.001uF | 10% | 50V | D100 | 6-501-170-01 | DIODE UDZW-TE17-6.8B | | | |
| C620 | 1-126-933-11 | ELECT | 100uF | 20% | 16V | D101 | 8-719-049-38 | DIODE 1N5404TU | | | |
| C621 | 1-128-552-11 | ELECT | 47uF | 20% | 63V | D102 | 6-501-180-01 | DIODE UDZW-TE17-18B | | | |
| C622 | 1-126-934-11 | ELECT | 220uF | 20% | 16V | D103 | 6-501-180-01 | DIODE UDZW-TE17-18B | | | |
| C624 | 1-107-826-11 | CERAMIC CHIP | 0.1uF | 10% | 16V | D104 | 6-501-180-01 | DIODE UDZW-TE17-18B | | | |
| C625 | 1-162-966-11 | CERAMIC CHIP | 0.0022uF | 10% | 50V | D105 | 6-501-180-01 | DIODE UDZW-TE17-18B | | | |
| C626 | 1-126-964-11 | ELECT | 10uF | 20% | 50V | D106 | 6-501-180-01 | DIODE UDZW-TE17-18B | | | |
| C627 | 1-164-315-11 | CERAMIC CHIP | 470PF | 5% | 50V | D107 | 6-501-362-01 | DIODE 1A4-TA26 | | | |
| | | | | | | D108 | 6-501-362-01 | DIODE 1A4-TA26 | | | |
| | | | | | | D109 | 6-501-362-01 | DIODE 1A4-TA26 | | | |
| | | | | | | D110 | 6-501-362-01 | DIODE 1A4-TA26 | | | |
| | | | | | | D111 | 6-501-362-01 | DIODE 1A4-TA26 | | | |
| | | | | | | D112 | 6-501-362-01 | DIODE 1A4-TA26 | | | |
| | | | | | | D113 | 6-501-362-01 | DIODE 1A4-TA26 | | | |
| | | | | | | D114 | 6-501-362-01 | DIODE 1A4-TA26 | | | |
| | | | | | | D115 | 6-501-362-01 | DIODE 1A4-TA26 | | | |
| | | | | | | D116 | 6-501-362-01 | DIODE 1A4-TA26 | | | |
| | | | | | | D117 | 6-501-362-01 | DIODE 1A4-TA26 | | | |

| Ref. No. | Part No. | Description | Remark | Ref. No. | Part No. | Description | Remark |
|----------|--------------|--|--------|----------|--------------|--------------------------------------|--------|
| D118 | 6-501-362-01 | DIODE 1A4-TA26 | | L351 | 1-414-760-21 | INDUCTOR, FERRITE BEAD (AEP,UK) | |
| D200 | 6-501-170-01 | DIODE UDZW-TE17-6.8B | | L355 | 1-469-844-11 | INDUCTOR 2.2uH (AEP,UK) | |
| D250 | 6-501-051-01 | DIODE BAT54CLT1G | | L400 | 1-500-245-11 | INDUCTOR, FERRITE BEAD | |
| D252 | 6-501-193-01 | DIODE 1SS355WTE-17 | | L401 | 1-469-876-11 | INDUCTOR, FERRITE BEAD | |
| D300 | 6-501-168-01 | DIODE UDZW-TE17-5.6B | | L402 | 1-216-295-11 | SHORT CHIP 0 | |
| D450 | 6-501-180-01 | DIODE UDZW-TE17-18B | | L403 | 1-216-864-11 | SHORT CHIP 0 | |
| D452 | 6-501-180-01 | DIODE UDZW-TE17-18B | | L404 | 1-500-245-11 | INDUCTOR, FERRITE BEAD | |
| D453 | 6-501-180-01 | DIODE UDZW-TE17-18B | | L405 | 1-469-876-11 | INDUCTOR, FERRITE BEAD | |
| D454 | 6-501-169-01 | DIODE UDZW-TE17-6.2B | | L406 | 1-216-864-11 | SHORT CHIP 0 | |
| D455 | 8-719-072-70 | DIODE MA2ZD14001S0 | | L407 | 1-216-864-11 | SHORT CHIP 0 | |
| D456 | 6-501-180-01 | DIODE UDZW-TE17-18B | | L408 | 1-469-876-11 | INDUCTOR, FERRITE BEAD | |
| D457 | 6-501-051-01 | DIODE BAT54CLT1G | | L409 | 1-500-245-11 | INDUCTOR, FERRITE BEAD | |
| D510 | 6-501-193-01 | DIODE 1SS355WTE-17 | | L410 | 1-469-876-11 | INDUCTOR, FERRITE BEAD | |
| D610 | 6-500-886-01 | DIODE RSA6.1ENTR | | L411 | 1-216-295-11 | SHORT CHIP 0 | |
| D611 | 6-500-886-01 | DIODE RSA6.1ENTR | | L620 | 1-457-073-11 | INDUCTOR 47uH | |
| D612 | 6-500-886-01 | DIODE RSA6.1ENTR | | L901 | 1-469-844-11 | INDUCTOR 2.2uH | |
| D613 | 6-501-180-01 | DIODE UDZW-TE17-18B | | L902 | 1-469-844-11 | INDUCTOR 2.2uH | |
| D614 | 6-501-180-01 | DIODE UDZW-TE17-18B | | | | < TRANSISTOR > | |
| D616 | 6-501-170-01 | DIODE UDZW-TE17-6.8B | | | | | |
| D620 | 8-719-053-18 | DIODE 1SR154-400TE-25 | | Q200 | 6-550-683-01 | FET RJK005N03-T146 | |
| D621 | 8-719-053-18 | DIODE 1SR154-400TE-25 | | Q201 | 6-550-752-01 | TRANSISTOR DTC614TKT146 | |
| D622 | 6-501-089-01 | DIODE RF101L2STE25 | | Q202 | 6-550-752-01 | TRANSISTOR DTC614TKT146 | |
| D624 | 8-719-067-83 | DIODE RB161L-40TE25 | | Q203 | 6-550-752-01 | TRANSISTOR DTC614TKT146 | |
| D625 | 6-501-180-01 | DIODE UDZW-TE17-18B | | Q204 | 6-550-752-01 | TRANSISTOR DTC614TKT146 | |
| D626 | 6-501-167-01 | DIODE UDZW-TE17-5.1B | | | | | |
| D627 | 6-501-173-01 | DIODE UDZW-TE17-9.1B | | Q205 | 6-550-752-01 | TRANSISTOR DTC614TKT146 | |
| D710 | 6-501-013-01 | DIODE BAT54ALT1G | | Q250 | 1-801-806-11 | TRANSISTOR DTC144EKA | |
| D711 | 6-501-013-01 | DIODE BAT54ALT1G | | Q251 | 8-729-027-23 | TRANSISTOR DTA114EKA-T146 | |
| D712 | 6-501-013-01 | DIODE BAT54ALT1G | | Q300 | 1-801-806-11 | TRANSISTOR DTC144EKA (AEP,UK) | |
| D713 | 8-719-060-48 | DIODE RB751V-40TE-17 | | Q301 | 6-551-431-01 | TRANSISTOR 2SC6027T100-QR | |
| | | < RESISTOR > | | Q350 | 8-729-026-49 | TRANSISTOR 2SA1037AK-T146-R (AEP,UK) | |
| FB301 | 1-216-295-11 | SHORT CHIP 0 | | Q453 | 8-729-027-23 | TRANSISTOR DTA114EKA-T146 | |
| | | < IC > | | Q454 | 8-729-047-76 | TRANSISTOR FMC2A-T148 | |
| IC150 | 6-705-359-02 | IC TDA8588AJ/N2/R1 | | Q455 | 8-729-027-43 | TRANSISTOR DTC114EKA-T146 | |
| IC350 | 6-803-747-01 | IC TDA7333013TR (AEP,UK) | | Q500 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | |
| IC401 | 6-707-303-01 | IC TDA7419TR | | | | | |
| IC450 | 6-703-884-01 | IC BA8271F-E2 | | Q510 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | |
| IC600 | 6-707-281-01 | IC MM1613DNLE | | Q520 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | |
| IC620 | 6-705-542-01 | IC NJM2377M(TE2) | | Q601 | 8-729-047-76 | TRANSISTOR FMC2A-T148 | |
| IC700 | 6-705-373-01 | IC MM3123DPLE | | Q620 | 6-551-131-01 | FET 2SK3614-TD-E | |
| IC710 | 8-759-659-13 | IC PST3428UL | | Q621 | 8-729-027-23 | TRANSISTOR DTA114EKA-T146 | |
| IC711 | 6-806-151-01 | IC MB90487APF-G-162E1 | | | | | |
| | | < JACK > | | Q622 | 1-801-806-11 | TRANSISTOR DTC144EKA | |
| J200 | 1-774-700-11 | JACK, PIN 6P (BUS AUDIO IN, AUDIO OUT REAR/FRONT) | | Q623 | 1-801-806-11 | TRANSISTOR DTC144EKA | |
| J300 | 1-815-185-13 | JACK (ANTENNA) | | Q641 | 1-801-806-11 | TRANSISTOR DTC144EKA | |
| J530 | 1-566-822-41 | JACK (REMOTE IN) | | Q642 | 8-729-027-23 | TRANSISTOR DTA114EKA-T146 | |
| | | < COIL > | | Q643 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | |
| L100 | 1-456-617-11 | COIL, CHOKE | | Q710 | 8-729-027-23 | TRANSISTOR DTA114EKA-T146 | |
| L200 | 1-469-844-11 | INDUCTOR 2.2uH | | | | < RESISTOR > | |
| L201 | 1-216-864-11 | SHORT CHIP 0 | | R100 | 1-216-073-00 | RES-CHIP 10K 5% | 1/10W |
| L300 | 1-216-295-11 | SHORT CHIP 0 | | R101 | 1-249-425-11 | CARBON 4.7K 5% | 1/4W |
| L302 | 1-216-295-11 | SHORT CHIP 0 | | R102 | 1-249-425-11 | CARBON 4.7K 5% | 1/4W |
| L350 | 1-414-760-21 | INDUCTOR, FERRITE BEAD (AEP,UK) | | R103 | 1-216-821-11 | METAL CHIP 1K 5% | 1/10W |
| | | | | R152 | 1-216-811-11 | METAL CHIP 150 5% | 1/10W |
| | | | | R153 | 1-216-841-11 | METAL CHIP 47K 5% | 1/10W |
| | | | | R200 | 1-216-809-11 | METAL CHIP 100 5% | 1/10W |
| | | | | R201 | 1-216-833-11 | METAL CHIP 10K 5% | 1/10W |
| | | | | R202 | 1-216-825-11 | METAL CHIP 2.2K 5% | 1/10W |
| | | | | R203 | 1-216-789-11 | METAL CHIP 2.2 5% | 1/10W |

CDX-GT50W/GT500/GT500EE/GT550

MAIN

| Ref. No. | Part No. | Description | Remark | Ref. No. | Part No. | Description | Remark |
|----------|--------------|------------------------|----------|----------|--------------|-------------|----------------------|
| R204 | 1-216-825-11 | METAL CHIP | 2.2K 5% | R356 | 1-216-864-11 | SHORT CHIP | 0 (AEP,UK) |
| R205 | 1-216-833-11 | METAL CHIP | 10K 5% | R357 | 1-216-864-11 | SHORT CHIP | 0 (AEP,UK) |
| R206 | 1-216-833-11 | METAL CHIP | 10K 5% | R358 | 1-216-797-11 | METAL CHIP | 10 5% 1/10W (AEP,UK) |
| R207 | 1-216-809-11 | METAL CHIP | 100 5% | R359 | 1-216-864-11 | SHORT CHIP | 0 (AEP,UK) |
| R208 | 1-216-809-11 | METAL CHIP | 100 5% | R400 | 1-216-864-11 | SHORT CHIP | 0 |
| R209 | 1-216-809-11 | METAL CHIP | 100 5% | R401 | 1-216-801-11 | METAL CHIP | 22 5% 1/10W |
| R210 | 1-216-809-11 | METAL CHIP | 100 5% | R402 | 1-216-801-11 | METAL CHIP | 22 5% 1/10W |
| R214 | 1-216-809-11 | METAL CHIP | 100 5% | R403 | 1-216-801-11 | METAL CHIP | 22 5% 1/10W |
| R215 | 1-216-809-11 | METAL CHIP | 100 5% | R404 | 1-216-801-11 | METAL CHIP | 22 5% 1/10W |
| R216 | 1-216-809-11 | METAL CHIP | 100 5% | R405 | 1-216-801-11 | METAL CHIP | 22 5% 1/10W |
| R217 | 1-216-809-11 | METAL CHIP | 100 5% | R406 | 1-216-864-11 | SHORT CHIP | 0 |
| R218 | 1-216-809-11 | METAL CHIP | 100 5% | R407 | 1-216-864-11 | SHORT CHIP | 0 |
| R220 | 1-216-809-11 | METAL CHIP | 100 5% | R450 | 1-216-864-11 | SHORT CHIP | 0 |
| R221 | 1-216-809-11 | METAL CHIP | 100 5% | R453 | 1-216-864-11 | SHORT CHIP | 0 |
| R222 | 1-216-809-11 | METAL CHIP | 100 5% | R455 | 1-216-864-11 | SHORT CHIP | 0 |
| R223 | 1-216-809-11 | METAL CHIP | 100 5% | R456 | 1-216-829-11 | METAL CHIP | 4.7K 5% 1/10W |
| R224 | 1-216-809-11 | METAL CHIP | 100 5% | R457 | 1-216-821-11 | METAL CHIP | 1K 5% 1/10W |
| R225 | 1-216-833-11 | METAL CHIP | 10K 5% | R458 | 1-216-821-11 | METAL CHIP | 1K 5% 1/10W |
| R226 | 1-216-833-11 | METAL CHIP | 10K 5% | R459 | 1-216-835-11 | METAL CHIP | 15K 5% 1/10W |
| R227 | 1-216-833-11 | METAL CHIP | 10K 5% | R461 | 1-216-821-11 | METAL CHIP | 1K 5% 1/10W |
| R228 | 1-216-833-11 | METAL CHIP | 10K 5% | R500 | 1-216-841-11 | METAL CHIP | 47K 5% 1/10W |
| R229 | 1-216-833-11 | METAL CHIP | 10K 5% | R501 | 1-216-841-11 | METAL CHIP | 47K 5% 1/10W |
| R230 | 1-216-864-11 | SHORT CHIP | 0 | R502 | 1-216-829-11 | METAL CHIP | 4.7K 5% 1/10W |
| R231 | 1-216-864-11 | SHORT CHIP | 0 | R510 | 1-216-845-11 | METAL CHIP | 100K 5% 1/10W |
| R232 | 1-216-864-11 | SHORT CHIP | 0 | R511 | 1-216-837-11 | METAL CHIP | 22K 5% 1/10W |
| R233 | 1-216-864-11 | SHORT CHIP | 0 | R520 | 1-216-841-11 | METAL CHIP | 47K 5% 1/10W |
| R245 | 1-216-833-11 | METAL CHIP | 10K 5% | R521 | 1-216-833-11 | METAL CHIP | 10K 5% 1/10W |
| R246 | 1-216-833-11 | METAL CHIP | 10K 5% | R522 | 1-216-833-11 | METAL CHIP | 10K 5% 1/10W |
| R251 | 1-216-805-11 | METAL CHIP | 47 5% | R530 | 1-216-809-11 | METAL CHIP | 100 5% 1/10W |
| R255 | 1-216-833-11 | METAL CHIP | 10K 5% | R531 | 1-216-809-11 | METAL CHIP | 100 5% 1/10W |
| R256 | 1-216-833-11 | METAL CHIP | 10K 5% | R532 | 1-216-864-11 | SHORT CHIP | 0 |
| R262 | 1-216-864-11 | SHORT CHIP | 0 | R605 | 1-216-029-00 | RES-CHIP | 150 5% 1/10W |
| R300 | 1-216-843-11 | METAL CHIP | 68K 5% | R606 | 1-216-029-00 | RES-CHIP | 150 5% 1/10W |
| R301 | 1-216-839-11 | METAL CHIP | 33K 5% | R607 | 1-216-029-00 | RES-CHIP | 150 5% 1/10W |
| R302 | 1-216-809-11 | METAL CHIP | 100 5% | R610 | 1-216-809-11 | METAL CHIP | 100 5% 1/10W |
| R303 | 1-216-843-11 | METAL CHIP | 68K 5% | R611 | 1-216-809-11 | METAL CHIP | 100 5% 1/10W |
| R304 | 1-216-839-11 | METAL CHIP | 33K 5% | R612 | 1-216-809-11 | METAL CHIP | 100 5% 1/10W |
| R305 | 1-216-843-11 | METAL CHIP | 68K 5% | R613 | 1-216-809-11 | METAL CHIP | 100 5% 1/10W |
| R306 | 1-216-839-11 | METAL CHIP | 33K 5% | R614 | 1-216-809-11 | METAL CHIP | 100 5% 1/10W |
| R307 | 1-414-760-21 | INDUCTOR, FERRITE BEAD | (AEP,UK) | R615 | 1-216-809-11 | METAL CHIP | 100 5% 1/10W |
| R308 | 1-414-760-21 | INDUCTOR, FERRITE BEAD | | R616 | 1-216-809-11 | METAL CHIP | 100 5% 1/10W |
| R309 | 1-414-760-21 | INDUCTOR, FERRITE BEAD | | R617 | 1-216-809-11 | METAL CHIP | 100 5% 1/10W |
| R310 | 1-414-760-21 | INDUCTOR, FERRITE BEAD | | R618 | 1-216-809-11 | METAL CHIP | 100 5% 1/10W |
| R311 | 1-216-821-11 | METAL CHIP | 1K 5% | R619 | 1-216-841-11 | METAL CHIP | 47K 5% 1/10W |
| R350 | 1-216-821-11 | METAL CHIP | 1K 5% | R620 | 1-216-841-11 | METAL CHIP | 47K 5% 1/10W |
| R351 | 1-216-833-11 | METAL CHIP | 10K 5% | R621 | 1-216-841-11 | METAL CHIP | 47K 5% 1/10W |
| R352 | 1-216-797-11 | METAL CHIP | 10 5% | R622 | 1-218-863-11 | METAL CHIP | 4.7K 0.5% 1/10W |
| R353 | 1-216-797-11 | METAL CHIP | 10 5% | R623 | 1-218-895-11 | METAL CHIP | 100K 0.5% 1/10W |
| R354 | 1-216-845-11 | METAL CHIP | 100K 5% | R624 | 1-218-847-11 | METAL CHIP | 1K 0.5% 1/10W |
| R355 | 1-216-801-11 | METAL CHIP | 22 5% | R625 | 1-216-805-11 | METAL CHIP | 47 5% 1/10W |
| | | | (AEP,UK) | R626 | 1-216-841-11 | METAL CHIP | 47K 5% 1/10W |
| | | | (AEP,UK) | R627 | 1-216-846-11 | METAL CHIP | 120K 5% 1/10W |
| | | | (AEP,UK) | R628 | 1-216-841-11 | METAL CHIP | 47K 5% 1/10W |
| | | | (AEP,UK) | R629 | 1-216-833-11 | METAL CHIP | 10K 5% 1/10W |
| | | | (AEP,UK) | R630 | 1-216-837-11 | METAL CHIP | 22K 5% 1/10W |
| | | | (AEP,UK) | R631 | 1-216-821-11 | METAL CHIP | 1K 5% 1/10W |
| | | | (AEP,UK) | R632 | 1-216-823-11 | METAL CHIP | 1.5K 5% 1/10W |

CDX-GT50W/GT500/GT500EE/GT550

SENSOR **SERVO**

| Ref. No. | Part No. | Description | Remark |
|----------|--------------|--------------------------------|---------|
| | | SENSOR BOARD ***** | |
| | | < SWITCH > | |
| SW2 | 1-529-566-61 | SWITCH, PUSH (1 KEY) (SELF) | |
| SW3 | 1-529-566-61 | SWITCH, PUSH (1 KEY) (DISC IN) | |
| ***** | | | |
| | A-1132-412-A | SERVO BOARD, COMPLETE ***** | |
| | | < CAPACITOR > | |
| C7 | 1-125-777-11 | CERAMIC CHIP 0.1uF | 10% 10V |
| C10 | 1-126-208-21 | ELECT CHIP 47uF | 20% 4V |
| C11 | 1-125-777-11 | CERAMIC CHIP 0.1uF | 10% 10V |
| C12 | 1-125-777-11 | CERAMIC CHIP 0.1uF | 10% 10V |
| C13 | 1-100-567-81 | CERAMIC CHIP 0.01uF | 10% 25V |
| C14 | 1-104-609-11 | ELECT CHIP 100uF | 20% 4V |
| C15 | 1-125-777-11 | CERAMIC CHIP 0.1uF | 10% 10V |
| C16 | 1-162-964-11 | CERAMIC CHIP 0.001uF | 10% 50V |
| C17 | 1-125-777-11 | CERAMIC CHIP 0.1uF | 10% 10V |
| C18 | 1-125-777-11 | CERAMIC CHIP 0.1uF | 10% 10V |
| C19 | 1-125-777-11 | CERAMIC CHIP 0.1uF | 10% 10V |
| C20 | 1-164-677-11 | CERAMIC CHIP 0.033uF | 10% 16V |
| C22 | 1-164-677-11 | CERAMIC CHIP 0.033uF | 10% 16V |
| C23 | 1-125-777-11 | CERAMIC CHIP 0.1uF | 10% 10V |
| C24 | 1-125-777-11 | CERAMIC CHIP 0.1uF | 10% 10V |
| C25 | 1-125-777-11 | CERAMIC CHIP 0.1uF | 10% 10V |
| C26 | 1-162-966-11 | CERAMIC CHIP 0.0022uF | 10% 50V |
| C29 | 1-162-968-11 | CERAMIC CHIP 0.0047uF | 10% 50V |
| C30 | 1-162-968-11 | CERAMIC CHIP 0.0047uF | 10% 50V |
| C31 | 1-125-777-11 | CERAMIC CHIP 0.1uF | 10% 10V |
| C32 | 1-125-777-11 | CERAMIC CHIP 0.1uF | 10% 10V |
| C33 | 1-125-777-11 | CERAMIC CHIP 0.1uF | 10% 10V |
| C36 | 1-125-777-11 | CERAMIC CHIP 0.1uF | 10% 10V |
| C39 | 1-126-208-21 | ELECT CHIP 47uF | 20% 4V |
| C40 | 1-126-395-11 | ELECT CHIP 22uF | 20% 16V |
| C41 | 1-125-777-11 | CERAMIC CHIP 0.1uF | 10% 10V |
| C42 | 1-125-777-11 | CERAMIC CHIP 0.1uF | 10% 10V |
| C43 | 1-100-567-81 | CERAMIC CHIP 0.01uF | 10% 25V |
| C44 | 1-125-777-11 | CERAMIC CHIP 0.1uF | 10% 10V |
| C45 | 1-125-777-11 | CERAMIC CHIP 0.1uF | 10% 10V |
| C46 | 1-162-923-11 | CERAMIC CHIP 47PF | 5% 50V |
| C47 | 1-164-245-11 | CERAMIC CHIP 0.015uF | 10% 25V |
| C48 | 1-100-567-81 | CERAMIC CHIP 0.01uF | 10% 25V |
| C49 | 1-125-777-11 | CERAMIC CHIP 0.1uF | 10% 10V |
| C50 | 1-100-567-81 | CERAMIC CHIP 0.01uF | 10% 25V |
| C51 | 1-125-777-11 | CERAMIC CHIP 0.1uF | 10% 10V |
| C52 | 1-125-777-11 | CERAMIC CHIP 0.1uF | 10% 10V |
| C53 | 1-125-777-11 | CERAMIC CHIP 0.1uF | 10% 10V |
| C54 | 1-100-567-81 | CERAMIC CHIP 0.01uF | 10% 25V |
| C55 | 1-125-777-11 | CERAMIC CHIP 0.1uF | 10% 10V |
| C56 | 1-164-245-11 | CERAMIC CHIP 0.015uF | 10% 25V |
| C58 | 1-125-777-11 | CERAMIC CHIP 0.1uF | 10% 10V |
| C60 | 1-162-964-11 | CERAMIC CHIP 0.001uF | 10% 50V |
| C62 | 1-125-777-11 | CERAMIC CHIP 0.1uF | 10% 10V |
| C66 | 1-100-567-81 | CERAMIC CHIP 0.01uF | 10% 25V |
| C67 | 1-100-567-81 | CERAMIC CHIP 0.01uF | 10% 25V |


| Ref. No. | Part No. | Description | Remark |
|----------|--------------|-------------------------------|----------|
| C68 | 1-100-567-81 | CERAMIC CHIP 0.01uF | 10% 25V |
| C69 | 1-100-567-81 | CERAMIC CHIP 0.01uF | 10% 25V |
| C70 | 1-125-777-11 | CERAMIC CHIP 0.1uF | 10% 10V |
| C71 | 1-125-777-11 | CERAMIC CHIP 0.1uF | 10% 10V |
| C72 | 1-125-777-11 | CERAMIC CHIP 0.1uF | 10% 10V |
| C80 | 1-125-837-11 | CERAMIC CHIP 1uF | 10% 6.3V |
| C132 | 1-125-837-11 | CERAMIC CHIP 1uF | 10% 6.3V |
| C133 | 1-125-837-11 | CERAMIC CHIP 1uF | 10% 6.3V |
| | | < CONNECTOR > | |
| CN1 | 1-691-380-61 | CONNECTOR, FFC/FPC (ZIF) 16P | |
| CN2 | 1-817-275-21 | CONNECTOR, BOARD TO BOARD 28P | |
| | | < JUMPER RESISTOR > | |
| FB2 | 1-216-864-11 | SHORT CHIP 0 | |
| FB3 | 1-216-864-11 | SHORT CHIP 0 | |
| FB4 | 1-216-864-11 | SHORT CHIP 0 | |
| | | < IC > | |
| IC1 | 6-707-327-01 | IC BA5968FP-E2 | |
| IC2 | 6-708-729-01 | IC TC94A70FG-002 | |
| IC3 | 6-806-019-02 | IC MB90486BPFV-G-177E1 | |
| IC6 | 6-708-728-01 | IC BH15LB1WG | |
| | | < TRANSISTOR > | |
| Q2 | 6-551-120-01 | TRANSISTOR 2SA2119K | |
| Q3 | 8-729-928-90 | TRANSISTOR DTC114EE | |
| Q21 | 8-729-904-87 | TRANSISTOR 2SB1197K-R | |
| | | < RESISTOR > | |
| R1 | 1-218-965-11 | RES-CHIP 10K | 5% 1/16W |
| R2 | 1-218-977-11 | RES-CHIP 100K | 5% 1/16W |
| R5 | 1-218-969-11 | RES-CHIP 22K | 5% 1/16W |
| R6 | 1-218-969-11 | RES-CHIP 22K | 5% 1/16W |
| R7 | 1-218-990-81 | SHORT CHIP 0 | |
| R8 | 1-218-965-11 | RES-CHIP 10K | 5% 1/16W |
| R9 | 1-218-965-11 | RES-CHIP 10K | 5% 1/16W |
| R10 | 1-218-990-81 | SHORT CHIP 0 | |
| R11 | 1-218-941-81 | RES-CHIP 100 | 5% 1/16W |
| R12 | 1-218-969-11 | RES-CHIP 22K | 5% 1/16W |
| R13 | 1-218-969-11 | RES-CHIP 22K | 5% 1/16W |
| R14 | 1-218-929-11 | RES-CHIP 10 | 5% 1/16W |
| R15 | 1-218-929-11 | RES-CHIP 10 | 5% 1/16W |
| R16 | 1-218-953-11 | RES-CHIP 1K | 5% 1/16W |
| R17 | 1-218-990-81 | SHORT CHIP 0 | |
| R18 | 1-218-941-81 | RES-CHIP 100 | 5% 1/16W |
| R19 | 1-218-935-11 | RES-CHIP 33 | 5% 1/16W |
| R20 | 1-162-961-11 | CERAMIC CHIP 330PF | 10% 50V |
| R21 | 1-218-941-81 | RES-CHIP 100 | 5% 1/16W |
| R22 | 1-218-977-11 | RES-CHIP 100K | 5% 1/16W |
| R23 | 1-218-977-11 | RES-CHIP 100K | 5% 1/16W |
| R24 | 1-218-977-11 | RES-CHIP 100K | 5% 1/16W |
| R25 | 1-218-977-11 | RES-CHIP 100K | 5% 1/16W |
| R26 | 1-218-977-11 | RES-CHIP 100K | 5% 1/16W |
| R27 | 1-218-977-11 | RES-CHIP 100K | 5% 1/16W |
| R28 | 1-218-945-11 | RES-CHIP 220 | 5% 1/16W |
| R29 | 1-218-989-11 | RES-CHIP 1M | 5% 1/16W |
| R30 | 1-218-989-11 | RES-CHIP 1M | 5% 1/16W |

| Ref. No. | Part No. | Description | Remark | Ref. No. | Part No. | Description | Remark |
|----------|--------------|--------------|-----------|----------|---------------|---|---|
| R31 | 1-218-989-11 | RES-CHIP | 1M 5% | 1/16W | | < VIBRATOR > | |
| R32 | 1-218-947-11 | RES-CHIP | 330 5% | 1/16W | | | |
| R33 | 1-218-990-81 | SHORT CHIP | 0 | | X1 | 1-813-678-11 | OSCILLATOR, CERAMIC (CHIP TYPE) (12MHz) |
| R34 | 1-216-864-11 | SHORT CHIP | 0 | | X2 | 1-795-561-21 | VIBRATOR, CERAMIC (16.9344MHz) |
| R35 | 1-162-961-11 | CERAMIC CHIP | 330PF 10% | 50V | ***** | | |
| R36 | 1-218-947-11 | RES-CHIP | 330 5% | 1/16W | A-1156-589-A | SUB BOARD, COMPLETE (GT500/GT550) | |
| R37 | 1-218-947-11 | RES-CHIP | 330 5% | 1/16W | A-1158-907-A | SUB BOARD, COMPLETE (GT50W/GT500EE) | |
| R38 | 1-218-941-81 | RES-CHIP | 100 5% | 1/16W | ***** | | |
| R39 | 1-218-941-81 | RES-CHIP | 100 5% | 1/16W | 1-831-502-11 | CABLE, FLEXIBLE FLAT (22 CORE) (FFC801) | |
| R40 | 1-218-941-81 | RES-CHIP | 100 5% | 1/16W | < CONNECTOR > | | |
| R41 | 1-218-941-81 | RES-CHIP | 100 5% | 1/16W | | | |
| R42 | 1-218-977-11 | RES-CHIP | 100K 5% | 1/16W | CN801 | 1-818-142-11 | SOCKET, CONNECTOR 20P |
| R43 | 1-218-961-11 | RES-CHIP | 4.7K 5% | 1/16W | < DIODE > | | |
| R44 | 1-218-977-11 | RES-CHIP | 100K 5% | 1/16W | LED802 | 6-500-450-01 | LED CL-195SR-CD-T (▲) (GT500/GT550) |
| R52 | 1-218-962-11 | RES-CHIP | 5.6K 5% | 1/16W | LED802 | 6-500-510-01 | LED CL-195PG-CD-T (▲) (GT50W/GT500EE) |
| R53 | 1-218-979-11 | RES-CHIP | 150K 5% | 1/16W | LED803 | 6-500-450-01 | LED CL-195SR-CD-T (CD SLOT) |
| R54 | 1-218-990-81 | SHORT CHIP | 0 | | | | (GT500/GT550) |
| R55 | 1-218-973-11 | RES-CHIP | 47K 5% | 1/16W | LED803 | 6-500-510-01 | LED CL-195PG-CD-T (CD SLOT) |
| R57 | 1-218-967-11 | RES-CHIP | 15K 5% | 1/16W | | | (GT50W/GT500EE) |
| R58 | 1-218-969-11 | RES-CHIP | 22K 5% | 1/16W | < RESISTOR > | | |
| R60 | 1-218-941-81 | RES-CHIP | 100 5% | 1/16W | R802 | 1-216-813-11 | METAL CHIP 220 5% 1/10W |
| R61 | 1-218-941-81 | RES-CHIP | 100 5% | 1/16W | R803 | 1-216-817-11 | METAL CHIP 470 5% 1/10W |
| R62 | 1-218-941-81 | RES-CHIP | 100 5% | 1/16W | < SWITCH > | | |
| R63 | 1-218-977-11 | RES-CHIP | 100K 5% | 1/16W | S801 | 1-786-653-21 | SWITCH, TACTILE (▲) |
| R64 | 1-218-977-11 | RES-CHIP | 100K 5% | 1/16W | ***** | | |
| R65 | 1-218-977-11 | RES-CHIP | 100K 5% | 1/16W | MISCELLANEOUS | | |
| R66 | 1-218-941-81 | RES-CHIP | 100 5% | 1/16W | ***** | | |
| R67 | 1-218-941-81 | RES-CHIP | 100 5% | 1/16W | 13 | 1-776-207-72 | CORD (WITH CONNECTOR) (POWER) |
| R68 | 1-218-941-81 | RES-CHIP | 100 5% | 1/16W | | | (EXCEPT AEP,UK,EE) |
| R69 | 1-218-941-81 | RES-CHIP | 100 5% | 1/16W | 13 | 1-776-527-71 | CORD (WITH CONNECTOR) (ISO) (POWER) |
| R70 | 1-218-965-11 | RES-CHIP | 10K 5% | 1/16W | | | (AEP,UK,EE) |
| R71 | 1-218-973-11 | RES-CHIP | 47K 5% | 1/16W | 14 | 1-790-355-54 | CORD (WITH CONNECTOR) (RCA) |
| R72 | 1-218-973-11 | RES-CHIP | 47K 5% | 1/16W | | | (SUB OUT (MONO)) |
| R73 | 1-218-973-11 | RES-CHIP | 47K 5% | 1/16W | △ 153 | 8-820-207-12 | OPTICAL PICK-UP (KSS1000E/K1RP) |
| R74 | 1-218-941-81 | RES-CHIP | 100 5% | 1/16W | 154 | A-1075-645-A | CHASSIS (OP) SUB ASSY (including M901) |
| R75 | 1-218-941-81 | RES-CHIP | 100 5% | 1/16W | F901 | 1-532-877-11 | FUSE (BLADE TYPE) (AUTO FUSE) 10A |
| R77 | 1-218-973-11 | RES-CHIP | 47K 5% | 1/16W | M902 | A-3372-447-A | MOTOR ASSY, SL (SLED) |
| R78 | 1-218-941-81 | RES-CHIP | 100 5% | 1/16W | M903 | A-1166-300-A | MOTOR ASSY (B), LE (LOADING) |
| R79 | 1-218-941-81 | RES-CHIP | 100 5% | 1/16W | SW4 | 1-571-099-11 | SWITCH (1 KEY) (LIMIT) |
| R80 | 1-218-941-81 | RES-CHIP | 100 5% | 1/16W | ***** | | |
| R81 | 1-218-941-81 | RES-CHIP | 100 5% | 1/16W | < SWITCH > | | |
| R82 | 1-218-941-81 | RES-CHIP | 100 5% | 1/16W | SW1 | 1-529-565-61 | SWITCH, PUSH (1 KEY) (DOWN) |
| R83 | 1-218-977-11 | RES-CHIP | 100K 5% | 1/16W | | | |
| R84 | 1-218-941-81 | RES-CHIP | 100 5% | 1/16W | | | |
| R85 | 1-218-977-11 | RES-CHIP | 100K 5% | 1/16W | | | |
| R86 | 1-218-941-81 | RES-CHIP | 100 5% | 1/16W | | | |
| R87 | 1-218-977-11 | RES-CHIP | 100K 5% | 1/16W | | | |
| R96 | 1-218-941-81 | RES-CHIP | 100 5% | 1/16W | | | |
| R97 | 1-220-200-81 | RES-CHIP | 30K 5% | 1/16W | | | |
| R98 | 1-218-971-11 | RES-CHIP | 33K 5% | 1/16W | | | |
| R132 | 1-218-969-11 | RES-CHIP | 22K 5% | 1/16W | | | |
| R133 | 1-218-953-11 | RES-CHIP | 1K 5% | 1/16W | | | |
| R141 | 1-216-864-11 | SHORT CHIP | 0 | | | | |
| R144 | 1-216-864-11 | SHORT CHIP | 0 | | | | |
| R147 | 1-216-864-11 | SHORT CHIP | 0 | | | | |

CDX-GT50W/GT500/GT500EE/GT550

| Ref. No. | Part No. | Description | Remark |
|----------|--------------|--|--------|
| | | ACCESSORIES | |
| | | ***** | |
| | 1-479-077-13 | REMOTE COMMANDER (RM-X151) | |
| | 2-548-729-01 | LID, BATTERY CASE (for RM-X151) | |
| | 2-663-186-11 | MANUAL, INSTRUCTION (ENGLISH,FRENCH) (GT500:US,CND) | |
| | 2-663-186-21 | MANUAL, INSTRUCTION (ENGLISH,SPANISH) (GT50W) | |
| | 2-663-186-31 | MANUAL, INSTRUCTION (ENGLISH,GERMAN, FRENCH,ITALIAN,DUTCH) (AEP,UK) | |
| | 2-663-186-41 | MANUAL, INSTRUCTION (ENGLISH,RUSSIAN) (GT500EE) | |
| | 2-663-186-51 | MANUAL, INSTRUCTION (ENGLISH,SPANISH, SIMPLIFIED CHINESE) (GT550) | |
| | 2-663-188-11 | MANUAL, INSTRUCTION, INSTALL (ENGLISH, FRENCH) (GT500:US,CND) | |
| | 2-663-188-21 | MANUAL, INSTRUCTION, INSTALL (ENGLISH, SPANISH) (GT50W) | |
| | 2-663-188-31 | MANUAL, INSTRUCTION, INSTALL (ENGLISH, GERMAN,FRENCH,ITALIAN,DUTCH) (AEP,UK) | |
| | 2-663-188-41 | MANUAL, INSTRUCTION, INSTALL (ENGLISH, RUSSIAN) (GT500EE) | |
| | 2-663-188-51 | MANUAL, INSTRUCTION, INSTALL (ENGLISH, SPANISH,SIMPLIFIED CHINESE) (GT550) | |
| | X-2055-358-1 | CASE ASSY (for FRONT PANEL) (EXCEPT US) | |

| Ref. No. | Part No. | Description | Remark |
|----------|--------------|---|--------|
| | | PARTS FOR INSTALLATION AND CONNECTIONS | |
| | | ***** | |
| 301 | X-3382-647-1 | FRAME ASSY, FITTING | |
| 302 | 2-638-099-01 | COLLAR | |
| 303 | 3-246-471-01 | KEY (FRAME) | |
| 304 | X-3381-154-1 | SCREW ASSY (BS4), FITTING (GT500EE/GT550) | |
| 305 | X-3382-926-1 | SCREW ASSY (BS), FITTING (AEP,UK) | |
| 306 | 3-349-410-11 | BUSHING (EXCEPT US,CND) | |
| 307 | 3-934-325-01 | SCREW, +K (5X8) TAPPING (EXCEPT AEP,UK) | |
| 308 | 1-465-459-31 | ADAPTOR, ANTENNA (AEP,UK,EE) | |
| 309 | 1-776-207-72 | CORD (WITH CONNECTOR) (POWER) (EXCEPT AEP,UK,EE) | |
| 310 | 1-776-527-71 | CORD (WITH CONNECTOR) (ISO) (POWER) (AEP,UK,EE) | |

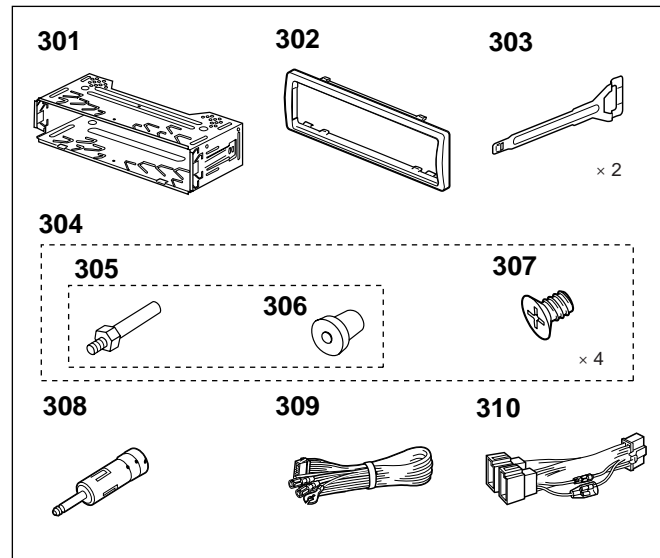

MEMO

