

M-203

AEP Model

UK Model

E Model

US Model

Canadian Model



MICRO CASSETTE-CORDER

SPECIFICATIONS

Power Requirements: 3 V dc, two batteries size AA (IEC designation R6), or optional Sony Rechargeable Battery Pack BP-33
120 V ac, 60 Hz with optional Sony AC Power Adaptor AC-31 (US, Canadian model)
220 V ac, 50 Hz with optional AC Power Adaptor AC-35 (AEP model)
220/240 V ac, 50 Hz with optional AC Power Adaptor AC-35 (UK model)
110, 120, 220 or 240 V ac, 50/60 Hz with optional AC Power Adaptor AC-32 (E model)
12 V car battery with optional Sony Car Battery Cord DCC-127A

Power Consumption: 5 W ac (60 Hz) with Sony AC Power Adaptor AC-31 (US, Canadian model)
7 W ac at 50 Hz with AC Power Adaptor AC-35 (220 V ac) (AEP model)
2 W ac at 50 Hz with AC Power Adaptor AC-35 (220/240 V ac) (UK model)
6.6 W ac at 50 Hz, 6.2 W ac at 60 Hz with AC Power Adaptor AC-32 (E model)

Dimensions: Approx. 65 (w) x 150 (h) x 28 (d) mm
2 5/8 (w) x 5 7/8 (h) x 1 1/8 (d) inches including projecting parts and controls

Weight: Approx. 290 g, 10 1/4 oz including batteries

Power Output: 200 mW (at 10 % harmonic distortion)

Speaker: Approx. 5 cm (1 7/8 inches) dia

Recording System: 2-track 1-channel monaural

Tape Speed: 2.4 cm/sec (1 15/16 ips), 1.2 cm/sec (1 3/16 ips)

Fast Winding Time: Approx. 2 min. with Sony Microcassette MC-60 (at 2.4 cm position)
Approx. 4 min. with MC-60 (at 1.2 cm position)

Frequency Response: 200 – 6,000 Hz (at 2.4 cm position)
200 – 4,000 Hz (at 1.2 cm position)

Battery Life: Continuous recording hours:
Approx. 3.5 hours with Sony Super Batteries SUM-3S
Approx. 4 hours with Eveready Heavy Duty Batteries No. 1215
Approx. 10 hours with Sony Alkaline Batteries AM-3 or Eveready Alkaline Batteries No. E91

Input: Microphone input jack (minijack)
sensitivity 0.2 mV (-72 dB)
for low impedance microphone

Output: Earphone jack (minijack)
for 8 Ω earphone or load impedance
10 kΩ or higher

0 dB = 0.775 V


	Specification	Test Equipment
Forward Torque	5 – 10 g·cm (0.07 – 0.13 oz·inch)	Sony torque meter CQ-103M
Fast Forward Torque Rewind Torque	more than 15 g·cm (more than 0.21 oz·inch)	Sony torque meter CQ-201M
Pinch Roller Pressure	160 – 200 g·cm (6 – 7 oz)	spring scale or tension gauge

Note: The values specified should be obtained at both 1.2cm/s and 2.4cm/s.

SONY®
SERVICE MANUAL

SECTION 1 OUTLINE

1-1. BLOCK DIAGRAM

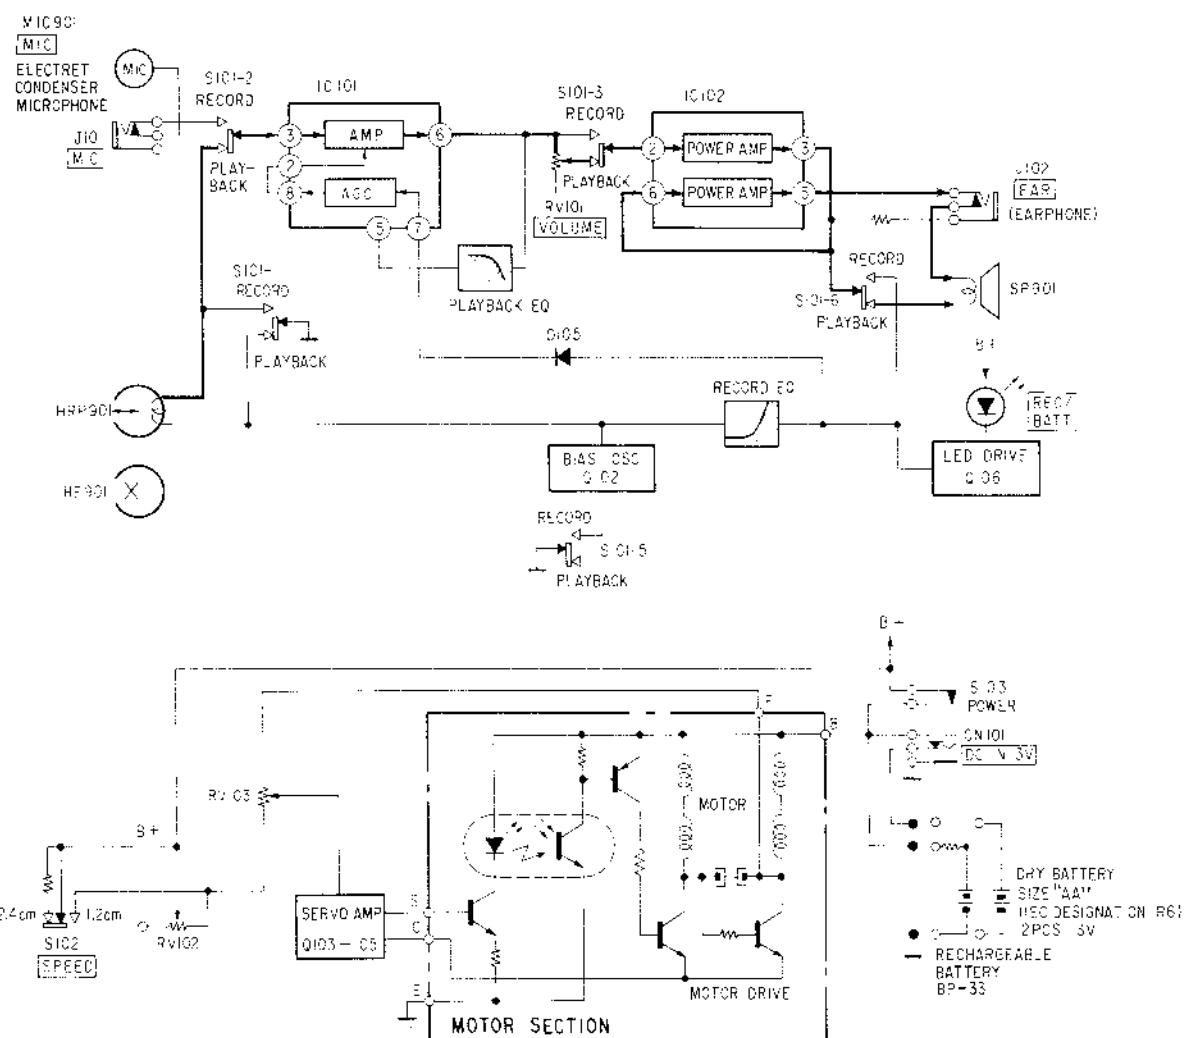

1-2. CIRCUIT OPERATION

BSL DC Servo Motor

This set is equipped with the newly-developed BSL (Brush and Slotless) DC servo motor.

This motor has the following advantages:

- Constant torque
- Extremely low noise, because of the electrical (non-mechanical) switchover.
- Stable performance and long durability.

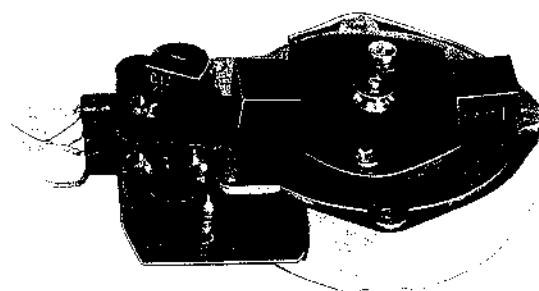


Fig. 1 BSL DC Servo Motor

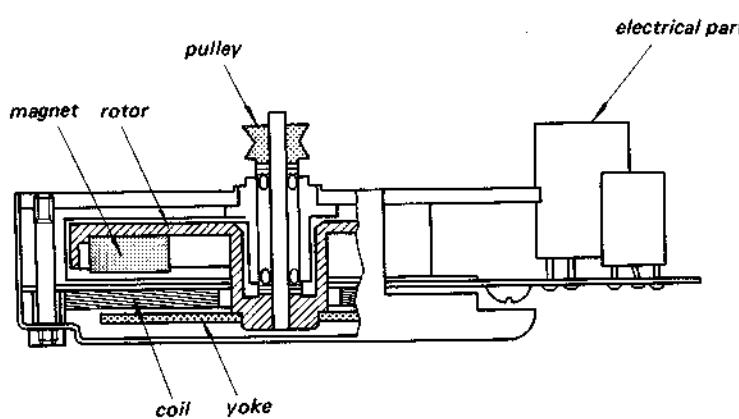


Fig. 2 Sectional View of the Motor

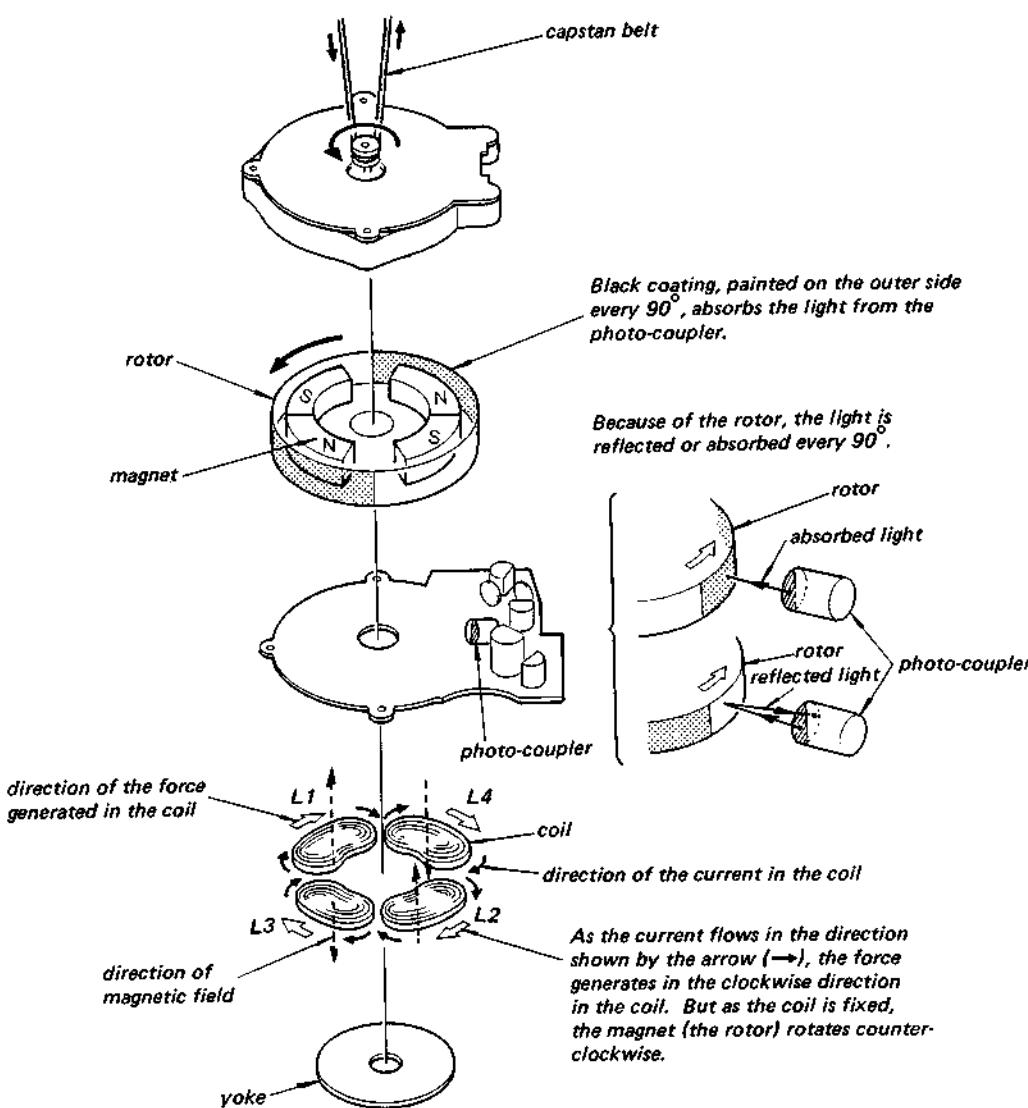


Fig. 3 Mechanism of the Motor

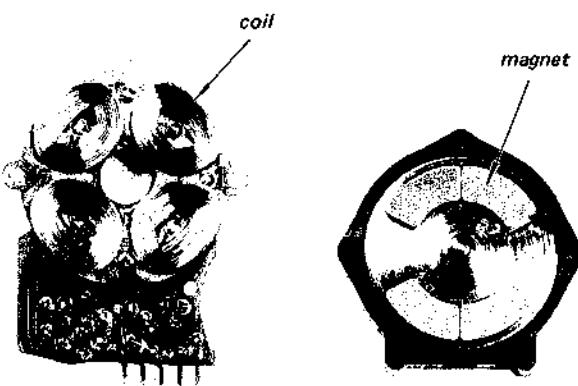


Fig. 4 Internal View of Motor

Generation of Rotational Force

According to the Fleming's left-hand rule, the force generated in the motor coil is in the clockwise direction (See Fig. 3), but since the coils are fixed so that the magnet (rotor) rotates counterclockwise (See Fig. 3).

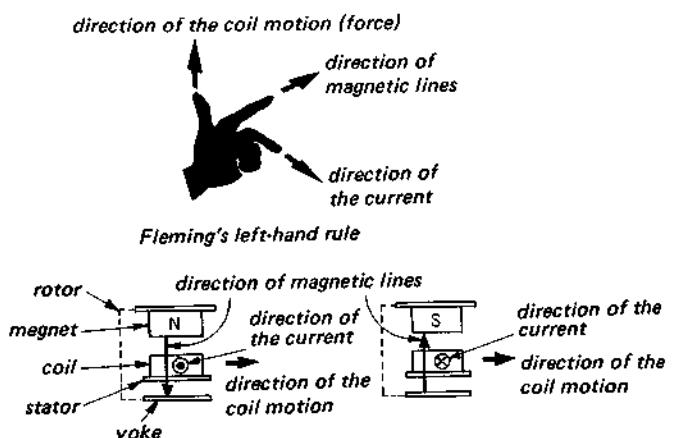


Fig. 5

Photo-coupler

Photo-coupler is a conversion device which consists of a luminous part and a light-sensitive part. The electrical input is converted into a light at the luminous part and is converted back into an electric signal at the light-sensitive part. This photo-coupler has the following advantages.

- The input side and the output side are electrically isolated. The insulation resistance value between the input and the output sides is $10^{11} - 10^{12} \Omega$, and the capacitance value is $0.5 - 2\text{pF}$.

- The photo-coupler is equivalent to the no-contact point relay (switch).
- The noise from the input side does not influence the output side.
- A change of current can be detected without touching the input side.
- The photo-coupler with the same B_+ voltage as the other semiconductors.
- The temperature variation of the current conductivity is small. This is because the temperature coefficient of the current amplitude ratio and the luminous efficiency are opposite and compensate each other.

Motor Drive Circuit (See Fig. 6)

This set employs a photo-coupler as the switching element for Q4 and Q5 (motor-coil drive).

- D1: the light-emitting diode of the luminous parts.
- D2: the photo transistor of the light-sensitive parts.
- The reflected light A → Q2, base → Q2: ON; a current flows. → Q3 : ON
- Q3 : ON → Q4 : ON → The current flows through L1, L2.
- The electric current flowing through L1, L2 → The magnetic field → The electromagnetic force is generated.
- The rotor rotates in the direction shown by the arrow (See Fig. 3).
- When the light is absorbed by the rotor: Q3, OFF → Q4, OFF → Q5, ON
- The current flows through L3, L4
- The rotor rotates in the direction shown by the arrow (See Fig. 3).
- Thus the rotor is driven by the photo-coupler, which applies current alternately to L1, L2 and L3, L4.

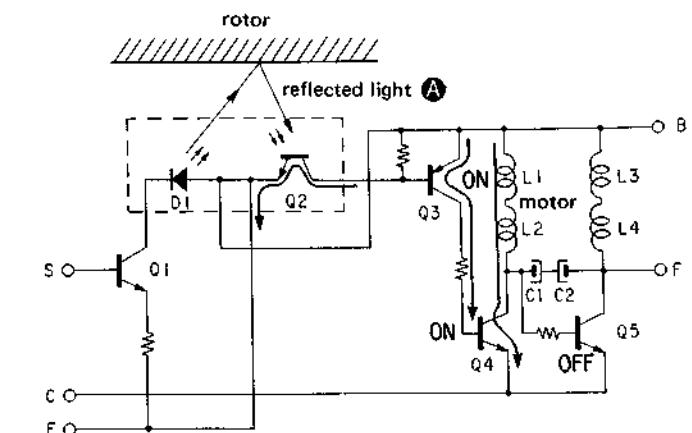


Fig. 6

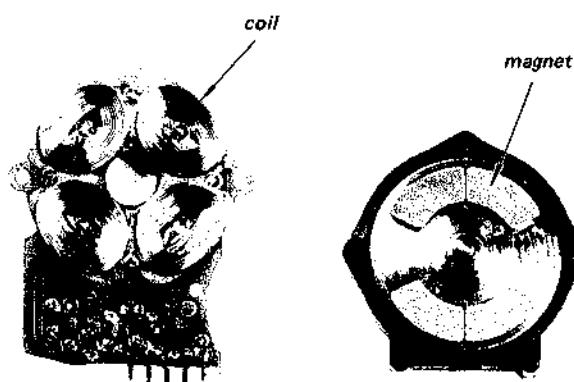


Fig. 4 Internal View of Motor

Generation of Rotational Force

According to the Fleming's left-hand rule, the force generated in the motor coil is in the clockwise direction (See Fig. 3), but since the coils are fixed so that the magnet (rotor) rotates counterclockwise (See Fig. 3).

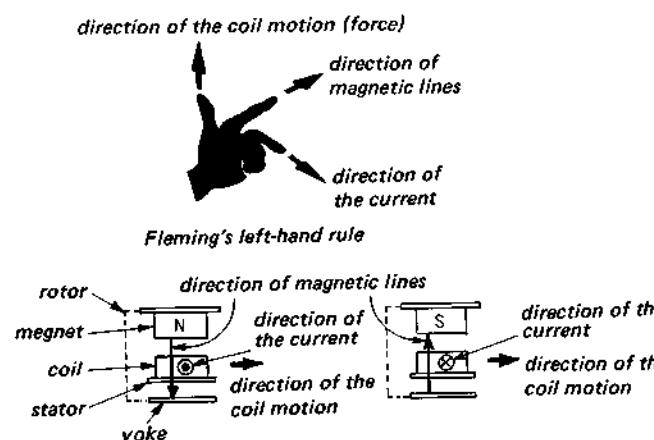


Fig. 5

Photo-coupler

Photo-coupler is a conversion device which consists of a luminous part and a light-sensitive part.

The electrical input is converted into a light at the luminous part and is converted back into an electric signal at the light-sensitive part.

This photo-coupler has the following advantages.


- The input side and the output side are electrically isolated. The insulation resistance value between the input and the output sides is $10^{11} - 10^{12} \Omega$, and the capacitance value is $0.5 - 2\text{pF}$.

- The photo-coupler is equivalent to the no-contact point relay (switch).
- The noise from the input side does not influence the output side.
- A change of current can be detected without touching the input side.
- The photo-coupler with the same B+ voltage as the other semiconductors.
- The temperature variation of the current conductivity is small. This is because the temperature coefficient of the current amplitude ratio and the luminous efficiency are opposite and compensate each other.

Motor Drive Circuit (See Fig. 6)


This set employs a photo-coupler as the switching element for Q4 and Q5 (motor-coil drive).

1. D1: the light-emitting diode of the luminous parts.
D2: the photo transistor of the light-sensitive parts.
2. The reflected light A — Q2, base — Q2: ON;
a current flows. — Q3 : ON
3. Q3 : ON — Q4 : ON — The current flows through L1, L2.
4. The electric current flowing through L1, L2
The magnetic field
— The electromagnetic force is generated.
— The rotor rotates in the direction shown by the arrow (See Fig. 3).
5. When the light is absorbed by the rotor:
Q3, OFF — Q4, OFF — Q5, ON
— The current flows through L3, L4
— The rotor rotates in the direction shown by the arrow (See Fig. 3).
6. Thus the rotor is driven by the photo-coupler, which applies current alternately to L1, L2 and L3, L4.





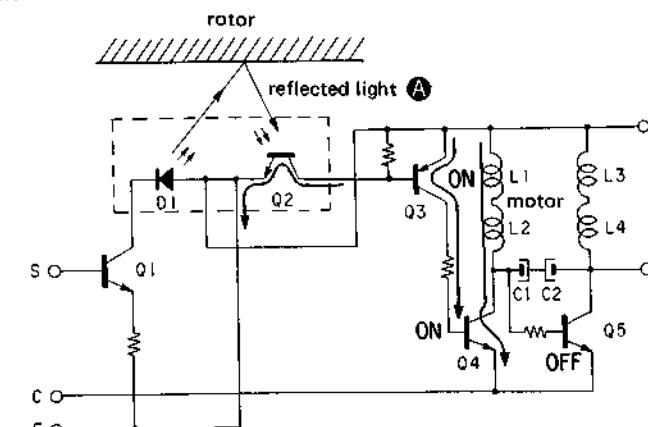


SECTION 2 DISASSEMBLY

- Follow the disassembly procedure in the numerical order given.

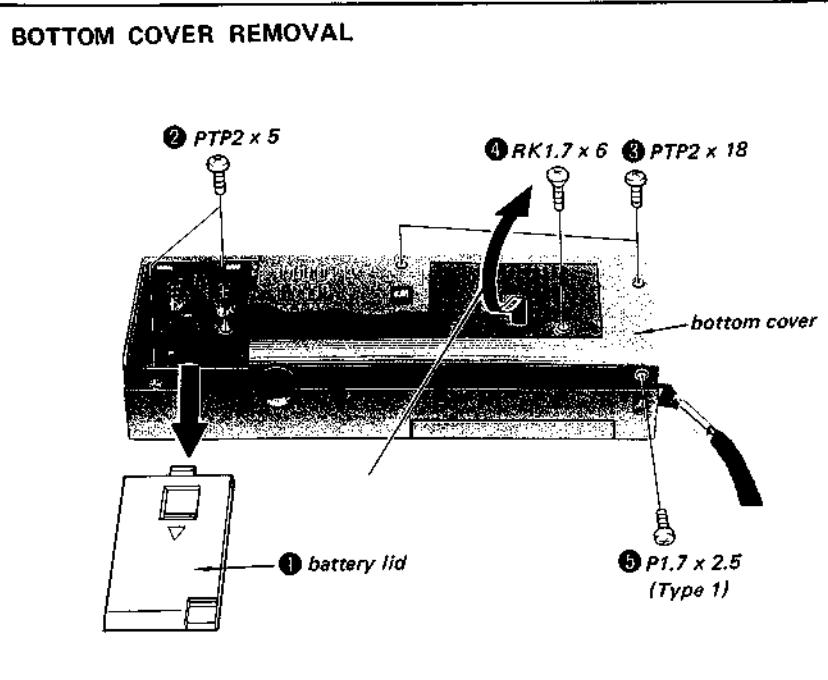


MOTOR SECTION REMOVAL
FLYWHEEL REMOVAL } See the page 8.

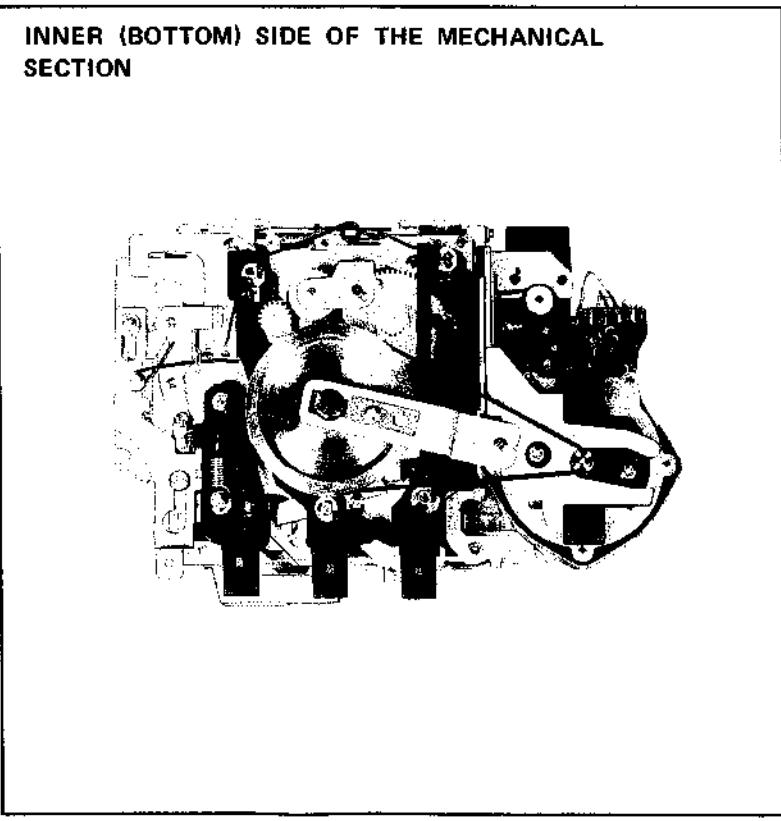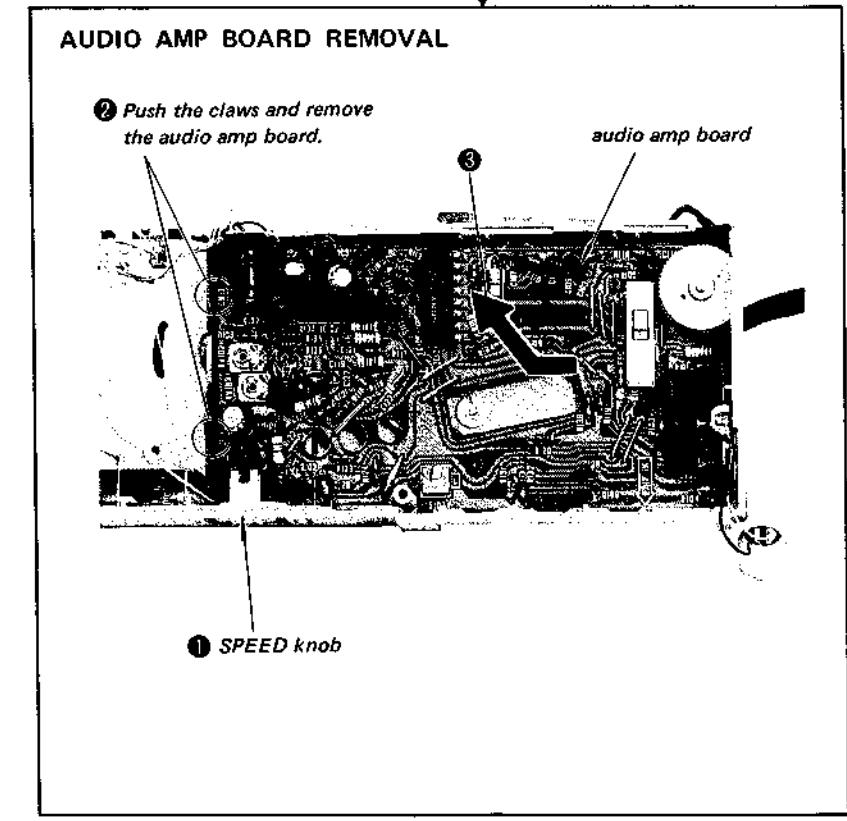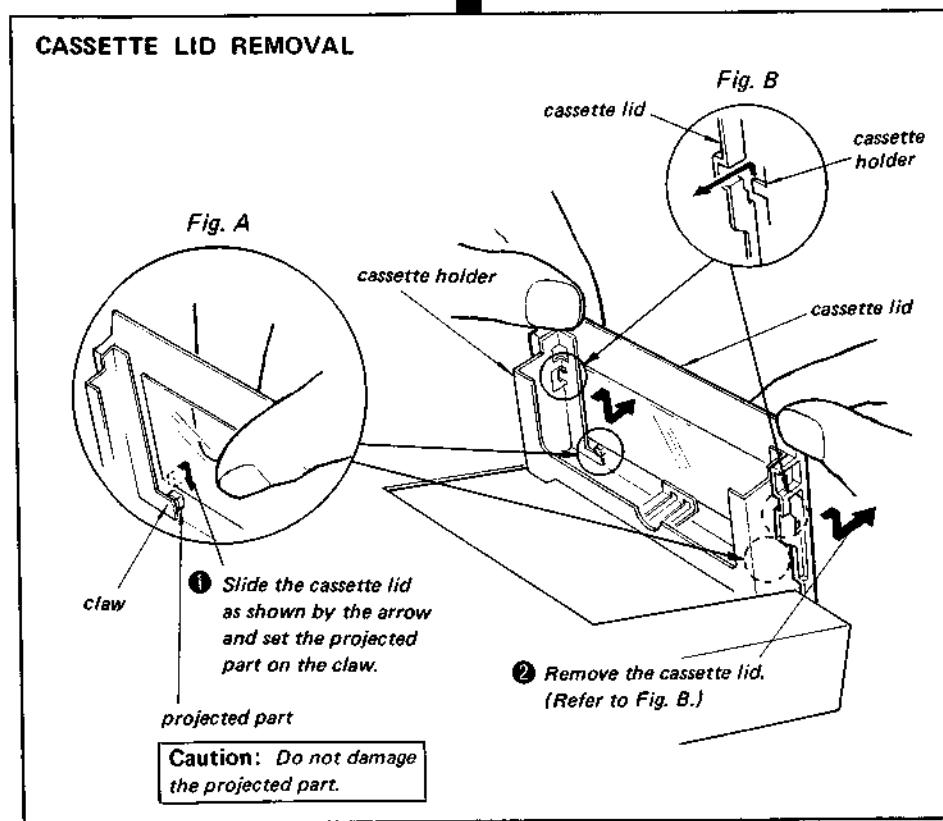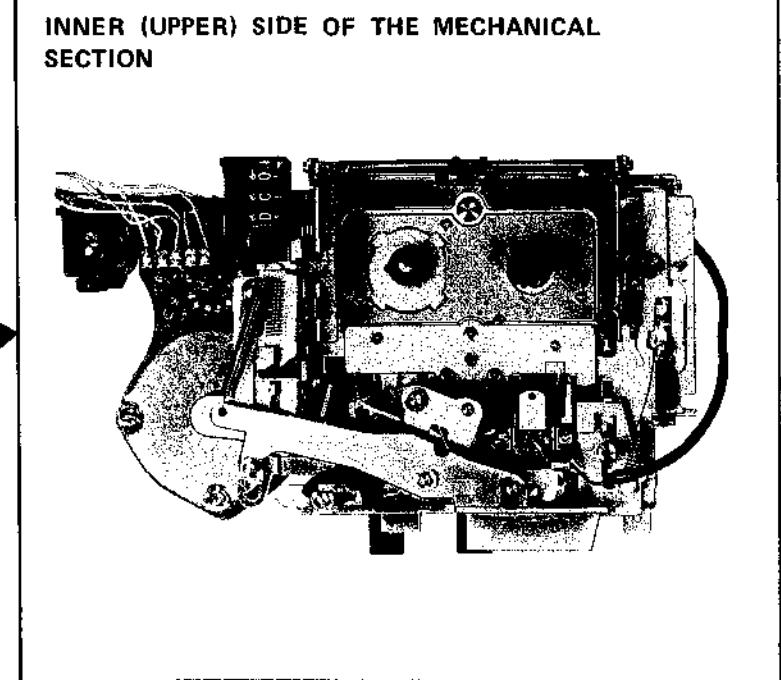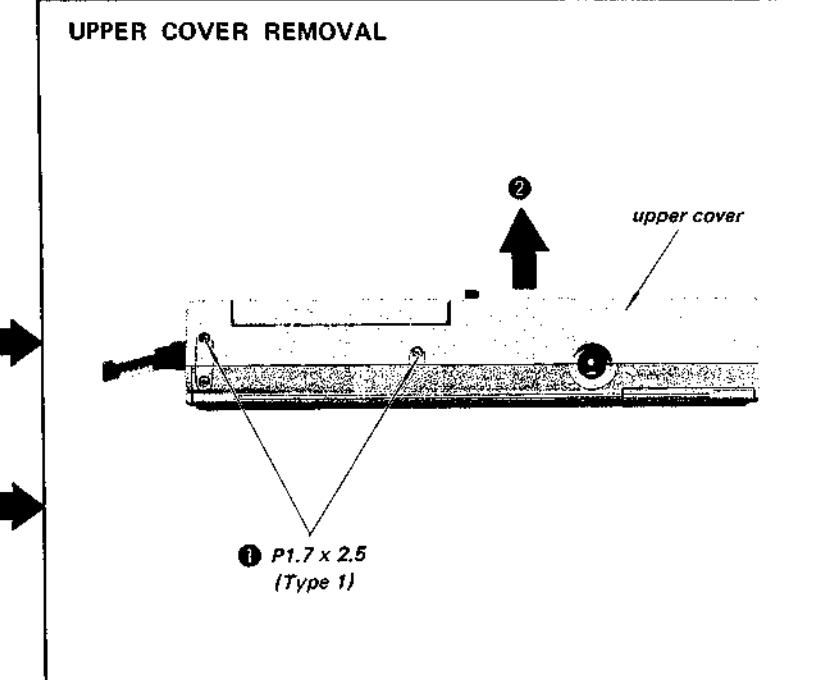


MOVAL } See the page 8.
L


OVAL

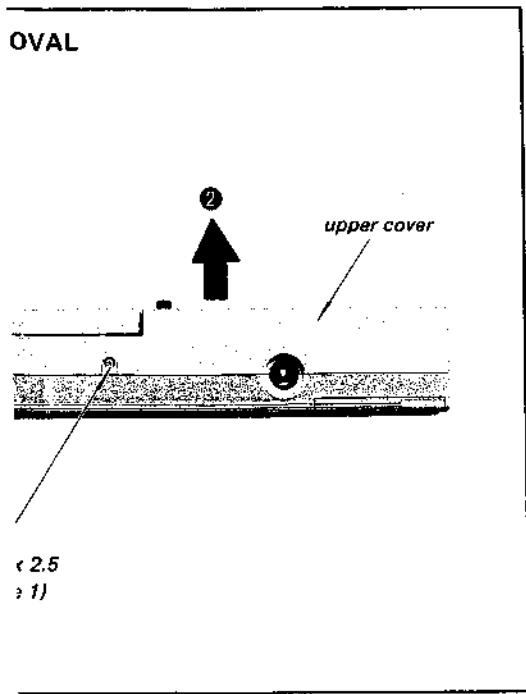


INNER (UPPER) SIDE OF THE MECHANICAL SECTION

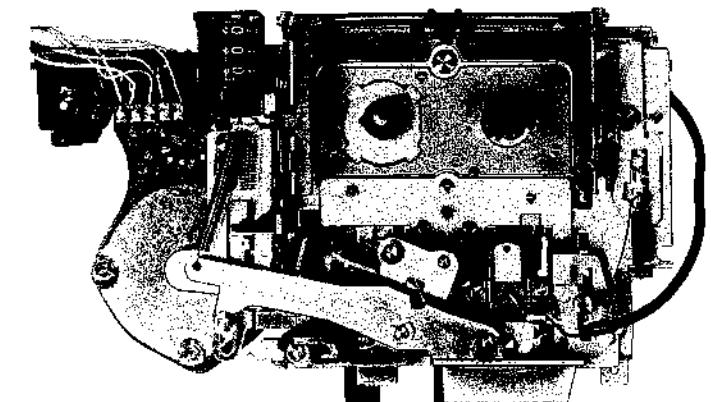


EMOVAL

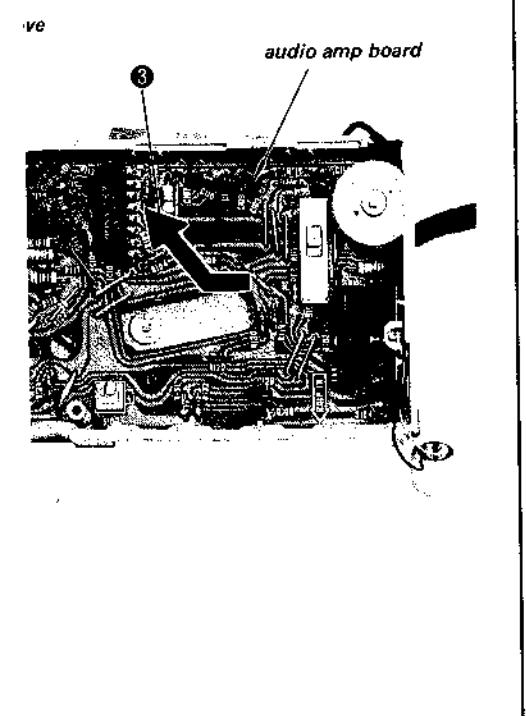


INNER (BOTTOM) SIDE OF THE MECHANICAL SECTION

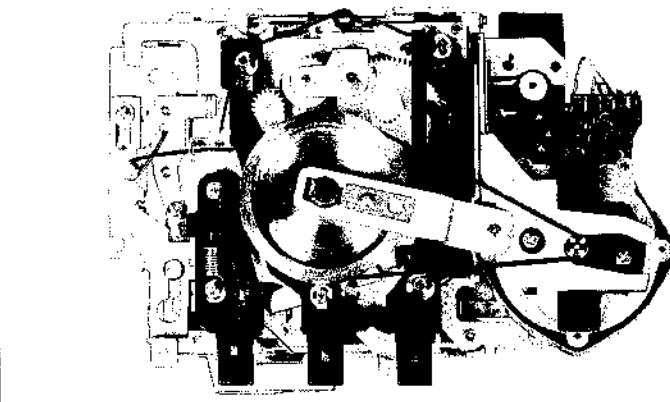

MOTOR SECTION REMOVAL

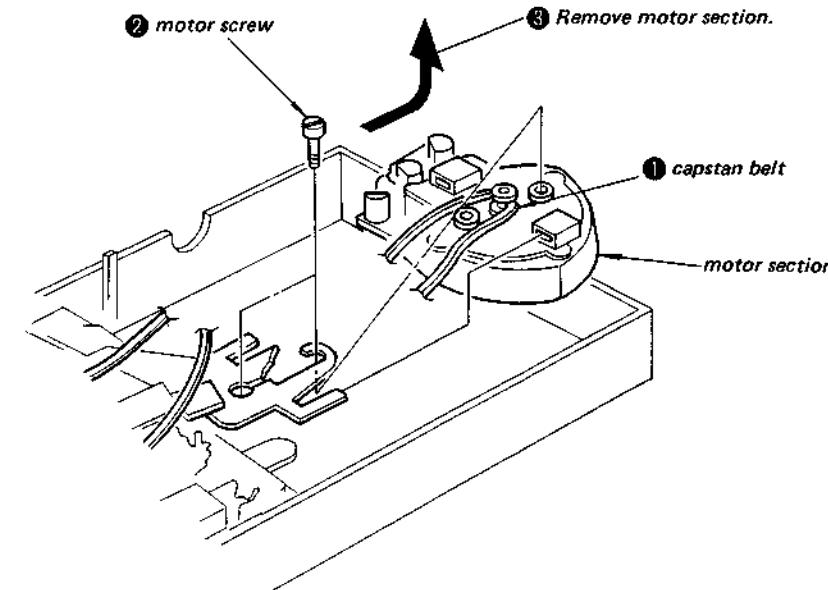

FLYWHEEL REMOVAL

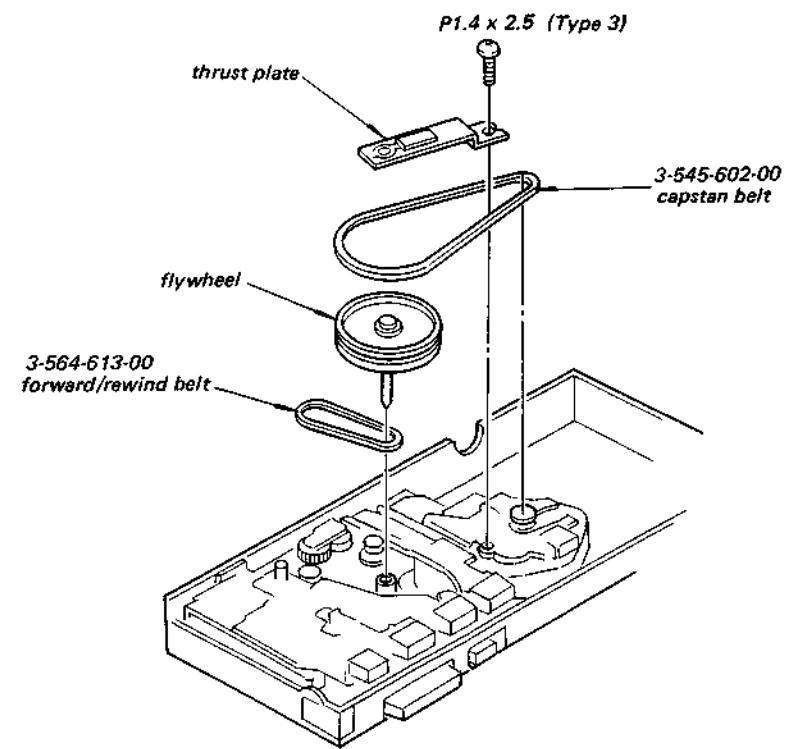

SECTION 3 ADJUSTMENTS

3-1. MECHANICAL ADJUSTMENT

PRECAUTION

1. Clean the following parts with a denatured-alcohol-moistened swab:


record/playback head	pinch roller
erase head	rubber belts
capstan	idle
2. Demagnetize the record/playback head with a head demagnetizer. (Do not bring the head demagnetizer close to the erase head.)
3. Do not use a magnetized screwdriver for the adjustments.
4. After the adjustments, apply suitable locking compound to the parts adjusted.
5. The adjustments should be performed with the rated power supply voltage unless otherwise noted.

Wow and Flutter Measurement

Setting:
 Power supply voltage: 3V dc
 VOLUME control: Set for the adequate input level of the wow meter.
 SPEED switch: 2.4cm

Procedure:

Mode: playback

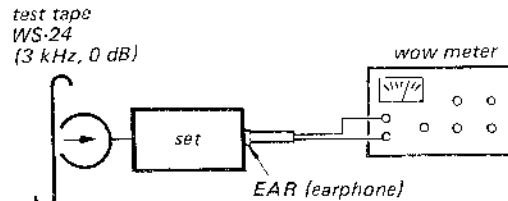

Specification: less than 0.6% (RMS)

3-2. ELECTRICAL ADJUSTMENTS


Tape Speed Adjustment

Setting:

VOLUME control: mechanical mid

Procedure:

Mode: playback

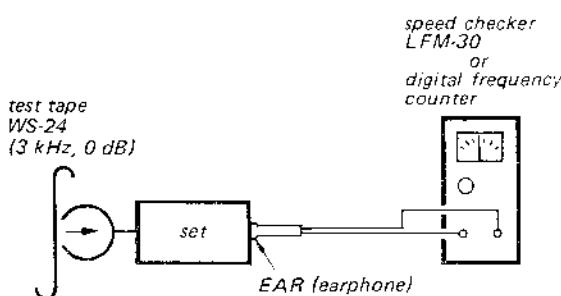


Specification:

Speed checker	Digital frequency counter
-3 ... +3%	2910 - 3090Hz (2.4cm) 1455 - 1545Hz (1.2cm)

Adjust RV102 for 3000Hz at tape speed 2.4cm. Next, adjust RV103 for 1500Hz at tape speed 1.2cm.

Adjustment Location:

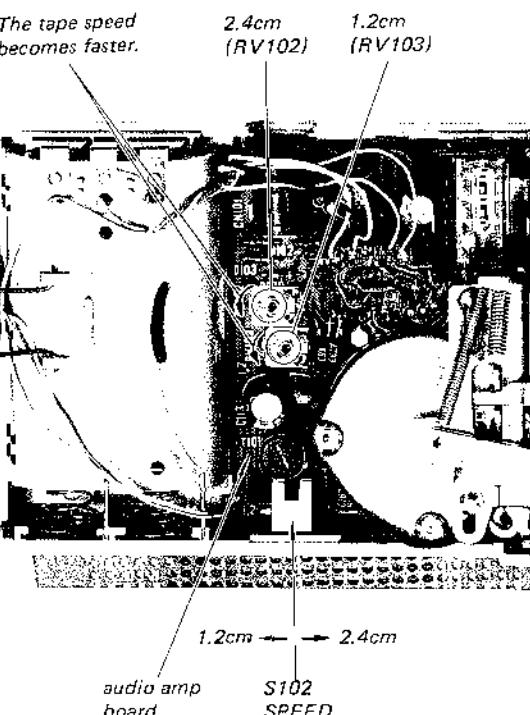


Record/playback Head Azimuth Adjustment

Setting:

VOLUME control: mechanical mid

Procedure:


1. Remove the bushing as shown below.
2. Mode: playback

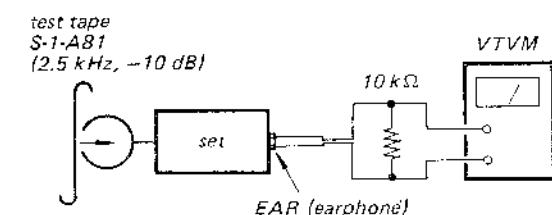

3. Turn the adjustment screw for maximum VTVM reading.

Note: Several peaks may appear, but take the maximum.

Adjustment Location:

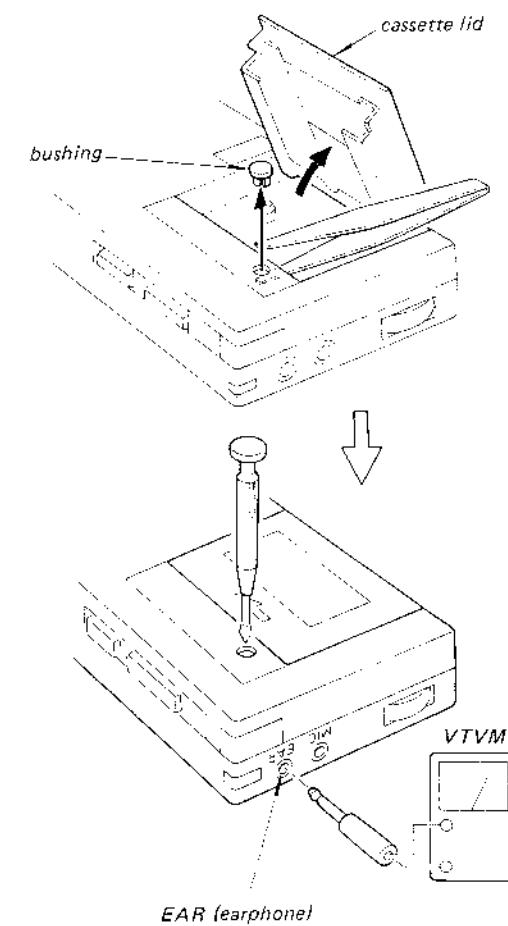


SECTION 4 DIAGRAMS


4-1. MOUNTING DIAGRAM —Conductor Side—

• Replacement Semiconductors

For replacement, use semiconductors except in ().

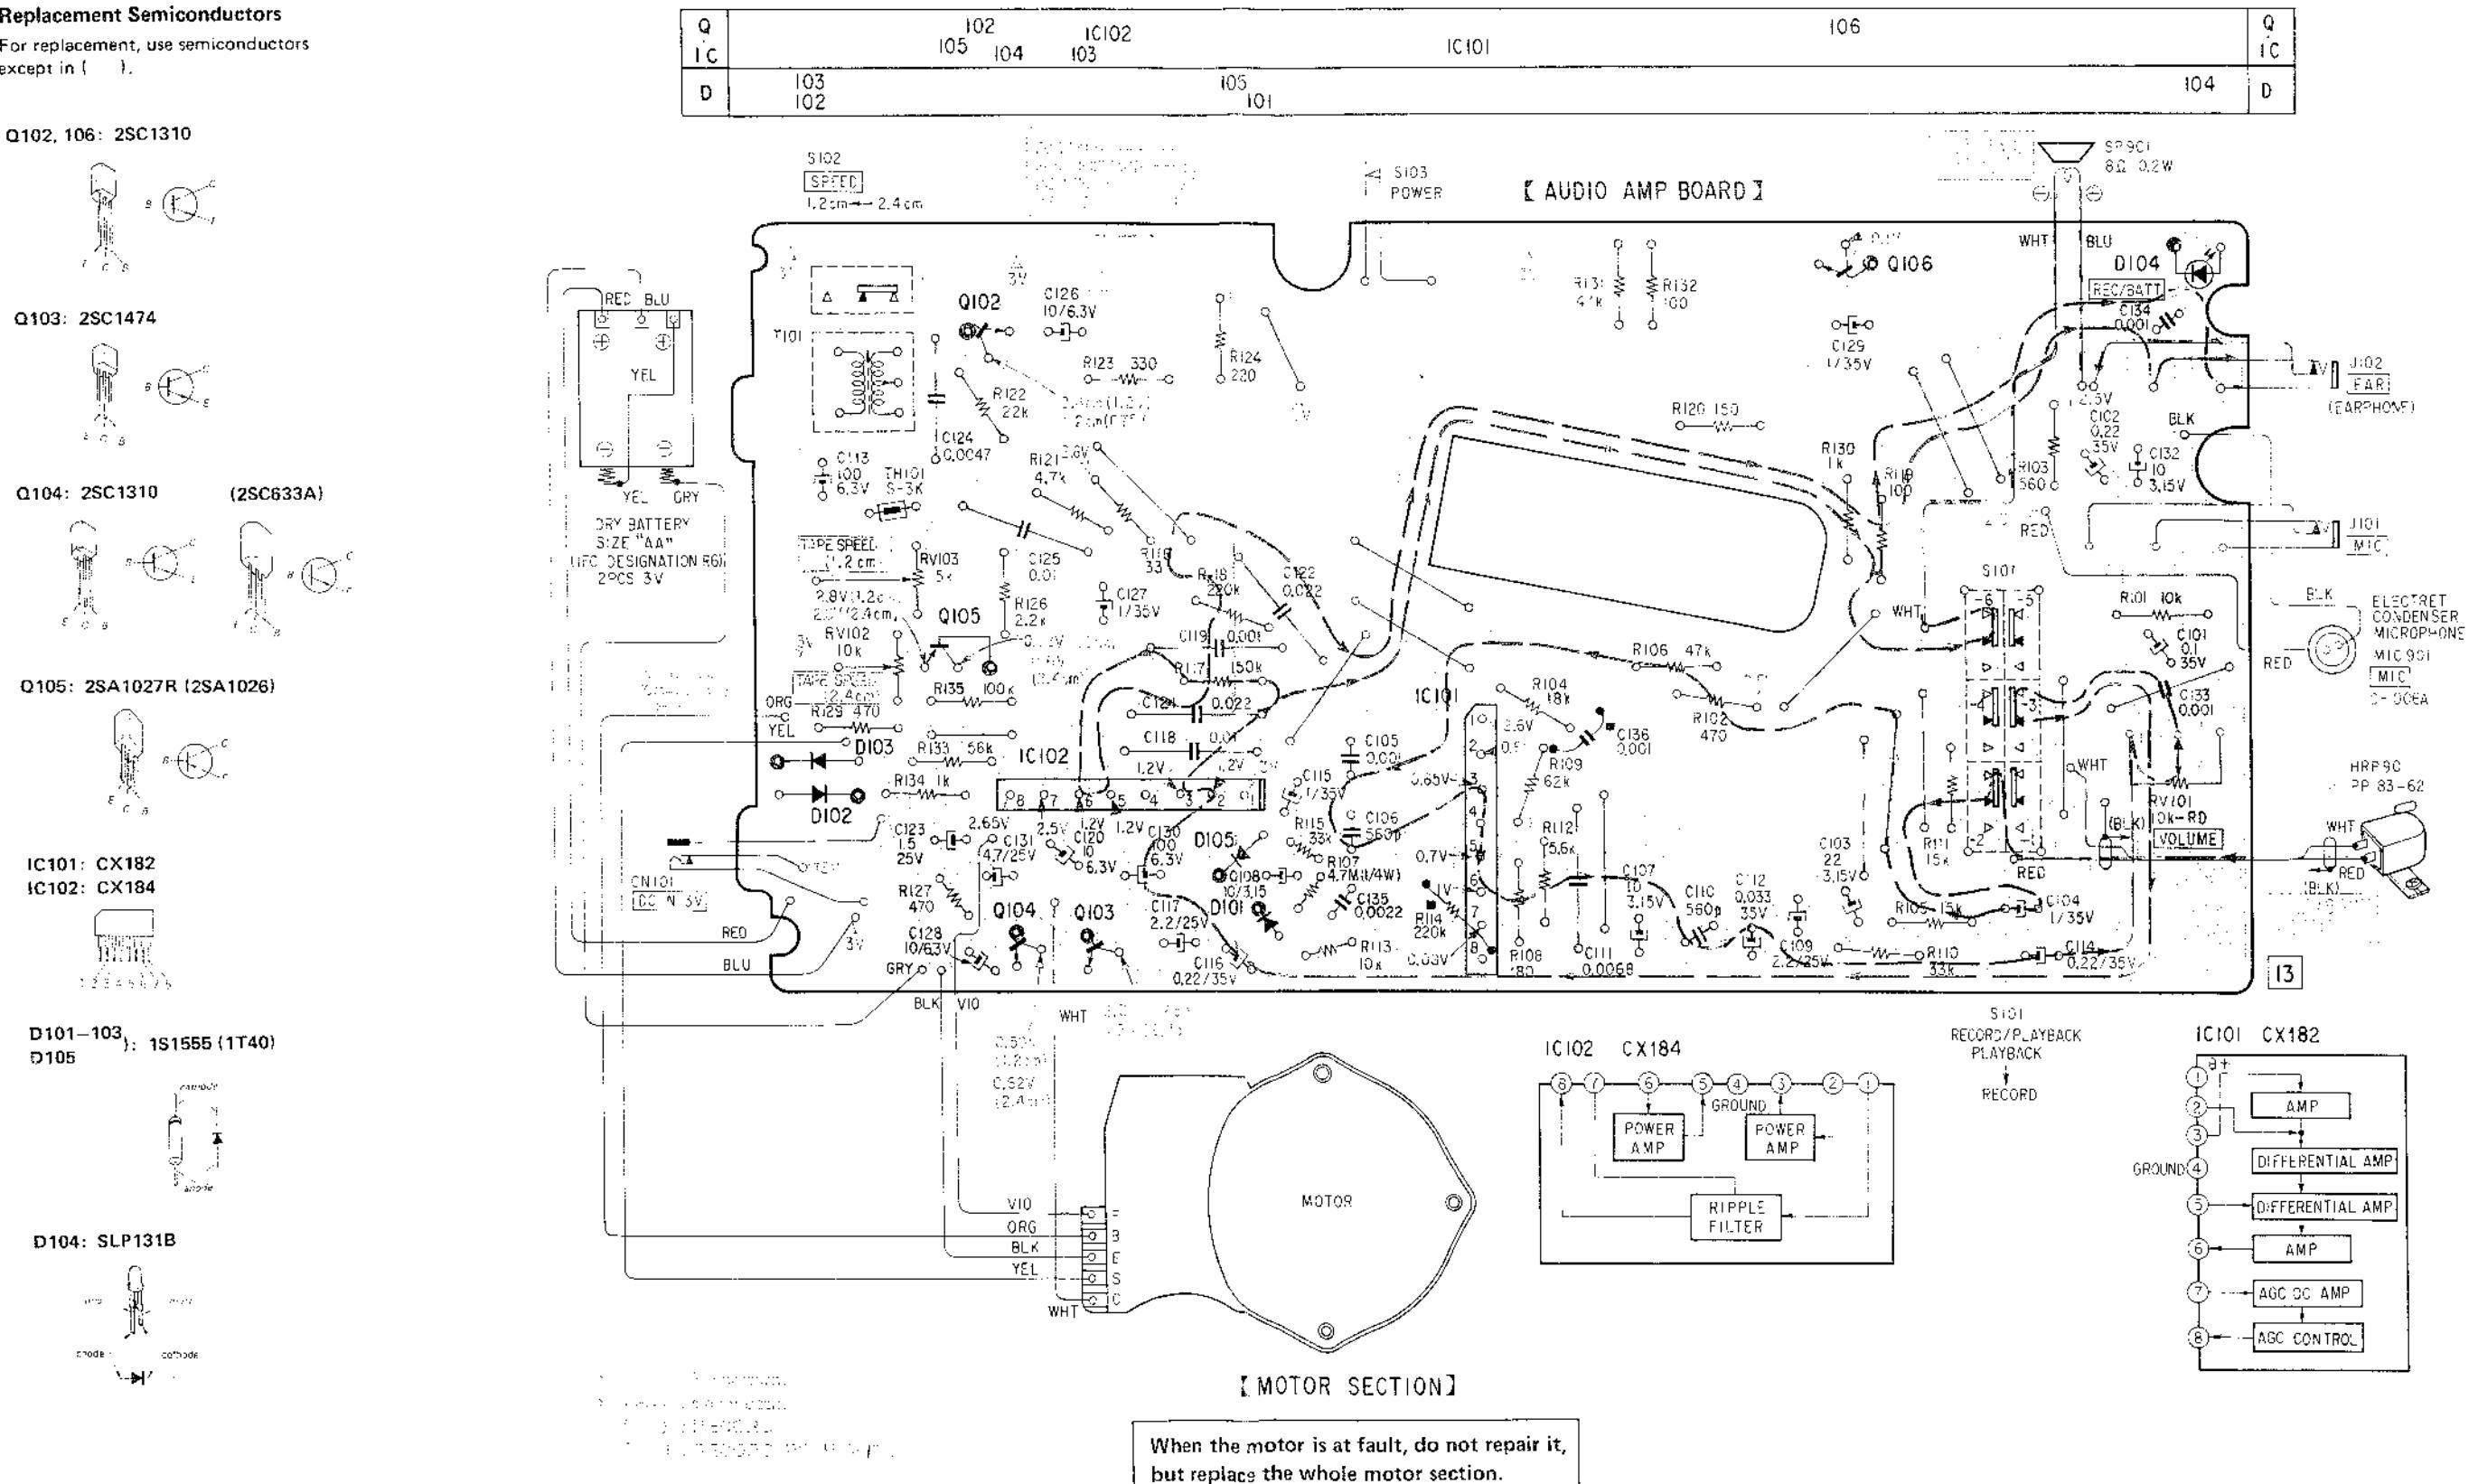

4-2. SCHEMATIC DIAGRAM

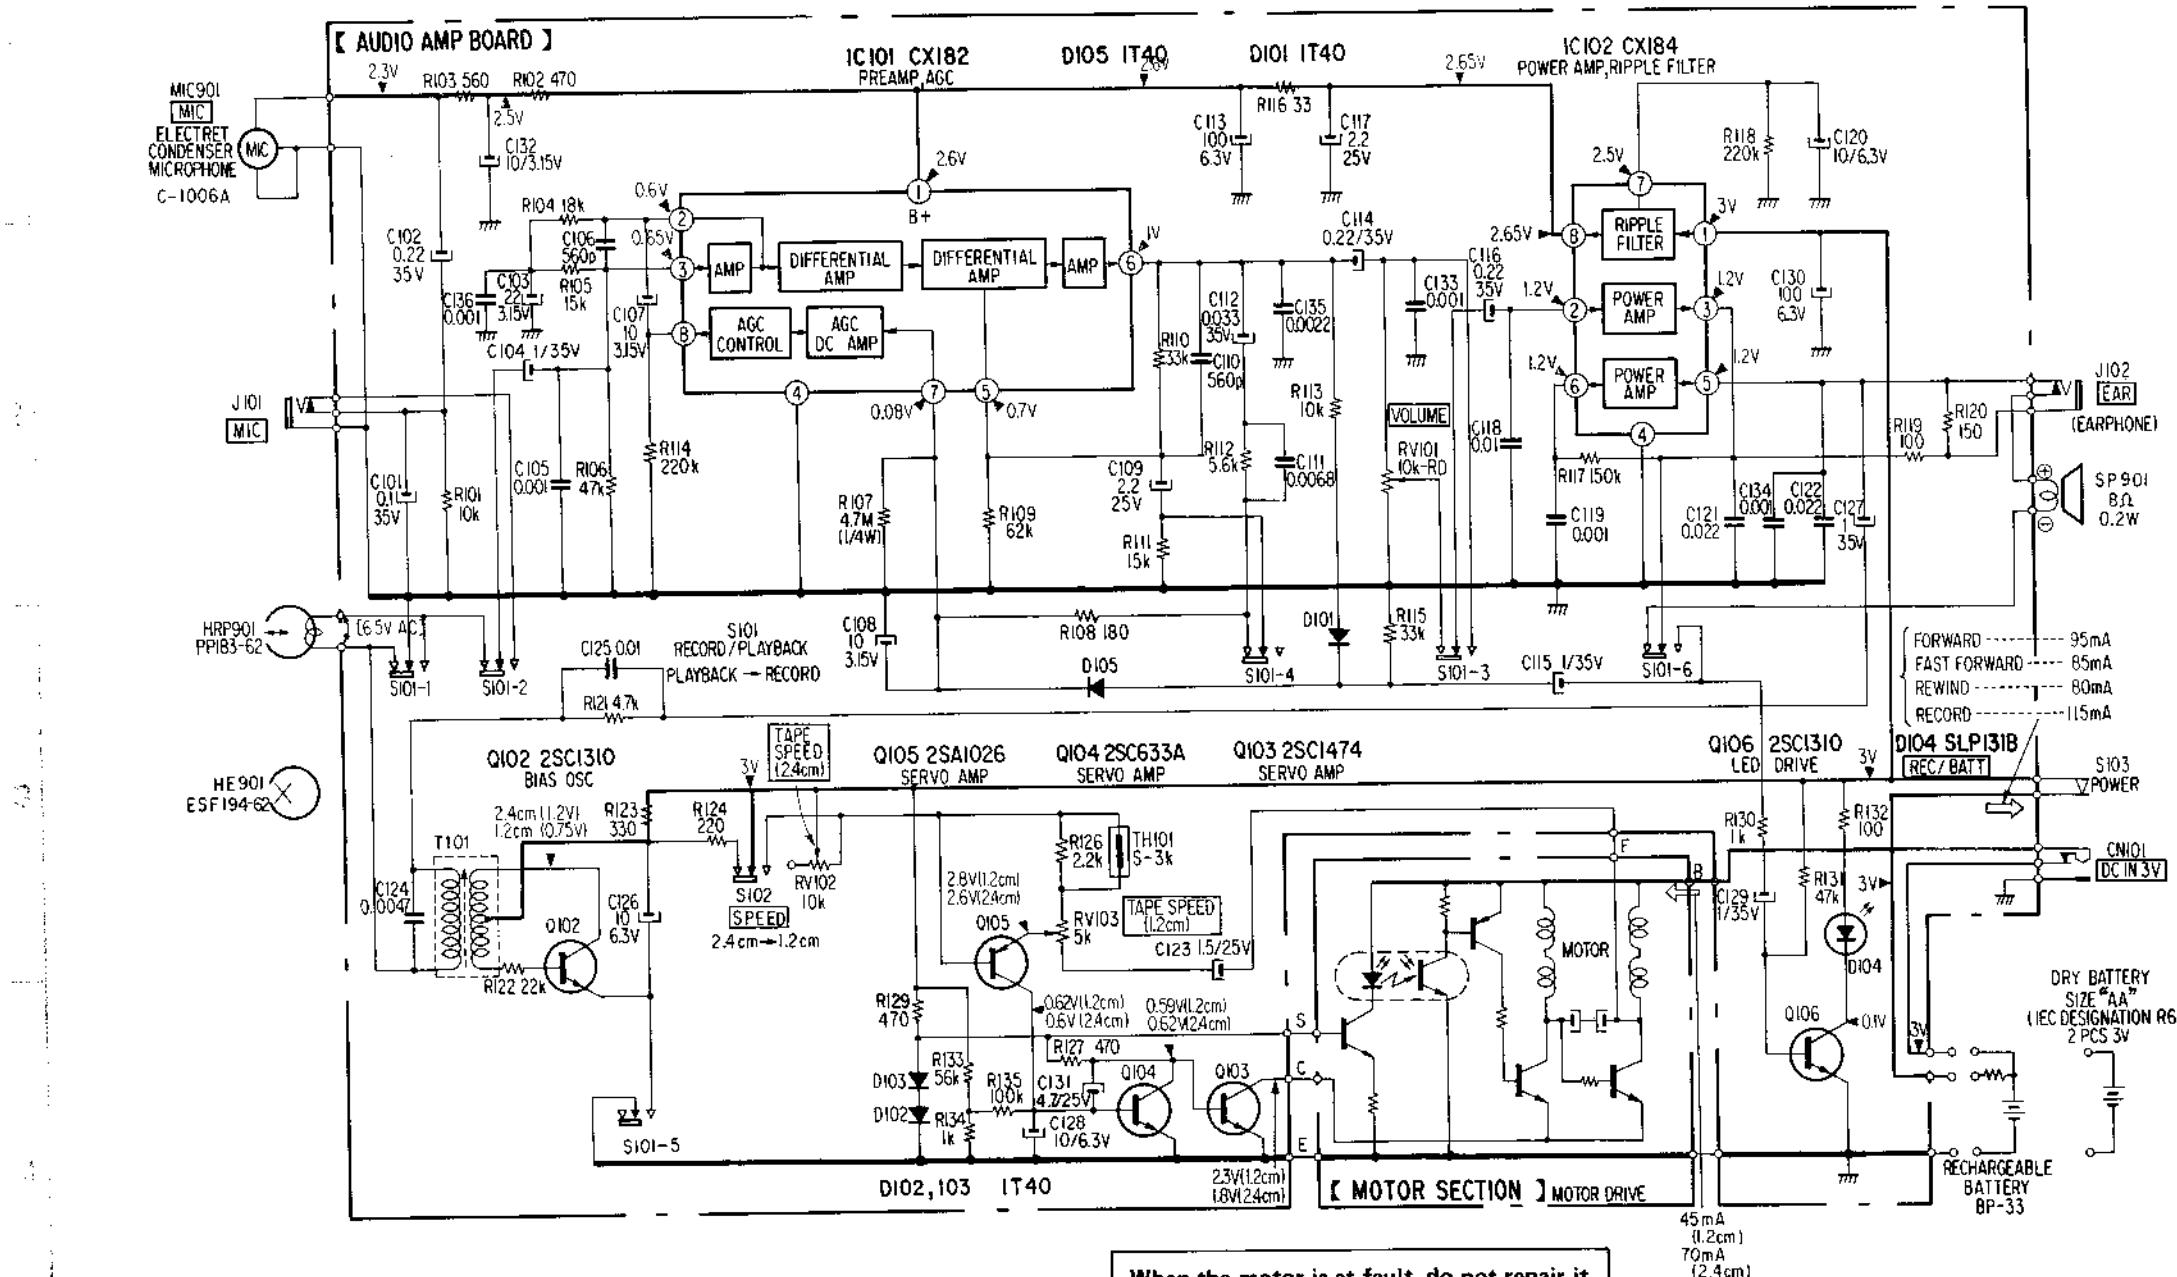

Note:

- All capacitors are in μF unless otherwise noted. pF : $\mu\mu F$ 50WV or less are not indicated except for electrolytics.
- All resistors are in ohms, 1/8W unless otherwise noted. k Ω : 1000 Ω , M Ω : 1000k Ω
- : B+ bus.
- [] : panel designation.
- () : adjustment for repair.
- Voltages are dc with respect to ground unless otherwise noted.
- Readings are taken under no signal conditions with a VOM (20k Ω/V) at 2.4cm/s.
- () : RECORD
- () : RECORD WITH VTVM
- Total current is measured with no cassette installed.
- Switch

Ref. No.	Switch	Position
S101-1 to 101-6	RECORD/PLAYBACK	PLAYBACK
S102	SPEED	2.4cm
S103	POWER	OFF

SECTION 4
EXPLODED VIEWS

DIMENSIONS AND PART NO. OF PRECISION SCREWS

Type	<i>P</i> (Pan-head screw)			<i>K</i> (Flat-countersunk-head screw)		
	d mm	H mm	D mm	d mm	H mm	D mm
Type 1	1.4	0.5	2	1.4	0.45	2
	1.7	0.5	2.5			
	2	0.6	3			
Type 3	1.4	0.8	2.5			
	1.7	0.9	3			
	2	1	3.5			


Type	Size (mm) (d x L)	Part No.
Type 1	K1.4 x 1.6	7-627-451-07
	P1.4 x 3.5	7-627-551-67
	P1.7 x 2.5	7-627-552-07
	P1.7 x 4	7-627-552-47
	P2 x 4.5	7-627-553-67
Type 3	P1.4 x 1.4	7-627-850-37
	P1.4 x 1.6	7-627-850-47
	P1.4 x 2.5	7-627-850-17
	P1.4 x 4	7-627-850-67
	P1.4 x 5	7-627-851-27


HARDWARE NOMENCLATURE

Screw: P 3 x 10
 L: Length in mm
 D: Diameter in mm
 Type of head
 Indicated slotted-head only.
 Unless otherwise indicated, it means cross-recessed head (Phillips type).

Nut, Washer, Retaining ring:
 N 3
 Diameter of usable screw or shaft
 Reference designation

Reference Designation	Shape	Description	Remarks
SCREWS			
P		pan-head screw	binding-head (B) screw for replacement
PWH		pan-head screw with washer face	binding-head (B) screw and flat washer for replacement
PS PSP		pan-head screw with spring washer	binding-head (B) screw and spring washer for replacement
PSW PSPW		pan-head screw with spring and flat washers	binding-head (B) screw and spring and flat washers for replacement
R		round-head screw	binding-head (B) screw for replacement
K		flat-countersunk-head screw	
RK		oval-countersunk-head screw	
B		binding-head screw	
T		truss-head screw	binding-head (B) screw for replacement
F		flat-filister-head screw	
RF		filister-head screw	
BV		brazier-head screw	
SET SCREWS			
SC		set screw	
SC		hexagon socket set screw	ex: SC 2 6 x 4, hexagon socket
NUT			
N		nut	
WASHERS			
W		flat washer	
SW		spring washer	
LW		internal-tooth lock washer	ex: LW3, internal
LW		external-tooth lock washer	ex: LW3, external
RETAINING RINGS			
E		retaining ring	
G		grip-type retaining ring	

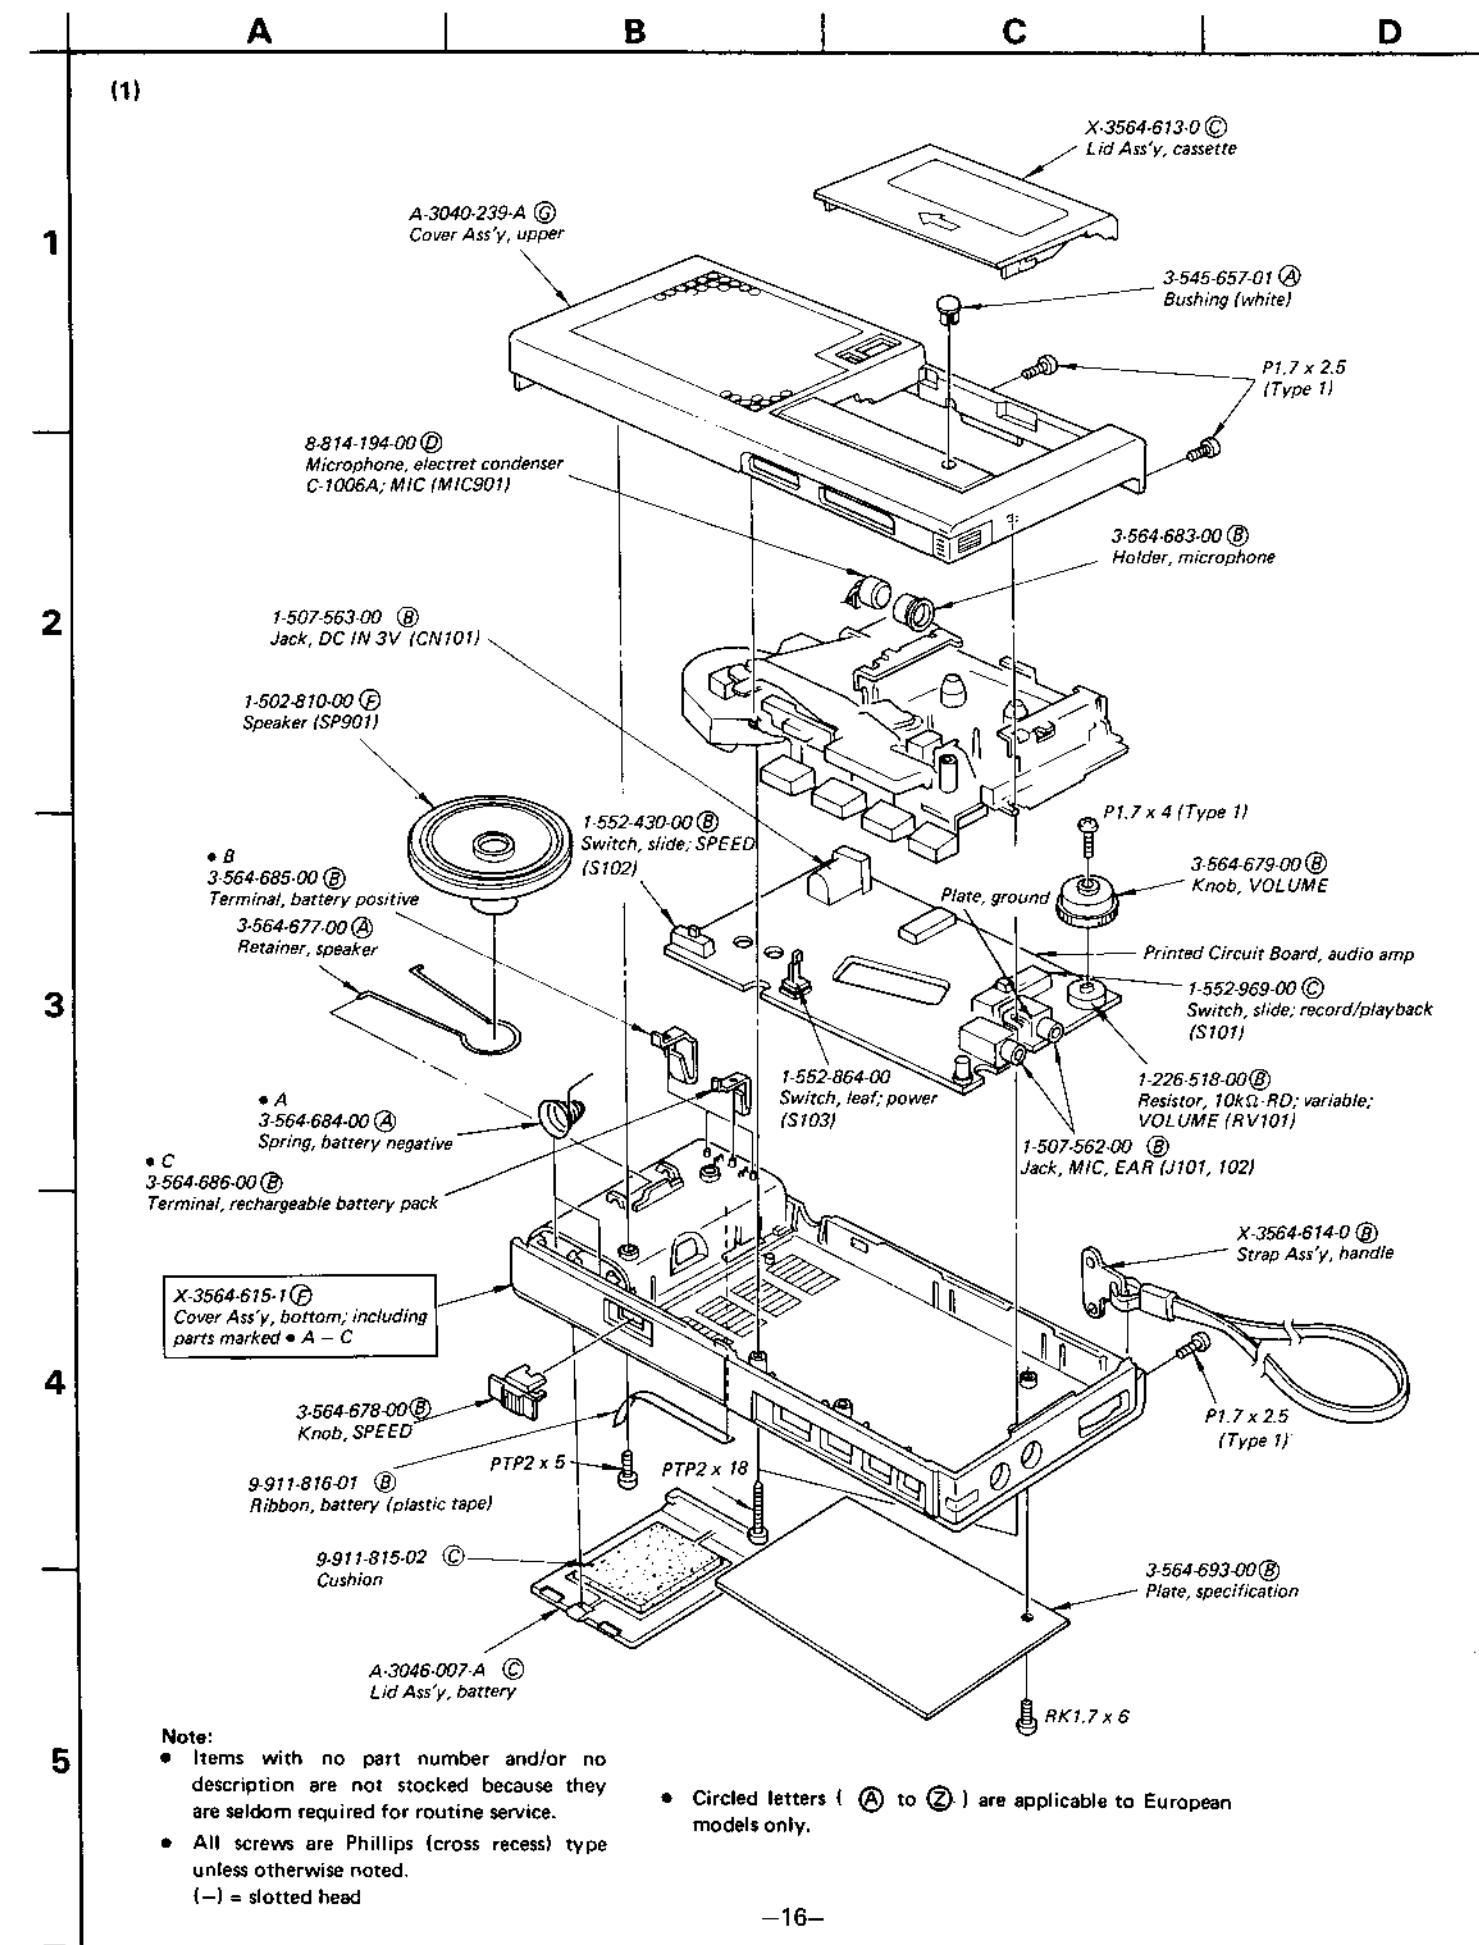

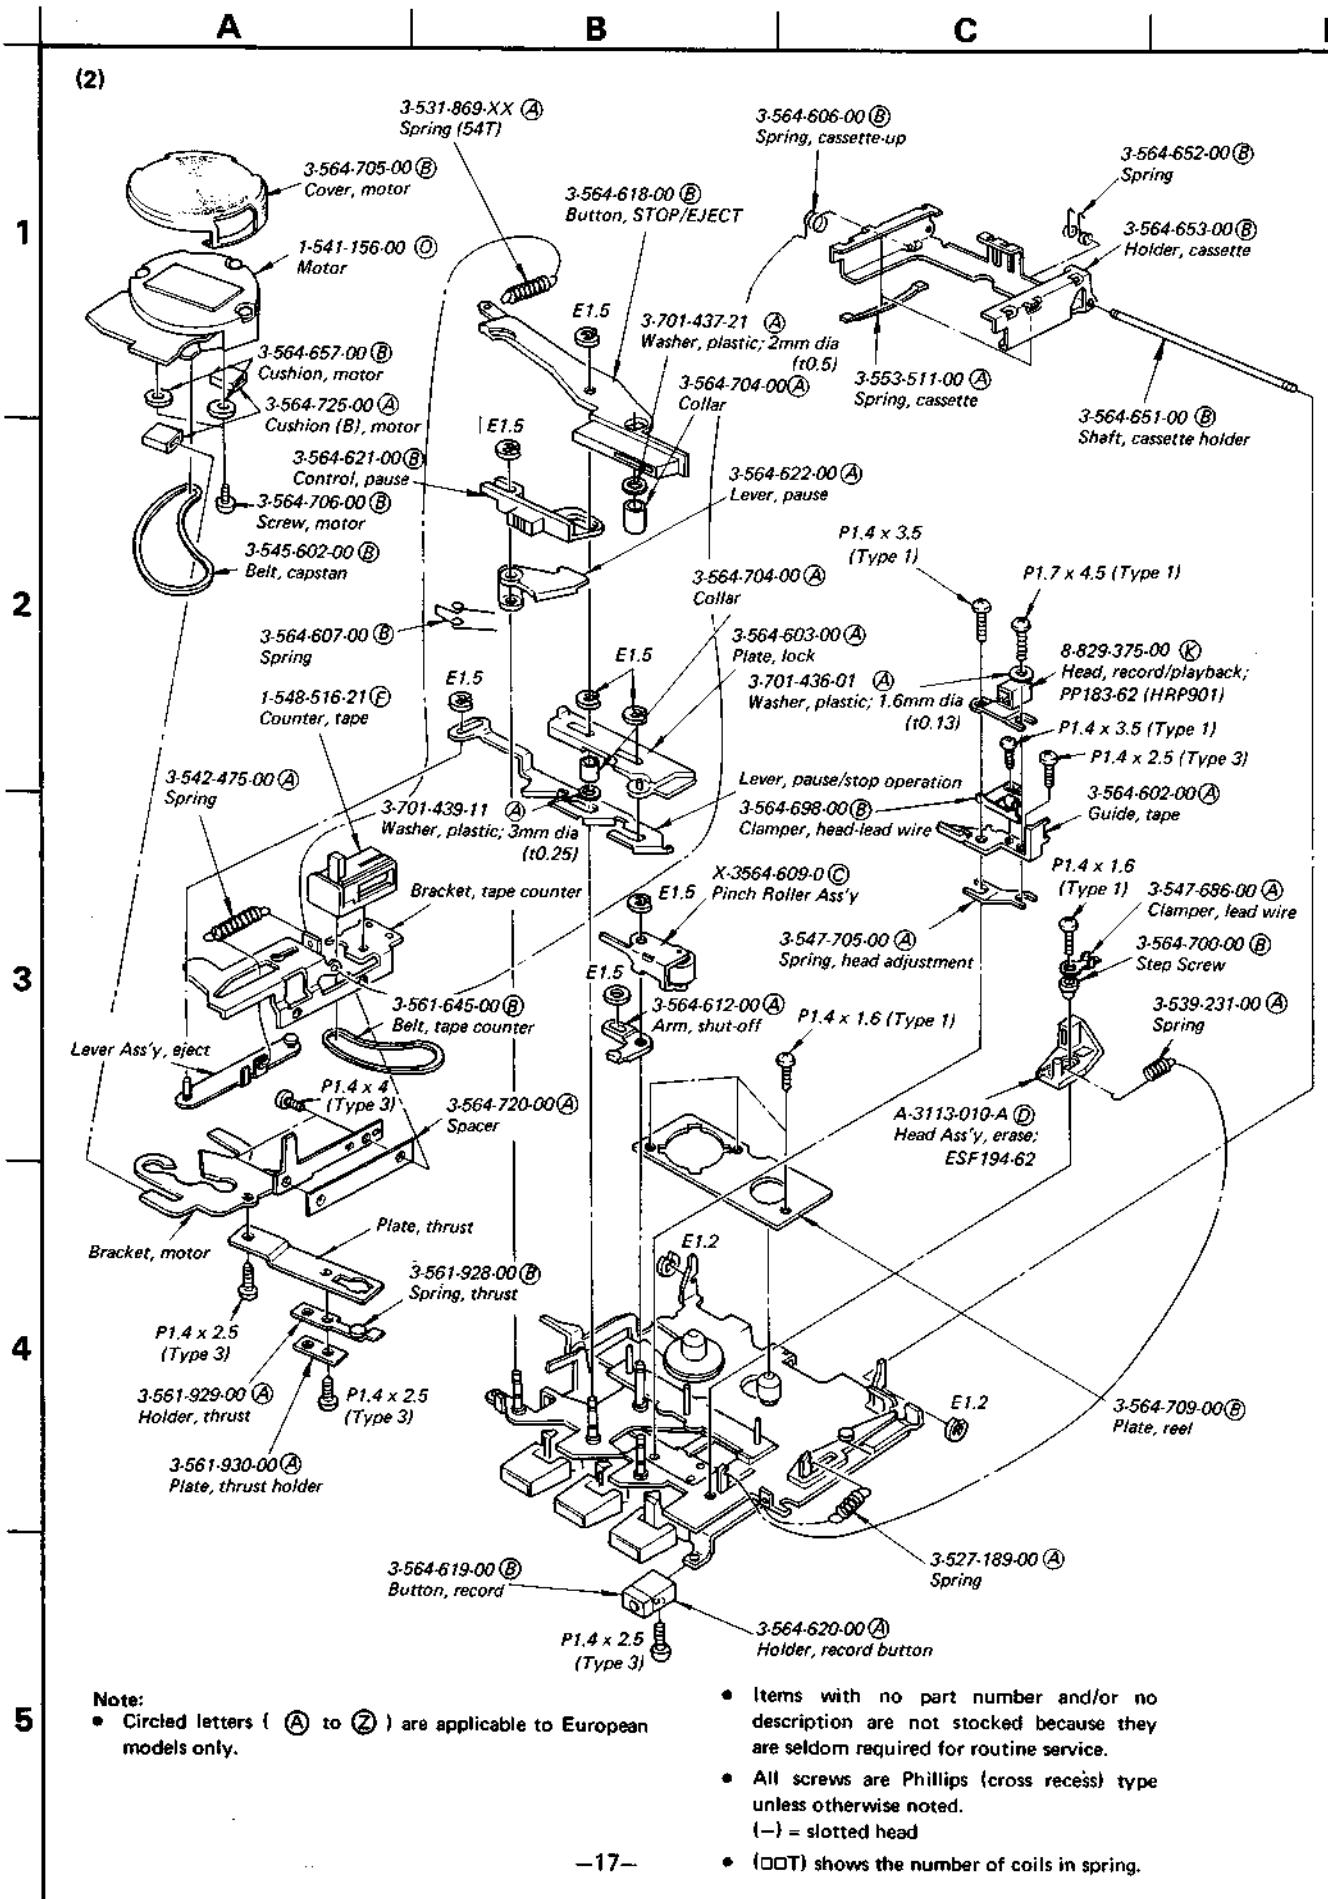

A


B

c

D

(3)

- Circled letters (**A** to **Z**) are applicable to European models only.

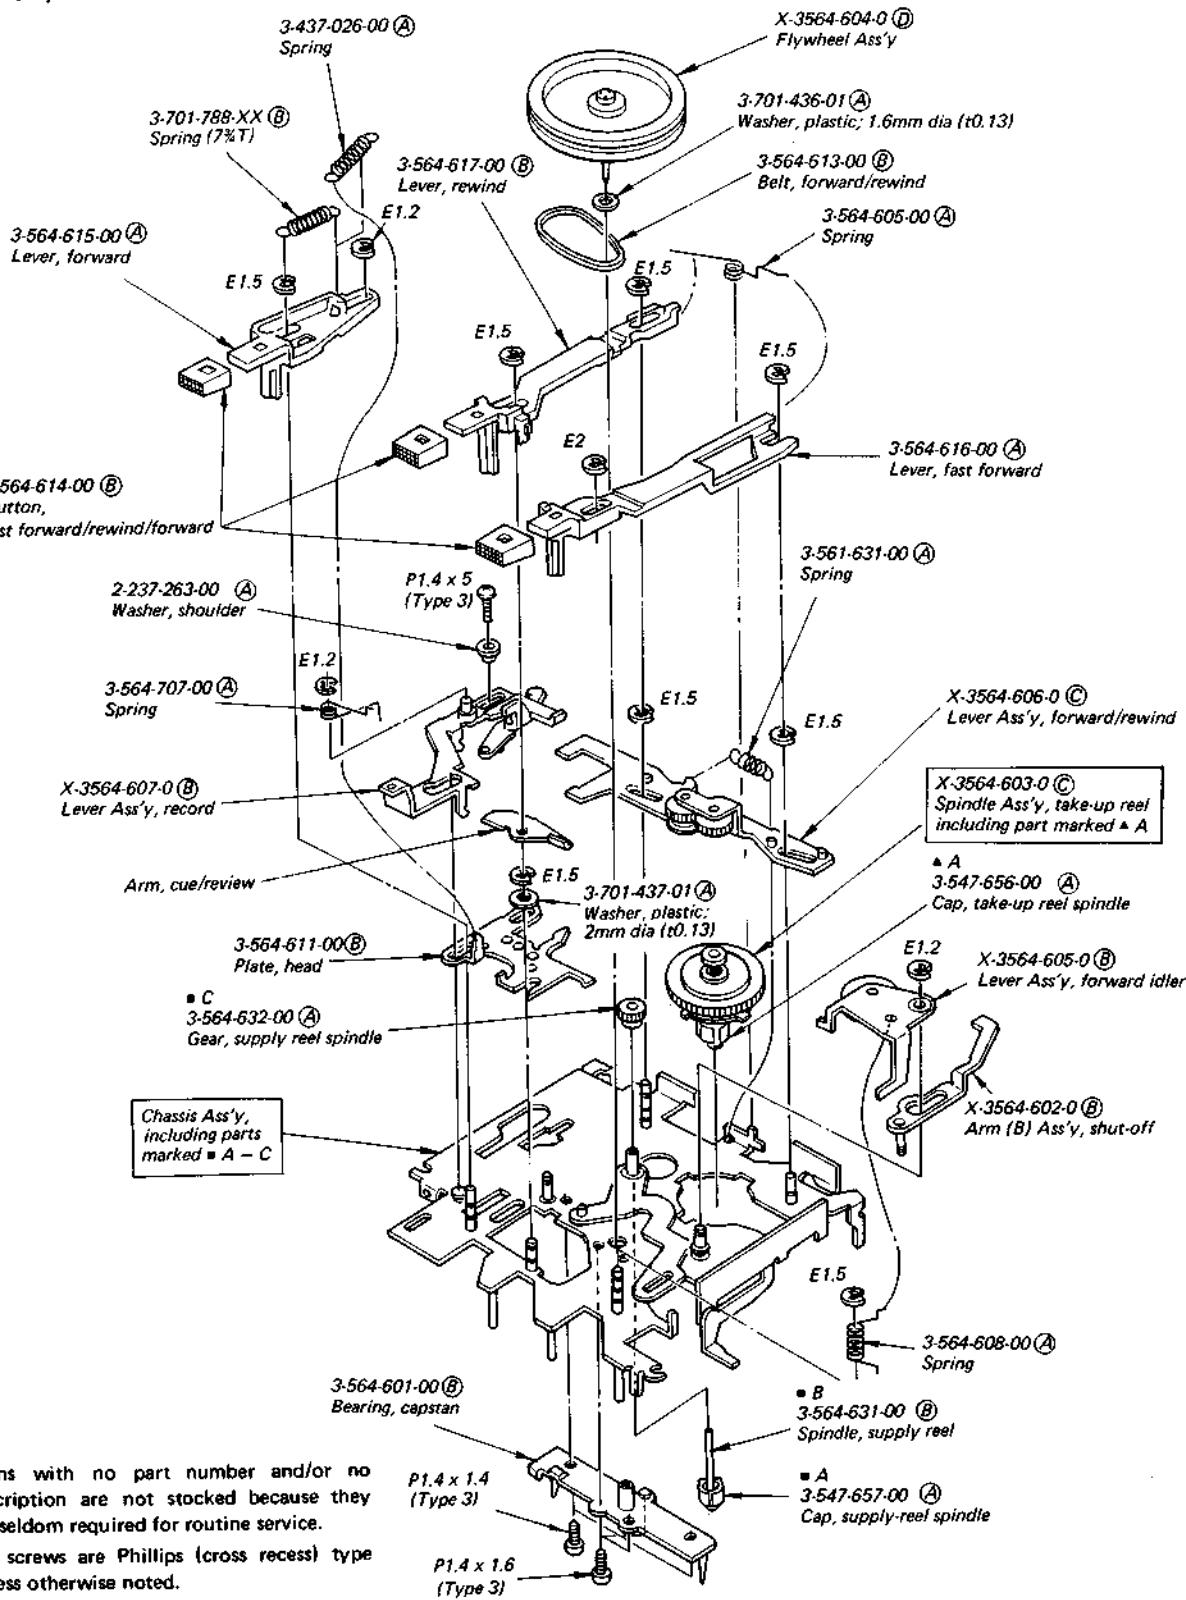

5

Note:

- Items with no part number and/or no description are not stocked because they are seldom required for routine service.
 - All screws are Phillips (cross recess) type unless otherwise noted.
(-) = slotted head
 - (□□T) shows the number of coils in spring.

P1.4 x 1.4
(Type 3)

P1.4 x 1.6
(Type 3)

■ A
3-547-657-00 Cap, supply-reel spindle

SECTION 6 ELECTRICAL PARTS LIST

• Circled letters (Ⓐ to Ⓛ) are applicable to European models only.

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>			<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>								
SEMICONDUCTORS															
Transistors															
Q102	8-729-631-02	(B)	2SC1310		C119	1-161-323-00	(A)	0.001							
Q103	8-760-335-10	(B)	2SC1474		C120	1-131-383-00	(B)	10	6.3V						
⇒ Q104	8-729-631-02	(B)	2SC1310		C121, 122	1-161-494-00	(B)	0.022	tantalum						
⇒ Q105	8-729-612-77	(B)	2SA1027R		C123	1-131-354-00	(A)	1.5	25V						
Q106	8-729-631-02	(B)	2SC1310		C124	1-161-047-11	(A)	0.0047	(semiconductor)						
ICs															
IC101	8-751-820-00	(F)	CX182		C125	1-161-379-00	(A)	0.01							
IC102	8-751-840-00	(F)	CX184		C126	1-131-383-00	(B)	10	6.3V						
Diodes															
⇒ D101-103	8-719-815-55	(B)	1S1555		C127	1-131-347-00	(B)	1	35V						
D104	8-719-901-31	(B)	SLP131B		C128	1-131-383-00	(B)	10	6.3V						
⇒ D105	8-719-815-55	(B)	1S1555		C129	1-131-347-00	(B)	1	tantalum						
TH101	1-800-200-00	(B)	Thermistor S-3K		C130	1-123-295-00	(B)	100	6.3V						
CAPACITORS															
All capacitors are in μF and ceramic unless otherwise noted. 50WV or less are not indicated except for electrolytics and tantalum. p : $\mu\mu\text{F}$, elect : electrolytic															
C101	1-131-341-00	(B)	0.1	35V	tantalum	C131	1-123-328-00	(B)	4.7	25V					
C102	1-131-343-00	(B)	0.22	35V	tantalum	C132	1-131-389-00	(B)	10	3.15V					
C103	1-131-391-00	(B)	22	3.15V	tantalum	C133, 134	1-102-074-00	(A)	0.001						
C104	1-131-347-00	(B)	1	35V	tantalum	C135	1-161-017-00	(A)	0.0022	(semiconductor)					
C105	1-101-001-00	(A)	0.001		C136	1-102-074-00	(A)	0.001							
C106	1-102-115-00	(A)	560p		RESISTORS										
C107, 108	1-131-389-00	(B)	10	3.15V	R101	1-246-795-00	(A)	10k	1/8W						
C109	1-131-355-00	(B)	2.2	25V	R102	1-246-779-00	(A)	470	1/8W						
C110	1-102-115-00	(A)	560p		R103	1-246-780-00	(A)	560	1/8W						
C111	1-161-049-11	(A)	0.0068	(semiconductor)	R104	1-246-798-00	(A)	18k	1/8W						
C112	1-131-399-00	(B)	0.033	35V	R105	1-246-797-00	(A)	15k	1/8W						
C113	1-123-295-00	(B)	100	6.3V	R106	1-246-803-00	(A)	47k	1/8W						
C114	1-131-343-00	(B)	0.22	35V	R107	1-202-471-21	(A)	4.7M	1/8W						
C115	1-131-347-00	(B)	1	35V	R108	1-246-774-00	(A)	180	1/8W						
C116	1-131-343-00	(B)	0.22	35V	R109	1-246-865-00	(A)	62k	1/8W						
C117	1-131-355-00	(B)	2.2	25V	R110	1-246-801-00	(A)	33k	1/8W						
C118	1-161-379-00	(A)	0.01		R111	1-246-797-00	(A)	15k	1/8W						
All resistors are in ohms and carbon unless otherwise noted.															
composition															
R112	1-246-792-00	(A)	5.6k		R112	1-246-792-00	(A)	5.6k	1/8W						
R113	1-246-795-00	(A)	10k		R113	1-246-795-00	(A)	10k	1/8W						
R114	1-246-811-00	(A)	220k		R114	1-246-811-00	(A)	220k	1/8W						
R115	1-246-801-00	(A)	33k		R115	1-246-801-00	(A)	33k	1/8W						
R116	1-246-765-00	(A)	33		R116	1-246-765-00	(A)	33	1/8W						
R117	1-246-809-00	(A)	150k		R117	1-246-809-00	(A)	150k	1/8W						
R118	1-246-811-00	(A)	220k		R118	1-246-811-00	(A)	220k	1/8W						
R119	1-246-771-00	(A)	100		R119	1-246-771-00	(A)	100	1/8W						
R120	1-246-773-00	(A)	150		R120	1-246-773-00	(A)	150	1/8W						
R121	1-246-791-00	(A)	4.7k		R121	1-246-791-00	(A)	4.7k	1/8W						

- ⇒: Due to standardization, interchangeable replacements may be substituted for parts specified in the diagrams.

- Circled letters (Ⓐ to Ⓛ) are applicable to European models only.

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	
R122	1-246-799-00	Ⓐ 22k	1/8W
R123	1-246-777-00	Ⓐ 330	1/8W
R124	1-246-775-00	Ⓐ 220	1/8W
R125, 126	1-246-787-00	Ⓐ 2.2k	1/8W
R127	1-246-779-00	Ⓐ 470	1/8W
R129	1-246-779-00	Ⓐ 470	1/8W
R130	1-246-783-00	Ⓐ 1k	1/8W
R131	1-246-803-00	Ⓐ 47k	1/8W
R132	1-246-771-00	Ⓐ 100	1/8W
R133	1-246-804-00	Ⓐ 56k	1/8W
R134	1-246-783-00	Ⓐ 1k	1/8W
R135	1-246-807-00	Ⓐ 100k	1/8W
RV101	1-226-518-00	Ⓑ 10k-RD, variable; VOLUME	
RV102	1-226-529-00	Ⓑ 10k-B, adjustable; tape speed 2.4cm	
RV103	1-226-528-00	Ⓑ 5k-B, adjustable; tape speed 1.2cm	
SWITCHES			
S101	1-552-969-00	Ⓒ Slide, record/playback	
S102	1-552-430-00	Ⓓ Slide, SPEED	
S103	1-552-864-00	Ⓓ Leaf, power	
MISCELLANEOUS			
CN101	1-507-563-00	Ⓑ Jack, DC IN 3V	
HE901	A-3113-010-A	Ⓓ Head Ass'y, erase; ESF194-62	
HRP901	8-829-375-00	Ⓚ Head, record/playback; PP183-62	
J101, 102	1-507-562-00	Ⓑ Jack, MIC, EAR	
MIC901	8-814-194-00	Ⓓ Microphone, electret condenser	
SP901	1-502-810-00	Ⓕ Speaker	
T101	1-433-207-00	Ⓑ Transformer, OSC	
	1-541-156-00	Ⓖ Motor	

ACCESSORIES & PACKING MATERIALS

<u>Part No.</u>	<u>Description</u>
X-3701-105-0	Ⓐ Tip Ass'y, head cleaning
1-504-075-00	Ⓑ Earphone
1-506-309-00	Plug, shorting; SP-100 (US, Canadian model)
1-528-027-11	Battery, dry; SIZE "AA" (US, Canadian, E model)
3-564-694-00	Ⓑ Bag, protection
3-564-714-00	Ⓑ Carton
3-564-731-00	Ⓔ Case, carrying
3-701-620-00	Ⓐ Bag, plastic
3-701-624-00	Ⓐ Bag, plastic (US, Canadian, UK model)
3-770-797-11	Ⓑ Manual, instruction (AEP, UK, Canadian, E model)
3-770-797-21	Manual, instruction (US model)
3-794-006-21	Ⓑ Card, micro cassette recorder caution
3-794-233-21	Ⓐ Leaflet (US model)
8-891-113-00	Ⓖ Tape, micro cassette; MC-60 (J) (UK, Canadian model)
8-891-117-00	Ⓖ Tape, micro cassette; MC-60 (E) (US, AEP, E model)

MICRO CASSETTE-CORDER MICRO MAGNETO-CASSETTE

M-203

M-203

AEP Model

Serial No. 41801 and later

UK Model

Serial No. 29301 and later

E Model

Serial No. 43801 and later

US Model

Serial No. 49426 and later

Canadian Model

Serial No. 26801 and later

No. 1

August, 1980

Modèle AEP

A partir du numéro de série 41801

Modèle UK

A partir du numéro de série 29301

Modèle E

A partir du numéro de série 43801

Modèle US

A partir du numéro de série 49426

Modèle Canadien

A partir du numéro de série 26801

Nº 1

Août, 1980

SUPPLEMENT

This supplement updates the service manual to include production changes.

File this supplement with the service manual.

Subject: Changes of Circuit and Circuit Board


Ce supplément met à jour le manuel de service en incluant les changements de production.

Classer ce supplément avec le manuel de service.


Sujet: Modification du circuit et de la plaquette circuit

SEMICONDUCTOR LEAD LAYOUT SEMICONDUCTEURS


2SC1310




2SC1474




ZSC633A




2SC1364




2SA1026 2SA1027R




1T40 1S1555



SLP131B



CX182
CX184



AEP Model
Serial No. 41801 and later
UK Model
Serial No. 29301 and later
E Model
Serial No. 43801 and later

US Model
Serial No. 49426 and later
Canadian Model
Serial No. 26801 and later

M-203 M-203

Modèle AEP
A partir du numéro de série 41801
Modèle UK
A partir du numéro de série 29301
Modèle E
A partir du numéro de série 43801

Modèle US
A partir du numéro de série 49426
Modèle Canadien
A partir du numéro de série 26801



A | B | C | D | E | F | G | H

MOUNTING DIAGRAM


— Conductor Side —

DIAGRAMME DE MONTAGE

— Côté Conducteur —

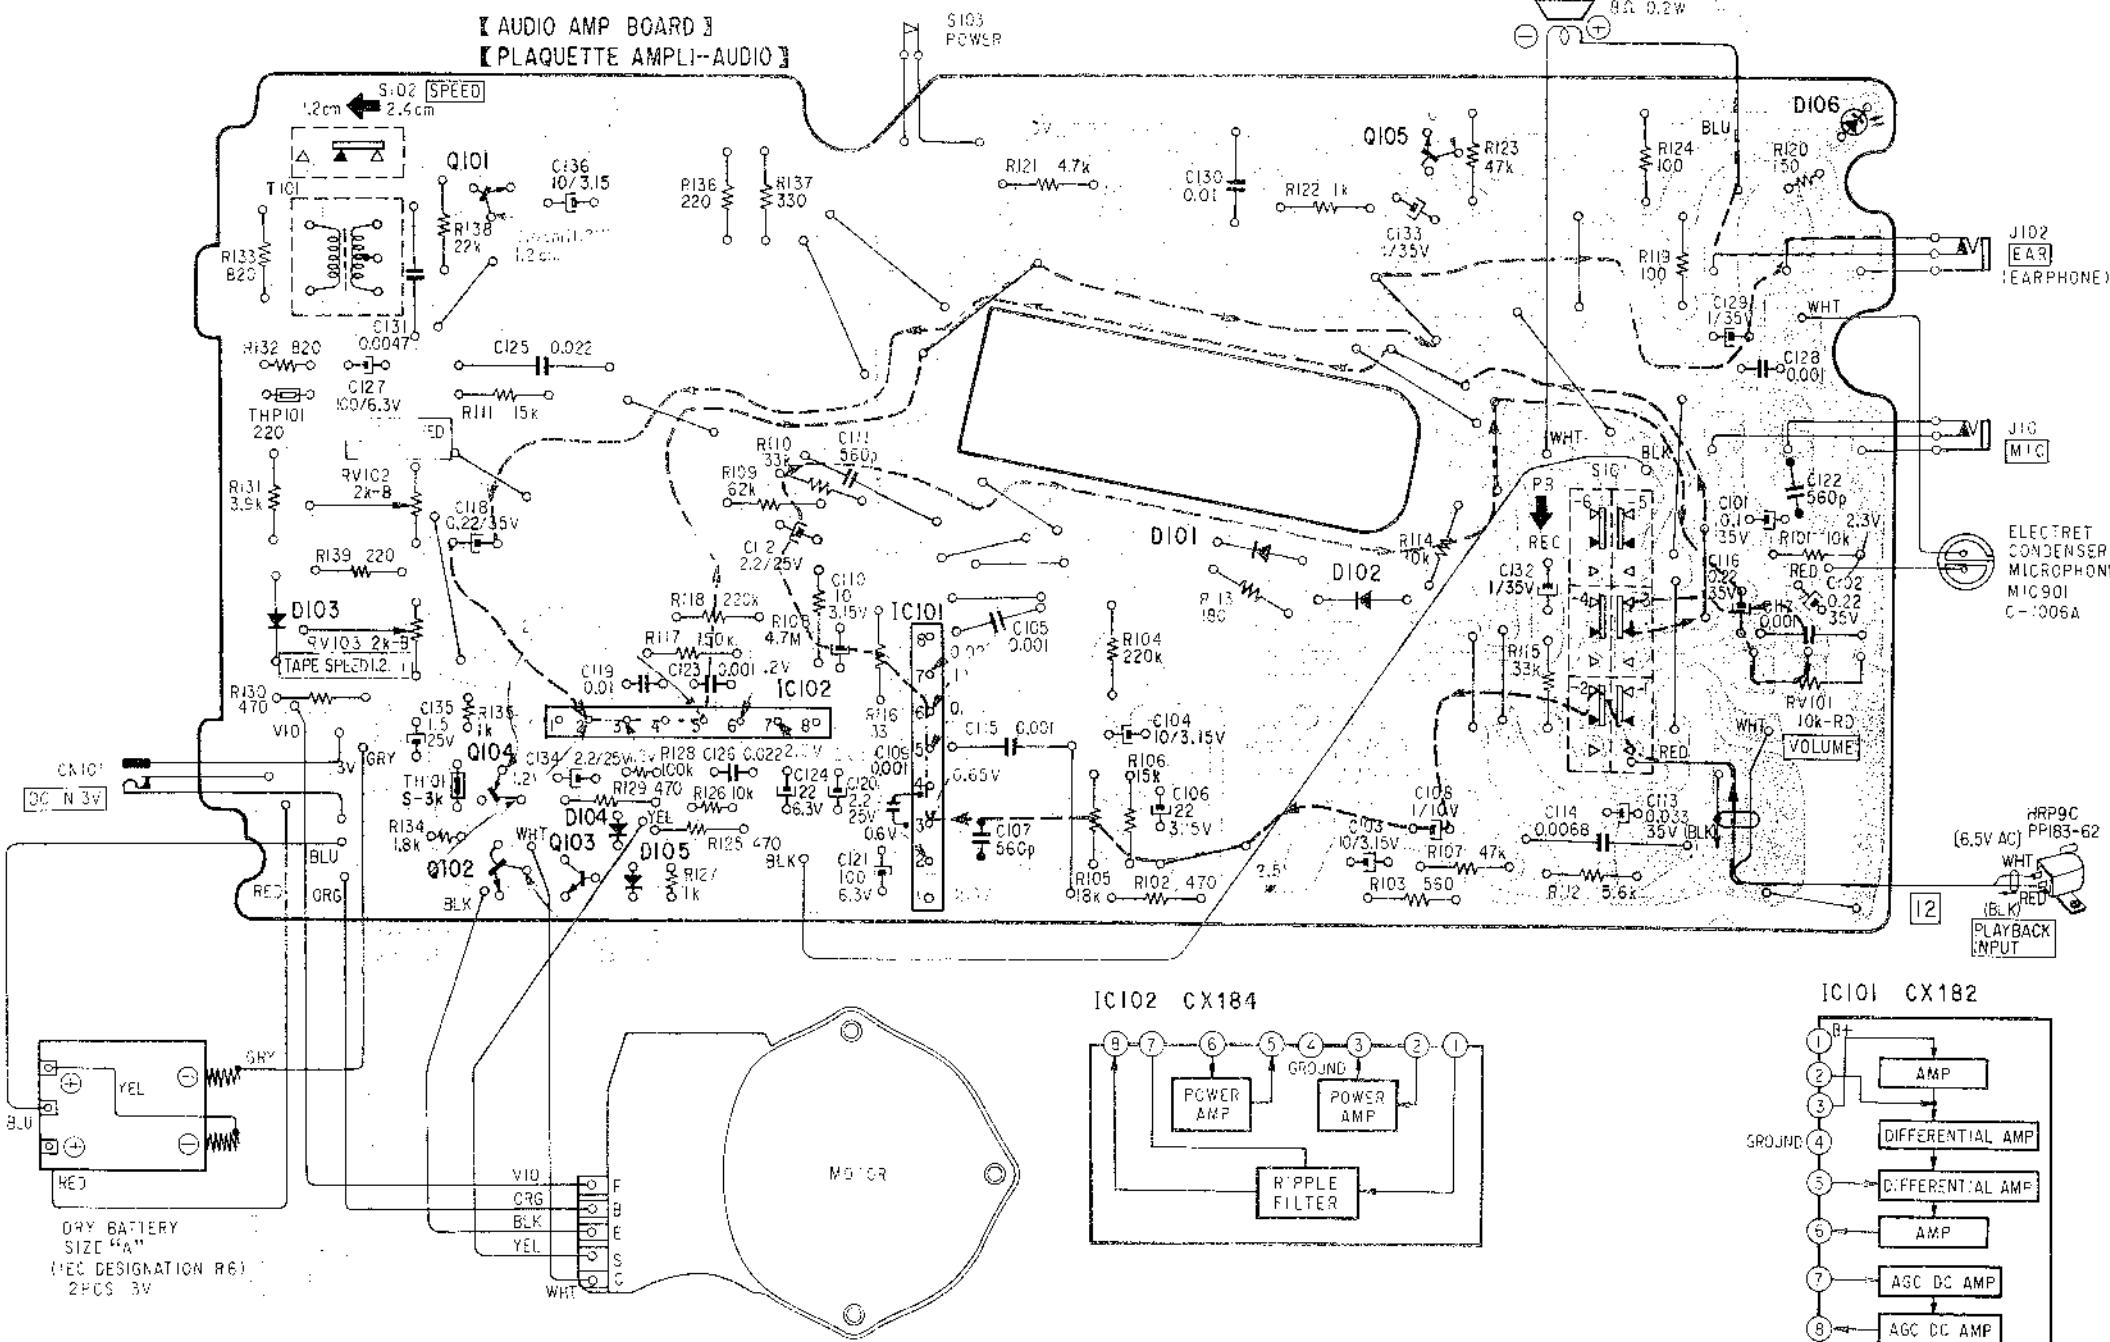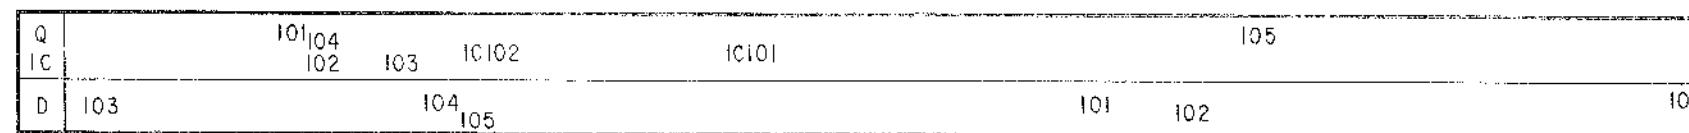

Note:



DRY BATTERY
SIZE "A"
(IEC DESIGNATION R6)
2PCS 3V


MOTOR SECTION

When the motor does not operate properly,
do not repair it, but replace the whole
motor section.

[MOTOR SECTION] [PARTIE MOTEUR]

MOTOR SECTION


IC102 CX184

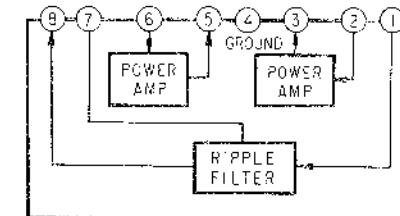

PARTIE MOTEUR

Lorsque le moteur est en panne, ne pas le
dépanner, mais le remplacer entièrement.

IC101 CX182



AEP Model
Serial No. 41801 and later
UK Model
Serial No. 29301 and later
E Model
Serial No. 43801 and later

US Model
Serial No. 49426 and later
Canadian Model
Serial No. 26801 and later

M-203 M-203

Modèle AEP
A partir du numéro de série 41801
Modèle UK
A partir du numéro de série 29301
Modèle E
A partir du numéro de série 43801

Modèle US
A partir du numéro de série 49426
Modèle Canadien
A partir du numéro de série 26801

A

B

C


D

E

F

G

SCHEMATIC DIAGRAM DIAGRAMME SCHEMATIQUE

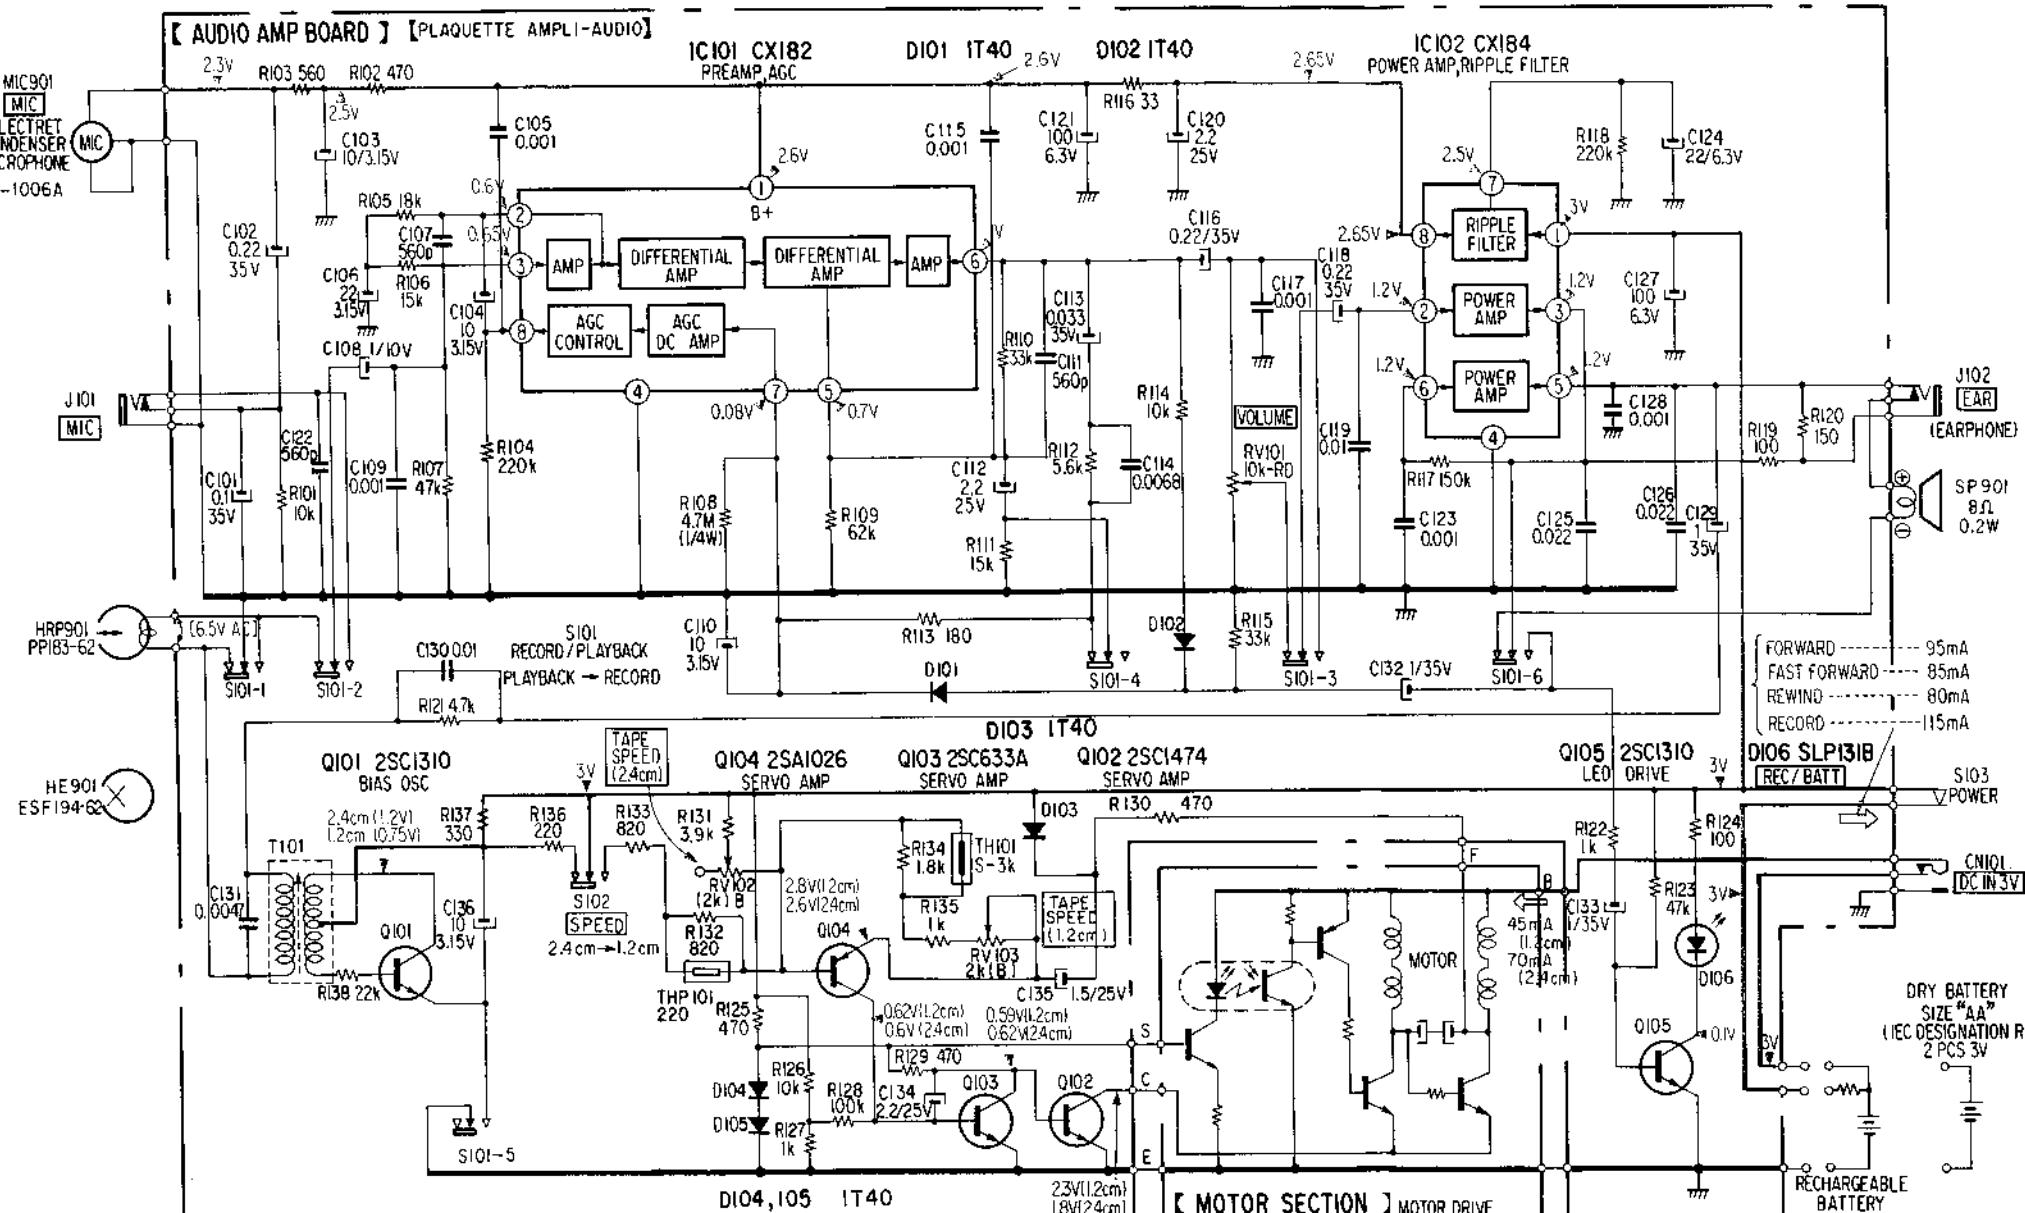

When the motor does not operate properly,
do not repair it, but replace the whole
motor section.

Lorsque le moteur est en panne, ne pas le
dépanner, mais le remplacer entièrement.

Note:

- All capacitors are in μF unless otherwise noted. $\text{pF} : \mu\text{pF}$
50V or less are not indicated except for electrolytics and tantalums.
- All resistors are in ohms, $1/8\text{W}$ unless otherwise noted.
 $\text{k}\Omega : 1000\Omega$, $\text{M}\Omega : 1000\text{k}\Omega$
- : B+ bus.
- []: panel designation.
- () : adjustment for repair.
- Voltages are dc with respect to ground unless otherwise noted.
- Readings are taken under no signal conditions with a VOM (20k Ω/V) at 2.4cm/s.
- () : RECORD
- [] : RECORD WITH VTVM
- Total current is measured with no cassette installed.
- Switch

Ref. No.	Switch	Position
S101-1 to 101-6	RECORD/PLAYBACK	PLAYBACK
S102	SPEED	2.4cm
S103	POWER	OFF

Note:

- Toutes les capacités sont en μF sauf indication contraire
 $\text{pF} : \mu\text{pF}$
Les tensions de fonctionnement de 50 WV ou inférieures ne sont pas indiquées, sauf pour les capacités électrolytiques.
- Toutes les résistances sont en Ω , $1/8\text{W}$, sauf indication contraire
 $\text{k}\Omega : 1000\Omega$; $\text{M}\Omega : 1000\text{k}\Omega$
- : parcours de B+
- []: désignation lisible à l'extérieur de l'appareil
- () : réglage pour un dépannage
- Les tensions sont des tensions continues par rapport à la masse, sauf indication contraire.
- Les mesures sont prises sans signal et ce avec un contrôleur (20k Ω/V) à 2,4cm/s.
- () : enr.
- [] : enr. avec le voltmètre électronique
- Le courant total est mesuré sans cassette.
- Interrupteurs/sélecteurs

N° de réf	Interrupteur/Sélecteur	Position
S101-1 à 101-6	enr./lecture (RECORD/PLAYBACK)	lecture (PLAYBACK)
S102	vitesse (SPEED)	2,4cm
S103	alimentation (POWER)	hors-circuit

AEP Model
Serial No. 41801 and later
UK Model
Serial No. 29301 and later
E Model
Serial No. 43801 and later
US Model
Serial No. 49426 and later
Canadian Model
Serial No. 26801 and later

Modèle AEP
A partir du numéro de série 41801
Modèle UK
A partir du numéro de série 29301
Modèle E
A partir du numéro de série 43801
Modèle US
A partir du numéro de série 49426
Modèle Canadien
A partir du numéro de série 26801