

ST-5000FW



FM STEREO TUNER

Specifications

Circuit:	All silicon transistor FM stereo tuner Superheterodyne, 43 transistors (including 5 Field-Effect Transistors), 34 diodes	Frequency	
Frequency range:	87-108 MHz	Response:	20 to 15,000 Hz ± 0.5 db
Intermediate frequency:	19.7 MHz	Usable sensitivity:	1.5 μ V (IHF)
Antenna input impedance:	300 ohms (balanced), 75 ohms (unbalanced)	Power requirements:	AC 117 volts, 60 Hz
		Power consumption:	20 watts, 23 VA
		Indicators:	Tuner input meter, Tuning meter, Stereo indicator (lamp)
		Dimensions:	5-3/4(h) \times 15-3/4(w) \times 12-1/4(d) ²
		Weight:	20 lb, 14 oz

SONY
SERVICE MANUAL

TABLE OF CONTENTS

	Page
Specifications	1
SECTION 1 GENERAL DESCRIPTION.....	3~8
BLOCK DIAGRAM.....	9~10
SECTION 2 DISASSEMBLY	
2-1 Top Cover and Bottom Plate	11
2-2 Front Panel.....	11
2-3 Front Panel Assembly	12
2-4 Sub-chassis Shields.....	13
2-5 Pilot Lamp Replacement	13
2-6 Switch and Control Replacement	13
2-7 Dial Cord Stripping	13~14
SECTION 3 TEST AND ALIGNMENT	
3-1 Front End Alignment	15~17
3-2 Discriminator Adjustment	18
3-3 Multiplex Section Checkout and Adjustment	19
3-4 Overall Adjustment	21~23
MOUNTING DIAGRAM—Front End Section	24
SCHEMATIC DIAGRAM.....	25~28
MOUNTING DIAGRAM	
Limiter and Detector Section	29~30
IF Section	31~32
Balun Section	33
Mixing Circuit Board Section	34~35
MPX Decoder Section	36~37
Power Supply Section	38~39
EXPLODED VIEW	40~45

SECTION 1

GENERAL DESCRIPTION

Technical Specifications

Circuit:	All silicon transistor FM stereo tuner Superheterodyne, 43 transistors (including 5 Field-Effect Transistors), 34 diodes	Better than 20 db. at 15 kHz, 100% modulation
FM Section (Monophonic):		
Frequency range:	87-108 MHz	30 to 15,000 Hz ± 0.5 db
Intermediate frequency:	10.7 MHz	Less than 0.35% at 400 Hz, (1000 μ V input) 100% modulation
Antenna input impedance:	300 ohms (balanced), 75 ohms (unbalanced)	SCA suppression: 60 db 19 kHz (pilot): 38 kHz (sub-carrier)
Frequency Response:	20 to 15,000 Hz ± 0.5 db	Suppression: Better than 70 db
Usable sensitivity:	1.5 μ V (IHF)	Audio outputs: Each channel FIXED 200 mV, (at 400 Hz, 100% modulation) impedance 10k ohms
Quiescent sensitivity:	1.0 μ V (300 ohm) for 30 db of quieting 3.0 μ V (300 ohm) for 50 db of quieting 100 μ V (300 ohm) for 70 db of quieting	VARIABLE 0-2V, impedance 1k ohms at maximum output
Image rejection:	Better than 90 db (IHF)	
IF rejection:	Better than 100 db (IHF)	
Spurious rejection:	Better than 110 db (IHF)	
Alternate channel selectivity (IHF):	Better than 90 db	General
Capture ratio (IHF):	1.0 db	Power requirements: AC 117 volts, 60 Hz
AM suppression (IHF):	Better than 50 db	Power consumption: 30 watts, 20 VA
Harmonic distortion:	Better than 0.2% at 100% (1000 μ V input) modulation	Indicators: Tuner input meter, Tuning meter, Stereo indicator (lamp)
Frequency drift:	Less than ± 20 kHz at 23.131 MHz (100 MHz)	Dimensions: 3-3/4(h) \times 15 2/4(w) \times 13-1/4(d)*
Harm. noise:	70 db down	Weight: 20lb 14oz
Muting operation:	3 μ V \sim 26 μ V (continuously variable)	
FM Section (Stereo):		
Stereo operation sensitivity:	3 μ V	General Information
Stereo separation:	Better than 40 db. at mid-frequency, 100% modulation Better than 30 dB. at 50 Hz, 100% modulation Better than 30 db. at 10 kHz, 100% modulation	The SONY ST-5000 FW is one of the most advanced FM Stereo tuners available today. Its front end employs new and revolutionary silicon field-effect transistors that yield excellent sensitivity and noise figure, and at the same time can handle very strong signals without overload.
		FET's in the local oscillator section also afford great stability and freedom of drift due to temperature. This negates the need for automatic frequency control and greatly simplifies the tuning operation for the set owner.
		Nine IF stages, that employ three multi-unit solid-state filters, provide high sensitivity, very sharp response and an essentially flat response within the selected channel. This results in excellent adjacent-channel rejection and very low distortion.
		A unique electronic switching system in the multiplex section gives smooth and clickless switching between mono and stereo modes of operation. Switching is fully automatic and immune to the effects of inter-station noise.
		An ingenious muting circuit, employing one FET and nine transistors, cuts out inter-station noise without losing those weak stations. This combination results in a receiver capable of "pulling-

in" the weakest stations while preserving a smooth and quiet tuning operation.

Excellent stereo separation is maintained under all receiving conditions.

Caution

The ST-5000 FW is a precision instrument. It should be serviced only by qualified service personnel trained in the service of high-quality instruments of this type.

Circuit Description

The following describes the functions of all stages and controls. The description follows the signal path and lists stages by the transistor symbol number at the left margin. Refer to the block diagram on page 9 and the schematic diagrams on pages 25-28.

Front-end Section

Stage/Control
Balun B101

Function

This transformer matches either 75-ohm coaxial cable or 300-ohm twin lead to the tuner's input stage.

RF Amplifier
X101, X103

The two RF amplifiers are designed to provide stable amplification, sharp selectivity at FM broadcast frequencies, and optimum noise figure.

Field-effect transistors are ideally suited for this job as they have characteristics similar to that of triodes, and in addition have wide dynamic range. This results in very low cross-modulation products. The RF stages employ common-gate circuits (similar to grounded-grid circuits). Double-tuned coupling is employed between X101 and X103 to provide sharp selectivity, and the windings of L101 and L103 are tapped-down to match the low input impedance of the common-gate stage.

Local Oscillator
X106

This stage supplies injection signals to the mixers via L105 and C116. The circuit is a Hartley type with feedback applied to the source from the tap on L106. Temperature changes have little effect on oscillator tuning in FET circuits.

Mixer
X105

so that this oscillator is extremely stable.

RF signals and local-oscillator signals are heterodyned in the gate-source junction of X105 to produce the 10.7 MHz output. IFT 101 is a tuned transformer to develop the IF output and provide sharp selectivity. A low impedance output winding supplies link coupling to the IF section.

IF Amplifier Circuit Board

Stage/Control

IF Amplifiers

X201, 202, 203,
204

Solid-State Filters

MF-1, 2, 3

Function

These IF stages are basically RC coupled amplifiers that provide essentially flat response. The selectivity of this section is determined by three solid-state filters in the interstage coupling paths. These filters each have four-section ceramic filters that operate in "trapped-energy" modes. The filters provide extremely sharp skirt selectivity and flat response inside the pass band. These filters determine over-all selectivity in the tuner. Limiting is accomplished by diode pairs, connected in parallel and poled in opposite directions. The diodes conduct when the input signal exceeds the barrier potential of about 0.6 volts. Thus, signal is limited in both directions to 1.2 volts peak-to-peak. The diodes provide symmetrical limiting.

Diode Limiters

D201, 202, 203,
204, 205, 206,
301, 302, 303,
304

IF Amplifier

X205, 206

The diode limiters are passive, and introduce loss. Therefore amplifiers, such as X205 supply the interstage gain needed to drive the limiters.

Muting-Circuit Detector

X207, D208, 209

The IF signal is extracted from the collector of X205 to drive the Muting-Circuit Detector. X207 acts as a buffer amplifier to drive the voltage doubler D208, D209. The output of this circuit is a positive DC voltage proportional to carrier

ST-5000FW ST-5000FW


Stage/Control	Function	Stage/Control	Function	Stage/Control	Function	Stage Control	Function
Tuner Input Meter Circuit	An IF output from the collector circuit of X306 is coupled through R322 to D307. This half-wave rectifier feeds a DC signal to the TUNER INPUT METER M-1. Since all previous stages have fixed gain, the current in M-1 is directly proportional to signal level. R241 is the calibration adjustment.			Decemphasis C51R, S17	These capacitors are selected to provide the necessary roll-off at high audio frequencies to compensate for pre-emphasis at the transmitter.		Low pass filter.
Limiter-Detector Circuit Board	IF Amplifiers X301, 302 Diode Limiters D301, 302, 303, 304	level. This DC voltage is applied to X410 on the Muting Circuit Board.	19 kHz Amplifier X502	extracted from its emitter circuit, and the 19-kHz pilot signal is taken from a tuned circuit in the collector circuit.	Audio Pre-amplifier X504, 505 HI-BLEND Switch SW-2	Demodulated L and R signals are amplified by these stages. The HI-BLEND switch allows mixing of high-frequency audio signals between stereo channels.	Both fixed and variable outputs are provided. Fixed outputs are obtained from the voltage dividers R366/S67 and R366/S68. Variable outputs are fed from potentiometers R569, 570
IF Output X305	These are conventional RC coupled amplifiers that supply the necessary interstage gain to drive the diode limiters	Frequency Doubler Signals developed at the collector of X502 are transformer coupled to a full-wave rectifier U501, 502.		Gain Adjustment R531, 532	The resistors are selected to compensate for differences in demodulator efficiency and provide equal overall gain in both channels.	Mode Switching X512, 513, 514	These three transistors operate as direct-coupled switches to establish the operating mode.
Ratio Detector D305, 306	Signal at the base of X303 has had all amplitude variations removed by the preceding limiters, and selected signals have been passed by the solid-state filters. X303 provides the power to drive the ratio detector.	19 kHz Amplifier X503	The output of this rectifier is not filtered, and produces two positive pulses for each input cycle. Thus the 19-kHz frequency is effectively doubled by D501 and D502. However, the waveform is not sinusoidal at the base of X303.	Channel Separation Adj. R537	The network that connects the emitters of X501 and X505 provides a point of negative feedback between left and right channels. Any residual L signals in the R channel are cancelled out by the inverted "L" signal from the L channel. The same is true of residual R signals in the L channel. R537 is therefore set for maximum channel separation.	Mode Switch in MONO position	In the MONO position, the base of X512 is grounded and X512 turns off. X513 is then switched on and X514 is switched off. When X514 is off a positive voltage is applied to R577, R517 and R515 in series.
R319	IFT 301 and the diodes D306 and D308 form a balanced ratio detector that transforms the frequency-modulated signal into an audio signal.	Pilot and SCA Filters L505, 506 C507, 508	The 38 kHz pulses produced by D501, 502 are amplified by X503. The tank circuit in the collector circuit of X503 is tuned to 38 kHz to restore the sinusoidal waveshape to the signal. This signal is transformer coupled to the bridge-type demodulator to supply the sampling drive for the demodulator.	Emitter Follower X506, 507	Emitter followers are used at this point to provide a low-impedance source of signal for the low-pass filters that follow. The filter removes all residual IF and subcarrier components.	Mode Switch in AUTO position	The DC voltage across R515 is sufficient to hold both D505 and D506 in the forward biased conditions. In that case, subcarrier demodulation stops and the L+R signal is fed through both D505 and D506 to the left and right channels.
Tuning Meter M-2	A multi-type meter connected across the balanced output of the ratio detector is used as a tuning indicator. C323 removes the AC component of the signal, and R350 calibrates the meter for full scale readings.	Multiple Demodulator D503, 504, 505, 506	The composite signal fed to the demodulator is coupled from the emitter of X504 through to anti-resonant circuits consisting of C505/L505 and C506/L506. The first of these is tuned to 19 kHz to eliminate the pilot carrier. The second tank tunes to 67 kHz to eliminate the SCA signal.	Low-Pass Filter LPF501	It is important that these components be removed completely to prevent beat interference with bias oscillators in tape recorders fed from the tuner. Transistors X508 and X509 make up for the insertion loss of the low-pass filter. X510 and S11 act as emitter followers to produce output signals across a low impedance. Positive feedback is employed between the collector of X510/S11 and the emitter of X508/509 via C525/S26 compensates for the loss of high audio frequencies in the	Mode Switch in STEREO position	When stereo signals are received, the DC component of the signal developed by the 38 kHz doubler is coupled through R509 to turn X512 on. This turns X513 off and X514 on. When X514 is saturated the forward bias applied to D505 and D506 is removed and the demodulator functions in the multiple mode. The switcher circuit X512, 513, 514 functions in the same way as in the AUTO position, except that the muting relay is controlled by X514 (See Muting Circuit Board). The effect is to mute all but stereo signals.
Emitter Follower X304	X304 supplies demodulated signals to the MPX and Muting Circuits.	Multiplex Demodulator	The demodulator circuit employs four diodes in a balanced bridge arrangement. This system cancels much of the residual RF product.	Audio Amplifier and Emitter Follower X508, 509, 510, 511	These circuits act to mute output when tuning is between stations or not sufficiently tuned to the center of a channel.	Stage Control Interstation Muting X408, D401, D402	Muting Circuit Board
Multiplex Decoder Circuit Board	Stereo is extracted by a switching or time-division decoder.		The 38 kHz pulses switch the composite signal in four diodes and switching transformer to produce L and R signals at the output when the tuner operates in the stereo mode.				These circuits act to mute output when tuning is between stations or not sufficiently tuned to the center of a channel.
Stage/Control X501	This stage serves two functions. The composite FM signal is						Function
							The hiss and static of interstation noise is extracted from the emitter of X304 and applied to the base of X408. R421 and

ST-5000FW ST-5000FW

Stage/Control	Function	Stage/Control	Function	Stage/Control	Function	Stage/Control	Function
Muting Relay Actuator X 407, X 408	C 402, in the coupling circuit, filter out audio components so that the signal is primarily noise. X 409 amplifies the noise component and drives the voltage doubler, D 401, 402. When interstation noise is received the DC output of D 401/402 brings X 405 into conduction. This in turn, cuts off X 407 and the collector voltage of X 407 rises toward R+. The collector of X 407 is coupled to the base of X 408 through the Function Switch SW 3-1 in the MONO and AUTO positions. Thus X 408 turns on as X 407 turns off. The muting relay coil is in the collector circuit of X 408. When this relay energizes, the audio output of both channels is shorted to ground.	FET, X 401. The FET conducts more heavily, its drain voltage drops and X 402 cuts off. This makes X 404 cut off when X 408 can conduct only when X 402 is ON and X 403 is off.	If the set is detained to produce a negative output, X 401 conducts less and both X 402 and X 403 come into conduction. In this case, as noted above, X 404 cuts off. Thus, X 404 cuts off if the output of the ratio detector is at its positive or negative peak. When X 404 cuts off, X 405 comes into conduction, and following the previously described action of X 407/408, the muting relay energizes.	Stereo Lamp PL 5	X 514 is ON. X 514 acts as the ground return for the lamp when the transistor is switched into conduction.	Transistor X 603 compares a sample of the output voltage, picked off at VR 601, with a reference voltage supplied by the Zener diodes D 602 and D 603. A change in output voltage, detected by X 605 results in a change in conduction of X 602 and X 601 that offsets the original voltage shift.	Transistor X 603 compares a sample of the output voltage, picked off at VR 601, with a reference voltage supplied by the Zener diodes D 602 and D 603. A change in output voltage, detected by X 605 results in a change in conduction of X 602 and X 601 that offsets the original voltage shift.
Muting for the Desired Condition X 401, 402, 403, 404, 405	The muting relay is also actuated if the station is being received but there is a considerable tuning error. This muting circuit operates from the negative or positive output of the ratio detector when the received station is not at the center of the detector's S curve. DC output of the ratio detector, developed across C 221, is coupled to the gate of X 401.	In addition to interstation and detune-muting, the muting relay is also actuated if signal level is below the volume set by the front-panel muting control. This system operates from the DC output of the carrier level detectors D 208, 209. The positive voltage developed by D 208, 209 is applied to the base of X 410. This transistor is normally cut off, but if the DC output of D 208, 209 swings positive enough, X 410 conducts and X 405 cuts off. The latter results in the release of the muting relay. The positive voltage required to turn on X 410 is determined by the setting of the MUTING control VR 401.	In addition to interstation and detune-muting, the muting relay is also actuated if signal level is below the volume set by the front-panel muting control. This system operates from the DC output of the carrier level detectors D 208, 209. The positive voltage developed by D 208, 209 is applied to the base of X 410. This transistor is normally cut off, but if the DC output of D 208, 209 swings positive enough, X 410 conducts and X 405 cuts off. The latter results in the release of the muting relay. The positive voltage required to turn on X 410 is determined by the setting of the MUTING control VR 401.	Click Suppressor X 515	X 515 is a click suppressor. It acts to mute audio output electronically when the MODE switch is turned, or if the muting relay is energized. When X 515 conducts, the discharge of C 531 in its collector circuit places a momentary reverse bias on diodes D 503 and D 505 to block audio output.	VR 601 adjusts the conduction of the series regulator to produce a standard output of +24 volts. The 24-volt output is supplied to various circuits through isolating resistors R 606, 609, 610, 611. A voltage divider, R 606/R 607 provides a +12-volt output for the muting circuits and the stereo lamp.	VR 601 adjusts the conduction of the series regulator to produce a standard output of +24 volts. The 24-volt output is supplied to various circuits through isolating resistors R 606, 609, 610, 611. A voltage divider, R 606/R 607 provides a +12-volt output for the muting circuits and the stereo lamp.
Muting Switch SW 4	The muting system is disabled when the MUTING control is turned fully counterclockwise. In this case SW-4 closes putting a positive voltage at the base of X 407 through R 418. This turns on X 407 and keeps X 408 and the muting relay turned off. When the Function Switch is in the STEREO position, X 408 is controlled by X 514. The latter is ON when 144kHz pilot signals	Power Supply AC Input	Line input is supplied to the power transformer through the power switch SW-1, the fuse and the voltage selector.	Voltage Selector	The voltage selector sets up the proper power transformer connections to suit local line-voltage conditions.	DC Power Supply D 500	A positive 24 volts is developed by the Full-wave bridge rectifier D 500.
Muting in the Stereo Position of the Function Switch				Voltage Regulator X 601, 602, 604 D 602, 613	DC output from the rectifiers is filtered by C 601 and applied to the series regulator X 601.		

ST-5000FW ST-5000FW

Block Diagram

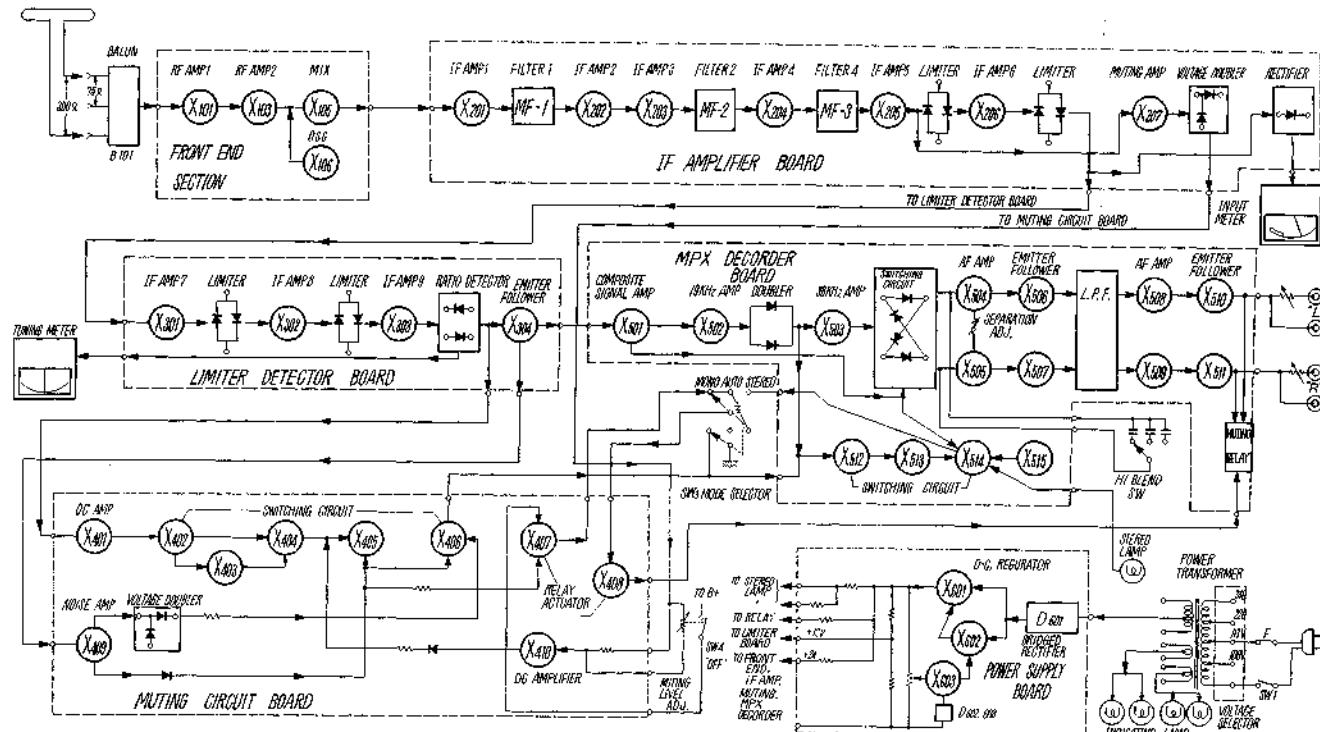

Section 2 DISASSEMBLY

2-1. Removal of Top Cover and Bottom Plate


- (a) Remove the two machine screws at each side of the tuner and lift the top cover straight up. (b) Remove the five Phillips-Head screws at the bottom of the tuner and pull the bottom plate towards the rear of the tuner. See Fig. 2-1.

2-2. Front Panel Removal


- (a) Remove the top cover.
(b) Remove all control knobs. Tuning, Muting,

and Hi-Blend knobs can be removed by loosening the slotted set screws and pulling the knobs straight out. The Power and Mode switch knobs are simply pulled off.

- (c) Remove the four Phillips-Head screws (+RF 4 ×6) behind the top edge of the Front Panel Assembly (the vertical bracket that mounts the dial and tuning meters). See Fig. 2-2.
(d) Turn the tuner over and remove the four Phillips-Head screws (+RF 3×6) at the front-bottom edge of the chassis. See Fig. 2-1. This frees the front panel.

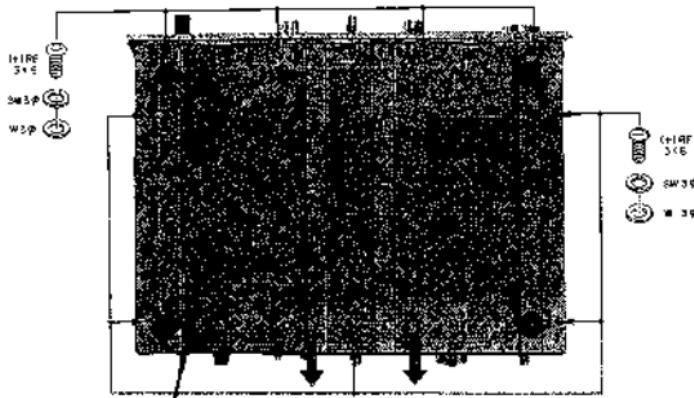

(Fig. 2-1)

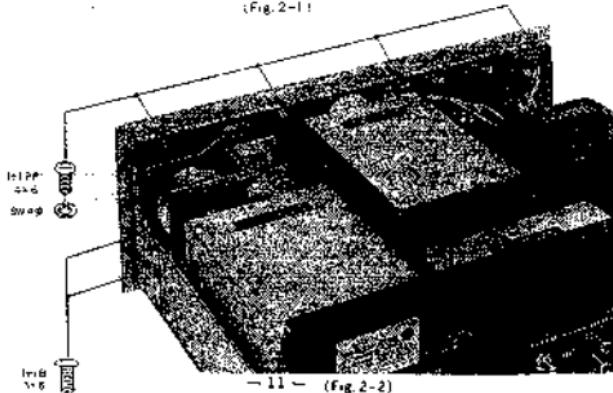


— 11 — (Fig. 2-2)

2-3. Removal of the Front-Panel Assembly

The Front Panel Assembly is the vertical bracket at the front of the tuner to which the glass dial, tuning meters and pilot lamps are assembled. The Front Panel Assembly must be removed to re-string the dial cord. Follow this procedure:

- Remove the cover and bottom plate. See 2-1
It is not necessary to remove the Knobs or Front Panel.
- Remove the all pilot lamp sockets by turning them clockwise and pulling them out of the Front panel Assemblies.

- Disconnect the leads from the terminals of the tuning meter.
- Remove the two machine screws (+B30 x6) on both sides of the chassis. See Fig. 2-2.
- Remove the two Phillips-Head screws (+RF 3 $\frac{1}{2}$ x6) from the top of the chassis, on either side of the Front-End sub chassis. See Fig. 2-3.
- The Front Panel Assembly is now free, and can be tilted forward and down as shown in Fig. 2-4. Place protective pads under the Front Panel to keep it from being scratched.

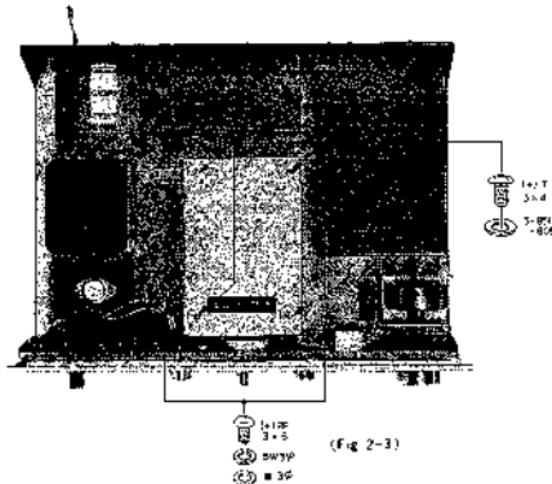

(Fig. 2-3)



(Fig. 2-4)

2-4. Removal of Sub-Chassis Shields

- Remove the cover and bottom plate. See 2-1.
- To remove the shield cover for the Front End Section, remove the four Phillips screws (+T3 x 4), and lift off the shield cover. See Fig. 2-3.
- To remove the shield cover on the IF-DETECTOR section, rest the tuner on its top and squeeze the four spring clips with long-nosed pliers from the bottom of the chassis. See Fig. 2-5.



Fig. 2-5

2-5. Pilot Lamp Replacement

- Unplug the AC power cord.
- Remove the top cover. See Section 2-1.
- Meter Lamps**
- Turn the black-plastic lamp sockets clockwise (as viewed from the back of the panel) and pull out the socket.
- Unscrew the pilot lamp from the socket and install the replacement.
- Insert the socket into the slots in the Front Panel assembly and turn the socket counterclockwise until the socket is firmly seated.

Stereo Lamps

- Turn the black-plastic socket clockwise until it becomes free of the mounting bracket. Pull the socket out of the mounting bracket.
- Unscrew the lamp and install the replacement.
- Insert the socket into the bracket and turn counterclockwise until the socket is firmly seated.

Dial Lamps

- Remove the Cover, Control Knobs and Front Panel. See Sections 2-1 and 2-2.
- Remove one of the clamps that secure the dial plate (the clamp closest to the lamp to be replaced).
- Pry out the lamp as you would a cartridge fuse. Push the replacement lamp into the clip.

- Replace the dial clamp and screw. Be careful not to exert pressure on the glass when replacing the clamp.

2-6. Switch and Control Replacement

- Remove the cover and bottom plate. See Section 2-1.
- Remove the Front Panel. See Section 2-2.
- Remove the MUTING Control or HI-BLEND switch by removing the hex nut that secures the control to the Front Panel Assembly.
- Remove the POWER switch by removing the two Phillips-head screws from the Front Panel Assembly. The microswitch can then be removed from the toggle bracket by removing two Phillips-head screws.
- Remove the MODE switch by removing the two Phillips-head screws from the front of the Front Panel Assembly.

2-7. Dial-Cord Stringing

Preparation: Remove the Front Panel Assembly. See Section 2-3.

- Cut a 59-inch (1,500 mm) length of dial cord.
- Rotate the tuning capacitor drive drum fully clockwise.
- Tie the cord to one end of the spring and hook the other end of the spring to the drive drum as shown in Fig. 2-6.

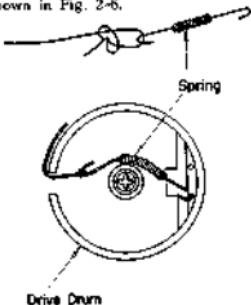


Fig. 2-6

- Run the dial cord through the slot in the rim of the drive drum and position the cord close to the rear edge of the drum.
- Run the cord over pulley A and then make two full counterclockwise turns around the tuning shaft. See Fig. 2-7.
- Run the cord around pulleys B, C, D, and E. See Fig. 2-8.

- Pull the dial cord taut and wrap 2 1/2 turns around the drive drum, starting at the rear edge. Pass the cord through the slot and attach the spring and eyelet as shown in Fig. 2-9.
- Tighten the cord, then squeeze the eyelet so that the spring is under tension.
- Put the dial pointer in place and run the dial cord over and under the tabs at the rear of the dial pointer.
- When dial cord stringing is completed and the tuning system checks out mechanically, put a drop of contact cement on the eyelet and at the place where the cord runs over the tabs of the dial pointer. See Section 3-4, Overall Adjustments, for the method of accurately locating the dial pointer.

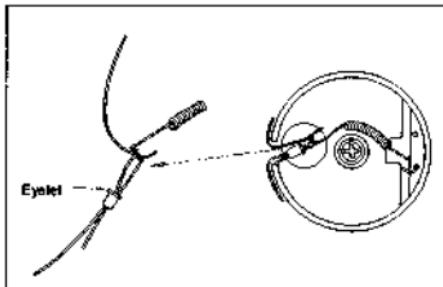


Fig. 2-9

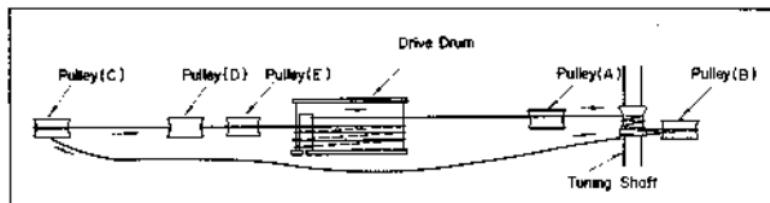


Fig. 2-7

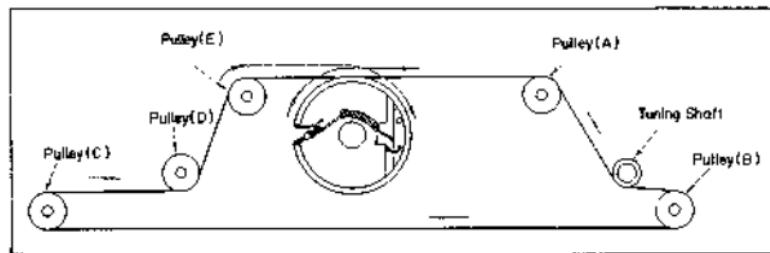



Fig. 2-8

Section 3 TEST AND ALIGNMENT

General. Follow the sequence of test and alignment procedures as given in the following text. Be sure each section checks out properly before proceeding to the next section.

Caution: Never attempt alignment unless a careful check of symptoms indicates that alignment is

absolutely necessary. Factory adjustments are extremely stable and should not need to be reset except in unusual circumstances. Alignment need not be attempted when Front End FET's have been replaced as changes in FET parameters have little effect upon tuning.

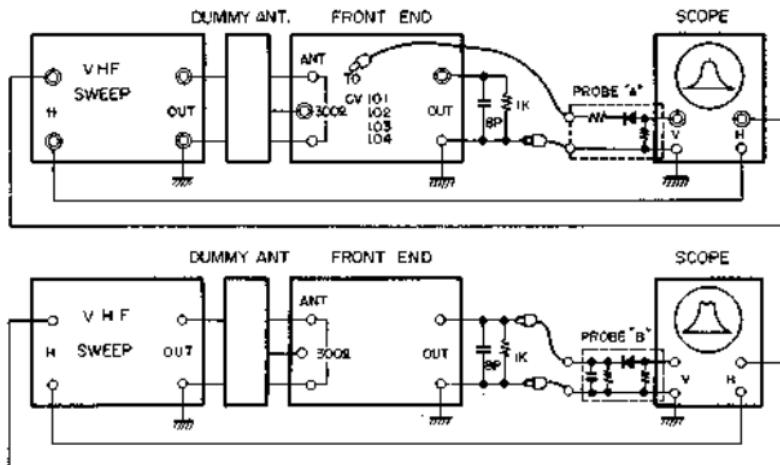

Front End Alignment Test Set-up

Fig. 3-1

3-1. Front End Alignment

A—Equipment Requirements

(1) VHF Sweep Generator

Center frequency —70 to 115 MHz (variable)
Sweep width 30 MHz (max) to 1 MHz
(min)
Output impedance 75 or 50 ohms


Maximum output level— $-90 \text{ dB}/\mu$ ($0 \text{ dB}/\mu = 1 \mu\text{V}$)

(2) Marker Generator


Capable of generating accurate 90 and 109.5 MHz markers (crystal calibrated)

(3) Demodulator Probes

RF alignment probe—See Fig. 3-2 (a)
IF alignment probe—See Fig. 3-2 (b)

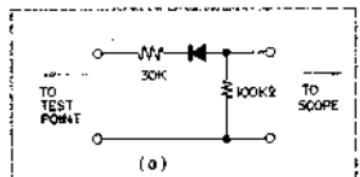

(a)

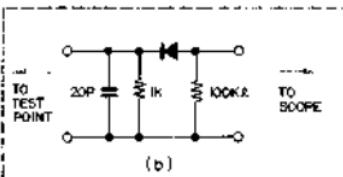

(b)

Fig. 3-2

- (4) Oscilloscope
 - Vertical sensitivity —at least 5mV/cm
 - CRT diameter —5" or more
- (5) Dummy Load
 - 1 k with 30 pF in parallel
 - See Fig. 3-3
- (6) Dummy Antenna
- (7) Alignment Tools

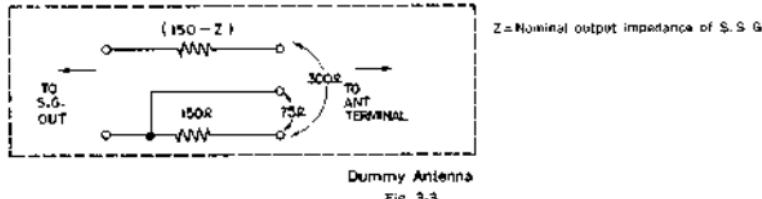


Fig. 3-3

B. Preparation

- (1) Remove the shield cover from the Front End. Confirm that all Front End Mounting screws are tight.
- (2) Remove the shield cover from the IF Section. Unsolder the IF input coaxial cable, and terminate the cable with the 1k /20 pF dummy

load

- (3) Loosen the set screw on the mechanical stopper mechanism at the front shaft of the tuning capacitor (To reset the stopper, refer to "Overall Adjustments, page 22").
- (4) Loosen the lock nuts on the studs of the coils when it is necessary to adjust the inductors

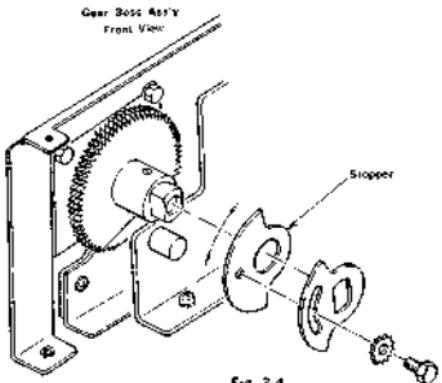


Fig. 3-4

ST-5000FW ST-5000FW

C. Alignment Procedure

(Frequency Coverage and Tracking of RF Sections)


Adjusting Item	Sweep Marker Connections	Scope Connections	Center and Marker Freq.	Adjustment	Tuning Capacitor Setting	Response
RF Stage Tuned Circuit (1)	Antennae terminals through dummy antenna Sweep width 1 MHz Sweep output 50 to 60 dB/ μ	CV 101 hot lead (stator) and ground through demodulator probe (A)	86 MHz 109.5 MHz	L 101 CT 101	MAX capacitance MIN capacitance	 Adjust to obtain max and symmetric response.
RF Stage Tuned Circuit (2)	same as above	CV 102 hot lead (stator) and ground through demodulator probe (A)	86 MHz 109.5 MHz	L 102 CT 102	MAX capacitance MIN capacitance	 Adjust to obtain max and symmetric response.
RF Stage Tuned Circuit (3)	same as above	CV 103 hot lead (stator) and ground through demodulator probe (A)	86 MHz 109.5 MHz	L 103 CT 103	MAX capacitance MIN capacitance	 Adjust to obtain max and symmetric response.
RF Stage Tuned Circuit (4)	same as above	CV 104 hot lead (stator) and ground through demodulator probe (A)	86 MHz 109.5 MHz	L 104 CT 104	MAX capacitance MIN capacitance	 Adjust to obtain max and symmetric response.
Mixer Stage	Antennae terminals through dummy antenna Sweep width 1 MHz Sweep output 30 to 40 dB/ μ	Dummy load through demodulator probe (B)	Center Freq. 86 MHz Marker 107 MHz	IPT 301 IPT 302	MAX capacitance Same as above	 
Local Oscillator	Same as above	Same as above	86 MHz 109.5 MHz	L 105 CT 105	MAX capacitance MIN capacitance	 Adjust to obtain max and symmetric response.

Note: Demodulator capacitance has some detuning effect, therefore touch up the previous adjustments at each step. For example, touch up L 101, CT 101 when making L 102, CT 102 adjustments, etc. Repeat the foregoing steps as needed.

3-2. Discriminator Adjustment

A. Equipment Requirements



- (1) VHF Sweep Generator
 - Center Frequency 6 to 12 MHz (variable)
 - Sweep width 1 MHz or more (variable)
- (2) Oscilloscope
 - Vertical Sensitivity at least 5 mV/cm
 - CRT diameter 16" or more

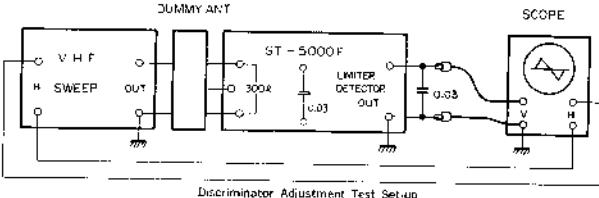

- (3) Ceramic capacitors 0.02 μ F \times 2 or 0.03 μ F \times 2
 (4) Dummy Antenna - See Fig. 3-2
 (5) Alignment tools

B. Preparation

- (1) Remove the shield cover from the Limiter detector Board
- (2) Connect a 0.02 μ F ceramic capacitor across input and output terminals of the Limiter detector Board.
- (3) Set the Sweep Generator output +0dB/ μ

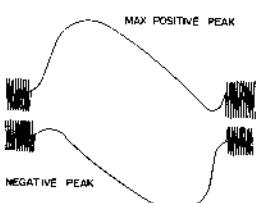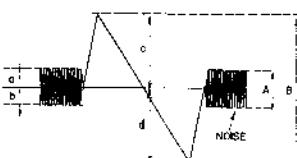

C. Discriminator Alignment

- (1) Connect the test equipment as shown in Fig. 3-5
- (2) Adjust scope controls to provide a visible indication
- (3) Adjust IPT 301 top and bottom cores to obtain the "S" response curve shown at waveform A
- (4) Turn the top core of IPT 301 to equalize the two components above and below the trace (make a and b equal), as shown at waveform A
- (5) Turn the bottom core of IPT 301 to obtain maximum response.
- (6) Detune the top core in both directions to obtain maximum positive and negative output as shown at waveform B. Adjust R 319 (DC Balance) to obtain equal response when the core is peaked to provide either maximum negative or positive output as shown.
- (7) Raise the top core of IPT 301 to equalize negative and positive peaks, as shown in waveform A ($a = b = 1/2 d$)
- (8) Check to make sure that the S curve does not change when the shunting capacitor is removed from the input to the Limiter detector Board.
- (9) Disconnect the sweep generator and make sure that the scope displays only noise. Adjust IPT 301 top core to make the Tuning Meter indicate the null point (center scale).

ST-5000FW ST-5000FW

3-3. Multiplex Section Checkout and Adjustment

Caution: Do not make adjustments in the MPX section unless they are absolutely necessary. Factory adjustments are very precise and stable, and usually do not require readjustment in the field.

A - Equipment Requirements

- (1) Multiplex Stereo - Capable of using a 50kHz Generator signal with low distortion
- (2) Audio Generator - Low harmonic distortion
- (3) Distortion Meter



Note: Overall harmonic distortion of all test equipment should be less than 0.3%.

- (1) AC VTVM Capable of indicating rms voltages of 0.01V or less
- (2) Alignment Tools
- (3) Radio-Service Type Cement Solder

B - Preparation

- (1) Check DC operating voltages for all stages to make sure that each stage is operating normally.
- (2) Calibrate the 67 kHz output of the AUDIO oscillator with a counter.
- (3) Set up Standard Composite signal as follows

Main channel level	400 Hz, +2dB
Pilot signal level	19 kHz, -35dB
Sub channel level	38 kHz, -22dB
- (4) Please refer to the Fig. 3-7 for your convenience.

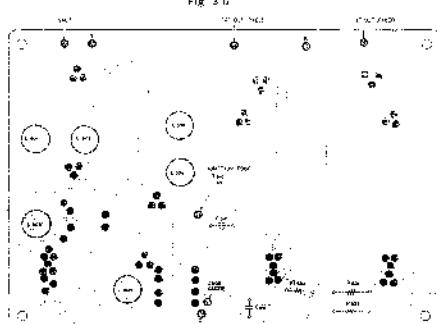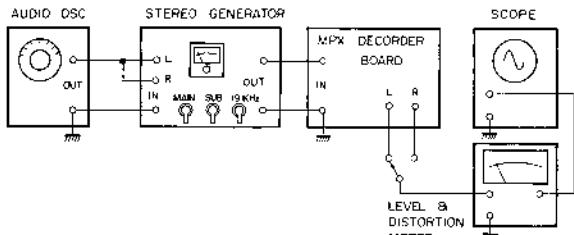

C. Procedure

Adjusting Item	MPX Generator Connections	Scope or VTVM Connections	Adjustment	Remarks	Response
19 and 38 kHz tuned circuits	MPX Input terminal 19 kHz, -35dB	D 503 apart and ground	L 501, 502, 503, 504	Tune for maximum reading	
19 kHz Trap	same as above	Junction of R 505 and L 506 and ground	L 506	Tune for minimum reading	
67 kHz Trap	same as above 67 kHz, -35 dB (freq. must be accurate)	same as above	L 506	Tune for minimum reading	
MPX Output Level Adj.	MPX Input Terminal Standard output level. Modulation: "Left" and "Right".	L and R output terminals to coincide with generator	R 531, 532	Adjust to reduce the difference between L and R channels less than 0.5dB	
De-emphasis Adj.	Same as above	Same as above	C 516, C 517	Record output of each channel at 400Hz. Change modulation frequency to 10kHz and set C 516, 517 to obtain a reading that is down 11.7 ± 0.5dB.	

MPX Decoder Adj.


Item to be Checked	MPX Generator Connections	Scope or VTVM Connections	Adjustment	Remarks	Response
Distortion	MPX input-terminal Standard composite signal	J and R output terminals to coincide with generator settings	-	Check to see that harmonic distortion is less than 0.3% for each channel.	
Separation	same as above	same as above	R 537	Record output of J. channel. Turn Generator to R output and adjust residual level. Adjust R 537 to lower the residual level to at least 45dB below the normal reading. Check both channels in this manner.	

Overall Adjustment

Such up adjustments ensure optimum performance. They also assist in localizing troubles.

Antenna Requirements

FM Signal Generator
Stereo Signal Generator
Oscillator

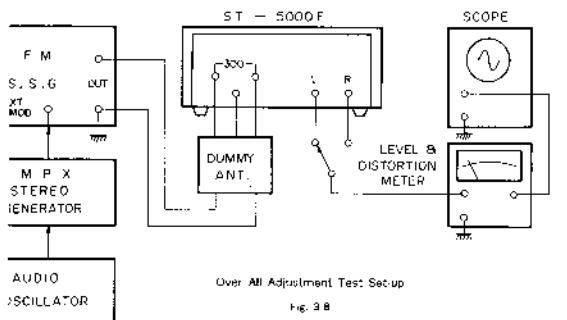

Over All Adjustment Test Setup

Fig. 3-8

Aural Distortion

Set the equipment as shown in Fig. 3-8. At the signal generator frequency of 98 MHz, 100% modulation. Output level 100%, IFT 102 series model only; slightly for other distortion.

At modulating frequency of 7 kHz, if distortion is more than 1.0%, tune the IFT 101, 102, for minimum distortion. This adjustment has a great effect upon over sensitivity. Do not turn the core more than 1/2 turn in either direction back sensitivity after the core of IFT 101, 102 has been reset.

C. Muting Circuit Adjustment

ST-5000FW employs some complicated muting circuits as mentioned in "Circuit Description". That is, following three functions are combined:

- Muting control according to the input field strength;
- Muting for detuning condition;
- Muting for interstation noises.

Adjustment Procedures:**(1) Muting Level Control Check**

- With the equipment connected as shown in Fig. 3-8 set the FM signal generator as follows:
98 MHz, 300 Hz modulation, 100%, output level 15±3dB u.
- Turn the muting level control knob clockwise to the full.

- Turn the set and confirm that the output is muted when muting level control knob turned counterclockwise to its minimum.
If the muting circuit does not operate properly, check the related circuitry.

(2) Muting Level Calibration at Detuning Condition

Readjustment is necessary after replacing X 301 (IFT) or if the muting meter deflection is unbalanced when detuning $\pm f_1$, $\pm f_2$ respectively. The relations among "S" curve, muting level and tuning meter deflection are shown in Fig. 3-9.

- Set the FM Signal Generator as follows:
98 MHz, 300 Hz, 100% Modulation, Output Level 50dB μ .

- Set the muting control knob "ON" and its minimum position.

Turn the set and shift the tuning frequency higher and lower by turning this tuning knob until the muting circuit begins to operate and note the deflection of tuning meter. Deflection of the tuning meter should be approx. 1.8° (3.4mm) from position from the tuning meter's center point where the muting circuit begins to operate.

In case of difference between D1 and D2 is too much, follow the next procedures.

- In case of D1>D2
Increase the value of R 430 and R 407 respectively to obtain proper response on the tuning meter.

- In case of D1<D2
Decrease the value of R 430 and R 407 respectively to obtain the proper response on the tuning meter.

- If the foregoing procedures do not make any sense, check the IFT (V 401)'s Ids and replace if necessary. Deferent IFT does not have Ids of 6mA or more. Ids can be checked by the circuit as shown in Fig. 3-10.

(3) Tuner Input Meter Calibration

- Connect signal generator to antenna input terminal using dummy antenna. Set generator to 98 MHz, 300 Hz, 100% Modulation, Output Level 50dB μ .

- Turn the set to 98 MHz. Adjust VR 241 (Meter Calibration Adj.) to get a meter reading of 0.6% (0.6% turned to the left of maximum on the meter scale).

E. Dial Pointer and Tuning Stopper Adjustments

- Connect the signal generator to the antenna terminal through the dummy antenna.

- Set the generator to 98 MHz, 300 Hz, calibrated 300 Hz, 100% Modulation, RF Output 20dB μ .

- Set the MULTRIM switch to "OFF".

- Turn the set precisely to the 98 MHz signal.

- Set the pointer to 98 MHz on the dial.

- Remove the top shield from the front end.





Fig. 3-9




Fig. 3-10

- Adjust the Muting control so that the pointer does not go left of the 98 MHz on the stopper graduated scales.
- Replace the shielded cover.

F. Manual Freq. Adjustment


- Connect the FM dummy antenna to 98 MHz, 300 Hz, Output level 50dB μ .
- Check outputs terminals with a voltmeter. If output is other, set lead 104.
- Check to see the minimum ring 10dB during frequency 15 kHz. If the rest circuit 301 and 316.

G. Multiplex Dec.

- Connect equipment to the signal generator, 98 MHz, RF OUT, Modulation, Main channel 316.

Sub-channel 158 Pilot Signal 194

- Connect the MP stage as shown.
- Adjust the output signal to obtain station as shown in Fig. 3-11.

Stereo Generator

-Front End Section

- (7) Adjust the Mechanical Stopper so that the pointer does not move more than 18° to the left of the 87 MHz mark. The hex-head screw on the stopper can be turned with a pair of long-nosed pliers.
 (8) Replace the shield cover and tighten the mounting screws.




Fig. 11

F. Monaural Frequency Response Check and Adjustment

- (1) Connect the FM Signal Generator through a dummy antenna and set the generator as follows: 98 MHz, AM/FM modulation, 100%, 10 kHz Output level 60 dB.
 - (2) Check outputs at the L and R Fixed-output terminals with generator set to L and R respectively. Outputs are not within 0.5 dB of one another, set K 545 and K 549 to equalize outputs.
 - (3) Check to see that output level does not change more than 1dB in either channel as the modulating frequency is changed from 10 kHz to 50 kHz. If the change is greater than 1dB, reset C 516 and C 517 to correct the condition.

G. Multiplex Decoder Check and Adjustment

- (1) Connect equipment as shown in Fig. 3-8. Set the sum generator as follows:
 98 MHz, RF output 60 dB μ
 Modulation
 Main channel L or R 400 Hz, 45.63 kHz deviation
 Sub channel 33.6 kHz, 45.63, 33.6 kHz deviation
 Pilot Signal (19 kHz), 5.7 kHz deviation
 (2) Connect the MIX Stereo Generator and oscilloscope as shown in Fig. 3-11.
 (3) Adjust the output phase of the 19 kHz pilot signal to obtain the stable Lissajous pattern shown in Fig. 3-12.

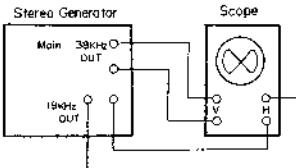


Fig. 310

ing Condition X 402
is un-
spectively.
; level and
Fig. 3-9.

111

1. Output

frequency
using knobs
operate and
r. Deflec-
be approx.
the tuning
ing circuit

and 102 m
205

the training

and respect
use on the


I make any
list and see
it does not
the can be
Fig. 3-10.

Capital Reserves

Fall (Measuring of Bulk in the meter)

by subtraction
then
decalibrated
in 20 dB's.


Exhibit Eadi.

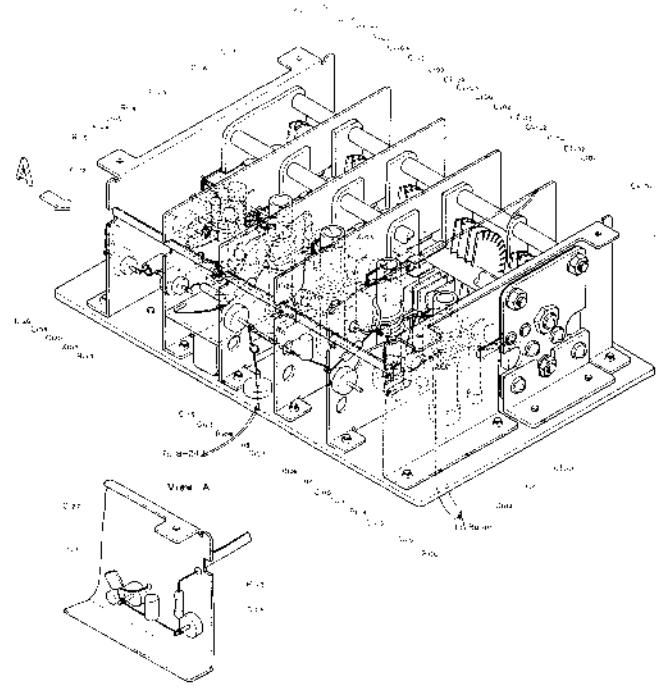

24 -

ST-5000FW ST-5000FW

Schematic-Diagram


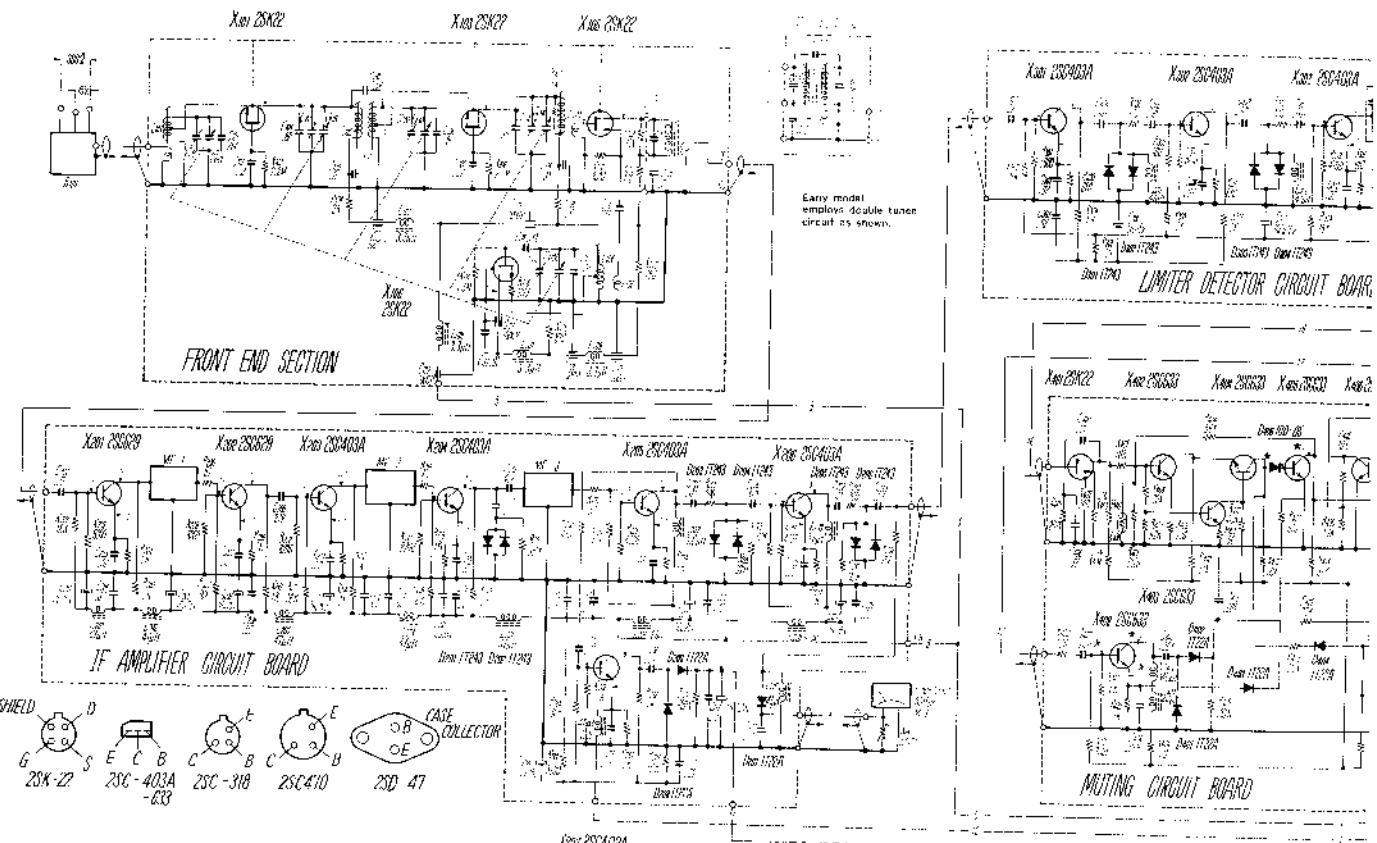


In early model, R_{in} is 100 ohms and R_{out} is 100K ohms



() STEREO

Xm 20030 Xm 20031 Xm 20032 Xm 20033

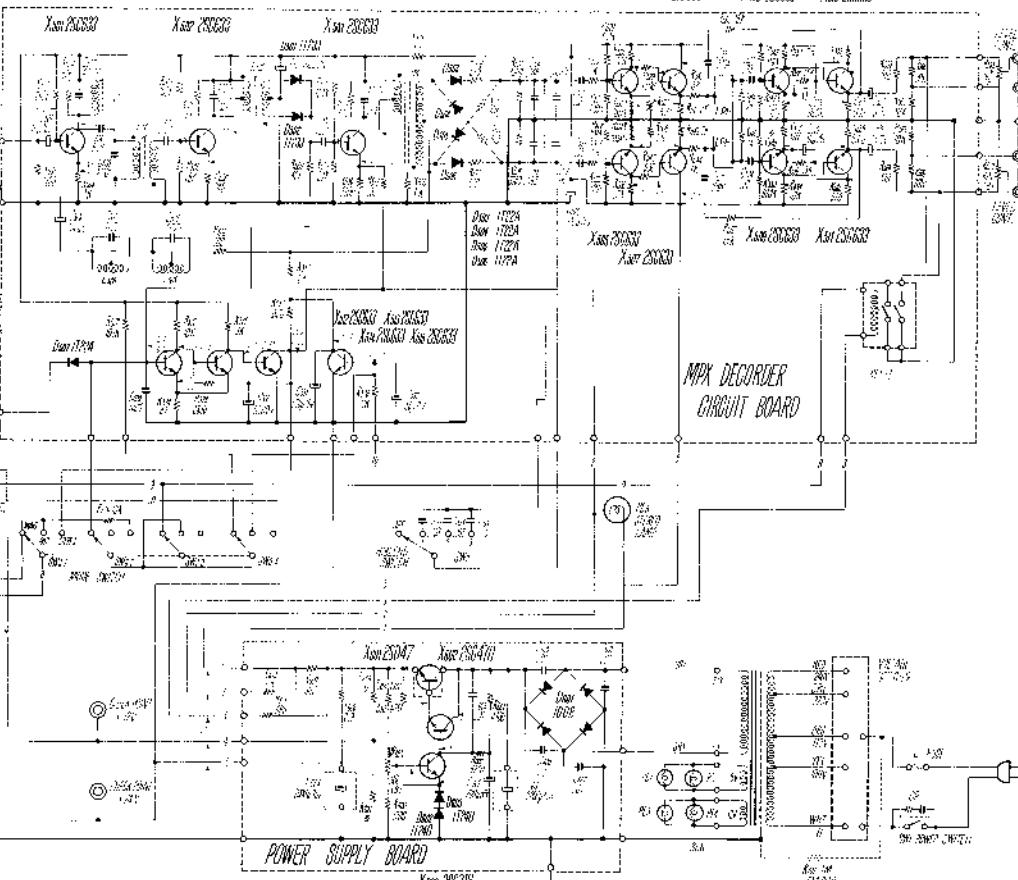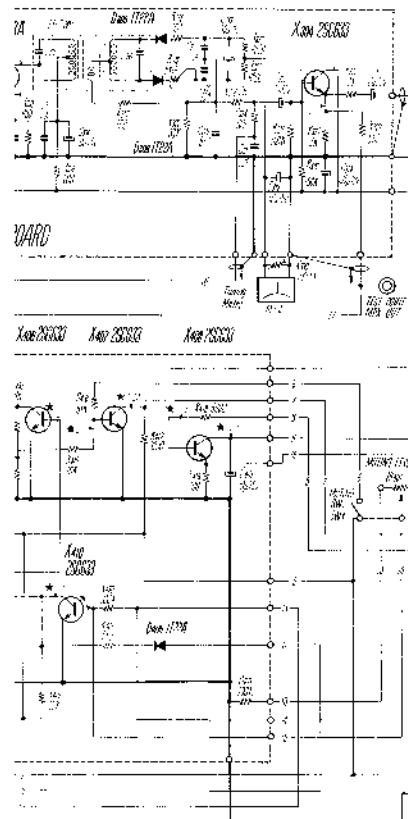

GND OFF

All d.c. voltages are measured with VTVM at no signal:

.. 27 ..

Xm 20030


DRAFT DRAWING 34057

.. 28 ..


ST-5000FW ST-5000FW

Mounting Diagram

Limiter and Detector Section

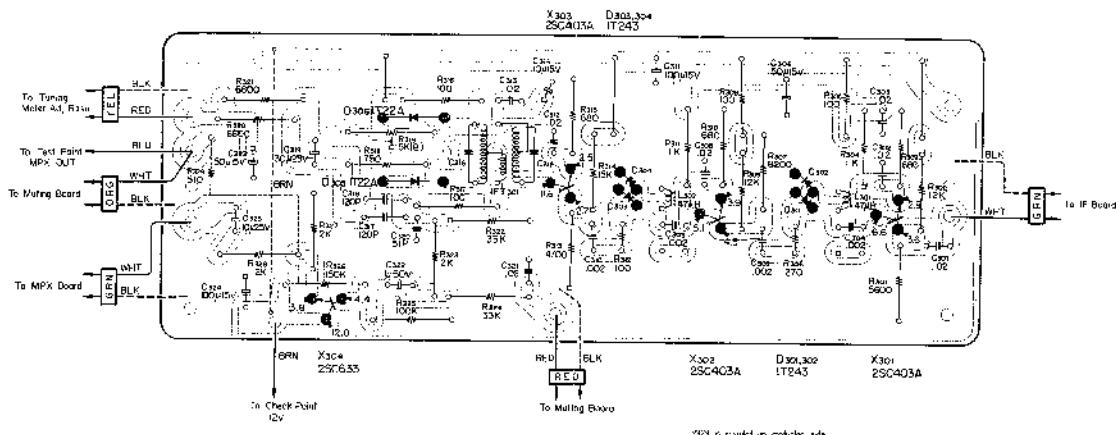

Component List

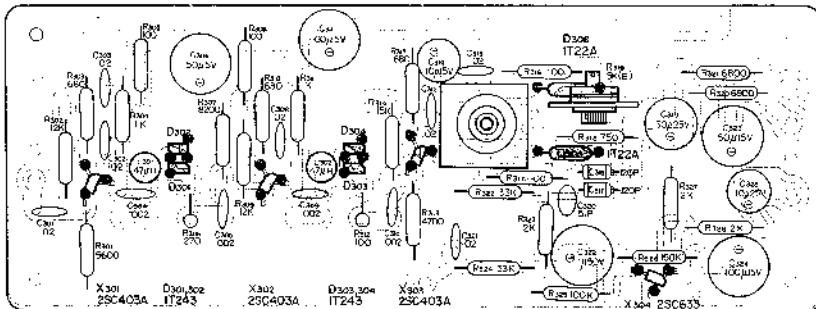


ST-5000FW

Mounting Diagram


F-Section

Digitized by srujanika@gmail.com

13 Tunc

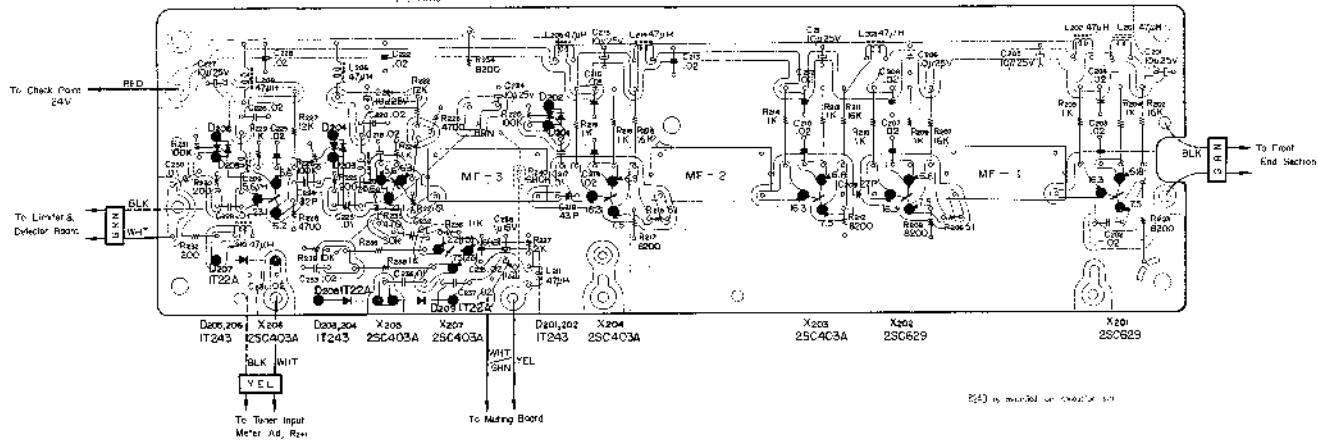


Opportunities - 2010


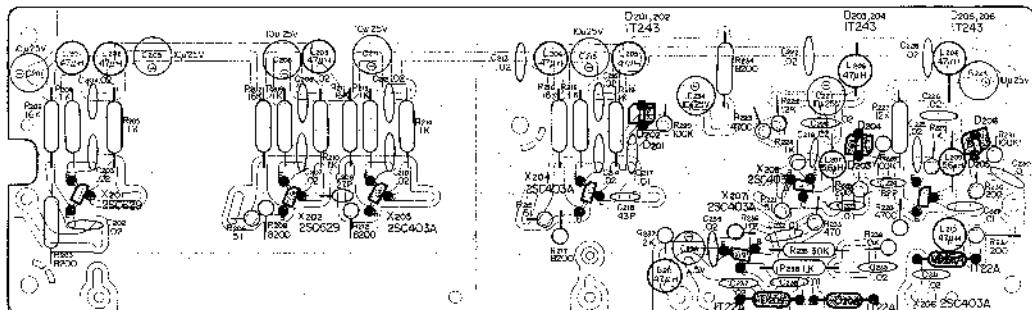


Mounting Diagram


Balun Section

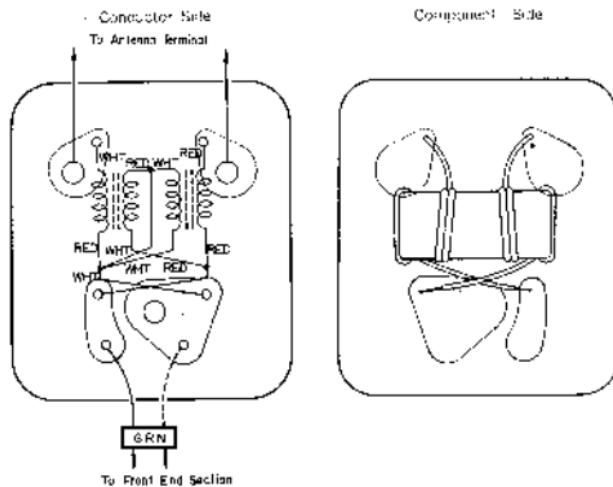

RF Mixer (converter) Section (Front End)

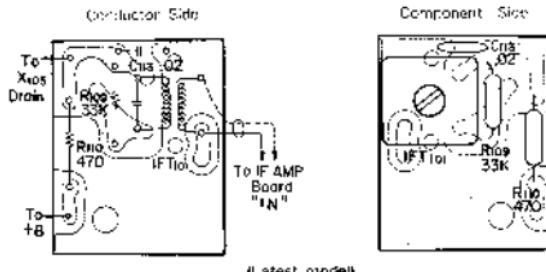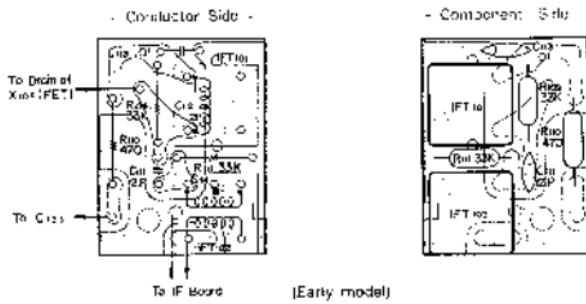


Mounting Diagram
Muting Circuit Board Section
Connector Side

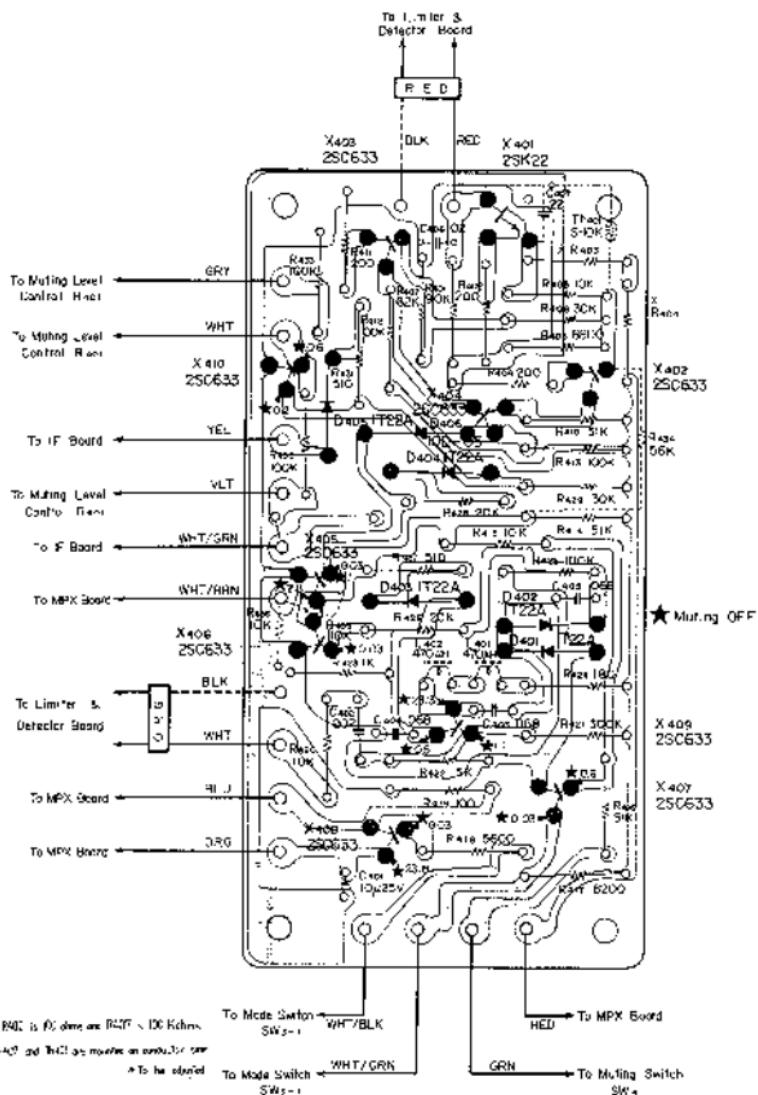


Mounting Diagram

Muting Circuit Board Section Component Side

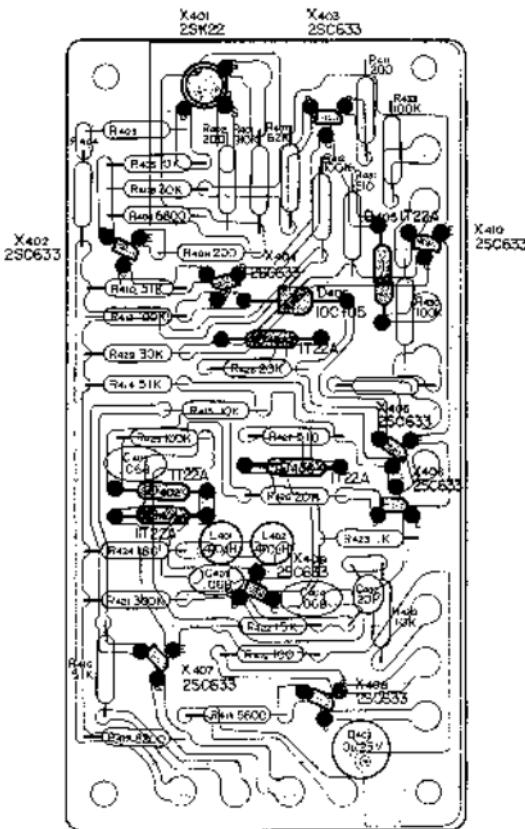


Mounting Diagram

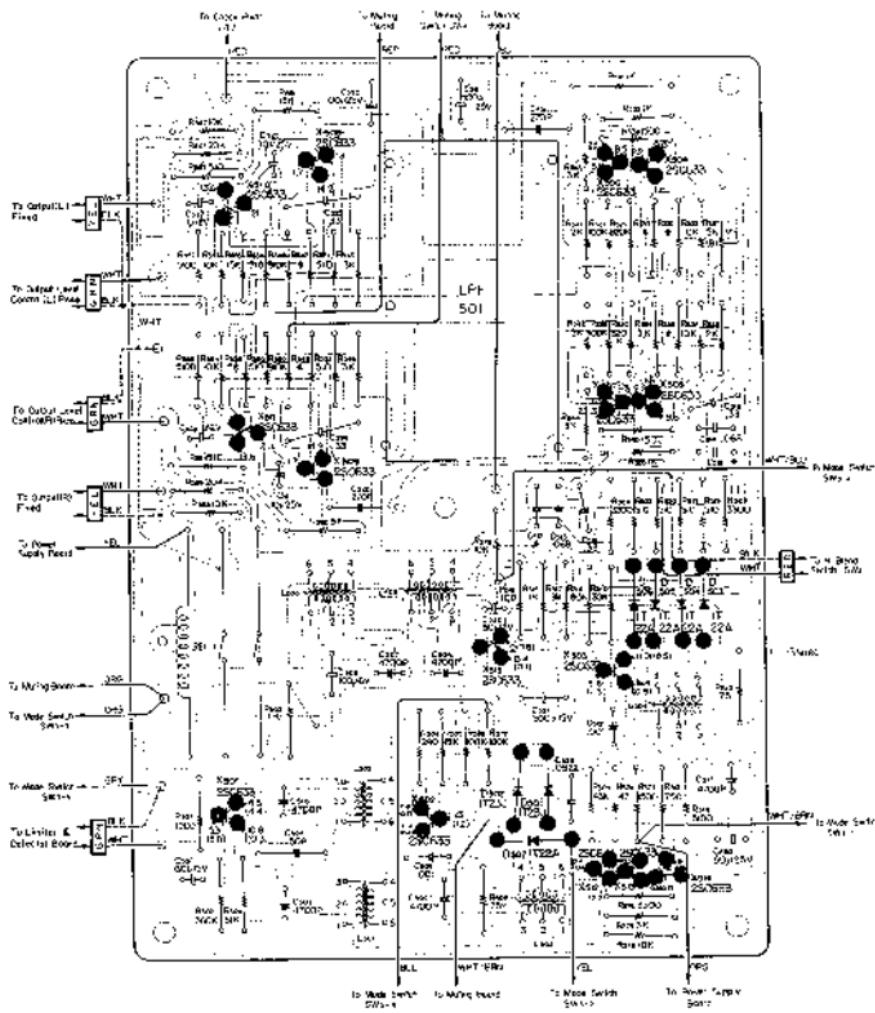MPX Decoder Section
Conductor Strip


Mounting Diagram

MPX Decoder Section

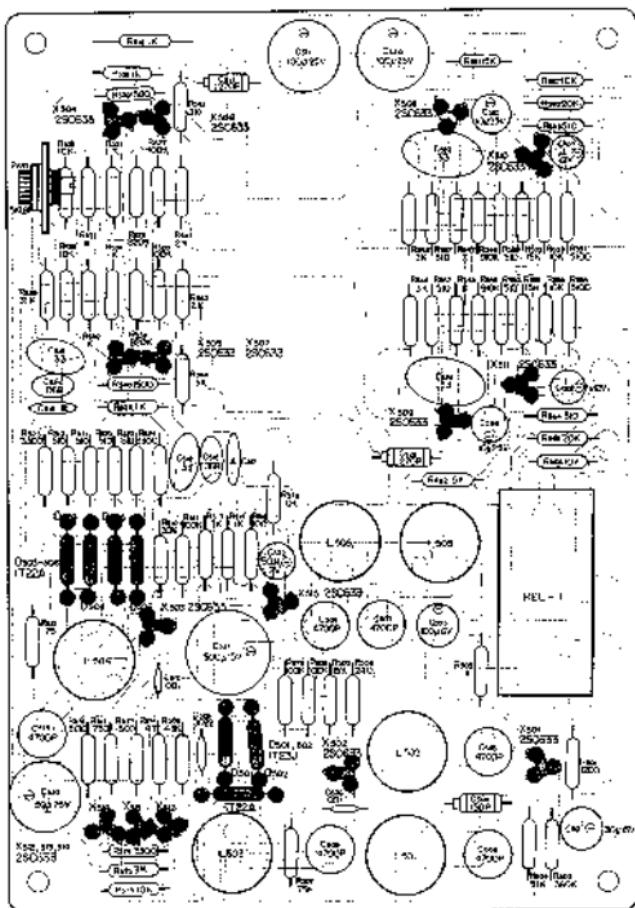

Mounting Diagram



《詩經》卷之二

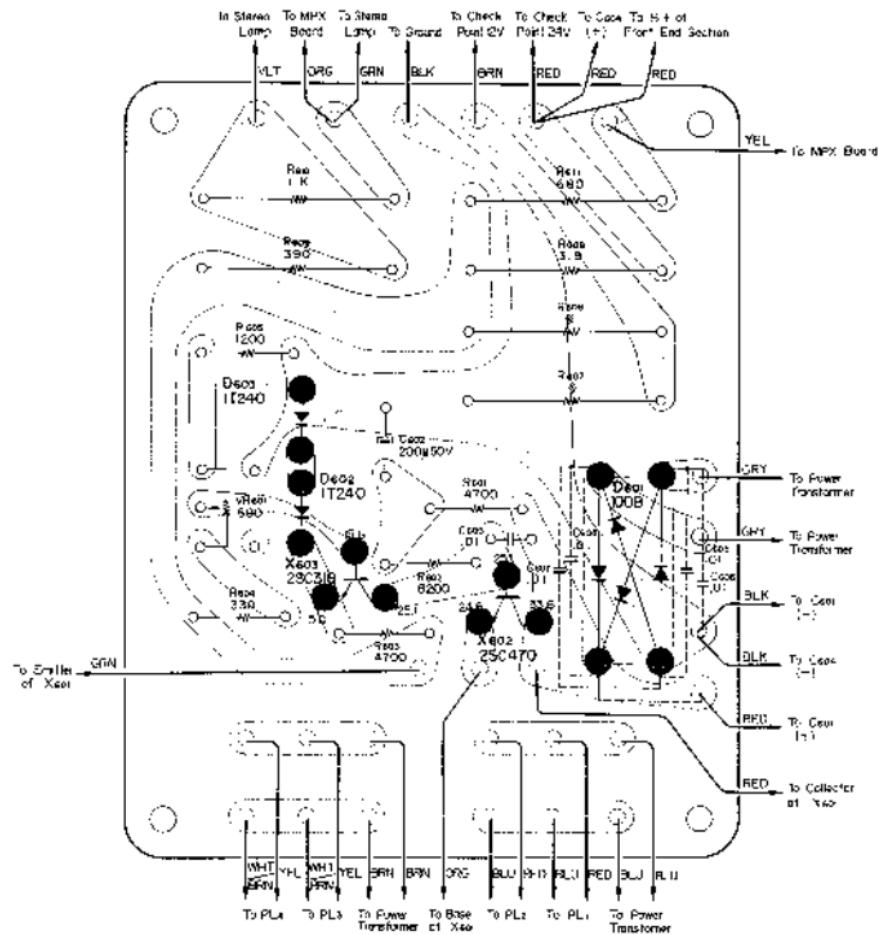

• 100% B2B mit ausgewählten Kunden für z.B.
• B2B-Vertrieb


ST-5000FW ST-5000FW

Power Supply Section

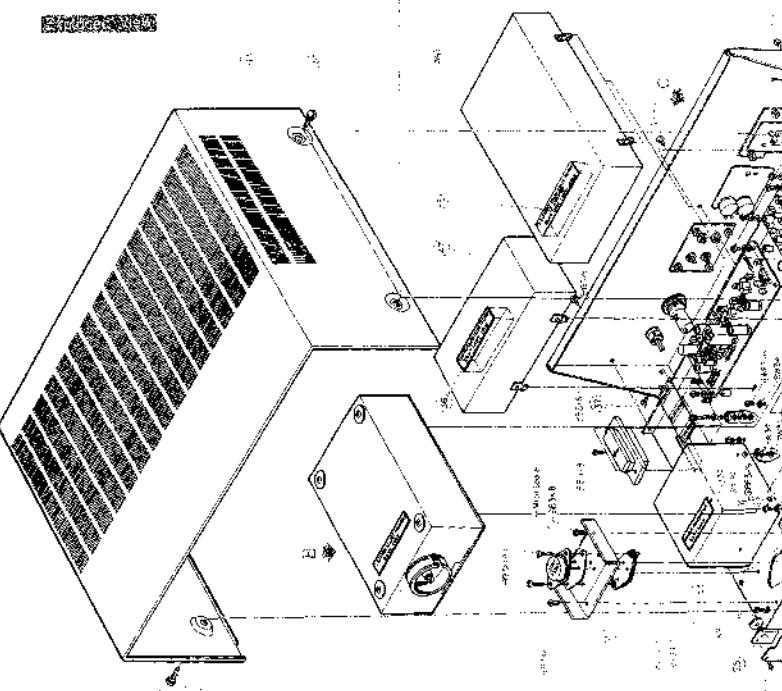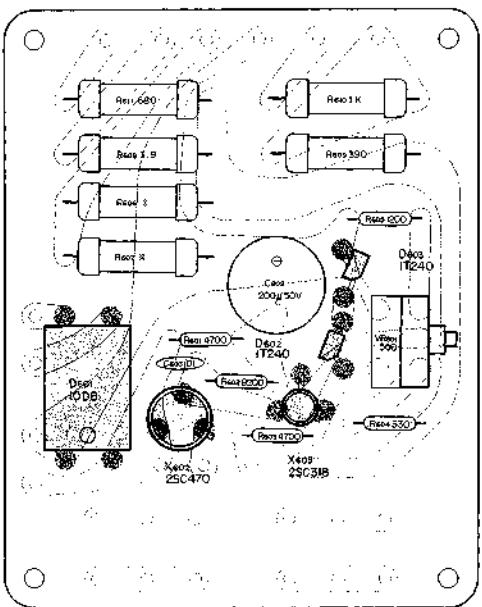



Princed Coast Board Harbour

Expected View

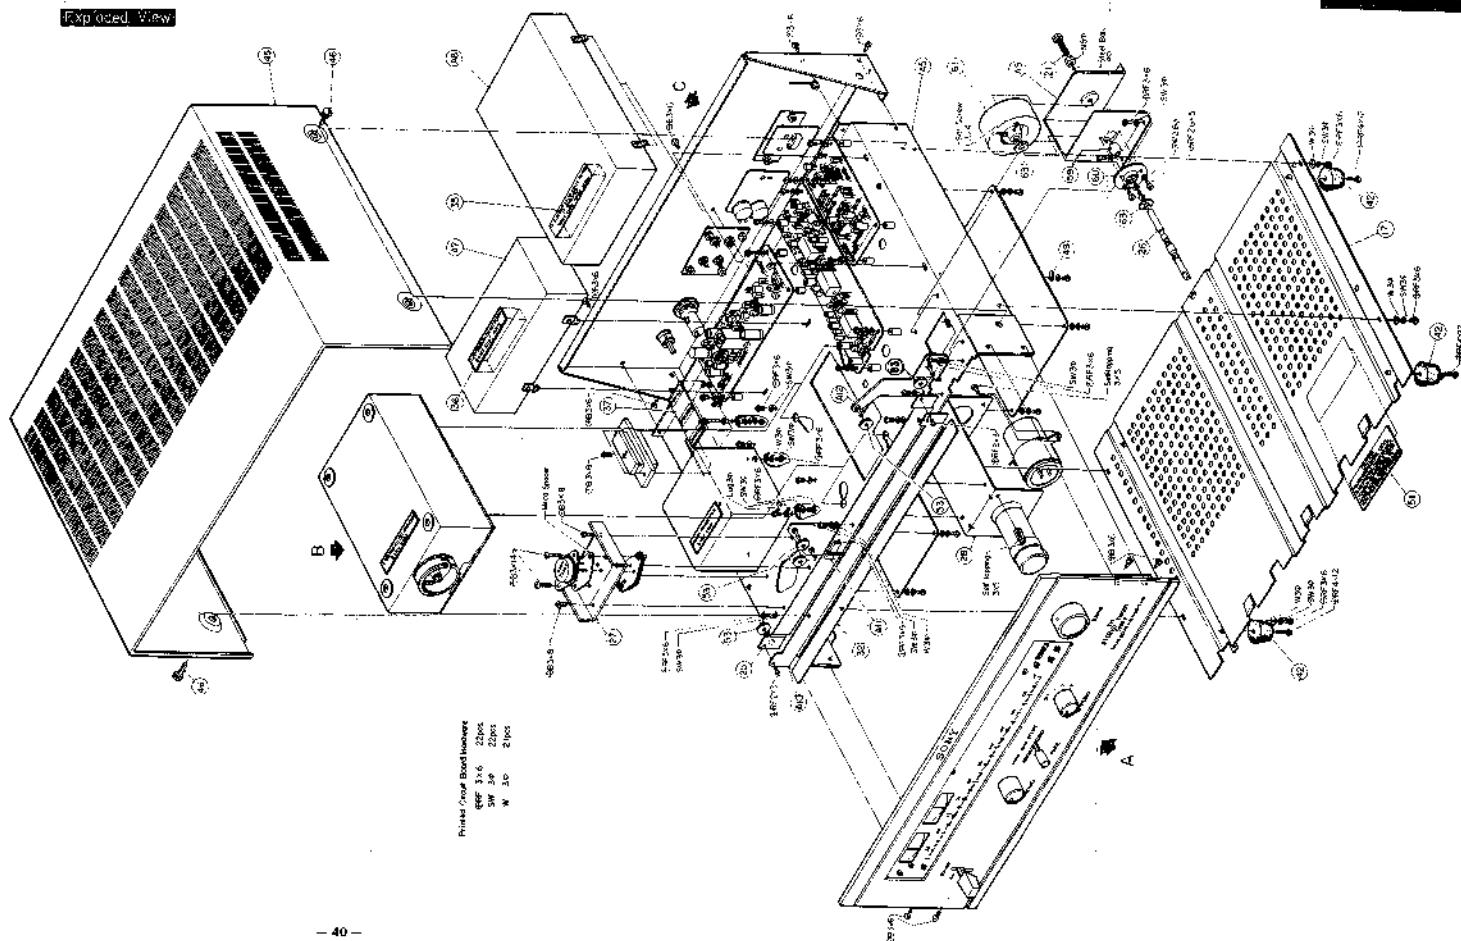


Exploded View

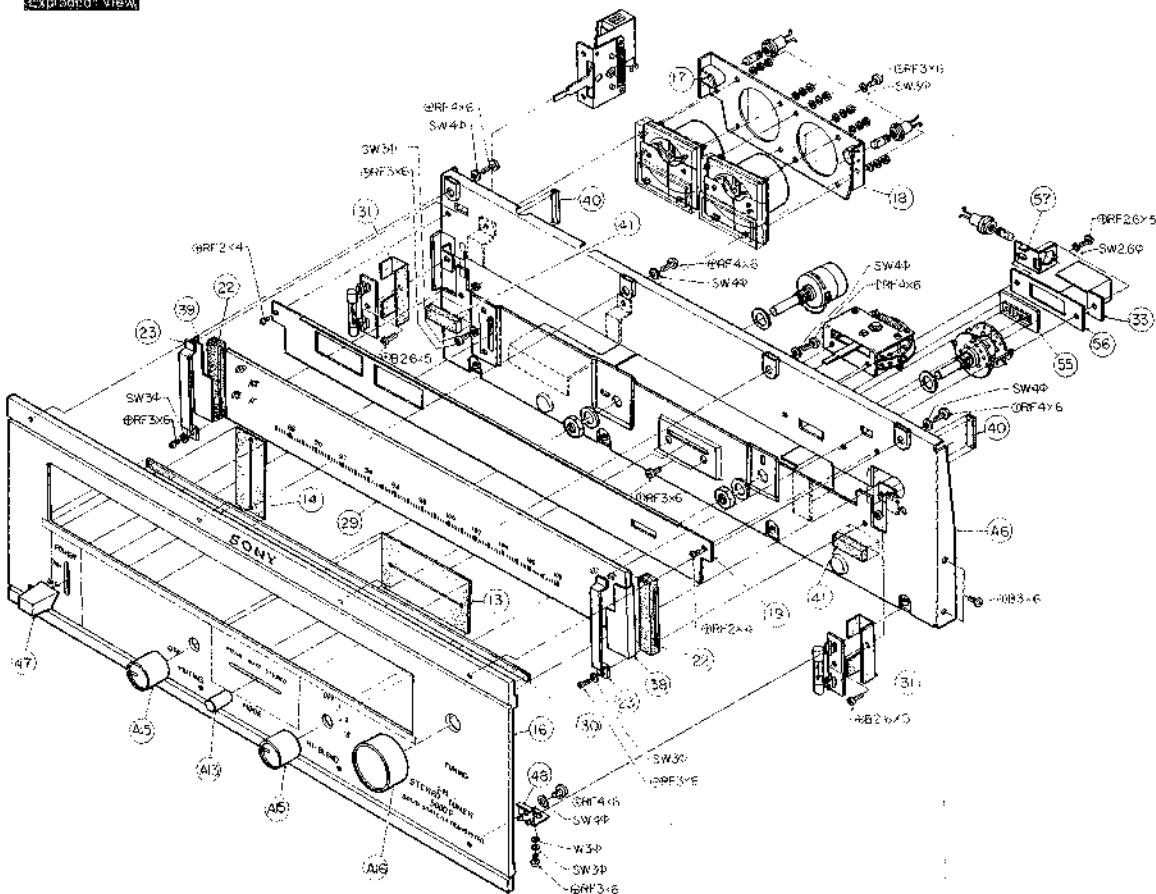

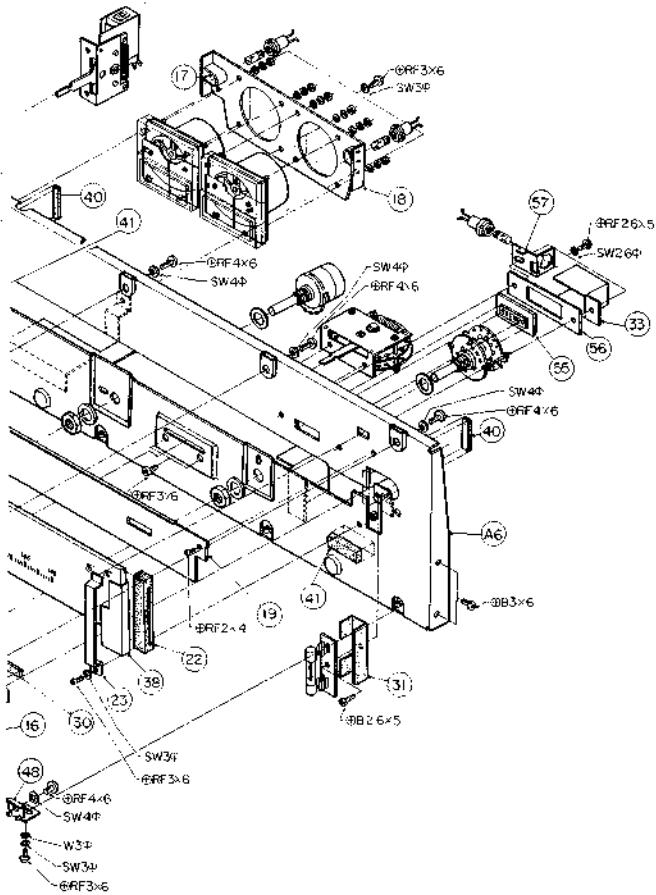


Exploded View

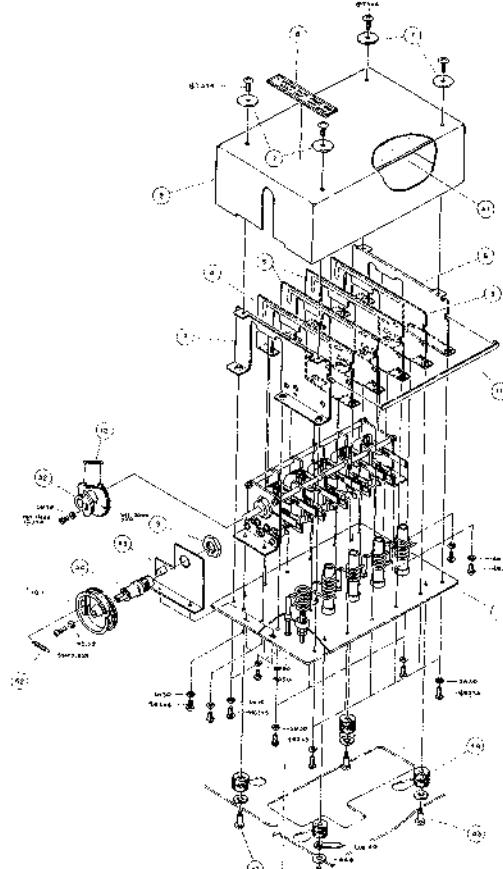

Exploded View

DETAIL "C"

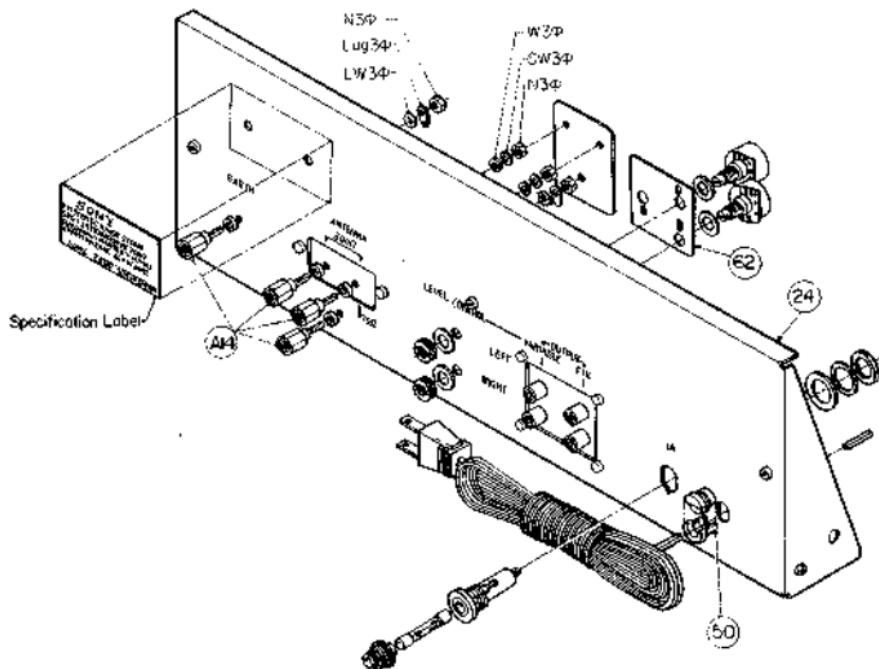

ST-5000FW

SONY CORPORATION

© 1982

— 46 —

4C0608-3

4-458-234-01

Printed in Japan

Revised

Complete Spare Parts List for ST-5000FW (UL, CSA, E)

July 30, 1968

Ref. No.	Part No.	Description	Q'ty
-------------	----------	-------------	------

I. Mechanical Parts

i) Front End Section

A1	X-3851B-01	Foil Ass'y, copper -----	1
A2	X-38512-01	Boss Ass'y, gear -----	1
A3	-02	Stopper Ass'y -----	1
A4	-03	Shaft Ass'y, drum -----	1
1	3-851-801	Chassis, front end -----	1
2	-802	Case, shield -----	1
3	-803	Plate A, shield -----	1
4	-804	Plate B, shield -----	1
5	-805	Plate C, shield -----	3
6	-806	Plate D, shield -----	1
7	-809	Washer, large -----	4
8	-810	Label, front end -----	1
9	-219	Nut -----	1
10	-220	Drum -----	1
11	-222	Bar, short -----	1
12	0-029-624	Spring, gear -----	1

ii) Main Chassis

A5	X-20472-01	Chassis Ass'y -----	1
A6	-02	Sub-panel Ass'y -----	1
A7	-03	Case Ass'y, shield; limiter & detector	1
A8	-04	Case Ass'y, shield; IF section -----	1
A9	-05	Bracket Ass'y, flywheel -----	1
A10	-06	Guide Ass'y, pointer -----	1
A11	-07	Pointer Ass'y -----	1
A12	-08	Plate Ass'y, pulley -----	1
A13	-09	Knob Ass'y, mode selector -----	1
A14	X-20319-01	Terminal Ass'y, output -----	4
A15	X-20320-03	Knob Ass'y, cutting & hi-blend -----	2
A16	X-38240-07	Knob Ass'y, tuning -----	1
13	2-047-106	Cushion A, light interception -----	1
14	-107	Cushion B, light interception -----	1
15	-211	Rivet -----	6
16	-226	Panel, front -----	1

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Q'ty</u>
17	2-047-227	Plate, bottom -----	1
18	-228	Bracket, meter -----	1
19	-229	Plate, dial back ; upper -----	1
20	-230	Plate, antenna terminal; black -----	1
22	-232	Cushion, dial plate -----	2
23	-233	Holder, dial plate -----	2
24	-234	Panel, rear -----	1
25	-235	Plate, dial back; lower -----	1
26	-236	Shaft, tuning -----	1
27	-237	Heat Sink, 2SD47 -----	1
28	-238	Bracket, electrolytic capacitor -----	1
29	-239	Plate, dial -----	1
30	-240	Cushion, rubber -----	1
31	-241	Insulator, pilot lamp -----	2
32	-242	Spacer, dial plate -----	1
33	-243	Cover, stereo lamp -----	1
34	-244	Label, specification (UL) -----	1
35	-245	✓Label, IF amplifier -----	1
36	-246	Label, limiter & detector -----	1
37	-248	Label, test point -----	1
38	-249	Spacer, dial plate (right) -----	1
39	-250	Spacer, dial plate (left) -----	1
41	-252	Rubber, black -----	2
	+258	Screw, adjustable -----	1
42	0-051-263	Foot, rubber -----	4
43	0-204-214	Screw, front end -----	4
44	-220	Cushion, front end -----	4
45	2-029-921	Cover, chassis -----	1
46	-930	Screw, chassis cover -----	4
47	-931	Knob, power ON/OFF switch -----	1
48	2-043-776	Bracket, front panel -----	4
49	3-401-179	Lug, wire retaining -----	2
50	3-410-032	Grommet, power cord -----	1
51	3-422-204	Label, caution -----	1
52	3-802-520	Spring, dial drum -----	1
53	3-811-140	Pulley, small -----	5
54	-819	Label, FCC -----	1
55	3-824-019	Indicator, stereo -----	1
56	-033	Retainer, stereo indicator -----	1
57	-034	Bracket, stereo lamp -----	1
58	-036	Filter, meter lamp -----	2
59	-039	Holder, tuning shaft -----	1
60	-040	Disc, tuning shaft holder -----	1

<u>Ref.</u>	<u>No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Q'ty</u>
61		3-824-041	Flywheel -----	1
62		-046	Plate, adjustable resistor -----	1
63		3-409-124	Washer, nylon -----	2
		7-633-120-32	String, dial -----	1,500mm

II. Accessories & Packing Materials

1-501-083	Antenna, ribbon -----	1
1-532-218	Fuse, M -----	1
1-534-049	Cord, connection WK-56 -----	1
3-413-100	Bag, polyethylene; complete set -----	1
3-701-020	Bag, polyethylene; manual, etc. -----	1
-026	Label, tack -----	1
3-790-768-32	Manual, instruction -----	1
3-994-399	Card, warranty -----	1
4-604-717	Card, inspection -----	1
X-44900-02	Cloth, polishing -----	1
7-491-001	Desiccant -----	1
2-029-944	Cushion, packing -----	2
3-824-055	Carton -----	1
3-824-060	Box, accessory -----	1
-061	Carton, master (for two sets) -----	½

III. Screws, Washers & Nuts

i) Front End Section

7-621-259-32	Screw, machine (+) RF 2.6 x 5 -----	1
-461-28	", " (+) T 3 x 4 -----	4
-770-43	", " (+) B 3 x 6 -----	6
-53	", " (+) B 3 x 5 -----	18
-713-22	", setting 3 x 4 -----	1
-999-72	", hexagonal 3 x 4 -----	4
7-623-107-25	Washer, plain 2.6 -----	1
-208-15	", spring 36 -----	24
-408-05	", lock 36 -----	1
-508-01	Lug 36 -----	1

ii) Main Chassis

7-621-255-19	Screw, machine (+) RF 2 x 3 -----	4
-259-32	", " (+) RF 2.6 x 5 -----	5

<u>Ref.</u> <u>No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Q'ty</u>
7-621-261-43	Screw, machine (+) RF 3 x 6	-----	58
-268-42	" , " (+) RF 4 x 6	-----	8
-268-73	" , " (+) RF 4 x 12	-----	4
-713-27	" , setting 3 x 4	-----	2
-722-31	" , self-capping 3 x 5	-----	4
-770-26	" , machine (+) B 3 x 6	-----	5
-39	" , " (+) B 3 x 8	-----	6
-43	" , " (+) B 3 x 6	-----	4
-773-68	" , " (+) B 3 x 14	-----	2
-771-33	" , " (+) B 2.6 x 5	-----	2
7-622-108-02	Nut 3d	-----	4
-312-02	" 5d	-----	1
7-623-108-13	Washer, plain 3d	-----	16
-110-13	" , " 4d	-----	4
-207-15	" , spring 2.6d	-----	5
-208-15	" , " 3d	-----	60
-210-15	" , " 4d	-----	8
-408-01	" , lock 3d	-----	2
-508-01	Lug 3d	-----	3
-510-01	" 4d	-----	1
-611-00	Eyelet 1.5 x 3	-----	1
7-671-114-01	Steel Ball 4d	-----	1

IV. Electrical Parts

i) Front End Section

Y-20472-51	Front End, completed (PMC-105W)	-----	1
1-538-770	Mounted Circuit Board, IFT	-----	1
	Printed Circuit Board, IFT	-----	1
	Field Effect Transistor 2SK22DF		
	X101,103,105,106	-----	4
1-141-067	Capacitor, trimmer; cylinder CT101 - 105	-----	5
1-102-019	Capacitor, feed through C120 - 127	-----	8
1-151-164	Capacitor, tuning; 5 gang CV101 - 105	--	1
1-401-332	Coil, antenna L101	-----	1
1-403-282	Transformer, IF IFT101	-----	1
-286	" , IF IFT102	-----	1
1-405-329	Coil, oscillator L106	-----	1
1-407-184	Inductor, micro 3.3uF L107 - 110	-----	4
1-425-397	Coil (1), RF L102	-----	1

4/14 (ST-5000FW.UL, CSA, E)

(HT-2)

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>			<u>Q'ty</u>
1-425-398	Coil (2), RF	L103	-	-	1
-399	" (3), RF	L104	-	-	1
-400	", mixer	L105	-	-	1
<u>Capacitor, ceramic</u>					
1-101-952	2PF	+0.5PF	25V	C111	-
-869	27P	+5%	"	C116	-
-140	0.005uF	+80% -20%	"	C118	-
-141	0.01uF	"	"	C113	-
-972	18PF	+5%	"	C104,106,110	-
1-102-861	20PF	"	"	C115	-
1-101-938	1.5PF	+10%	500V	C105	-
-142	0.02uF	"	25V	C103,109	-
-973	20PF	"	"	C101	-
<u>Capacitor, mylar</u>					
1-105-673	0.01uF	+10%	50V	C119	-
<u>Resistor, carbon</u>					
1-244-653	150 ohms	+5%	RD45R	R105	-
-665	470 "	"	"	R110	-
-670	750 "	"	"	R113	-
-671	820 "	"	"	R115	-
-680	2K "	"	"	R104,108	-
-685	3.3K "	"	"	R112	-
-709	33K "	"	"	R109,111	-
-751	1.8M "	"	"	R114	-
-753	2.2M "	"	"	R102,106	-
(ii) <u>IF Section</u>					
1-538-772	Mounted Circuit Board, IF circuit			-	1
1-403-293	Printed Circuit Board, IF circuit			-	1
1-407-165	Filter, solid state	ME-1,2,3	-	-	3
	Inductor, micro	47uH	L201 - 206, 208,	-	
			210,211	-	9
-187	"	5.6uH	L207,209	-	2
	Transistor 2SC403A		X203 - 207	-	5
	"	2SC629	X201,202	-	2

5/14 (ST-5000FMUL, CSA, E)

(HT-2)

<u>Ref.</u>	<u>No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Q'ty</u>
			Diode 1T22AJ	D207 - 209 ---- 3
			" 1T243	D201 - 206 ---- 6
			<u>Capacitor, ceramic</u>	
1-101-869	27PF	+5%	50V C209 ----- 1	
-878	43PF	"	" C218 ----- 1	
-892	82PF	"	" C224 ----- 1	
-141	0.01uF	(+100% -0%)	" C217,223,229, 230,232,236 -- 6	
-142	0.02uF	" "	" C202 - 204,207, 208,210,212 - 214,216,219, 220,222,225, 226,228,231, 233,235,237 -- 20	
			<u>Capacitor, electrolytic</u>	
1-121-439	1uF	15V	C236 ----- 1	
-371	10uF	25V	C201,205,206, 211,215,221, 227,234 ----- 8	
			<u>Resistor, carbon</u>	
1-242-642	51 ohms	+5%	RD k UR R206,215,221 -- 3	
-665	470 "	"	" R233 ----- 1	
-673	1K "	"	RD k SR R204,205,209, 210,213,214, 218,219,238 -- 9	
-698	11K "	"	RD k UR R236 ----- 1	
-680	2K "	"	" R237 ----- 1	
-689	4.7K "	"	" R223,228 ----- 2	
-695	8.2K "	"	RD k SR R203,234 ----- 2	
-699	12K "	"	" R227 ----- 1	
-702	16K "	"	R202,207,211, 216 ----- 4	
-708	30K "	"	" R235 ----- 1	
-721	100K "	"	RD k UR R220,226,231 -- 3	
1-244-741	680K "	"	RD k SR R240 ----- 1	
1-242-656	200 "	"	RD k UR R225,230,232 -- 3	
-673	1K "	"	R224,229 ----- 2	

<u>Ref.</u> <u>No.</u>	<u>Part No.</u>	<u>Description</u>			<u>Q'ty</u>
	1-242-695 -699	8.2K ohms 12K "	RD4UR " R222 -----	R208,212,217 -----	3 1
iii) Limiter & Detector Section					
		Mounted Circuit Board, limiter & detector section -----			1
1-538-773		Printed Circuit Board, limiter & detector section -----			1
1-221-389		Resistor, adjustable 5K ohms (B)	R319	--	1
1-403-291		Transformer, discriminator IFT301	-----		1
1-407-165		Inductor, micro 47uH	L301,302	-----	2
		Transistor 2SC403A	X301 - 303	----	3
		" 2SC633	X304	-----	1
		Diode IT243	D301 - 304	----	4
		" IT22AJ	D305,306	-----	2
Capacitor, ceramic					
1-101-882 -919	51PF 0.002uF	+5% (+80% -20%	50V 25V " " " " " "	C320 C304,305,309, 310 C301 - 303,308, 312,313,321	1 4 7
-142	0.02uF	"	"	-----	
Capacitor, styrol					
1-103-603	120PF	+5%	50V	C317,318	----- 2
Capacitor, electrolytic					
1-121-334 -371 -373 -338 -340 -343	10uF 10uF 30uF 50uF 100uF 1uF	15V 25V 25V 15V 15V 50V	C314 C325 C319 C306,323 C311,324 C322	----- ----- ----- ----- ----- -----	1 1 1 2 2 1
Resistor, carbon					
1-244-649	100 ohms	+5%	RD4SR	R305,308,316, 317	----- 4
1-242-659	270	"	RD4UR	R306	----- 1

7/14 (ST-5000FW.UL, CSA, E)

(HT-2)

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>			<u>Q'ty</u>
1-244-666	510 ohms	+5%	RDA5R	R329 -----	1
-669	680 "	"	"	R303,310,315 --	3
-670	750 "	"	"	R318 -----	1
-673	1K "	"	"	R304,311 -----	2
-680	2K "	"	"	R323,327,328 --	3
-689	4.7K "	"	"	R313 -----	1
-691	5.6K "	"	"	R301 -----	1
-693	6.8K "	"	"	R320,321 -----	2
-695	8.2K "	"	"	R307 -----	1
-699	12K "	"	"	R302,309 -----	2
-701	15K "	"	"	R314 -----	1
-709	33K "	"	"	R322,324 -----	2
-721	100K "	"	"	R325 -----	1
-725	150K "	"	"	R326 -----	1
1-242-649	100 "	"	RDA5R	R312 -----	1

iv) Muting Circuit Section

1-538-774	Mounted Circuit Board, muting circuit	--	1
1-407-177	Printed Circuit Board, muting circuit	--	1
	Inductor, micro 470uH	L401,402	-----
	Field Effect Transistor 2SK23	X401	-----
	Transistor 2SC633	X402 ~ 410	9
	Diode 1T22AJ	D401 ~ 405	5
	" 10D-05	D406	-----
	Thermistor S-10K	Th401	-----

Resistor, solid adjustable

1-221-997	2.2K ohms		R403	-----	1
-----------	-----------	--	------	-------	---

Capacitor, ceramic

1-101-864	20PF	+5%	50V	C402	-----	1
-142	0.02uF	(+100%/-0%)	"	C406	-----	1

Capacitor, mylar

1-105-683	0.068uF	+10%	50V	C403 ~ 405	---	3
-419	0.22uF	+20%	35V	C407	-----	1

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>				<u>Qty</u>
		<u>Capacitor, electrolytic</u>				
1-121-371	10uF	25V	C401	-----	1	
		<u>Resistor, carbon</u>				
1-244-649	100 ohm	±5%	RDI-8R	R419	-----	1
-655	"	"		R424	-----	1
-636	200 "	"		R402, 409, 411	--	3
-666	510 "	"		R431, 427	----	2
-673	1K "	"		R423	-----	1
-693	6.8K "	"		R406	-----	1
-691	5.6K "	"		R418	-----	1
-695	8.2K "	"		R417	-----	1
-697	10K "	"		R405, 415, 420, 435, 436	-----	5
-701	15K "	"		R422	-----	1
-704	20K "	"		R426, 428	----	2
-708	30K "	"		R408	-----	1
-714	51K "	"		R410, 414, 416	--	3
-721	100K "	"		R412, 413, 425, 430, 433	-----	5
-732	300K "	"		R421	-----	1
-744	910K "	"		R401	-----	1
-715	56K "	"		R434, 407	-----	2
-713	47K "	"		R429	-----	1
-683	2.7K "	"		R404	-----	1
-713	47K "	"		R407 (Adjust)	-----	1
-714	51K "	"		R407 (")	-	1

V. MPX Decoder Section

1-538-775	Mounted Circuit Board, MPX decoder	-----	1
1-221-389	Printed Circuit Board, MPX decoder	-----	1
1-231-066	Resistor, adjustable 5K ohm (B)	R537	-
1-409-138	Filter, low pass	-----	1
-139	Coil, trap	L505	-----
1-425-401	Coil, trap	L506	-----
-402	Transformer, MPX	L503	-----
-403	" , " L504	-----	1
1-515-801	" , " L501, S02	-----	2
	Relay, reed	REL-1	-----

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Q'ty</u>
		<u>Transistor</u>	
	2SC633	X501 - 503 -----	3
	" 2SC633	X504 - 513,515 ----	11
	" 2SC633	X514 -----	1
	Diode 1T23J	D501,502 -----	2
	" 1T22AJ	D503 - 507 -----	5
		<u>Capacitor, styro</u>	
1-103-605	150PF +5%	50V C504 -----	1
-611	270PF "	C521,522 -----	2
-575	4700PF "	C502,505,507 - 509, 513 -----	6
		<u>Capacitor, mylar</u>	
1-105-661-12	0.001uF ±10%	50V C506,512 -----	2
-665-12	0.0022uF "	C529 -----	1
-681-12	0.047uF "	C514,515 -----	2
1-106-550-12	0.33uF "	35V C518,519,523,524 ---	4
1-105-667-12	0.0033uF "	50V C516,517(Adjust) --	2
-669-12	0.0047uF "	C516,517(")	2
-677-12	0.022uF "	C536,537(just)	2
-667-12	0.0033uF "	C536,537(")	2
		<u>Capacitor, electrolytic</u>	
1-121-442	1uF	50V C527,528 -----	2
-371	10uF	25V C525,526 -----	2
-336	30uF	15V C501 -----	1
-489	50uF	12V C532 -----	1
-375	50uF	25V C530 -----	1
-315	100uF	6V C503 -----	1
-377	100uF	25V C511,520 -----	2
-426	500uF	15V C531 -----	1
		<u>Resistor, carbon</u>	
1-244-641	47 ohms +5%	RDI&SR R574 -----	1
-649	100 "	R516 -----	1
-658	240 "	R506 -----	1
-666	510 "	R519 + 522,551, 552,559,560, 563,564 -----	10
-670	750 "	R512 -----	1

10/14 (ST-5000FW,UL, CSA, E)

(RT-2)

Revised
Oct. 1970

<u>Ref No.</u>	<u>Part No.</u>	<u>Description</u>				<u>Q'ty</u>
1-244-673		1K ohms	$\pm 5\%$	RDI&SR	R503,515,518, 525,526,533, 534 -----	7
-677	1.5K "	"	"		R539,540,577 ---	3
-680	2K "	"	"		R538,541,542 ---	3
-684	3K "	"	"		R517,543 - 546, 575 -----	6
-685	3.3K "	"	"		R523,524,576 ---	3
-690	5.1K "	"	"		R514,557,558 ---	3
-697	10K "	"	"		R535,536,553, 554,567,568, 573,578,579 ---	9
-701	15K "	"	"		R555,556,561, 562,505 -----	5
-704	20K "	"	"		R565,566 -----	2
-708	30K "	"	"		R510 -----	1
-712	43K "	"	"		R509 -----	1
-714	51K "	"	"		R504 -----	1
-718	75K "	"	"		R507,513 -----	2
-721	100K "	"	"		R508,511,527, 528,572 -----	5
-734	360K "	"	"		R502 -----	1
-741	820K "	"	"		R529,530 -----	2
-744	910K "	"	"		R549,550 -----	2
-675	1.2K "	"	"		R501 -----	1
-649	100 "	"	"		R531,532(Adjust)	
-656	200 "	"	"		R531,532(")	1
-660	300 "	"	"		R531,532(")	
-718	75K "	"	"		R547,548(Adjust)	
-719	82K "	"	"		R547,548(")	1

vi) Power Supply Section

1-538-776		Mounted Circuit Board, power supply	----	1
1-223-012		Printed Circuit Board, power supply	----	1
		Resistor, adjustable; wire wound		
		500 ohms (B)	VR601 -----	1
1-526-502		Socket, power transistor	-----	1
		Transistor 2SD47	X601 -----	1
		" 2SC470	X602 -----	1
		" 2SC318	X603 -----	1
		Diode LT240	D602,603 -----	2
		" 10BB	D601 -----	1

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>			<u>Q'ty</u>
<u>Capacitor, mylar</u>					
1-105-673	0.01uF	50V	C603	-----	1
-873	0.01uF	100V	C605	- 608 -----	4
<u>Capacitor, electrolytic</u>					
1-121-731	200uF	50V	C602	-----	1
<u>Resistor, carbon</u>					
1-209-143	3.9 ohms	+5%	R1	R608	-----
-164	"	"		R609	-----
1-204-074	580 "	"		R611	-----
1-203-033	1K "	"		R610	-----
1-244-661	330 "	"	RD4SR	R604	-----
-675	1.2K "	"		R605	-----
-689	4.7K "	"		R601,603	-----
-695	8.2K "	"		R602	-----
1-209-044	100 "	"	R1	R606 (Adjust)	
-160	120 "	"		R606 ("")	-- 1
1-204-276	150 "	"		R606 ("")	-- 1
1-209-162	220 "	"		R607 (Adjust)	
-163	270 "	"		R607 ("")	-- 1
1-204-277	330 "	"		R607 ("")	
<u>vii) General Section</u>					
1-538-771	Mounted Circuit Board, balun				1
1-221-276	Printed Circuit Board, balun				1
-779	Resistor, variable 5K ohms (T) R241,330				2
1-222-113	" " 10K " (B) R569,570				2
1-231-057	Control, muting level with switch SW4				1
1-617-014-21	Encapsulated Component 0.033uF+120 ohms VR401				1
1-441-381	Balun (antenna matching transformer) B101				1
1-507-164	Power Transformer				1
1-514-369	Jack, 4-pin				1
-338	Switch, lever; power ON/OFF SW1				1
-370	" , " ; mode SW3				1
1-517-025	" , rotary; hi-blend SW2				1
1-518-061	Socket, pilot lamp				3
1-514-524	Lamp, pilot. PL3,4				2
	Switch, slide; de-emphasis SW5				1

12/14 (ST-5000FW.UL, CSA, E)

(HT-2)

Revised
Oct. 1970

<u>Ref.</u> <u>No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Q'ty</u>
1-518-062	Lamp, pilot	PL5 -----	1
-070	" (cylinder)	PL1,2 -----	2
1-520-060	Meter, tuning	M1 -----	1
-061	" , tuner input	M2 -----	1
1-526-165	Socket, voltage selector	VS -----	1
1-532-145	Fuse, UL	F -----	1
1-533-051	Holder, lamp	-----	2
-048	Post, fuse	-----	1
1-534-330	Cord, power	-----	1
1-535-029	Terminal, test point	TP2 - 4 -----	3

Capacitor, mylar

1-105-679	0.033uF	50V	C535 -----	1
-683	0.068uF	"	C534 -----	1
-687	0.15uF	"	C533 -----	1

Capacitor, electrolytic

1-121-030	2000uF	50V	C601 -----	1
-328	2000uF	35V	C604 -----	1

Resistor, carbon

1-204-128	1.0 ohms	+5%	RD1P R704,705 -----	2
1-244-818	5.1 "	"	RD4SP R702,703 -----	2

* * * * *

Additional Parts for Canada Model

2-047-256	Label, specification	-----	1
-259	Label, fuse caution	-----	1
-260	Label, CSA	-----	1
2-029-991	Label, caution	-----	1
1-532-164	Fuse	-----	1
1-201-564	Resistor, composition RC4 750K ohms	R701	1
7-621-770-40	Screw, machine (+) B 3 x 10	-----	1
3-701-041	Label, CSA	-----	1

<u>Ref.</u>	<u>No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Qty</u>
<u>Additional Parts for General Model</u>				
	2-047-255		Label, specification -----	1
	2-029-953		Label, voltage -----	1
	3-790-768-11		Manual, instruction -----	1
	1-532-164		Fuse -----	1
	1-534-241-15		Cord, power -----	1
	3-793-082		Supplement -----	1

14/14 (ST-5000PW, UL, CSA, E)

(HT-2)

Complete Spare Parts List for ST-5000FW(A) (UL, CSA, E)

Sept. 24, 1968

<u>Ref.</u>	<u>No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Q'ty</u>
-------------	------------	-----------------	--------------------	-------------

I. Mechanical Parts

i) Front End Section

X-38526-01	Shaft Ass'y -----	1
X-38512-01	Boss Ass'y, gear -----	1
	-03 Shaft Ass'y, drum -----	1
3-852-602	Chassis Ass'y, front end -----	1
	-603 Case, shield -----	1
	-604 Plate, shield -----	1
0-029-624	Spring, gear -----	1
3-851-219	Nut -----	1
	-809 Washer, large -----	4
	-220 Drum -----	1

ii) Main Chassis

A5	X-20472-01	Chassis Ass'y -----	1
A6	.02	Sub-panel Ass'y -----	1
A7	.03	Case Ass'y, shield; limiter & detector -----	1
A8	.04	Case Ass'y, shield; IF section -----	1
A9	.05	Bracket Ass'y, flywheel -----	1
A10	.06	Guide Ass'y, pointer-----	1
A11	.07	Pointer Ass'y -----	1
A12	.08	Plate Ass'y, pulley -----	1
A13	.09	Knob Ass'y, mode selector -----	1
A14	X-20319-01	Terminal Ass'y, output -----	4
A15	X-20320-03	Knob Ass'y, muting & yi-blend -----	2
A16	X-38240-07	Knob Ass'y, tuning -----	1
13	2-047-106	Cushion A, light interception -----	1
14	-107	Cushion B, light interception -----	1
15	-211	Rivet -----	6
16	-226	Panel, front -----	1
17	-227	Plate, bottom -----	1
18	-228	Bracket, meter -----	1
19	-229	Plate, dial back; upper -----	1
20	-230	Plate, antenna terminal; black -----	1
22	-232	Cushion, dial plate -----	2

<u>Ref.</u>	<u>No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Q'ty</u>
23	2-047-233		Holder, dial plate -----	2
24	-234		Panel, rear -----	1
25	-235		Plate, dial back; lower -----	1
26	-236		Shaft, tuning -----	1
27	-237		Heat Sink, 2SD47 -----	1
28	-238		Bracket, electrolytic capacitor -----	1
29	-239-22		Plate, dial scale -----	1
30	-240		Cushion, rubber -----	1
31	-241		Insulator, pilot lamp -----	2
32	-242		Spacer, dial plate -----	1
33	-243		Cover, stereo lamp -----	1
34	-244		Label, specification (UL) -----	1
35	2-056-001		Label (A), IF -----	1
36	2-047-246		Label, limiter& detector -----	1
37	-248		Label, test point -----	1
38	-249		Spacer, dial plate (right) -----	1
39	-250		Spacer, dial plate (left) -----	1
41	-252		Rubber B, black -----	2
	-258		Screw, adjustable -----	1
42	0-051-263		Foot, rubber -----	4
43	0-204-214		Screw, front end -----	4
44	-220		Cushion, front end -----	4
45	2-029-921		Cover, chassis -----	1
46	-930		Screw, chassis cover -----	4
47	-931		Knob, power ON/OFF switch -----	1
48	2-043-776		Bracket, front panel -----	4
49	3-401-179		Lug, wire retaining -----	2
50	3-410-032		Grommet, power cord -----	1
51	3-422-204		Label, caution -----	1
52	3-802-520		Spring, dial drum-----	1
53	3-811-140		Pulley, small -----	5
54	-819		Label, FCC -----	1
55	3-874-019		Indicator, stereo -----	1
56	-033		Retainer, stereo indicator -----	1
57	-034		Bracket, stereo lamp -----	1
58	-036		Filter, meter lamp -----	2
59	-039		Holder, tuning shaft -----	1
60	-040		Disc, tuning shaft holder -----	1
61	-041		Flywheel -----	1
62	-046		Plate, adjustable resistor -----	1
63	-059		Packing -----	2
64	2-047-251		Felt, back -----	2
	7-633-120-32		String, dial -----	1,500mm

2/14 (ST-5000FW(A) UL, CSA, R)

(BT-2A)

<u>Ref.</u>	<u>No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Q'ty</u>
65		2-056-002	Attachment (A), cover -----	1
66		-003	Attachment (B), cover -----	1
67		-004	Cover (A), front end -----	1
68		-005	Label (A), front end -----	1
69		-008	Case -----	4

II. Accessories & Packing Materials

1-501-083	Antenna, ribbon -----	1
1-532-145	Fuse, UL -----	1
1-534-049	Cord, connection Rk-56 -----	1
3-413-100	Bag, polyethylene; complete set -----	1
3-701-020	Bag, polyethylene; manual, etc. -----	1
-026	Label, tack -----	1
3-790-768-32	Manual, instruction -----	1
3-797-795-31	Card, warranty -----	1
4-404-717	Card, inspection -----	1
X-44900-02	Cloth, polishing -----	1
7-491-001	Desiccant -----	1
2-029-944	Cushion, packing -----	2
3-824-055	Carton -----	1
3-824-060	Box, accessory -----	1
-061	Carton, master (for two sets) -----	½

III. Screws, Washers & Nuts

i) Front End Section

7-621-261-33	Screw, machine (+) RF 3 x 5 -----	9
-713-27	", setting 3 x 4 -----	1
-999-72	", hexagonal 3 x 4 -----	1
7-623-208-22	Washer, spring 3¢ -----	9

ii) Main Chassis

7-621-255-19	Screw, machine (+) RF 2 x 3 -----	4
-259-32	" " (+) RF 2.6 x 5 -----	6
-261-24	" " (+) RF 3 x 4 -----	4
-261-43	" " (+) RF 3 x 6 -----	58
-268-42	" " (+) RF 4 x 6 -----	8
-268-73	" " (+) RF 4 x 12 -----	4

3/14 (ST-5000FW(A) UL, CSA, E)

(HT-2A)

<u>Ref.</u> <u>No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Q'ty</u>
	7-621-461-47	Screw, machine (+) T 3 x 6 -----	4
	-713-27	" , setting 3 x 4 -----	2
	-722-31	" , self-tapping 3 x 5 -----	4
	-770-26	" , machine (+) B 3 x 6 -----	5
	-39	" , " (+) B 3 x 8 -----	6
	-43	" , " (+) B 3 x 6 -----	4
	-773-68	" , " (+) B 3 x 14 -----	2
	-771-33	" , " (+) B 2.6 x 5 -----	2
7-622-108-02	Nut 3 $\frac{1}{2}$ -----		4
-312-02	" 5 $\frac{1}{2}$ -----		1
7-623-108-13	Washer, plain 3 $\frac{1}{2}$ -----		16
-110-13	" , " 4 $\frac{1}{2}$ -----		4
-107-21	Washer 2.66 (large) -----		1
-207-19	" , spring 2.66 -----		5
-208-15	" , " 3 $\frac{1}{2}$ -----		60
-210-15	" , " 4 $\frac{1}{2}$ -----		8
-408-01	" , lock 3 $\frac{1}{2}$ -----		2
-508-01	Lug 3 $\frac{1}{2}$ -----		3
-510-01	" 4 $\frac{1}{2}$ -----		1
-611-00	Eyelet 1.5 x 3 -----		1
7-633-120-32	String, dial 1,500mm -----		1

IV. Electrical Parts

I) Front End Section

Y-20560-51	Front End, completed (FF-010A) -----	1
	Mounted Circuit Board, IFT -----	1
1-538-989	Printed Circuit Board, IFT -----	1
	Field Effect Transistor IX-133K X101,105	2
	" " " 2SK23 X102 ---	1
	Transistor 2SC629 X104 -----	1
	" 2SC629 X103 -----	1
1-401-368	Coil, antenna L101 -----	1
1-403-295	FM/IFT IFT101 -----	1
1-405-375	Coil, oscillator L105 -----	1
1-425-514	Coil (1), RF L102 -----	1
-515	" (2), RF L103 -----	1
-516	" (3), RF L104 -----	1
1-141-081	Trimmer, ceramic CT101 ~ 105 ---	5
1-151-189	Capacitor, tuning; 5 gang CV101 ~ 105--	1

<u>Ref.</u>	<u>No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Q'ty</u>
<u>Capacitor, ceramic</u>				
1-101-875		7pF	+0.5pF	50mW
1-102-893		18pF	+5%	"
1-101-864		20pF	"	"
-142		0.02uF	+80%	"
			-20%	C121 ----- 1
				C101,107 ----- 2
				C120 ----- 1
				C102,123,124, 111,112,114, 115,116 ----- 8
1-102-879		16pF	+5%	50mW
-077		0.01uF		25mW
				C103,108 ----- 2
				C104,109,109, 118,119 ----- 5
<u>Capacitor, mold</u>				
1-101-936		0.5pF	+10%	500mW
				C106 ----- 1
<u>Capacitor, electrolytic</u>				
1-121-371		10uF		25mW
				C113,117 ----- 2
<u>Resistor, carbon</u>				
1-244-642		51 ohms	+5%	RDI SR
-657		220 "	"	R105,111,113 ----- 3
-661		330 "	"	R102 ----- 1
-665		470 "	"	R112 ----- 1
-666		510 "	"	R104 ----- 1
-673		1K "	"	R116 ----- 1
-677		1.5K "	"	R110,108 ----- 2
-685		3.9K "	"	R115 ----- 1
-689		4.7K "	"	R114 ----- 1
-692		6.2K "	"	R107 ----- 1
-697		10K "	"	R118 ----- 1
-708		30K "	"	R106,117 ----- 2
-753		2.2M "	"	R103 ----- 1
-648		91 "	"	R101 ----- 1
				R119 ----- 1

14) IF Section

1-538-988	Mounted Circuit Board, IF circuit	-----	1
	Printed Circuit Board, IF circuit	-----	1
	Transistor 2SC403A X201 - 206	-----	6

5/14 (ST-5000FW(A) UL, CSA, E)
(HT-2A)

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>		<u>Qty</u>
		Diode, zener	1T243 D201 - 208	8
		" "	1T22A D209,210	2
		" "	1S-1555 D211	1
<u>Resistor, Adjustable</u>				
1-221-986		330 ohms (5)	R211	1
1-403-297		Filter, ceramic	CF201 - 208	8
1-407-187		Inductor, micro	5.6uH L202	1
-165		" "	47uH L201,203	2
-177		" "	470uH L204	1
<u>Capacitor, ceramic</u>				
1-101-141		0.01uF (+100% - 0%)	50WV C208,213,217,219, 223,224,225, 227	6
-142		0.02uF "	" C201,202,204,205, 206,209,210,212, 214,216,218,220, 221,226,228,230, 231	17
<u>Capacitor, electrolytic</u>				
1-121-371		10uF	25WV C203,207,211, 215,222	5
-439		1uF	15WV C229	1
<u>Resistor, carbon</u>				
1-244-642		51 ohms +5%	RD48R R207,218,227	3
-665		470 "	" R243	1
-671		820 "	" R206,217,228,250	4
-673		1K "	" R213,232,233,239, 222,223	6
-677		1.5K "	" R202,209,220,230	4
-680		2K "	" R246	1
-689		4.7K "	" R238	1
-701		15K "	" R237	1
-708		30K "	" R244	1

6/14 (ST-5000PW(A) UL, CSA, E)
(RT-2A)

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Q'ty</u>
1-244-721	100K ohms $\pm 5\%$ RD ₅ SR	R215,225,235 -----	3
1-242-549	100 " $\pm 0.5\%$ RD ₄ MUR	R240,242 -----	2
-653	150 " " "	R203,210,214,216, 221,224,226,231 --	8
-656	200 " " "	R234,236 -----	2
-660	300 " " "	R249 -----	1
-673	1K " " "	R204,205,212,247 --	4
-685	3.3K " " "	R201,208,219,229 --	4
-698	11K " " "	R245 -----	1
-721	100K " " "	R241 -----	1
-741	680K " " "	R248 -----	1

iii) Limiter & Detector Section

1-538-773	Mounted Circuit Board, limiter & detector section -----	1
1-221-389	Printed Circuit Board, limiter & detector section -----	1
1-403-291	Resistor, adjustable 5K ohms (B) R319 --	1
1-407-165	Transformer, discriminator IPT301 -----	1
	Inductor, micro 47uH L301,302 -----	2
	Transistor 2SC403A X301 - 303 -----	3
	" 2SC633 X304 -----	1
	Diode, zener 1T243 D301 - 304 -----	4
	" 1T22AJ D305,306 -----	2

Capacitor, ceramic

1-101-882	51pF $\pm 5\%$ 50V	C320 -----	1
-919	0.002uF $\pm 80\%$ 25V (-20%)	C304,305,309,310 --	4
-142	0.02uF " "	C301 - 303, 308, 312,313,321 -----	7

Capacitor, styrol

1-103-603	120pF $\pm 5\%$ 50V	C317,318 -----	2
-----------	---------------------	----------------	---

Capacitor, electrolytic

1-121-334	10uF 15V	C314 -----	1
-371	10uF 25V	C325 -----	1

7/14 (ST-5000FW(A) UN., CSA, E)

(MT-2A)

<u>Ref.</u>	<u>No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Q'ty</u>
	1-121-373	30uF	25V	C319 ----- 1
	-338	50uF	15V	C306,323 ----- 2
	-340	100uF	15V	C311,324 ----- 2
	-343	1uF	50V	C322 ----- 1

Resistor, carbon

1-244-649	100 ohms	+5%	RD&SR	R305,308,316,317 --	4
1-242-659	270 "	"	RD&UR	R306 -----	1
1-244-666	510 "	"	RD&SR	R329 -----	1
-669	680 "	"	"	R303,310,315 ----	3
-670	750 "	"	"	R318 -----	1
+673	1K "	"	"	R304,311 -----	2
+680	2K "	"	"	R323,327,328 ----	3
+689	4.7K "	"	"	R313 -----	1
-691	5.6K "	"	"	R301 -----	1
-693	6.8K "	"	"	R320,321 -----	2
-695	8.2K "	"	"	R307 -----	1
-699	12K "	"	"	R302,309 -----	2
-701	15K "	"	"	R314 -----	1
-709	33K "	"	"	R322,324 -----	2
-721	100K "	"	"	R325 -----	1
-725	150K "	"	"	R326 -----	1
1-242-649	100 "	"	RD&UR	R312 -----	1

iv) Muting Circuit Section

1-538-774	Mounted Circuit Board,	muting circuit	--	1
1-407-177	Printed Circuit Board,	muting circuit	--	1
	Inductor, micro	470uH	L401,402 -----	2
	Transistor 2SK23		X401 -----	1
	" 2SC633		X402 + 409 ----	8
	" 2SC633		X410 -----	1
	Diode 1T22AJ		D401 - 405 -----	5
	" 1D-05		D406 -----	1
	Thermistor S-10K		Th401 -----	1

Resistor, solid adjustable

1-221-997	2.2K ohms		R403 -----	1
-----------	-----------	--	------------	---

8/14 (ST-5000FW(A) UL, CSA, E)
(ET-2A)

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>			<u>Q'ty</u>
<u>Capacitor, ceramic</u>					
1-101-269 -142	13pF 0.02uF	+5%	50V	C402 ----- C406 -----	1 1
<u>Capacitor, molar</u>					
1-105-683 -419	0.068uF 0.22uF	+10% +20%	50V 35V	C403 - 405 ----- C407 -----	3 1
<u>Capacitor, electrolytic</u>					
1-121-371	10uF	25V		C401 -----	1
<u>Resistor, carbon</u>					
1-244-649 -655 -656 -666 -673 -693 -691 -695 -697 -701 -704 -708 -714 -721 -732 -744 -715 -713 -683 -713 -714	100 ohms 180 " 200 " 510 " 1K " 6.8K " 5.6K " 8.2K " 10K " 15K " 20K " 30K " 51K " 100K " 300K " 910K " 56K " 47K " 2.7K " 47K " 51K "	+5%	RDI&R	R419 ----- R424 ----- R402,409,411 ----- R431,427 ----- R423 ----- R406 ----- R418 ----- R417 ----- R405,415,420,435, 436 ----- R422 ----- R426,428 ----- R408 ----- R410,414,416 ----- R412,413,425,430, 433 ----- R421 ----- R401 ----- R434,407 ----- R429 ----- R404 ----- R407 (Adjust), R407 ("")	1 1 3 2 1 1 1 1 5 1 2 1 3 5 1 1 2 1 1 1 1

9/14 (ST-5000FW(A) UL, CSA, E)
(BT-2A)

<u>Ref.</u>	<u>No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Q'ty</u>
-------------	------------	-----------------	--------------------	-------------

V. MPX Decoder Section

1-538-775			Mounted Circuit Board, MPX decoder -----	1
1-221-389			Printed Circuit Board, MPX decoder -----	1
1-231-066			Resistor, adjustable 5K ohms (B) R537 --	1
1-409-138			Filter, low pass -----	1
-139			Coil, trap L505 -----	1
1-425-401			Coil, trap L506 -----	1
-402			Transformer, MPX L503 -----	1
-403			" " L504 -----	1
1-515-101			" " L501,502 -----	2
			Relay, reed REL-1 -----	1
			Transistor 2SC633 X501 - 503 -----	3
			" 2SC633 X504 - 513, 515 ---	11
			" 2SC633 X514 -----	1
			Diode 1T23J D501,502 -----	2
			" 1T22AJ D503 - 507 -----	5

Capacitor, styrof

1-103-605	150pF	+5%	50V	C504 -----	1
-611	270pF	"	"	C521,522 -----	2
-575	4700pF	"	"	C502,505,507 - 509, 513 -----	6

Capacitor, mylar

1-105-661-12	0.001uF	±10%	50V	C506,512 -----	2
-665-12	0.0022uF	"	"	C529 -----	1
-681-12	0.047uF	"	"	C515,514 -----	2
1-106-550-12	0.33uF	"	35V	C518,519,523,524 --	4
1-105-667-12	0.00033uF	"	50V	C516,517(Adjust)	2
-669-12	0.0047uF	"	"	C516,517(")	1
-677-12	0.022uF	"	"	C536,537(Adjust)	2
-667-12	0.0033uF	"	"	C536,537(")	1

Capacitor, electrolytic

1-121-442	1uF		50V	C527,528 -----	2
-371	10uF		25V	C525,526 -----	2
-336	30uF		15V	C501 -----	1
-489	50uF		12V	C532 -----	1
-375	50uF		25V	C530 -----	1

10/14 (ST-5000FW(A) UL, CSA, E)
(HT-2A)

<u>Ref.</u> <u>No.</u>	<u>Part No.</u>	<u>Description</u>			<u>Q'ty</u>
1-121-315	100uF	6V	C503	-----	1
-377	100uF	25V	C511,520	-----	2
-426	500uF	15V	C531	-----	1
<u>Resistor, carbon</u>					
1-244-641	47 ohms	+5%	RDM5R	R574	-----
-649	100 "	"	"	R516	-----
-658	240 "	"	"	R506	-----
-666	510 "	"	"	R519 - 522, 551, 552, 559, 560, 563, 564	----- 10
-670	750 "	"	"	R512	-----
-673	1K "	"	"	E503, 515, 518, 525, 526, 533, 534	----- 7
-677	1.5K "	"	"	R539, 540, 577	----- 3
-680	2K "	"	"	R538, 541, 542	----- 3
-684	3K "	"	"	R517, 543 ~ 546, 575	----- 6
-685	3.3K "	"	"	R523, 524, 576	----- 3
-690	5.1K "	"	"	R514, 557, 558	----- 3
-697	10K "	"	"	R535, 536, 553, 554, 567, 568, 573, 578, 579	----- 9
-701	15K "	"	"	B555, 556, 561, 562, 505	----- 5
-704	20K "	"	"	R565, 566	----- 2
-708	30K "	"	"	R510	----- 1
-712	43K "	"	"	R509	----- 1
-714	51K "	"	"	R504	----- 1
-718	75K "	"	"	R507, 513	----- 2
-721	100K "	"	"	R508, 511, 527, 528, 572	----- 5
-734	360K "	"	"	R502	----- 1
-743	820K "	"	"	R529, 530	----- 2
-744	910K "	"	"	R549, 550	----- 2
-675	1.2K "	"	"	R501	----- 1
-649	100 "	"	"	R531, 532 (Adjust),	
-656	200 "	"	"	R531, 532 (")	1
-660	300 "	"	"	R531, 532 (")	
-718	75K "	"	"	R547, 548 (Adjust),	1
-719	82K "	"	"	R547, 548 (")	

11/14 (ST-5000FW(A) UL, CSA, E)
(HT-2A)

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Q'ty</u>
vi) Power Supply Section			
1-538-776		Mounted Circuit Board, power supply ----	1
1-223-010		Printed Circuit Board, power supply ----	1
		Resistor, adjustable; wire wound 5W 200 ohms (B) VR601 -----	1
1-526-502		Socket, power transistor -----	1
		Transistor 2SD47 X601 -----	1
		" 2SC470 X602 -----	1
		" 2SC318 X603 -----	1
		Diode 1T240 D602,603 -----	2
		" 10DB D601 -----	1
Capacitor, mylar			
1-105-673	0.01uF	50V C603 -----	1
-873	0.01uF	100V C605 - 608 -----	4
Capacitor, electrolytic			
1-121-731	200uF	50V C602 -----	1
-385			
Resistor, carbon			
1-209-143	3.9 ohms ±5%	R1 R608 -----	1
-164	390 "	" R609 -----	1
1-204-074	680 "	" R611 -----	1
1-203-033	1K "	" R610 -----	1
1-244-665	470 "	" RD&SR R604 -----	1
-674	1.1K "	" R605 -----	1
-689	4.7K "	" R601,603 -----	2
-695	8.2K "	" R602 -----	1
1-209-044	100 "	R1 R606 (Adjust)	
-160	120 "	" R606 (")	1
1-204-276	150 "	" R606 (")	
1-209-162	220 "	" R607 (Adjust)	
-163	270 "	" R607 (")	1
1-204-277	330 "	" R607 (")	
vii) General Section			
		Mounted Circuit Board, balun -----	1

12/14 (ST-5000FM(A) UL, CSA, E)
(HT-2A)

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>			<u>Q'ty</u>
1-538-771		Printed Circuit Board, balun			1
1-221-276	-779	Resistor, variable 5K ohms (T) R241,330-			2
1-222-113		" " 10K " (B) R569,570-			2
1-231-057		Control, muting level with switch SW4,VR401			1
1-417-014-21		Encapsulated Component 0.033uF+120 ohms CP			1
1-441-381		Balun B101			1
1-507-164		Power Transformer PT			1
1-514-369		Jack, 4-pin			1
-338		Switch, lever; power ON/OFF SW1			1
-370		" ", mode SW3			1
1-517-025		" ", rotary, hi-blend SW2			1
1-518-061	-062	Socket, pilot lamp			3
-070		Lamp, pilot RL3,4			2
1-520-060	-061	" ", " (cylinder) PLL,2			2
1-526-165		Meter, tuning M1			1
1-532-218		" , tuner input M2			1
1-533-051	-048	Socket, voltage selector VS			1
1-534-330		Fuse, UL F			1
1-535-029		Holder, lamp			2
1-514-524		Post, fuse			1
		Cord, power			1
		Terminal, test point TP2 - 4			3
		Switch, slide; de-emphasis SW5			1
<u>Capacitor, mylar</u>					
1-105-679	0.033uF	50V	C535		1
-683	0.068uF	"	C534		1
-687	0.15uF	"	C533		1
<u>Capacitor, electrolytic</u>					
1-121-030	2000uF	50V	C601		1
-328	2000uF	35V	C604		1

* * * *

Additional Parts for Canada Model

2-047-256	Label, specification	-----	1
-259	Label, fuse caution	-----	1

13/14 (ST-5000FM (A) UL, CSA, E)
(BT-2A)

<u>Ref:</u>	<u>No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Q'ty</u>
		2-029-991	Label, caution -----	1
		1-532-164	Fuse -----	1
		1-201-564	Resistor, composition RC ₃ 750K ohms R701	1
		7-621-770-40	Screw, machine (+) B 3 x 10 -----	1
		3-790-768-41	Manual, instruction -----	1

Additional Parts for General Model

2-047-255	Label, specification -----	1
2-029-953	Label, voltage -----	1
3-790-768-11	Manual, instruction -----	1
1-532-164	Fuse -----	1
3-793-082	Supplement -----	1

14/14 (ST-5000FW(A) UL, CSA, E)
 (HT-2A)

SUPPLEMENT

NO. 1
Oct. '70

Subject: Minor change on Model ST-5000FW

1. INTRODUCTION

SONY made a change on Model ST-5000FW to eliminate troublesome de-emphasis changeover operation.

2. DESCRIPTION OF THE MODIFICATIONS

(a) De-emphasis Changeover Circuit Added

The de-emphasis changeover circuit has employed to change the de-emphasis time constant easily. The specified de-emphasis time constant is 75 microseconds in USA and Canada, 50 micro-seconds in Europe. The schematic diagram is given on page 2.

Parts Added

MPX decoder section

Reference	Value	Part Number
C536, C537	0.022 μ F (mylar) and 0.0033 μ F (mylar)	I-105-677-12 and I-105-667-12
S5 (slide switch)		I-514-524

Parts Changed


Description	Changed to
C514, C515, 0.068 μ F	0.047 μ F (mylar) (1-105-671-12)
C516, C517, 0.015 μ F	0.0033 μ F (mylar) (1-105-671-12) or 0.0047 μ F (mylar) (1-105-669-12)

Applicable Serial Number

<i>For USA Model</i>	<i>For Canada Model</i>	<i>For General Export Model</i>
86,442 and later	75,196 and later	56,666 and later

SCHEMATIC DIAGRAM

-Additional AFC Switch and its related circuit-

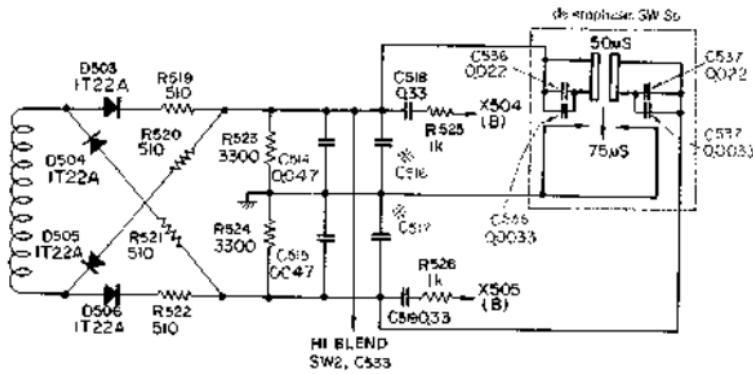

SONY CORPORATION

© 1970

- 2 -

Printed in Japan

Revised

Complete Spare Parts List for ST-5000FW (UL, CSA, E)

July 30, 1968

Ref.	No.	Part No.	Description	Q'ty
------	-----	----------	-------------	------

I. Mechanical Parts

i) Front End Section

A1	X-38518-01	Foil Ass'y, copper -----	1
A2	X-38512-01	Boss Ass'y, gear -----	1
A3	-02	Stopper Ass'y -----	1
A4	-03	Shaft Ass'y, drum -----	1
1	3-851-801	Chassis, front end -----	1
2	-802	Case, shield -----	1
3	-803	Plate A, shield -----	1
4	-804	Plate B, shield -----	1
5	-805	Plate C, shield -----	3
6	-806	Plate D, shield -----	1
7	-809	Washer, large -----	4
8	-810	Label, front end -----	1
9	-219	Nut -----	1
10	-220	Drum -----	1
11	-222	Bar, short -----	1
12	0-029-624	Spring, gear -----	1

ii) Main Chassis

A5	X-20472-01	Chassis Ass'y -----	1
A6	-02	Sub-panel Ass'y -----	1
A7	-03	Case Ass'y, shield; limiter & detector -----	1
A8	-04	Case Ass'y, shield; IF section -----	1
A9	-05	Bracket Ass'y, flywheel -----	1
A10	-06	Guide Ass'y, pointer -----	1
A11	-07	Pointer Ass'y -----	1
A12	-08	Plate Ass'y, pulley -----	1
A13	-09	Knob Ass'y, mode selector -----	1
A14	X-20319-01	Terminal Ass'y, output -----	4
A15	X-20320-03	Knob Ass'y, muting & hi-blend -----	2
A16	X-38240-07	Knob Ass'y, tuning -----	1
13	2-047-106	Cushion A, light interception -----	1
14	-107	Cushion B, light interception -----	1
15	-211	Rivet -----	6
16	-226	Panel, front -----	1

Ref. No.	Part No.	Description	Q'ty
17	2-047-229	Plate, bottom -----	1
18	-228	Bracket, meter -----	1
19	-229	Plate, dial back ; upper -----	1
20	-230	Plate, antenna terminal; black -----	1
22	-232	Cushion, dial plate -----	2
23	-233	Holder, dial plate -----	2
24	-234	Panel, rear -----	1
25	-235	Plate, dial back; lower -----	1
26	-236	Shaft, tuning -----	1
27	-237	Heat Sink, 2SD47 -----	1
28	-238	Bracket, electrolytic capacitor -----	1
29	-239	Plate, dial -----	1
30	-240	Cushion, rubber -----	1
31	-241	Insulator, pilot lamp -----	2
32	-242	Spacer, dial plate -----	1
33	-243	Cover, stereo lamp -----	1
34	-244	Label, specification (UL) -----	1
35	-245	Label, IF amplifier -----	1
36	-246	Label, limiter & detector -----	1
37	-248	Label, test point -----	1
38	-249	Spacer, dial plate (right) -----	1
39	-250	Spacer, dial plate (left) -----	1
41	-252	Rubber, black -----	2
	-258	Screw, adjustable -----	1
42	0-051-263	Foot, rubber -----	4
43	0-204-214	Screw, front end -----	4
44	-220	Cushion, front end -----	4
45	2-029-921	Cover, chassis -----	1
46	-930	Screw, chassis cover -----	4
47	-931	Knob, power ON/OFF switch -----	1
48	2-043-776	Bracket, front panel -----	4
49	3-401-179	Lug, wire retaining -----	2
50	3-410-032	Grommet, power cord -----	1
51	3-422-204	Label, caution -----	1
52	3-802-520	Spring, dial drum -----	1
53	3-811-140	Pulley, small -----	5
54	-819	Label, FCC -----	1
55	3-824-019	Indicator, stereo -----	1
56	-033	Receiver, stereo indicator -----	1
57	-034	Bracket, stereo lamp -----	1
58	-036	Filter, meter lamp -----	2
59	-039	Holder, tuning shaft -----	1
60	-040	Disc, tuning shaft holder -----	1

<u>Ref.</u>	<u>No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Q'ty</u>
61		3-824-041	Flywheel -----	1
62		-046	Plate, adjustable resistor -----	1
63		3-409-124	Washer, nylon -----	2
		7-633-120-32	String, dial -----	1,500ms

II. Accessories & Packing Materials

1-501-083	Antenna, ribbon -----	1
1-532-218	Fuse, UL -----	1
1-534-049	Cord, connection RX-56 -----	1
3-413-100	Bag, polyethylene; complete set -----	1
3-701-020	Bag, polyethylene; manual, etc. -----	1
-026	Label, tack -----	1
3-790-768-32	Manual, instruction -----	1
3-994-399	Card, warranty -----	1
4-404-717	Card, inspection -----	1
X-46900-02	Cloth, polishing -----	1
7-691-001	Desiccant -----	1
2-029-944	Cushion, packing -----	2
3-824-055	Carton -----	1
3-824-060	Box, accessory -----	1
-061	Carton, master (for two sets) -----	4

III. Screws, Washers & Nuts

i) Front End Section

7-621-259-32	Screw, machine (+) RF 2.6 x 5 -----	1
-461-28	" , " (+) T 3 x 4 -----	4
-770-43	" , " (+) B 3 x 6 -----	6
-53	" , " (+) B 3 x 5 -----	18
-713-22	" , setting 3 x 4 -----	1
-999-72	" , hexagonal 3 x 4 -----	4
7-623-107-25	Washer, plain 2.6¢ -----	1
-208-15	" , spring 3¢ -----	24
-408-05	" , lock 3¢ -----	1
-508-01	Lug 3¢ -----	1

ii) Main Chassis

7-621-255-19	Screw, machine (+) RF 2 x 3 -----	4
-259-32	" , " (+) RF 2.6 x 5 -----	5

<u>Ref.</u>	<u>No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Q'ty</u>
7-621-261-43		Screw, machine (+) RF 3 x 6 -----	58	
-268-42	"	" (+) RF 4 x 6 -----	8	
-268-73	"	" (+) RF 4 x 12 -----	4	
-713-27	"	, setting 3 x 4 -----	2	
-722-31	"	, self-tapping 3 x 5 -----	4	
-770-26	"	, machine (+) B 3 x 6 -----	3	
+39	"	" (+) B 3 x 8 -----	6	
-43	"	" (+) B 3 x 6 -----	4	
-773-68	"	" (+) B 3 x 14 -----	2	
-771-33	"	" (+) B 2.6 x 5 -----	2	
7-622-108-02		Nut 36 -----	4	
-312-02	"	56 -----	1	
7-623-108-13		Washer, plain 36 -----	16	
-110-13	"	" 46 -----	4	
-207-15	"	, spring 2.56 -----	5	
+208-15	"	" 36 -----	60	
-210-15	"	" 46 -----	8	
-408-01	"	, lock 36 -----	2	
-508-01		Lug 36 -----	3	
-510-01	"	46 -----	1	
-611-00		Eyelet 1.5 x 3 -----	1	
7-671-114-01		Steel Ball 46 -----	1	

IV. Electrical Parts

I) Front End Section

Y-20472-51		Front End, completed (PMC-105W1) -----	1
1-538-770		Mounted Circuit Board, IFT -----	1
		Printed Circuit Board, IFT -----	1
		Field Effect Transistor 2SK22DF X101,103,105,106 -----	4
1-141-067		Capacitor, trimmer; cylinder CT101 - 105 -----	5
1-102-019		Capacitor, feed through C120 - 127 -----	8
1-151-164		Capacitor, tuning; 5 gang CV101 - 105 --	1
1-401-332		Coil, antenna L101 -----	1
1-403-282		Transformer, IF IPT101 -----	1
-286	"	" , IF IPT102 -----	1
1-405-329		Coil, oscillator L106 -----	1
1-407-184		Inductor, micro 3.3uF L107 - 110 -----	4
1-425-397		Coil (1), RF L102 -----	1

4/14 (ST-5000FW.UL, CSA, E)

(HT-2)

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>			<u>Q'ty</u>
1-425-398	Coil (2), RF	L103	-	-	1
-399	" (3), RF	L104	-	-	1
-400	" mixer	L105	-	-	1
<u>Capacitor, ceramic</u>					
1-101-952	2PF	+0.5PF	25V	C111	-
-869	27P	+5%	"	C116	-
-140	0.005uF	+80% (-20%)	"	C118	-
-141	0.01uF	"	"	C113	-
-972	18PF	+5%	"	C104,106,110	-
1-102-861	20PF	"	"	C115	-
1-101-938	1.5PF	+10%	500V	C105	-
-142	0.02uF	"	25V	C103,109	-
-973	20PF	"	"	C101	-
<u>Capacitor, mylar</u>					
1-105-673	0.01uF	+10%	50V	C119	-
<u>Resistor, carbon</u>					
1-244-653	150 ohms	+5%	RDA5R	R105	-
-665	470	"	"	R110	-
-670	750	"	"	R113	-
-671	820	"	"	R115	-
-680	2K	"	"	R104,108	-
-685	3.1K	"	"	R112	-
-709	33K	"	"	R109,111	-
-751	1.8M	"	"	R114	-
-753	2.2M	"	"	R102,106	-

ii) IF Section

1-538-772	Mounted Circuit Board, IF circuit	-	1
1-403-293	Printed Circuit Board, IF circuit	-	1
1-407-165	Filter, solid state	MF-1,2,3	-
	Inductor, micro	47uH	3
	L201 - 206, 208,		
	"	210,211	9
-167	"	5.6uH	L207,209
	Transistor 2SC403A		-
	"	X203 - 207	5
	2SC629	X201,202	-

5/14 (ST-5000FW.UL, CSA, E)

(HT-2)

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>			<u>Q'ty</u>
		Diode IT22A-J		D207 - 209	---
	"	IT243		D201 - 206	---
<u>Capacitor, ceramic</u>					
1-101-869	27PF	+5%	50V	C209	----- 1
-878	43PF	"	"	C218	----- 1
-892	82PF	"	"	C224	----- 1
-141	0.01uF	(+100% -0%)		C217,223,229, 230,232,236	-- 6
-142	0.02uF	"	"	C202 - 204,207, 208,210,212 - 214,216,219, 220,222,225, 226,228,231, 233,235,237	-- 20
<u>Capacitor, electrolytic</u>					
1-121-439	1uF		15V	C238	----- 1
-371	10uF		25V	C201,205,206, 211,215,221, 227,234	----- 8
<u>Resistor, carbon</u>					
1-242-642	51 ohms	+5%	RDUR	R206,215,221	-- 3
-665	470 "	"	"	R233	----- 1
-673	1K "	"	RDUR	R204,205,209, 210,213,214, 218,219,238	-- 9
-698	11K "	"	RDUR	R236	----- 1
-680	2K "	"	"	R237	----- 1
-689	4.7K "	"	"	R223,228	----- 2
-695	8.2K "	"	RnSR	R203,234	----- 2
-699	12K "	"	"	R227	----- 1
-702	16K "	"	"	R202,207,211, 216	----- 4
-708	30K "	"	"	R235	----- 1
-721	100K "	"	RDUR	R220,226,231	-- 3
1-244-741	680K "	"	RDUR	R240	----- 1
1-242-656	200 "		RDUR	R225,230,232	-- 3
-673	1K "		"	R224,229	----- 2

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>		<u>Q'ty</u>
1-242-695	8.2K ohms	RD4UR	R208,212,217	-- 3
-699	12K "	"	R222 -----	1

iii) Limiter & Detector Section

		Mounted Circuit Board, limiter &		
		detector section -----		1
1-538-773		Printed Circuit Board, limiter &		
		detector section -----		1
1-221-389		Resistor, adjustable 5K ohms (B) R319	--	1
1-403-291		Transformer, discriminator IFT301	-----	1
1-407-165		Inductor, micro 47uH L301,302	-----	2
		Transistor 2SC403A X301 - 303	-----	3
		" 2SC633 X304 -----		1
		Diode 1T243 D301 - 304	-----	4
		" 1T22AJ D305,306	-----	2

Capacitor, ceramic

1-101-682	51PF	+5%	50V	C320 -----	1
-919	0.002uF	(+80% -20%)	25V	C304,305,309, 310 -----	4
-142	0.02uF	"	"	C301 - 303,308, 312,313,321 ---	7

Capacitor, styrol

1-103-603	120PF	+5%	50V	C317,318 -----	2
-----------	-------	-----	-----	----------------	---

Capacitor, electrolytic

1-121-334	10uF	15V	C314 -----	1
-371	10uF	25V	C325 -----	1
-373	30uF	25V	C319 -----	1
-338	50uF	15V	C306,323 -----	2
-340	100uF	15V	C311,324 -----	2
-343	1uF	50V	C322 -----	1

Resistor, carbon

1-244-649	100 ohms	+5%	RD4SR	R305,308,316, 317 -----	4
1-242-659	270 "	"	RD4UR	R306 -----	1

Ref. No.	Part No.	Description		Q'ty
1-244-666	510 ohms	$\pm 5\%$	RDI6R	R329 ----- 1
-669	680 "	"		R303,310,315 -- 3
-670	750 "	"		R318 ----- 1
-673	1K "	"		R304,311 ----- 2
-680	2K "	"		R323,327,328 -- 3
-689	4.7K "	"		R313 ----- 1
-691	5.6K "	"		R301 ----- 1
-693	6.8K "	"		R320,321 ----- 2
-695	8.2K "	"		R307 ----- 1
-699	12K "	"		R302,309 ----- 2
-701	15K "	"		R314 ----- 1
-709	33K "	"		R322,324 ----- 2
-721	100K "	"		R325 ----- 1
-725	150K "	"		R326 ----- 1
1-242-649	100 "	"	RDkUR	R312 ----- 1

iv) Muting Circuit Section

1-538-774	Mounted Circuit Board, muting circuit	--	1
1-407-177	Printed Circuit Board, muting circuit	--	1
	Inductor, micro 470uH	L401,402	----- 2
	Field Effect Transistor 2SK23	X401	---- 1
	Transistor 2SC633	X402 - 410	---- 9
	Diode 1T22AJ	D401 - 405	---- 5
	" 10D-05	D406	----- 1
	Thermistor S-10K	Th401	----- 1

Resistor, solid adjustable

1-221-997	2.2K ohms		R403	----- 1
-----------	-----------	--	------	---------

Capacitor, ceramic

1-101-864	20PF	$\pm 5\%$	50V	C402	----- 1
-142	0.02uF	(+100% -0)	"	C406	----- 1

Capacitor, mylar

1-105-683	0.068uF	$\pm 10\%$	50V	C403 - 405	---- 3
-419	0.22uF	$\pm 20\%$	35V	C407	----- 1

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>			<u>Q'ty</u>
<u>Capacitor, electrolytic</u>					
1-121-371	10uF	25V	C401	-----	1
<u>Resistor, carbon</u>					
1-244-649	100 ohms	$\pm 5\%$	RDI-SR	R419 -----	1
-655	180 "	"		R424 -----	1
-656	200 "	"		R402, 409, 411 --	3
-666	510 "	"		R431, 427 -----	2
-673	1K "	"		R423 -----	1
-693	6.8K "	"		R406 -----	1
-691	5.6K "	"		R418 -----	1
-695	8.2K "	"		R417 -----	1
-697	10K "	"		R405, 415, 420, 435, 436 -----	5
-701	15K "	"	"	R422 -----	1
-704	20K "	"	"	R426, 428 -----	2
-708	30K "	"	"	R408 -----	1
-714	51K "	"	"	R410, 414, 416 --	3
-721	100K "	"	"	R412, 413, 425, 430, 433 -----	5
-732	300K "	"	"	R421 -----	1
-744	910K "	"	"	R401 -----	1
-715	56K "	"	"	R434, 407 -----	2
-713	47K "	"	"	R429 -----	1
-683	2.7K "	"	"	R404 -----	1
-713	47K "	"	"	R407 (Adjust)	1
-714	51K "	"	"	R407 (") -	1

V. MPX Decoder Section

1-538-775	Mounted Circuit Board, MPX decoder	-----	1
1-221-389	Printed Circuit Board, MPX decoder	-----	1
1-231-066	Resistor, adjustable 5K ohms (B)	R537 -	1
1-409-138	Filter, low pass	-----	1
-139	Coil, trap	L505 -----	1
1-425-401	Coil, trap	L506 -----	1
-402	Transformer, MPX	L503 -----	1
-403	" , "	L504 -----	1
1-515-101	" , "	L501, 502 -----	2
	Relay, reed	REL-1 -----	1

9/14 (ST-5000PW,UL, CSA, E)

(HF-2)

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>			<u>Q'ty</u>
		Transistor	2SC633	X501 - 503 -----	3
		"	2SC633	X504 - 513,515 ----	11
		"	2SC633	X514 -----	1
	Diode	1T23J		D501,502 -----	2
	"	1T22AJ		D503 - 507 -----	5
		<u>Capacitor, styrol</u>			
1-103-605	150PF	$\pm 5\%$	50V	C504 -----	1
-611	270PF	"	"	C521,522 -----	2
-575	4700PF	"	"	C502,505,507 - 509, 513 -----	6
		<u>Capacitor, mylar</u>			
1-105-661-12	0.001uF	$\pm 10\%$	50V	C506,512 -----	2
-665-12	0.0022uF	"	"	C529 -----	1
-681-12	0.047uF	"	"	C514,515 -----	2
1-106-550-12	0.33uF	"	35V	C518,519,523,524 ---	4
1-105-667-12	0.0033uF	"	50V	C516,517(Adjust) --	2
-669-12	0.0047uF	"	"	C516,517(") --	2
-677-12	0.022uF	"	"	C536,537(Adjust) --	2
-667-12	0.0033uF	"	"	C536,537(") --	2
		<u>Capacitor, electrolytic</u>			
1-121-442	1uF		50V	C527,528 -----	2
+371	10uF		25V	C525,526 -----	2
+336	30uF		15V	C501 -----	1
-489	50uF		12V	C532 -----	1
-375	50uF		25V	C530 -----	1
-315	100uF		6V	C503 -----	1
-377	100uF		25V	C511,520 -----	2
-426	500uF		15V	C531 -----	1
		<u>Resistor, carbon</u>			
1-244-641	47 ohms	$\pm 5\%$	R ₄₄ SR	R574 -----	1
-649	100	"	"	R516 -----	1
-658	240	"	"	R506 -----	1
-666	510	"	"	R519 - 522,551, 552,559,560, 563,564 -----	10
-670	750	"	"	R512 -----	1

10/14 (ST-5000PW.UL, CSA, E)

(HT-2)

Revised
Oct. 1970

<u>Ref No.</u>	<u>Part No.</u>	<u>Description</u>				<u>Qty</u>
	1-244-673	1K ohms	+5%	RD&SR	R503,515,518, 525,526,533, 534 -----	7
-677	1.5K "	"	"		R539,540,577 ---	3
-680	2K "	"	"		R538,541,542 ---	3
-684	3K "	"	"		R517,543 - 546, 575 -----	6
-685	3.3K "	"	"		R523,524,576 ---	3
-690	5.1K "	"	"		R514,557,558 ---	3
-697	10K "	"	"		R535,536,553, 554,567,568, 573,578,579 ---	9
-701	15K "	"	"		R555,556,561, 562,505 -----	5
-704	20K "	"	"		R565,566 -----	2
-708	30K "	"	"		R510 -----	1
-712	43K "	"	"		R509 -----	1
-714	51K "	"	"		R504 -----	1
-718	75K "	"	"		R507,513 -----	2
-721	100K "	"	"		R508,511,527, 528,572 -----	5
-734	360K "	"	"		R502 -----	1
-743	820K "	"	"		R529,530 -----	2
-744	910K "	"	"		R549,550 -----	2
-675	1.2K "	"	"		R501 -----	1
-649	100 "	"	"		R531,532(Adjust),	
-656	200 "	"	"		R531,532(")	1
-660	300 "	"	"		R531,532(")	1
-718	75K "	"	"		R547,548(Adjust),	1
-719	82K "	"	"		R547,548(")	1

vi) Power Supply Section

1-538-776	Mounted Circuit Board, power supply ----	1
1-223-012	Printed Circuit Board, power supply ----	1
	Resistor, adjustable; wire wound 500 ohms (B) VR601 -----	
1-526-502	Socket, power transistor -----	1
	Transistor 2SD47 X601 -----	1
	" 2SC470 X602 -----	1
	" 2SC318 X603 -----	1
	Diode 1T240 D602,603 -----	2
	" 100B D601 -----	1

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>				<u>Q'ty</u>
<u>Capacitor, mylar</u>						
1-105-673	0.01uF	50V	C603	-----	-----	1
-873	0.01uF	100V	C605	- 608	-----	4
<u>Capacitor, electrolytic</u>						
1-121-731	200uF	50V	C602	-----	-----	1
<u>Resistor, carbon</u>						
1-209-143	3.9 ohms	$\pm 5\%$	R1	B608	-----	1
-164	390 "	"	"	R609	-----	1
1-204-074	680 "	"	"	R611	-----	1
1-203-033	1K "	"	"	R610	-----	1
1-244-661	330 "	"	RDI5R	R604	-----	1
-675	1.2K "	"	"	R605	-----	1
-689	4.7K "	"	"	R601,603	-----	2
-595	8.2K "	"	"	R602	-----	1
1-209-044	100 "	"	R1	R606 (Adjust)		
-160	120 "	"	"	R606 (")	--	1
1-204-276	150 "	"	"	R606 (")	--	1
1-209-162	220 "	"	"	R607 (Adjust)		
-163	270 "	"	"	R607 (")	--	1
1-204-277	330 "	"	"	R607 (")		
<u>vii) General Section</u>						
1-538-771	Mounted Circuit Board, below				-----	1
1-221-276	Printed Circuit Board, below				-----	1
-779	Resistor, variable 5K ohms (T) R241,330-				2	
	" " 10K " (B) R569,570-				2	
1-222-113	Control, muting level with switch SW4				--	1
1-231-057	Encapsulated Component 0.033uF+120 ohms					
	VR401				-----	1
1-417-014-21	Balun (antenna matching transformer) B101				1	
1-441-381	Power Transformer				-----	1
1-507-164	Jack, 4-pin				-----	1
1-514-369	Switch, lever; power ON/OFF SW1				-----	1
-338	" , " ; mode SW3				-----	1
-370	" , rotary; hi-blend SW2				-----	1
1-517-025	Socket, pilot lamp				-----	3
1-518-061	Lamp, pilot. PL3,4				-----	2
1-514-524	Switch, slide; de-emphasis SW5				-----	1

12/14 (ST-5000FW, UL, CSA, E)

(HT-2)

Revised
Oct. 1970

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Qty</u>
1-518-062	Lamp, pilot	PL5 -----	1
-070	" " (cylinder)	M1,2 -----	2
1-520-060	Meter, tuning	M1 -----	1
-061	" , tuner input	M2 -----	1
1-526-165	Socket, voltage selector	VS -----	1
1-532-145	Fuse, UL	F -----	1
1-533-051	Holder, lamp	-----	2
-068	Post, fuse	-----	1
1-534-330	Cord, power	-----	1
1-535-029	Terminal, test point	TP2 - 4 -----	3

Capacitor, mylar

1-105-679	0.033uF	50V	C535 -----	1
-683	0.068uF	"	C534 -----	1
-687	0.15uF	"	C533 -----	1

Capacitor, electrolytic

1-121-030	2000uF	50V	C601 -----	1
-328	2000uF	35V	C604 -----	1

Resistor, carbon

1-204-128	1.0 ohms	+5%	RD1P R704,705 -----	2
1-244-818	5.1 "	"	RD4S? R702,703 -----	2

* * * * *

Additional Parts for Canada Model

2-047-256	Label, specification	-----	1
-259	Label, fuse caution	-----	1
-260	Label, CSA	-----	1
2-029-991	Label, caution	-----	1
1-532-164	Fuse	-----	1
1-201-564	Resistor, composition RC ₄ 750K ohms	R701	1
7-621-770-40	Screw, machine (+) B 3 x 10	-----	1
3-701-041	Label, CSA	-----	1

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Q'ty</u>
<u>Additional Parts for General Model</u>			
2-047-255		Label, specification -----	1
2-029-953		Label, voltage -----	1
3-790-768-11		Manual, instruction -----	1
1-532-164		Fuse -----	1
1-534-241-15		Cord, power -----	1
3-793-082		Supplement -----	1

14/14 (ST-5000FW, UL, CSA, E)

(HT-2)

FM STEREO TUNER

ST-5000FW

<p>(USA Model); 85,751 and later Serial No. (Canada Model); 75,061 and later (E Model); 55,851 and later</p>	<p>DATE: Sept. 20th, '68</p>
--	------------------------------


Subject: The new FRONT END and IF SECTION developed for ST-5000FW.

Purpose: To improve the sensitivity and stability.

Description: This bulletin provides the schematic and mounting diagrams.
NEW and OLD are Interchangeable.


SONY
SERVICE MANUAL

Schematic Diagram

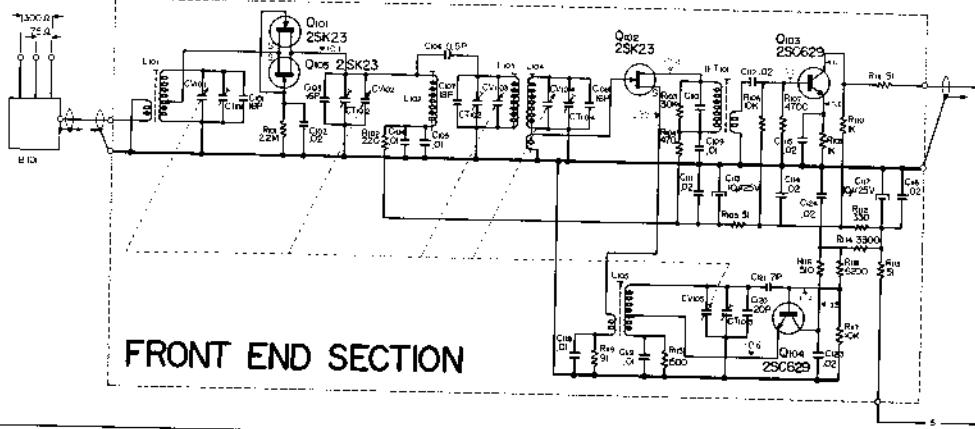


CORRECTION			
R_{L1}	3300Ω	R_{L2}	911Ω
R_{L3}	91Ω	R_{L4}	3300Ω

TO LIMITER
DETECTOR BOARD

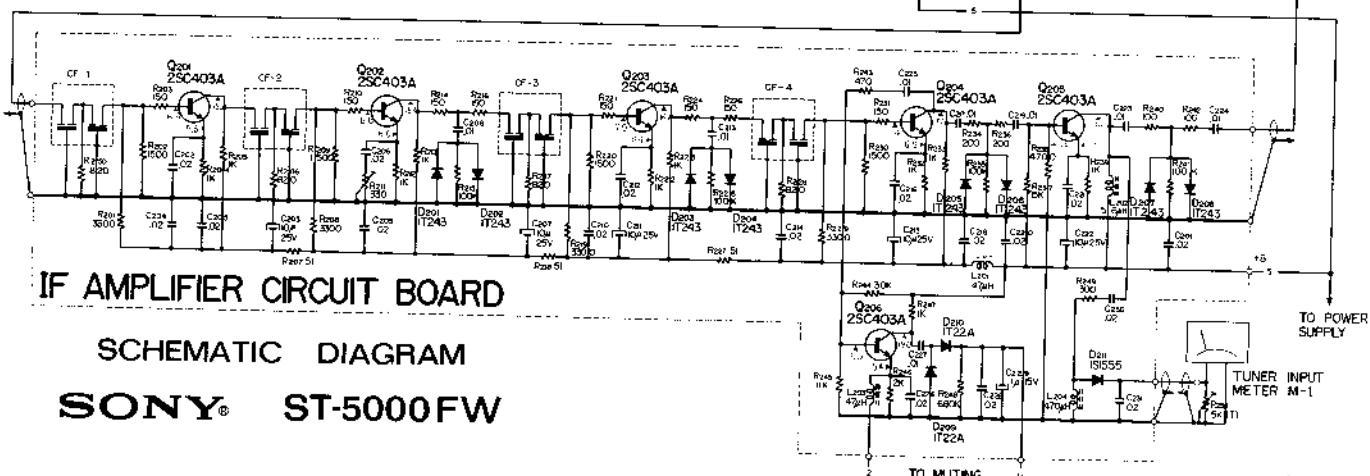

5000FW

Circuit Diagram

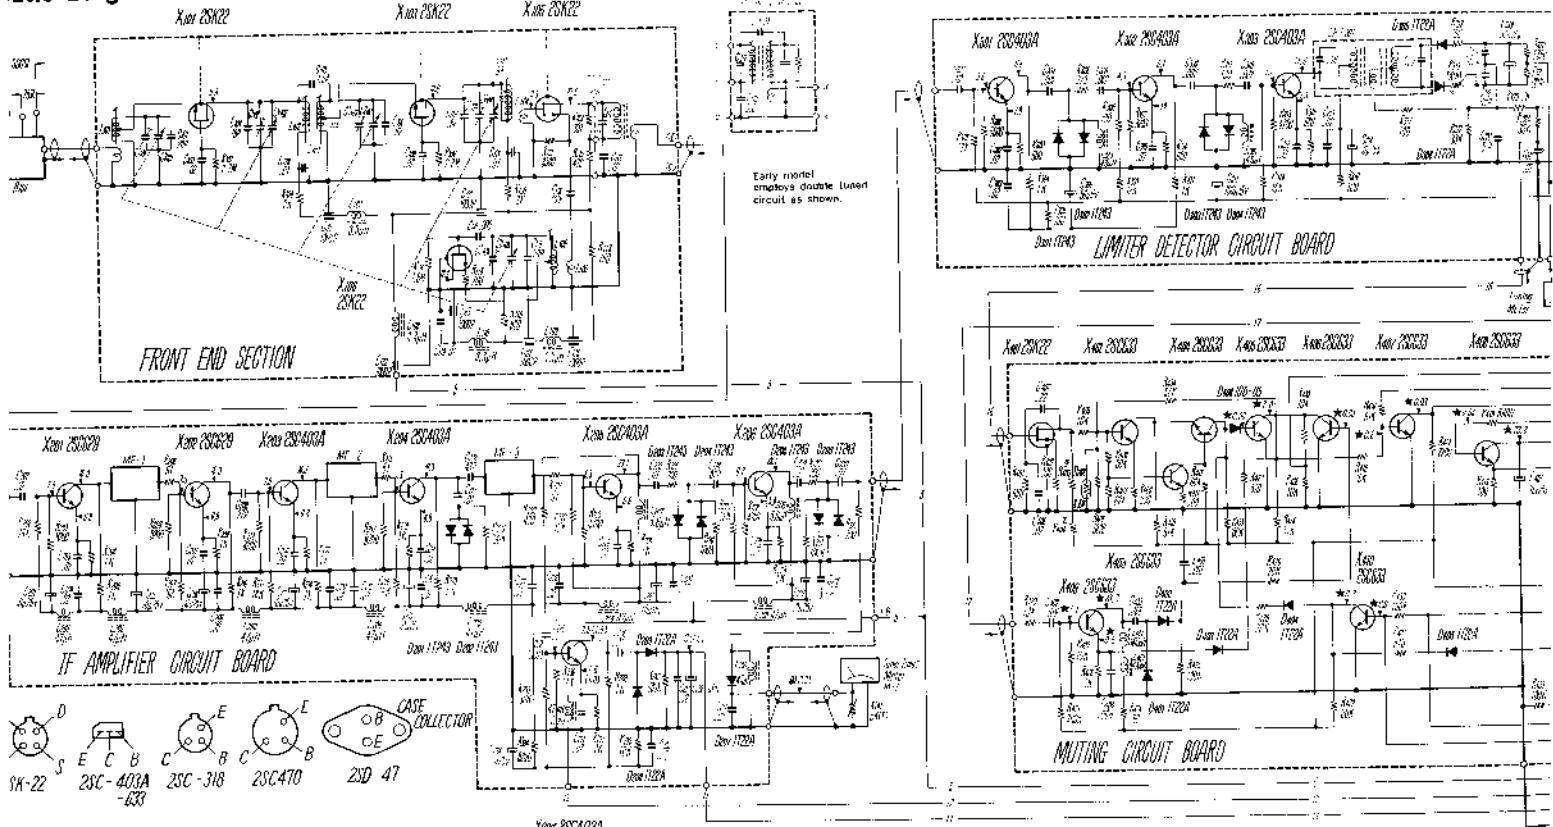

X6012K422
() TUNE


* : To be selected
In early model, R_{V1} is 100 ohms and R_{V2} is 100 K ohms.

★ MUTING OFF

All dc voltages 8161

() STEREO


Xas 20030 Xas 20031 Xas 20032 Xas 20033

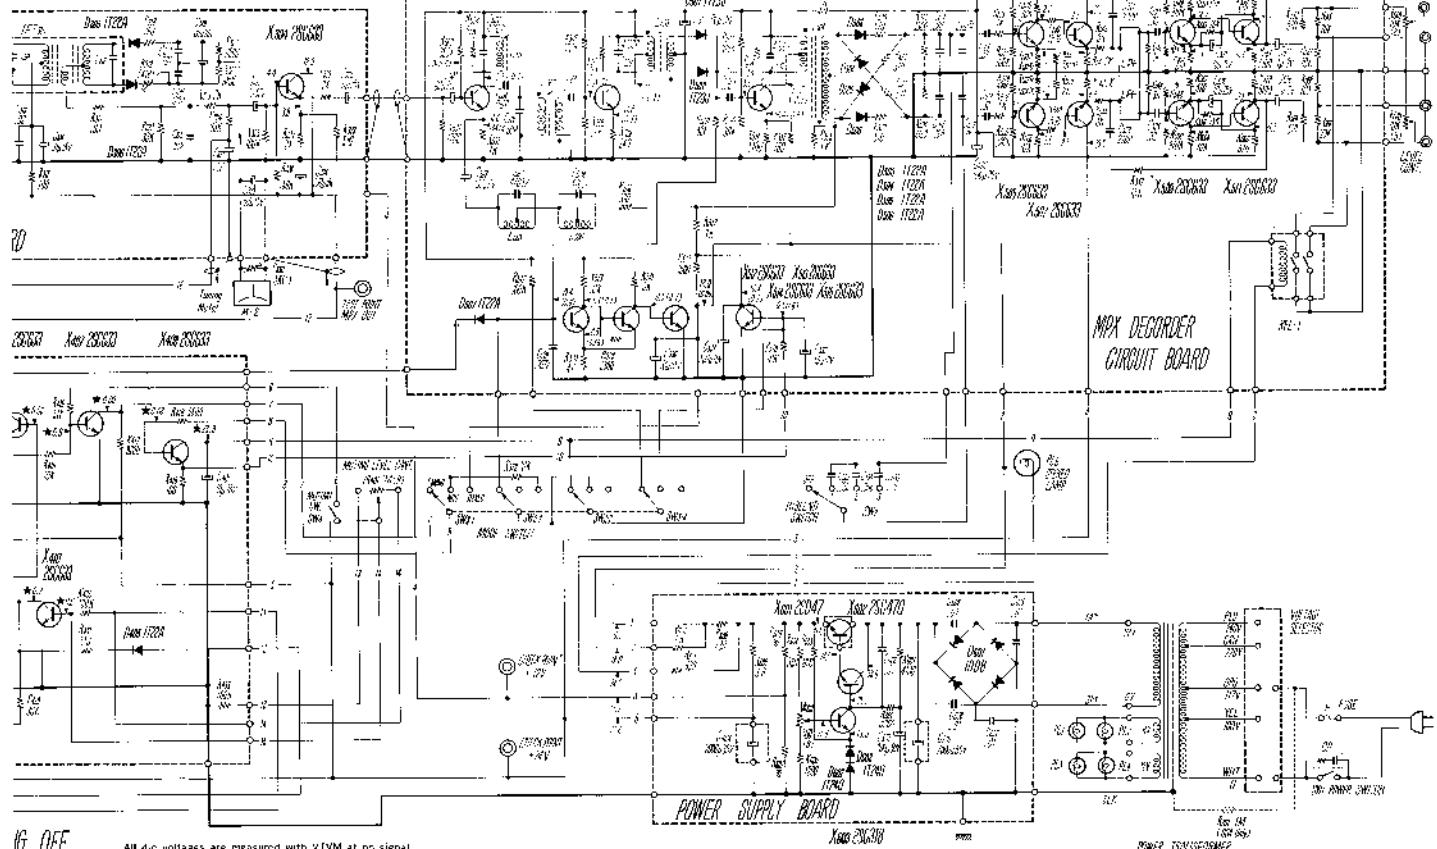


Printed in Japan

Mounting Diagram



JOURNAL OF CLIMATE

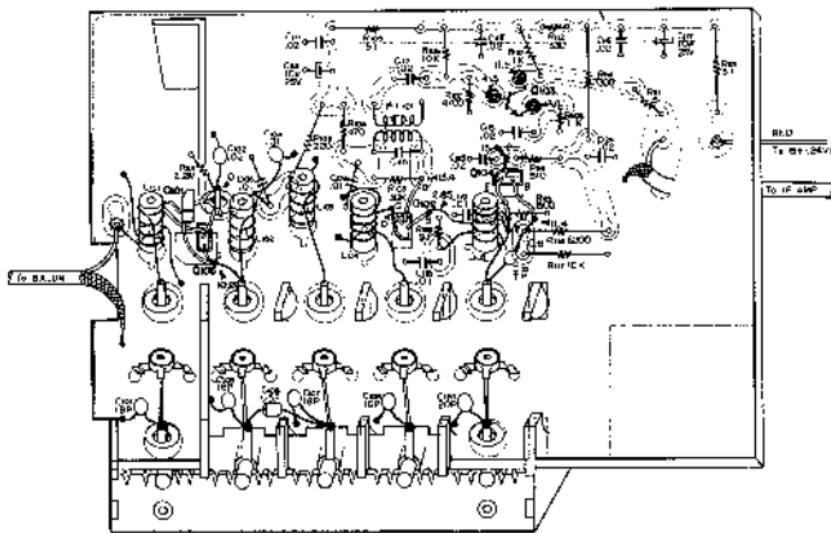

$$\dots \exp(\lambda_1 t^{1/\alpha} + \dots + \lambda_n t^{\frac{1}{\alpha}}).$$

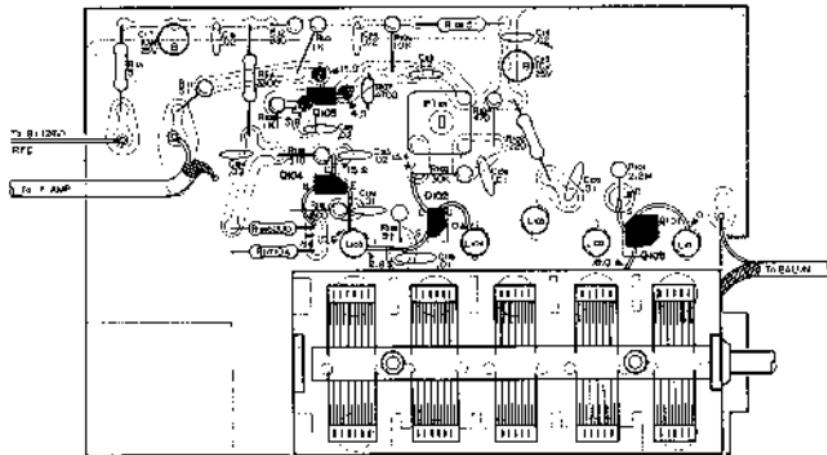

Modulator Diagram

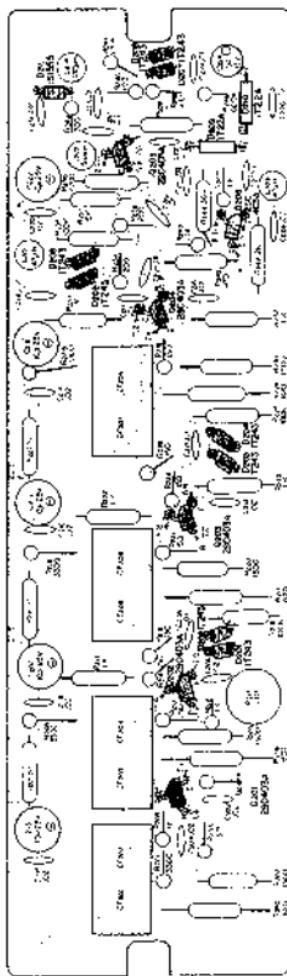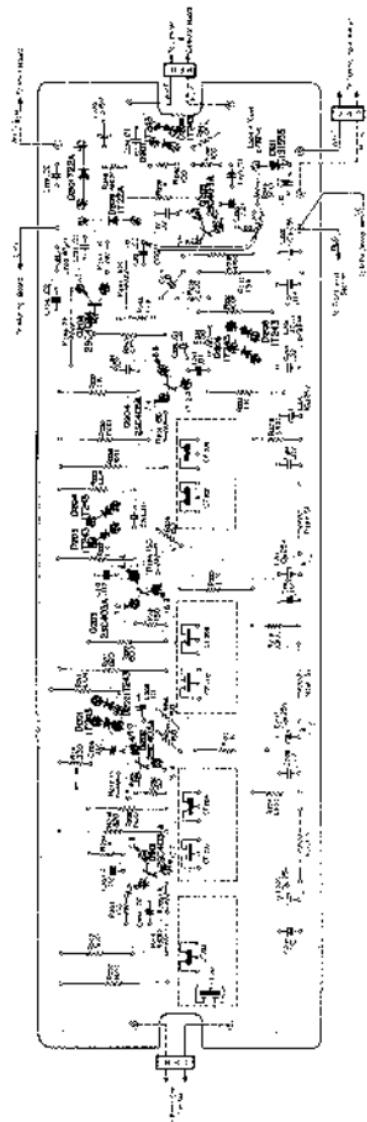

SONY CORPORATION

6

Printed in Japan

SONY®

ST-5000FW

TA Service Bulletin No. 68-101

(UL) 85,751 Serial No. (CSA) 75,061 (E) 55,651	and later
---	------------------

DATE: Sept 20th '68


Subject: The new FRONT END and IF SECTION developed for ST-5000FW.

Purpose: To improve the sensitivity and stability.

Description: This bulletin provides the schematic and mounting diagrams.
NEW and OLD are mutually interchangeable.

SONY CORPORATION

Schematic Diagram

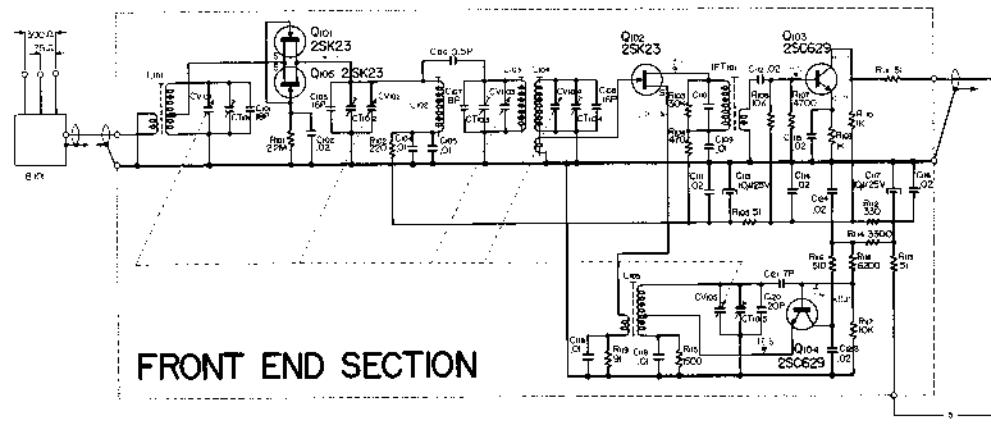


FRONT END SECTION

CORRECTION

$R_{111} = 3300\Omega \rightarrow R_{111} = 91\Omega$
 $R_{112} = 91\Omega \rightarrow R_{112} = 3300\Omega$

TO LIMITER
DETECTOR BOARD

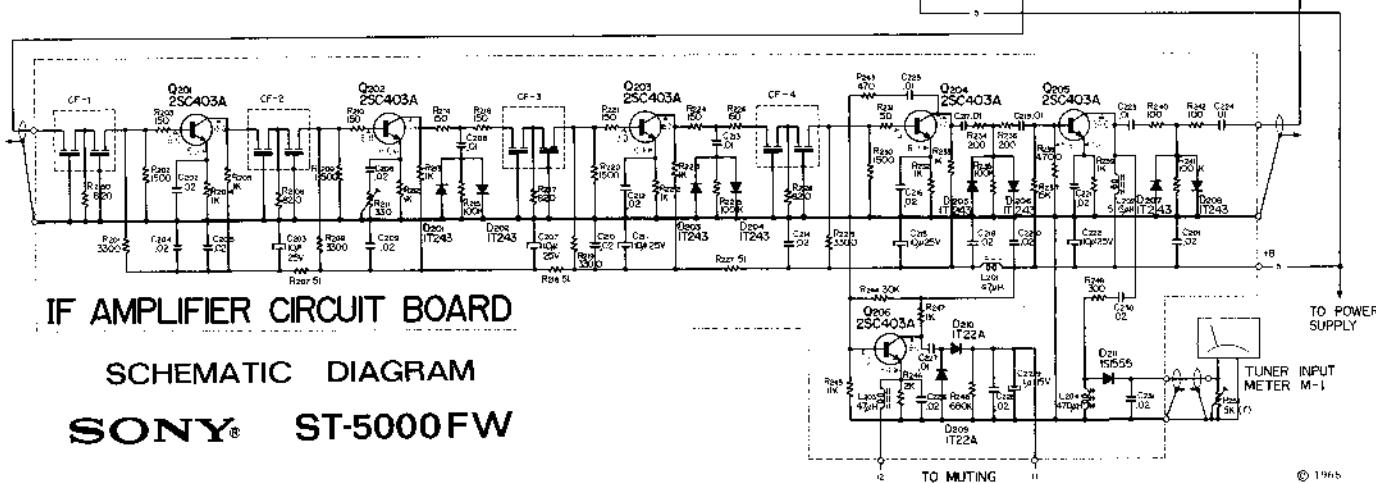


IF AMPLIFIER CIRCUIT BOARD


SCHEMATIC DIAGRAM



SONY® ST-5000FW

Mounting Diagram

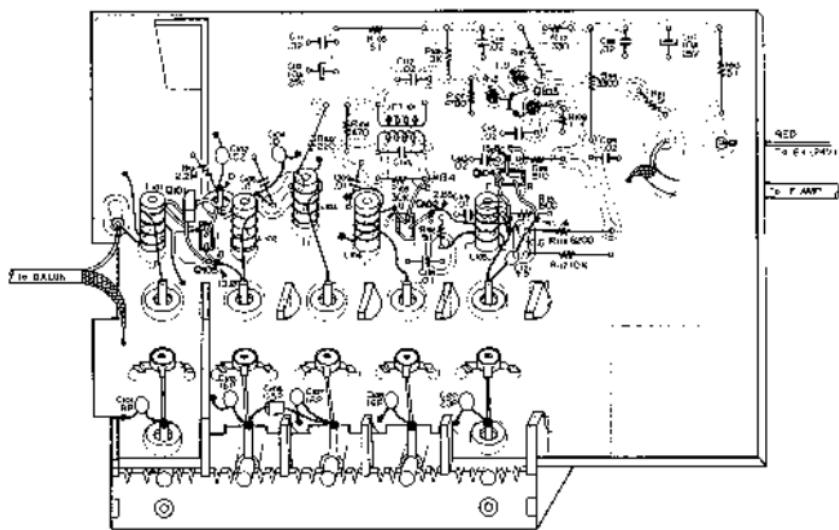

FRONT PANEL ASSEMBLY

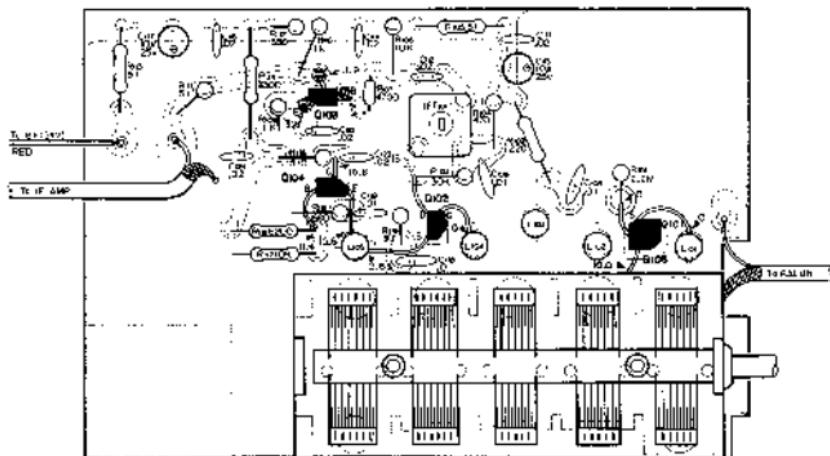

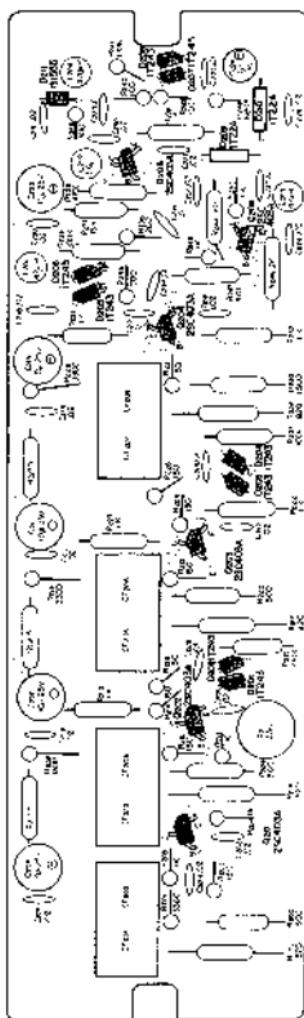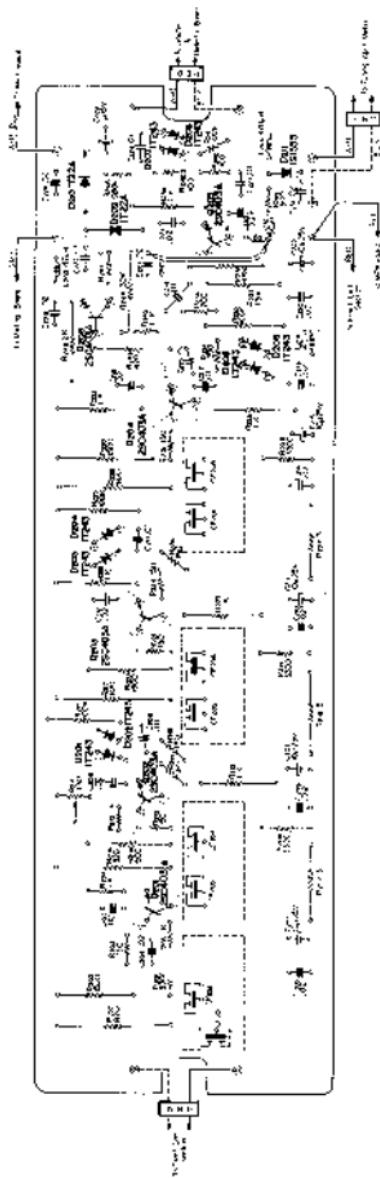

SONY CORPORATION

— 6 —

Printed in Japan