


STR-333L

485
AEP Model
UK Model
SCN Model

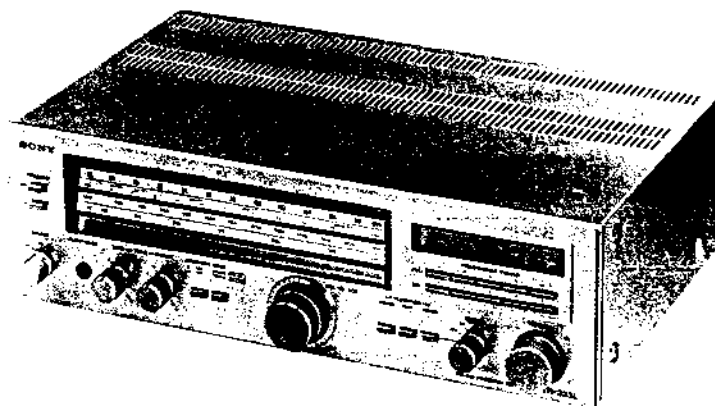

FM-AM PROGRAM RECEIVER

SPECIFICATIONS

GENERAL


| | |
|----------------------------|--|
| Power Requirements: | 240V ac (or 220V ac adjustable by authorized Sony personnel), 50 Hz (UK model) 220V ac (or 240V ac adjustable by authorized Sony personnel), 50 Hz (AEP, SCN model) |
| Power Consumption: | 240W (UK model) 180W (AEP, SCN model) |
| AC Outlets: | Two unswitched, total 200W (not provided for a SCN model) |
| Dimensions: | Approx. 430 (w) x 135 (h) x 295 (d) mm 17 (w) x 5 1/4 (h) x 11 1/2 (d) inches including projecting parts and controls |
| Weight: | Approx. 6.9 kg, 15 lb 4 oz (net) Approx. 8.0 kg, 17 lb 11 oz (in shipping carton) |

FM SECTION

| | |
|---|--|
| Frequency Range: | 87.5–108 MHz |
| Antenna Terminals: | 300Ω balanced 75Ω unbalanced |
| Intermediate Frequency: | 10.7 MHz |
| Sensitivity at 50 dB Quieting: | 3.5μV, 16.1 dBf (MONO) 45μV, 38.3 dBf (STEREO) |
| Sensitivity at 46 dB Quieting (at 40 kHz deviation): | 4.0μV (MONO) 50μV (STEREO) |
| Usable Sensitivity: | IHF 1.9μV, 10.8 dBf 1.6μV (S/N = 26 dB, 40 kHz deviation) |
| S/N Ratio: | 75 dB (MONO) 70 dB (STEREO) |

| | |
|---|--|
| Harmonic Distortion: | At 1 kHz 0.15% (MONO) 0.3% (STEREO) |
| IM Distortion: | 0.15% (MONO) 0.3% (STEREO) |
| Separation: | 45 dB at 1 kHz |
| Frequency Response: | 40 Hz–12.5 kHz $+0.5$ dB (DIN) 30 Hz–15 kHz $+0.5$ dB (IHF) |
| Selectivity at 300 kHz (at 40 kHz deviation, S/N = 26 dB): | 55 dB |
| Capture Ratio: | 1.0 dB |
| AM Suppression Ratio: | 54 dB |
| Image Response Ratio: | 45 dB |
| Spurious Response Ratio: | 75 dB |
| Muting Threshold: | Approx. 5μV – Continued on page 2 – |

SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY SHADING AND MARK  ON THE SCHEMATIC DIAGRAMS, EXPLODED VIEWS AND IN THE PARTS LIST ARE CRITICAL TO SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY.

SONY®

SERVICE MANUAL

485

STR-333L

SW/MW/LW SECTION

| | SW | MW | LW |
|------------------------|---------------------------------------|--|--|
| Frequency Range | 5.8 MHz—15.8 MHz | 522 kHz—1,602 kHz | 150 kHz—350 kHz |
| Antenna | External antenna terminal | Built-in ferrite-rod antenna, External antenna terminal | |
| Intermediate Frequency | 450 kHz | | |
| Usable Sensitivity | 30 μ V, external antenna (10 MHz) | 250 μ V/m, built-in antenna (1,000 kHz) 100 μ V, external antenna (1,000 kHz) | 500 μ V/m, built-in antenna (230 kHz) 100 μ V, external antenna (230 kHz) |
| S/N Ratio | 52 dB (5 mV) | 52 dB (50 mV/m) | 52 dB (50 mV/m) |
| Harmonic Distortion | 0.3% (5 mV, 400 Hz) | 0.3% (50 mV/m, 400 Hz) | 0.3% (50 mV/m, 400 Hz) |
| Selectivity | 50 dB (9 kHz) | 50 dB (9 kHz) | 50 dB (9 kHz) |

AUDIO AMPLIFIER SECTION

Continuous RMS Power Output: Less than 0.1% THD, both channels driven simultaneously

- At 20 Hz—20 kHz
 - 25 + 25W (8 Ω)
 - 25 + 25W (4 Ω)
- At 1 kHz
 - 28 + 28W (8 Ω)
 - 28 + 28W (4 Ω)

According to DIN 45500

- 25 + 25W (8 Ω)
- 25 + 25W (4 Ω)

Dynamic Power Output: 90W (8 Ω)
(IHF constant power supply method)
90W (4 Ω)

Power Bandwidth: 10 Hz—40 kHz, IHF

Damping Factor: 20 at 1 kHz, 8 Ω

Harmonic Distortion: Less than 0.1% at rated output
Less than 0.1% at 1W output

Intermodulation Distortion: Less than 0.1% at rated output
(60 Hz : 7 kHz = 4:1)
Less than 0.1% at 1W output

Residual Noise: Less than 0.08 μ W at 8 Ω

Inputs:

| | Sensitivity | Impedance | S/N | Weighting network |
|-------|-------------------|----------------|-------|-------------------|
| PHONO | 2.5 mV (-50 dB) | 50 k Ω | 70 dB | A |
| TAPE | 150 mV (-14.5 dB) | 100 k Ω | 90 dB | A |

Measured with rated output power into 8 Ω loads (both channels driven simultaneously) at 1 kHz.

Outputs: (with rated input)

| | | |
|------------|---|-------------------------|
| REC OUT | Voltage 150 mV | Impedance 10 k Ω |
| HEADPHONES | Accepts all low or high impedance headphones. | |
| SPEAKER | 4—16 Ω speakers are suitable. | |


Frequency Response: PHONO
RIAA equalization curve \pm 1 dB
TAPE
10 Hz—50 kHz $+\frac{1}{-3}$ dB

Tone Controls: BASS \pm 8 dB at 100 Hz
TREBLE \pm 8 dB at 10 kHz


Loudness Control: +6 dB at 100 Hz
(Att. 30 dB) +3 dB at 10 kHz

MODEL IDENTIFICATION

— Specification Label or AC Outlet —

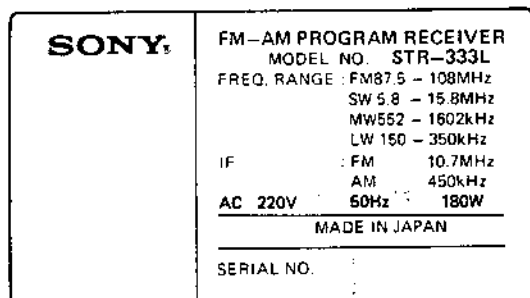

— rear panel —

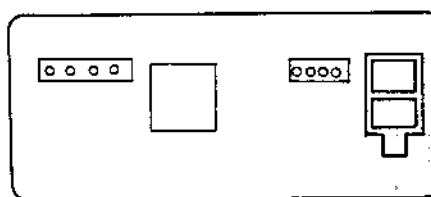


UK model: AC 240 V \sim 50 Hz 240W
AEP, SCN model: AC 220 V \sim 50 Hz 180W

AEP model: two AC outlet
SCN model: not provide


SECTION 1
OUTLINE

1-1. BLOCK DIAGRAM

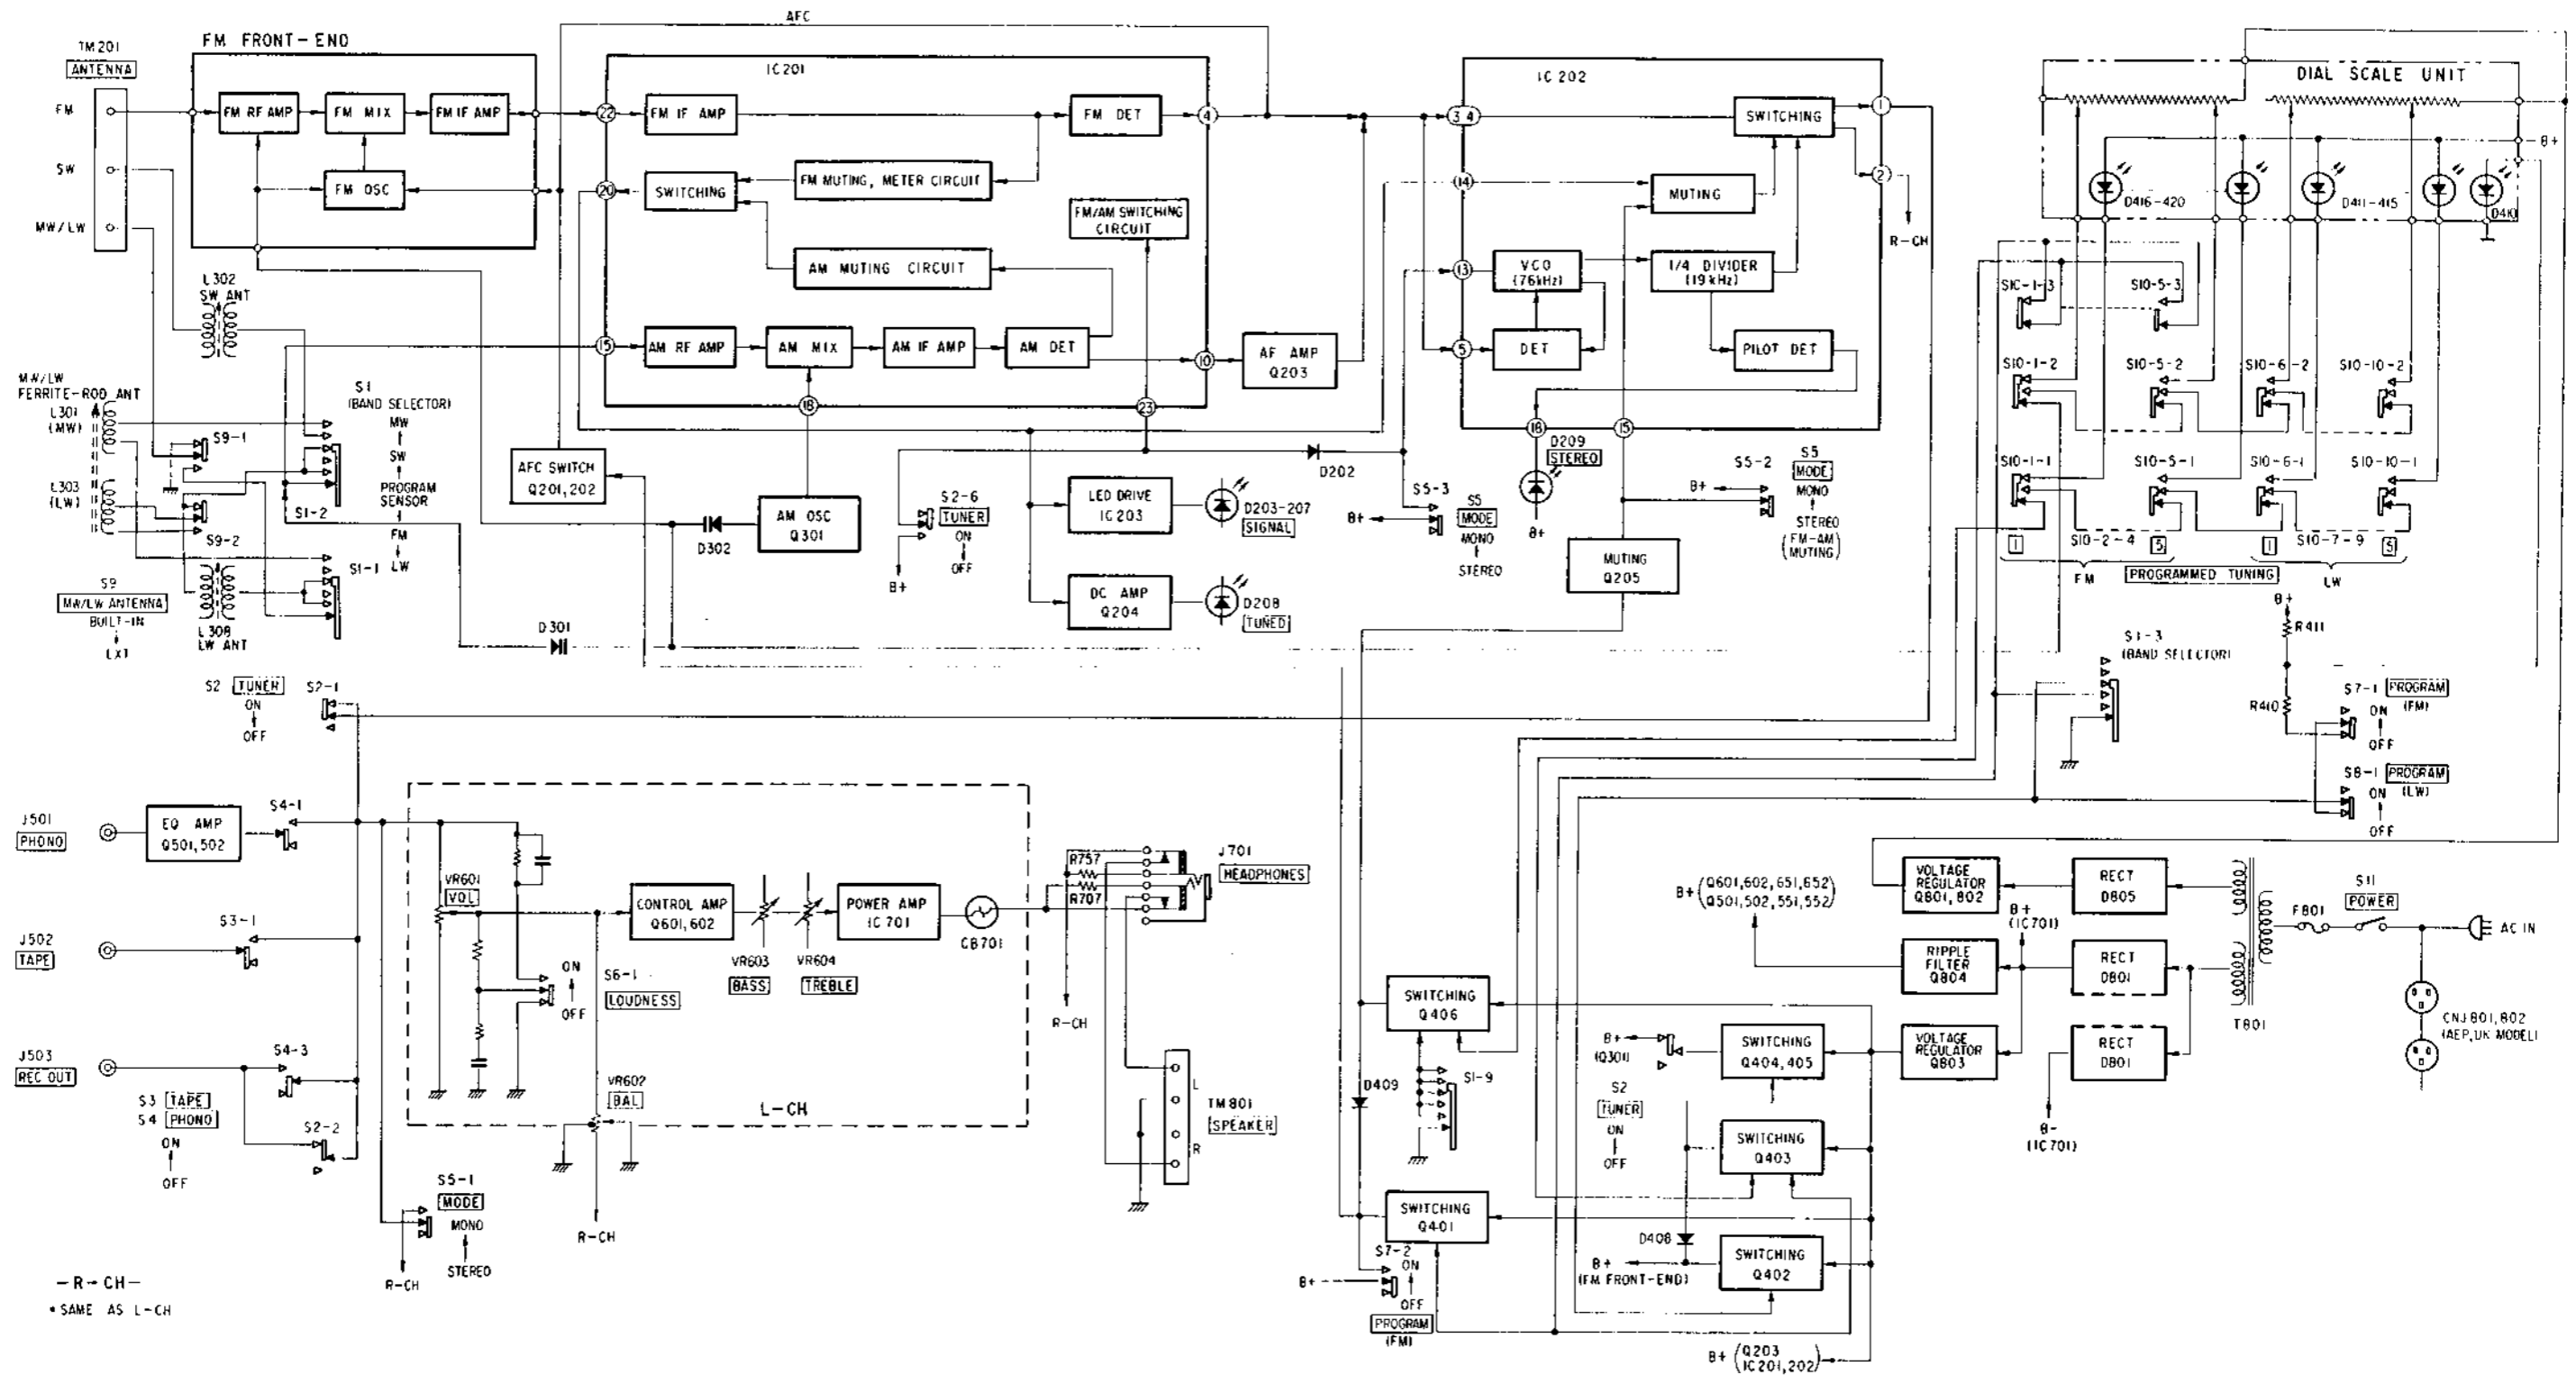

STR-333L STR-333L


1-2. CIRCUIT DESCRIPTION

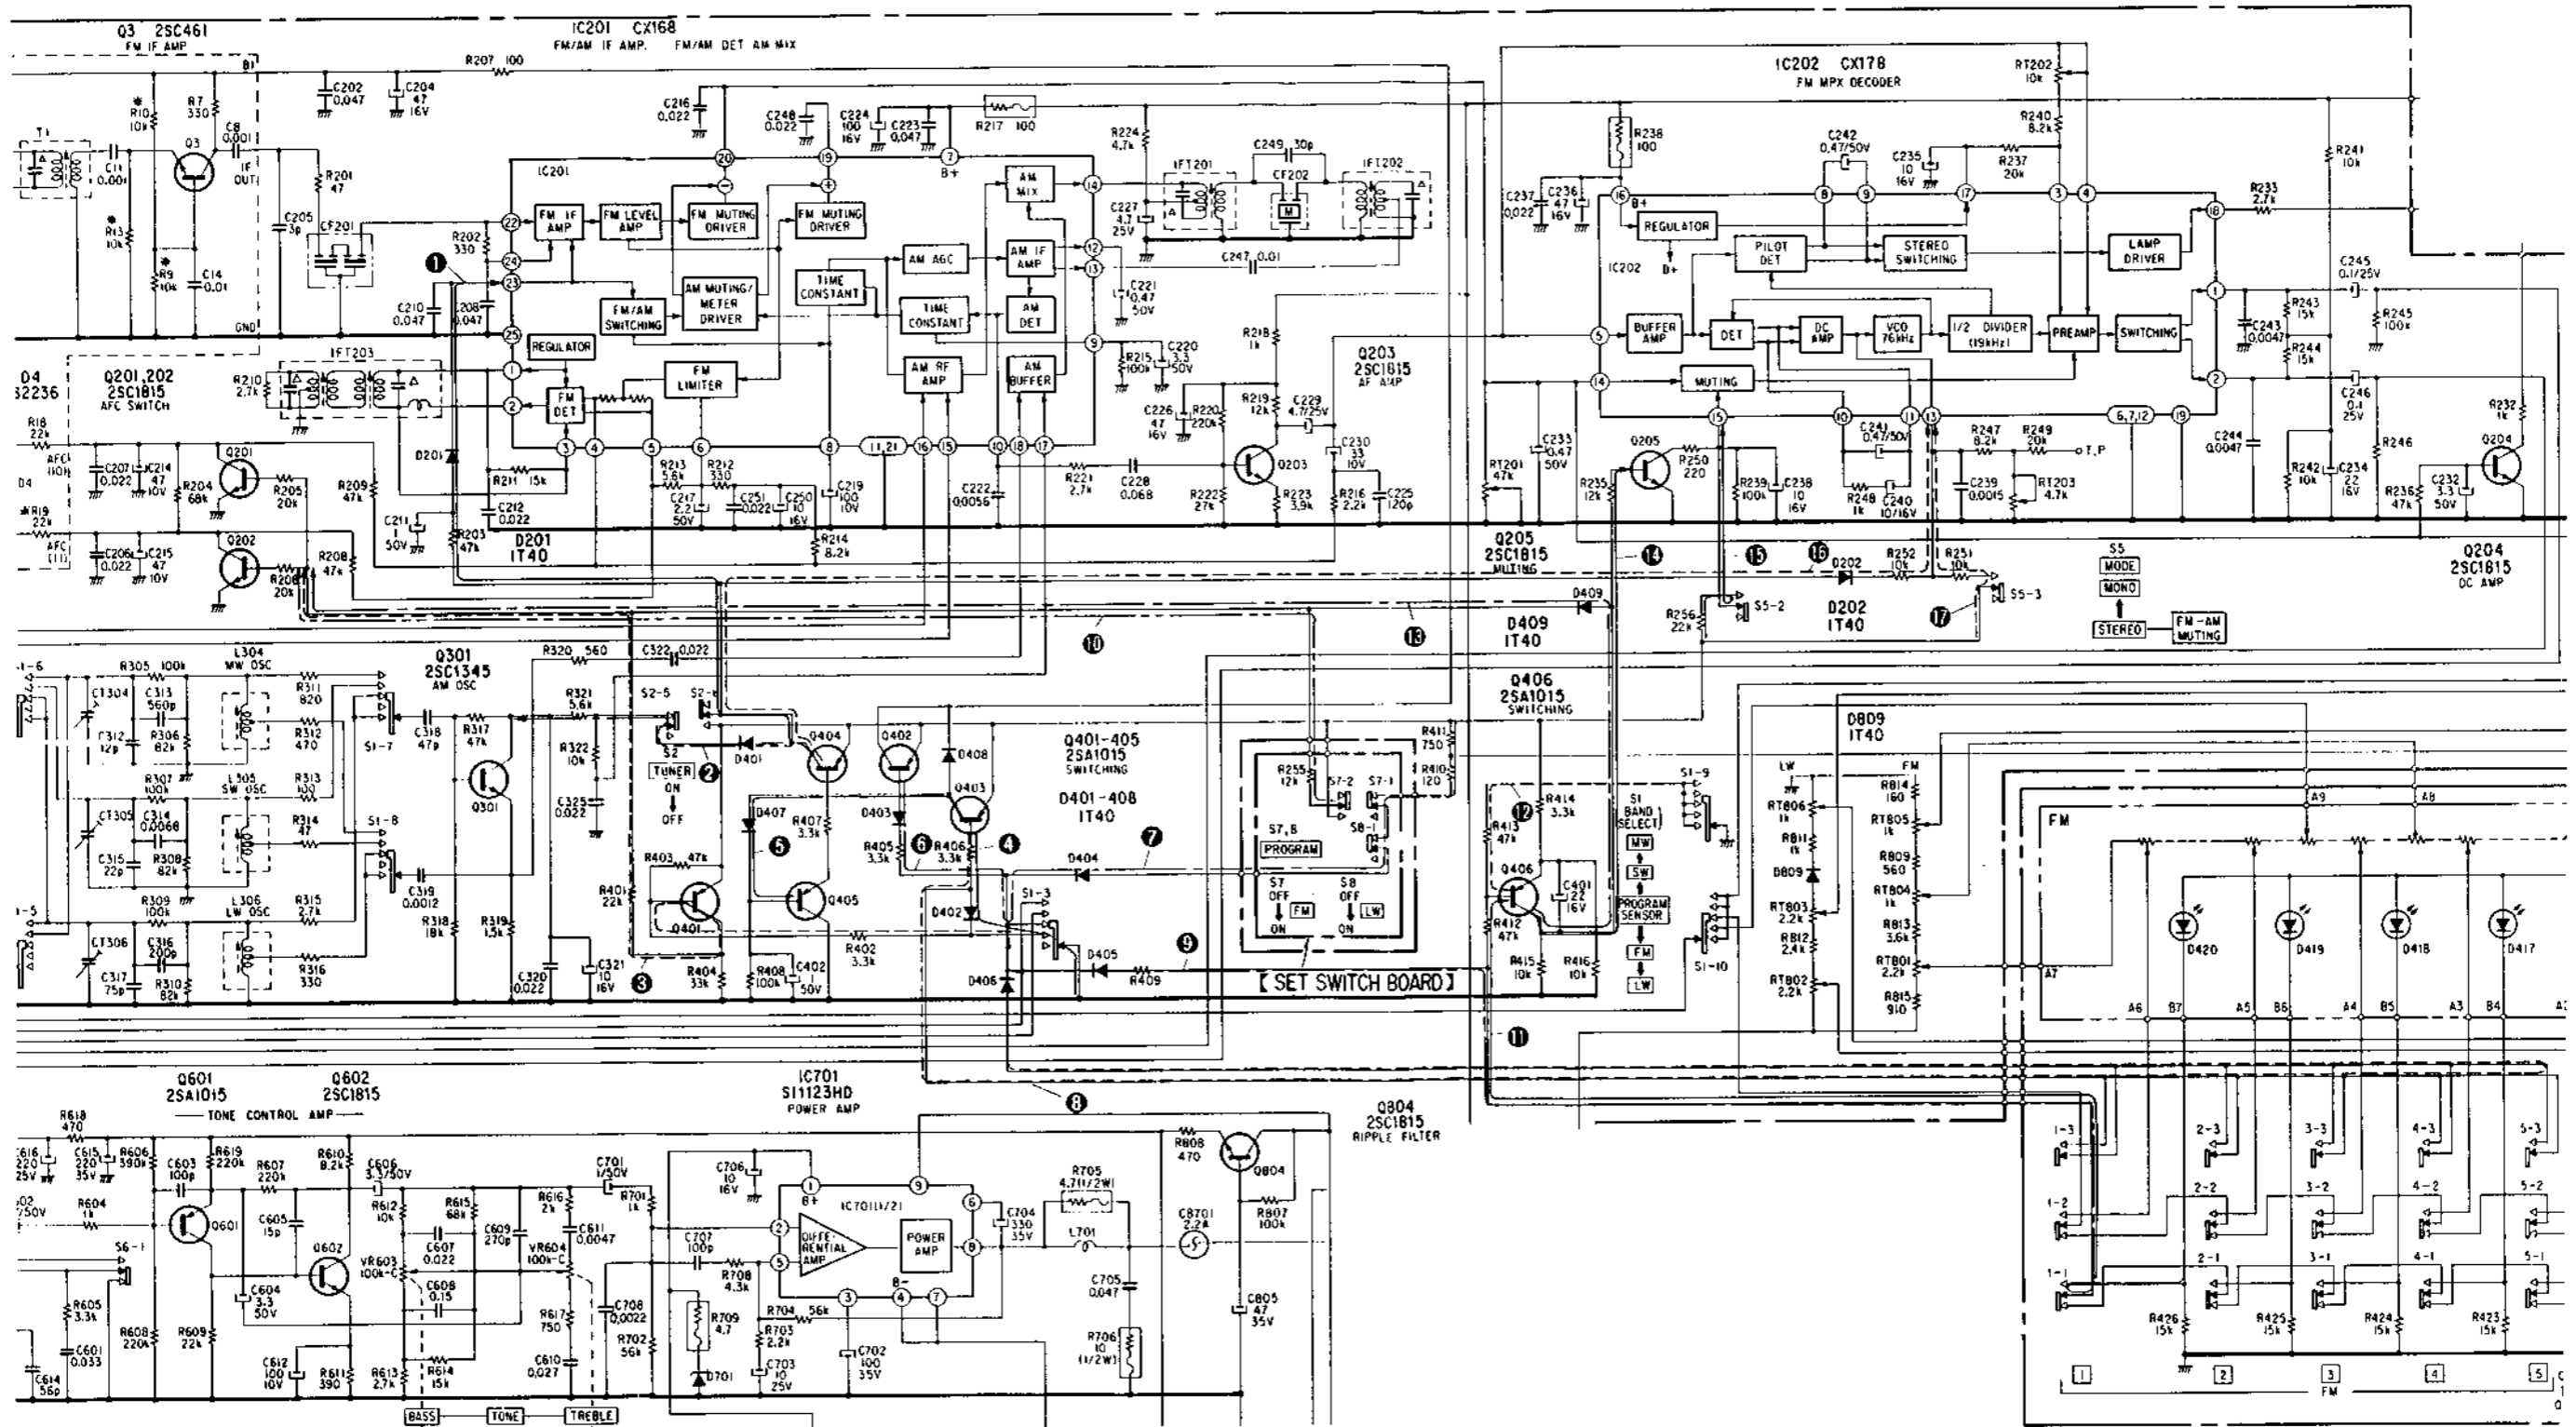


- ①. In SW, MW or LW reception, the CX168 (IC201) is switched to AM mode.
- ②. In SW, MW or LW reception, B+ voltage is applied to Q301.
- ③. Band Selector (S1): FM position
This line is grounded. Therefore, Q401, Q201 and Q202 turns on and AFC circuit does not operate.
- ④. Band Selector: FM position
This line is grounded and Q403 turns on.
- ⑤. Band Selector: PROGRAM SENSOR or FM position
In FM reception, Q405 turns off thereby turning Q403 on and Q404 turning off.
Band Selector: SW, MW or LW position
Q404 and Q405 turns on.
- ⑥. Band Selector: PROGRAM SENSOR position
This line is grounded and Q402 turns on. Therefore, B+ voltage is applied to the FM front-end circuit even in LW reception, and the selection of LW or FM mode is done by applying B+ voltage to terminal ②③ of IC201.
- ⑦. Band Selector: PROGRAM SENSOR position
This line is grounded. Therefore, the dial pointer is not brighter than manual tuning. But when the PROGRAM switch (S7, S8) is depressed, the current flowing through D410 increases and the dial pointer brightens.
- ⑧. Band Selector: PROGRAM SENSOR position
When one of the PROGRAMMED TUNING button (S10) is depressed, this line is grounded and Q403 turns on.
- ⑨. Band Selector: PROGRAM SENSOR position
This line is grounded. Therefore, when one of the PROGRAMMED TUNING button (S10) is depressed, the station marker (D411 to D420) will light up.
- ⑩. When the FM PROGRAM switch (S7) switches ON, B+ voltage is applied to this line, Q201 and Q202 turn on, and AFC circuit is released by Q201 and Q202.
- ⑪. Band Selector: PROGRAM SENSOR position
This line is grounded via D405 and S1-3, but the voltage is applied to the base of Q406 by R409, and Q406 turns off.
But, when switching S10 over, a voltage is momentarily not applied and Q406 turns on.
- ⑫. When the FUNCTION switch (S1) is changed, Q406 turns on momentarily by S1-9. Then AFC circuit is released and the signal is muted within IC202.
- ⑬. When the FUNCTION switch (S1) or PROGRAMMED TUNING switch (S10) is changed, the voltage is applied to this line. Therefore, AFC circuit is released.
- ⑭. When the FUNCTION switch (S1) or PROGRAMMED TUNING switch (S10) is changed, Q406 and Q205 turns on, therefore, the signal is muted within IC202.
- ⑮. When the MODE switch (S5) is changed to MONO, the voltage is applied to terminal ①⑤ of IC202 and the signal is muted within IC202.
- ⑯. In SW, MW or LW reception, the voltage is applied to terminal ①③ of IC202 and the VCO operation stops.
- ⑰. When the MODE switch (S5) is changed to MONO, the voltage is applied to terminal ①⑤ of IC202 and the VCO operation stops.

SECTION 2 DISASSEMBLY


Note: Follow the disassembly procedure in the numerical order given.

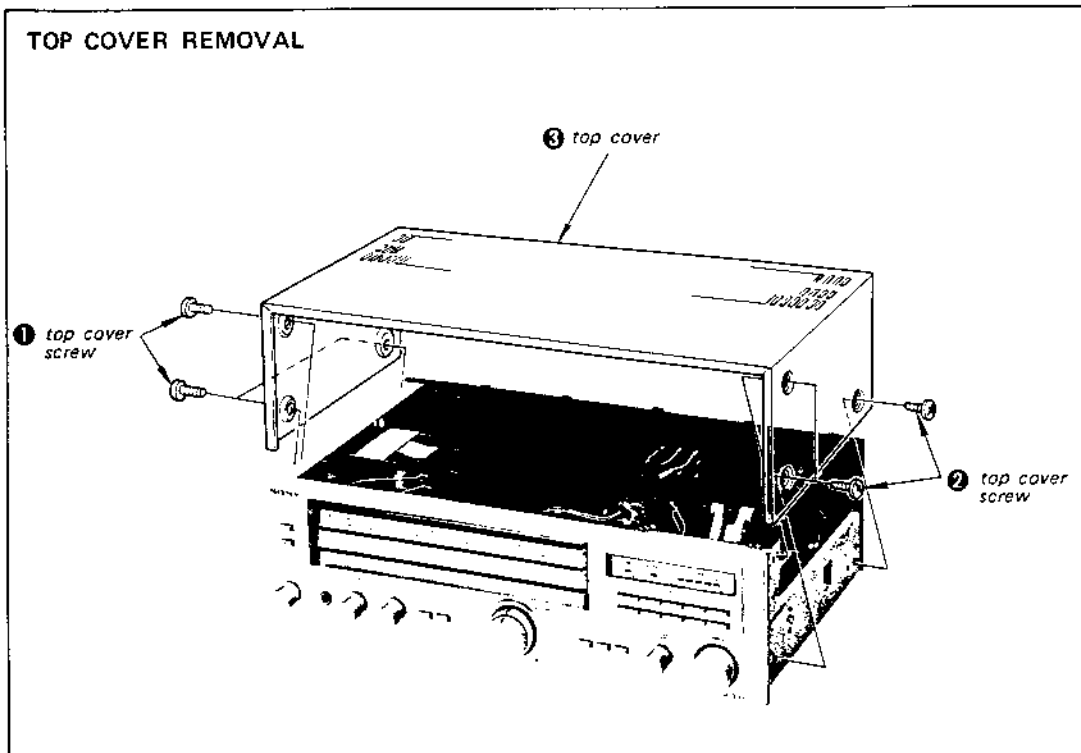


DIAL CORD STRINGING
See page 15.

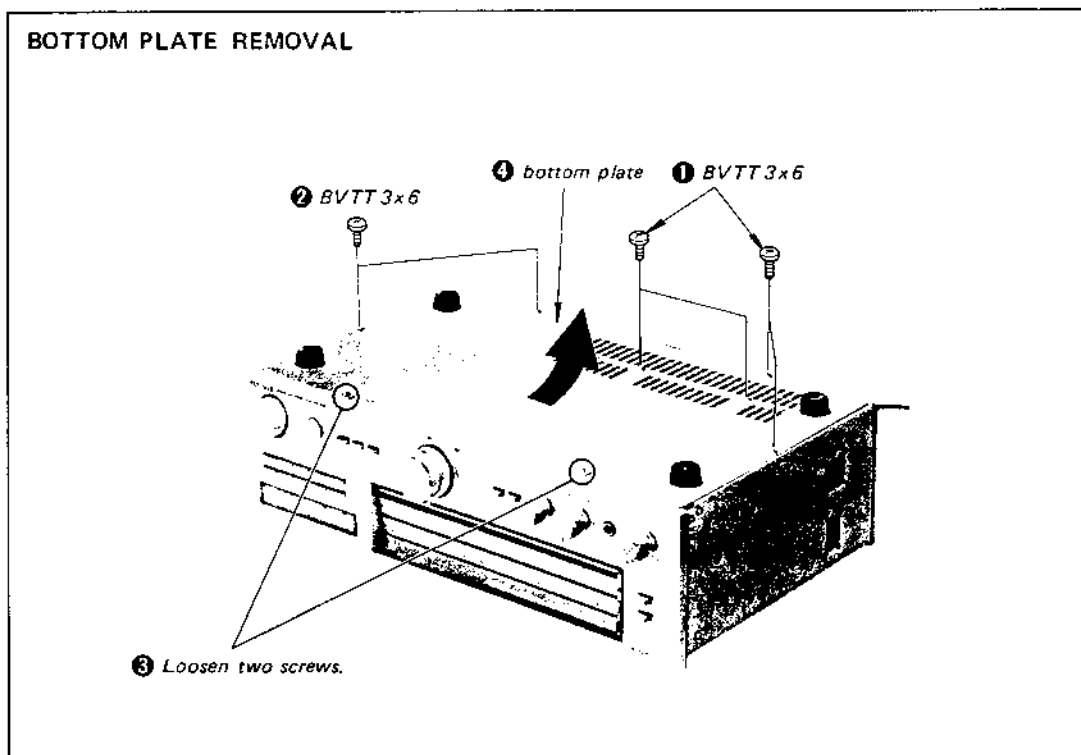


FRONT PANEL REMOVAL

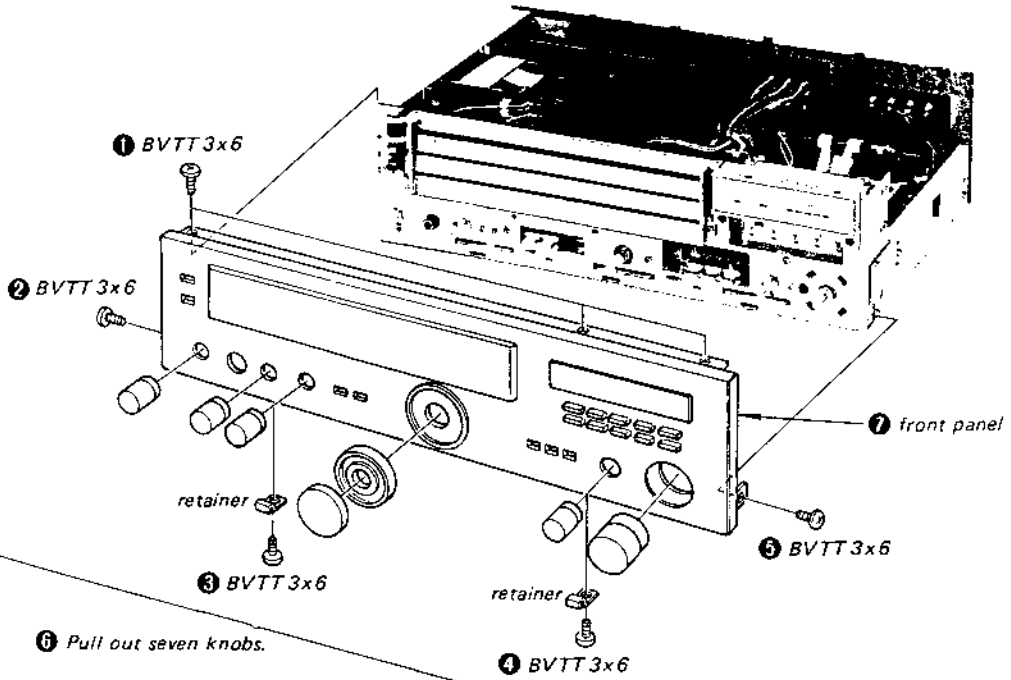


REAR PANEL REMOVAL



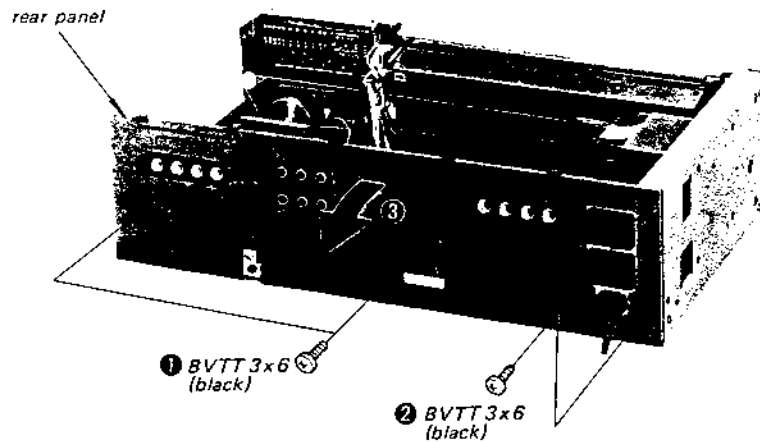


DIAL SCALE REMOVAL

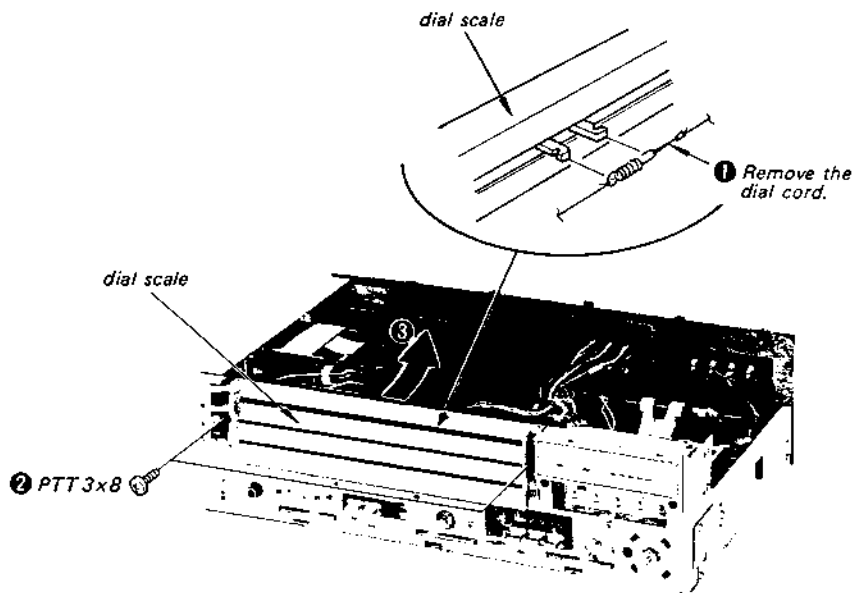

SUB-PANEL REMOVAL

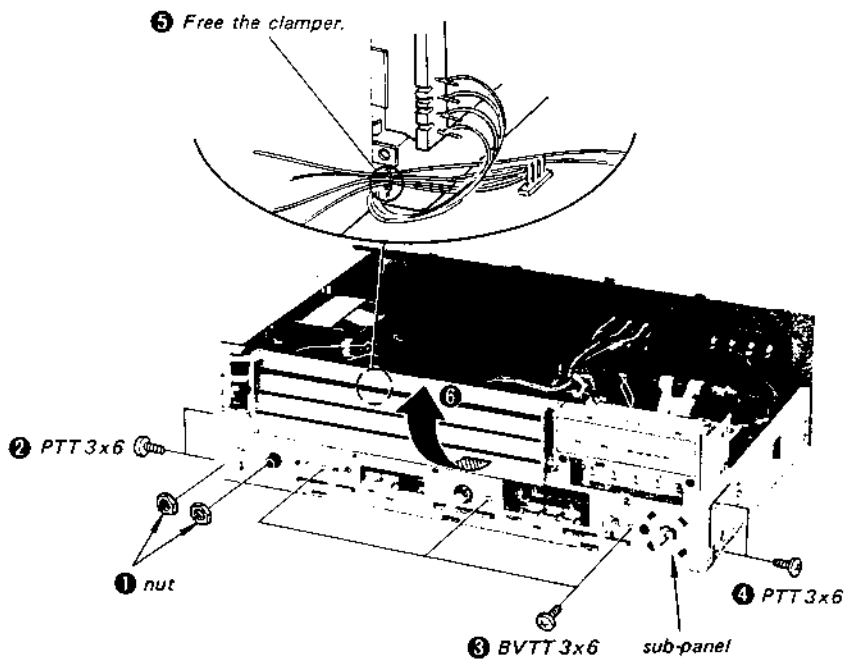


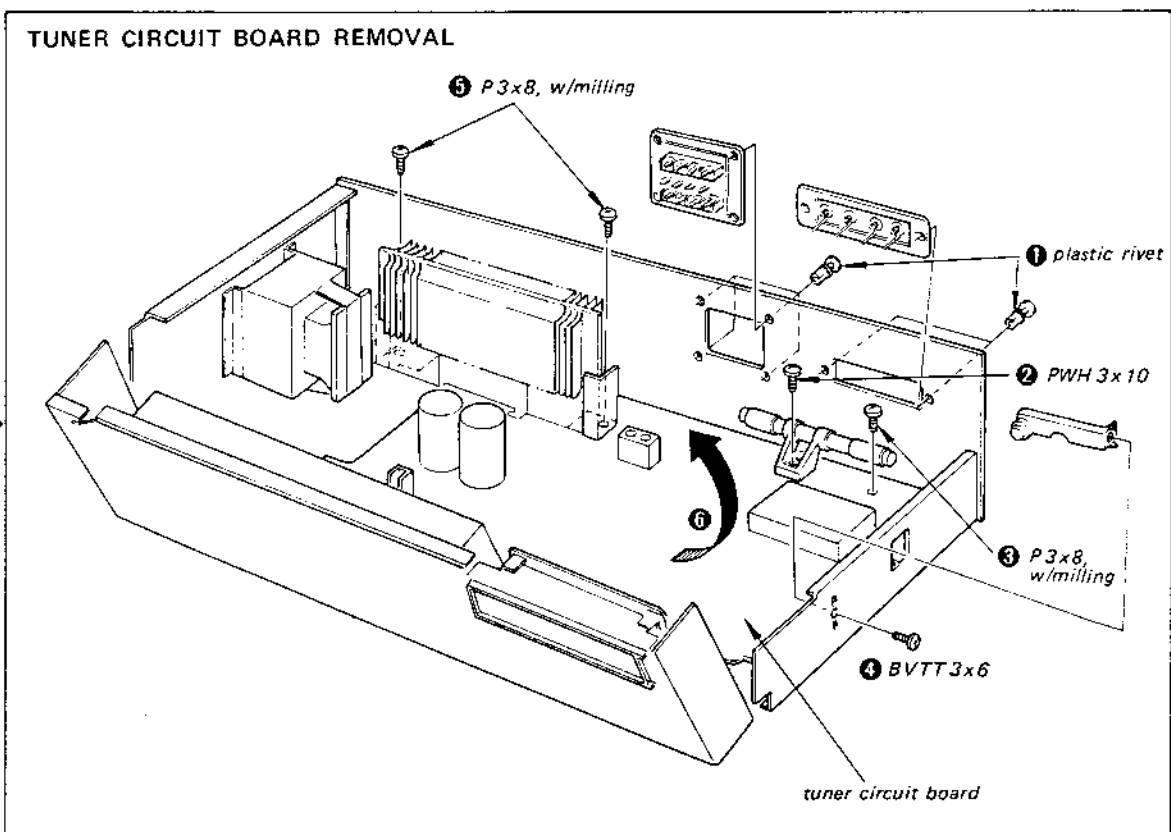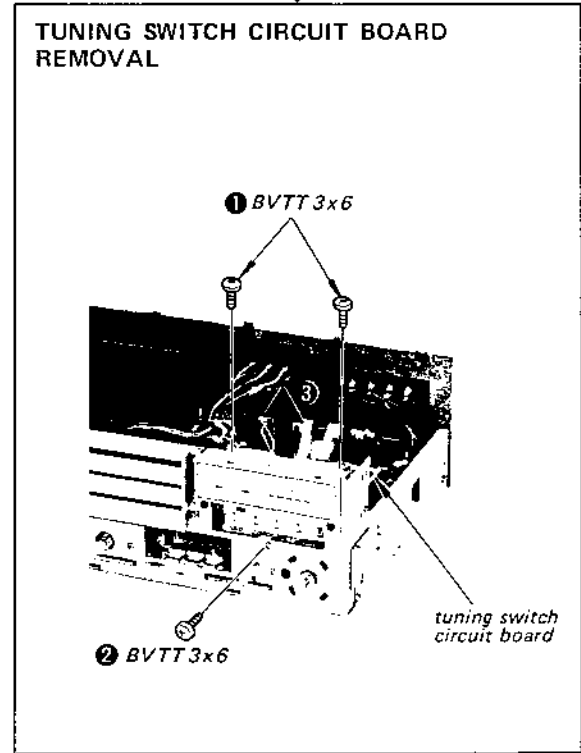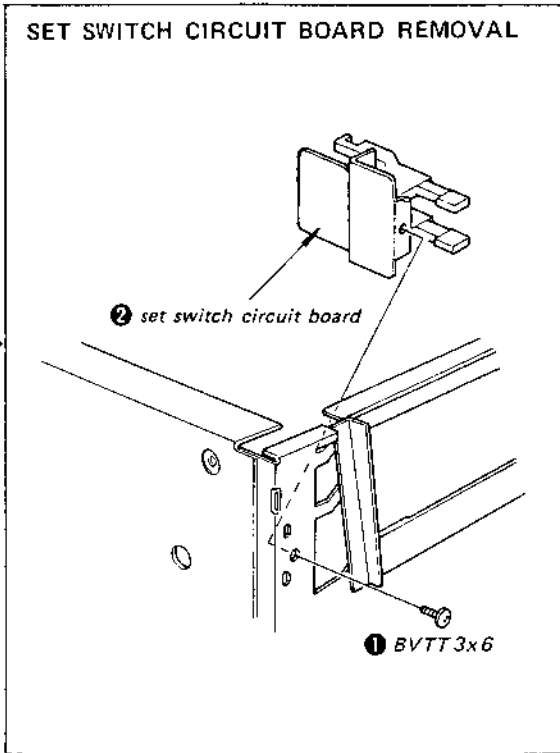




DIAL SCALE UNIT

This unit is tuned by moving the sliders of the dial scale unit along the carbon-coated lines of the resistor plates. The sliders should be moved very precisely. So, carefully perform the disassembly and the installation of the dial scale unit as follows. Only the marker and the pointer table are replaceable.


Take care not to damage the sliders shown below.

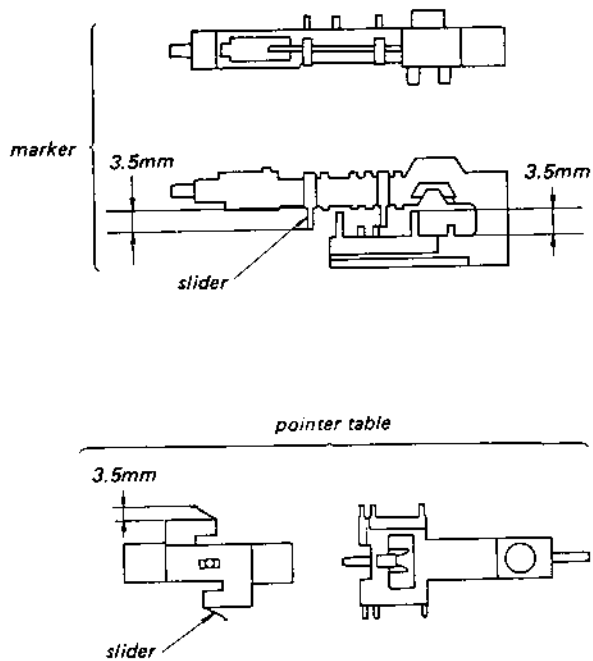


• Dial Scale Unit Disassembly

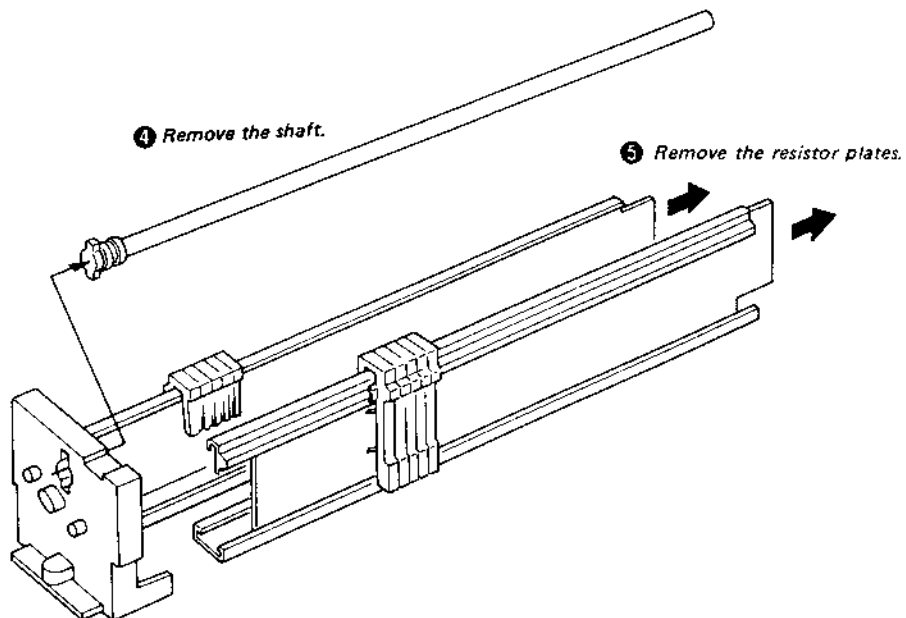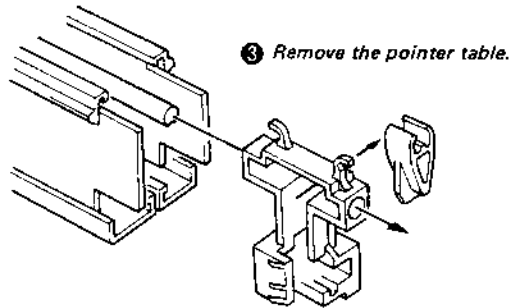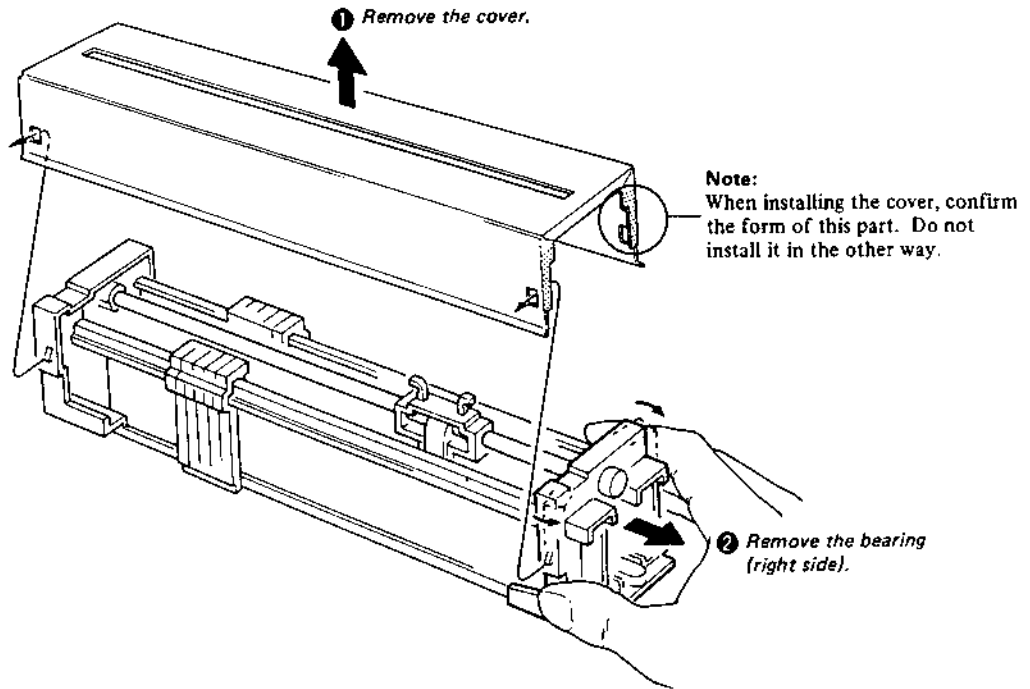

• Dial Scale Unit Installation

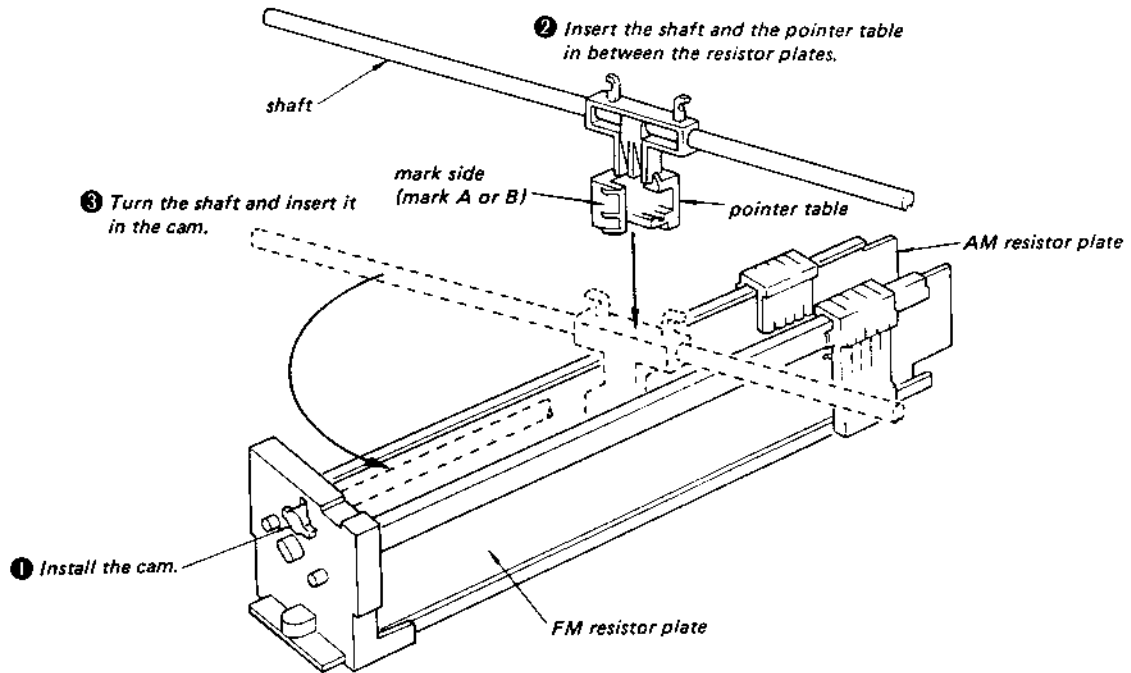

Note:
The installation is performed in this way not to damage the sliders of the pointer table.

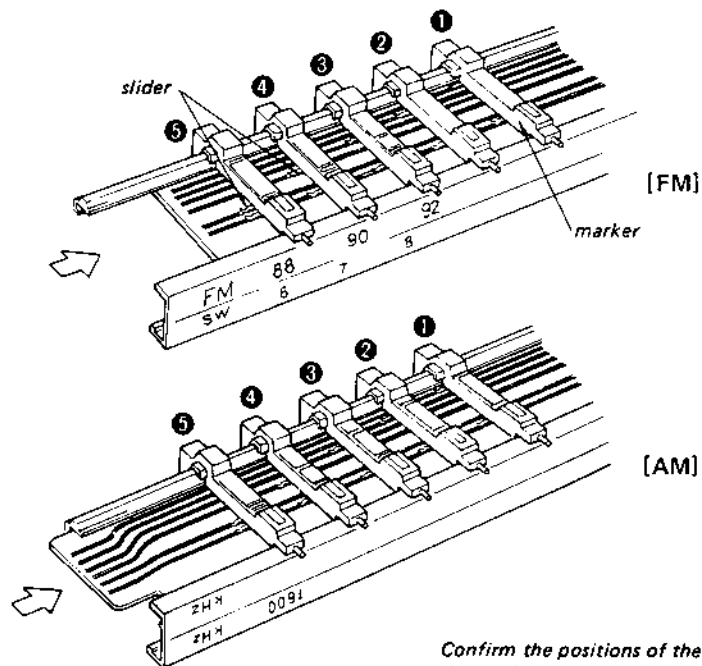

Confirm the positions of the sliders and install the markers in the numerical order given. If one of the markers is damaged, replace the five markers together to obtain the same brightness of them.


DIAL CORD STRINGING

1 Prepare a dial cord (0.5mm dia., 1100mm (43 3/8 inches)).

6 Remove the pulley bracket.

2 BVTT 3x6

3 Install the pulley bracket and plug in the connector.

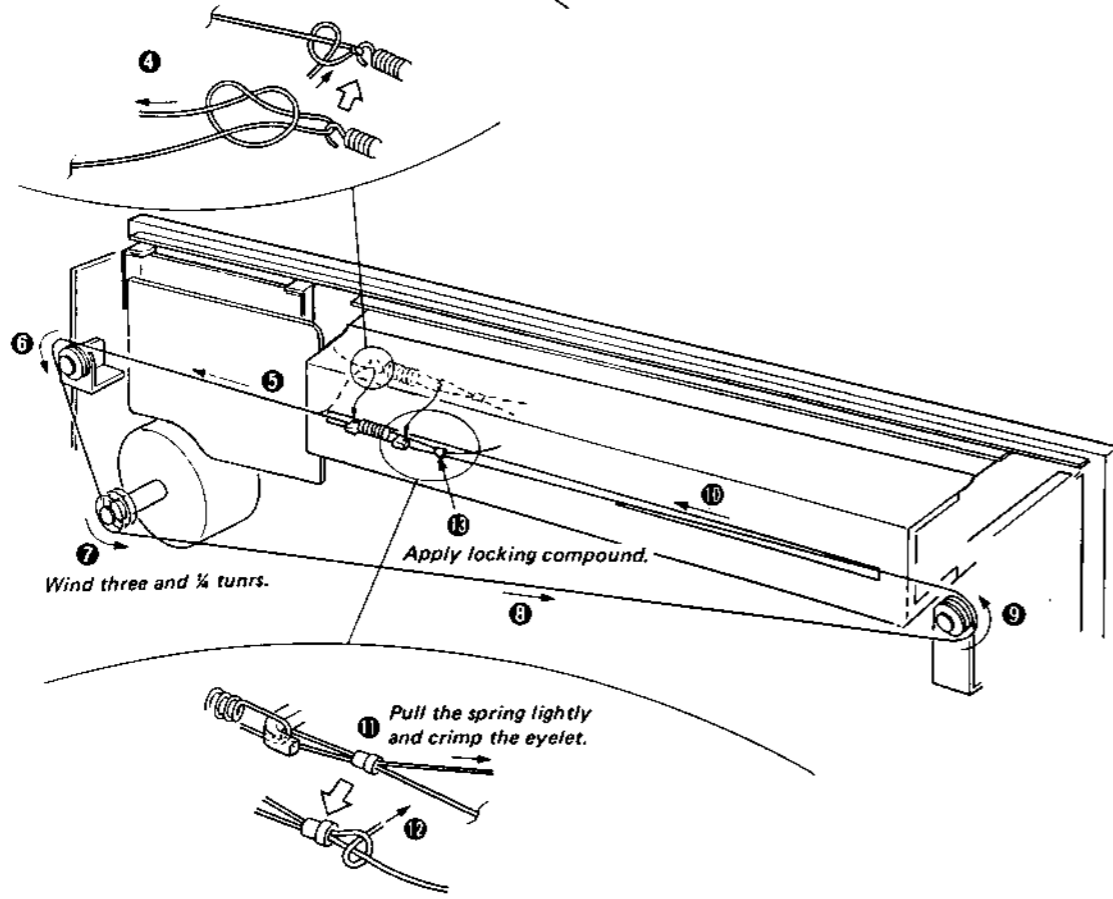

7 Wind three and 1/4 turns.

8 Apply locking compound.


9 Pull the spring lightly and crimp the eyelet.

SECTION 3
ADJUSTMENTS


MW SECTION

Setting:

FUNCTION Switch: TUNER
Band Selector: MW

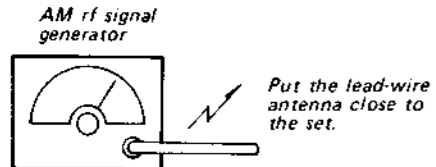

Modulation: 400 Hz, 30%

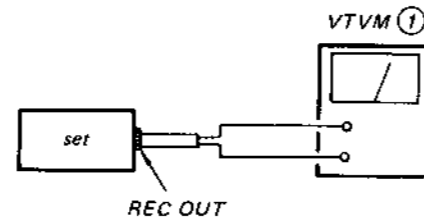


- Repeat the procedures in each adjustment several times, and the frequency coverage and tracking adjustments should be finally done by the trimmer capacitors.


| MW FREQUENCY COVERAGE ADJUSTMENT | | | |
|---|---|----------------------------------|-----------------|
| | Dial Indication | VTVM ① Reading | Adjustment Part |
| Tuning Control Voltage Adjustment | maximum frequency | 25V | RT806 |
| | minimum frequency | 2V | RT802 |
| | Adjust for a specified reading on VTVM ②. | | |
| Local Oscillator Frequency Adjustment | Dial Indication | AM Rf Signal Generator Frequency | Adjustment Part |
| | minimum frequency | 515 kHz | L304 |
| | maximum frequency | 1,660 kHz | CT304 |
| Adjust for a maximum reading on VTVM ①. | | | |
| Dial Pointer Setting | Dial Indication | AM Rf Signal Generator Frequency | Adjustment Part |
| | 600 kHz | 600 kHz | RT806 |
| | 1,000 kHz | 1,000 kHz | RT803 |
| | 1,400 kHz | 1,400 kHz | RT802 |
| Adjust for a maximum reading on VTVM ①. | | | |

Note: Be sure to perform the LW and the SW frequency coverage adjustments after the tuning control voltage adjustment.

| AM IF ALIGNMENT | |
|---|--------|
| Adjust for a maximum reading on VTVM ①. | |
| 450 kHz | |
| IFT202 | IFT201 |

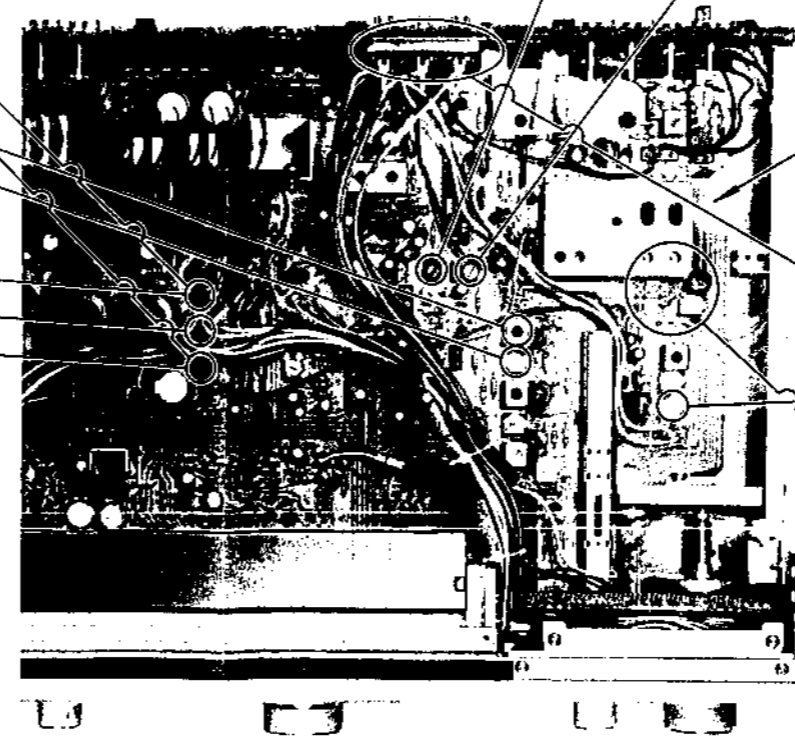


| MW TRACKING ADJUSTMENT | |
|---|-----------|
| Adjust for a maximum reading on VTVM ①. | |
| L301 | 600 kHz |
| CT301 | 1,400 kHz |

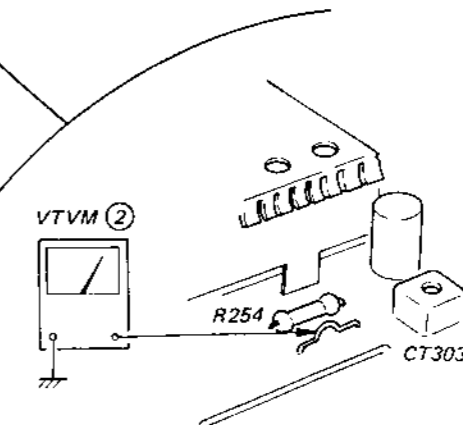


LW SECTION

Setting: FUNCTION Switch: TUNER
 Band Selector: LW
 MW/LW ANTENNA Selector: BUILT-IN




Modulation: 400 Hz, 30%

Put the lead-wire antenna close to the set.

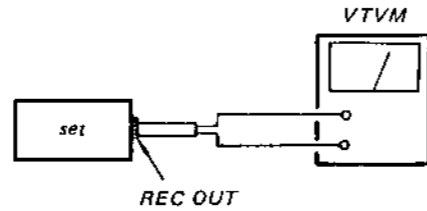

Repeat the procedures in each adjustment several times, and the frequency coverage and tracking adjustments should be finally done by the trimmer capacitors.

LW EXT ANTENNA COIL ADJUSTMENT

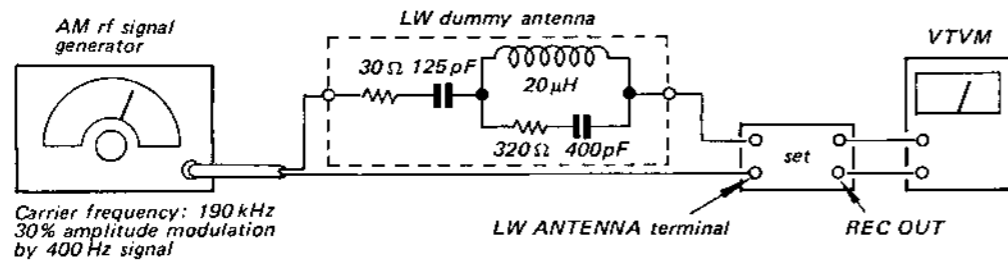


1. Set the MW/LW ANTENNA switch to EXT position.
2. Tune the set to 230 kHz and adjust L308 for a maximum reading on VTVM.

| LW TRACKING ADJUSTMENT | |
|---------------------------------------|-------|
| Adjust for a maximum reading on VTVM. | |
| 190 kHz | L303 |
| 310 kHz | CT303 |


| AM IF ALIGNMENT | |
|---------------------------------------|--------|
| Adjust for a maximum reading on VTVM. | |
| 450 kHz | IFT202 |
| | IFT201 |

| LW FREQUENCY COVERAGE ADJUSTMENT | |
|---------------------------------------|-------|
| Adjust for a maximum reading on VTVM. | |
| 145 kHz | L306 |
| 365 kHz | CT306 |


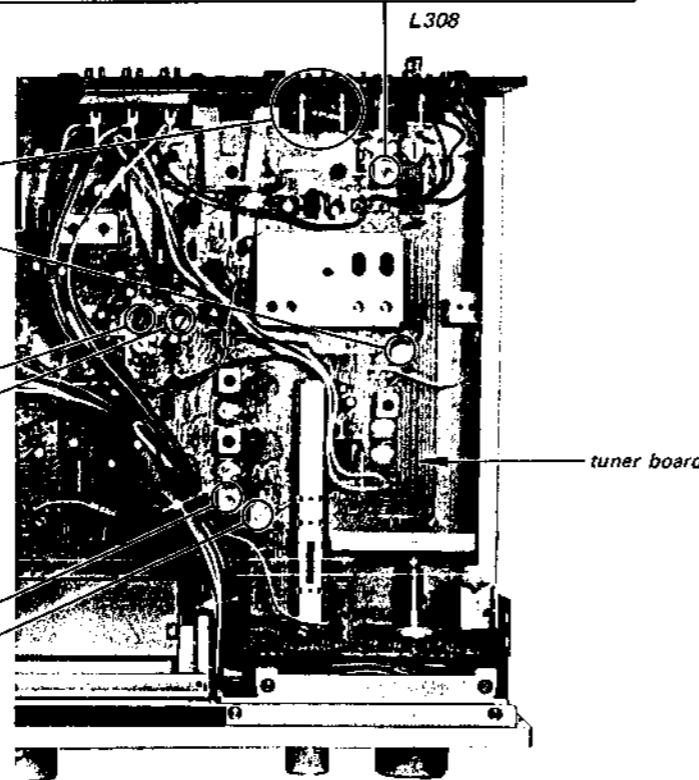


SW SECTION

Setting: FUNCTION Switch: TUNER
 Band Selector: SW



30% amplitude modulation by 400 Hz signal

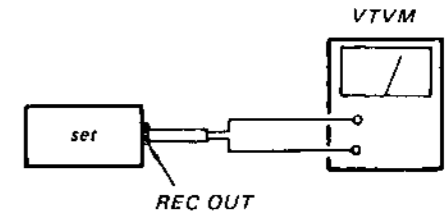


Repeat the procedures in each adjustment several times, and the frequency coverage and tracking adjustments should be finally done by the trimmer capacitors.

| AM IF ALIGNMENT | |
|---------------------------------------|--------|
| Adjust for a maximum reading on VTVM. | |
| 450 kHz | |
| IFT202 | IFT201 |

| SW FREQUENCY COVERAGE ADJUSTMENT | |
|---------------------------------------|-------|
| Adjust for a maximum reading on VTVM. | |
| 5.5 MHz | L305 |
| 16.1 MHz | CT305 |

| SW TRACKING ADJUSTMENT | |
|---------------------------------------|--------|
| Adjust for a maximum reading on VTVM. | |
| L302 | 6 MHz |
| CT302 | 15 MHz |


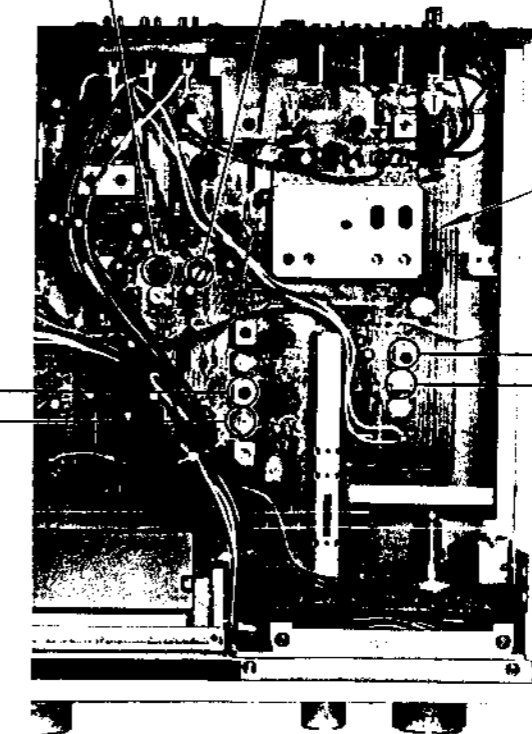


STR-333L STR-333L

FM SECTION


Setting:

FUNCTION Switch: TUNER
 Band Selector: FM
 MODE Switch: MONO

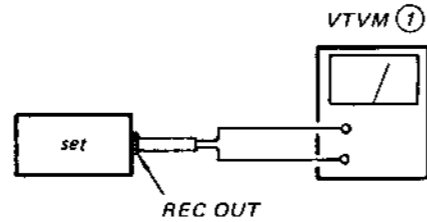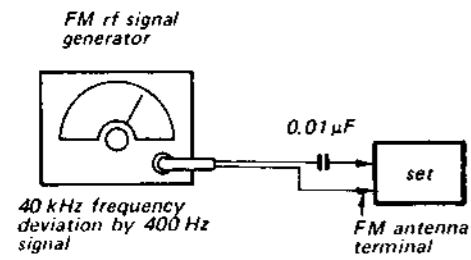

• Repeat the procedures in each adjustment several times, and the frequency coverage and tracking adjustments should be finally done by the trimmer capacitors.

| FM FREQUENCY COVERAGE ADJUSTMENT 2 | | |
|---|----------------------------------|-----------------|
| Dial Indication | FM Rf Signal Generator Frequency | Adjustment Part |
| 88 MHz | 88 MHz | RT805 |
| 98 MHz | 98 MHz | RT804 |
| 108 MHz | 108 MHz | RT801 |
| Adjust for a maximum reading on VTVM (1). | | |

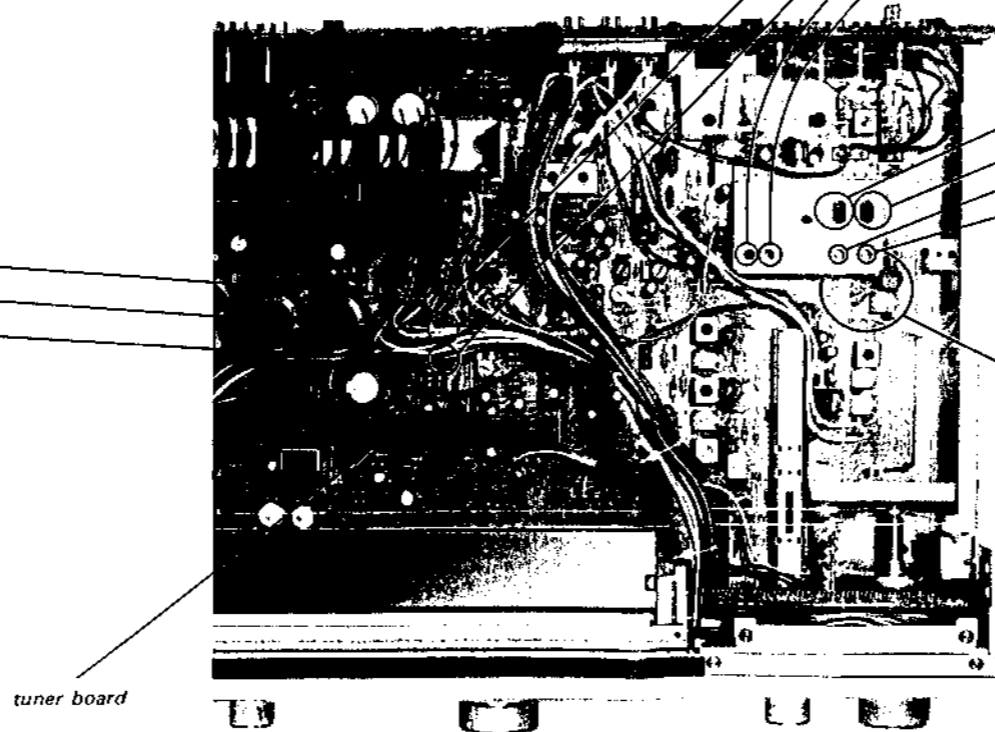

FM FRONT-END BLOCK

Adjustment is not necessary. But if it has been meddled with in some way, and if the adjustment is necessary by all means, adjust the FM front-end block as follows.

FM FREQUENCY COVERAGE ADJUSTMENT 1


1) Be sure to perform this adjustment before the FM frequency coverage adjustment 2.

| TUNING CONTROL VOLTAGE ADJUSTMENT | | |
|---|-------------------|------------------|
| Adjustment Part | Dial Indication | VTVM (2) Reading |
| RT805 | minimum frequency | 2.73 V |
| RT801 | maximum frequency | 22.08 V |
| Adjust for a specified reading on VTVM (2). | | |

| LOCAL OSCILLATOR FREQUENCY ADJUSTMENT | | |
|---|-------------------|----------------------------------|
| Adjustment Part | Dial Indication | FM Rf Signal Generator Frequency |
| T2 | minimum frequency | 88 MHz |
| CT3 | maximum frequency | 108 MHz |
| Adjust for a maximum reading on VTVM (1). | | |

2) Be sure to perform this adjustment after the FM frequency coverage adjustment 2.

| FM TRACKING ADJUSTMENT | |
|---|---------|
| Adjust for a maximum reading on VTVM (2). | |
| L4 | 88 MHz |
| L2 | 88 MHz |
| CT2 | 108 MHz |
| CT1 | 108 MHz |

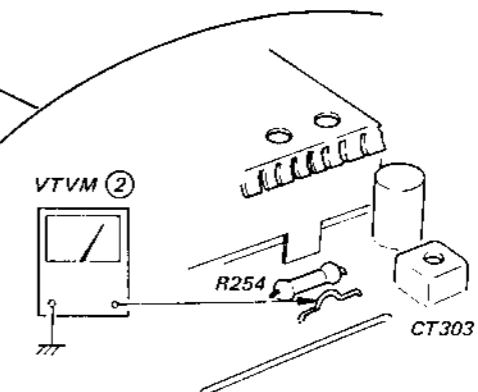

FM DISCRIMINATOR ALIGNMENT 1


Setting:

FUNCTION Switch: TUNER
 Band Selector: FM
 MODE Switch: MONO
 TUNING: Detuned position

Procedure:

Adjust the orange core (primary-side) of IFT203 for 0V reading on VOM.

Note: When replacing the ceramic filter (CF201), perform this alignment.

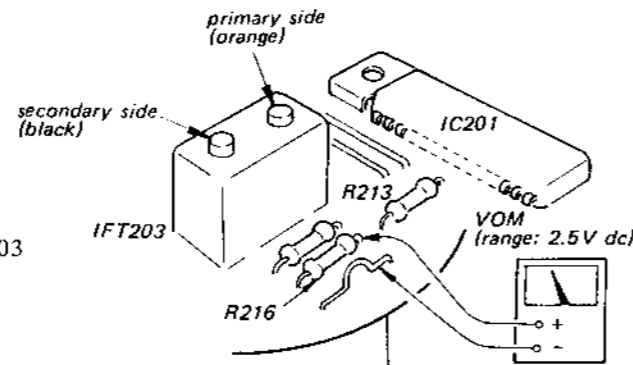


MUTING LEVEL ADJUSTMENT

Setting:

FUNCTION Switch: TUNER
 MODE Switch: STEREO/FM-AM MUTE

Procedure:

Turn RT201 and stop it just when the VTVM indication suddenly decreases.

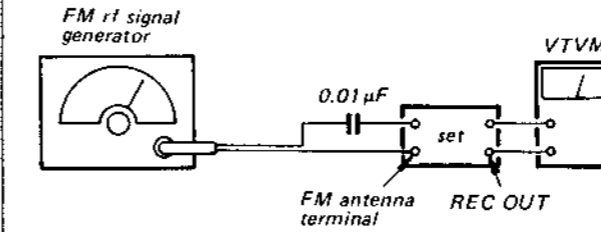


Carrier frequency: 98 MHz
 Modulation: 400 Hz, 40 kHz deviation (100%)
 Output level: 16 μV (24 dB)

FM DISCRIMINATOR ALIGNMENT 2

Setting:


FUNCTION Switch: TUNER
 Band Selector: FM
 MODE Switch: MONO

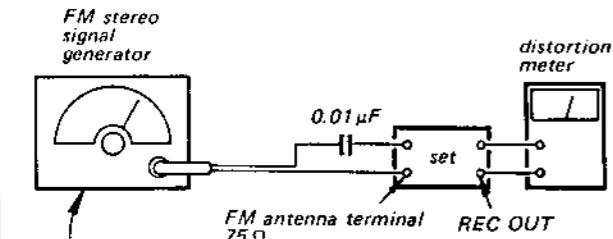

Carrier frequency: 98 MHz
 Output level: 1 mV (60 dB)
 Modulation: 400 Hz, 40 kHz deviation (100%)

Procedure:

Adjust the black core (secondary side) of IFT203 for minimum distortion.

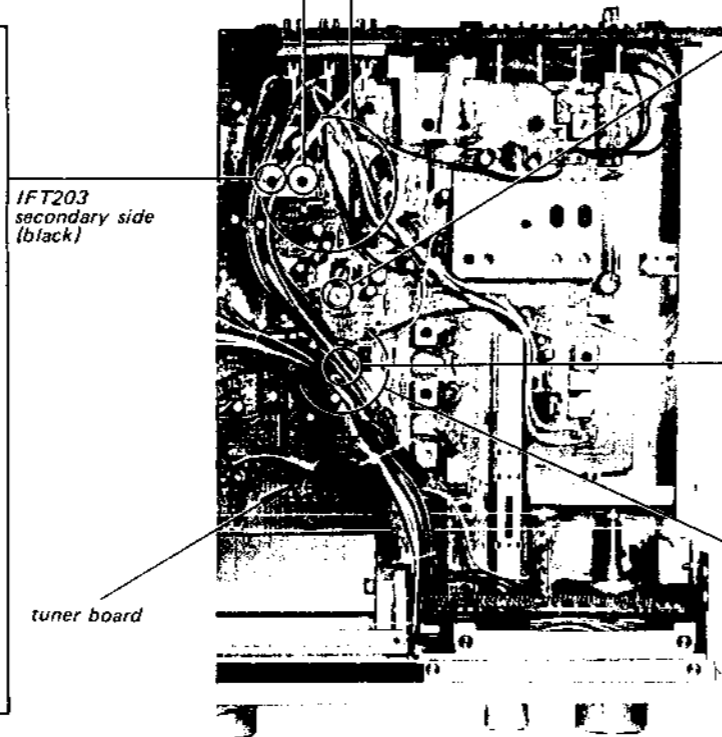


VCO ADJUSTMENT


Setting:

FUNCTION Switch: TUNER
 Band Selector: FM
 MODE Switch: STEREO/FM-AM MUTE

A) Regular Method

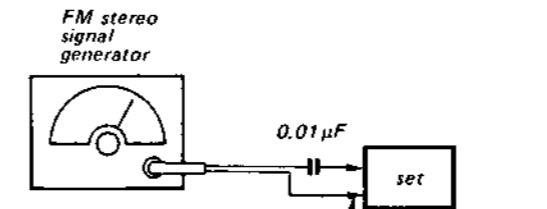

Carrier frequency: 98 MHz
 Output level: 1 mV (60 dB)
 Modulation: no modulation

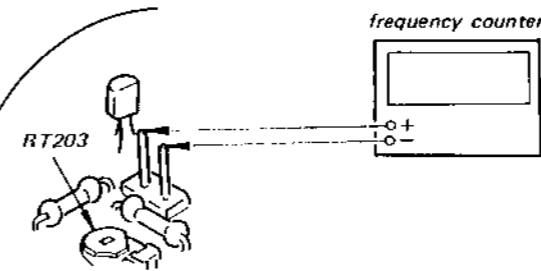


Procedure:

Adjust RT203 for 76 kHz ± 100 Hz on the frequency counter.

B) Simple Method

Procedure:

1. Tune the set to the FM stereo broadcasting signal.
2. Turn RT203 clockwise or counterclockwise and memorize the lighting-up range of STEREO lamp.
3. Secure RT203 at the center in lighting-up range of both turns as shown below.

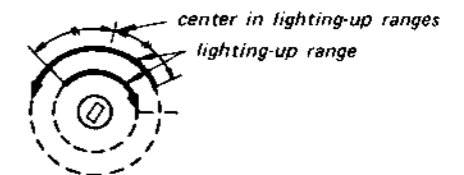


FM STEREO SEPARATION ADJUSTMENT

Setting:

FUNCTION Switch: TUNER
 Band Selector: FM
 MODE Switch: STEREO/FM-AM MUTE

FM stereo signal generator

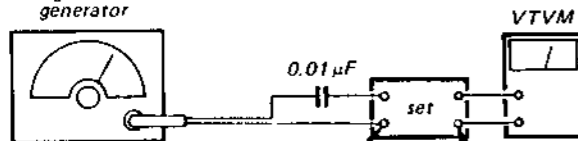


Carrier frequency: 98 MHz
 Output level: 1 mV (60 dB)
 Modulation:
 Audio (400 Hz): 20 kHz deviation (50%)
 Pilot (19 kHz): 6.3 kHz deviation (16%)
 Sub channel (38 kHz): 20 kHz deviation (50%)

Procedure:

| FM stereo signal generator output channel | VTVM connection | VTVM reading |
|---|-----------------|---|
| L-CH | L-CH | (A) |
| R-CH | L-CH | (B) Adjust RT202 resistor for minimum reading. |
| R-CH | R-CH | (C) |
| L-CH | R-CH | (D) Adjust RT202 resistor for minimum reading. |

L-CH Stereo separation: (A) - (B)
 R-CH Stereo separation: (C) - (D)
 The difference between separations (A) → (B) and (C) → (D) are to be equal.

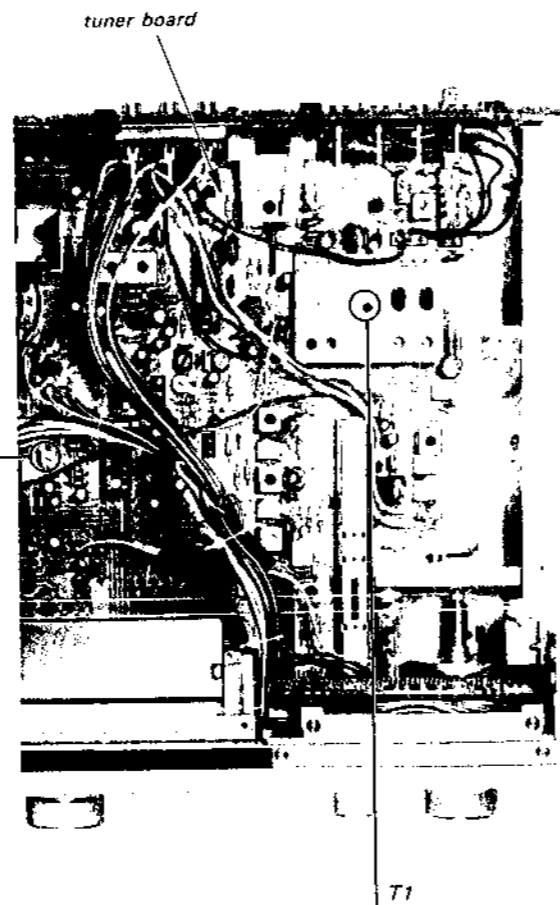


Replacement Semiconductors

For replacement, use semiconductors except in ().

| | | | | |
|--|--|--------------------------|--------------------------|---|
| <p>Q201-205 Q501, 502 Q551, 552 Q602, 652 Q802, 804 Q301: 2SC1345</p> <p>Q401-406 Q601, 651 Q801: 2SA1015</p> <p>Q803: 2SC1173</p> | <p>IC201: CX168</p> | <p>IC202: CX178</p> | <p>IC203: TL489CP</p> | <p>IC701: SI1125HD</p> |
| <p>D201, 202 D401-409 : 1S1555 (1T40) D809, 810</p> | <p>D203-207: GL9NG31 D208: GL9NG21 D209: GL9PR21</p> | <p>D805: V09C (V06C)</p> | <p>D301, 302: 1SV118</p> | <p>D701: EQB01-07 (EQA01-07R) D806: EQB01-05 (EQA01-05R) D807: EQB01-15 (EQA01-15R)</p> |
| <p>D801: S2VB20</p> | | | | |

FM IF ALIGNMENT

FM rf signal generator

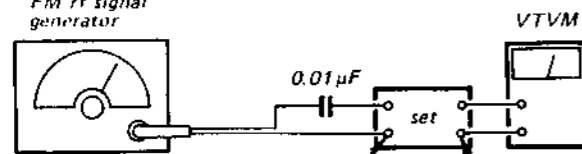

Carrier frequency: 98 MHz
 Output level: 12.5 μV (22 dB)
 Modulation: 400 Hz, 40 kHz deviation (100%)

Setting:

FUNCTION Switch: TUNER
 Band Selector: FM
 MODE Switch: MONO

Procedure:

Adjust T1 for maximum reading on the VTVM.



SECTION 4
DIAGRAMS

4.1. MOUNTING DIAGRAM

- Conductor Side -

Note:

- : parts extracted from the component side.
- : parts extracted from the conductor side.
- : indicates side identified with part number.
- : B+ pattern
- : B- pattern
- : signal path
- : L-CH signal path
- : R-CH signal path
- : Voltages are dc with respect to ground unless otherwise noted.
- : Readings are taken under no-signal (detuned) conditions with a VOM (20kΩ/V).
- : no mark and () : FM, (<) : AM
- : Voltage variations may be noted due to normal production tolerances.
- : Color code of sleeving over the end of the jacket.

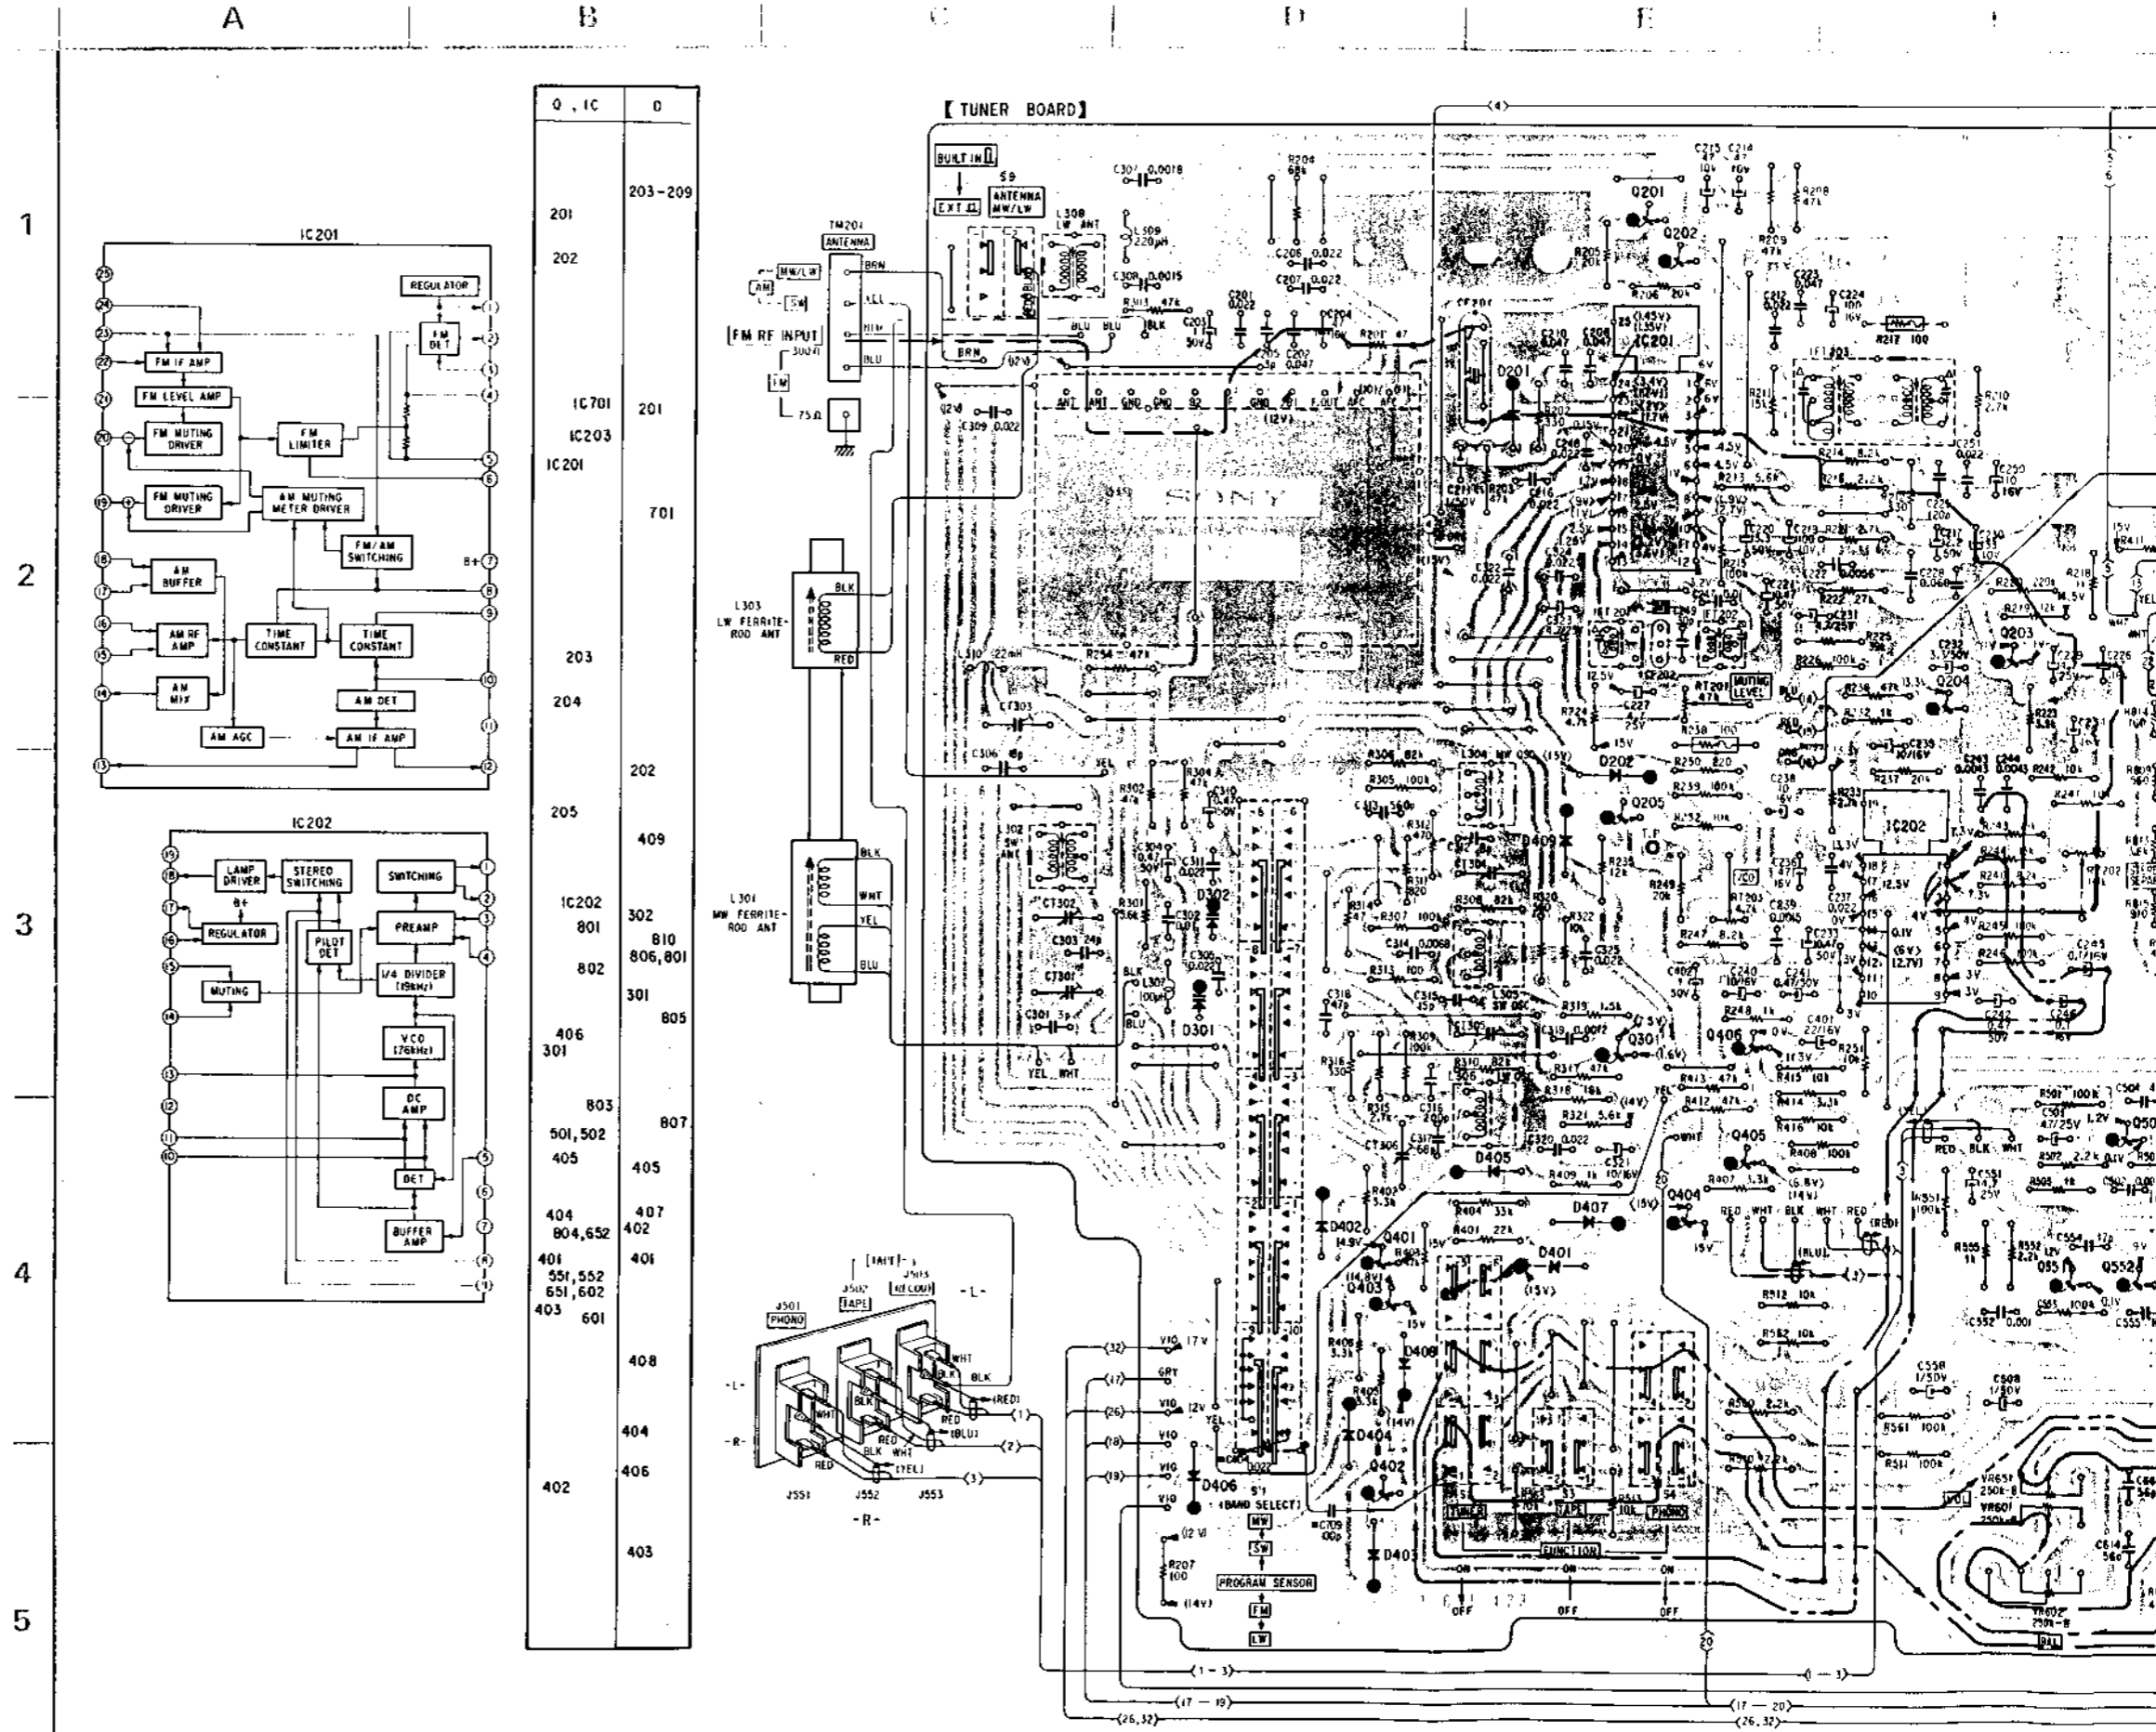

STR-333L STR-333L

G

H









I

J


K

L

M

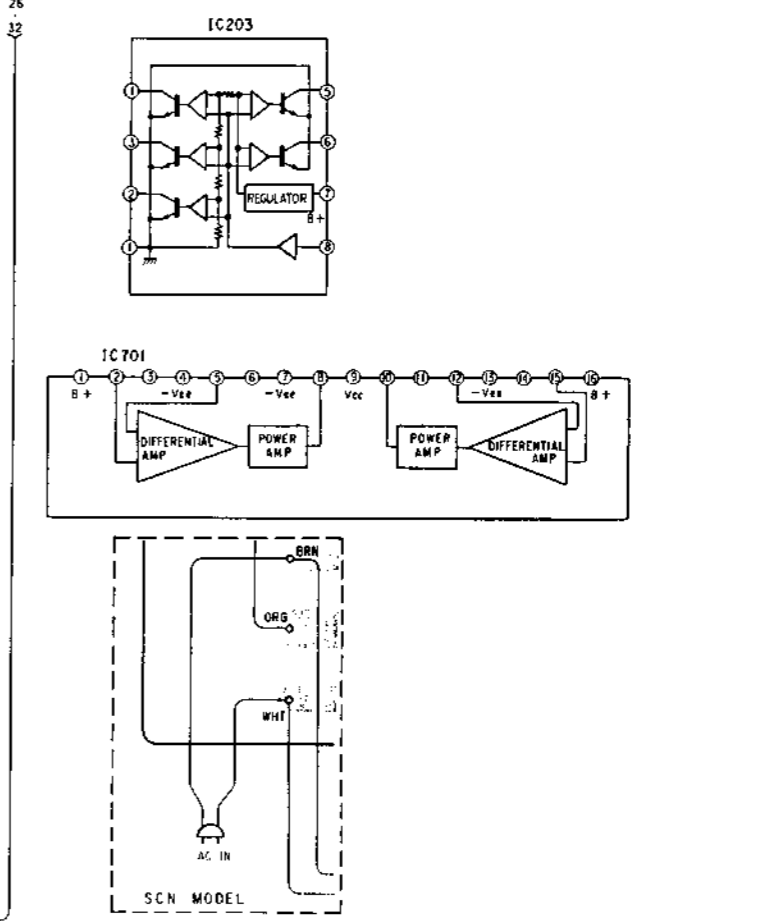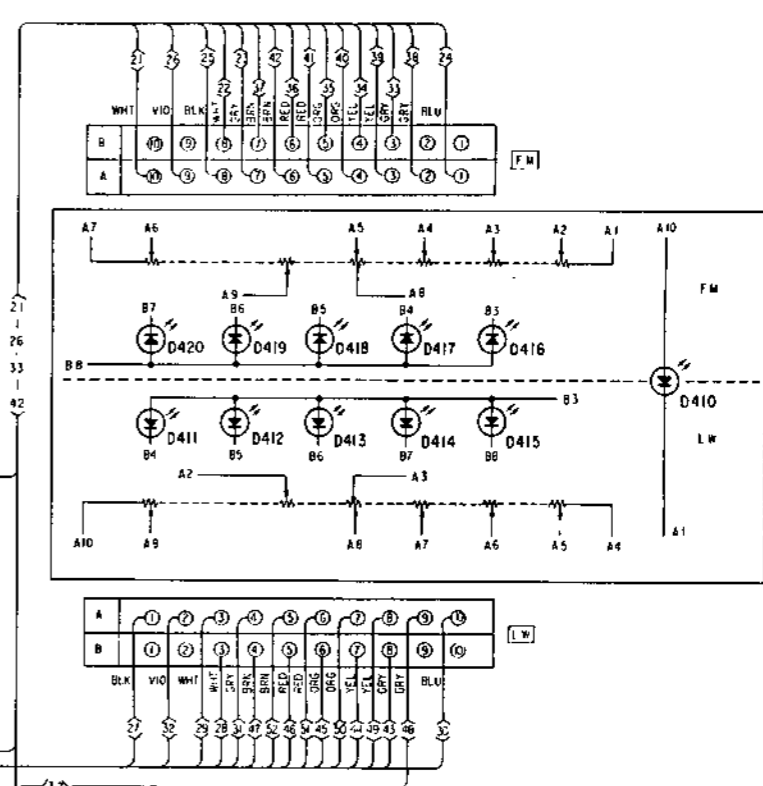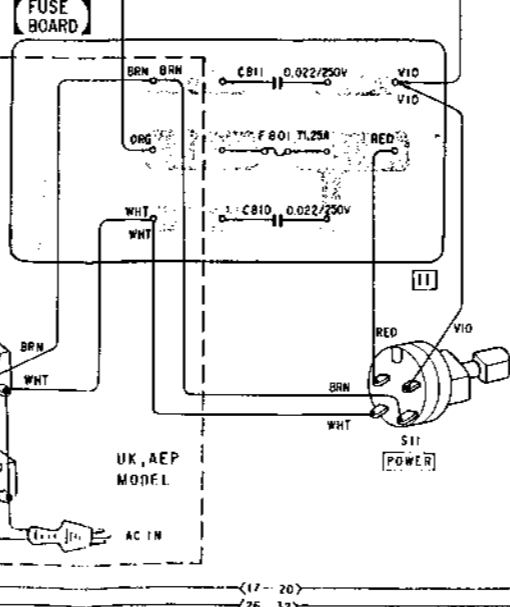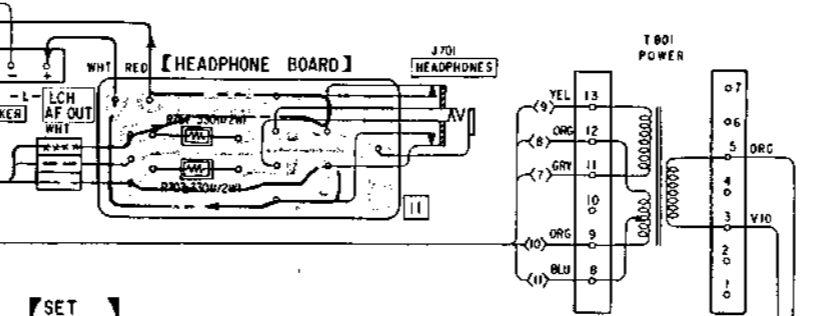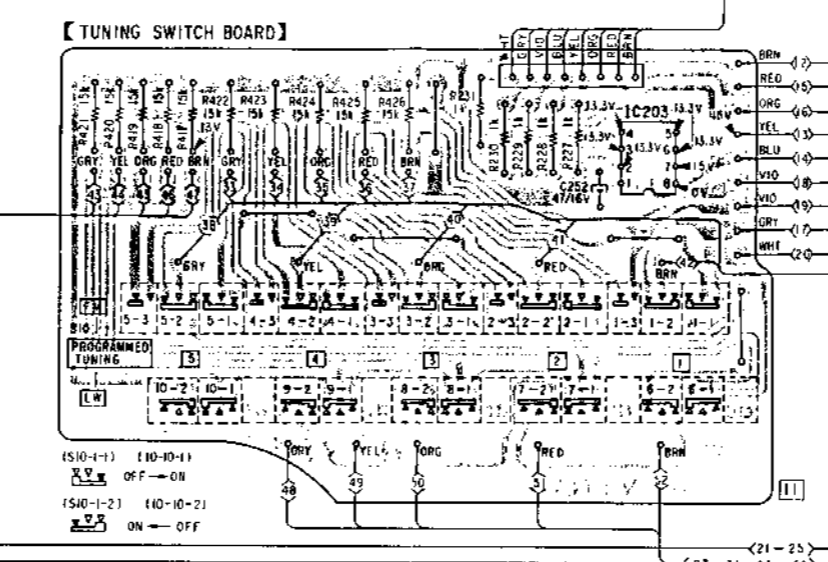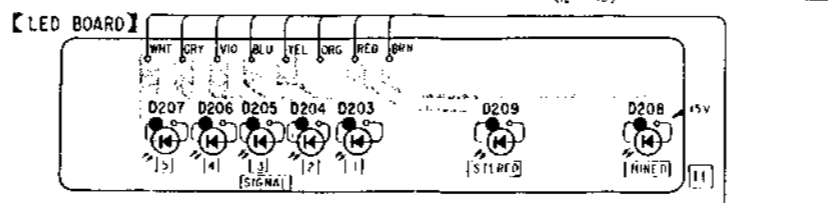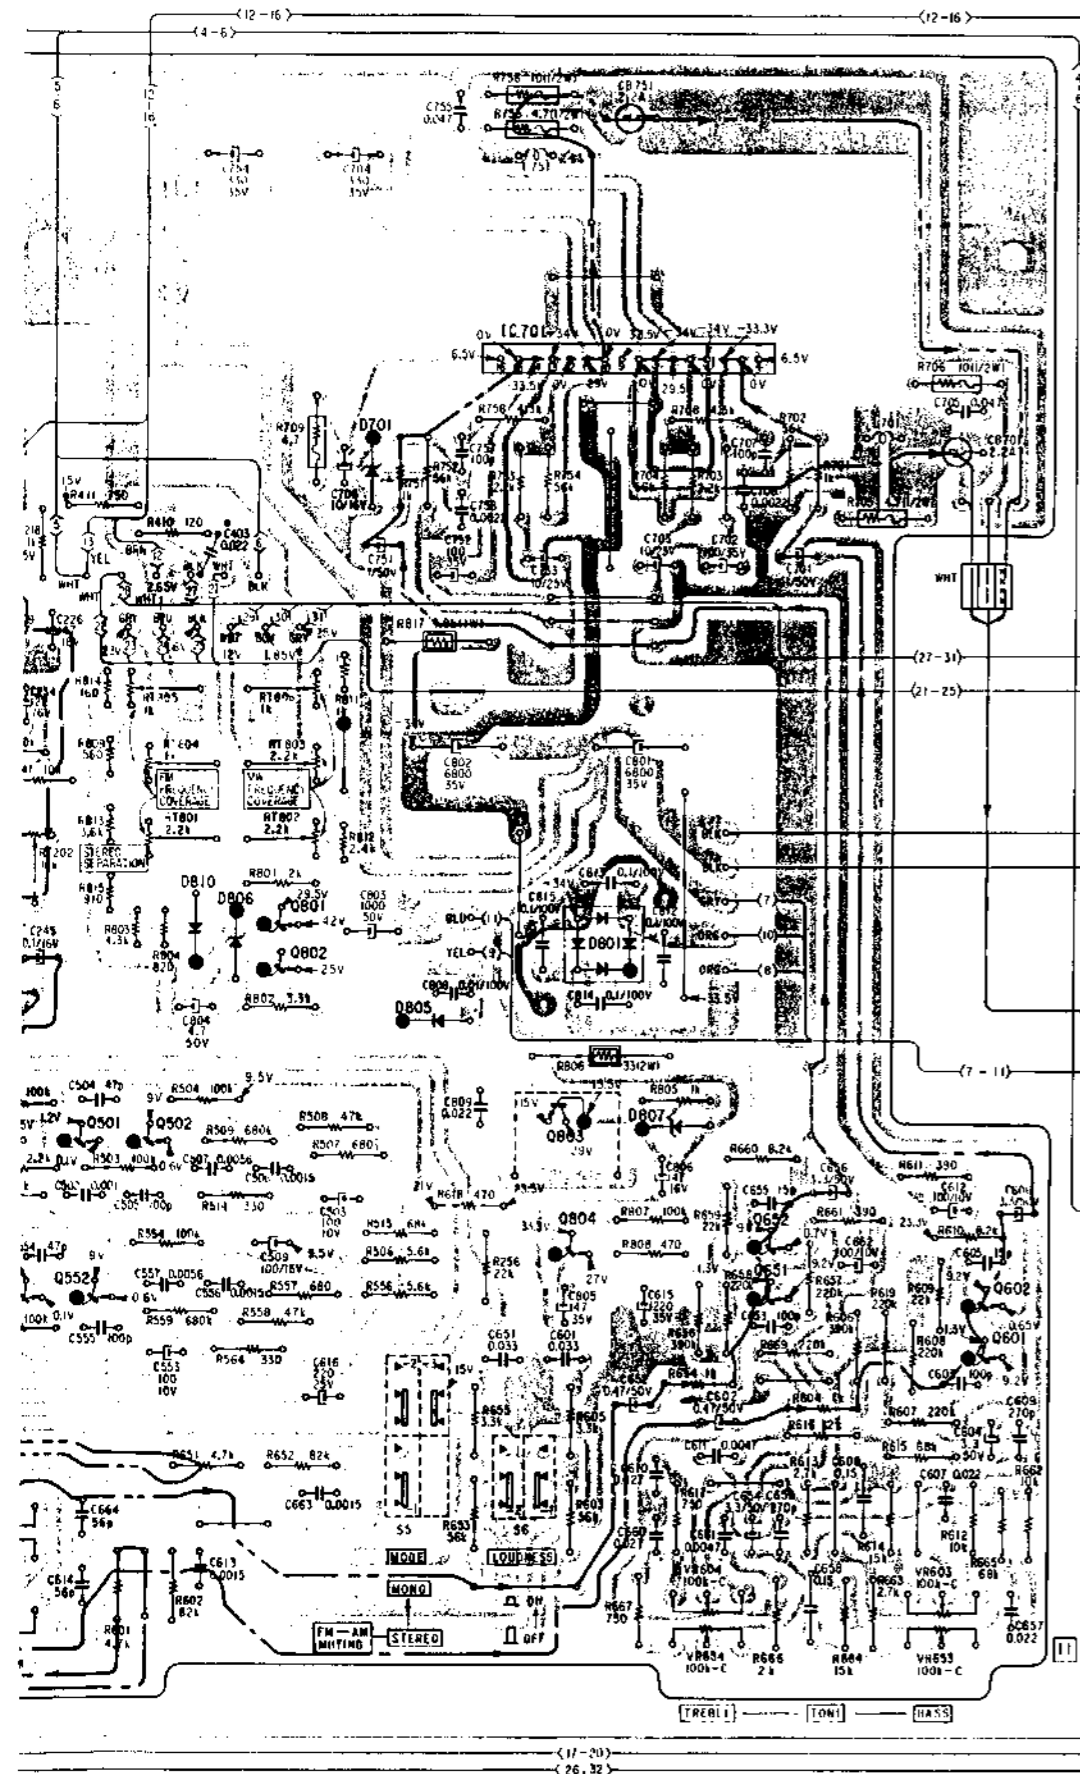


4-2. SCHEMATIC DIAGRAM

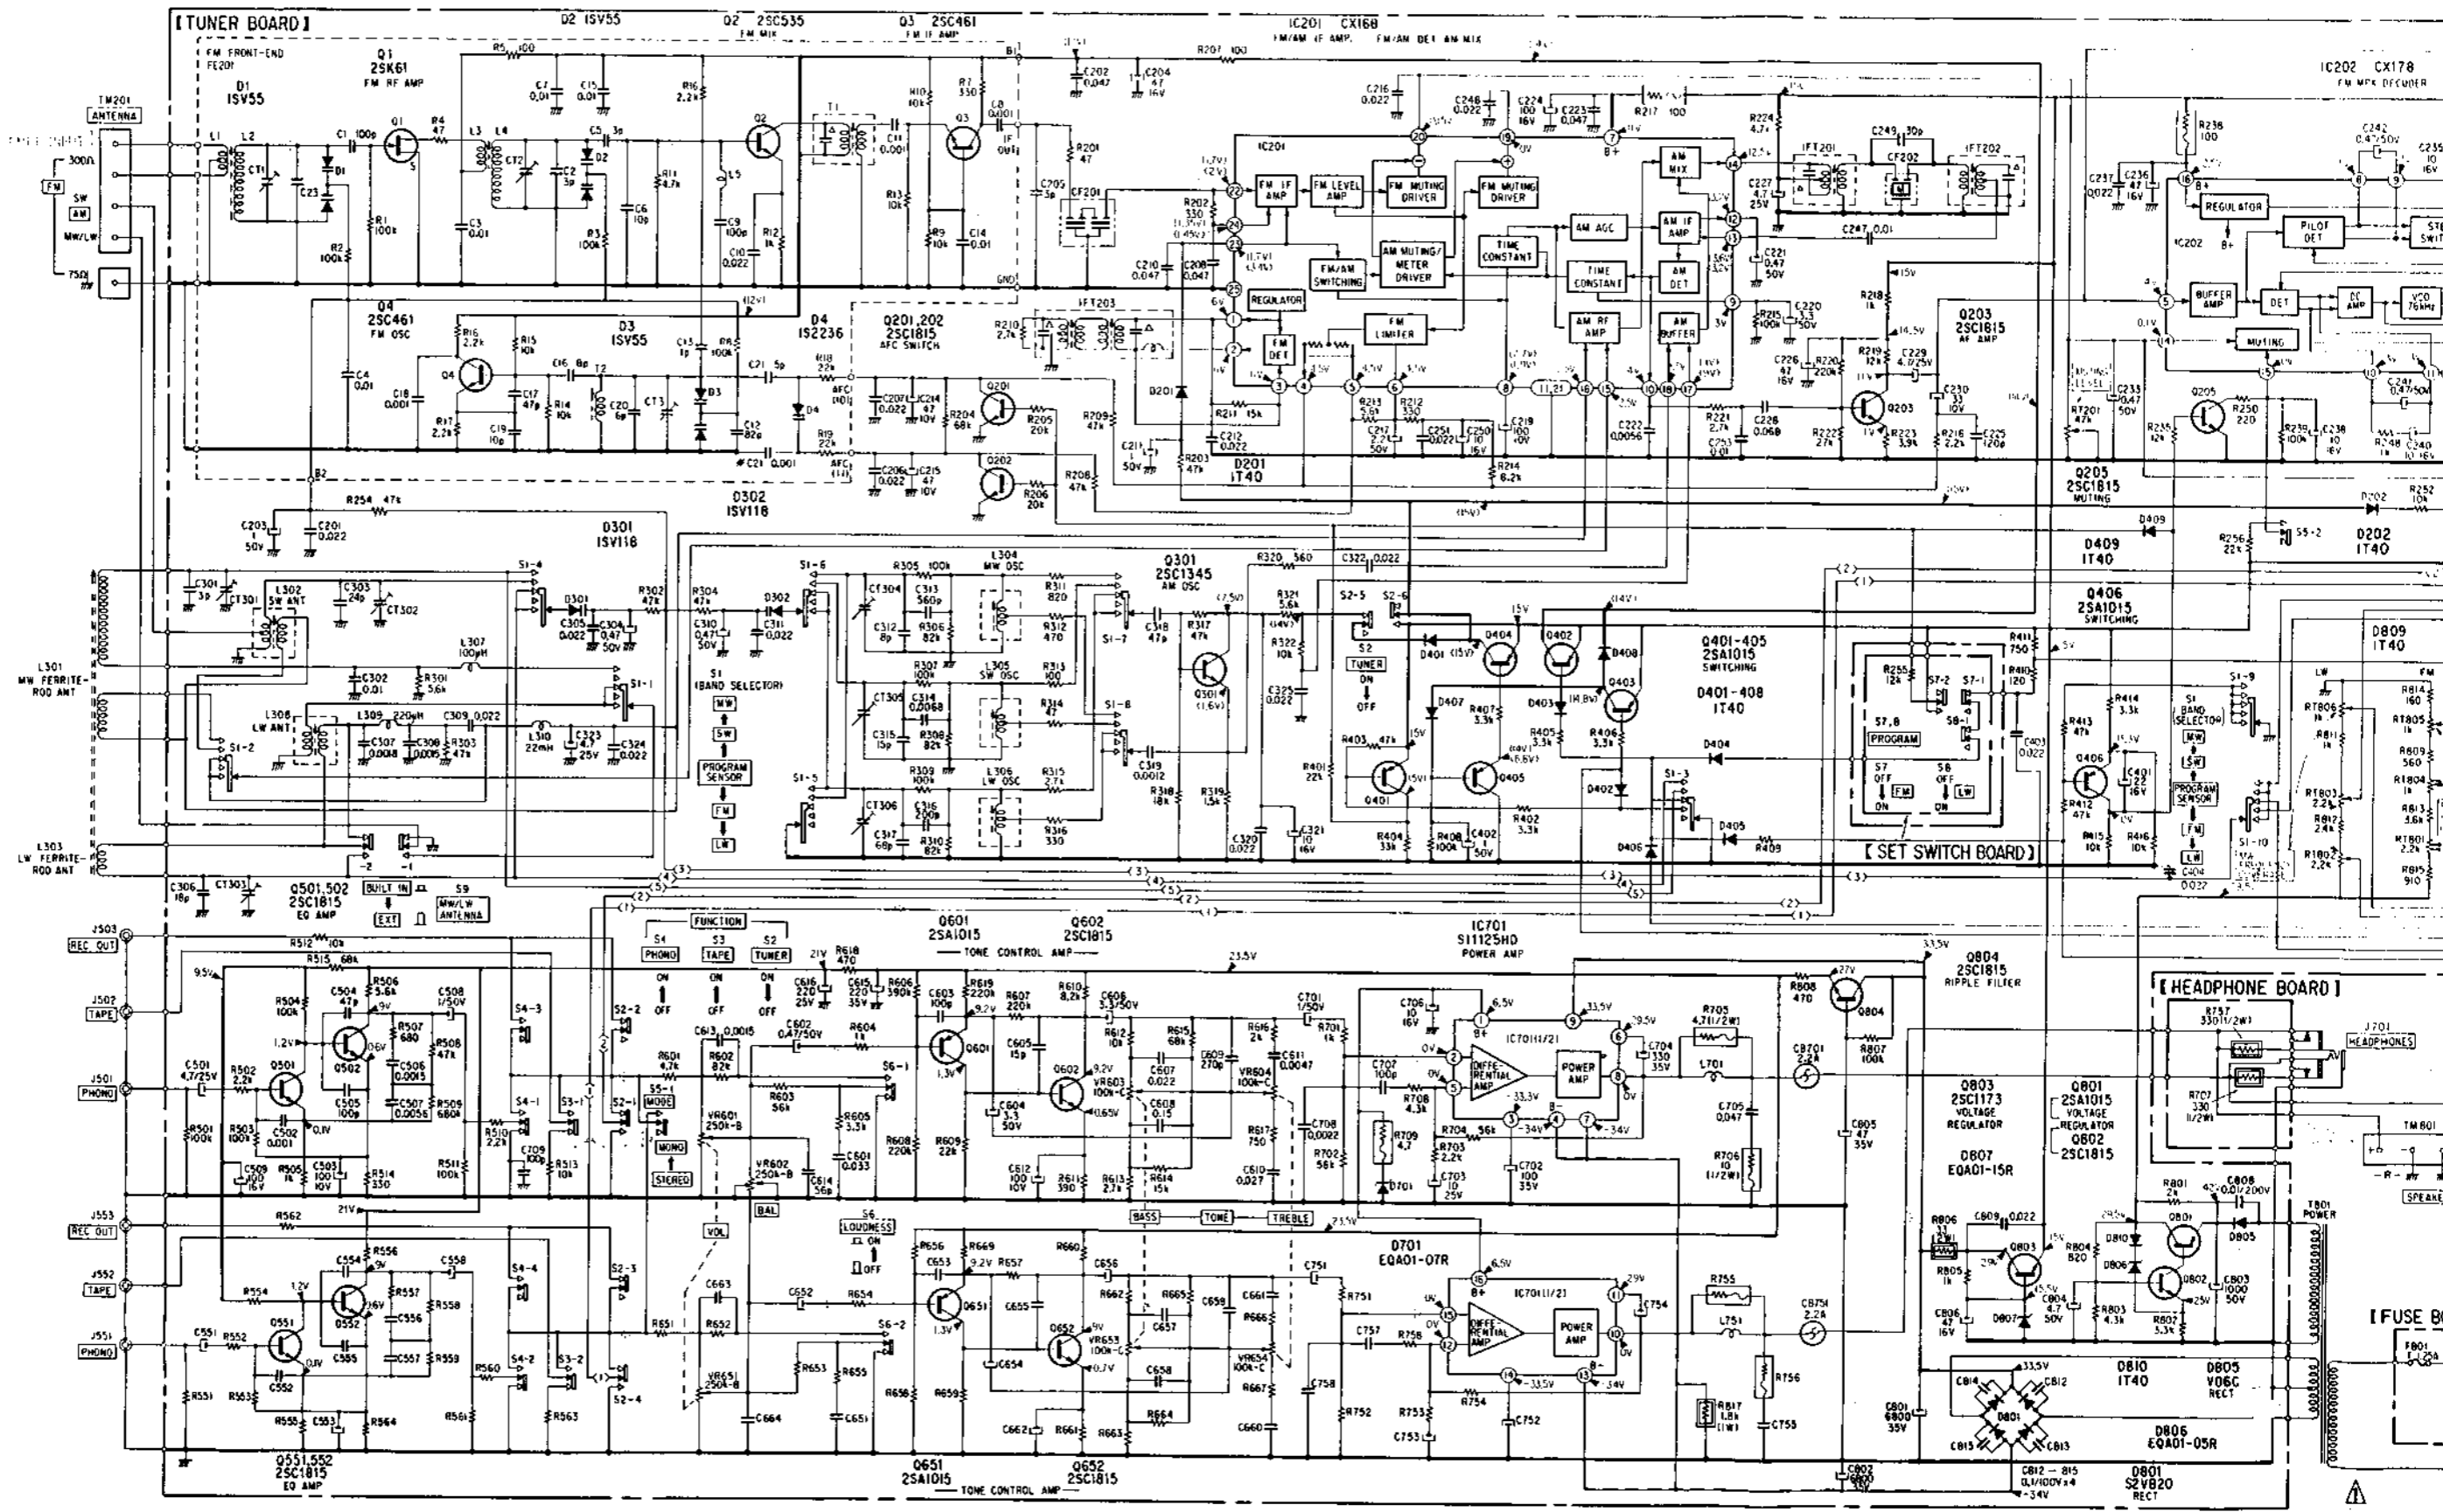

Note: The components identified by shading and mark \triangle are critical for safety. Replace only with part number specified.

Note:
 • All capacitors are in μF unless otherwise indicated. 50WV or less are not indicated and tantalum.
 • All resistors are in ohms, $\frac{1}{4}$ W unless otherwise indicated. k Ω : 1000 Ω ; M Ω : 1000 k Ω

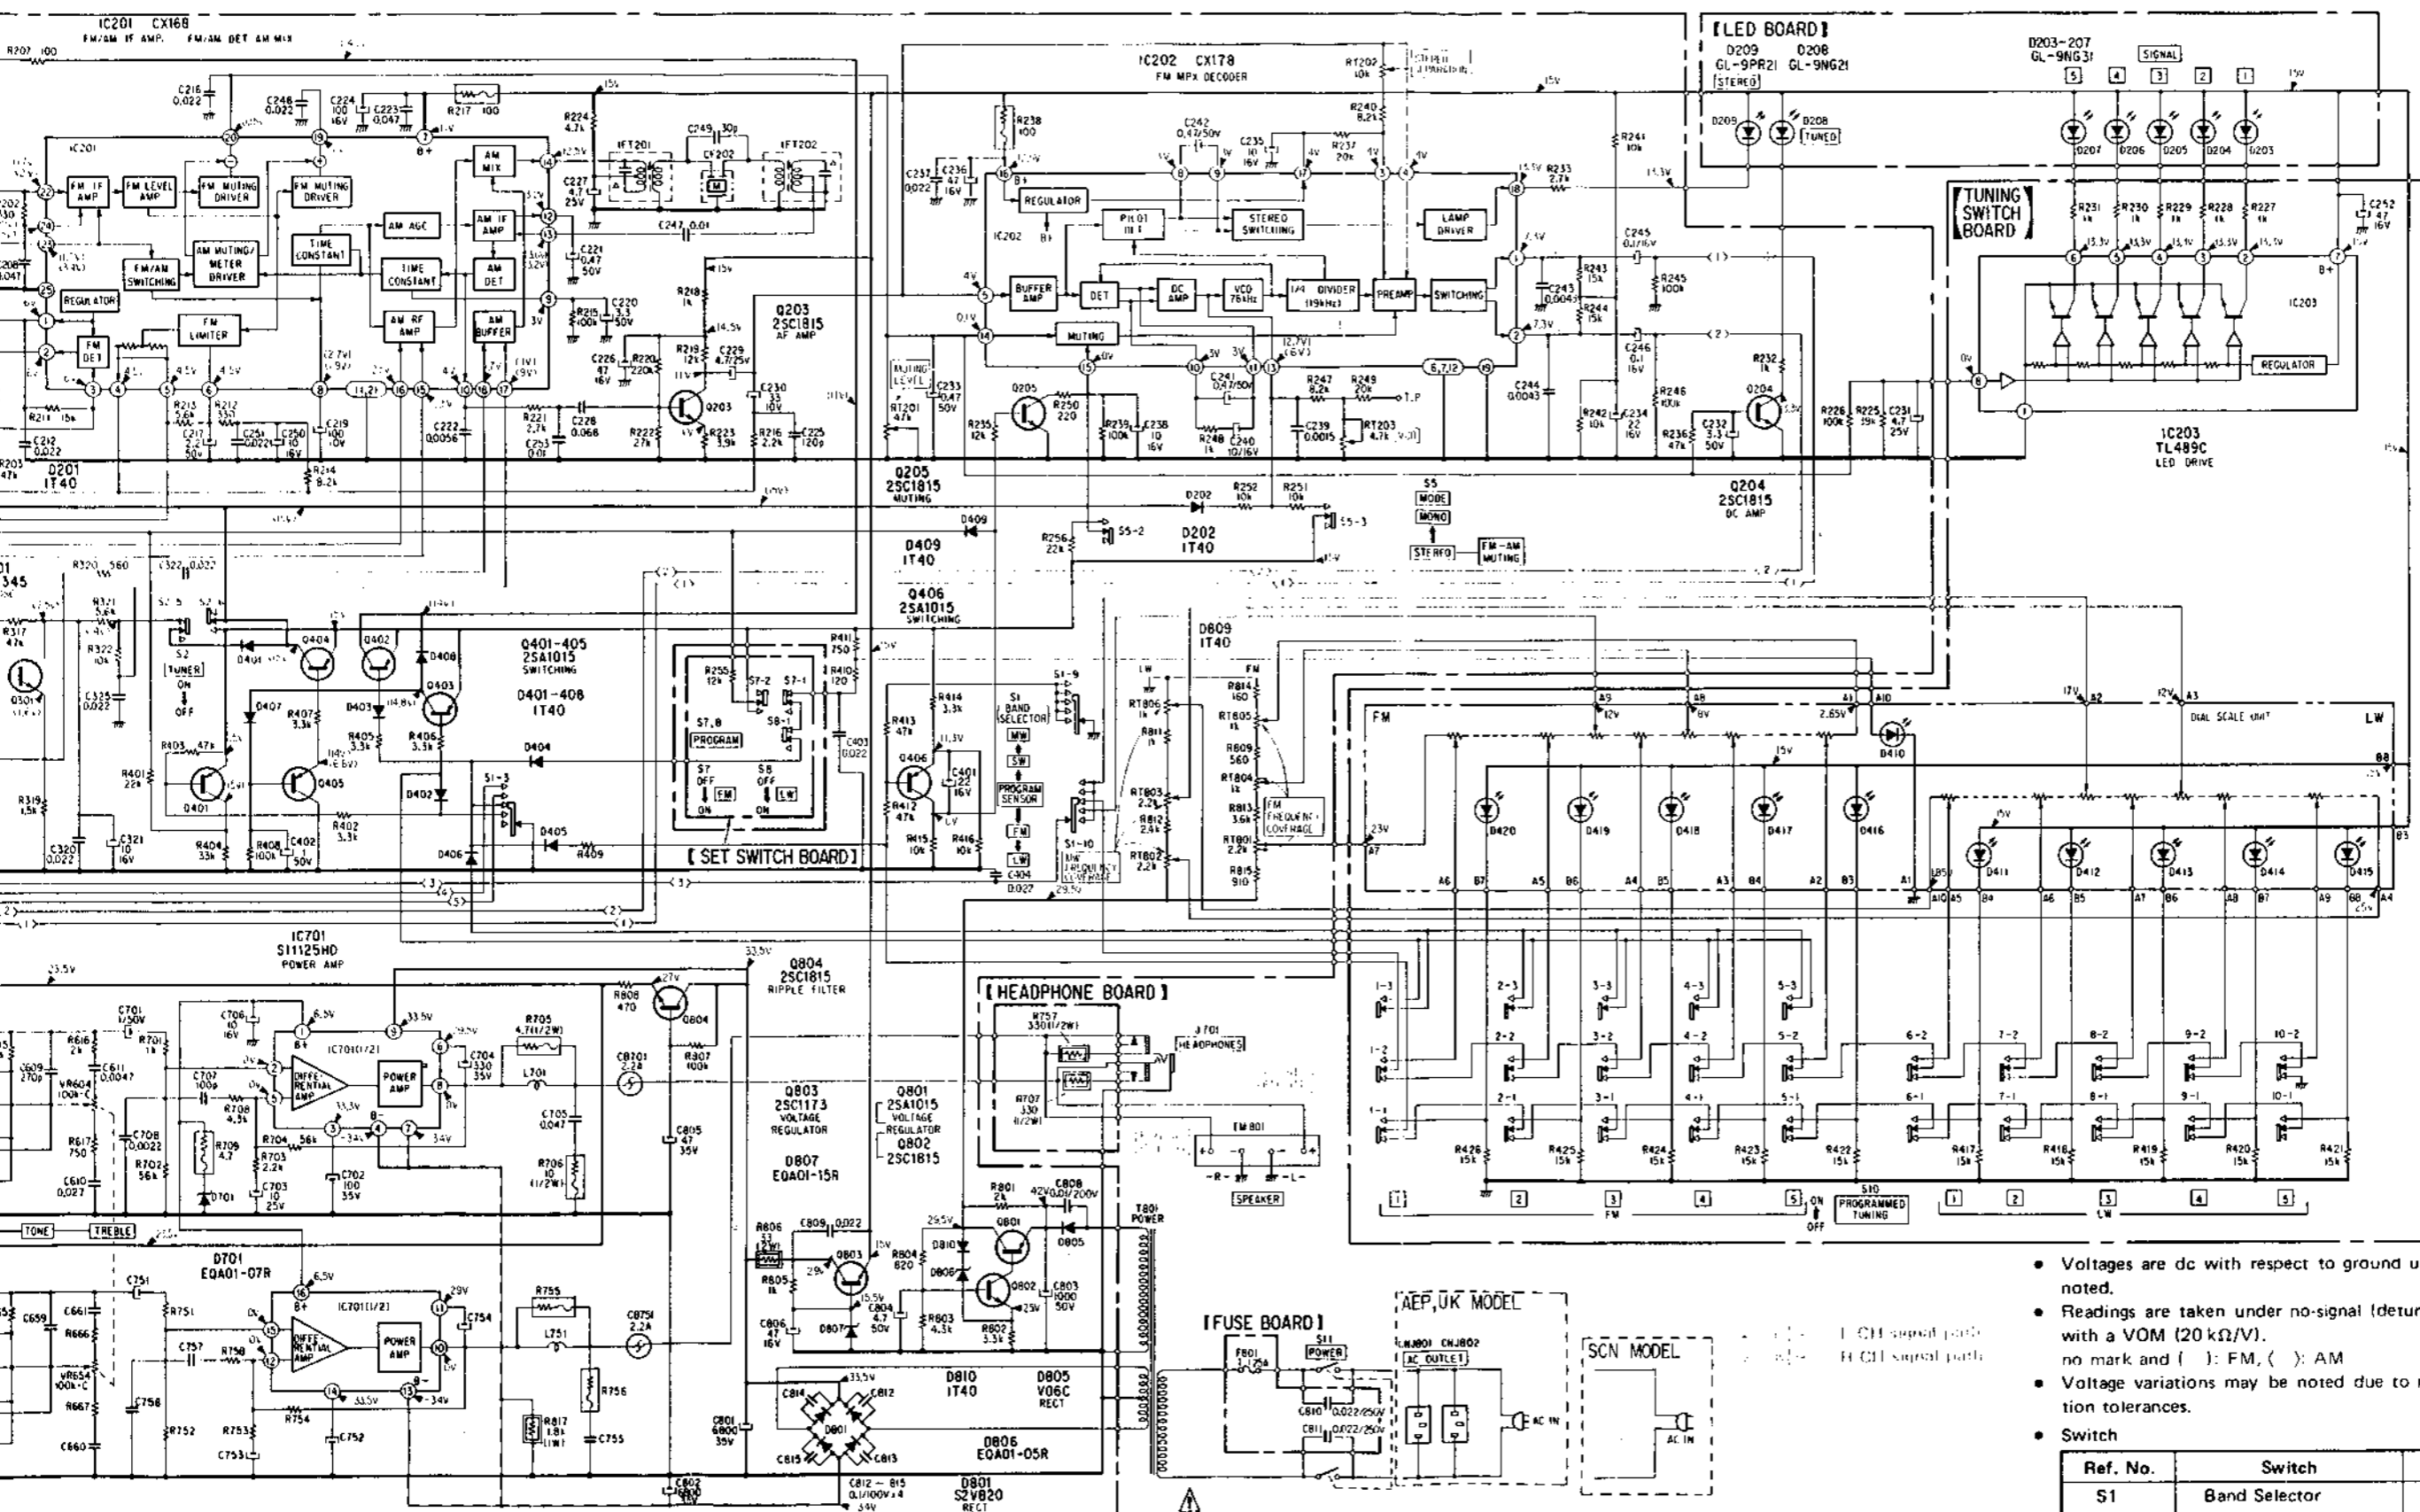

Note: The components identified by shading and mark Δ are critical for safety. Replace only with part number specified.

Note:
 • All capacitors are in μF unless otherwise noted. pF : μpF 50VV or less are not indicated except for electrolytics and tantalum.
 • All resistors are in ohms, $\frac{1}{4}\text{W}$ unless otherwise noted. $\text{k}\Omega$: 1000 Ω ; $\text{M}\Omega$: 1000 $\text{k}\Omega$

- --- : fusible resistor.
- Δ : internal component.
- \square : panel designation.
- \square : adjustment for repair.
- --- : B+ bus.
- --- : B- bus.

- Voltages are dc with respect to ground unless otherwise noted.
- Readings are taken under no-signal (detuned) conditions with a VOM (20 $\text{k}\Omega/\text{V}$). no mark and (): FM, (<): AM
- Voltage variations may be noted due to normal production tolerances.
- Switch

| Ref. No. | Switch | Position |
|----------|-------------------|-------------------|
| S1 | Band Selector | PROGRAM SENSOR |
| S2-4 | FUNCTION | TUNER |
| S5 | MODE | STEREO |
| S6 | LOUDNESS | OFF |
| S7 | PROGRAM FM | OFF |
| S8 | PROGRAM LW | OFF |
| S9 | MW/LW ANTENNA | BUILT-IN |
| S10 | PROGRAMMED TUNING | OFF |
| S11 | POWER | OFF |

SECTION 5
EXPLODED VIEWS


5-1.

A B C D E

Note:

- Items marked "▲" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- All screws are Phillips (cross recess) type unless otherwise noted (-) = slotted head
- Circled letters (A to Z) are applicable to European models only.

Note: The components identified by shading and mark ▲ are critical for safety. Replace only with part number specified.

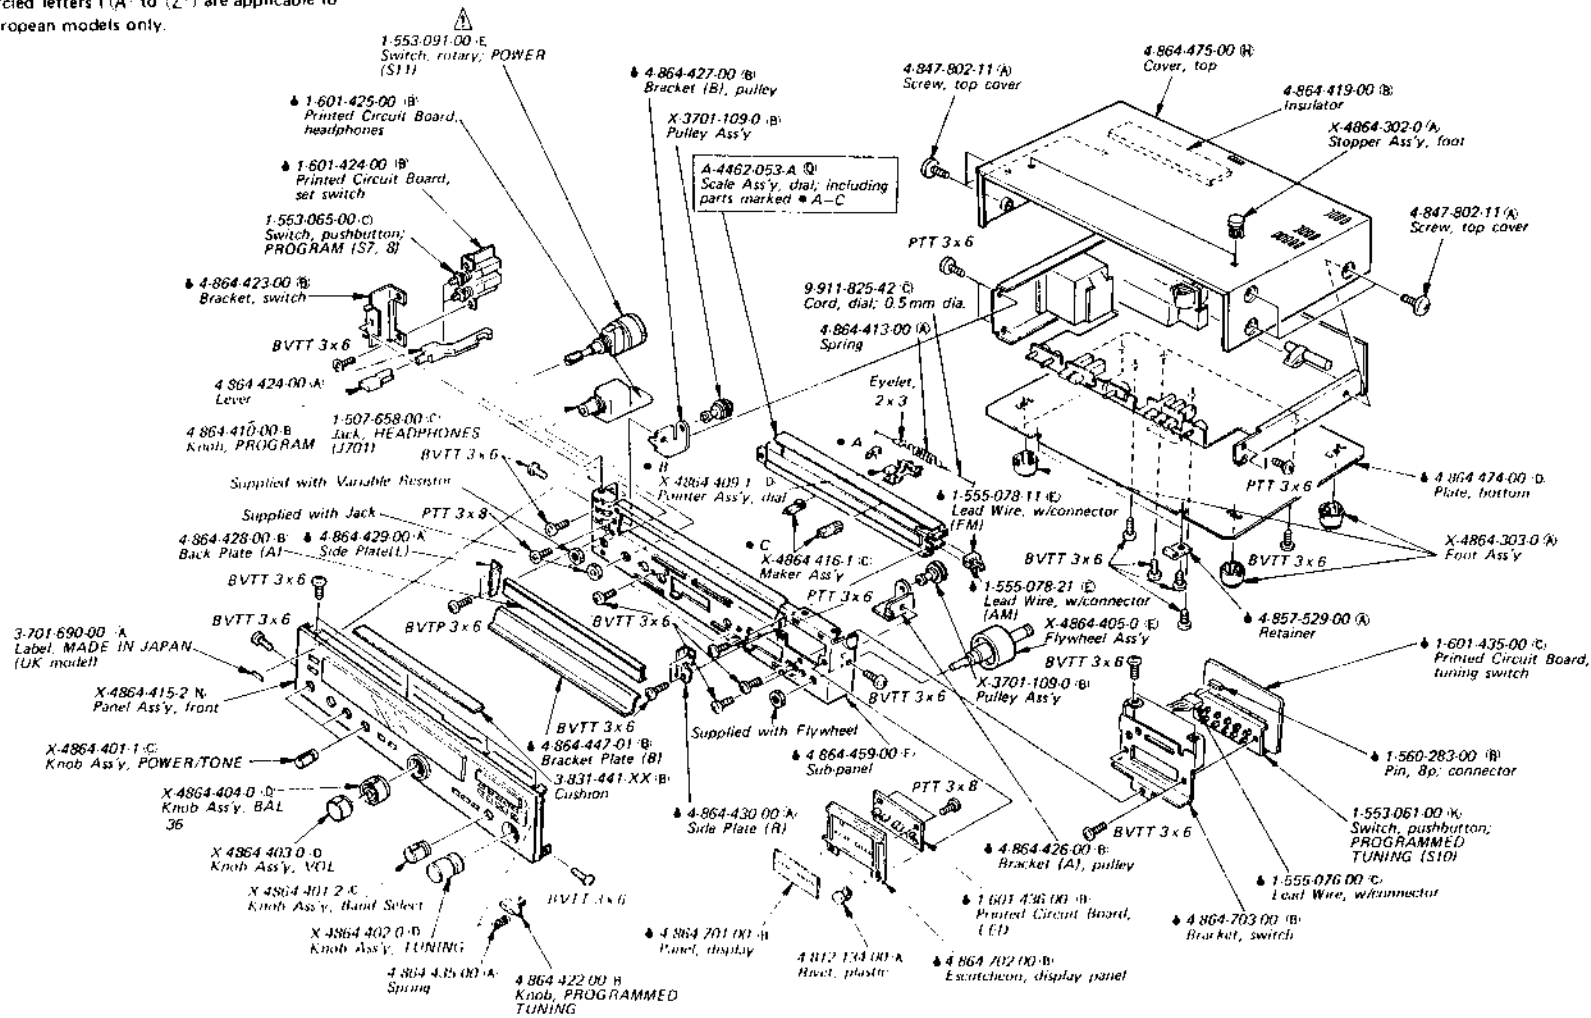

1

2

3

4

A

B

C

D

E

Note:

- Items marked "Δ" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- All screws are Phillips (cross recess) type unless otherwise noted. (-) = slotted head
- Circled letters (A to Z) are applicable to European models only.


5-2.

1

2

3

4

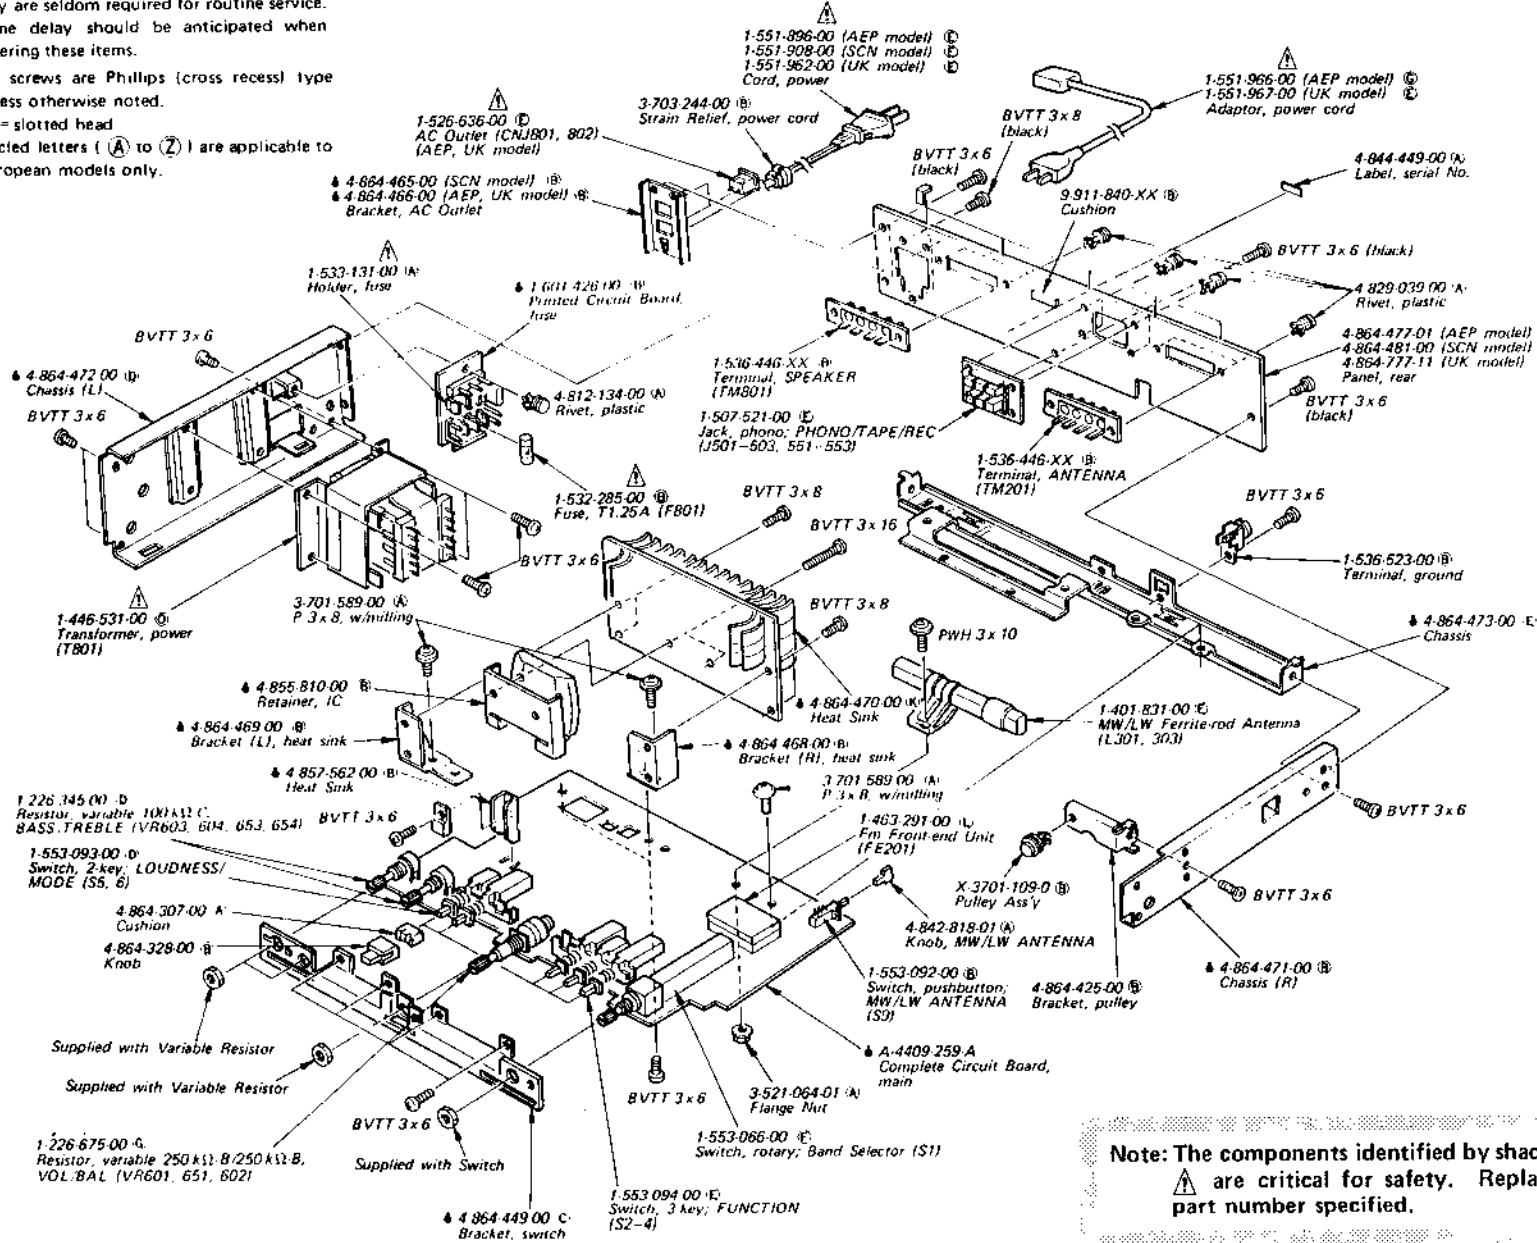

Note: The components identified by shading and mark Δ are critical for safety. Replace only with part number specified.

STR-333L

35

SECTION 6

ELECTRICAL PARTS LIST

Note: Circled letters (A to Z) are applicable to European models only.

Ref. No. Part No. Description

PRINTED CIRCUIT BOARDS

- ♣ 1-601-424-00 (B) Set Switch
- ♣ 1-601-425-00 (B) Headphone
- ♣ 1-601-426-00 (B) Fuse
- ♣ 1-601-435-00 (C) Tuning Switch
- ♣ 1-601-436-00 (B) LED

SEMICONDUCTORS

Transistors

- ⇒ Q201-205 8-729-663-47 (C) 2SC1364
- Q301 8-729-334-58 (B) 2SC1345
- Q401-406 8-729-201-52 (B) 2SA1015
- ⇒ Q501,551 } 8-729-663-47 (C) 2SC1364
- ⇒ Q502,552 }
- Q601,651 8-729-201-52 (B) 2SA1015
- ⇒ Q602,652 8-729-663-47 (C) 2SC1364
- Q801 8-729-201-52 (B) 2SA1015
- ⇒ Q802 8-729-663-47 (C) 2SC1364
- Q803 8-729-217-33 (C) 2SC1173
- ⇒ Q804 8-729-663-47 (C) 2SC1364

ICs

- IC201 8-751-680-01 (I) CX168
- IC202 8-751-780-00 (G) CX178
- IC203 8-759-904-89 (D) TL489CP
- IC701 8-759-301-25 (L) SI1125HD *Endst.*

Diodes

- D201,202 8-719-815-55 (B) 1S1555
- D203-207 8-719-909-31 (B) GL9NG31
- D208 8-719-909-22 (B) GL9NG21
- D209 8-719-909-21 (B) GL9PR21
- D301,302 8-719-100-81 (D) ISV118

⇒ : Due to standardization, interchangeable replacements may be substituted for parts specified in the diagrams.

Note: The components identified by shading and mark **⚠** are critical for safety. Replace only with part number specified.

Ref. No. Part No. Description

- D401-409 8-719-815-55 (B) 1S1555
- ⇒ D701 8-719-931-07 (B) EQB01-07
- D801 ⚠ 8-179-502-20 (C) S2VB20
- ⇒ D805 ⚠ 8-719-900-93 (B) V09C
- ⇒ D806 8-719-931-05 (B) EQB01-05
- ⇒ D807 8-719-931-15 (B) EQB01-15
- D809,810 8-719-815-55 (B) 1S1555

COILS

- L301, 303 1-401-831-00 (E) MW/LW Ferrite-rod Ant
- L302 1-401-822-00 (B) SW Ant
- L304 1-405-881-00 (B) MW Osc
- L305 1-405-885-00 (B) SW Osc
- L306 1-405-882-00 (B) LW Osc
- L307 1-407-169-XX (A) 100μH, microinductor
- L308 1-401-819-00 (B) LW Ant
- L309 1-407-709-00 (A) 220μH, microinductor
- L310 1-407-210-XX (A) 22 mH, microinductor

TRANSFORMERS

- IFT201 1-409-323-00 (B) AM IFT
- IFT202 1-409-324-00 (B) AM IFT
- IFT203 1-404-167-00 (D) FM Discriminator
- T801 ⚠ 1-446-531-00 (Q) Power

CAPACITORS

All capacitors are in μF. Common capacitors are omitted. Refer to the list on page 39 and 40 for their part numbers. p: μF, elect: electrolytic

- C245,246 1-131-451-00 (B) 0.1 16V tantalum
- C252 1-123-319-00 (B) 47 16V elect

Items marked "♣" are not stocked because they are seldom required for routine service. Some delay should be anticipated when ordering these items.

Note: Circled letters (A to Z) are applicable to European models only.

| Ref. No. | Part No. | Description |
|-----------|------------------|---------------------|
| C304,310 | 1-121-911-00 | (B) 0.47 50V elect |
| C312 | 1-102-288-00 | (B) 12p |
| C315 | 1-102-300-00 | (B) 18p |
| C317 | 1-102-622-00 | (A) 75p |
| C801,802 | (A) 1-125-155-00 | (E) 6800 35V elect |
| C803 | (A) 1-123-061-00 | (C) 1000 50V elect |
| C808 | (A) 1-108-421-00 | (B) 0.01 200V mylar |
| C810,811 | (A) 1-130-456-00 | (C) 0.022 250V film |
| C812-815 | (A) 1-108-389-00 | (B) 0.1 100V mylar |
| CT301-305 | 1-141-171-XX | (B) Trimmer |
| CT306 | 1-141-181-11 | (B) Trimmer |

RESISTORS

All resistors are in ohms. Common 1/4W carbon resistors are omitted. Refer to the list on page 38 for their part numbers.

| | | |
|----------------------|--------------|---|
| R217,238 | 1-217-399-00 | (B) 100 1/4W fusible |
| R705,755 | 1-212-950-00 | (B) 4.7 1/2W fusible |
| R706,756 | 1-212-958-00 | (B) 10 1/2W fusible |
| R707,757 | 1-247-228-00 | (A) 330 1/2W carbon (nonflammable) |
| R709 | 1-212-849-00 | (B) 4.7 1/4W fusible |
| R806 | 1-206-475-00 | (A) 33 2W metal oxide (nonflammable) |
| R817 | 1-213-146-00 | (A) 1.8k 1W metal oxide (nonflammable) |
| ⇒ RT201 | 1-226-238-00 | (A) 50 k-B, adjustable; muting level |
| RT202 | 1-226-236-00 | (A) 10 k-B, adjustable; FM stereo separation |
| ⇒ RT203 | 1-226-235-00 | (A) 5 k-B, adjustable; VCO |
| RT801-803 | 1-226-664-00 | (B) 2.2 k-B, adjustable; FM frequency coverage, MW frequency coverage |
| RT804-806 | 1-226-663-00 | (B) 1 k-B, adjustable; FM frequency coverage, MW frequency coverage |
| VR601,651, VR602 | 1-226-675-00 | (C) 250 k-B/250 k-B, variable; VOL, BAL |
| VR603,653, VR604,654 | 1-226-345-00 | (D) 100 k-C, variable; BASS, TREBLE |

⇒: Due to standardization, interchangeable replacements may be substituted for parts specified in the diagrams.

Note: The components identified by shading and mark **A** are critical for safety. Replace only with part number specified.

| Ref. No. | Part No. | Description |
|----------------------|------------------|--|
| SWITCHES | | |
| S1 | 1-553-066-00 | (F) Rotary, Band Selector |
| S2-4 | 1-553-094-00 | (E) 3-key, FUNCTION |
| S5,6 | 1-553-093-00 | (D) 2-key, LOUDNESS, MODE |
| S7,8 | 1-553-065-00 | (C) Pushbutton, PROGRAM |
| S9 | 1-553-092-00 | (B) Pushbutton, MW/LW ANTENNA |
| S10 | 1-553-061-00 | (K) Pushbutton, PROGRAMMED TUNING |
| S11 | (A) 1-553-091-00 | (E) Rotary, POWER |
| MISCELLANEOUS | | |
| CB701,751 | 1-532-564-00 | (C) Circuit Breaker |
| CF201 | 1-527-534-00 | (D) Filter, solid state |
| CF202 | 1-527-403-00 | (C) Filter, mechanical |
| CNJ801, CNJ802 | (A) 1-526-636-00 | (E) AC Outlet (AEP, UK model) |
| F801 | (A) 1-532-285-00 | (B) Fuse, T1.25A |
| FE201 | 1-463-291-00 | (L) FM Front-end Unit |
| J501-503, J551-553 | 1-507-521-00 | (E) Jack, phono; 6-p, PHONO, TAPE, REC OUT |
| J701 | 1-507-658-00 | (C) Jack, HEADPHONES |
| TM201,801 | 1-536-446-XX | (B) Terminal, 4-p; ANTENNA, SPEAKER |
| (A) | 1-533-131-00 | (A) Holder, fuse |
| | 1-536-523-00 | (B) Terminal, ground |
| (A) | 1-551-896-00 | (E) Cord, power (AEP model) |
| (A) | 1-551-908-00 | (E) Cord, power (SCN model) |
| (A) | 1-551-962-00 | (E) Cord, power (UK model) |
| (A) | 1-551-966-00 | (G) Adaptor, power cord (AEP model) |
| (A) | 1-551-967-00 | (E) Adaptor, power cord (UK model) |
| ♣ | A-4409-259-A | Complete Circuit Board, tuner |
| ♣ | 1-420-872-00 | (B) Coil |
| ♣ | 1-535-115-00 | (A) Terminal, 2p |
| ♣ | 1-535-116-00 | (A) Terminal, 3p |
| ♣ | 1-535-118-00 | (A) Terminal, 5p |
| ♣ | 1-535-119-00 | (A) Terminal, 6p |
| ♣ | 1-535-139-00 | (A) Base |
| ♣ | 1-535-140-00 | (A) Base |

Items marked "♣" are not stocked because they are seldom required for routine service. Some delay should be anticipated when ordering these items.

STR-333L

Note: Circled letters (A to Z) are applicable to European models only.

| Ref. No. | Part No. | Description |
|----------------|----------|-----------------------------|
| ♣ 1-555-076-00 | Ⓒ | Lead Wire, w/connector |
| ♣ 1-555-078-11 | Ⓔ | Lead Wire, w/connector (FM) |
| ♣ 1-555-078-21 | Ⓔ | Lead Wire, w/connector (AM) |
| ♣ 1-560-283-00 | Ⓑ | Pin 8-p, connector |

Items marked "♣" are not stocked because they are seldom required for routine service. Some delay should be anticipated when ordering these items.

ACCESSORIES AND PACKING MATERIALS

| Part No. | Description |
|--------------|-----------------------|
| 1-501-184-00 | Ⓒ Antenna, ribbon |
| 1-501-193-00 | Ⓑ Antenna |
| 3-701-630-00 | Ⓐ Bag, plastic |
| 3-770-983-11 | Ⓒ Manual, instruction |
| 3-794-576-11 | Ⓑ Card, manual |
| 4-864-402-00 | Ⓑ Cushion, bottom |
| 4-864-403-00 | Ⓑ Cushion (L), upper |
| 4-864-404-00 | Ⓑ Cushion (R), upper |
| 4-864-484-00 | Ⓔ Carton |
| 4-891-037-00 | Ⓑ Bag, plastic |

1/4 WATT CARBON RESISTORS Ⓐ

Note: Circled letter A is applicable to European models only.

| Ω | Part No. | Ω | Part No. | Ω | Part No. | Ω | Part No. | Ω | Part No. | Ω | Part No. | | |
|-----|--------------|----|--------------|-----|--------------|------|--------------|-----|--------------|------|--------------|------|--------------|
| 1.0 | 1-246-401-00 | 10 | 1-246-425-00 | 100 | 1-246-449-00 | 1.0k | 1-246-473-00 | 10k | 1-246-497-00 | 100k | 1-246-521-00 | 1.0M | 1-246-545-00 |
| 1.1 | 1-246-402-00 | 11 | 1-246-426-00 | 110 | 1-246-450-00 | 1.1k | 1-246-474-00 | 11k | 1-246-498-00 | 110k | 1-246-522-00 | 1.1M | 1-210-814-00 |
| 1.2 | 1-246-403-00 | 12 | 1-246-427-00 | 120 | 1-246-451-00 | 1.2k | 1-246-475-00 | 12k | 1-246-499-00 | 120k | 1-246-523-00 | 1.2M | 1-210-815-00 |
| 1.3 | 1-246-404-00 | 13 | 1-246-428-00 | 130 | 1-246-452-00 | 1.3k | 1-246-476-00 | 13k | 1-246-500-00 | 130k | 1-246-524-00 | 1.3M | 1-210-816-00 |
| 1.5 | 1-246-405-00 | 15 | 1-246-429-00 | 150 | 1-246-453-00 | 1.5k | 1-246-477-00 | 15k | 1-246-501-00 | 150k | 1-246-525-00 | 1.5M | 1-210-817-00 |
| 1.6 | 1-246-406-00 | 16 | 1-246-430-00 | 160 | 1-246-454-00 | 1.6k | 1-246-478-00 | 16k | 1-246-502-00 | 160k | 1-246-526-00 | 1.6M | 1-210-818-00 |
| 1.8 | 1-246-407-00 | 18 | 1-246-431-00 | 180 | 1-246-455-00 | 1.8k | 1-246-479-00 | 18k | 1-246-503-00 | 180k | 1-246-527-00 | 1.8M | 1-210-819-00 |
| 2.0 | 1-246-408-00 | 20 | 1-246-432-00 | 200 | 1-246-456-00 | 2.0k | 1-246-480-00 | 20k | 1-246-504-00 | 200k | 1-246-528-00 | 2.0M | 1-210-820-00 |
| 2.2 | 1-246-409-00 | 22 | 1-246-433-00 | 220 | 1-246-457-00 | 2.2k | 1-246-481-00 | 22k | 1-246-505-00 | 220k | 1-246-529-00 | 2.2M | 1-210-821-00 |
| 2.4 | 1-246-410-00 | 24 | 1-246-434-00 | 240 | 1-246-458-00 | 2.4k | 1-246-482-00 | 24k | 1-246-506-00 | 240k | 1-246-530-00 | 2.4M | 1-244-754-00 |
| 2.7 | 1-246-411-00 | 27 | 1-246-435-00 | 270 | 1-246-459-00 | 2.7k | 1-246-483-00 | 27k | 1-246-507-00 | 270k | 1-246-531-00 | 2.7M | 1-244-755-00 |
| 3.0 | 1-246-412-00 | 30 | 1-246-436-00 | 300 | 1-246-460-00 | 3.0k | 1-246-484-00 | 30k | 1-246-508-00 | 300k | 1-246-532-00 | 3.0M | 1-244-756-00 |
| 3.3 | 1-246-413-00 | 33 | 1-246-437-00 | 330 | 1-246-461-00 | 3.3k | 1-246-485-00 | 33k | 1-246-509-00 | 330k | 1-246-533-00 | 3.3M | 1-244-757-00 |
| 3.6 | 1-246-414-00 | 36 | 1-246-438-00 | 360 | 1-246-462-00 | 3.6k | 1-246-486-00 | 36k | 1-246-510-00 | 360k | 1-246-534-00 | 3.6M | 1-244-758-00 |
| 3.9 | 1-246-415-00 | 39 | 1-246-439-00 | 390 | 1-246-463-00 | 3.9k | 1-246-487-00 | 39k | 1-246-511-00 | 390k | 1-246-535-00 | 3.9M | 1-244-759-00 |
| 4.3 | 1-246-416-00 | 43 | 1-246-440-00 | 430 | 1-246-464-00 | 4.3k | 1-246-488-00 | 43k | 1-246-512-00 | 430k | 1-246-536-00 | 4.3M | 1-244-760-00 |
| 4.7 | 1-246-417-00 | 47 | 1-246-441-00 | 470 | 1-246-465-00 | 4.7k | 1-246-489-00 | 47k | 1-246-513-00 | 470k | 1-246-537-00 | 4.7M | 1-244-761-00 |
| 5.1 | 1-246-418-00 | 51 | 1-246-442-00 | 510 | 1-246-466-00 | 5.1k | 1-246-490-00 | 51k | 1-246-514-00 | 510k | 1-246-538-00 | 5.1M | 1-244-762-00 |
| 5.6 | 1-246-419-00 | 56 | 1-246-443-00 | 560 | 1-246-467-00 | 5.6k | 1-246-491-00 | 56k | 1-246-515-00 | 560k | 1-246-539-00 | | |
| 6.2 | 1-246-420-00 | 62 | 1-246-444-00 | 620 | 1-246-468-00 | 6.2k | 1-246-492-00 | 62k | 1-246-516-00 | 620k | 1-246-540-00 | | |
| 6.8 | 1-246-421-00 | 68 | 1-246-445-00 | 680 | 1-246-469-00 | 6.8k | 1-246-493-00 | 68k | 1-246-517-00 | 680k | 1-246-541-00 | | |
| 7.5 | 1-246-422-00 | 75 | 1-246-446-00 | 750 | 1-246-470-00 | 7.5k | 1-246-494-00 | 75k | 1-246-518-00 | 750k | 1-246-542-00 | | |
| 8.2 | 1-246-423-00 | 82 | 1-246-447-00 | 820 | 1-246-471-00 | 8.2k | 1-246-495-00 | 82k | 1-246-519-00 | 820k | 1-246-543-00 | | |
| 9.1 | 1-246-424-00 | 91 | 1-246-448-00 | 910 | 1-246-472-00 | 9.1k | 1-246-496-00 | 91k | 1-246-520-00 | 910k | 1-246-544-00 | | |

ELECTROLYTIC CAPACITORS

Note: Circled letter (A to Z) are applicable to European models only.

| CAP. (μF) | RATING → : Use the high voltage rated one. | | | | | | | | | | | |
|-----------|--|--|------------------|--|----------|------------------|----------|------------------|----------|------------------|----------|------------------|
| | 6.3 VOLT. | | 10 VOLT. | | 16 VOLT. | | 25 VOLT. | | 35 VOLT. | | 50 VOLT. | |
| | PART No. | | PART No. | | PART No. | | PART No. | | PART No. | | PART No. | |
| 0.47 | | | | | | | | | | | | 1-121-726-00 (A) |
| 1.0 | | | | | | | | | | | | 1-121-391-00 (A) |
| 2.2 | | | | | | | | | | | | 1-121-450-00 (A) |
| 3.3 | | | | | | | | 1-121-392-00 (A) | | | | 1-121-393-00 (A) |
| 4.7 | | | | | | | | 1-121-395-00 (A) | | | | 1-121-396-00 (A) |
| 10 | | | | | | 1-121-651-00 (A) | | 1-121-398-00 (A) | | | | 1-121-738-00 (A) |
| 22 | | | | | | 1-121-479-00 (A) | | 1-121-480-00 (A) | | 1-121-662-00 (A) | | 1-121-152-00 (A) |
| 33 | | | | | | 1-121-403-00 (A) | | 1-121-404-00 (A) | | 1-121-652-00 (B) | | 1-121-405-00 (A) |
| 47 | | | | | | 1-121-409-00 (A) | | 1-121-410-00 (A) | | 1-121-653-00 (B) | | 1-121-411-00 (A) |
| 100 | | | 1-121-352-00 (A) | | | 1-121-415-00 (A) | | 1-121-416-00 (A) | | 1-121-357-00 (B) | | 1-121-417-00 (B) |
| 220 | 1-121-419-00 (B) | | 1-121-420-00 (B) | | | 1-121-421-00 (B) | | 1-121-422-00 (B) | | 1-121-261-00 (C) | | 1-121-423-00 (B) |
| 330 | 1-121-751-00 (B) | | 1-121-805-00 (B) | | | 1-121-521-00 (C) | | 1-121-654-00 (B) | | 1-121-655-00 (D) | | 1-121-656-00 (C) |
| 470 | 1-121-424-00 (B) | | 1-121-425-00 (C) | | | 1-121-426-00 (C) | | 1-121-733-00 (B) | | 1-121-361-00 (E) | | 1-121-810-00 (D) |
| 1000 | | | 1-121-736-00 (C) | | | 1-121-245-00 (D) | | 1-121-657-00 (D) | | 1-121-388-00 (E) | | 1-123-061-00 (E) |
| 2200 | 1-121-658-00 (B) | | 1-121-659-00 (C) | | | 1-121-660-00 (D) | | 1-123-067-00 (F) | | 1-121-984-00 (F) | | - |
| 3300 | 1-121-661-00 (D) | | 1-123-075-00 (E) | | | 1-123-071-00 (F) | | - | | - | | - |

| CAP. (μF) | 100 VOLT. | | 160 VOLT. | | 250 VOLT. | | 350 VOLT. | |
|-----------|------------------|--|------------------|--|------------------|--|------------------|--|
| | PART No. | | PART No. | | PART No. | | PART No. | |
| 0.47 | | | | | | | | |
| 1.0 | 1-123-249-00 (A) | | 1-123-252-00 (A) | | 1-123-003-00 (B) | | 1-121-168-00 (B) | |
| 2.2 | 1-123-250-00 (A) | | 1-123-026-00 (B) | | | | 1-123-028-00 (B) | |
| 3.3 | 1-121-995-00 (A) | | | | 1-123-004-00 (B) | | 1-123-006-00 (C) | |
| 4.7 | 1-123-255-00 (A) | | 1-121-246-00 (B) | | 1-121-759-00 (B) | | 1-123-007-00 (D) | |
| 10 | 1-121-176-00 (B) | | 1-121-999-00 (B) | | 1-123-254-00 (C) | | 1-123-008-00 (D) | |
| 22 | 1-121-996-00 (C) | | 1-123-253-00 (C) | | 1-123-005-00 (D) | | 1-123-022-00 (D) | |
| 33 | 1-121-997-00 (C) | | 1-121-757-00 (C) | | | | | |
| 47 | 1-123-251-00 (C) | | 1-121-919-00 (C) | | | | | |
| 100 | 1-123-084-00 (E) | | | | | | | |

CERAMIC CAPACITORS (A)

| RATING | | | | | | | | | |
|-----------|--------------|--|-----------|--------------|--|-----------|--------------|--------|--------------|
| CAP. (pF) | 50 VOLT. | | CAP. (pF) | 50 VOLT. | | CAP. (pF) | 50 VOLT. | | |
| | PART No. | | | PART No. | | | PART No. | | |
| 0.5 | 1-101-837-00 | | 22 | 1-102-959-00 | | 150 | 1-101-361-00 | 0.001 | 1-102-074-00 |
| 0.75 | 1-101-586-00 | | 24 | 1-102-960-00 | | 160 | 1-101-367-00 | 0.0012 | 1-102-118-00 |
| 1.0 | 1-102-934-00 | | 27 | 1-102-961-00 | | 180 | 1-102-976-00 | 0.0015 | 1-102-119-00 |
| 1.5 | 1-101-576-00 | | 30 | 1-102-962-00 | | 200 | 1-102-977-00 | 0.0018 | 1-102-120-00 |
| 2.0 | 1-102-935-00 | | 33 | 1-102-963-00 | | 220 | 1-102-978-00 | 0.0022 | 1-102-121-00 |
| 3 | 1-102-936-00 | | 36 | 1-102-964-00 | | 240 | 1-102-979-00 | 0.0027 | 1-102-122-00 |
| 4 | 1-102-937-00 | | 39 | 1-102-965-00 | | 270 | 1-102-980-00 | 0.0033 | 1-102-123-00 |
| 5 | 1-102-942-00 | | 43 | 1-102-966-00 | | 300 | 1-102-981-00 | 0.0039 | 1-102-124-00 |
| 6 | 1-102-943-00 | | 47 | 1-101-880-00 | | 330 | 1-102-820-00 | 0.0047 | 1-102-125-00 |
| 7 | 1-102-944-00 | | 51 | 1-101-882-00 | | 360 | 1-102-821-00 | 0.0056 | 1-102-126-00 |
| 8 | 1-102-945-00 | | 56 | 1-101-884-00 | | 390 | 1-102-822-00 | 0.0068 | 1-102-127-00 |
| 9 | 1-102-946-00 | | 62 | 1-101-886-00 | | 430 | 1-102-823-00 | 0.0082 | 1-102-128-00 |
| 10 | 1-102-947-00 | | 68 | 1-101-888-00 | | 470 | 1-102-824-00 | 0.01 | 1-102-129-00 |
| 11 | 1-102-948-00 | | 75 | 1-101-890-00 | | 510 | 1-101-059-00 | 0.012 | 1-101-005-00 |
| 12 | 1-102-949-00 | | 82 | 1-102-971-00 | | 560 | 1-102-115-00 | 0.0147 | 1-101-006-00 |
| 13 | 1-102-950-00 | | 91 | 1-102-972-00 | | 680 | 1-102-116-00 | | |
| 15 | 1-102-951-00 | | 100 | 1-102-973-00 | | 820 | 1-102-117-00 | | |
| 16 | 1-102-952-00 | | 110 | 1-102-815-00 | | | | | |
| 18 | 1-102-953-00 | | 120 | 1-102-816-00 | | | | | |
| 20 | 1-102-958-00 | | 130 | 1-101-081-00 | | | | | |

0.001μF = 1,000pF

CERAMIC (SEMICONDUCTOR) CAPACITORS (A)

| RATING → : Use the high voltage rated one. | | | | | |
|--|--------------|--------------|-----------|--------------|--------------|
| CAP. (μF) | 25 VOLT. | | CAP. (μF) | 50 VOLT. | |
| | PART No. | | | PART No. | |
| 0.001 | | 1-161-039-00 | 0.018 | 1-161-016-00 | 1-161-054-00 |
| 0.0012 | | 1-161-040-00 | 0.022 | 1-161-017-00 | 1-161-055-00 |
| 0.0015 | | 1-161-041-00 | 0.027 | 1-161-018-00 | 1-161-056-00 |
| 0.0018 | | 1-161-042-00 | 0.033 | 1-161-019-00 | 1-161-057-00 |
| 0.0022 | | 1-161-043-00 | 0.039 | 1-161-020-00 | 1-161-058-00 |
| 0.0027 | | 1-161-044-00 | 0.047 | 1-161-021-00 | 1-161-059-00 |
| 0.0033 | | 1-161-045-00 | 0.056 | | 1-161-060-00 |
| 0.0039 | | 1-161-046-00 | 0.068 | | 1-161-061-00 |
| 0.0047 | | 1-161-047-00 | 0.082 | 1-161-024-00 | 1-161-062-00 |
| 0.0056 | | 1-161-048-00 | 0.1 | 1-161-025-00 | 1-161-063-00 |
| 0.0068 | | 1-161-049-00 | | | |
| 0.0082 | 1-161-012-00 | 1-161-050-00 | | | |
| 0.01 | 1-161-013-00 | 1-161-051-00 | | | |
| 0.012 | | 1-161-052-00 | | | |
| 0.015 | 1-161-015-00 | 1-161-053-00 | | | |

MYLAR CAPACITORS (A)

Note: Circled letters (A) to (Z) are applicable to European models only.


| CAP. (μF) | RATING | | | | | | | | | | |
|-----------|--------------|--------------|--------------|-----------|--------------|--------------|--------------|----------|--------------|--------------|--------------|
| | 50 VOLT. | | | 100 VOLT. | | | 200 VOLT. | | | | |
| | PART No. | PART No. | PART No. | PART No. | PART No. | PART No. | PART No. | PART No. | | | |
| 0.001 | 1-108-227-00 | 1-108-365-00 | 1-108-409-00 | 0.01 | 1-108-239-00 | 1-108-377-00 | 1-108-421-00 | 0.1 | 1-108-251-00 | 1-108-389-00 | 1-108-433-00 |
| 0.0012 | 1-108-351-00 | 1-108-366-00 | 1-108-410-00 | 0.012 | 1-108-357-00 | 1-108-378-00 | 1-108-422-00 | 0.12 | 1-108-263-00 | 1-108-390-00 | 1-108-434-00 |
| 0.0015 | 1-108-228-00 | 1-108-367-00 | 1-108-411-00 | 0.015 | 1-108-240-00 | 1-108-379-00 | 1-108-423-00 | 0.15 | 1-108-252-00 | 1-108-391-00 | 1-108-435-00 |
| 0.0018 | 1-108-352-00 | 1-108-368-00 | 1-108-412-00 | 0.018 | 1-108-358-00 | 1-108-380-00 | 1-108-424-00 | 0.18 | 1-108-264-00 | 1-108-392-00 | 1-108-436-00 |
| 0.0022 | 1-108-230-00 | 1-108-369-00 | 1-108-413-00 | 0.022 | 1-108-242-00 | 1-108-381-00 | 1-108-425-00 | 0.22 | 1-108-254-00 | 1-108-393-00 | 1-108-437-00 |
| 0.0027 | 1-108-353-00 | 1-108-370-00 | 1-108-414-00 | 0.027 | 1-108-359-00 | 1-108-382-00 | 1-108-426-00 | 0.27 | 1-108-254-00 | - | - |
| 0.0033 | 1-108-232-00 | 1-108-371-00 | 1-108-415-00 | 0.033 | 1-108-244-00 | 1-108-383-00 | 1-108-427-00 | 0.33 | 1-108-255-00 | - | - |
| 0.0039 | 1-108-354-00 | 1-108-372-00 | 1-108-416-00 | 0.039 | 1-108-360-00 | 1-108-384-00 | 1-108-428-00 | 0.39 | 1-108-256-00 | - | - |
| 0.0047 | 1-108-234-00 | 1-108-373-00 | 1-108-417-00 | 0.047 | 1-108-246-00 | 1-108-385-00 | 1-108-429-00 | 0.47 | 1-108-257-00 | - | - |
| 0.0056 | 1-108-355-00 | 1-108-374-00 | 1-108-418-00 | 0.056 | 1-108-361-00 | 1-108-386-00 | 1-108-430-00 | - | - | - | - |
| 0.0068 | 1-108-237-00 | 1-108-375-00 | 1-108-419-00 | 0.068 | 1-108-249-00 | 1-108-387-00 | 1-108-431-00 | - | - | - | - |
| 0.0082 | 1-108-356-00 | 1-108-376-00 | 1-108-420-00 | 0.082 | 1-108-362-00 | 1-108-388-00 | 1-108-432-00 | - | - | - | - |

TANTALUM CAPACITORS



| CAP. (μF) | RATING | | | | | | |
|-----------|------------------------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| | →: Use the high voltage rated one. | | | | | | |
| | 3.15 VOLT. | 6.3 VOLT. | 10 VOLT. | 16 VOLT. | 20 VOLT. | 25 VOLT. | 35 VOLT. |
| 0.01 | | | | | | | 1-131-396-00 (B) |
| 0.015 | | | | | | | 1-131-397-00 (B) |
| 0.022 | | | | | | | 1-131-398-00 (B) |
| 0.033 | | | | | | | 1-131-399-00 (B) |
| 0.047 | | | | | | | 1-131-400-00 (B) |
| 0.068 | | | | | | | 1-131-401-00 (B) |
| 0.1 | | | | | | | 1-131-402-00 (B) |
| 0.15 | | | | | | | 1-131-403-00 (B) |
| 0.22 | | | | | | | 1-131-404-00 (B) |
| 0.33 | | | | | | 1-131-409-00 (B) | 1-131-405-00 (B) |
| 0.47 | | | | | 1-131-412-00 (B) | | 1-131-406-00 (B) |
| 0.68 | | | | 1-131-415-00 (B) | | 1-131-410-00 (B) | 1-131-407-00 (B) |
| 1.0 | | | 1-131-418-00 (B) | | 1-131-413-00 (B) | | 1-131-408-00 (B) |
| 1.5 | | 1-131-421-00 (B) | | 1-131-416-00 (B) | | 1-131-411-00 (B) | 1-131-348-00 (B) |
| 2.2 | 1-131-424-00 (B) | | 1-131-419-00 (B) | | 1-131-414-00 (B) | 1-131-355-00 (B) | 1-131-349-00 (B) |
| 3.3 | | 1-131-422-00 (B) | | 1-131-417-00 (B) | 1-131-362-00 (B) | 1-131-356-00 (B) | 1-131-350-00 (B) |
| 4.7 | 1-131-425-00 (B) | | 1-131-420-00 (B) | 1-131-369-00 (B) | 1-131-363-00 (B) | 1-131-357-00 (B) | 1-131-351-00 (C) |
| 6.8 | | 1-131-423-00 (B) | 1-131-376-00 (B) | 1-131-370-00 (B) | 1-131-364-00 (B) | 1-131-358-00 (C) | 1-131-352-00 (C) |
| 10 | 1-131-426-00 (B) | 1-131-383-00 (B) | 1-131-377-00 (B) | 1-131-371-00 (B) | 1-131-365-00 (C) | 1-131-359-00 (C) | 1-131-353-00 (D) |
| 15 | 1-131-390-00 (B) | 1-131-384-00 (B) | 1-131-278-00 (B) | 1-131-372-00 (B) | 1-131-366-00 (C) | 1-131-360-00 (D) | |
| 22 | 1-131-391-00 (B) | 1-131-385-00 (B) | 1-131-379-00 (C) | 1-131-373-00 (C) | 1-131-367-00 (D) | | |
| 33 | 1-131-392-00 (B) | 1-131-386-00 (C) | 1-131-380-00 (C) | 1-131-374-00 (D) | | | |
| 47 | 1-131-393-00 (C) | 1-131-387-00 (C) | 1-131-381-00 (D) | | | | |
| 68 | 1-131-394-00 (D) | 1-131-388-00 (C) | | | | | |
| 100 | 1-131-395-00 (D) | | | | | | |

TANTALUM CAPACITORS



| CAP. (μF) | RATING | | | | | |
|-----------|------------------|------------------|------------------|------------------|------------------|------------------|
| | 3 VOLT. | 6.3 VOLT. | 10 VOLT. | 16 VOLT. | 20 VOLT. | 35 VOLT. |
| | PART No. | PART No. | PART No. | PART No. | PART No. | PART No. |
| 0.033 | | | | | | 1-131-273-00 (E) |
| 0.047 | | | | | | 1-131-274-00 (E) |
| 0.068 | | | | | | 1-131-275-00 (E) |
| 0.1 | | | | | | 1-131-276-00 (D) |
| 0.15 | | | | | | 1-131-277-00 (D) |
| 0.22 | | | | | 1-131-262-00 (D) | 1-131-278-00 (D) |
| 0.33 | | | | | 1-131-263-00 (D) | 1-131-279-00 (D) |
| 0.47 | | | 1-131-169-00 (D) | | 1-131-264-00 (D) | 1-131-280-00 (D) |
| 0.68 | | | | 1-131-258-00 (D) | 1-131-265-00 (D) | 1-131-281-00 (D) |
| 1.0 | | | 1-131-254-00 (D) | | 1-131-266-00 (D) | 1-131-282-00 (D) |
| 1.5 | | 1-131-250-00 (E) | | | 1-131-267-00 (D) | 1-131-283-00 (E) |
| 2.2 | | | | 1-131-259-00 (D) | 1-131-268-00 (D) | 1-131-284-00 (E) |
| 3.3 | | | 1-131-255-00 (D) | | 1-131-269-00 (D) | |
| 4.7 | | 1-131-251-00 (E) | 1-131-171-00 (D) | | 1-131-270-00 (D) | |
| 6.8 | | | | 1-131-260-00 (D) | 1-131-271-00 (E) | |
| 10 | | | 1-131-256-00 (D) | | 1-131-272-00 (E) | |
| 15 | | 1-131-252-00 (D) | | 1-131-261-00 (E) | | |
| 22 | | | 1-131-257-00 (E) | | | |
| 33 | 1-131-176-00 (D) | 1-131-253-00 (E) | 1-131-173-00 (C) | | | |
| 47 | 1-131-288-00 (F) | 1-131-174-00 (D) | | | | |
| 100 | 1-131-177-00 (D) | | | | | |

Sony Corporation

© 1979

— 40 —