

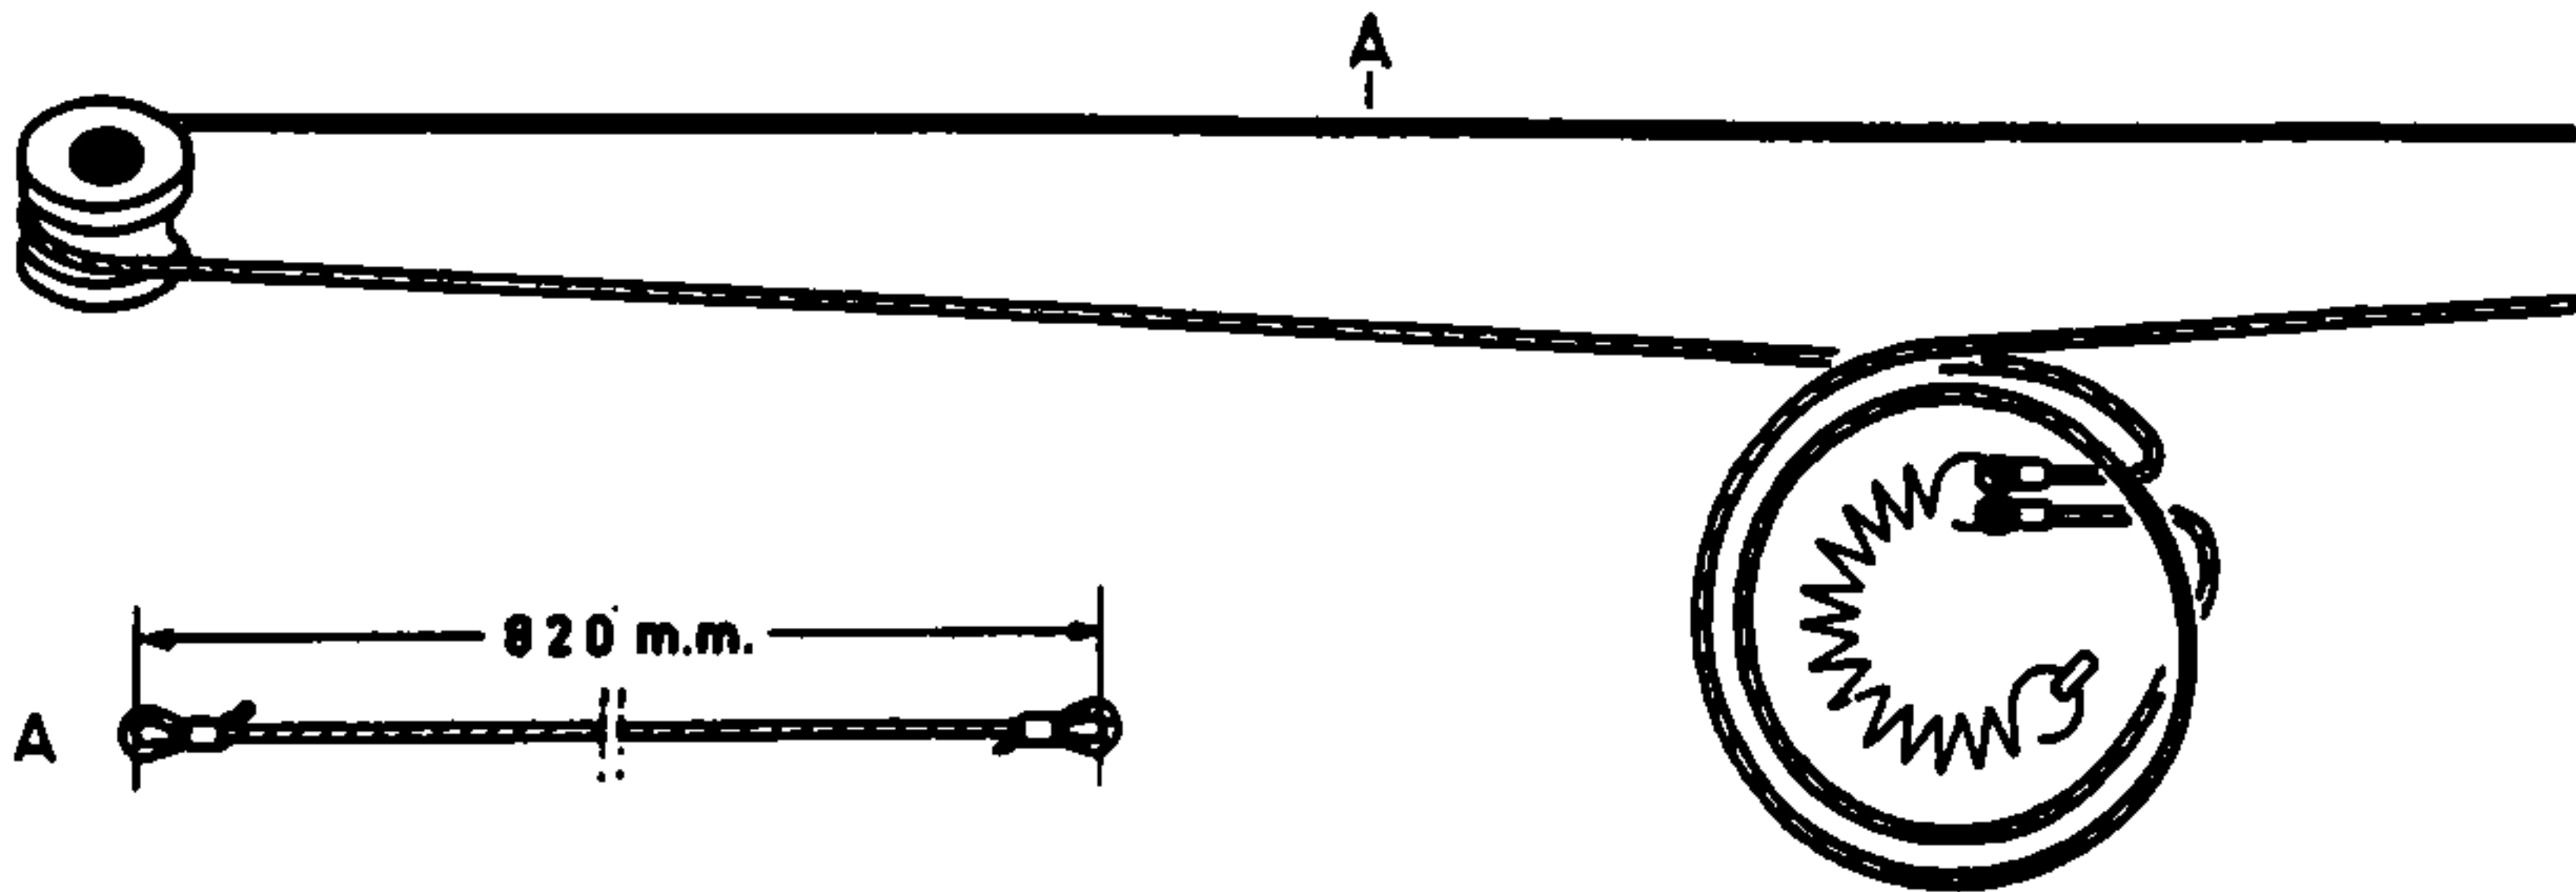
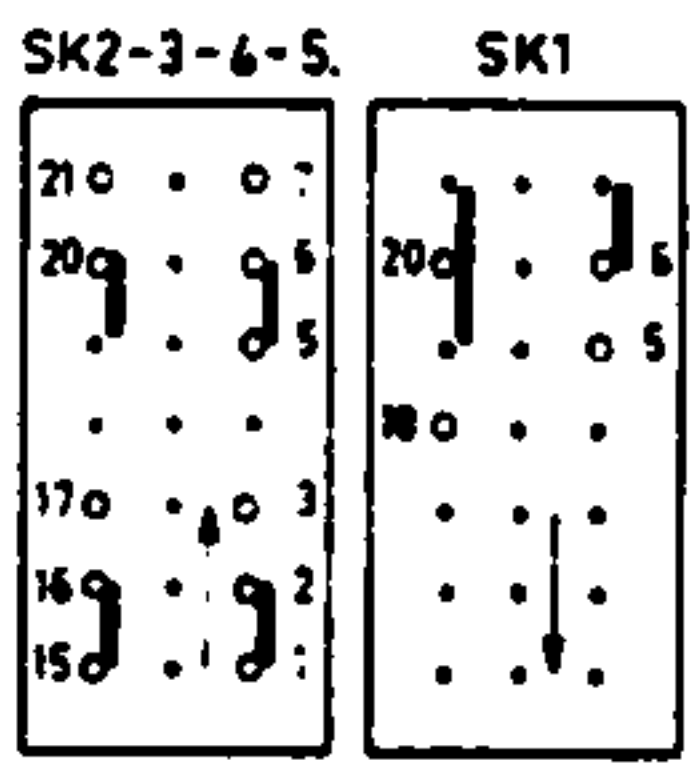
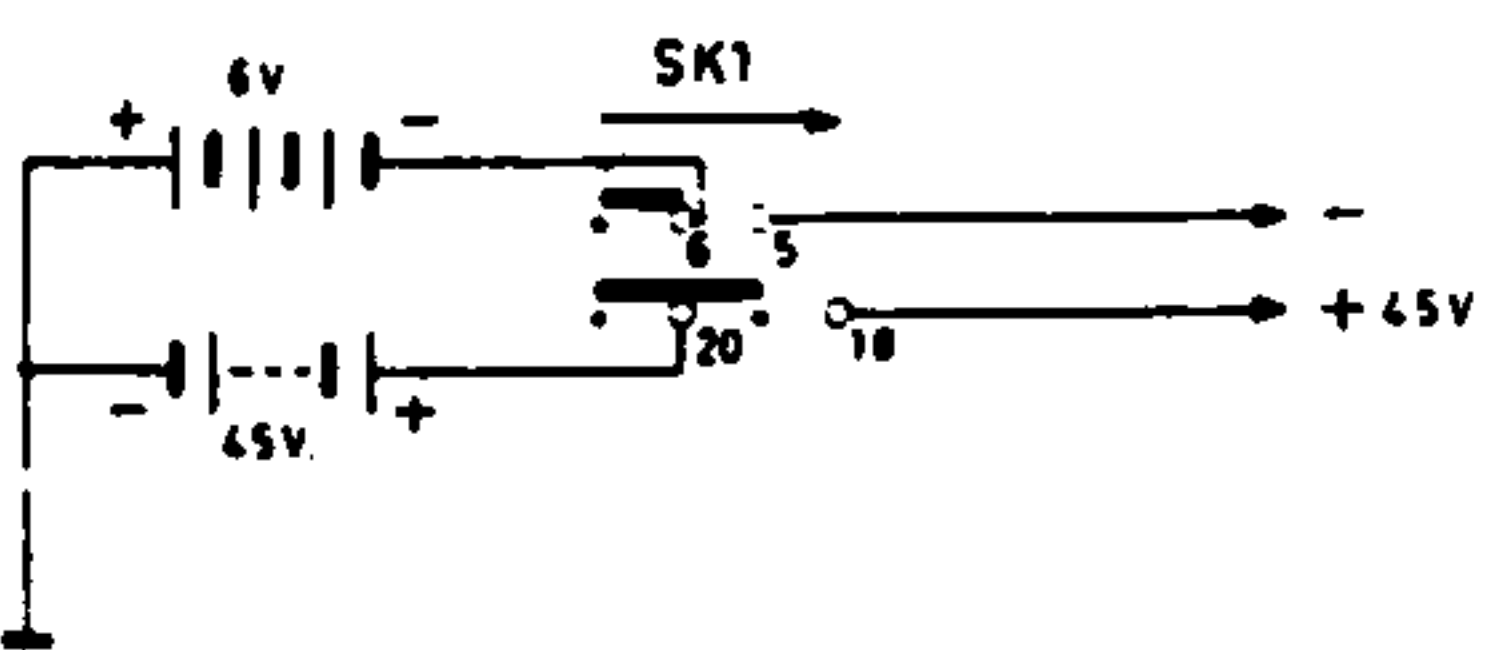
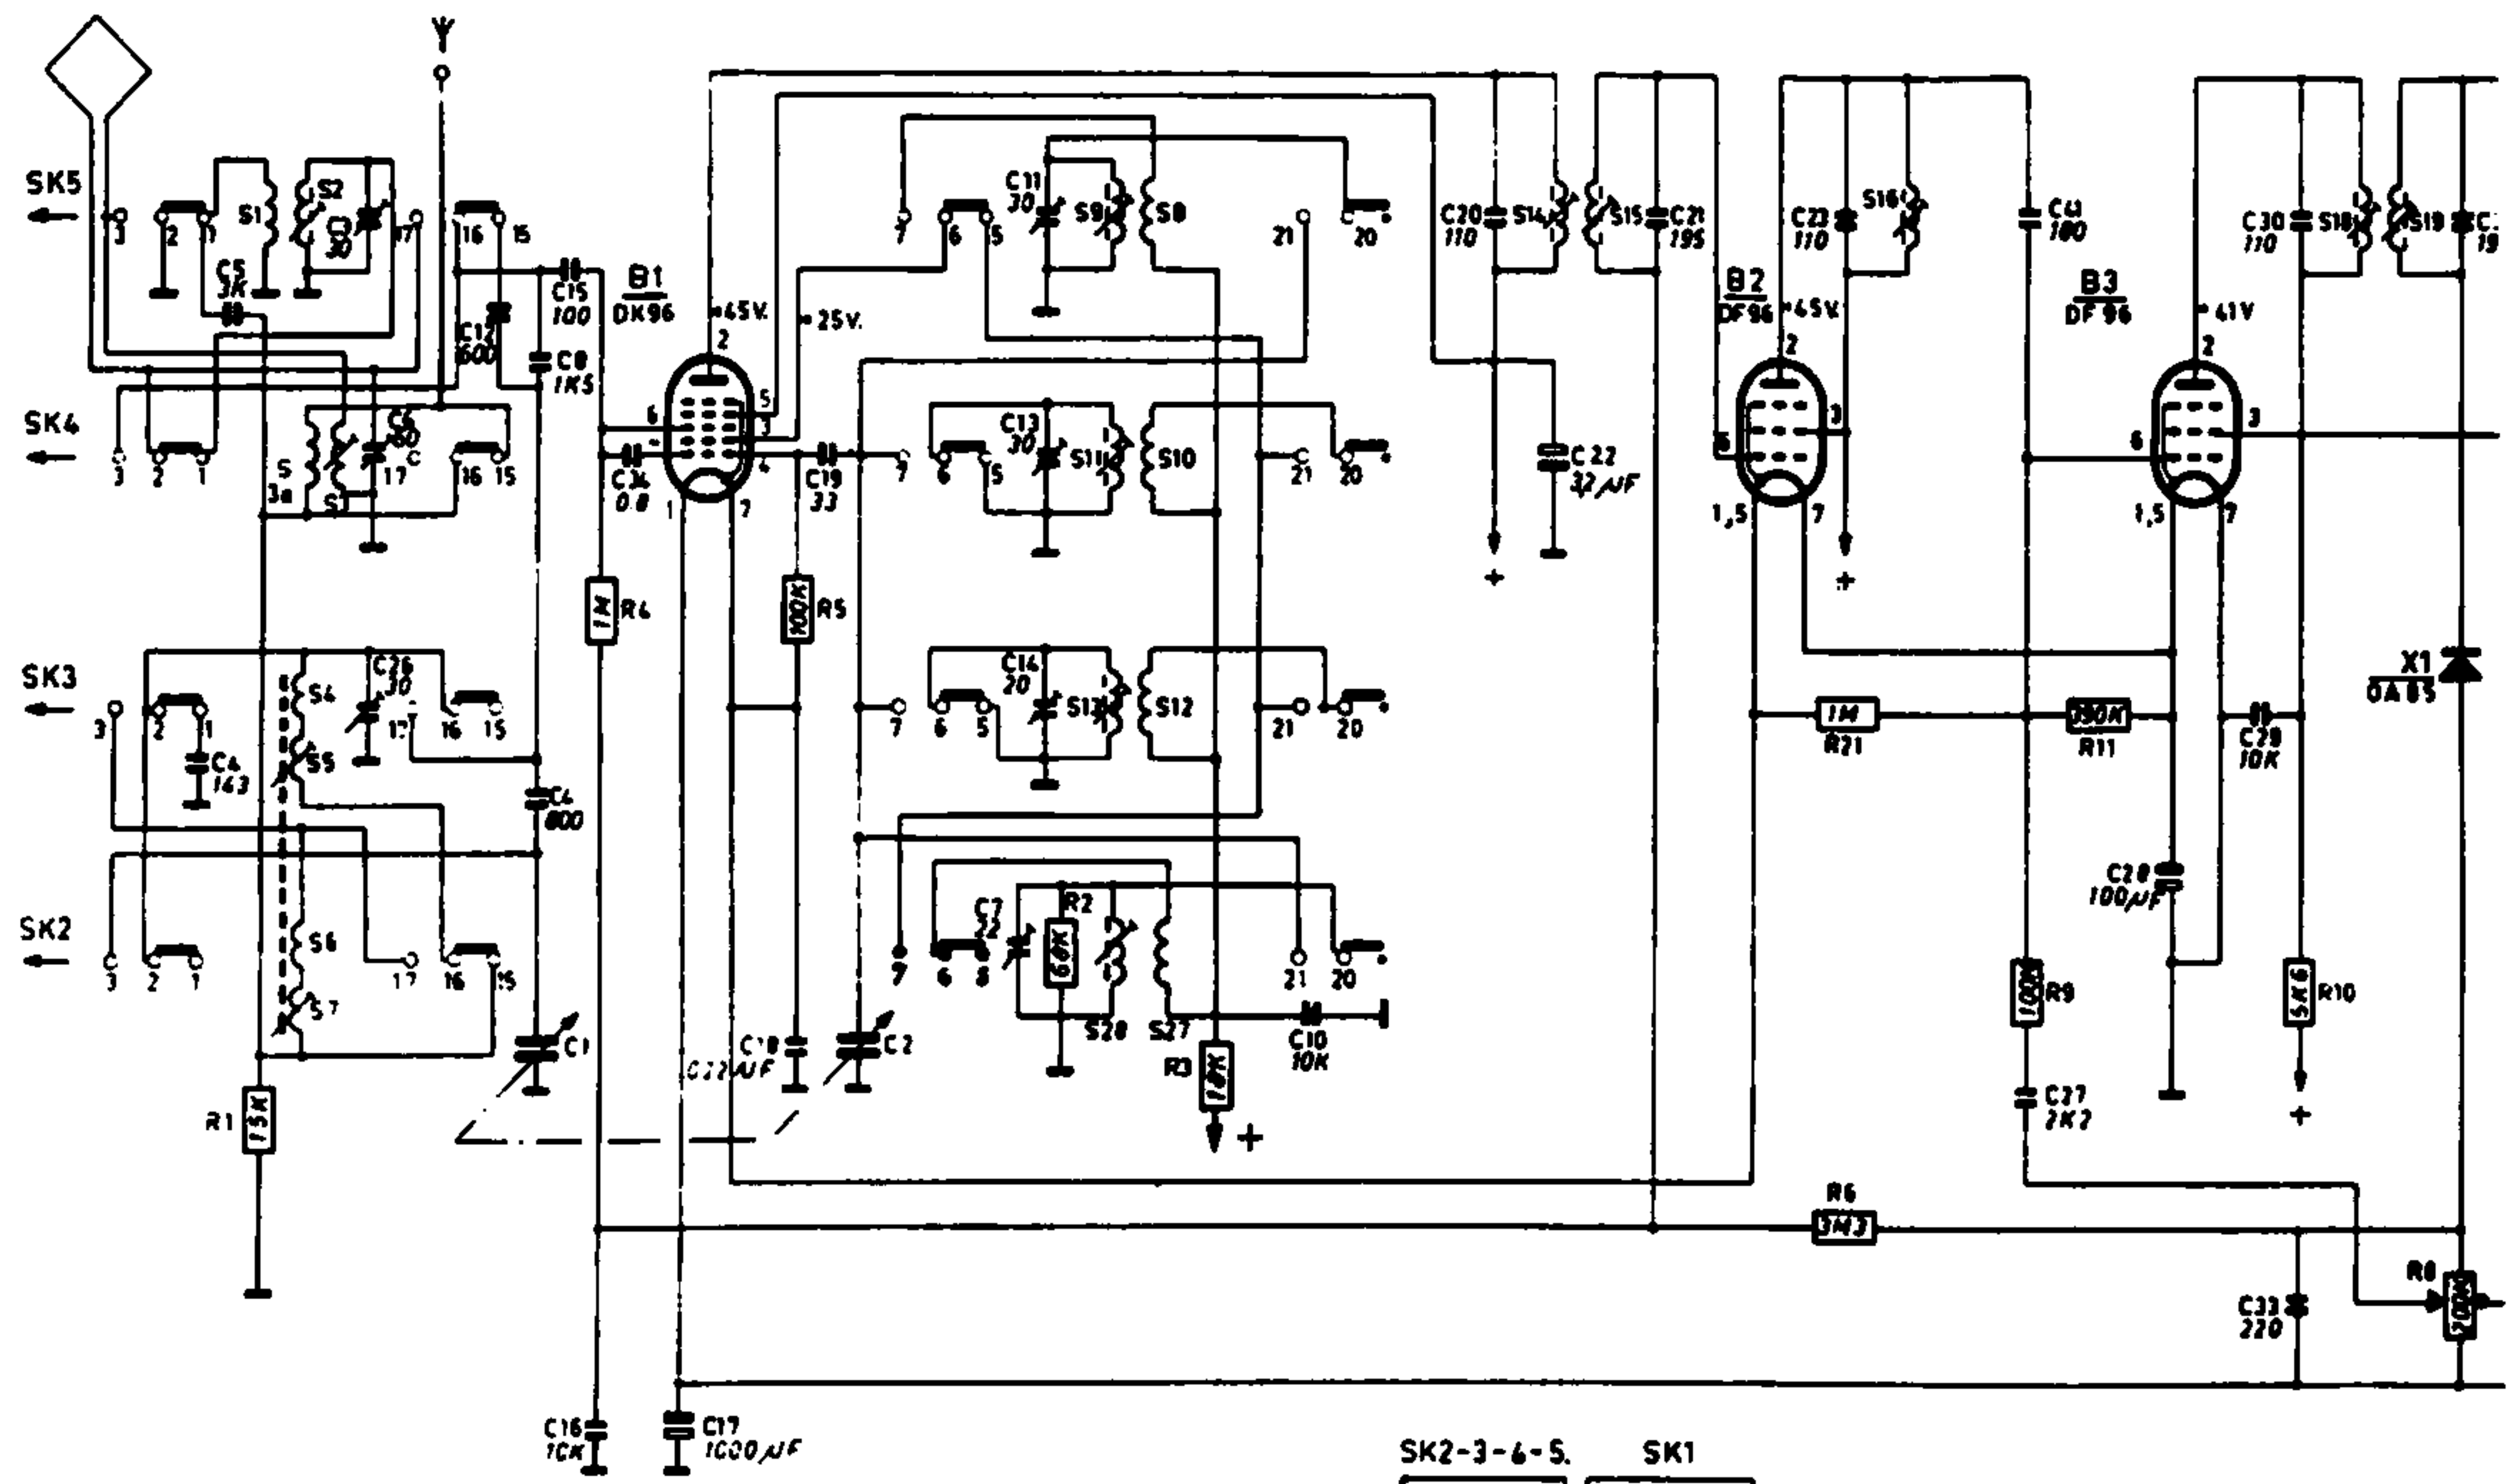


Service

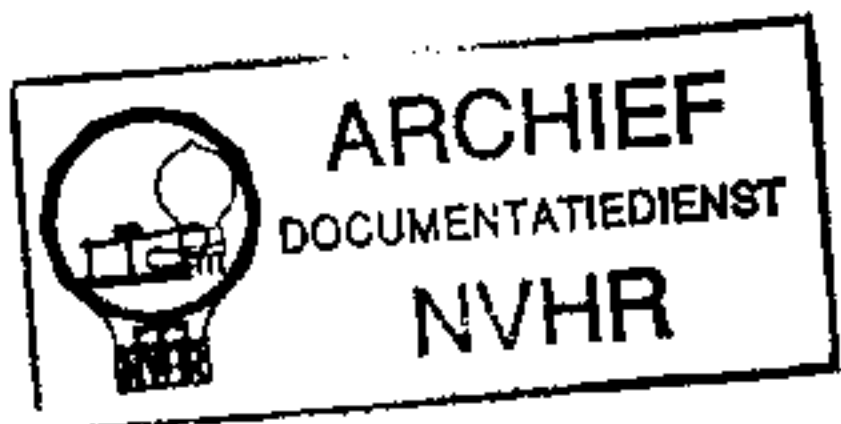

Tipos L4X65 BT-00-04

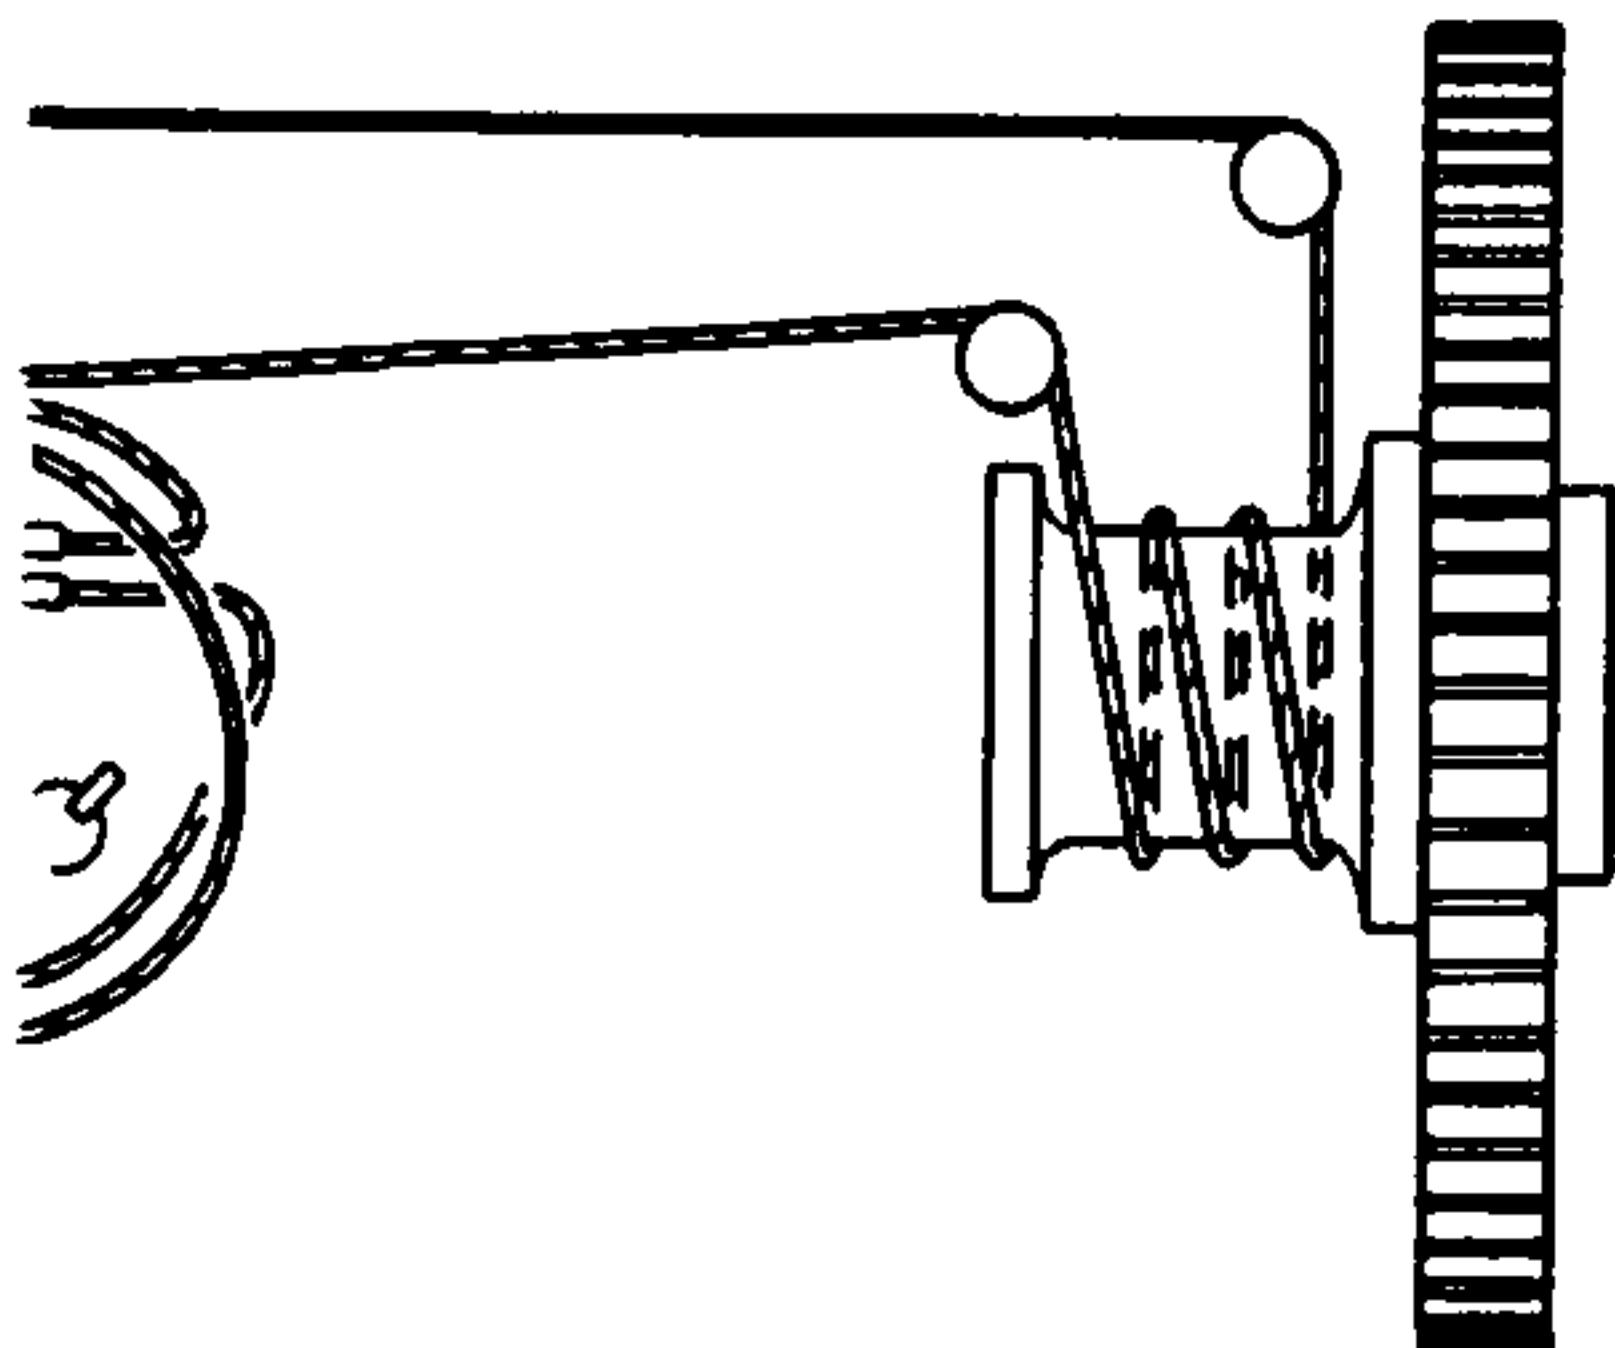

GAMAS DE FREQUENCIA

- OM ÷ 517-1610 kHz (186-580 m)
- OC . 3 ÷ 1,6-4 MHz (75-187 m)
- OC . 2 ÷ 5,9-12,1 MHz (24,8-50,8 m)
- OC . 2a ÷ 12,1-22,2 MHz (13,5-24,8 m)

F. l.: 452 kHz

Pilhas:

Anódica 45 V

Filamentos e transistores $8 \times 1,5 \text{ V}$

Consumo (à máxima tensão de saída)

Corrente anódica 3 mA

Corrente de filamentos e transistores
55 mA

Altifalante: AD 3460 Z