


# STR-4800/4800SD



STR-4800SD  
DOLBY FM

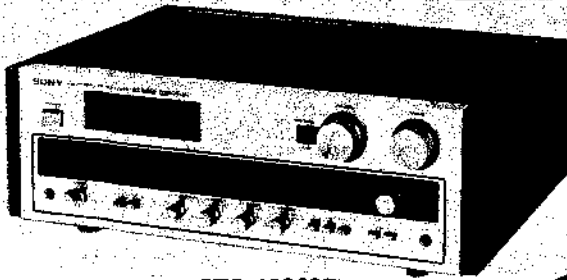

STR-4800

STR-4800SD  
US Model  
Canadian Model  
STR-4800  
AEP Model  
UK Model  
E Model

\* STR-4800SD is equipped with DOLBY FM circuit. 'Dolby' and the double-D symbol are the trade marks of Dolby Laboratory Inc. Noise reduction system manufactured under license from Dolby Laboratory Inc.

## FM STEREO/FM-AM RECEIVER

### SPECIFICATIONS

#### GENERAL

**Power Requirements:** 120 V ac, 60 Hz (US and Canadian Model)  
110, 127, 220 or 240 V ac ~ adjustable,  
50/60 Hz (AEP, UK, E Model)

**Power Consumption:** 145 W (US Model)  
240 VA (Canadian Model)  
270 W (AEP, E Model)  
290 W (UK Model)

**AC Outlets:** 2 unswitched, total 200W (US and Canadian Model)

**Dimensions:** Approx.  
490 (w) x 170 (h) x 415 (d) mm  
19 1/4 (w) x 6 7/16 (h) x 16 1/4 (d) inches  
Including projecting parts and controls

**Weight:** Approx.  
13.9 kg, 30 lb 10 oz (net)  
Approx.  
16.2 kg, 35 lb 11 oz (with shipping carton)

**Harmonic Distortion:** at 100 Hz  
0.2% (MONO)  
0.4% (STEREO)  
at 1 kHz  
0.2% (MONO)  
0.4% (STEREO)  
at 10 kHz  
0.2% (MONO)  
0.8% (STEREO)

**IM Distortion:** 0.2% (MONO)  
0.4% (STEREO)

**Separation:** 35 dB at 100 kHz  
40 dB at 1 kHz  
35 dB at 10 kHz

**Frequency Response:** 30 Hz - 15 kHz  $\pm$  0.2 dB  
(US and Canadian Model)  
40 Hz - 12.5 kHz  $\pm$  0.2 dB  
(AEP, UK, E Model)

#### FM SECTION

**Tuning Range:** 87.5 MHz - 108 MHz

**Intermediate Frequency:** 10.7 MHz

**Sensitivity at 50 dB Quieting:** 4  $\mu$ V (MONO)  
45  $\mu$ V (STEREO)

**Sensitivity at 46 dB Quieting:** 50  $\mu$ V (STEREO) (AEP, UK, E Model)  
(40 kHz deviation)

**Usable Sensitivity:** IHF 1.9  $\mu$ V (MONO)  
1.7  $\mu$ V, S/N = 26 dB (40 kHz deviation)  
(AEP, UK, E Model)

**S/N Ratio:** 73 dB (MONO)  
68 dB (STEREO)

**Capture Ratio:** 1.5 dB

**AM Suppression Ratio:** 54 dB

**Image Response Ratio:** 40 dB

**IF Response Ratio:** 90 dB

**Spurious Response Ratio:** 75 dB

**RF Intermodulation:** 60 dB

**Sub-carrier Product Ratio:** 60 dB

**Muting Threshold:** Approx. 5  $\mu$ V

- continued on next page -

**SAFETY-RELATED COMPONENT WARNING!!**  
COMPONENTS IDENTIFIED BY SHADING ON THE SCHEMATIC DIAGRAMS AND IN THE PARTS LIST ARE CRITICAL TO SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY.

# SONY<sup>®</sup>

## SERVICE MANUAL

# STR-4800/4800SD

## AM SECTION

|                                |   |
|--------------------------------|---|
| <b>Tuning Range:</b>           | 530 kHz–1,605 kHz   |
| <b>Intermediate Frequency:</b> | 455 kHz (US, Canadian Model)<br>468 kHz (AEP, UK, E Model)                                |
| <b>Usable Sensitivity:</b>     | 250 $\mu$ V/m, built-in ferrite-rod antenna<br>100 $\mu$ V, external antenna at 1,000 kHz |
| <b>S/N Ratio:</b>              | 50 dB at 50 mV/m  |
| <b>Harmonic Distortion:</b>    | 0.5 % at 50 mV/m, 400 Hz  |
| <b>Selectivity:</b>            | 35 dB   |
| <b>Image Response Ratio:</b>   | 40 dB at 1,000 kHz  |
| <b>IF Response Ratio:</b>      | 35 dB at 1,000 kHz  |

## AUDIO AMPLIFIER SECTION

### Continuous RMS

|   |  |
|---|--|
| <b>Power Output:</b><br>(rated output)<br>(less than 0.1 % THD) | Both channels driven simultaneously<br>at 20–20,000 Hz<br>35 + 35W (8 $\Omega$ )<br>At 1 kHz<br>40 + 40W (8 $\Omega$ ) (AEP, E Model)<br>50 + 50W (4 $\Omega$ ) (UK Model)<br>According to DIN 45500<br>40 + 40W (8 $\Omega$ ) (AEP, E Model)<br>45 + 45W (4 $\Omega$ ) (UK Model) |
|---|--|

|   |  |
|---|--|
| <b>Dynamic Power Output:</b><br>(IHF constant power<br>supply method) | 120W (8 $\Omega$ ) (AEP, UK, E Model)<br>170W (4 $\Omega$ ) (AEP, E Model) |
|---|--|

**Power Bandwidth:** 10–35,000 Hz, IHF (AEP, UK, E Model)

**Damping Factor:** 35 at 1 kHz (8  $\Omega$ )

**Harmonic Distortion:** Less than 0.1 % at rated output } (AEP, UK,  
Less than 0.1 % at 1 W output } E Model)

**IM Distortion:** Less than 0.1 % at rated output  
(60 Hz : 7 kHz = 4 : 1) Less than 0.1 % at 1 W output

**Residual Noise:** Less than 0.1  $\mu$ V

### Frequency Response:

|  |                                      |
|--|--------------------------------------|
| PHONO  | RIAA equalization curve $\pm$ 1 dB   |
| AUX<br>TAPE 1, 2<br>REC/PB (input)<br>(AEP, UK, E Model) | 10 – 30,000 Hz $\pm$ 0.5<br>– 3.0 dB |

### Input Sensitivity, Impedance and S/N Ratio:

|   | Sensitivity | Impedance      | S/N   | Weighting network |
|---|-------------|----------------|-------|-------------------|
| PHONO   | 2.5 mV      | 50 k $\Omega$  | 70 dB | A                 |
| AUX<br>TAPE 1, 2<br>REC/PB<br>(AEP, UK,<br>E Model) | 250 mV      | 100 k $\Omega$ | 90 dB | A                 |

**Note:** Measured with rated output power into 8  $\Omega$  loads  
(both channels driven simultaneously) at 1 kHz.

## Output Level and

### Impedance:

|                                 | Output level | Impedance      | Input level                              |
|---------------------------------|--------------|----------------|--|
| REC OUT 1, 2                    | 250 mV       | 4.7 k $\Omega$ | PHONO 2.5 mV<br>AUX<br>TAPE 1, 2         |
| REC/PB<br>(AEP, UK,<br>E Model) | 40 mV        | 82 k $\Omega$  | REC/PB<br>(AEP, UK,<br>E Model) } 250 mV |

**HEADPHONES:** Accepts 8–10,000  $\Omega$  headphones.

### SPEAKER:

4–16 $\Omega$  speakers are suitable. (for the countries  
except for the U.K.)  
8 $\Omega$  or more speakers are suitable (UK Model)

**Tone Controls:** BASS  $\pm$ 10 dB at 100 Hz  
TREBLE  $\pm$ 10 dB at 10 kHz

**Filters:** HIGH 6 dB/oct. above 6 kHz  
LOW 6 dB/oct. below 35 Hz

**Acoustic Compensator:** LOW +9 dB at 50 Hz  
(att. 30dB) PRESENCE +3 dB at 1 kHz  
LOUDNESS +10 dB at 50 Hz  
+3 dB at 10 kHz

## MODEL IDENTIFICATION

### – Specification Labels –

#### US model

|              |   |
|--------------|---|
| <b>SONY.</b> | FM STEREO / FM-AM RECEIVER<br>MODEL NO. STR-4800SD<br>FREQ. RANGE FM 87.5-108 MHz AM 530-1605 kHz<br>IF FM 10.7 MHz AM 455 kHz<br>AC 120V 60Hz 145 W<br>SERIAL NO.<br>MADE IN JAPAN |
|--------------|---|

#### Canadian model

|              |  |
|--------------|--|
| <b>SONY.</b> | FM STEREO / FM-AM RECEIVER<br>MODEL NO. STR-4800SD<br>FREQ. RANGE FM 87.5-108 MHz AM 530-1605 kHz<br>IF FM 10.7 MHz AM 455 kHz<br>AC 120V 60Hz 240 VA<br>SERIAL NO.<br>MADE IN JAPAN |
|--------------|--|


#### AEP/E model

|              |  |
|--------------|--|
| <b>SONY.</b> | FM STEREO / FM-AM RECEIVER<br>MODEL NO. STR-4800<br>FREQ. RANGE FM 87.5-108 MHz AM 530-1605 kHz<br>IF FM 10.7 MHz AM 468 kHz<br>AC 110 127 220 240V~ 50/60Hz 270W<br>SERIAL NO.<br>MADE IN JAPAN |
|--------------|--|

#### UK model

|              |  |
|--------------|--|
| <b>SONY.</b> | FM STEREO / FM-AM RECEIVER<br>MODEL NO. STR-4800<br>FREQ. RANGE FM 87.5-108 MHz AM 530-1605 kHz<br>IF FM 10.7 MHz AM 468 kHz<br>AC 110 127 220 240V~ 50/60Hz 290W<br>SERIAL NO.<br>MADE IN JAPAN |
|--------------|--|








SECTION 1  
BLOCK DIAGRAM

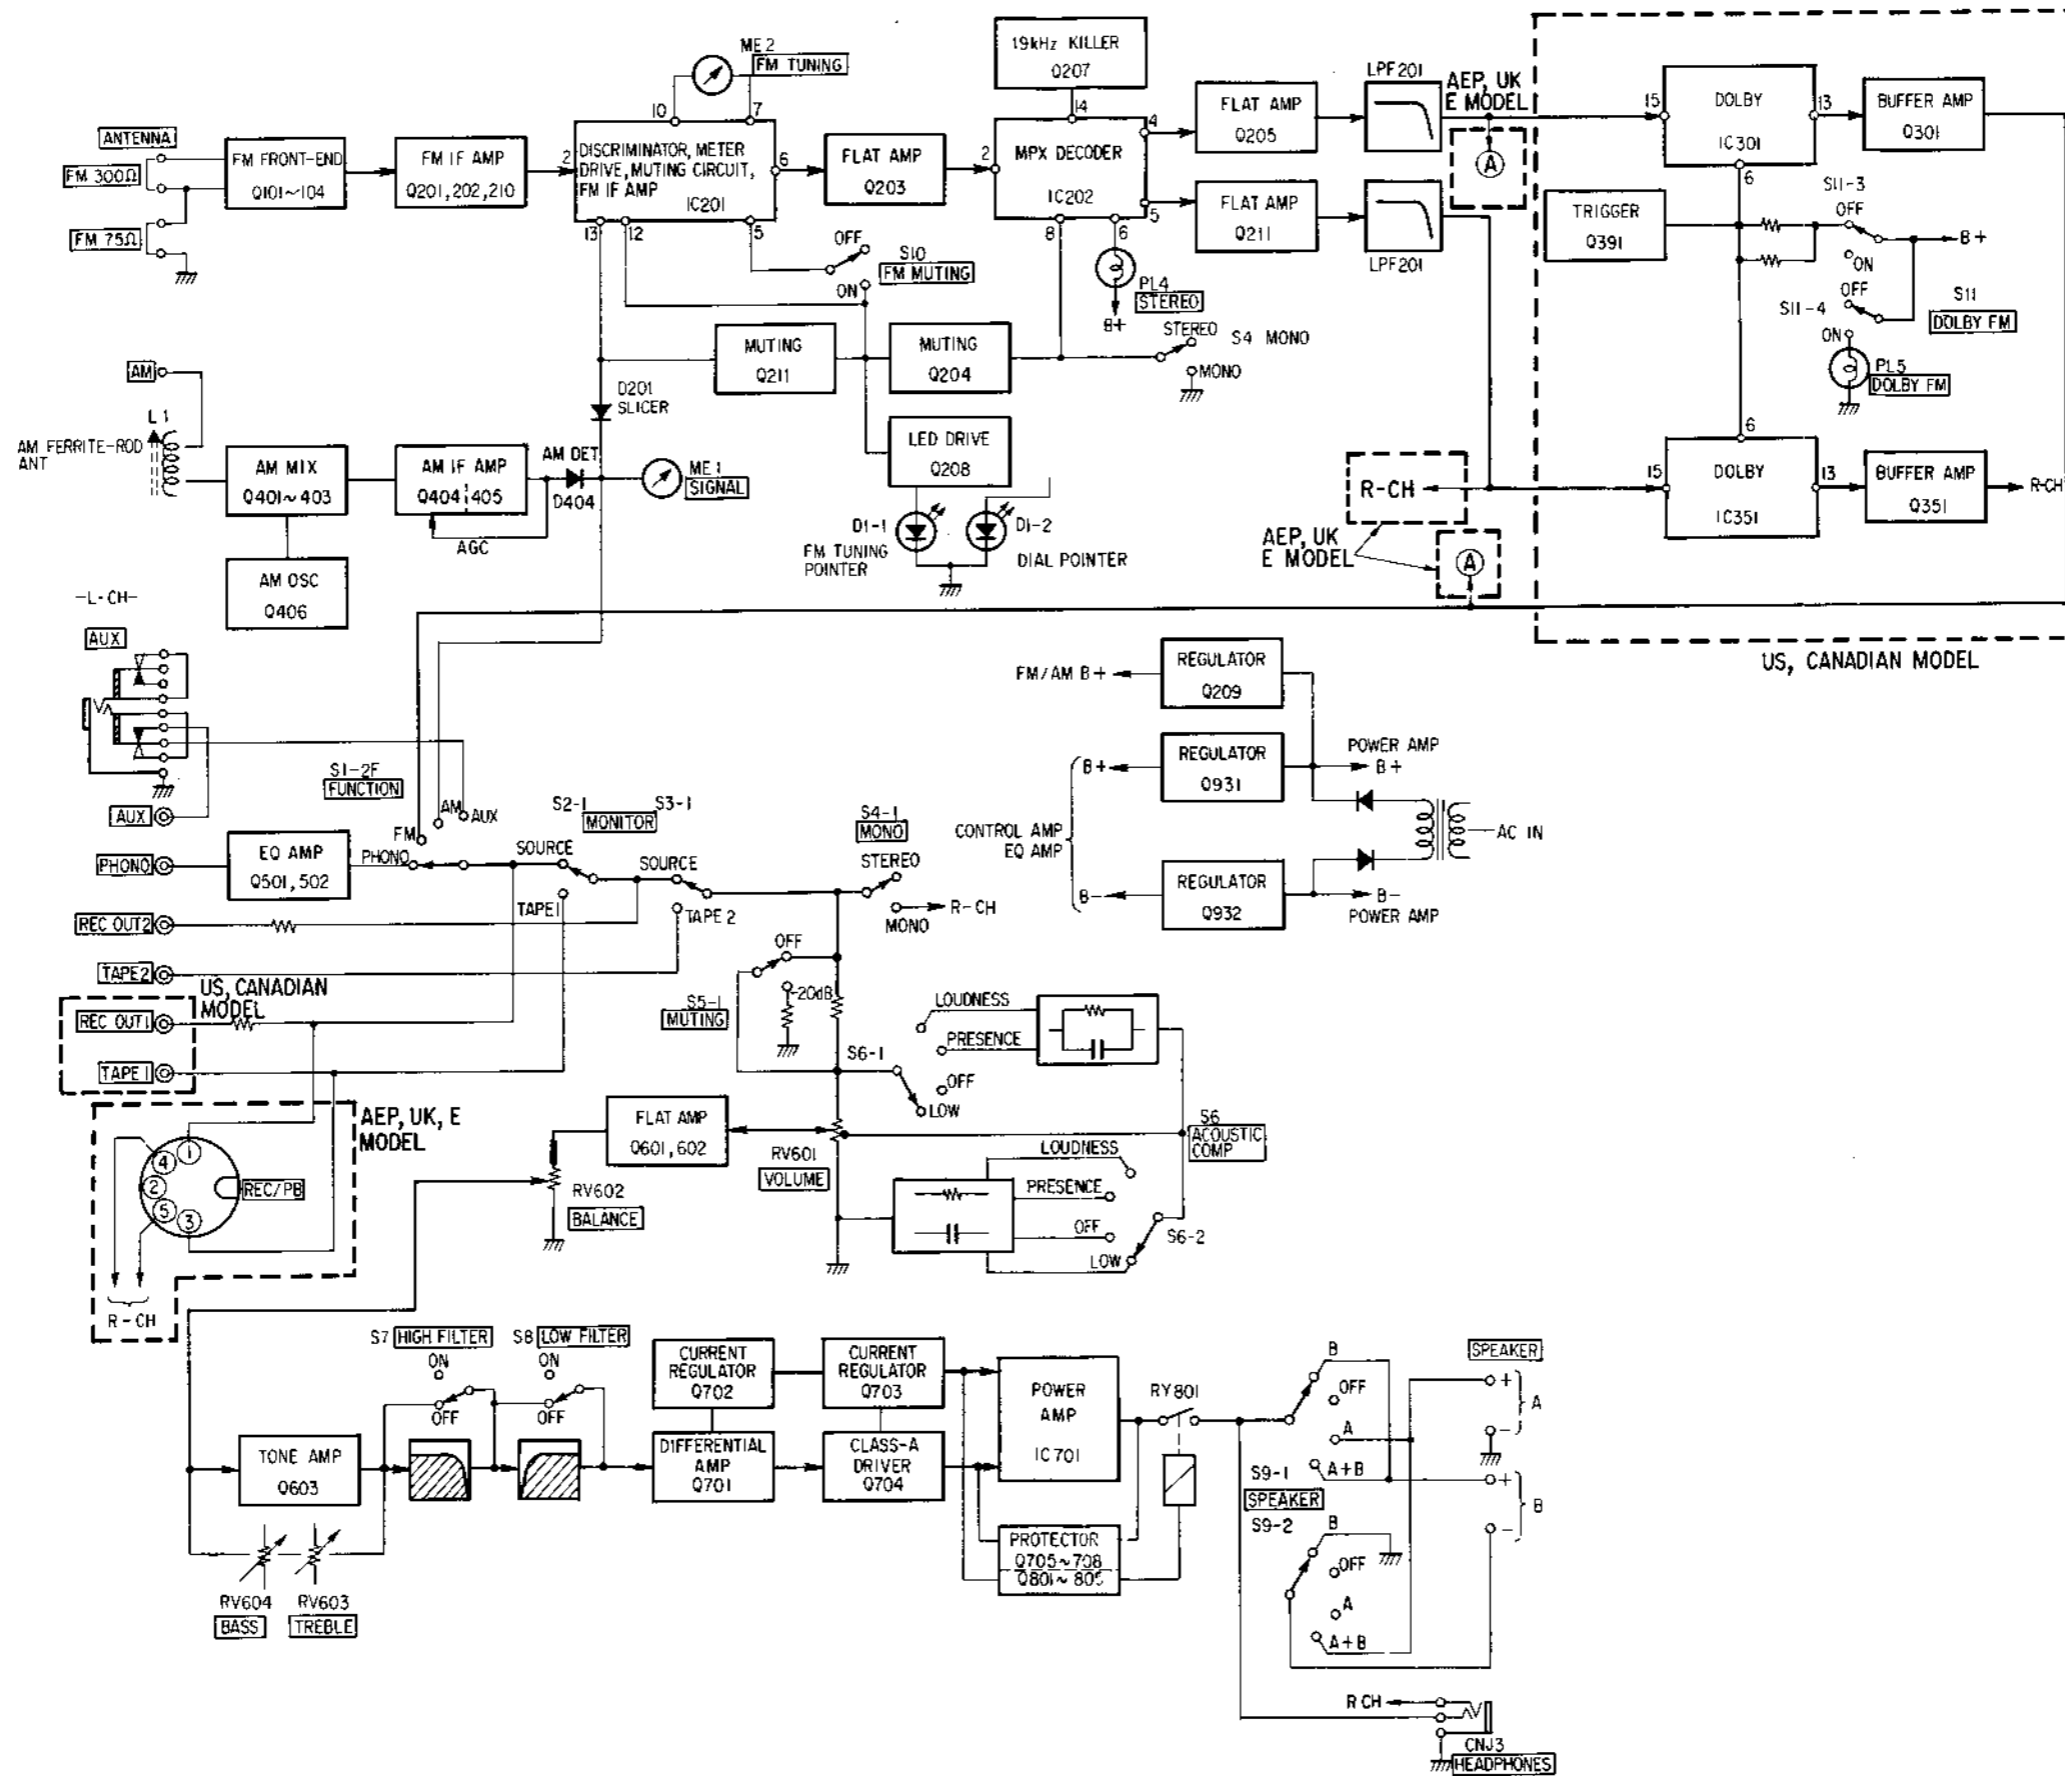

SECTION 2

DISASSEMBLY AND REPLACEMENT


2-1. REMOVAL

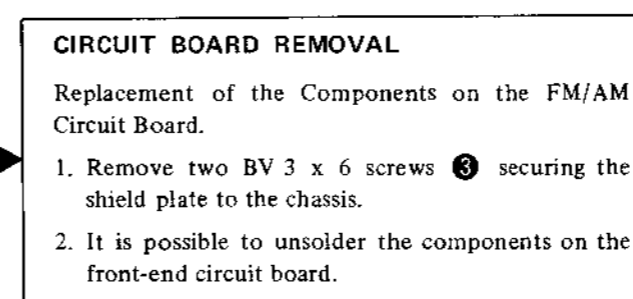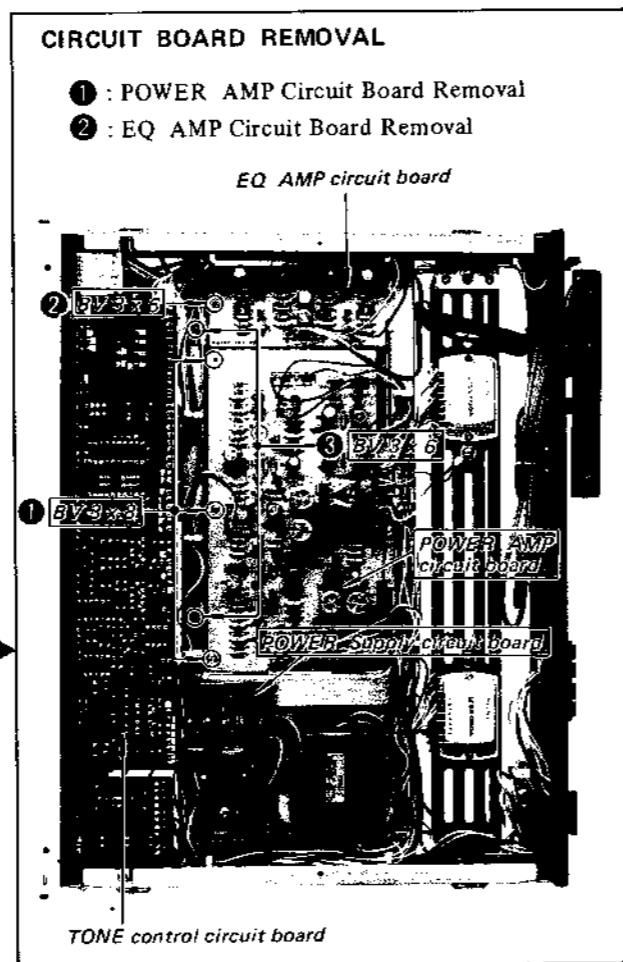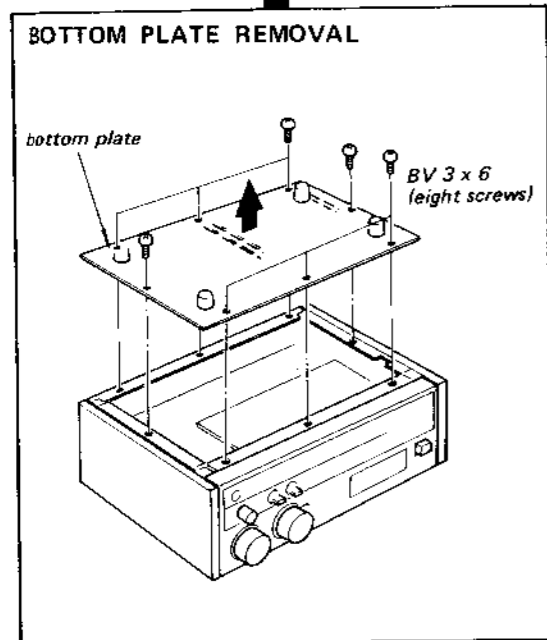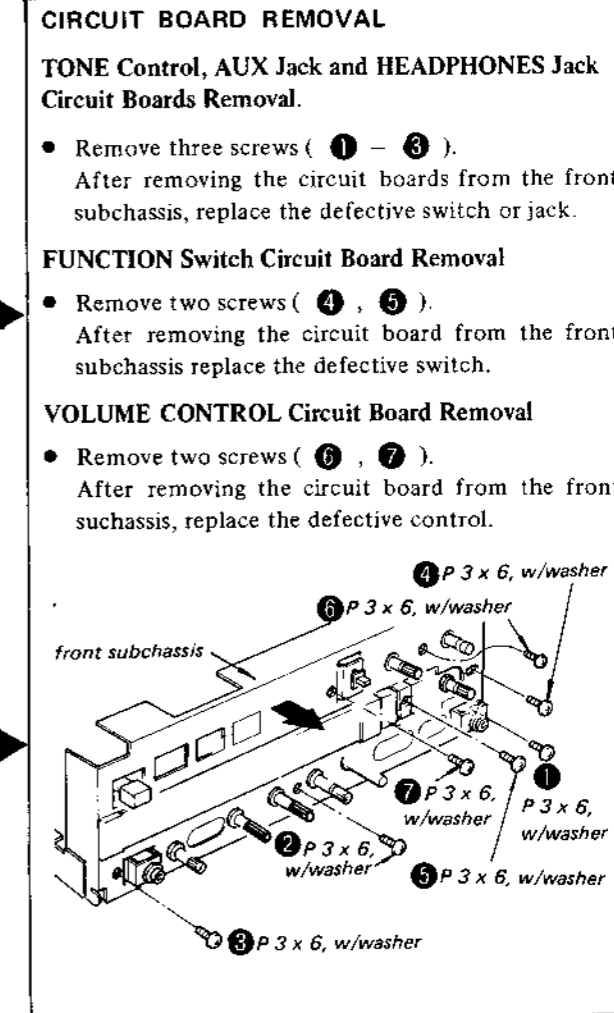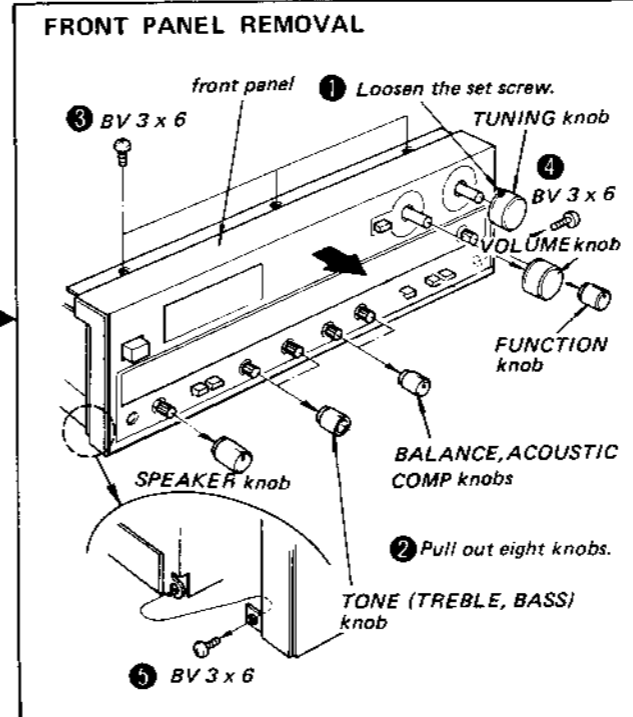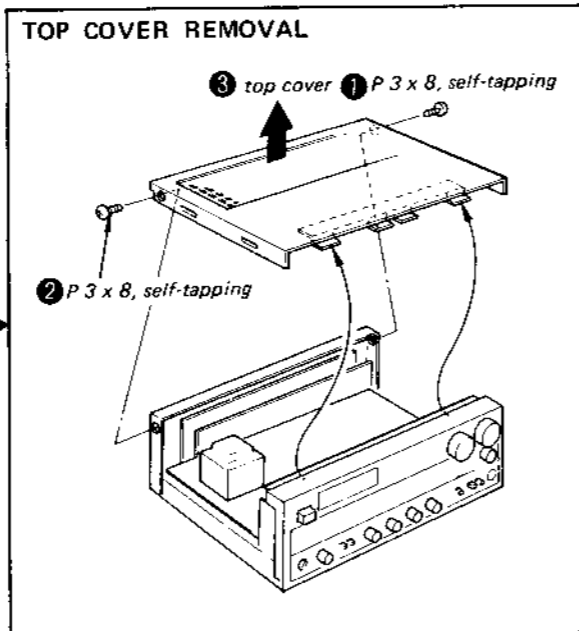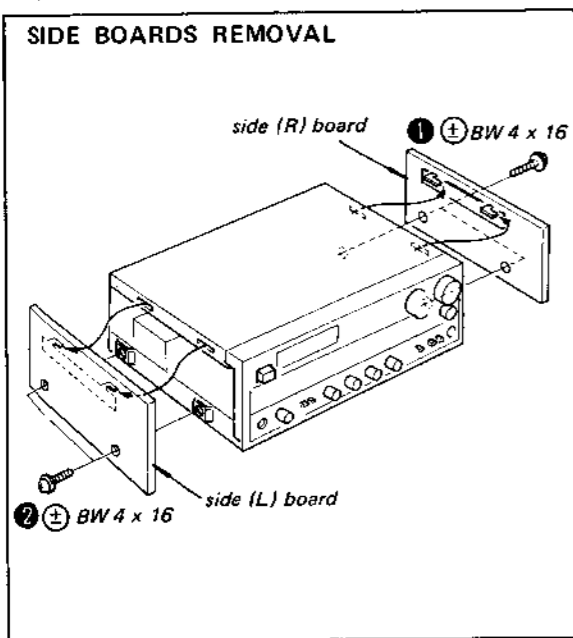


ALIGNMENTS AND ADJUSTMENTS

2.6. DIAL CORD STRINGING

1) Dial Cord Length

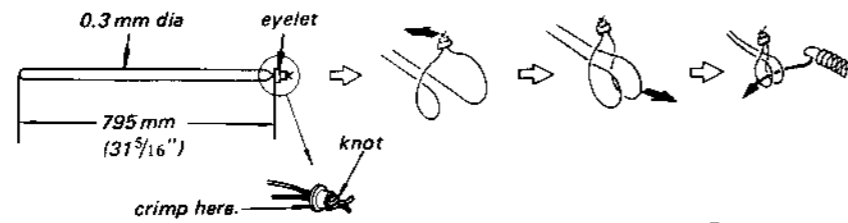

2) Dial Cord Stringing

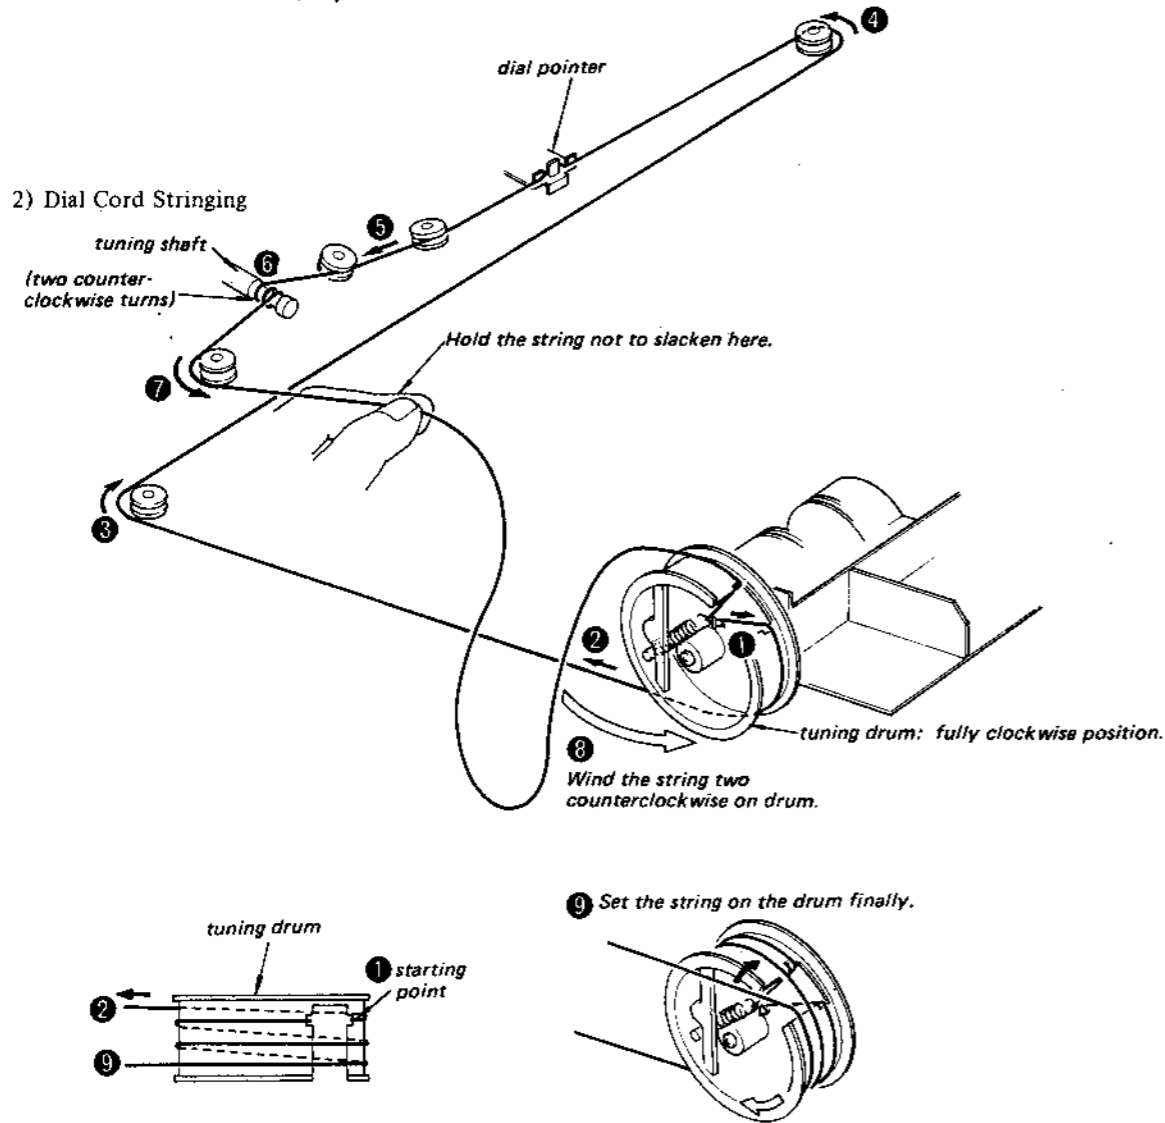



FM FREQUENCY COVERAGE AND TRACKING ADJUSTMENT

Never attempt alignment of the fm front-end section for the fm frequency coverage and tracking adjustment. If the fm frequency coverage and tracking adjustments are required, consult the factory service center.

AM FREQUENCY COVERAGE AND AM TRACKING ADJUSTMENT

Test setup:


FUNCTION selector: AM

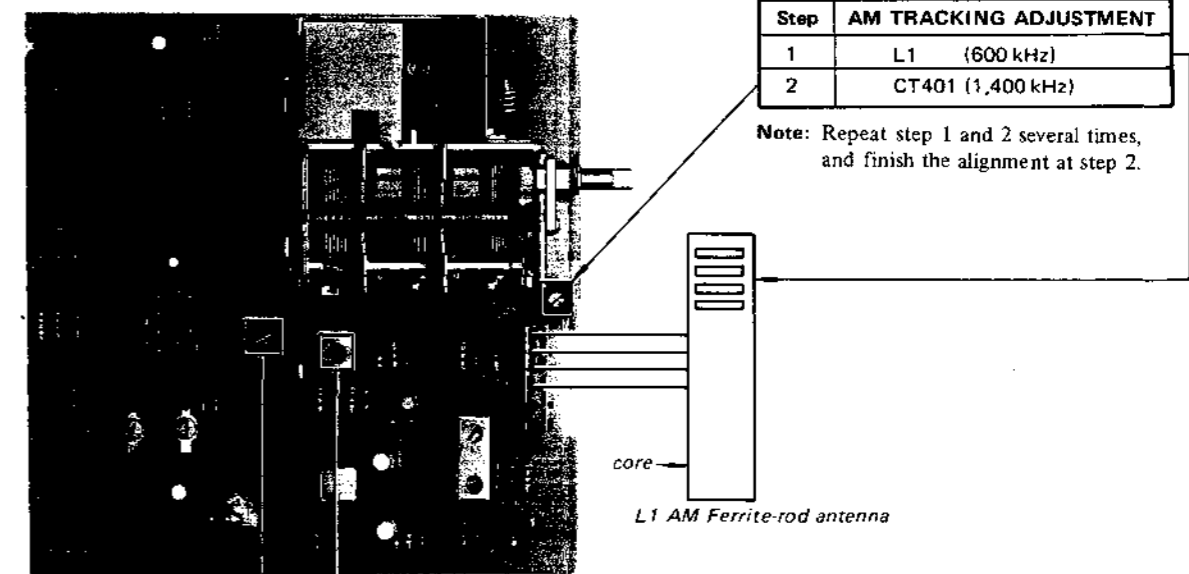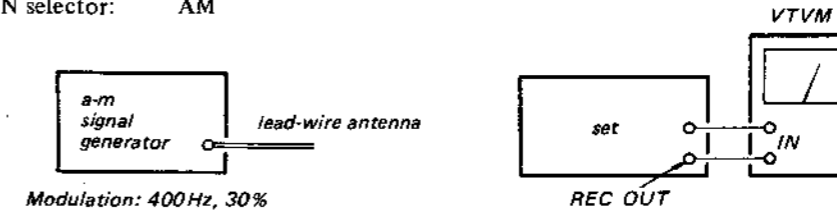

| Step | AM FREQUENCY COVERAGE ADJUSTMENT | DIAL INDICATION |
|------|----------------------------------|-----------------|
| 1    | L403 (520 kHz)                   | Lower End       |
| 2    | CT402 (1,680 kHz)                | Upper End       |

Note: Repeat step 1 and 2 several times, and finish the alignment at step 2.

**MPX ADJUSTMENT**

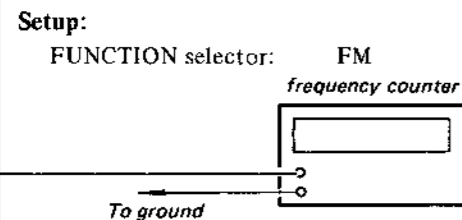

FM Signal Generator Setting:  
Carrier frequency: 98 MHz  
Modulation: no modulation  
Output level: 3.2 mV (70 dB)


Procedure:  
Adjust RT203 for 19 kHz  $\pm$  100 Hz on the counter.

Note: Perform this adjustment after the power switch turned ON and one minute passed.


**DISCRIMINATOR ALIGNMENT**

Procedure:  
FUNCTION selector: FM

1. Detune the set.
2. Adjust the secondary side core of IFT201 for zero center on the TUNING meter as shown.




**FM IF ALIGNMENT**

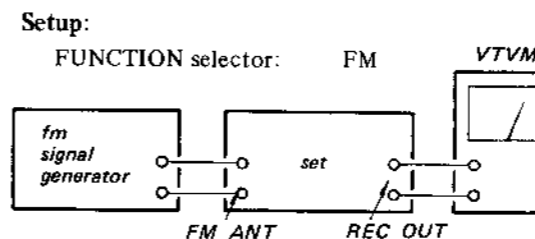

FM Signal Generator Setting:  
Carrier frequency: 98 MHz  
Modulation: 400 Hz, 75 kHz deviation (100%)

Procedure:  
Tune the set to 98 MHz and adjust IFT101 for maximum reading on the VTVM.


**FM OUTPUT LEVEL ADJUSTMENT**

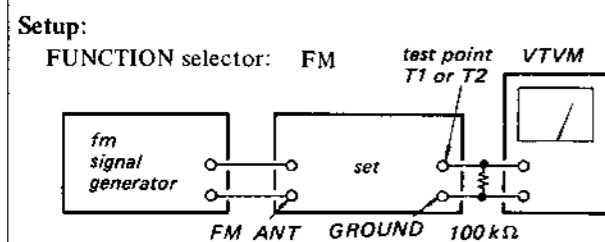

FM Signal Generator Setting:  
Carrier frequency: 98 MHz  
Modulation: 400 Hz, 75 kHz deviation (100%)  
Output level: 1 mV (60 dB)



Procedure:  
Adjust RT202 for 870 mV on the VTVM.

**SIGNAL METER CALIBRATION**

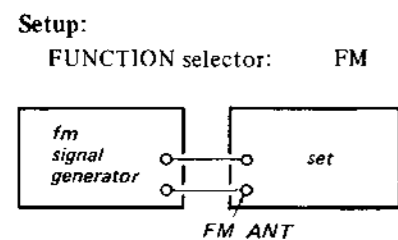


FM Signal Generator Setting:  
Carrier frequency: 98 MHz  
Modulation: no modulation  
Output level: 3.2 mV (70 dB)

Procedure:  
Tune the set to 98 MHz and adjust RT201 for specified pointer position on the SIGNAL meter as shown.

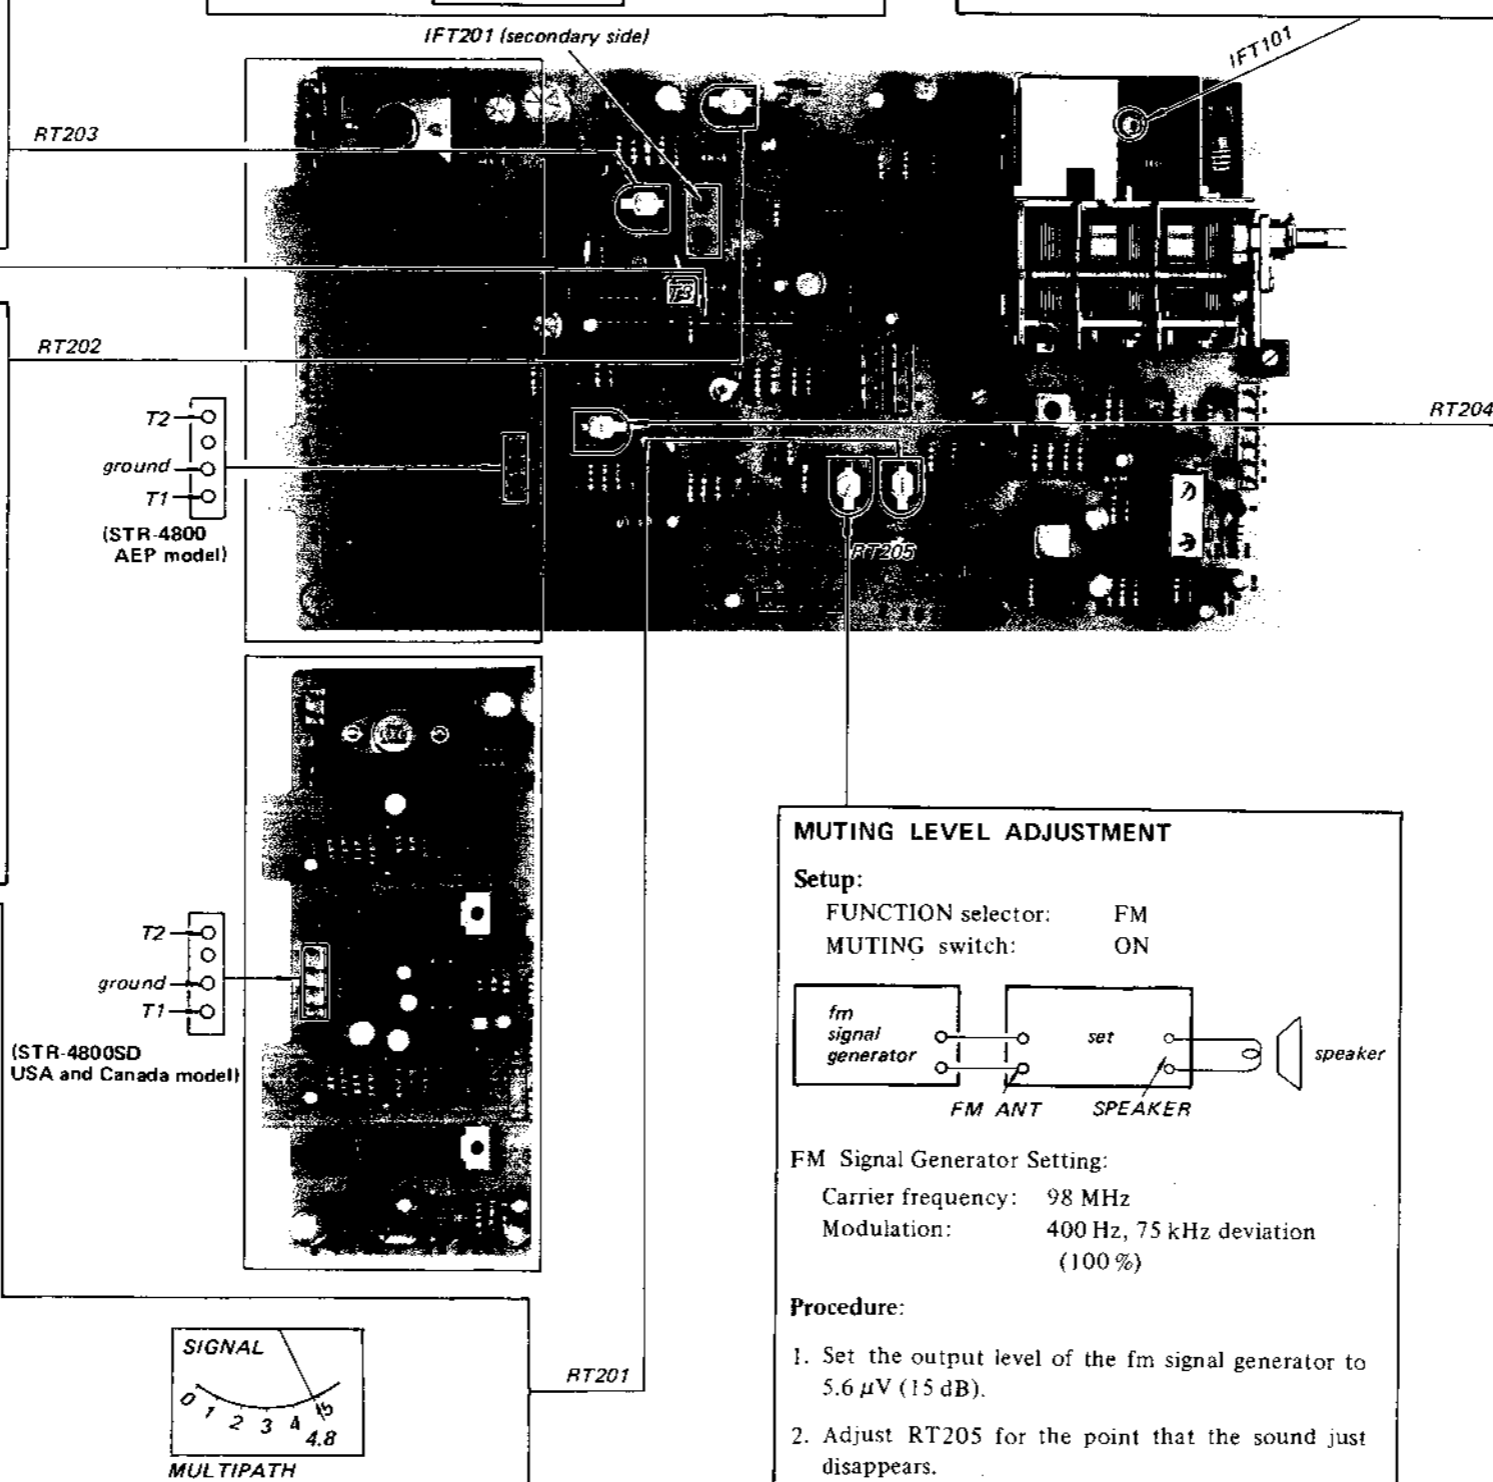

**FM STEREO SEPARATION ADJUSTMENT**

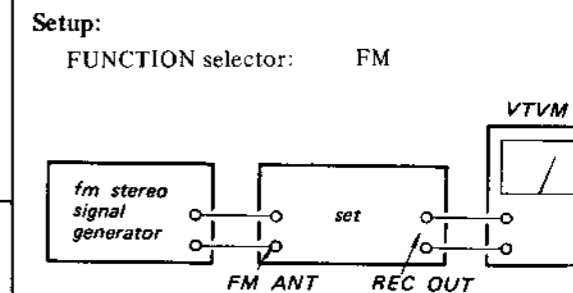


FM Stereo Signal Generator Setting:  
Carrier frequency: 98 MHz  
Output level: 1 mV (60 dB)  
Mode: Stereo  
Audio (400 Hz) Mode: 67.5 kHz (90%)  
Pilot (19 kHz) Mode: 7.5 kHz (10%)

Procedure:

| FM stereo signal generator modulated channel | VTVM connection | VTVM reading |
|--|-----------------|--------------|
| L-CH   | L-CH            | (A)          |
| R-CH   | L-CH            | (B)          |
| R-CH   | R-CH            | (C)          |
| L-CH   | R-CH            | (D)          |

Stereo separation: (A) - (B), (C) - (D).  
The difference of the stereo separation between (A) - (B) and (C) - (D) should be within 3 dB.

**MUTING LEVEL ADJUSTMENT**

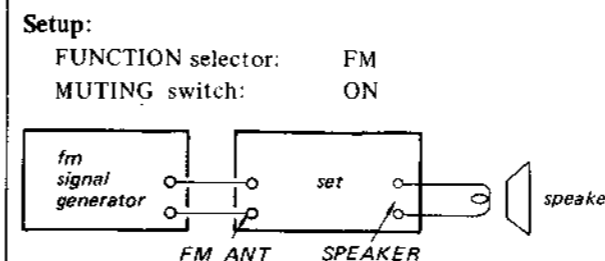

FM Signal Generator Setting:  
Carrier frequency: 98 MHz  
Modulation: 400 Hz, 75 kHz deviation (100%)


Procedure:  
1. Set the output level of the fm signal generator to 5.6  $\mu$ V (15 dB).  
2. Adjust RT205 for the point that the sound just disappears.



DIAGRAMS

STR-4800 (AEP, UK, E Model)


4-1. MOUNTING DIAGRAM -- Front-End, FM/AM Circuit Boards --  
-- Conductor Side --

|      |         |                   |     |     |     |     |     |     |       |     |     |     |     |       |     |     |
|------|---------|-------------------|-----|-----|-----|-----|-----|-----|-------|-----|-----|-----|-----|-------|-----|-----|
| D    | 402,401 |                   | 403 | 404 |     | 201 |     | 202 | 261   | 203 |     | 204 |     | 209   |     |     |
| Q,IC | 401     | 403<br>402<br>404 | 405 | 406 | 201 | 202 | 210 | 208 | IC201 | 211 | 204 | 206 | 205 | IC202 | 203 | 207 |

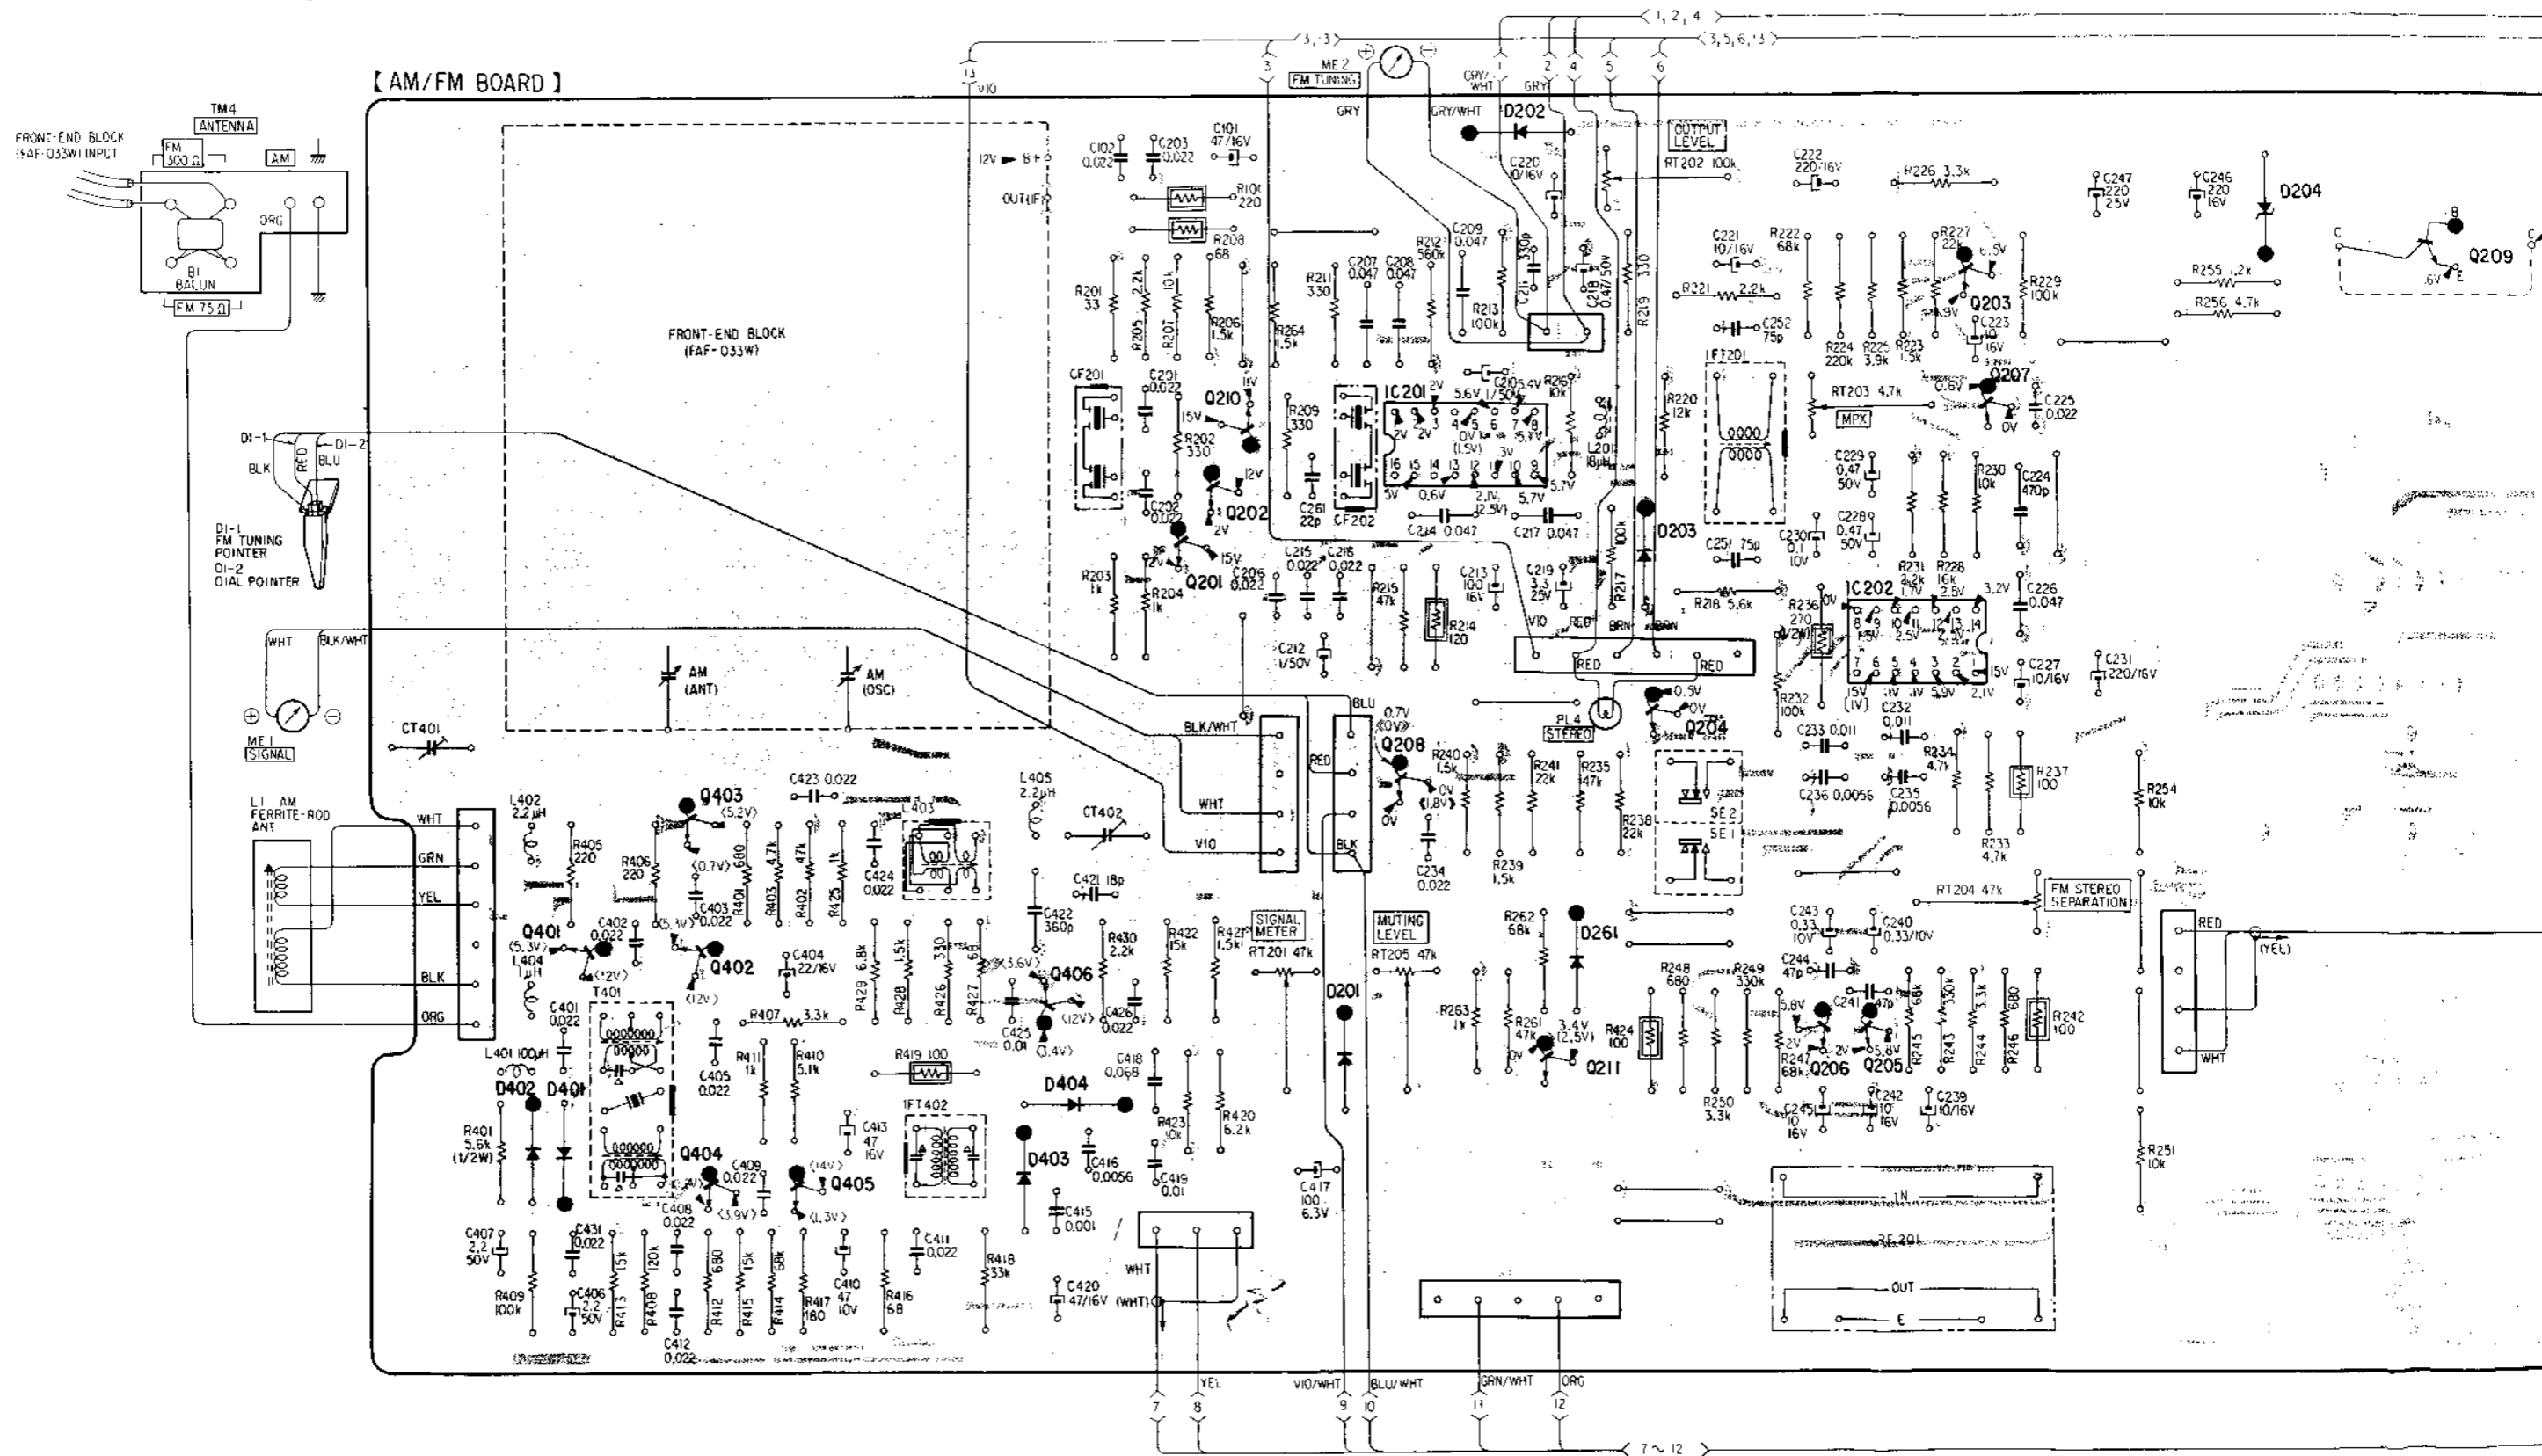


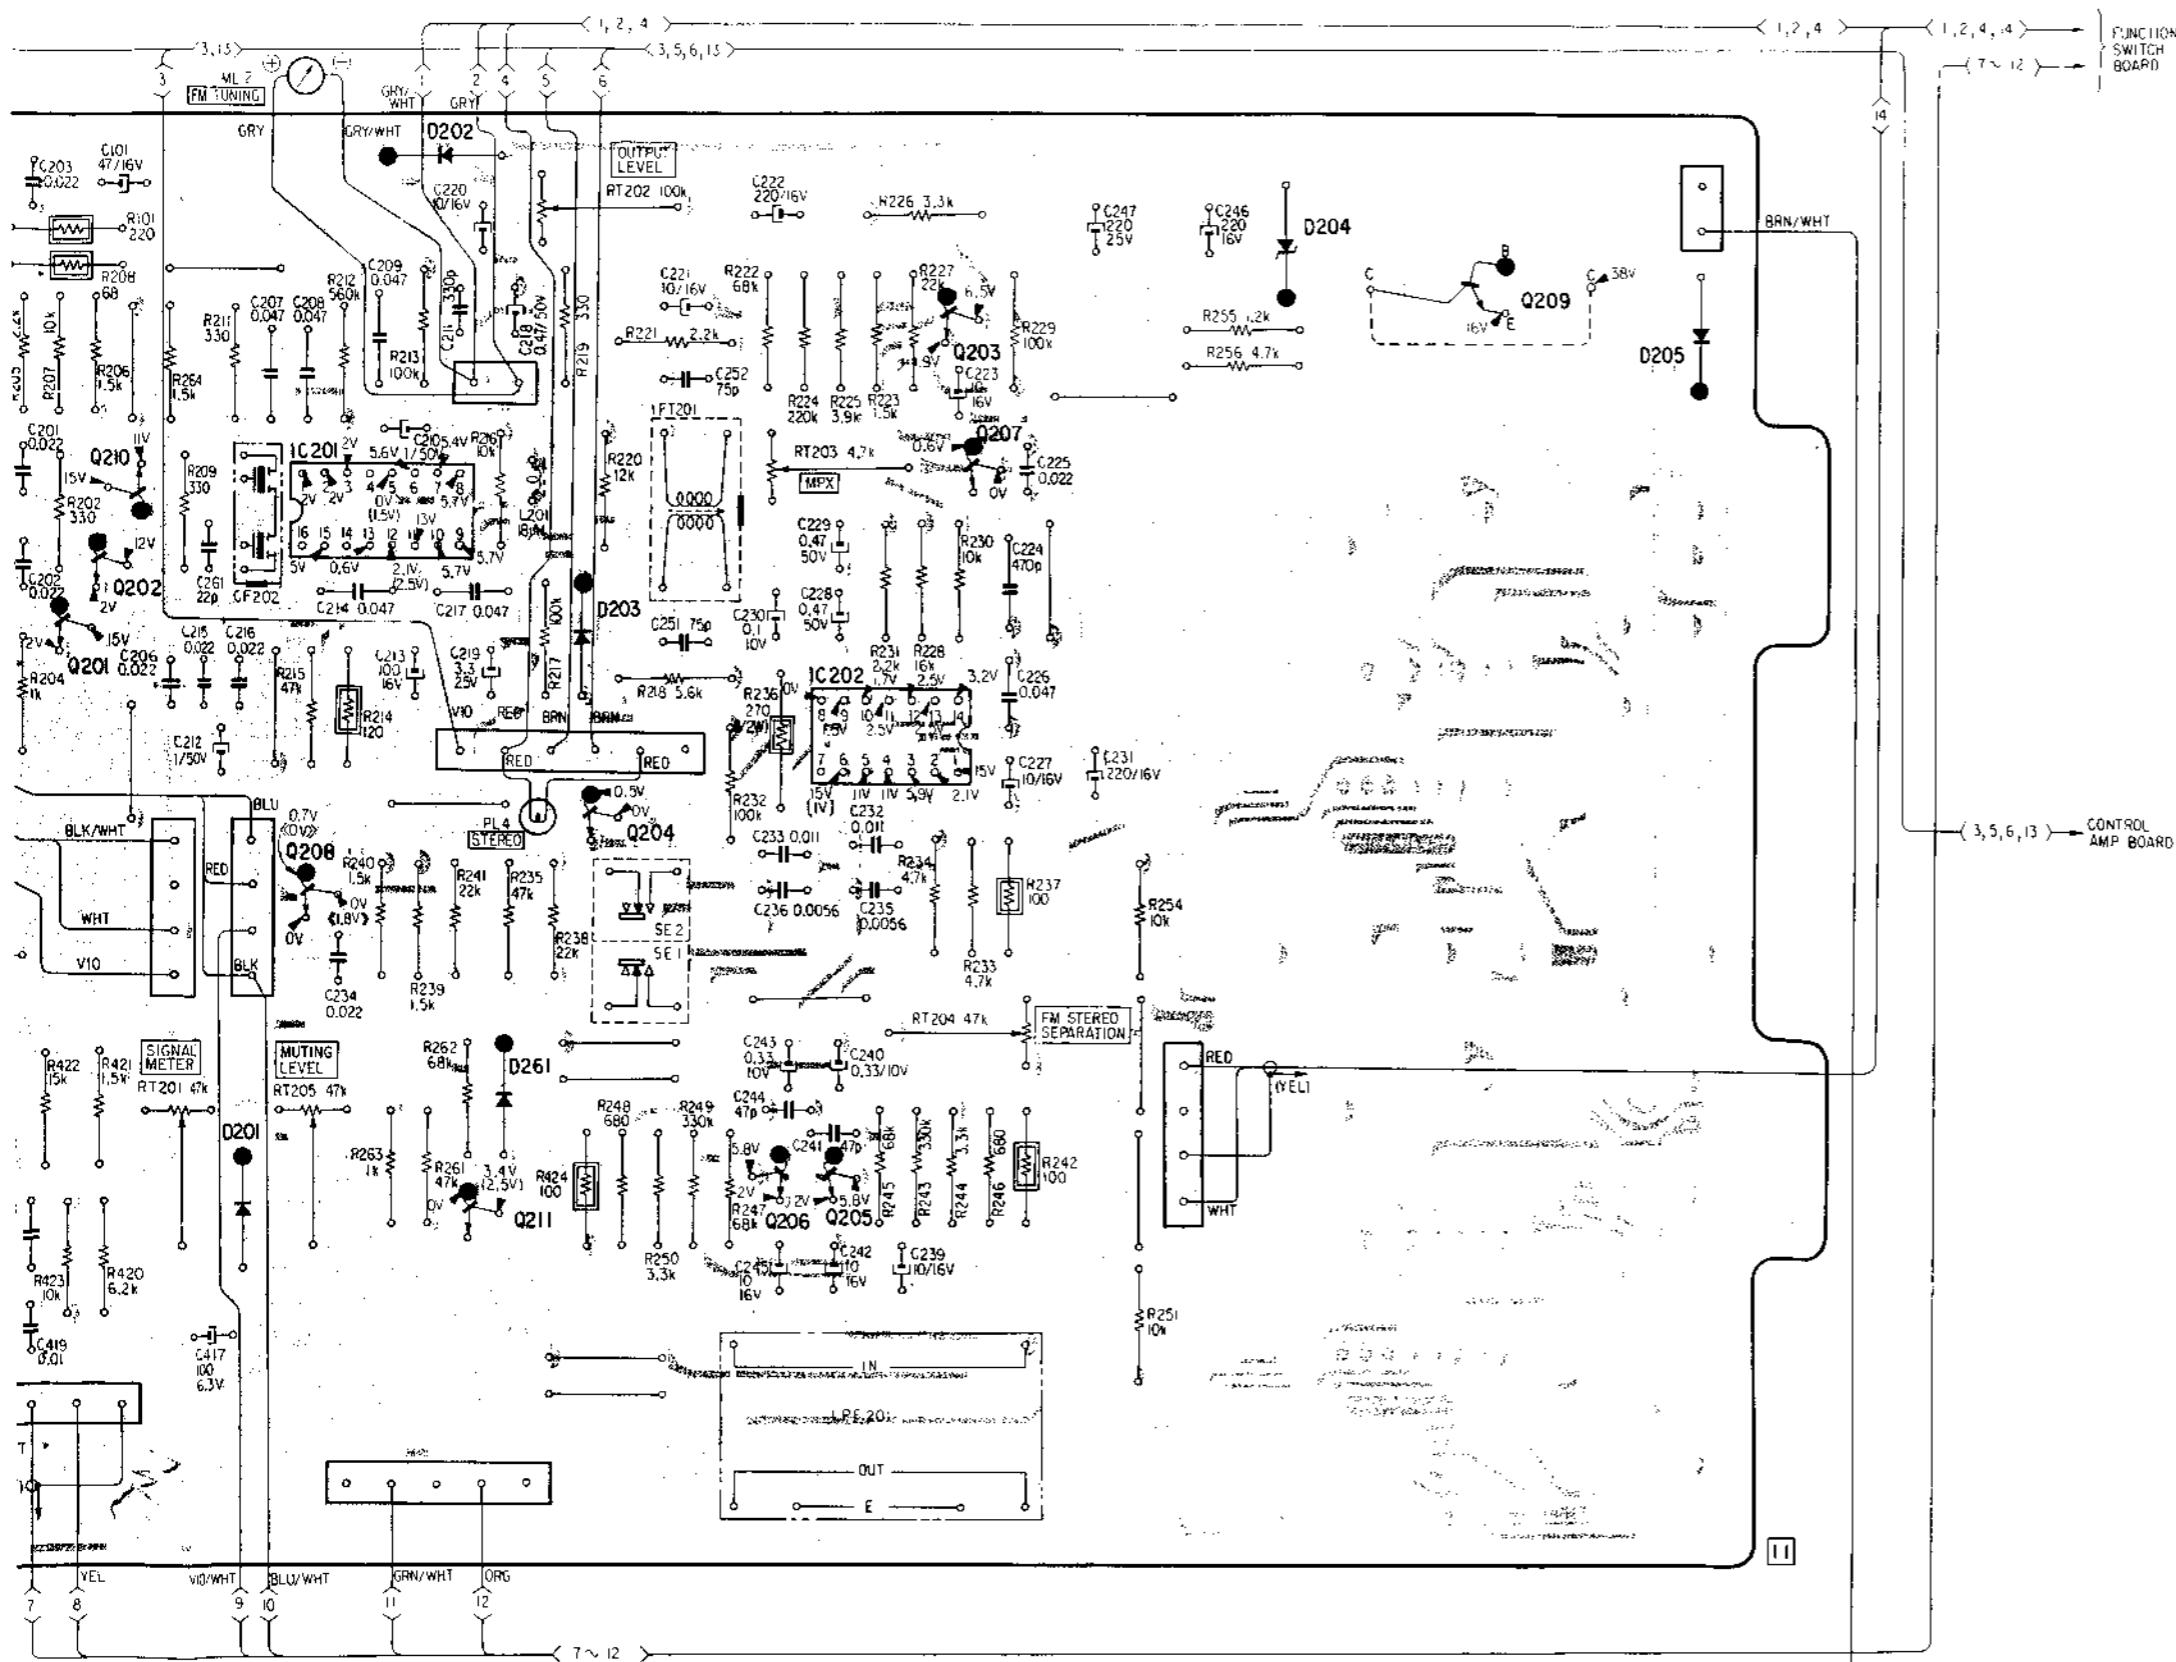


Q201, 202, 210 } 2SC403  
 Q410 }  
 Q403 : 2SC632A




Q204, 207, 208, 211 } 2SC945




Q209 : 2SD291




Q405, 406 : 2SC710



IC201 : HA1137W




IC202 : HA1156




D201, 202, 261, 401, 402 } 1T40

D203, 403, 404 : 1T22A


D205 : 10E2



D204 : EQA01-16R



Note: • B+ pattern






STR-4800SD (US, Canadian Model)


4-2. MOUNTING DIAGRAM - Front-End, FM/AM Circuit Boards -

- Conductor Side -


|       |          |            |     |     |     |     |     |       |     |     |     |     |       |     |     |     |       |       |       |       |
|-------|----------|------------|-----|-----|-----|-----|-----|-------|-----|-----|-----|-----|-------|-----|-----|-----|-------|-------|-------|-------|
| D     | 402, 401 | 403        | 404 | 403 | 404 | 201 | 202 | 201   | 202 | 203 | 204 | 203 | 204   | 203 | 204 | 204 | 391   | 351   | IC351 | 209   |
| Q, IC | 401      | 402<br>404 | 405 | 406 | 201 | 202 | 208 | IC201 | 211 | 204 | 206 | 205 | IC202 | 207 | 391 | 351 | IC351 | IC301 | 209   | IC301 |

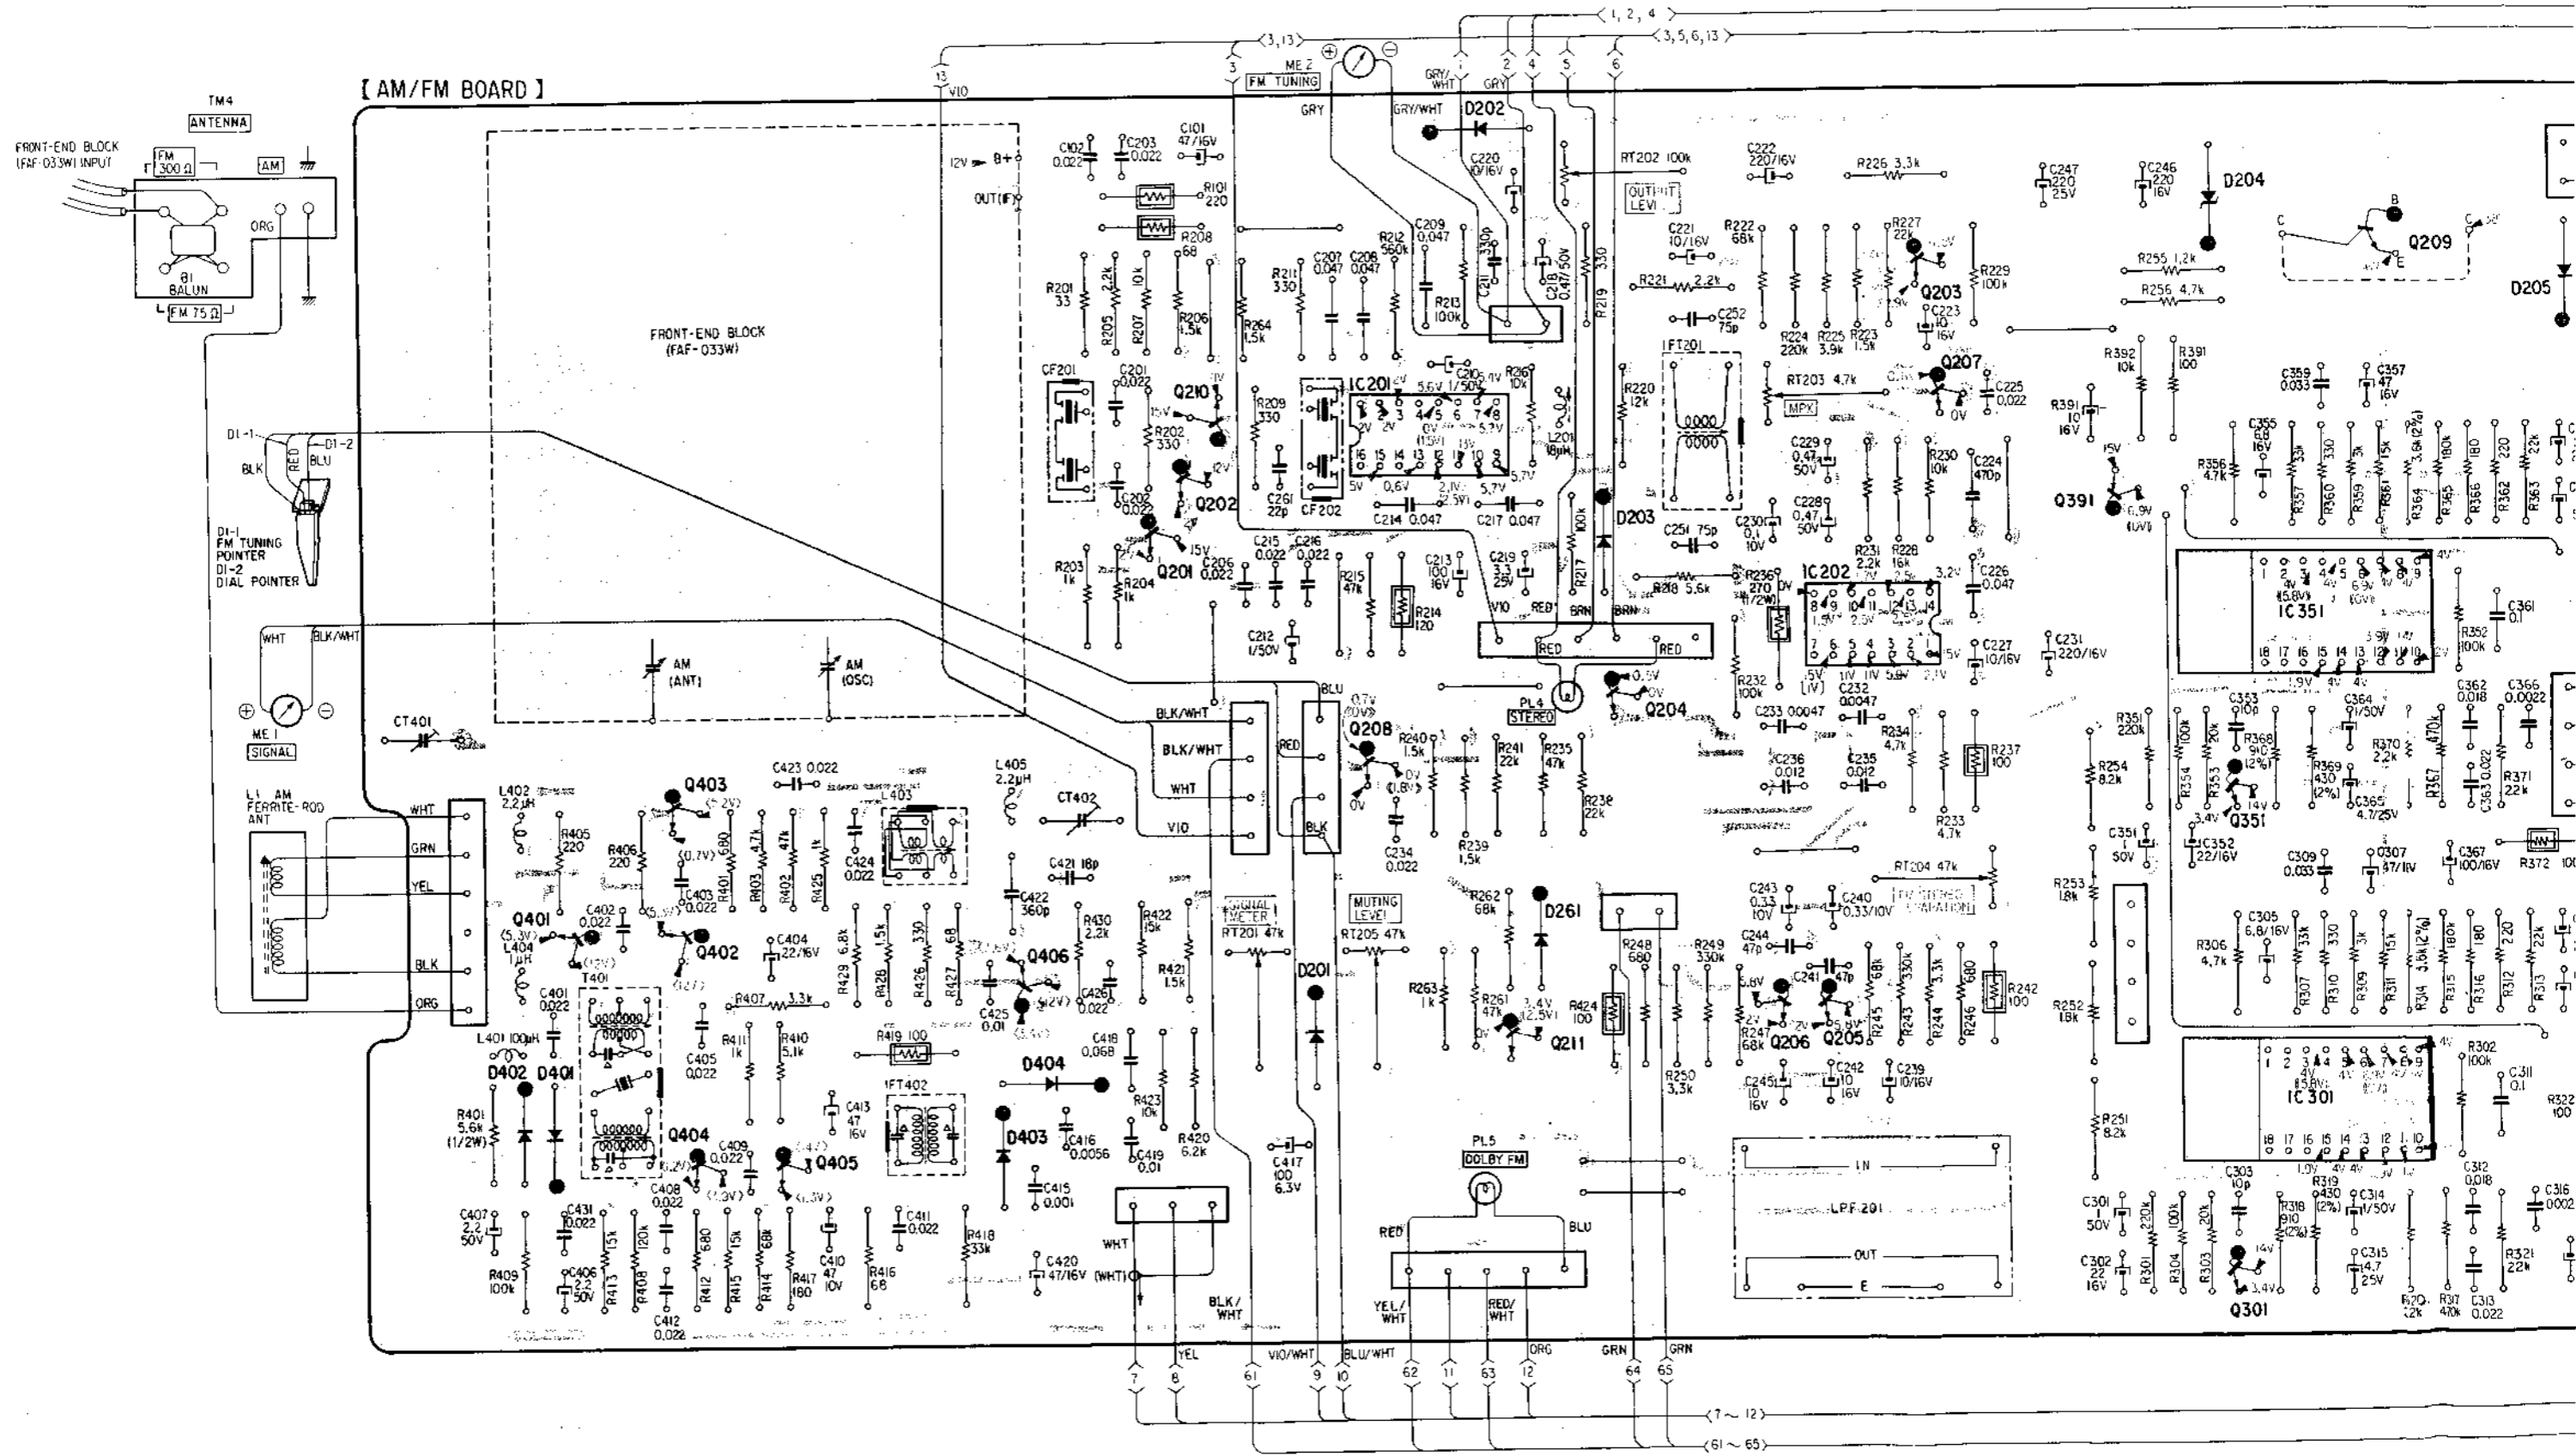


# STR-4800/4800SD STR-4800/4800SD

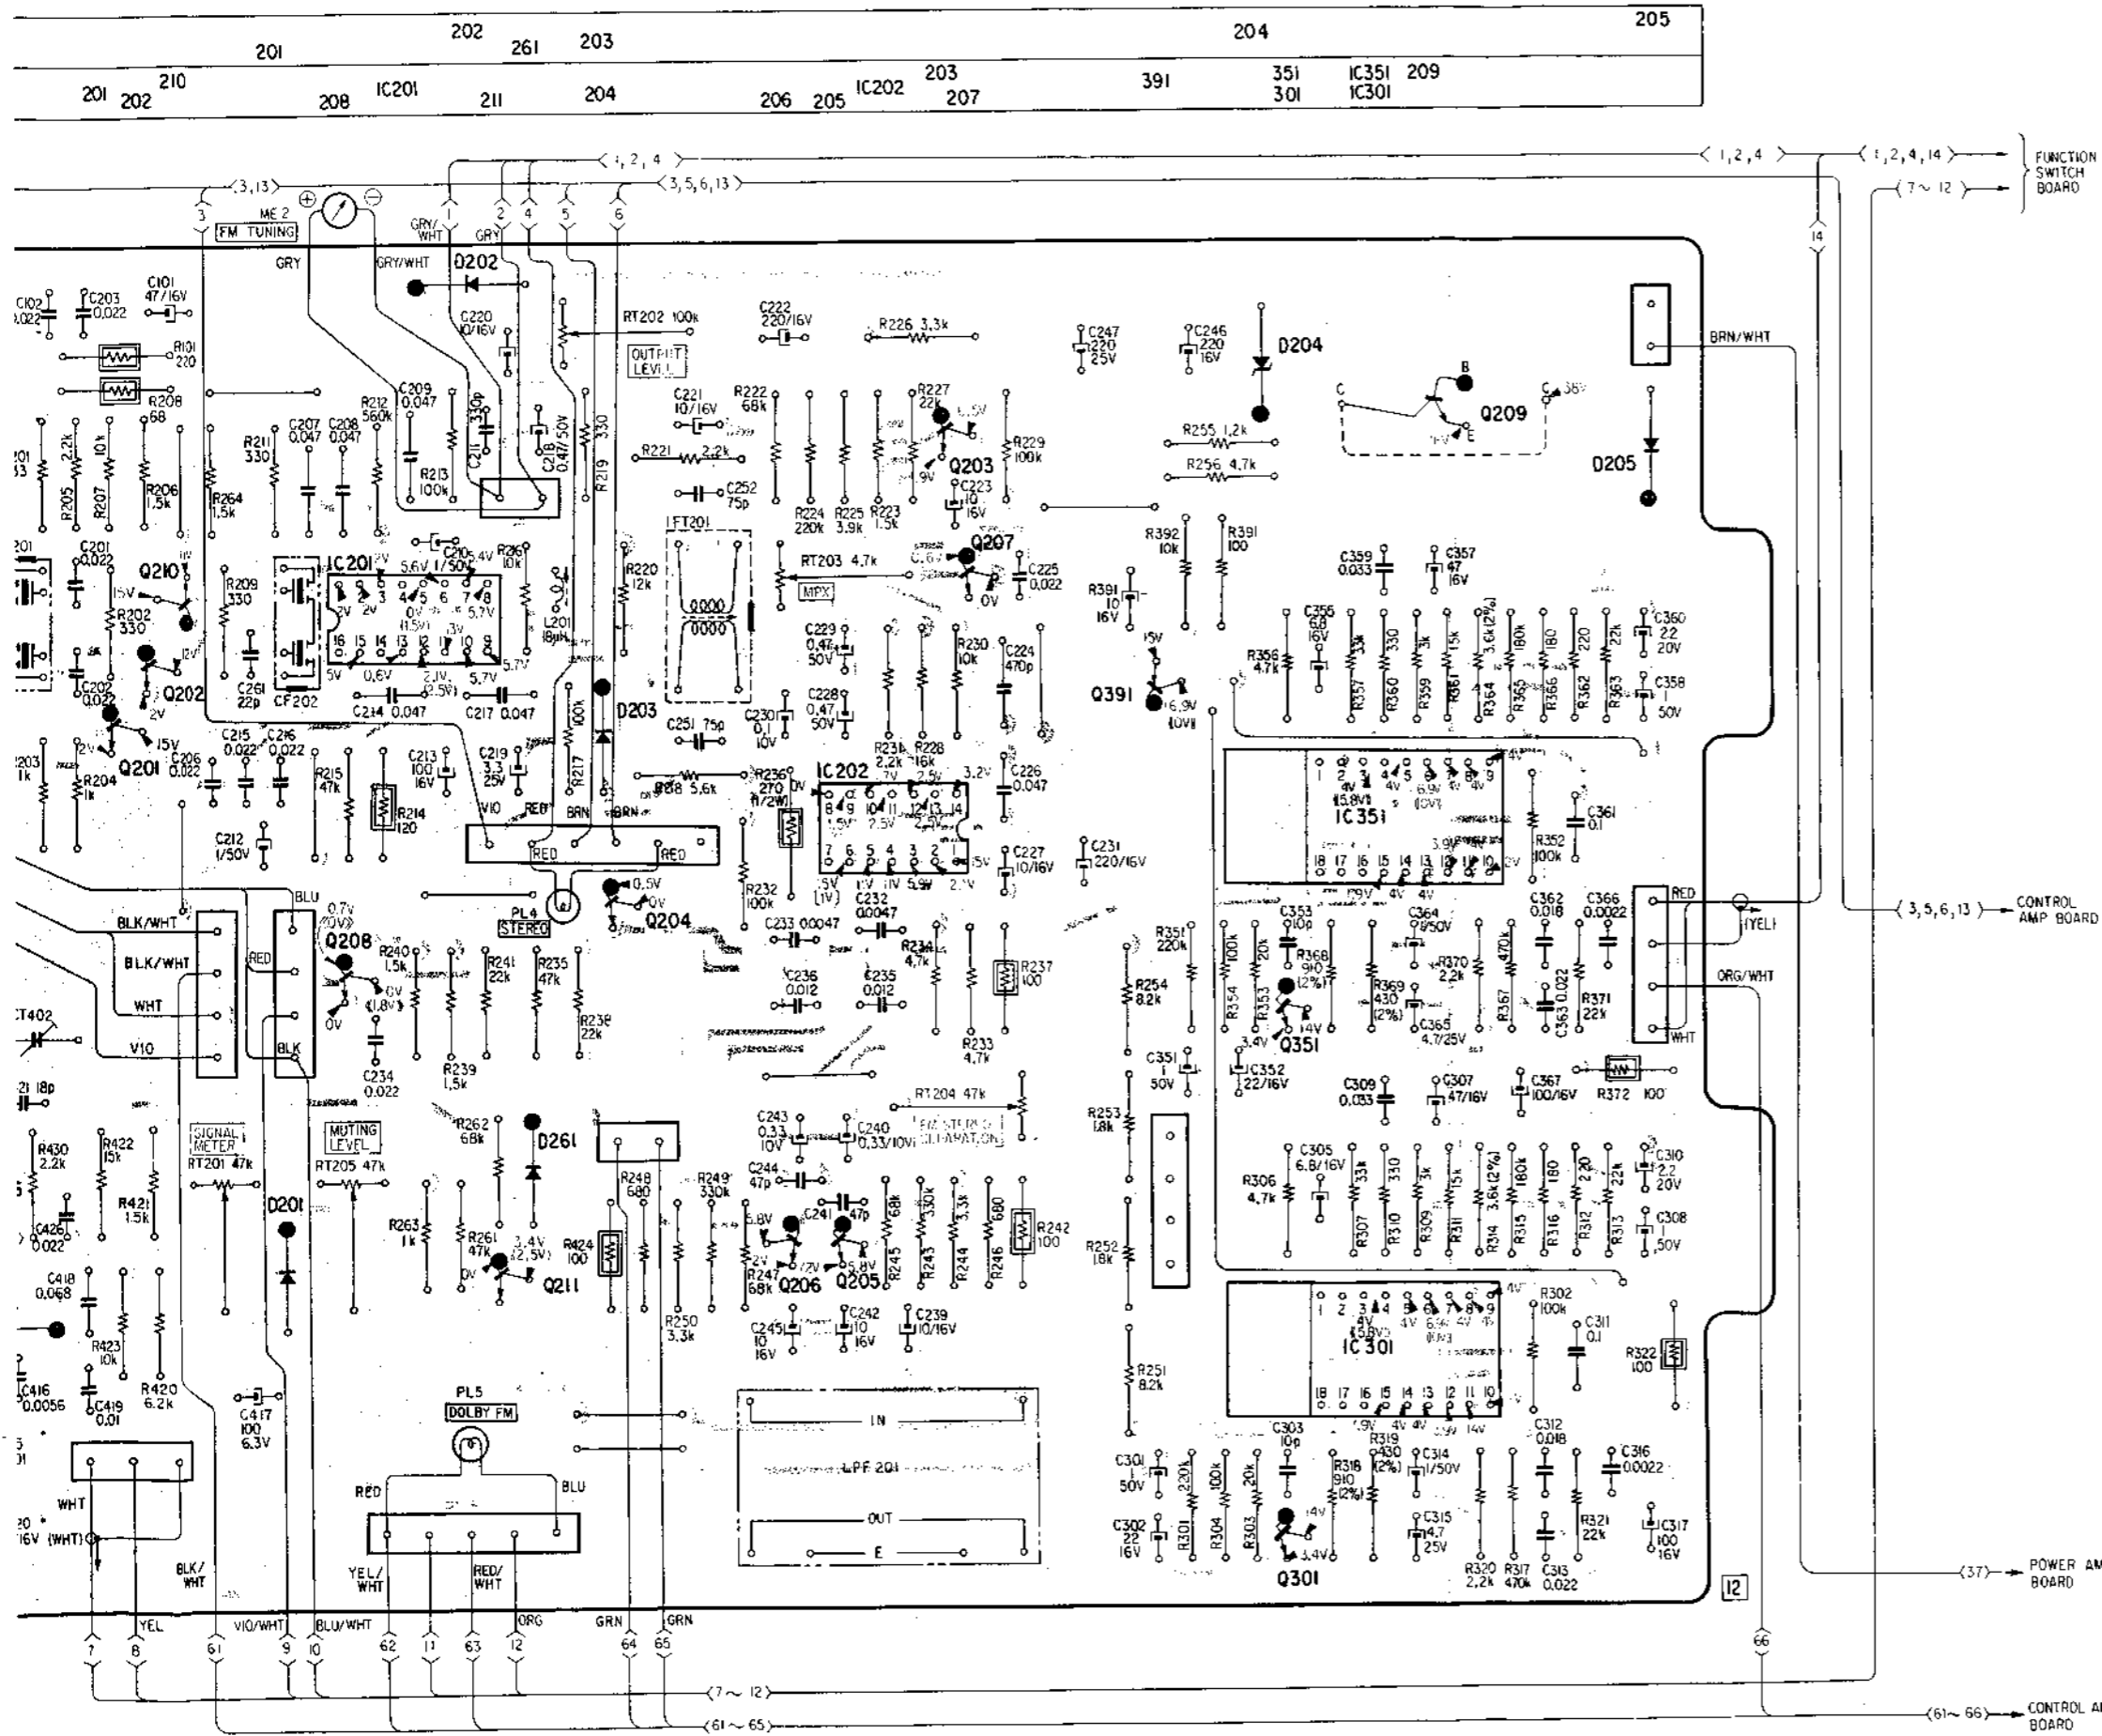


Q201, 202, 210 } : 2SC403  
 Q410 }  
 Q403 : 2SC632A




IC201: HA1137W




IC202: HA1156




Q204, 207, 208, 211 } 2SC945



IC301, 351: CX064




Q209: 2SD291




D201, 202, 261, 401, 402 } 1T40

D203, 403, 404: 1T22A


Q205: 10E2




Q391: 2SA678



D204: EQA01-16R




Q405, 406: 2SC710






Note: •

B+ pattern



4-3. SCHEMATIC DIAGRAM – Front-End, FM/AM Section –

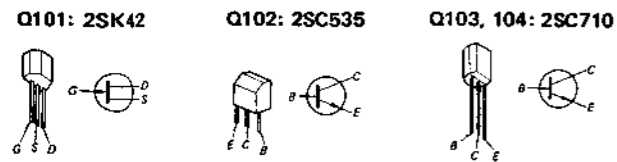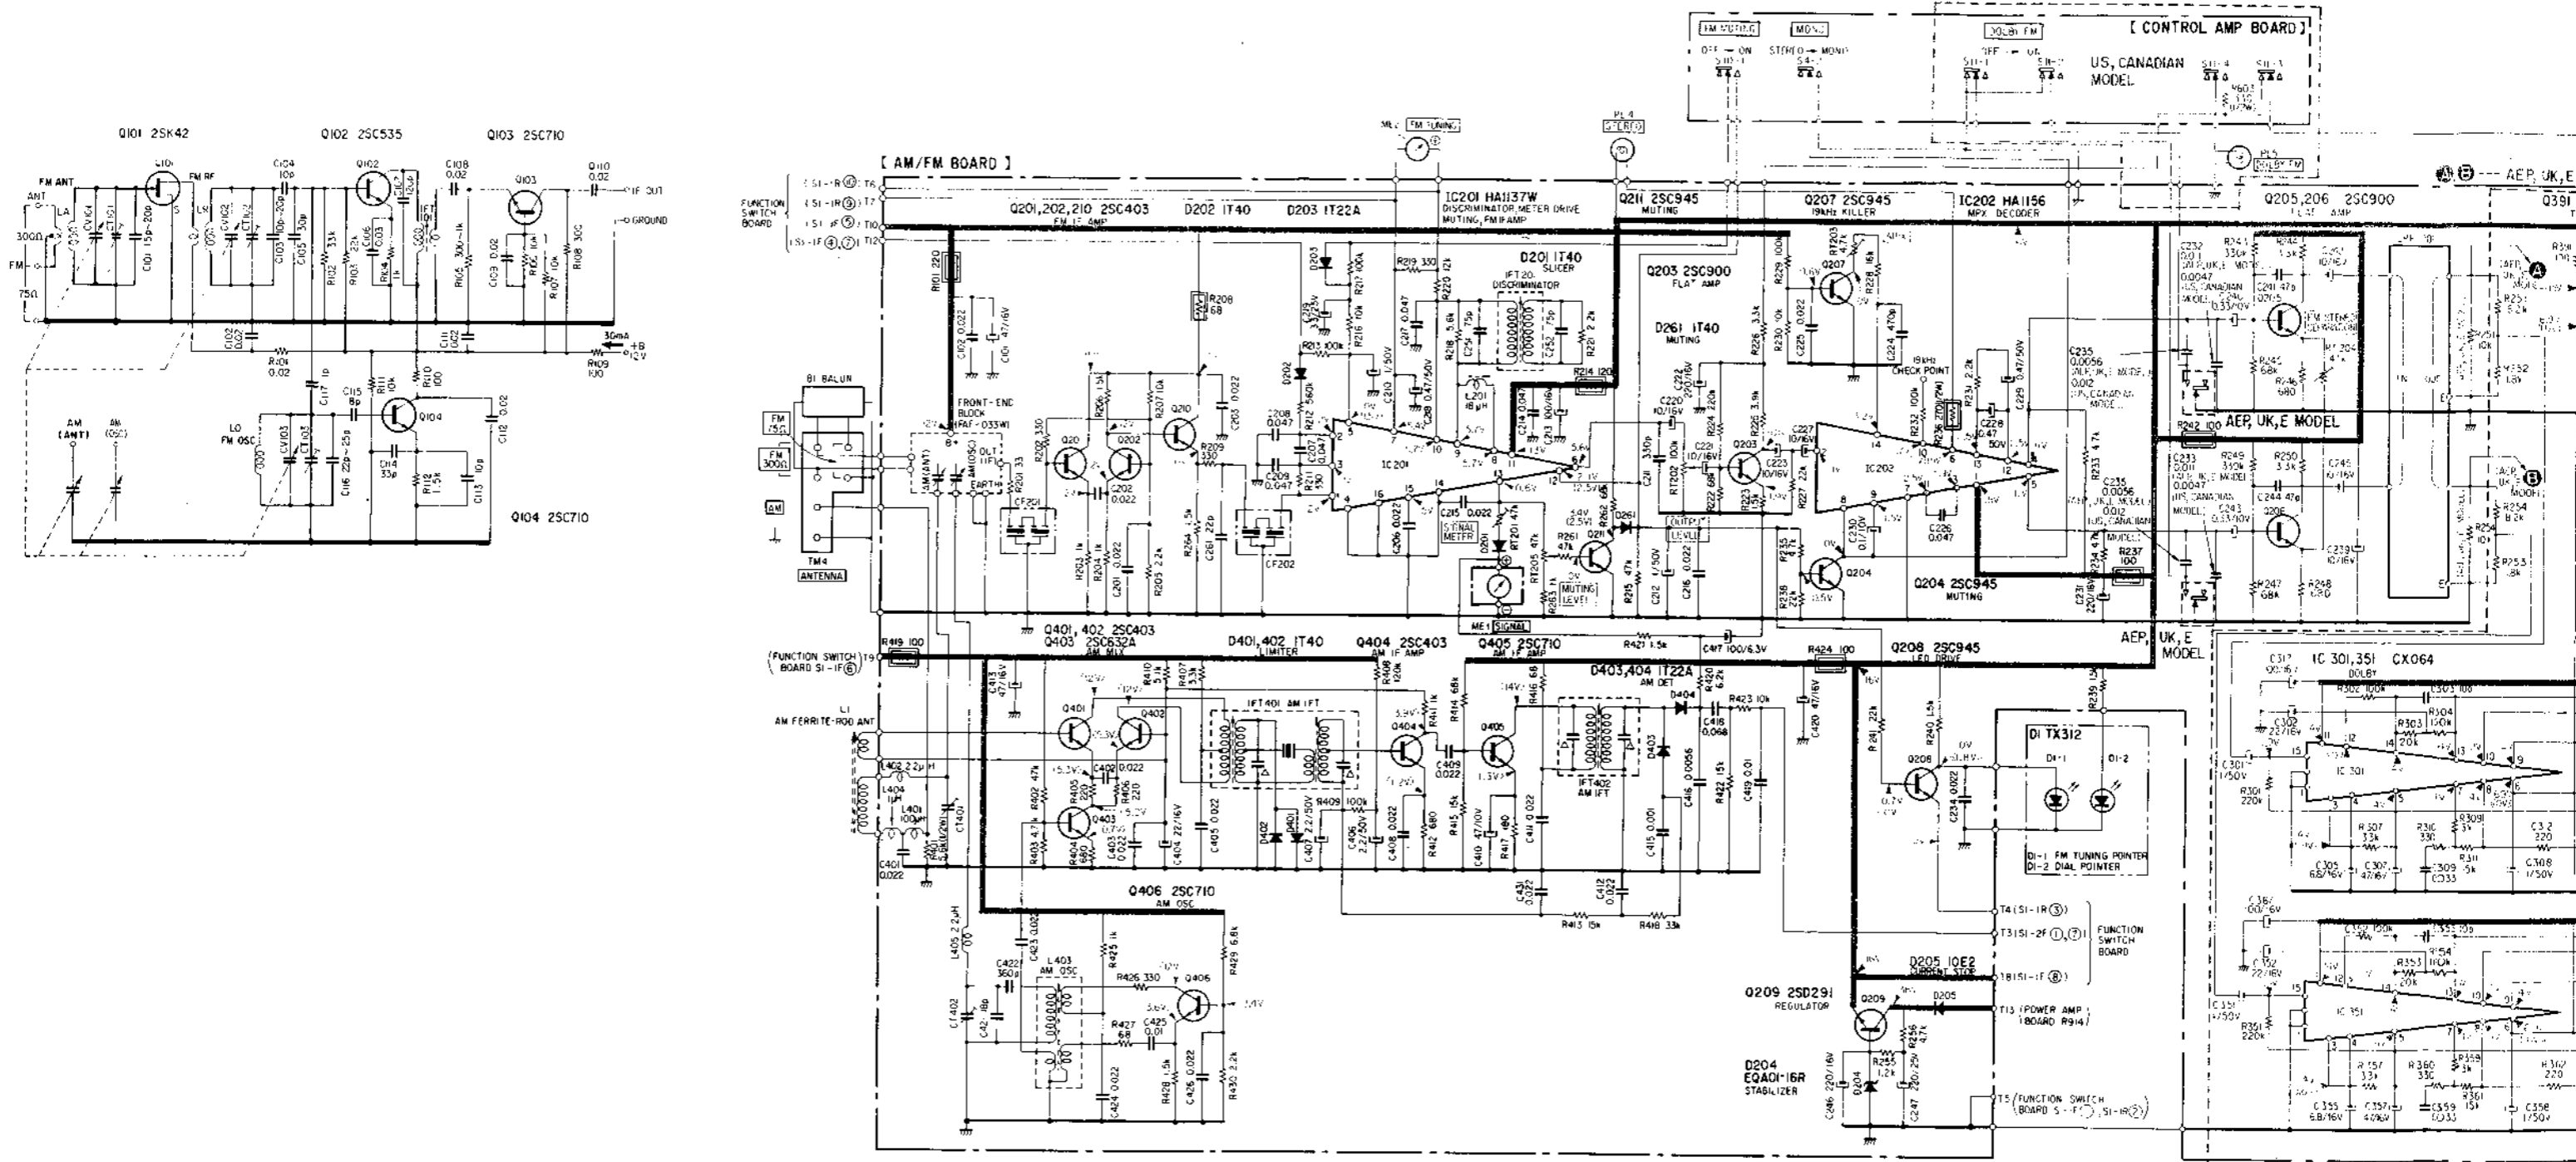

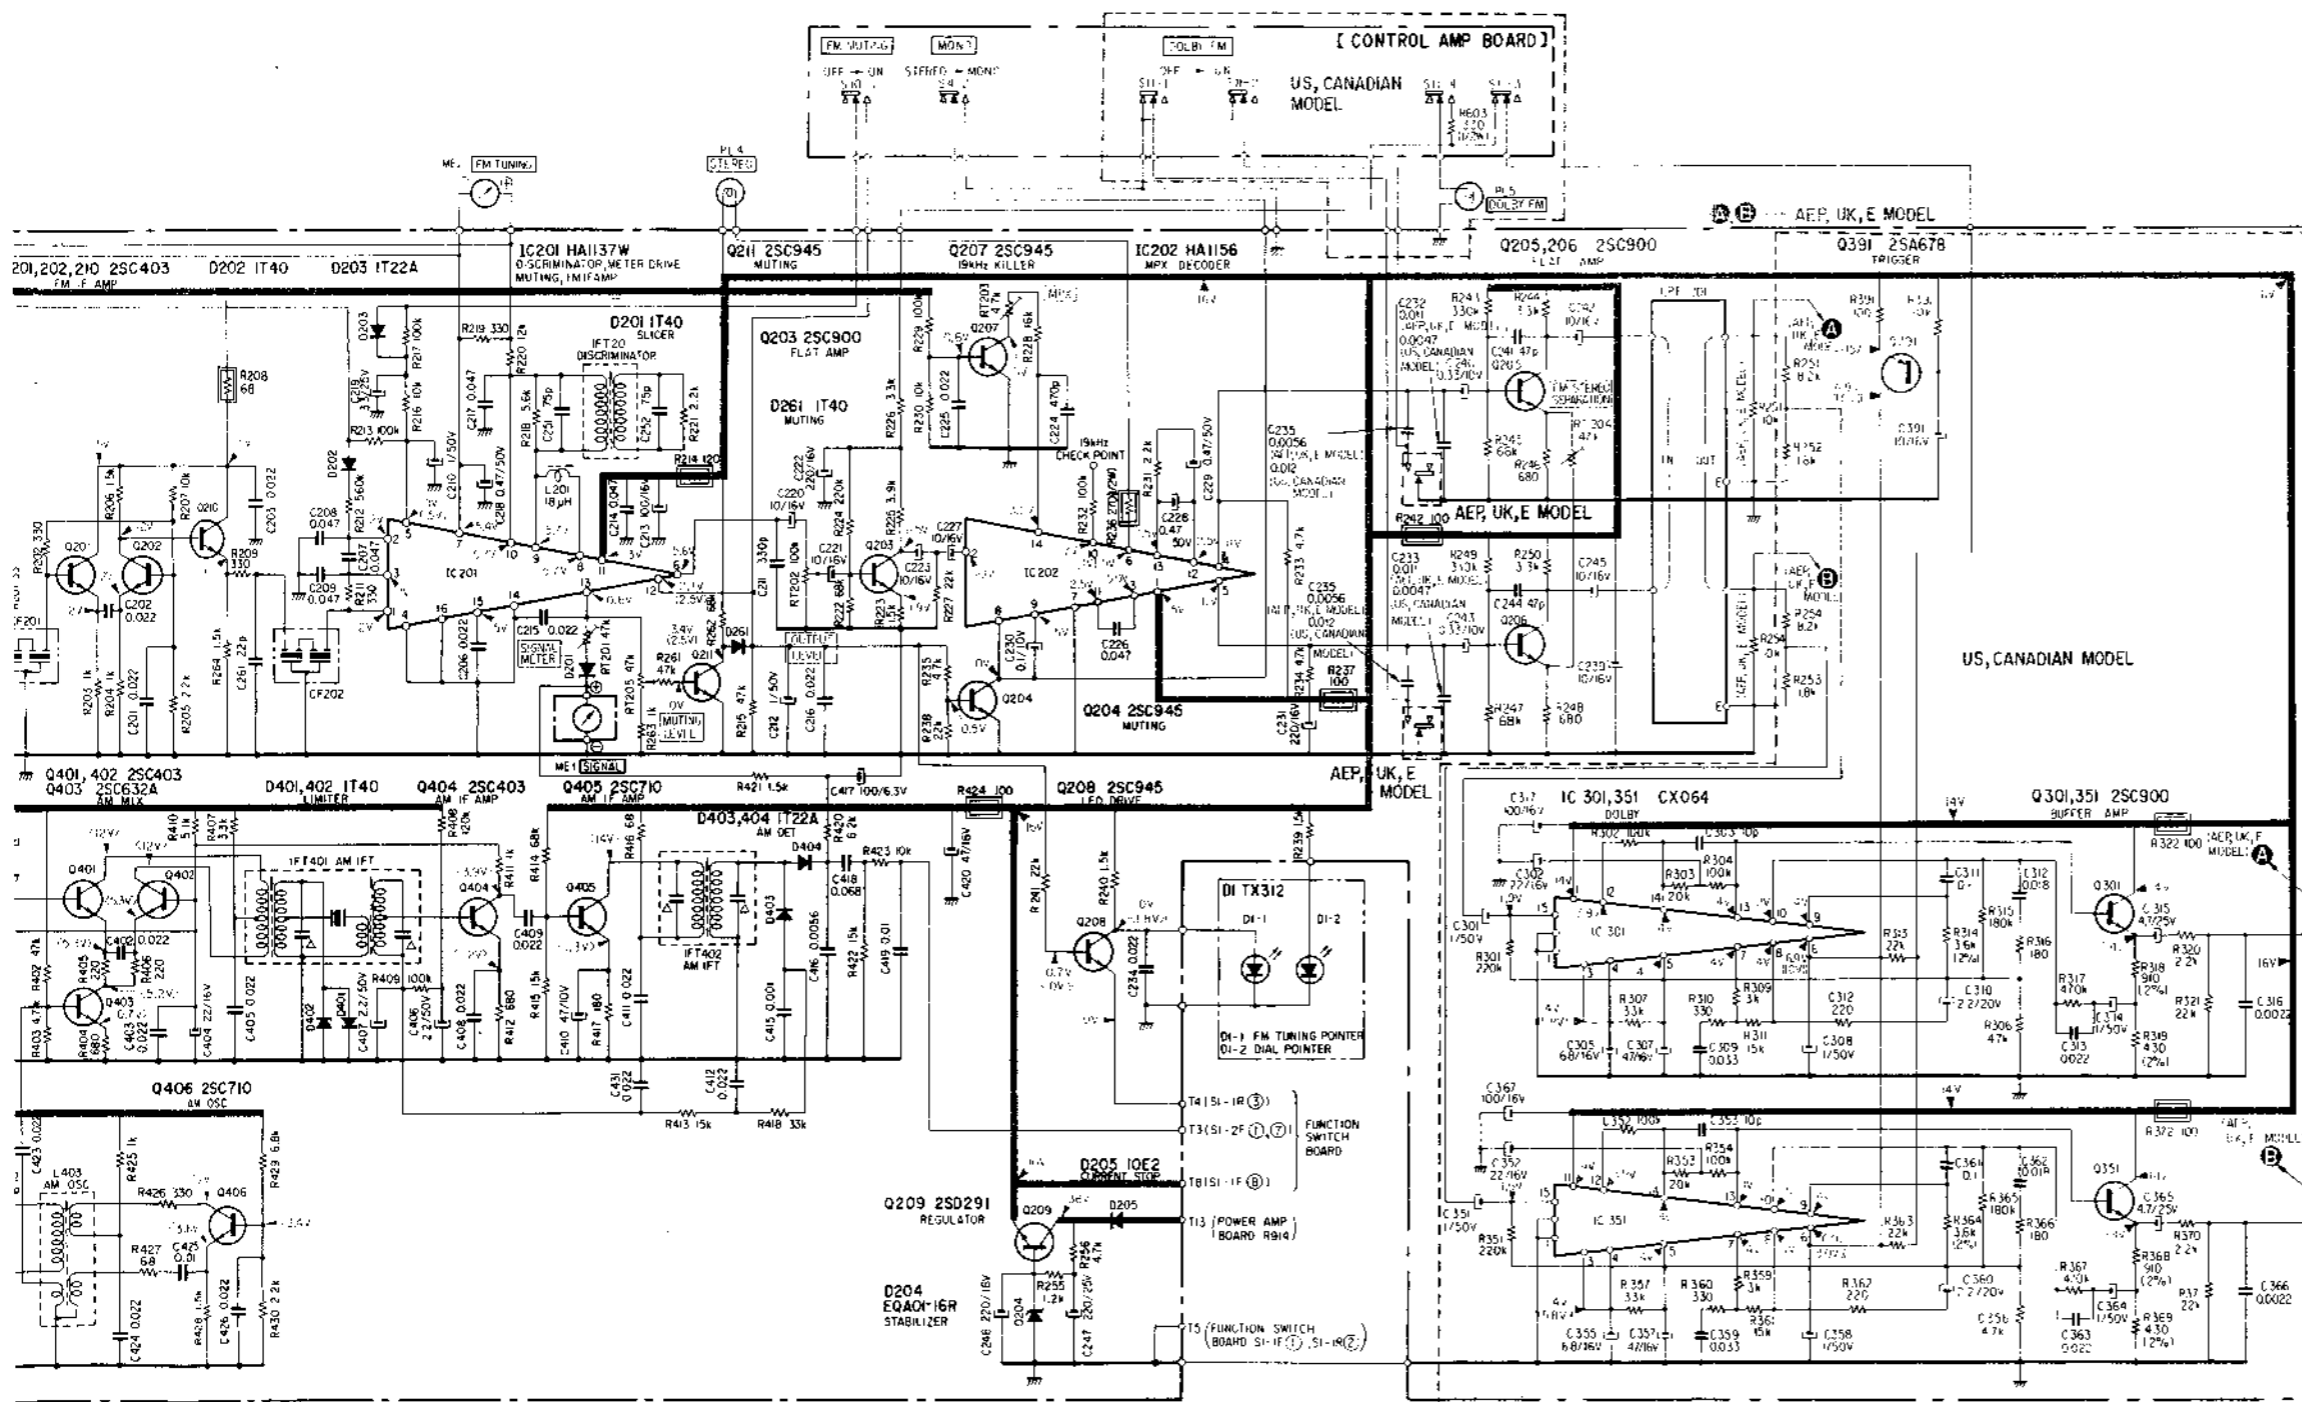

- Note:**
- All capacitors are in  $\mu\text{F}$  unless otherwise noted, 50 or less working volts are omitted except for electrolytic type.  $p = \mu\text{F}$ .
  - All resistors are in  $\Omega$ ,  $\frac{1}{4}\text{W}$ , unless otherwise noted.  $k = 1,000$   $M = 1,000k$
  - $\triangle$  indicates internal components.
  - $\text{---}\square\text{---}$  indicates chassis ground.
  - $\text{---}\square\text{---}$  indicates a nonflammable resistor.
  - $\text{---}\square\text{---}$  indicates B+ circuit.


- Voltage are measured by VOM (20  $k\Omega/v$ ) in DC with respect to ground unless otherwise noted.
- $\text{---}\square\text{---}$  FM (monaural or stereo)
- $\text{---}\square\text{---}$  FM MUTING (S10) — ON (Detuned in FM)
- $\text{---}\square\text{---}$  DOLBY FM (S11) — ON (Detuned in FM)
- $\text{---}\square\text{---}$  FM STEREO
- $\text{---}\square\text{---}$  AM (Detuned)
- no mark: FM (Detuned)

- Voltage variations may be noted due to normal production tolerances.
- Switch Mode:


| Ref. No. | Switch    | Position |
|----------|-----------|----------|
| S4       | MONO      | STEREO   |
| S10      | FM MUTING | OFF      |
| S11      | DOLBY FM  | OFF      |

**Note:** The components identified by shading are critical for safety. Replace only with part number specified.


4-4. MOUNTING DIAGRAM - Power Amp, IC, Headphone Jack, Power Supply Circuit Boards - Conductor Side -

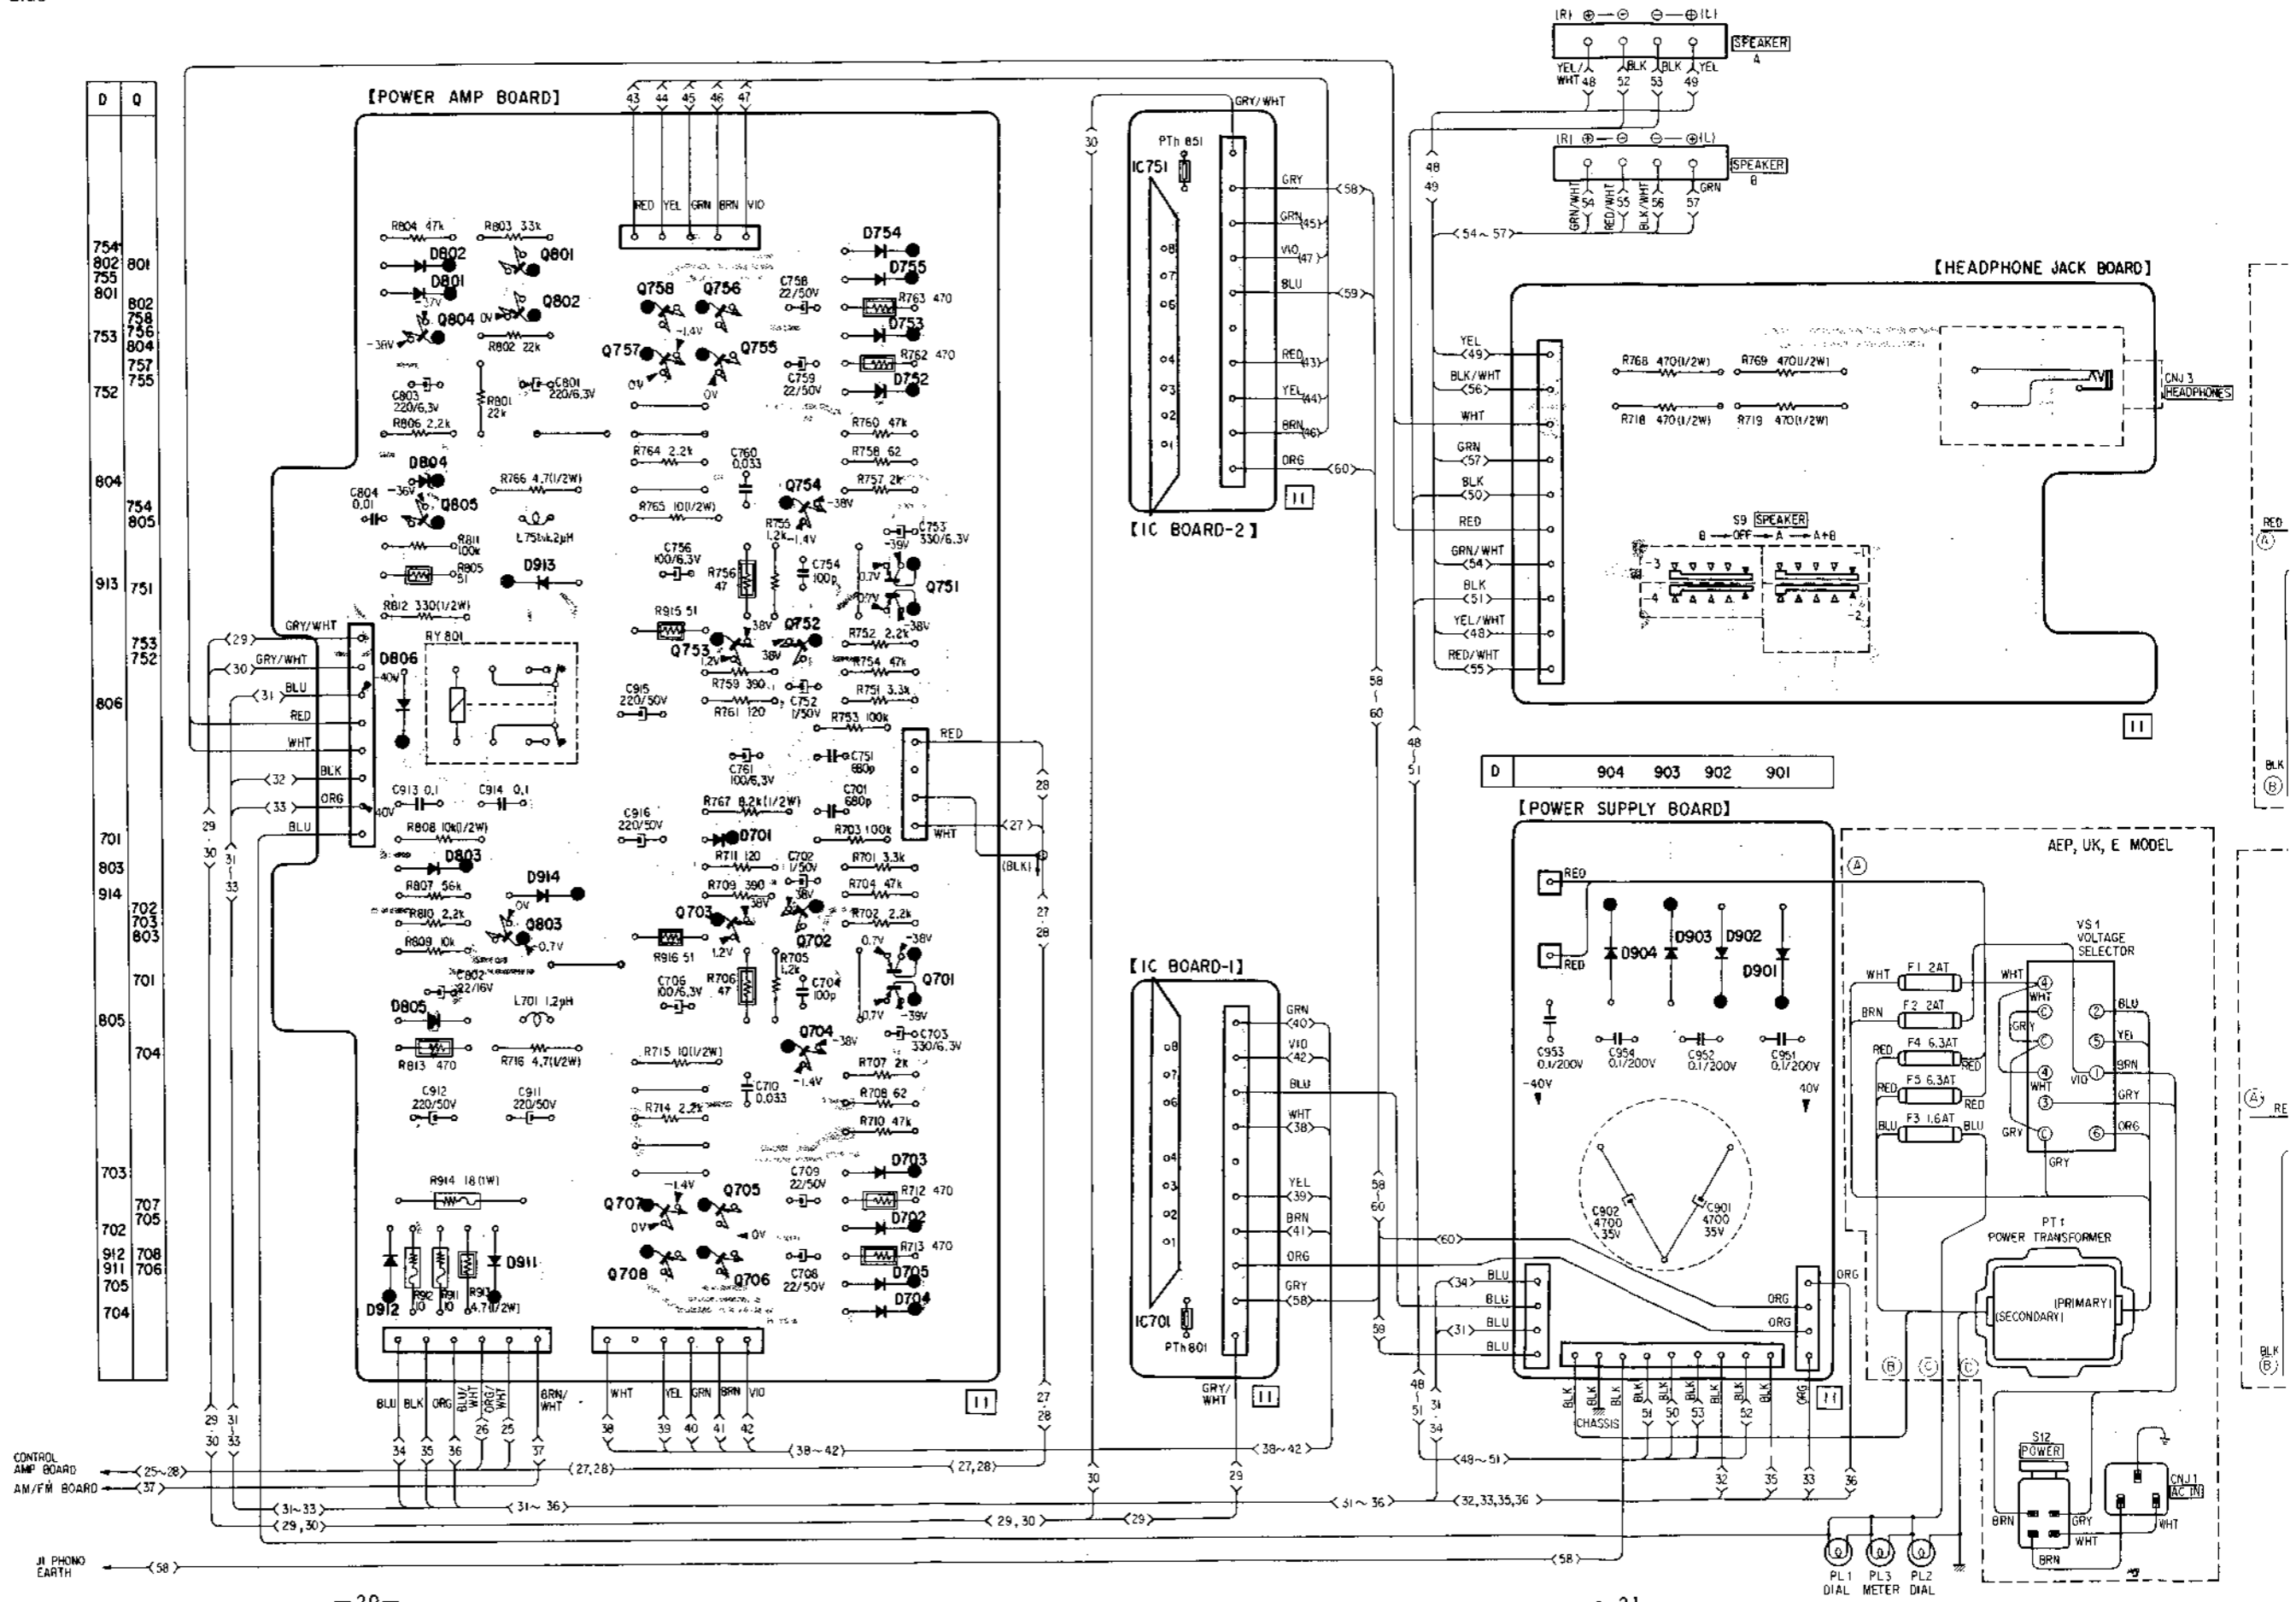


| D   | Q   |
|-----|-----|
| 754 | 801 |
| 802 | 801 |
| 755 | 801 |
| 801 | 802 |
| 758 | 802 |
| 756 | 802 |
| 804 | 804 |
| 757 | 804 |
| 755 | 804 |
| 752 | 804 |
| 804 | 804 |
| 754 | 805 |
| 805 | 805 |
| 913 | 751 |
| 753 | 752 |
| 752 | 752 |
| 806 | 806 |
| 701 | 701 |
| 803 | 803 |
| 914 | 702 |
| 702 | 703 |
| 703 | 803 |
| 701 | 701 |
| 805 | 704 |
| 704 | 704 |
| 703 | 703 |
| 707 | 705 |
| 705 | 705 |
| 912 | 708 |
| 911 | 706 |
| 705 | 706 |
| 704 | 704 |

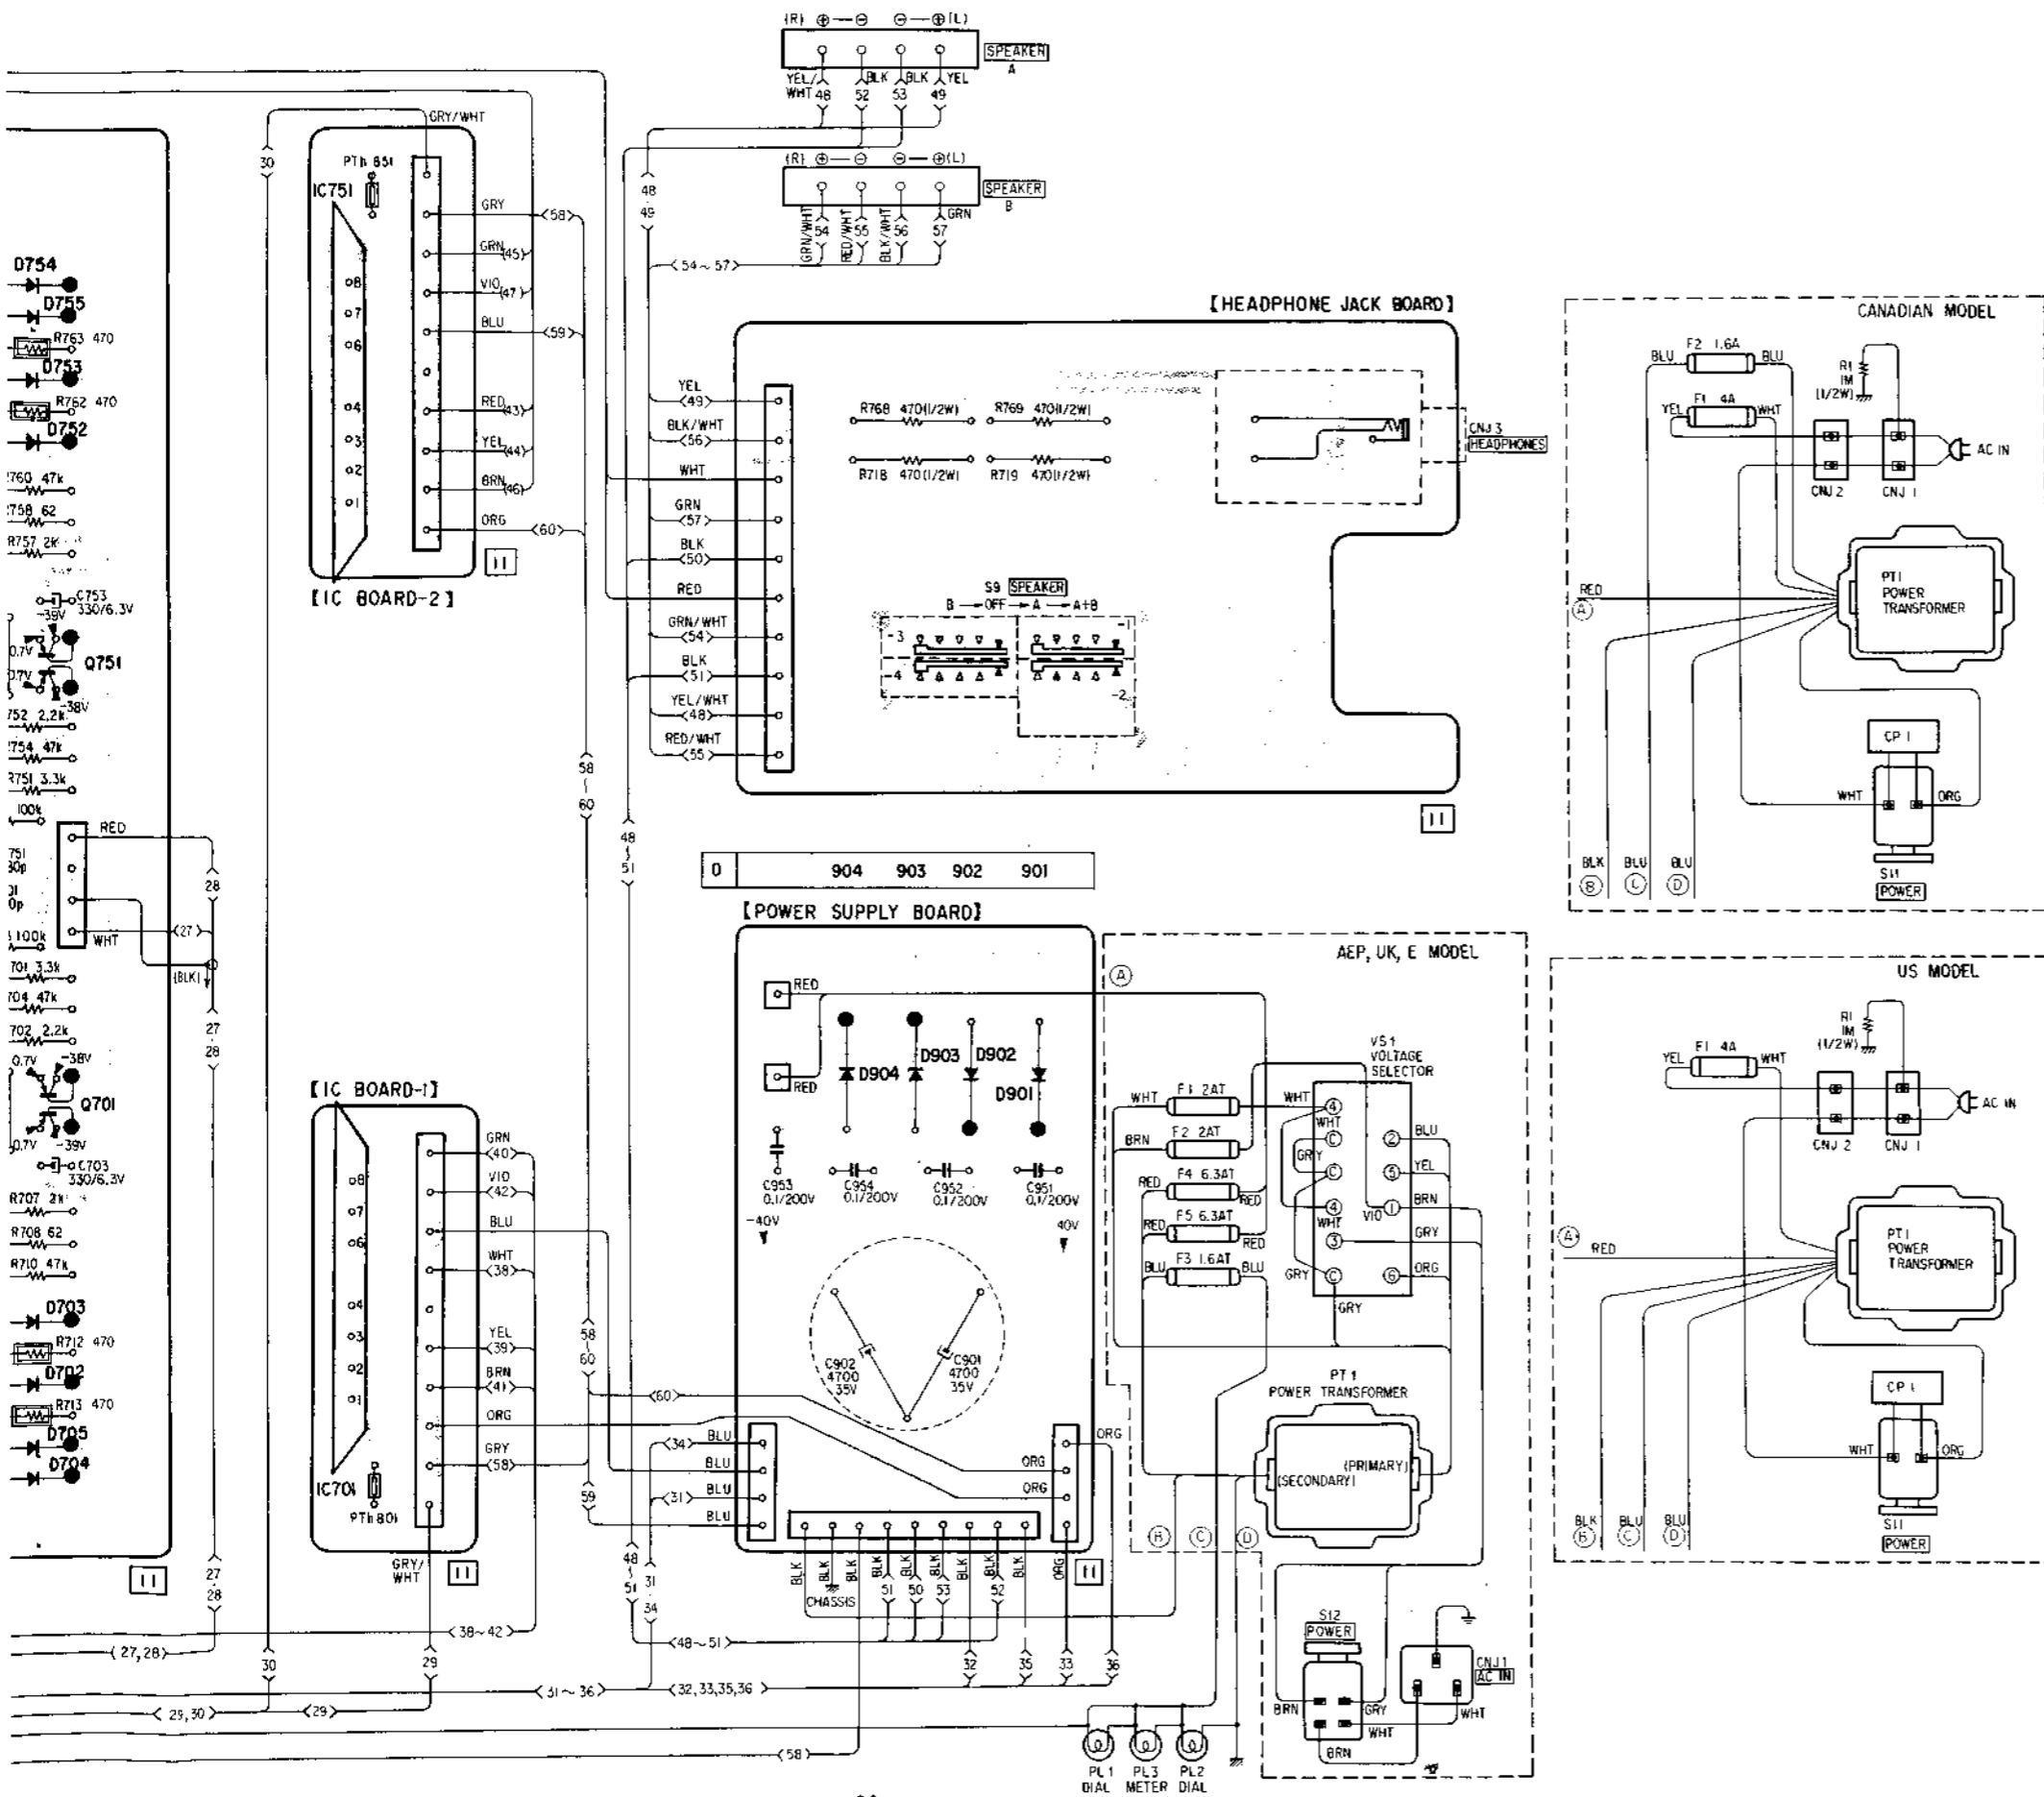


Q701, 751: 2SC705  
 D702~705  
 752~755  
 801~803  
 805, 806  
 D911, 912: 10E2

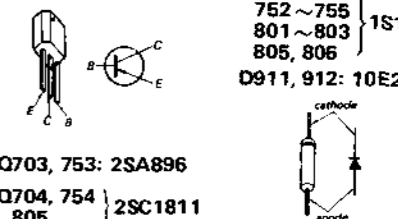


Q703, 753: 2SA896  
 Q704, 754 } 2SC1811  
 805

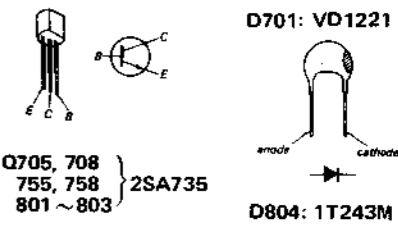


Q705, 708  
 755, 758 } 2SA735  
 801~803

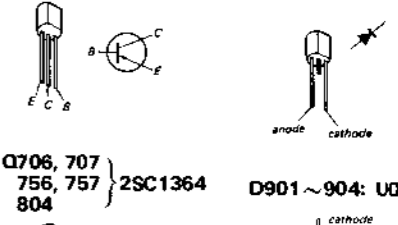


Q706, 707  
 756, 757 } 2SC1364  
 804

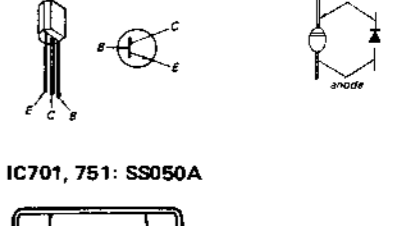

IC701, 751: SS050A





Note:  
 • B+ pattern  
 • B- pattern



STR-4800/4800SD STR-4800/4800SD

4-5. SCHEMATIC DIAGRAM - Amplifier Section -


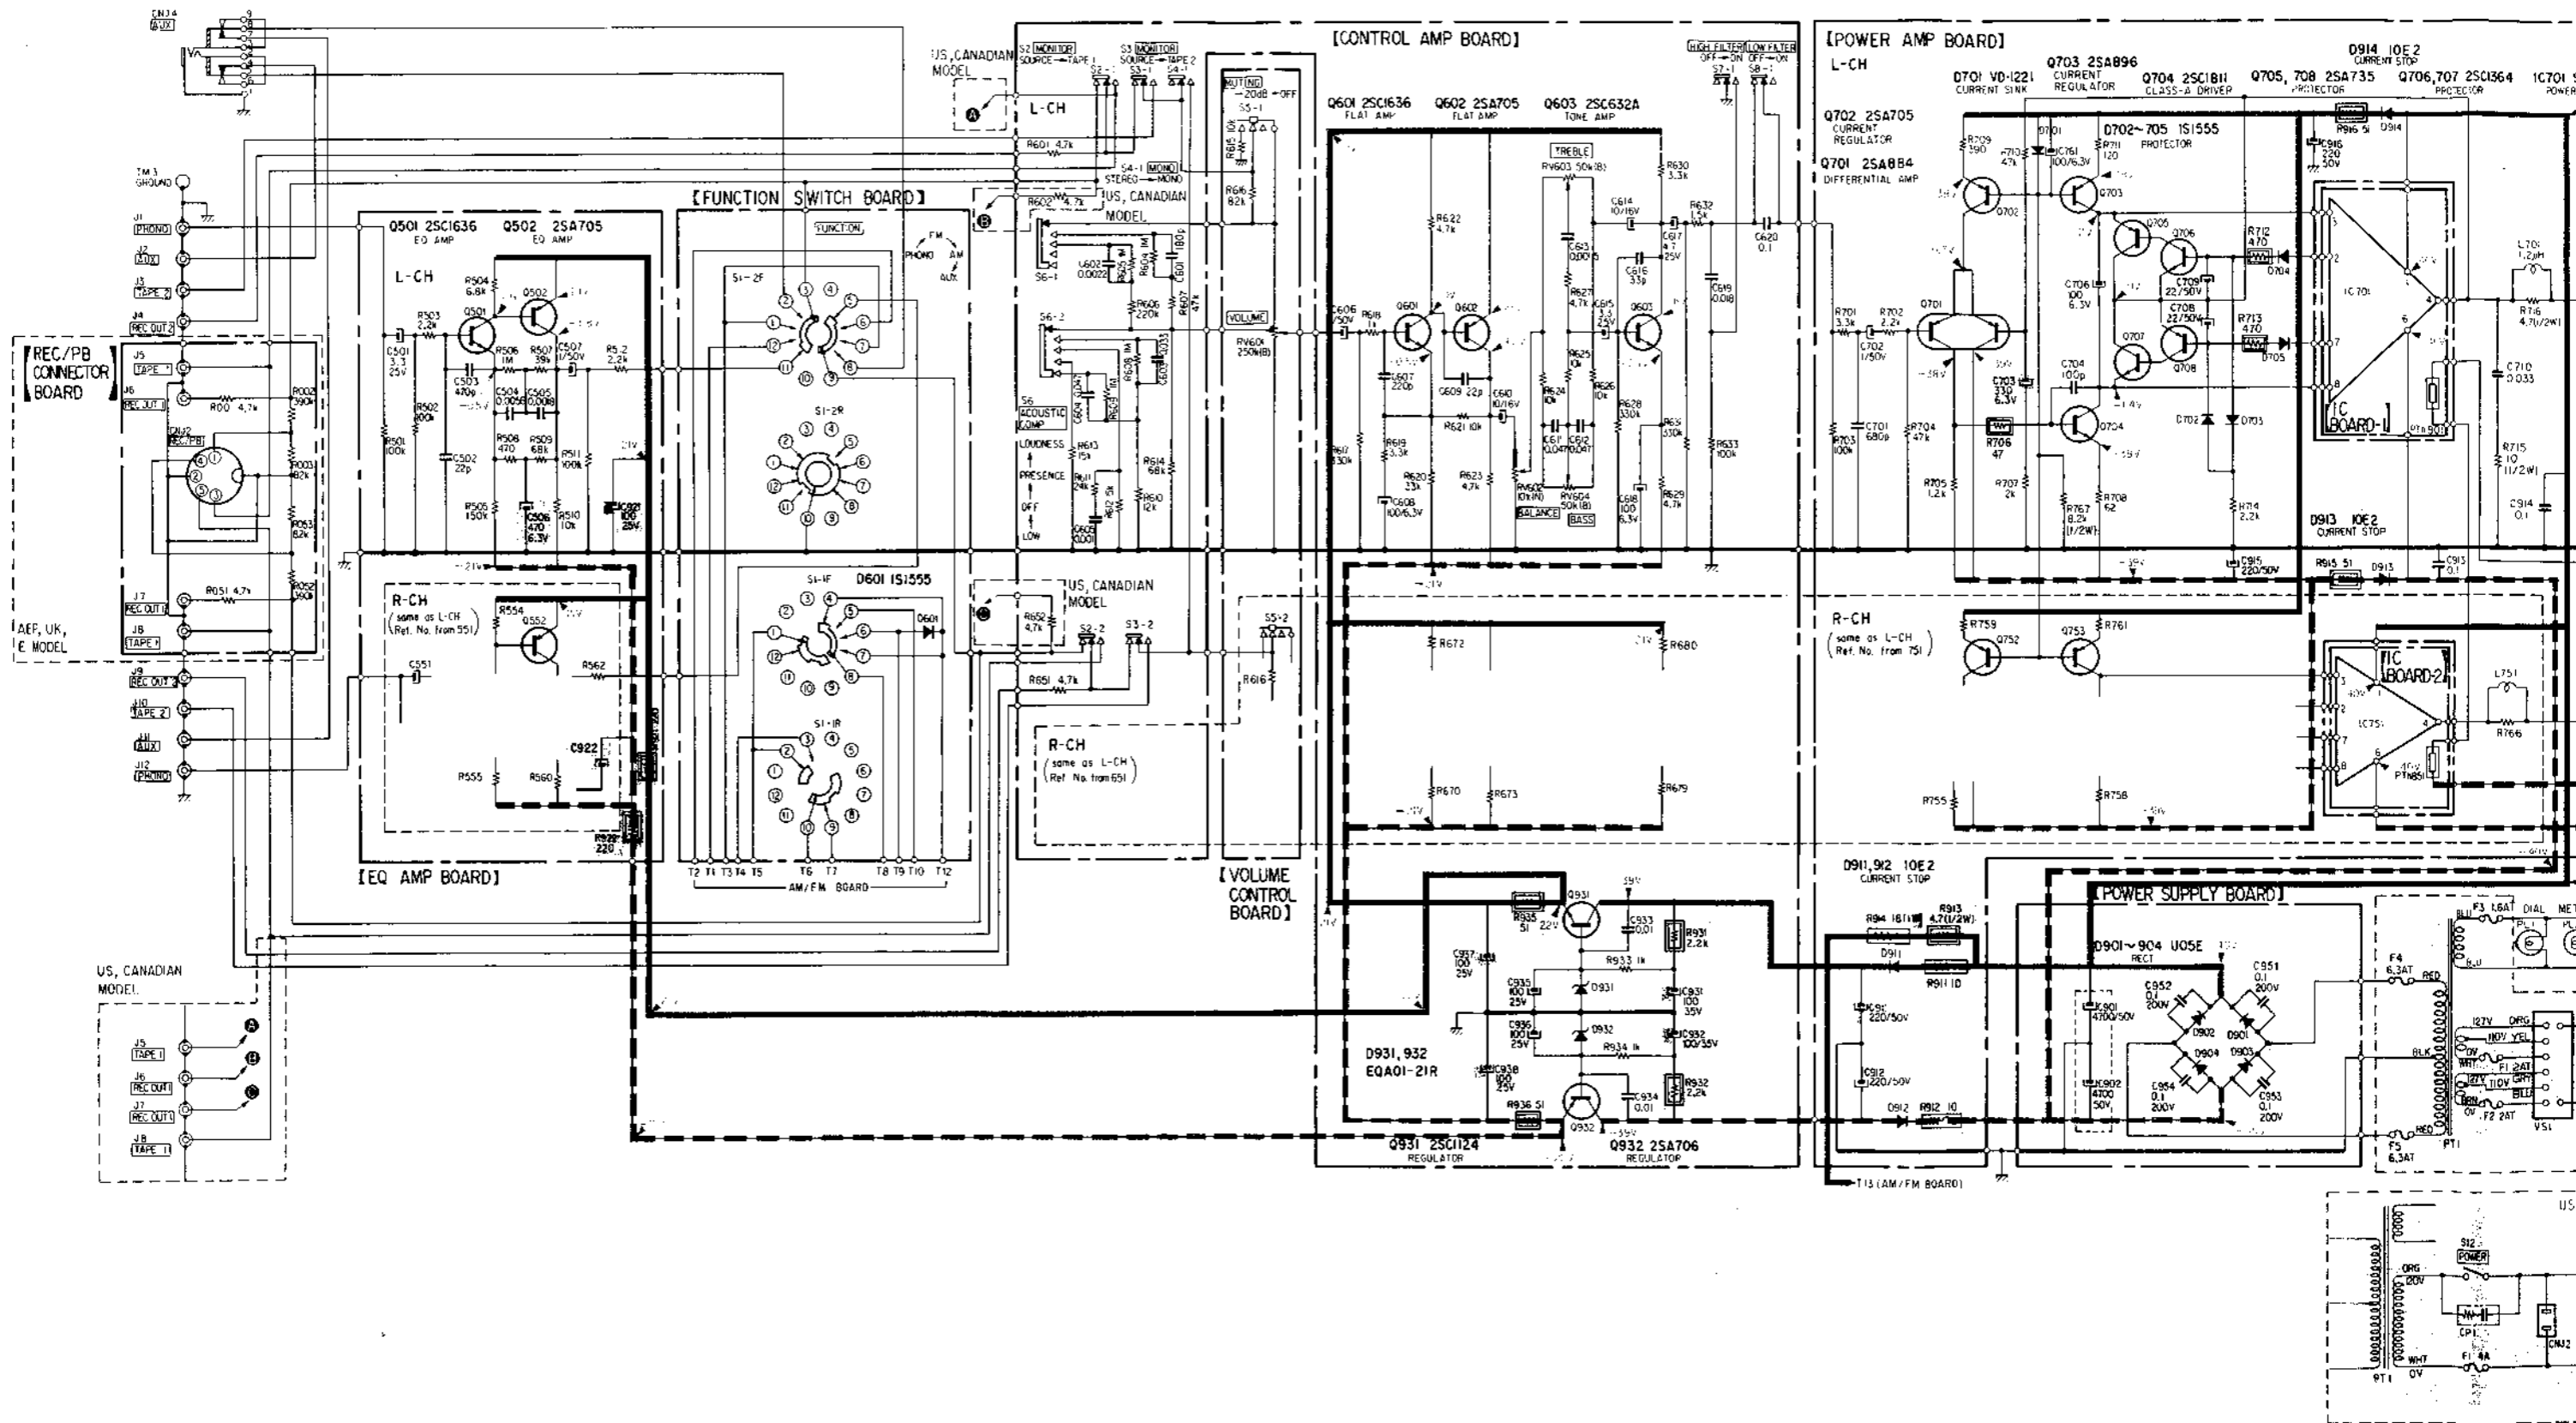


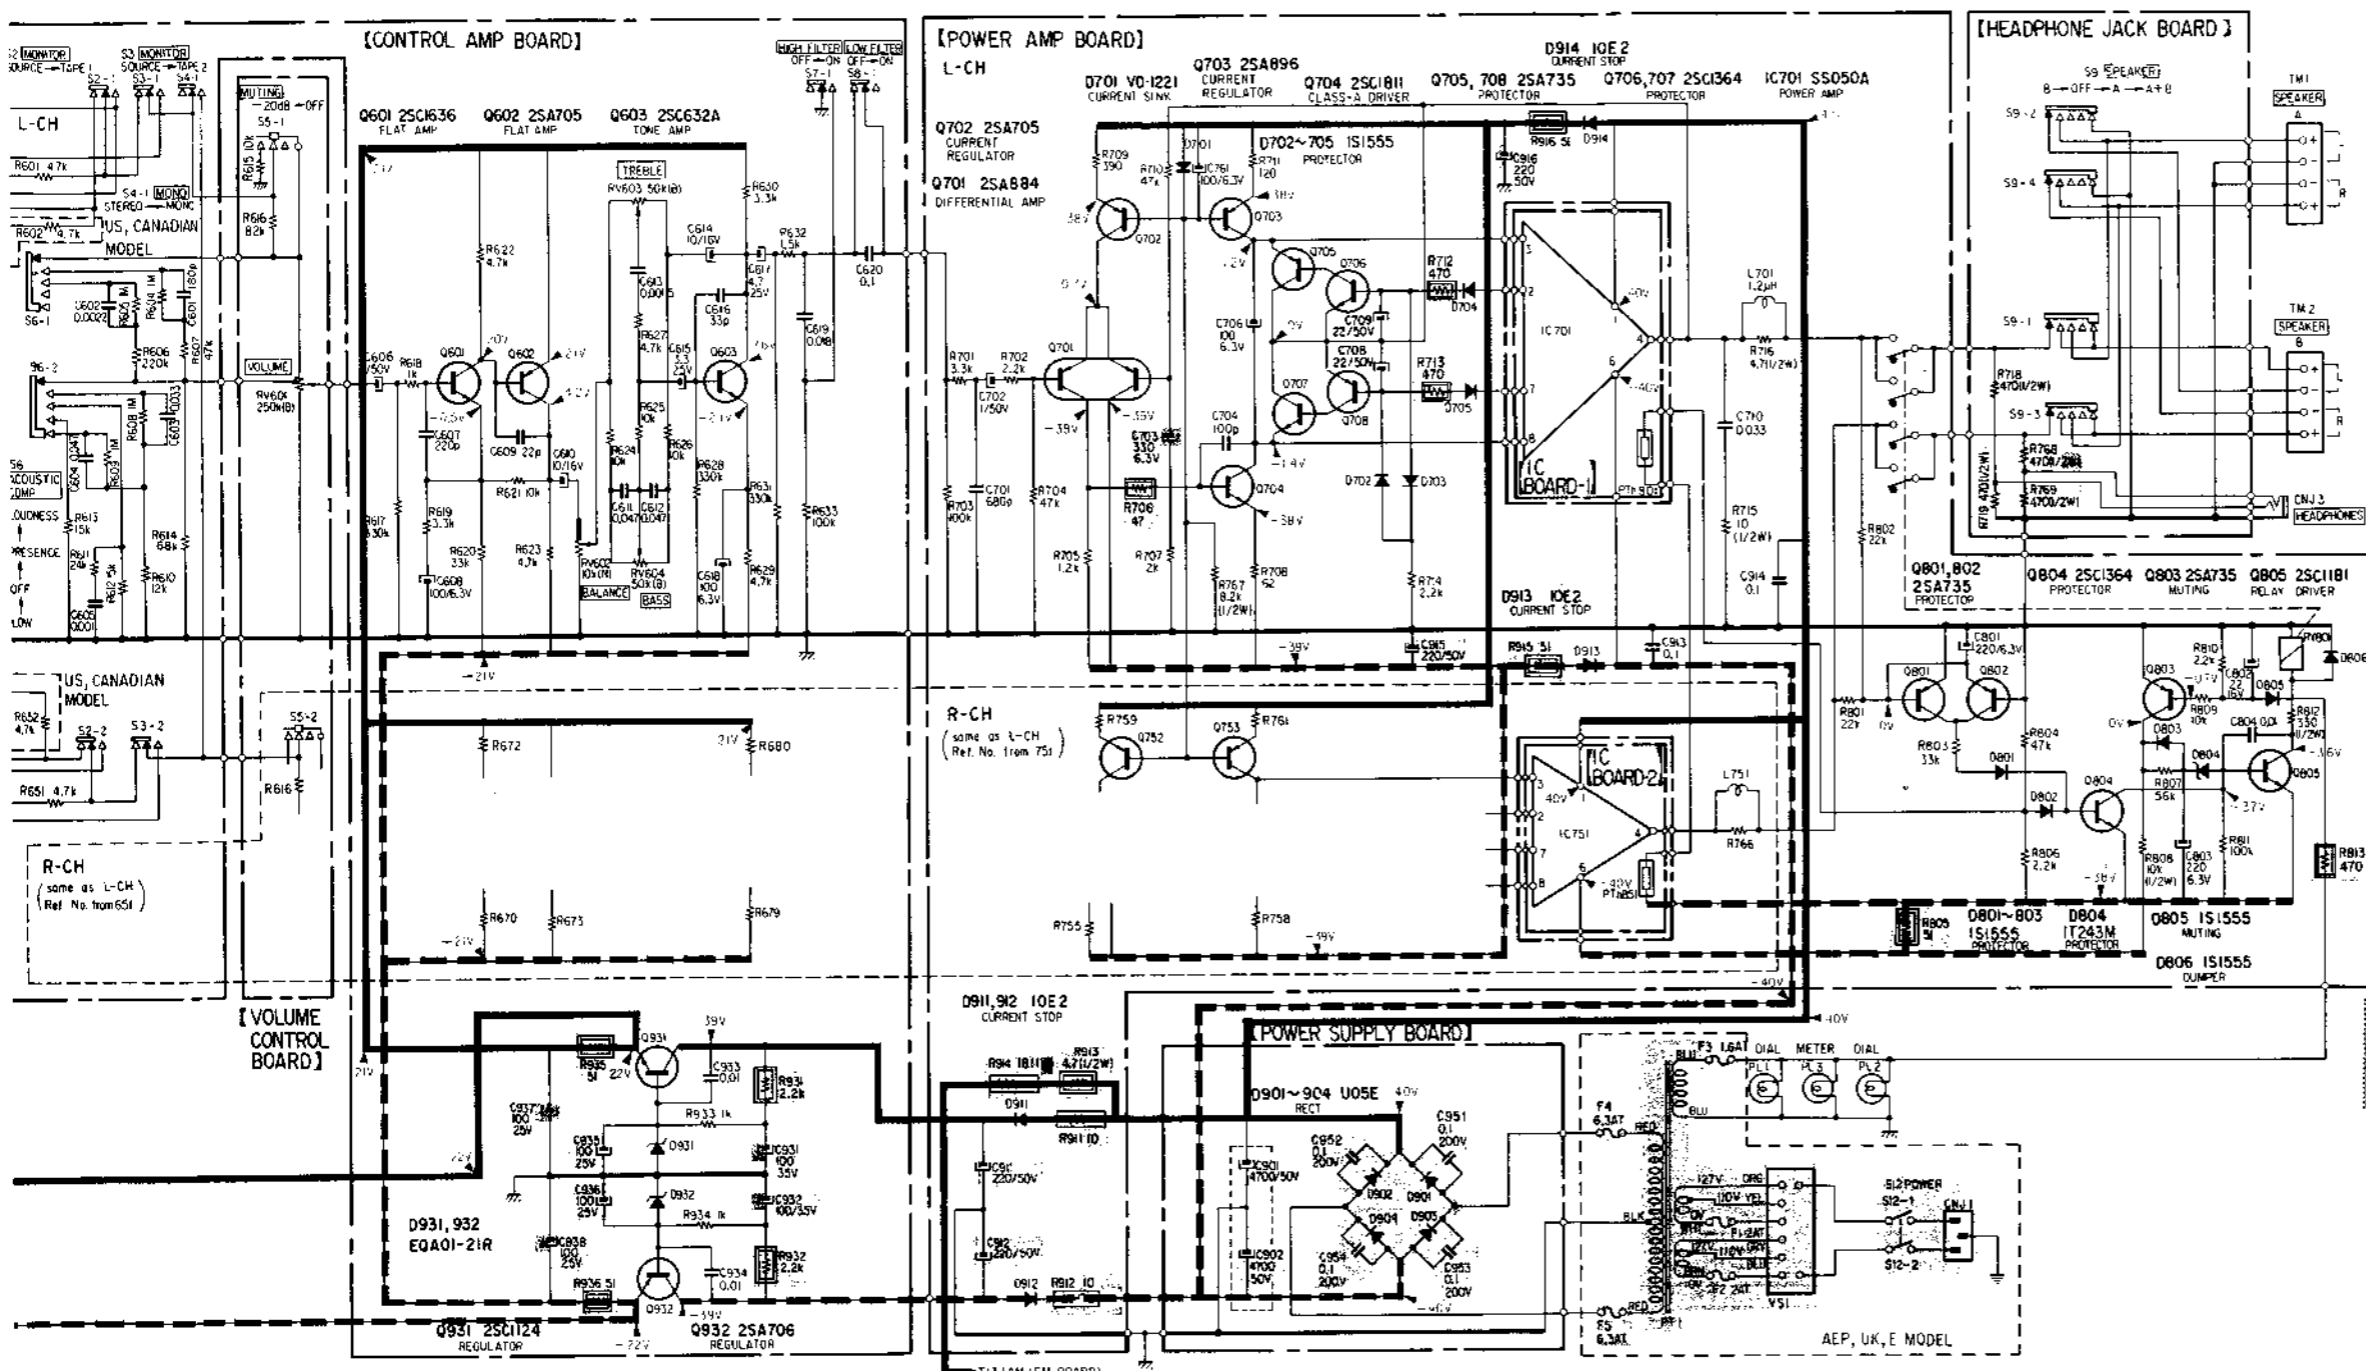

- Note:**
- All capacitors are in  $\mu\text{F}$  unless otherwise noted. 50 or less working volts are omitted except for electrolytic type.  $\rho = \mu\text{F}$ .
  - All resistors are in  $\Omega$ ,  $\frac{1}{4} \text{ W}$ , unless otherwise noted.  $k = 1,000$   $M = 1,000 k$
  - indicates chassis ground.
  - indicates a nonflammable resistor.
  - indicates a fusible resistor.
  - indicates B+ circuit.
  - indicates B- circuit.
  - Voltages are DC with respect to ground unless otherwise noted. Readings taken under no-signal conditions with a VOM (20  $k\Omega/v$ ). Measure the voltages after the power switch turned ON and 4-6 minutes passed for warm-up the set.
  - Voltage variations may be noted due to normal production tolerances.
  - Switch Mode:


| Ref. No. | Switch        | Position |
|----------|---------------|----------|
| S1       | FUNCTION      | PHONO    |
| S2       | MONITOR       | SOURCE   |
| S3       | MONITOR       | SOURCE   |
| S4       | MONO          | STEREO   |
| S5       | MUTING        | OFF      |
| S6       | ACOUSTIC COMP | LOW      |
| S7       | HIGH FILTER   | OFF      |
| S8       | LOW FILTER    | OFF      |
| S9       | SPEAKER       | B        |
| S10      | FM MUTING     | OFF      |
| S12      | POWER         | OFF      |

**Note:** The components identified by shading are critical for safety. Replace only with part number specified.

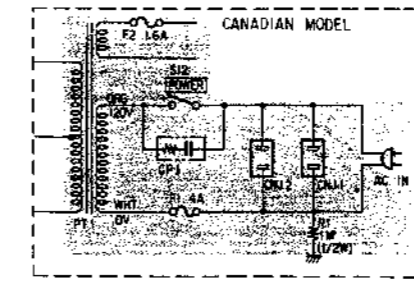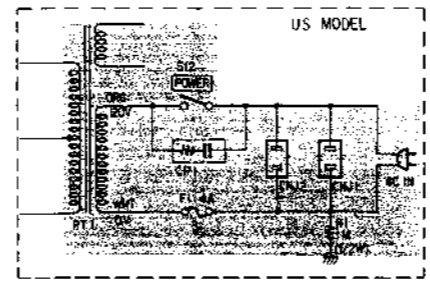





4-6. MOUNTING DIAGRAM – Function Switch, AUX Jack, REC/PB Connector, EQ Amp, Volume Control, Control Amp Circuit Boards –  
– Conductor Side –

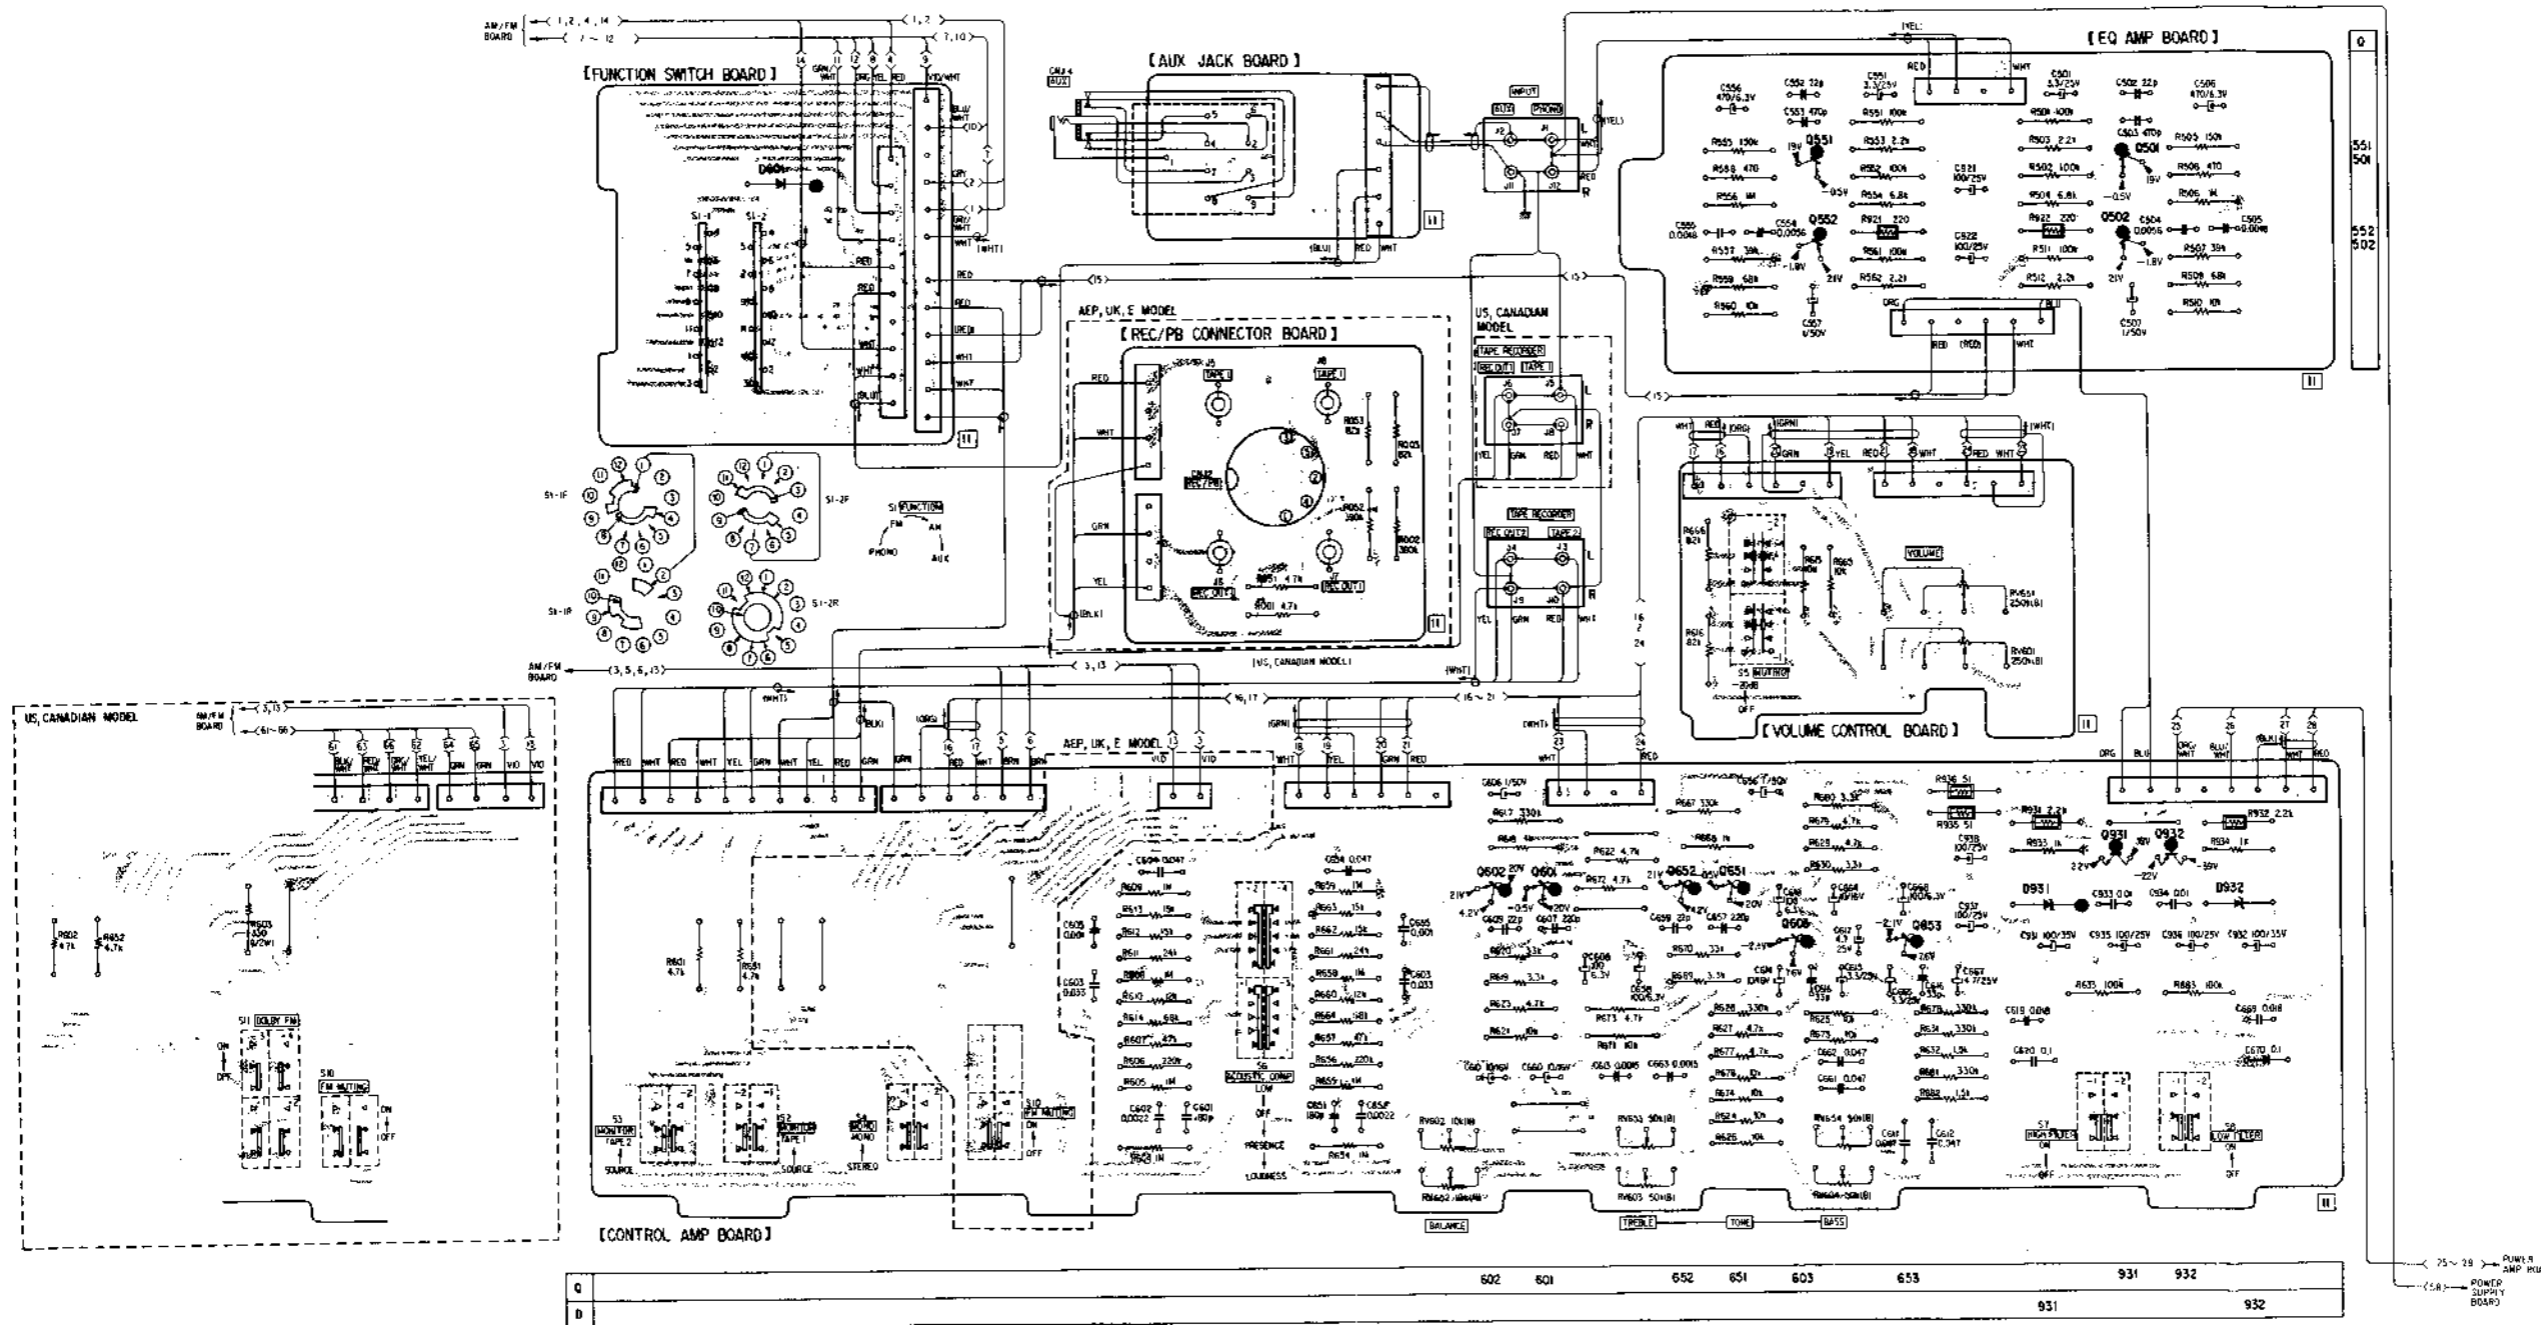


Q501, 551 } 2SC1636  
601, 651 }  
Q603, 653: 2SC632A




Q502, 552 } 2SA705  
602, 652 }




Q931: 2SC1124




Q932: 2SA706




D601: 1S1555



D931, 932: EQA01-21R



Note:  
• : B+ pattern  
• : B- pattern




|   |     |     |     |     |     |     |     |     |
|---|-----|-----|-----|-----|-----|-----|-----|-----|
| Q | 602 | 601 | 652 | 651 | 603 | 653 | 931 | 932 |
| D |     |     |     |     |     |     | 931 | 932 |


1  
2  
3  
4  
5

SECTION 5  
EXPLODED VIEWS


Control Amp Circuit Boards —

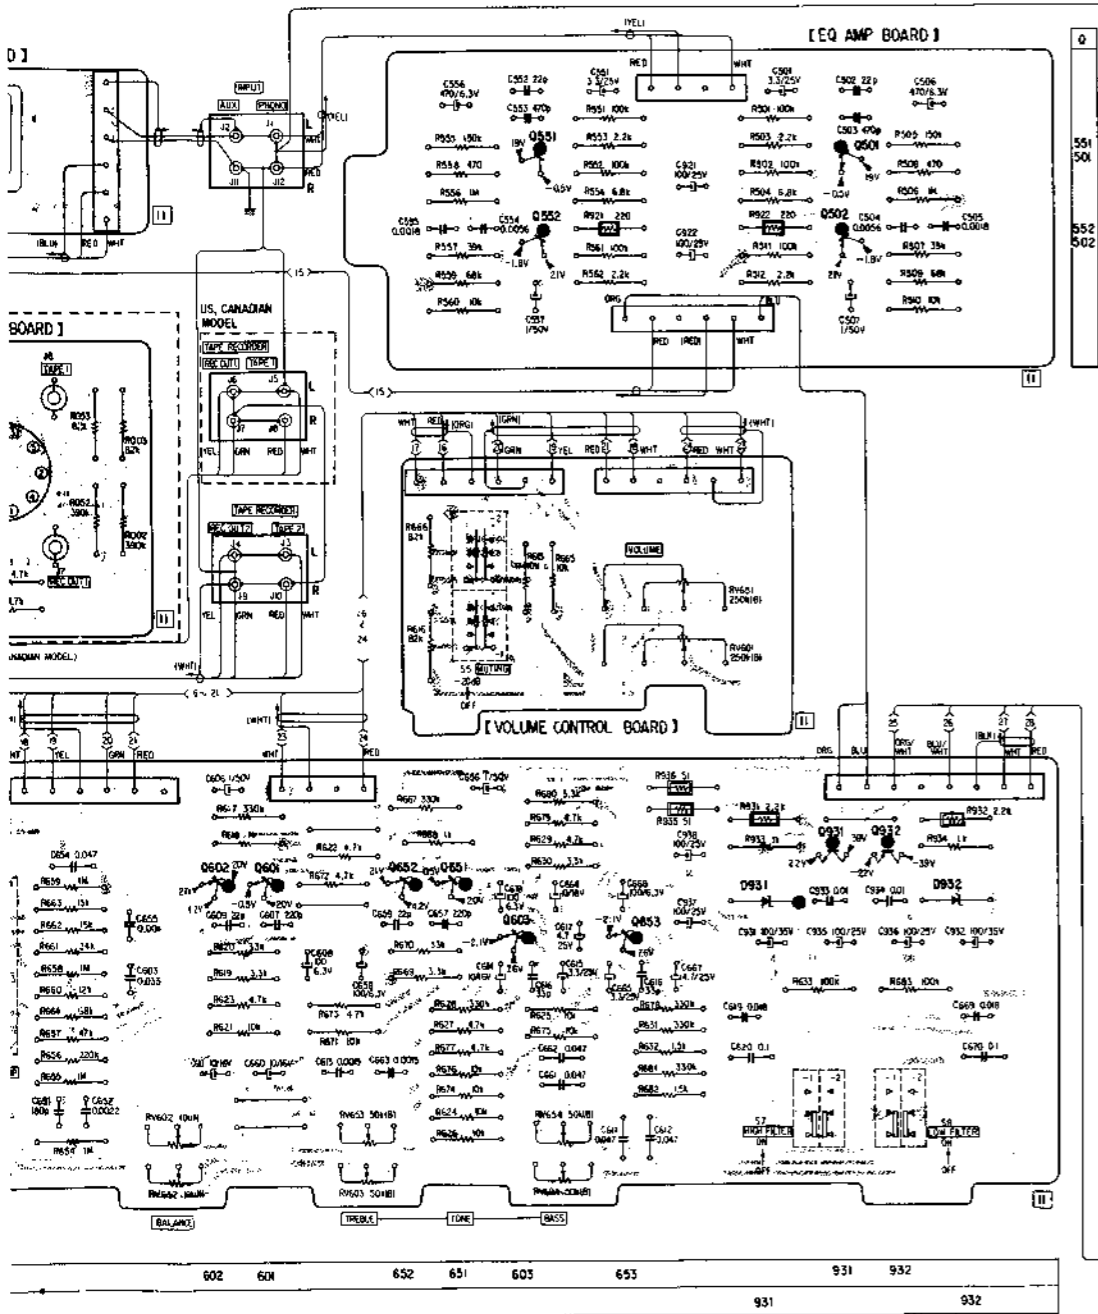


Q501, 551 } 2SC1636  
601, 651 }  
Q603, 653: 2SC632A




Q502, 552 } 2SA705  
602, 652 }




Q931: 2SC1124




Q932: 2SA706





D601: 1S1555



D931, 932: EQA01-21R




Note:  
• B+ pattern  
• B- pattern

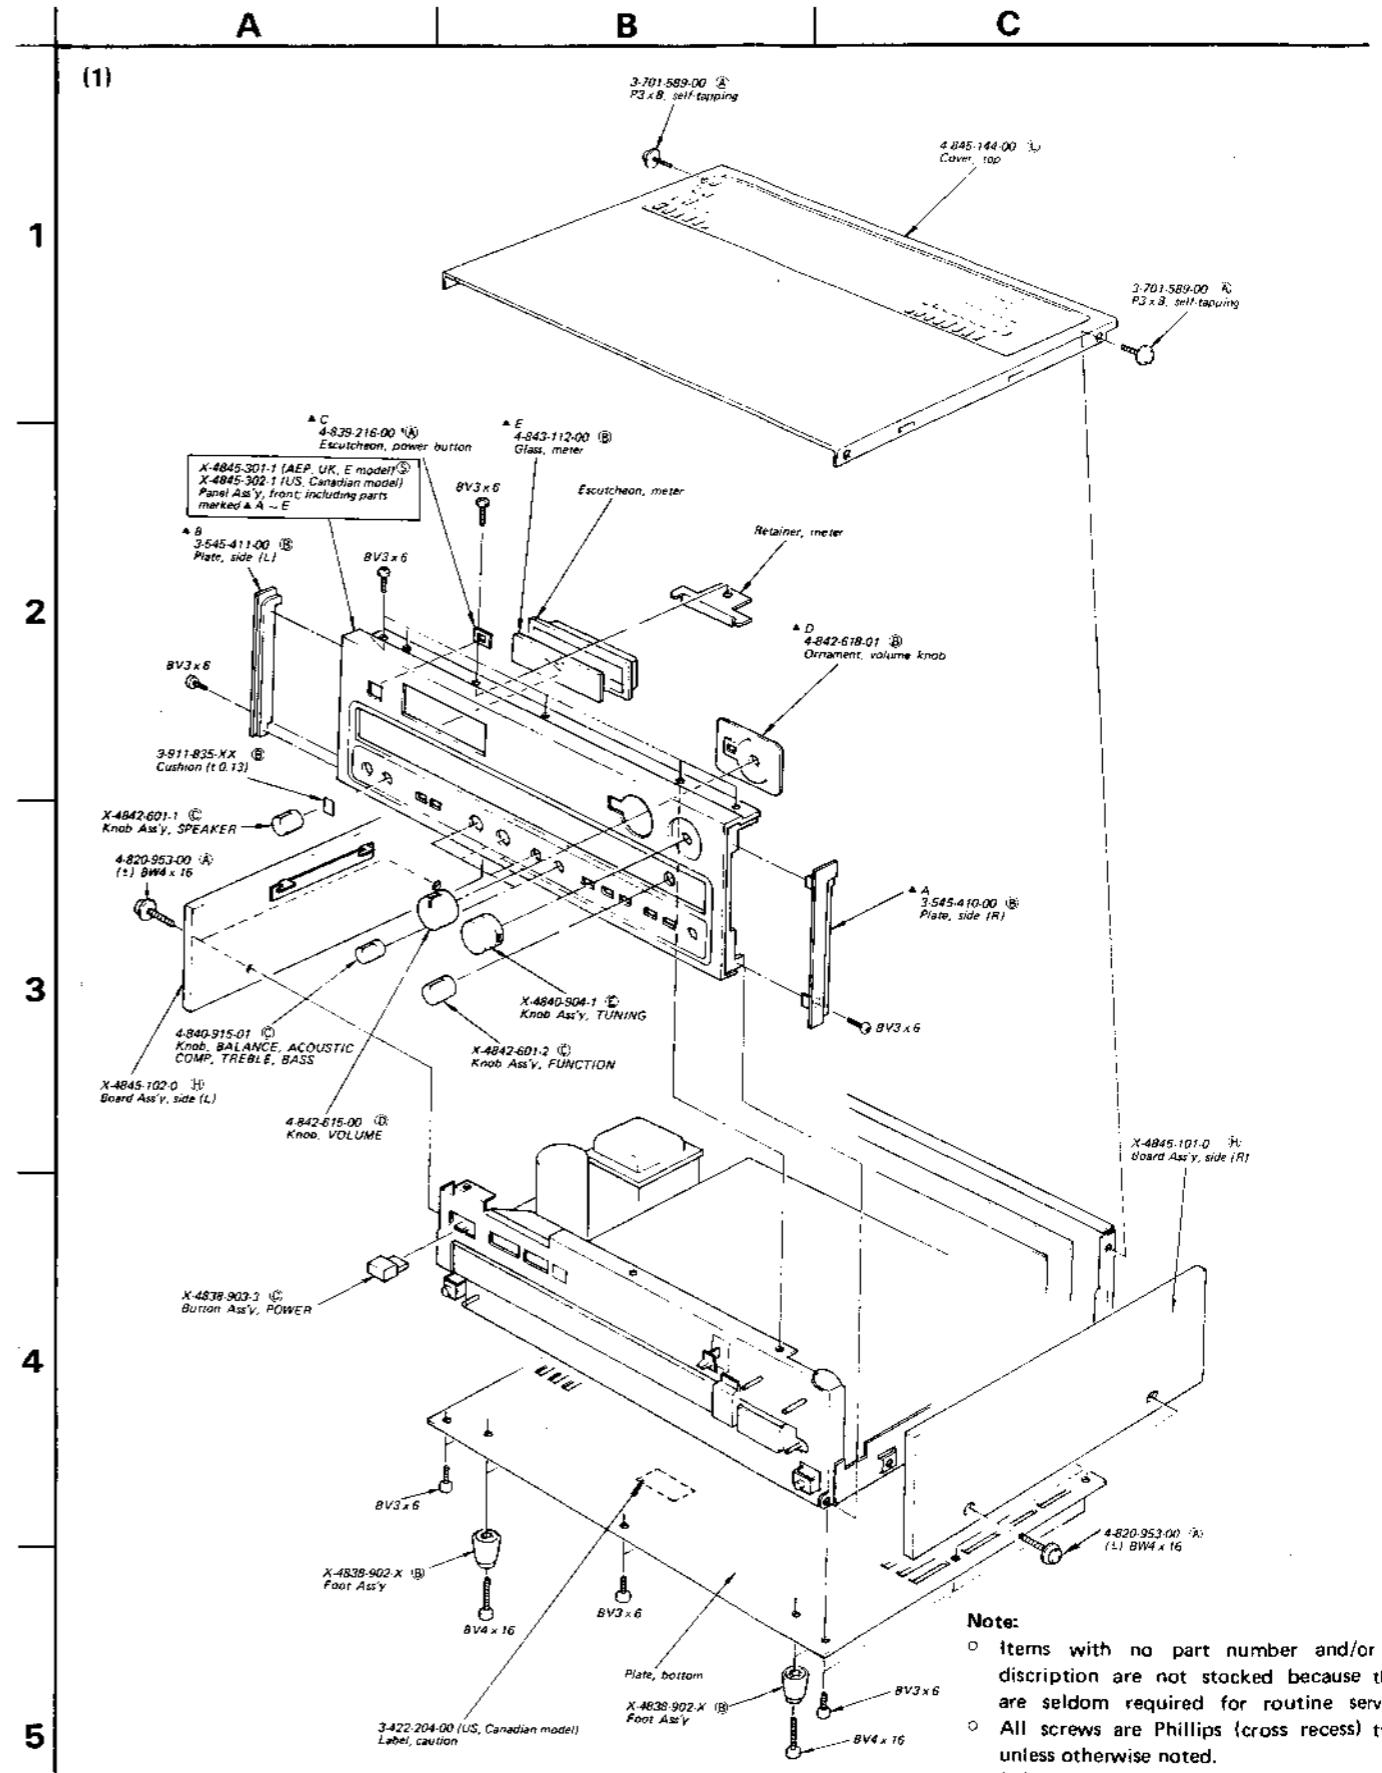

Note:  
○ Items with no part number and/or no description are not stocked because they are seldom required for routine service.  
○ All screws are Phillips (cross recess) type unless otherwise noted.  
(-) = slotted head  
○ The circled letters (A) to (Z) are applicable for the European models only.

**STR-4800/4800SD STR-4800/4800SD**

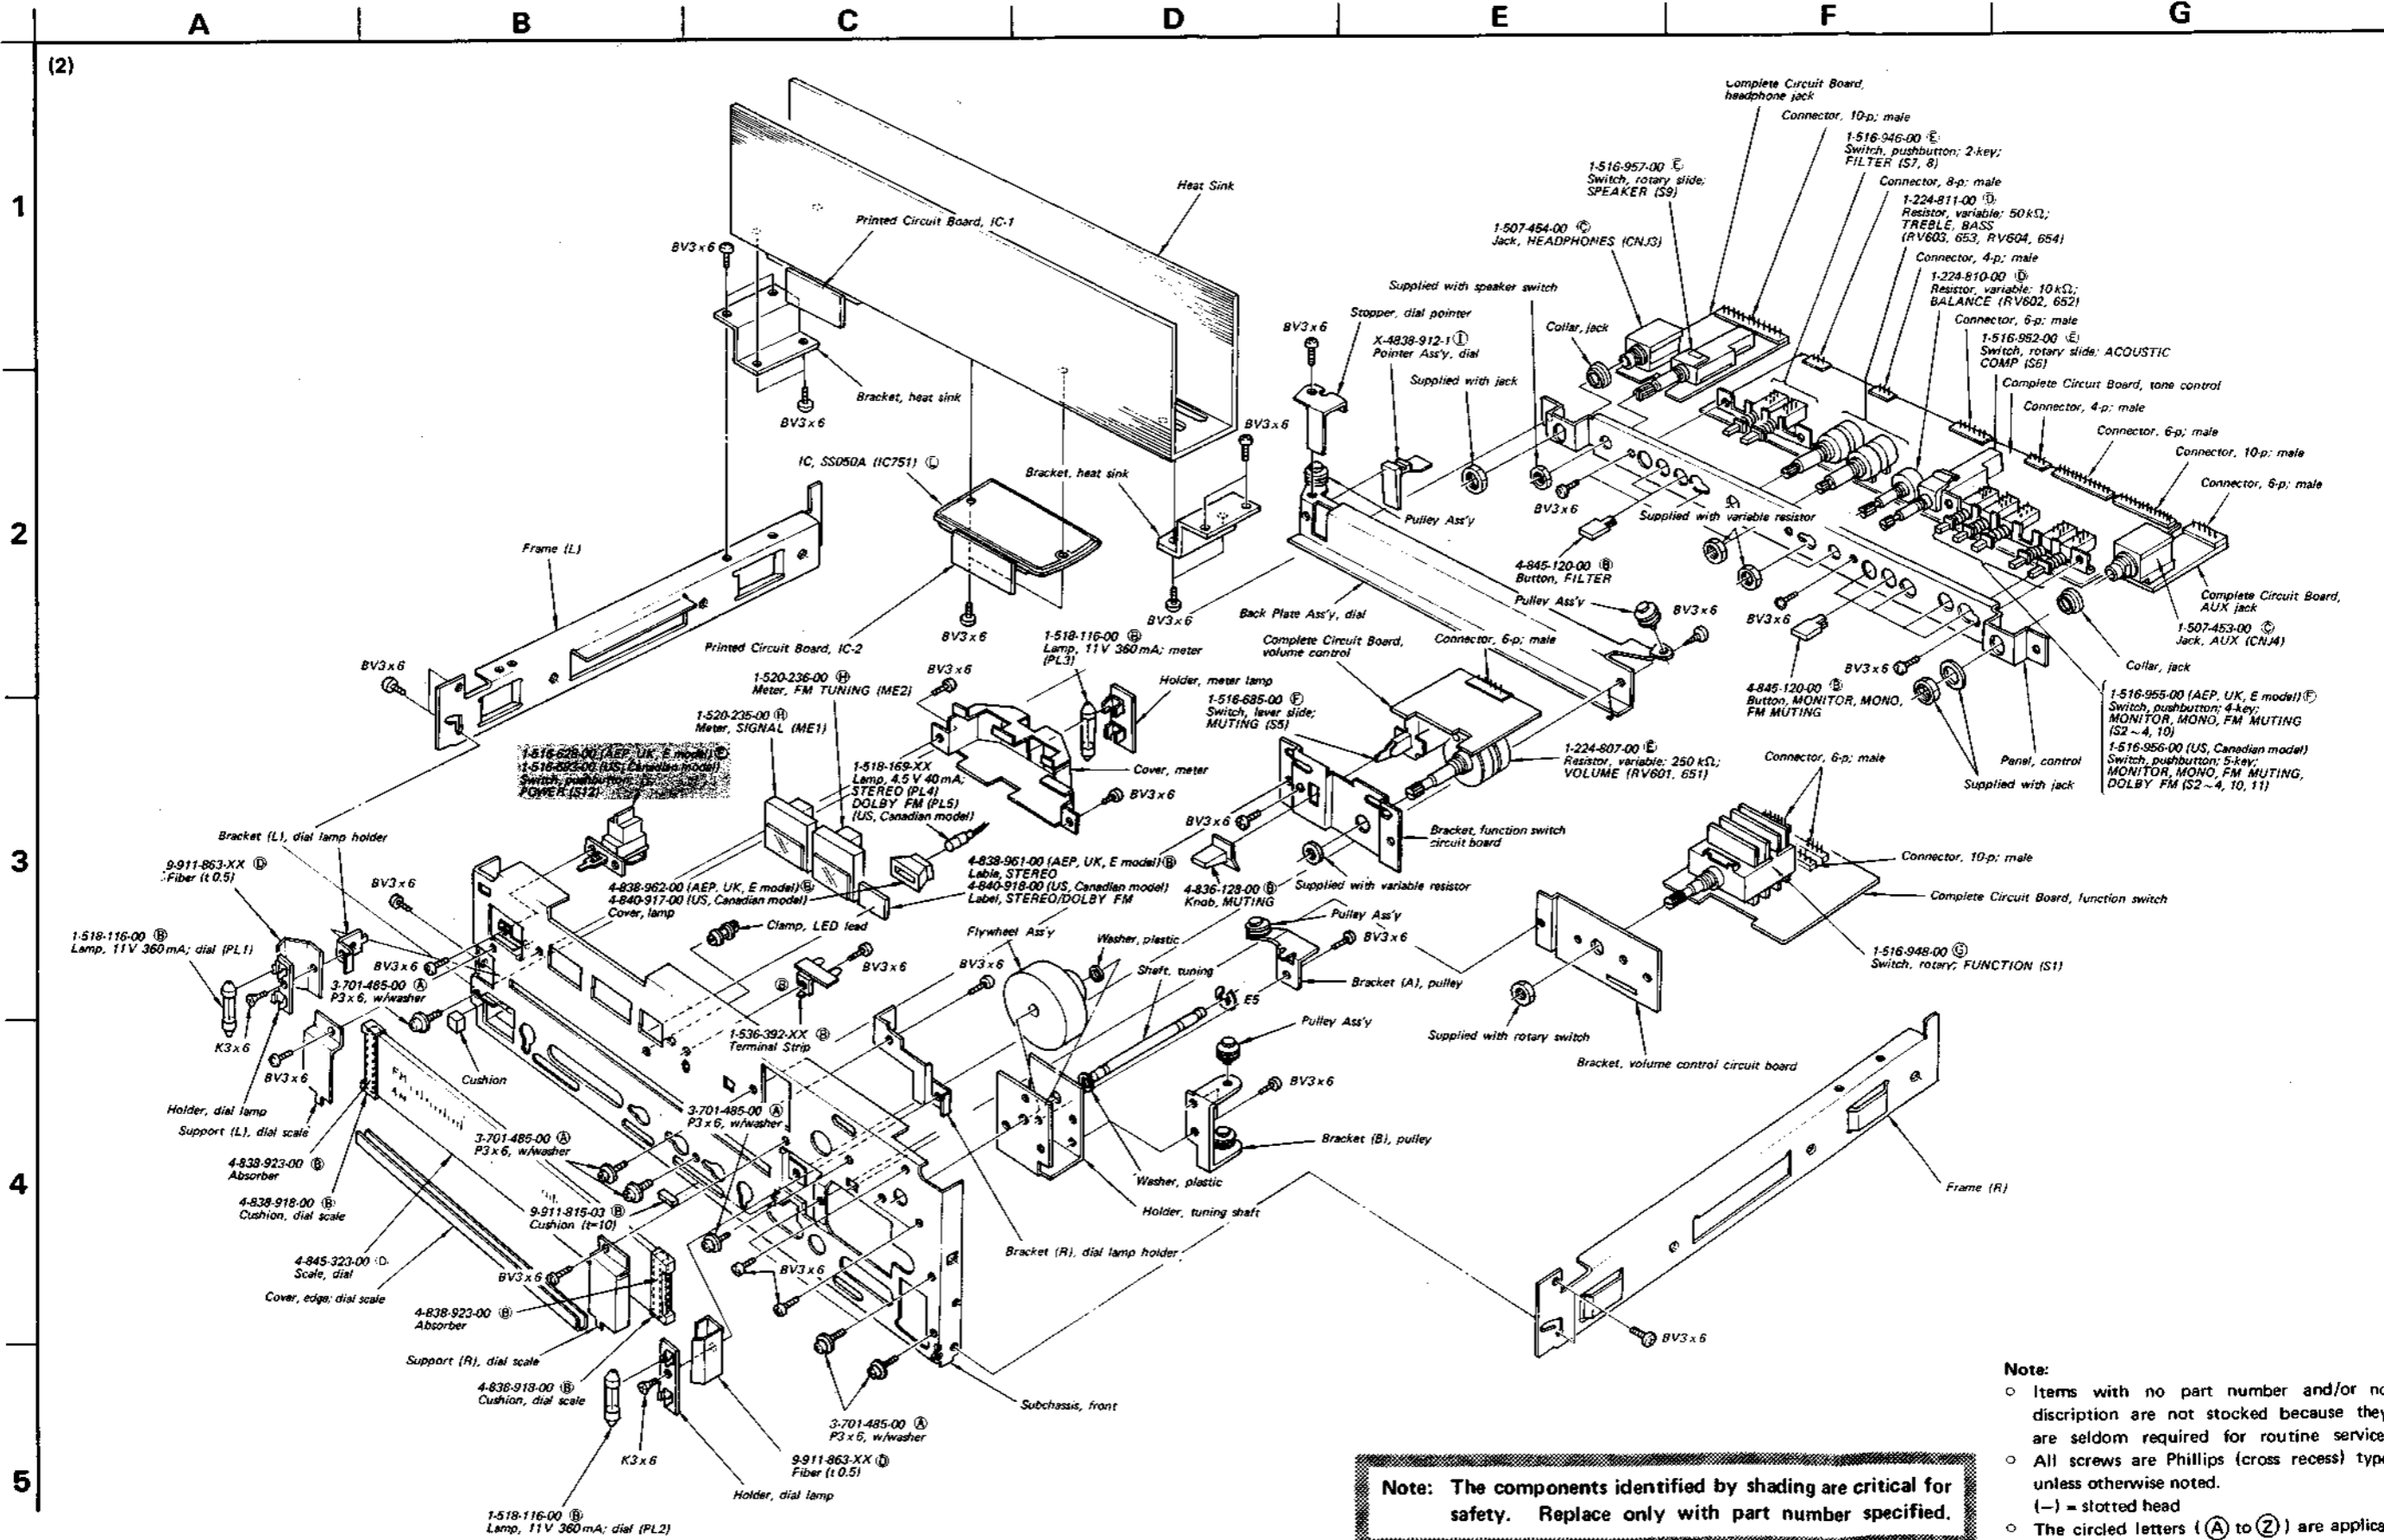


**Note: The components identified by shading are critical for safety. Replace only with part number specified.**

- Note:**
- Items with no part number and/or no description are not stocked because they are seldom required for routine service.
  - All screws are Phillips (cross recess) type unless otherwise noted.
  - (-) = slotted head
  - The circled letters (A) to (Z) are applicable for the European models only.

# STR-4800/4800SD    STR-4800/4800SD

(3)

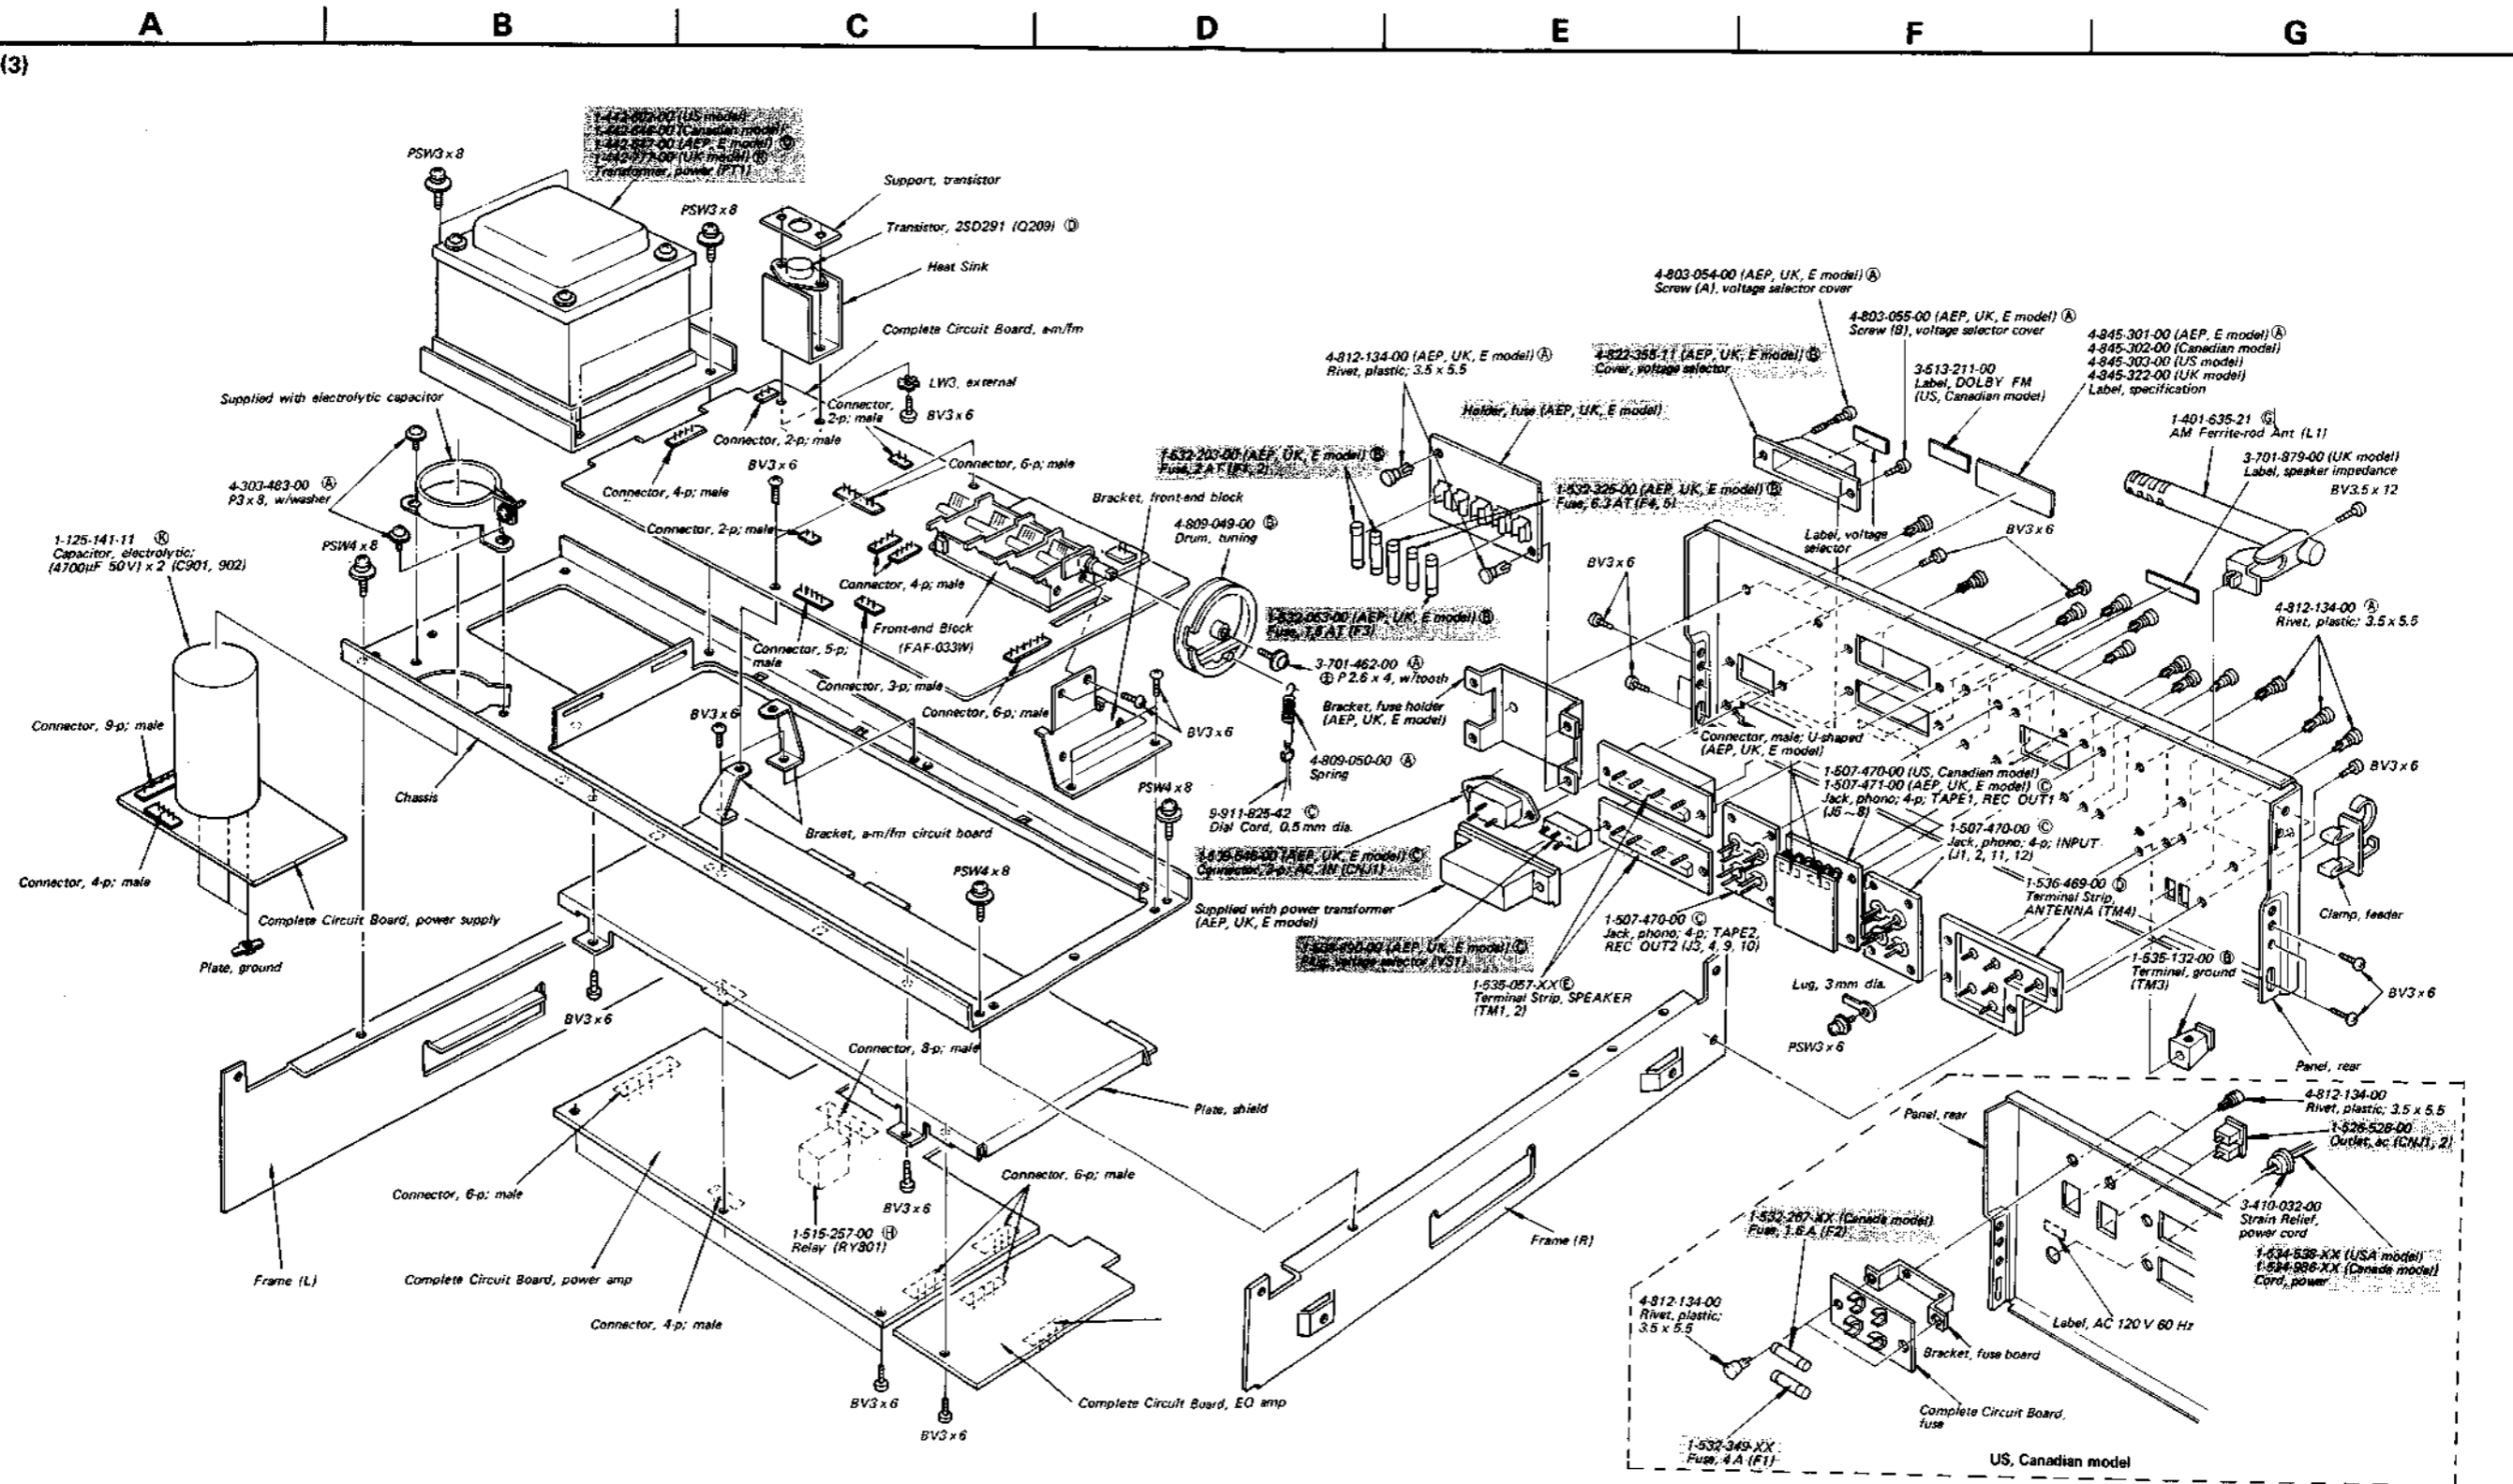

**Note:**

- Items with no part number and/or no description are not stocked because they are seldom required for routine service.
- All screws are Phillips (cross recess) type unless otherwise noted.
- (-) = slotted head
- The circled letters (A) to (Z) are applicable for the European models only.

**Note: The components identified by shading are critical for safety. Replace only with part number specified.**

SECTION 6  
ELECTRICAL PARTS LIST

Note: The circled letters (A) to (Z) are applicable for the European models only.

| <u>Ref. No.</u>       | <u>Part No.</u> | <u>Description</u>        |
|-----------------------|-----------------|---------------------------|
| <b>SEMICONDUCTORS</b> |                 |                           |
| <b>Transistors</b>    |                 |                           |
| ⇒ Q201, 202           | (B) 2SC403C     |                           |
| ⇒ Q203                | (B) 2SC632A     |                           |
| Q204                  | (B) 2SC945      |                           |
| ⇒ Q205, 206           | (B) 2SC632A     |                           |
| Q207, 208             | (B) 2SC945      |                           |
| Q209                  | (D) 2SD291      |                           |
| ⇒ Q210                | (B) 2SC403C     |                           |
| Q211                  | (B) 2SC945      |                           |
| ⇒ Q401 ~ 403          | (B) 2SC403C     |                           |
| Q405, 406             | (B) 2SC710      |                           |
| Q501, 551             | (B) 2SC1636     |                           |
| Q502, 552             | (B) 2SA705      |                           |
| Q601, 651             | (B) 2SC1636     |                           |
| Q602, 652             | (B) 2SA705      |                           |
| Q603, 653             | (B) 2SC632A     |                           |
| Q701, 751             | (B) 2SA705      |                           |
| Q703, 753             | (C) 2SA896      |                           |
| Q704, 754             | (C) 2SC1811     |                           |
| ⇒ Q705, 755           | (C) 2SA678      |                           |
| Q706, 756,            | (B) 2SC634A     |                           |
| ⇒ Q707, 757           |                 |                           |
| ⇒ Q708, 758           | (C) 2SA678      |                           |
| ⇒ Q801 ~ 803          | (C) 2SA678      |                           |
| ⇒ Q804                | (B) 2SC634A     |                           |
| Q805                  | (C) 2SC1811     |                           |
| Q931                  | (E) 2SC1124     |                           |
| Q932                  | (C) 2SA706      |                           |
| IC201                 | ICs             |                           |
| IC202                 | (H) HA1137W     |                           |
|                       | (J) HA1156      |                           |
| IC701, 751            | (L) SS050A      |                           |
| <b>Diodes</b>         |                 |                           |
| D1                    | (H) TX312       |                           |
| ⇒ D201, 202           | (B) 1S1555      |                           |
| D203                  | (B) 1T22A       |                           |
| ⇒ D204                | (B) EQB01-26    |                           |
| D205                  | (B) 10E2        |                           |
| ⇒ D261                | (B) 1S1555      |                           |
| ⇒ D401, 402           | (B) 1S1555      |                           |
| D403, 404             | (B) 1T22A       |                           |
| D601                  | (B) 1S1555      |                           |
| D701, 751             | (B) VD1221      |                           |
| D702 ~ 705,           | (B) 1S1555      |                           |
| D752 ~ 755            |                 |                           |
| D801 ~ 803            | (B) 1S1555      |                           |
| D804                  | (B) 1T243M      |                           |
| D805, 806             | (B) 1S1555      |                           |
| D901 ~ 904            | (C) U05E        |                           |
| D911, 912             | (B) 10E2        |                           |
| D913, 914             | (B) 10D2        |                           |
| ⇒ D931, 932           | (B) EQB01-21    |                           |
| <b>THERMISTOR</b>     |                 |                           |
| Pth801, 851           | 1-800-427-00    | (B) Positive              |
| <b>COILS</b>          |                 |                           |
| L1                    | 1-401-635-21    | (C) AM Ferrite-rod Ant    |
| L201                  | 1-459-152-00    | (B) 18 μH                 |
| L401                  | 1-407-169-XX    | (A) microinductor, 100 μH |
| L402                  | 1-407-182-XX    | (A) microinductor, 2.2 μH |
| L403                  | 1-405-656-00    | (B) AM Osc                |
| L404                  | 1-407-178-XX    | (A) microinductor, 1 μH   |
| L405                  | 1-407-182-XX    | (A) microinductor, 2.2 μH |

⇒ : Due to replacement parts, the descriptions are different from the diagrams.

Note: The components identified by shading are critical for safety. Replace only with part number specified.

# STR-4800/4800SD

Note: The circled letters (A to Z) are applicable for the European models only.

Ref. No. Part No. Description

## TRANSFORMERS

|        |  |  |
|--------|--|--|
| B1     | 1-417-014-31 (B) Ba1un                     |  |
| IFT201 | 1-404-029-00 (C) FM Discriminator          |  |
| IFT401 | 1-404-014-11 AM IFT (US, Canadian model)   |  |
| IFT402 | 1-404-014-21 (D) AM IFT (AEP, UK, E model) |  |
|        | 1-403-149-00 (B) AM IFT                    |  |
|        | 1-442-602-00 Power (US model)              |  |
|        | 1-442-646-00 Power (Canadian model)        |  |
| PT1    | 1-442-647-00 (Q) Power (AEP, E model)      |  |
|        | 1-442-777-00 (R) Power (UK model)          |  |

## FILTERS

CF201, 202 1-527-248-XX (B) Ceramic

LPF201 1-231-219-00 (D) Low-pass

## CAPACITORS

All capacitors are in  $\mu\text{F}$  and of electrolytic unless otherwise noted. ( $p = \mu\text{F}$ )  
50 and/or less working voltages are omitted except for electrolytic type.

C101 1-121-970-11 (A) 47 16 V ceramic

C102 1-101-924-11 (A) 0.022

C201 ~203 1-101-924-11 (A) 0.022 ceramic

C206 1-101-924-11 (A) 0.022 ceramic

C207 ~209 1-101-925-11 (A) 0.047 ceramic

C210 1-121-391-11 (A) 1 50 V

C211 1-102-820-11 (A) 330 p ceramic

C212 1-121-391-11 (A) 1 50 V

C213 1-121-415-11 (B) 100 16 V

C214 1-101-925-11 (A) 0.047 ceramic

C215, 216 1-101-924-11 (A) 0.022 ceramic

C217 1-101-925-11 (A) 0.047 ceramic

C218 1-121-726-11 (A) 0.47 50 V

C219 1-121-392-11 (A) 3.3 25 V

C220, 221 1-121-651-11 (A) 10 16 V

C222 1-121-972-11 (B) 220 16 V

C223 1-121-651-11 (A) 10 16 V

C224 1-103-717-11 (A) 470 p polystyrol

C225 1-101-924-11 (A) 0.022 ceramic

Ref. No. Part No. Description

C226 1-108-246-12 (A) 0.047 mylar

C227 1-121-651-11 (A) 10 16 V

C228, 229 1-121-726-11 (A) 0.47 50 V

C230 1-127-019-11 (B) 0.1 10 V solid aluminum

C231 1-123-068-11 (B) 220 16 V

C232, 233 1-108-580-12 (A) 0.011 mylar (AEP, UK, E model)

1-108-571-12 0.0047 mylar (US, Canadian model)

C234 1-101-924-11 (A) 0.022 ceramic

C235, 236 1-108-573-12 (A) 0.0056 mylar (AEP, UK, E model)

1-108-581-12 0.012 mylar (US, Canadian model)

C239 1-121-651-11 (A) 10 16 V

C240 1-127-021-11 (B) 0.33 10 V solid aluminum

C241 1-101-880-11 (A) 47 p ceramic

C242 1-121-651-11 (A) 10 16 V

C243 1-127-021-11 (B) 0.33 10 V solid aluminum

C244 1-101-880-11 (A) 47 p ceramic

C245 1-121-651-11 (A) 10 16 V

C246 1-123-068-11 (B) 220 16 V

C247 1-121-936-11 (B) 220 25 V

C251, 252 1-102-732-11 (A) 75 p ceramic

C261 1-102-959-11 (A) 22 p ceramic

(US, Canadian model)

C301, 351 1-121-391-11 1 50 V

C302, 352 1-121-479-11 22 16 V

C303, 353 1-102-947-11 10 p ceramic

C305, 355 1-131-198-11 6.8 16 V tantalum

C307, 357 1-121-409-11 47 16 V

C308, 358 1-121-391-11 1 50 V

C309, 359 1-108-244-12 0.033 mylar

C310, 360 1-131-196-11 2.2 20 V tantalum

C311, 361 1-108-603-12 0.1 mylar

C312, 362 1-108-585-12 0.018 mylar

C313, 363 1-108-587-12 0.022 mylar

C314, 364 1-121-391-11 1 50 V

C315, 365 1-121-395-11 4.7 25 V

C316, 366 1-108-230-12 0.0022 mylar

C317, 367 1-121-415-11 100 16 V

C391 1-121-651-11 10 16 V

Note: The components identified by shading are critical for safety. Replace only with part number specified.

Note: The circled letters (A to Z) are applicable for the European models only.

| Ref. No.  | Part No.               | Description             |
|-----------|------------------------|-------------------------|
| C401 ~403 | 1-101-924-11 (A)0.022  | ceramic                 |
| C404      | 1-121-479-11 (A)22     | 16 V                    |
| C405      | 1-101-924-11 (A)0.022  | ceramic                 |
| C406, 407 | 1-121-450-11 (A)2.2    | 50 V                    |
| C408, 409 | 1-101-924-11 (A)0.022  | ceramic                 |
| C410      | 1-121-352-11 (A)47     | 10 V                    |
| C411, 412 | 1-101-924-11 (A)0.022  | ceramic                 |
| C413      | 1-121-409-11 (A)47     | 16 V                    |
| C415      | 1-108-277-12 (A)0.001  | mylar                   |
| C416      | 1-108-355-12 (A)0.0056 | mylar                   |
| C417      | 1-121-413-11 (A)100    | 6.3 V                   |
| C418      | 1-108-249-12 (A)0.068  | mylar                   |
| C419      | 1-108-239-12 (A)0.01   | mylar                   |
| C420      | 1-121-409-11 (A)47     | 16 V                    |
| C421      | 1-102-953-11 (A)18 p   | ceramic                 |
| C422      | 1-103-714-11 (A)360 p  | polystyrol              |
| C423      | 1-101-924-11 (A)0.022  | ceramic                 |
| C424      | 1-101-924-11 (A)0.022  | ceramic                 |
| C425      | 1-108-239-12 (A)0.01   | mylar                   |
| C426, 431 | 1-101-924-11 (A)0.022  | ceramic                 |
| C501, 551 | 1-121-913-11 (A)3.3    | 25 V                    |
| C502, 552 | 1-102-959-11 (A)22 p   | ceramic                 |
| C503, 553 | 1-102-824-11 (A)470 p  | ceramic                 |
| C504, 554 | 1-108-573-12 (A)0.0056 | mylar                   |
| C505, 555 | 1-108-561-12 (B)0.0018 | mylar                   |
| C506, 556 | 1-123-077-11 (B)470    | 6.3 V (explosion proof) |
| C507, 557 | 1-121-912-11 (A)1      | 50 V                    |
| C601, 651 | 1-102-976-11 (A)180 p  | ceramic                 |
| C602, 652 | 1-108-230-12 (A)0.0022 | mylar                   |
| C603, 653 | 1-108-244-12 (A)0.033  | mylar                   |
| C604, 654 | 1-108-246-12 (A)0.047  | mylar                   |
| C605, 655 | 1-108-227-11 (A)0.001  | mylar                   |
| C606, 656 | 1-121-912-11 (A)1      | 50 V                    |
| C607, 657 | 1-102-978-11 (A)220 p  | ceramic                 |
| C608, 658 | 1-121-413-11 (A)100    | 6.3 V                   |
| C609, 659 | 1-102-959-11 (A)22 p   | ceramic                 |
| C610, 660 | 1-121-916-11 (B)10     | 16 V                    |
| C611, 661 | 1-108-246-12 (A)0.047  | mylar                   |
| C612, 662 |                        |                         |

| Ref. No.   | Part No.               | Description |
|------------|------------------------|-------------|
| C613, 663  | 1-108-228-12 (A)0.0015 | mylar       |
| C614, 664  | 1-121-916-11 (B)10     | 16 V        |
| C615, 665  | 1-121-913-11 (A)3.3    | 25 V        |
| C616, 666  | 1-102-963-11 (A)33 p   | ceramic     |
| C617, 667  | 1-121-915-11 (A)4.7    | 25 V        |
| C618, 668  | 1-121-413-11 (A)100    | 6.3 V       |
| C619, 669  | 1-108-585-12 (B)0.018  | mylar       |
| C620, 670  | 1-108-603-12 (B)0.1    | mylar       |
| C701, 751  | 1-102-116-11 (A)680 p  | ceramic     |
| C702, 752  | 1-121-912-11 (A)1      | 50 V        |
| C703, 753  | 1-123-076-11 (B)330    | 6.3 V       |
| C704, 754  | 1-102-973-11 (A)100 p  | ceramic     |
| C706, 756  | 1-121-413-11 (A)100    | 6.3 V       |
| C708, 758  | 1-123-056-11 (B)22     | 50 V        |
| C709, 759  |                        |             |
| C710, 760  | 1-108-244-12 (A)0.033  | mylar       |
| C761       | 1-121-413-11 (A)100    | 6.3 V       |
| C801       | 1-121-419-11 (B)220    | 6.3 V       |
| C802       | 1-121-479-11 (A)22     | 16 V        |
| C803       | 1-121-419-11 (B)220    | 6.3 V       |
| C804       | 1-101-004-11 (A)0.01   | ceramic     |
| C901, 902  | 1-125-141-11 (K)4700   | 50 V        |
| C911, 912  | 1-121-937-11 (B)220    | 50 V        |
| C913, 914  | 1-108-251-12 (B)0.1    | mylar       |
| C915, 916  | 1-121-937-11 (B)220    | 50 V        |
| C921, 922  | 1-121-935-11 (B)100    | 25 V        |
| C931, 932  | 1-123-062-11 (B)100    | 35 V        |
| C933, 934  | 1-108-239-12 (A)0.01   | mylar       |
| C935 ~938  | 1-121-935-11 (B)100    | 25 V        |
| C951 ~954  | 1-108-433-12 (B)0.1    | 200 V mylar |
| CT401, 402 | 1-141-147-XX (B)15 p   | trimmer     |

## RESISTORS

All resistors are in  $\Omega$ . Regular-type 1/4W carbon resistors are omitted. Check the schematic diagram for the resistance values. (k = 1000, M = 1000k)

RI 1-202-719-11 1M 1/2 W composition (US, Canadian model)

Note: The components identified by shading are critical for safety. Replace only with part number specified.

# STR-4800/4800SD

Note: The circled letters (A to Z) are applicable for the European models only.

| Ref. No.               | Part No.              | Description                                       |
|------------------------|-----------------------|---|
| R101                   | 1-211-530-11 (A)220   | ¼W carbon (nonflammable)                          |
| R208                   | 1-211-518-11 (A)68    | ¼W carbon (nonflammable)                          |
| R214                   | 1-211-524-11 (A)120   | ¼W carbon (nonflammable)                          |
| R236                   | 1-202-559-11 (A)270   | ½W composition (nonflammable)                     |
| R237, 242              | 1-211-522-11 (A)100   | ¼W carbon (nonflammable)                          |
| R314, 364              | 1-246-486-11          | 3.6 k ± 2% ¼W carbon (US, Canadian model)         |
| R318, 368              | 1-246-472-11          | 910 ± 2% ¼W carbon (US, Canadian model)           |
| R319, 369              | 1-246-464-11          | 430 ± 2% ¼W carbon (US, Canadian model)           |
| R322, 372              | 1-211-522-11          | 100 ¼W carbon (nonflammable) (US, Canadian model) |
| R401                   | 1-244-891-11          | 5.6 k ½W carbon (US, Canadian model)              |
| R419, 424              | 1-211-522-11 (A)100   | ¼W carbon (nonflammable)                          |
| R603                   | 1-202-561-11          | 330 ½W composition (US, Canadian model)           |
| R706, 756              | 1-211-514-11 (A)47    | ¼W carbon (nonflammable)                          |
| R712, 762<br>R713, 763 | 1-211-538-11 (A)470   | ¼W carbon (nonflammable)                          |
| R715, 765              | 1-202-525-11 (A)10    | ½W composition                                    |
| R716, 766              | 1-202-517-11 (A)4.7   | ½W composition                                    |
| R718, 719              | 1-202-565-11 (A)470   | ½W composition                                    |
| R767                   | 1-202-595-11 (A)8.2 k | ½W composition                                    |
| R768, 769              | 1-202-565-11 (A)470   | ½W composition                                    |
| R805                   | 1-211-515-11 (A)51    | ¼W carbon (nonflammable)                          |
| R808                   | 1-202-597-11 (A)10 k  | ½W composition                                    |
| R812                   | 1-202-561-11 (A)330   | ½W composition                                    |
| R813                   | 1-211-538-11 (A)470   | ¼W carbon (nonflammable)                          |



| Ref. No.        | Part No.   | Description  |
|-----------------|--|--|
| R911, 912       | 1-212-857-11 (A)10   | ¼W fusible carbon (nonflammable)   |
| R913            | 1-211-582-11 (A)4.7  | ¼W carbon (nonflammable)   |
| R914            | 1-213-213-11 (B)18   | 1W fusible carbon (nonflammable)   |
| R915, 916       | 1-211-515-11 (A)51   | ¼W carbon (nonflammable)   |
| R921, 922       | 1-211-530-11 (A)220  | ¼W carbon (nonflammable)   |
| R931, 932       | 1-211-945-11 (A)2.2 k  | ¼W carbon (nonflammable)   |
| R935, 936       | 1-211-515-11 (A)51   | ¼W carbon (nonflammable)   |
| RT201           | 1-224-647-XX (B)47 k   | adjustable   |
| RT202           | 1-224-648-XX (B)100 k  | adjustable   |
| RT203           | 1-224-644-XX (B)4.7 k  | adjustable   |
| RT204           | 1-224-647-XX (B)47 k   | adjustable   |
| RT205           | 1-224-647-XX (B)47 k   | adjustable   |
| RV601, 651      | 1-224-807-00 (E)250 k  | variable, VOLUME   |
| RV602, 652      | 1-224-810-00 (D)10 k   | variable, BALANCE  |
| RV603, 653      | 1-224-811-00 (D)50 k   | variable, TREBLE, BASS   |
| RV604, 654      |  |  |
| <b>SWITCHES</b> |  |  |
| S1              | 1-516-948-00 (G)Rotary, FUNCTION   |  |
| S2 ~4, 10       | 1-516-955-00 (F)Pushbutton, 4-key; MONITOR, MONO, FM MUTING (AEP, UK, E model) |  |
| S2 ~4, 10, 11   | 1-516-956-00   | Pushbutton, 5-key; MONITOR, MONO, FM MUTING, DOLBY FM (US, Canadian model) |
| S5              | 1-516-685-00 (F)Lever Slide, MUTING  |  |
| S6              | 1-516-952-00 (E)Rotary Slide, ACOUSTIC COMP                                    |  |
| S7, 8           | 1-516-946-00 (E)Pushbutton, 2-key; FILTER                                      |  |
| S9              | 1-516-957-00 (E)Rotary Slide, SPEAKER  |  |
| S12             | 1-516-628-00 (E)Pushbutton; POWER (AEP, UK, E model)                           |  |
|                 | 1-516-693-00   | Pushbutton; POWER (US, Canadian model)                                     |
| SE1, 2          | 1-516-954-00 (B)De-emphasis (AEP, UK, E model)                                 |  |
| <b>FUSES</b>    |  |  |
| F1              | 1-532-349-XX   | 4 A (US, Canadian model)   |










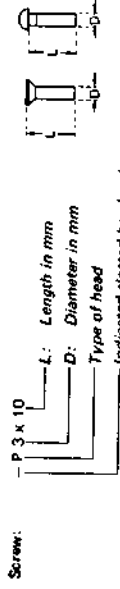



Note: The components identified by shading are critical for safety. Replace only with part number specified.


















## HARDWARE NOMENCLATURE



| Reference Designation      | Shape  | Description                                    | Remarks   |
|----------------------------|--|--|---|
| <b>SELF-TAPPING SCREWS</b> |  |  |   |
| TA                         |   | self-tapping screw                             | ex: TA, P 3 x 10  |
| PTP                        |   | pan-head self-tapping screw                    | binding-head self-tapping (TA, B) screw for replacement                 |
| PTPWH                      |   | pan-head self-tapping screw with washer face   | binding-head self-tapping (TA, B) screw and flat washer for replacement |
| PTTWH                      |   | pan-head thread-rolling screw with washer face | binding-head (B) screw and flat washer for replacement                  |
| <b>SET SCREWS</b>          |  |  |   |
| SC                         |   | set screw                                      |   |
| SC                         |   | hexagon-socket set screw                       | ex: SC 2.6 x 4, hexagon socket  |
| <b>NUT</b>                 |  |  |   |
| N                          |   | nut  |   |
| <b>WASHERS</b>             |  |  |   |
| W                          |   | flat washer                                    |   |
| SW                         |   | spring washer                                  |   |
| LW                         |   | internal-tooth lock washer                     | ex: LW3, internal   |
| LW                         |   | external-tooth lock washer                     | ex: LW3, external   |
| <b>RETAINING RINGS</b>     |  |  |   |
| E                          |   | retaining ring                                 |   |
| G                          |  | grip-type retaining ring                       |   |

| Reference Designation | Shape   | Description                                       | Remarks  |
|-----------------------|---|---|--|
| <b>SCREWS</b>         |   |   |  |
| P                     |    | pan-head screw                                    | binding-head (B) screw for replacement                                   |
| PWH                   |    | pan-head screw with washer face                   | binding-head (B) screw and flat washer for replacement                   |
| PS                    |    | pan-head screw with spring washer                 | binding-head (B) screw and spring washer for replacement                 |
| PSW                   |    | pan-head screw with spring and flat washers       | binding-head (B) screw and spring and flat washers for replacement       |
| PSPW                  |    | pan-head screw with spring washer and flat washer | binding-head (B) screw and spring washer and flat washer for replacement |
| R                     |    | round-head screw                                  |  |
| K                     |    | flat-countersunk-head screw                       |  |
| HK                    |   | oval-countersunk-head screw                       |  |
| B                     |  | binding-head screw                                |  |
| T                     |  | truss-head screw                                  |  |
| F                     |  | flat-fillister-head screw                         | binding-head (B) screw for replacement                                   |
| RF                    |  | fillister-head screw                              |  |
| BV                    |  | brazer-head screw                                 |  |