


STR-7065

USA Model
(Serial No. 807,001 and later)
Canada Model
GEP Model

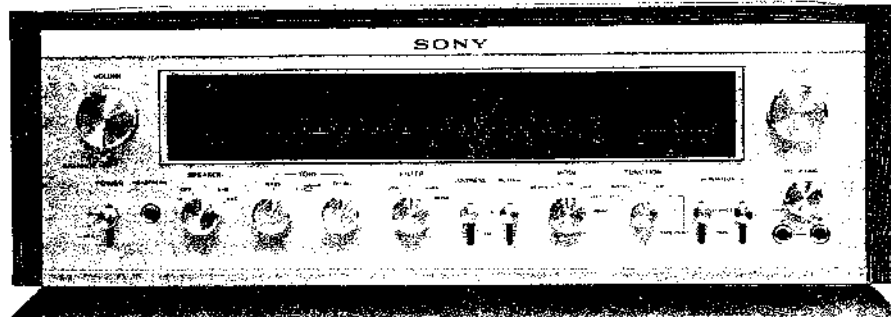

FM STEREO/FM-AM RECEIVER

SPECIFICATIONS

Fm Tuner Section

Frequency range:	87.5 MHz to 108 MHz
Usable sensitivity:	1.6 μ V
Signal-to-noise ratio:	70 dB
Capture ratio:	1.0 dB
Frequency response:	20 Hz to 15,000 Hz $\pm$ 1 dB
Stereo separation:	Better than 38 dB at 400 Hz
Harmonic distortion:	Mono 0.2 % at 400 Hz 100 % modulation Stereo 0.5 % at 400 Hz 100 % modulation

A-m Tuner Section:

Frequency range:	530 kHz to 1,605 kHz
Sensitivity:	53 dB/m, built-in antenna at 1,000 kHz 30 μ V, external antenna
Signal-to-noise ratio:	50 dB at 50 mV/m

Audio Amplifier Section:

Continuous RMS

power output: (Less than 0.2 % THD)	Both channels driven simultaneously 60 + 60 watts (8 ohms) at 20 Hz to 20,000 Hz 70 + 70 watts (8 ohms), 85 + 85 watts (4 ohms) at 1 kHz One channel driven separately 85/85 watts (8 ohms), 110/110 watts (4 ohms)
--	--

Dynamic power output: (IHF constant power supply method)	240 watts (8 ohms) 380 watts (4 ohms)
--	--

Harmonic distortion:	Less than 0.2 % at continuous RMS power output Less than 0.1 % at 1 watt output
----------------------	---

General

Power requirements:	120 volts, 60 Hz ac (USA and Canada Model) 100, 120, 220, 240 volts, 50/60 Hz ac (GEP Model)
---------------------	---

Power consumption:	180 watts (USA Model) 360 VA (Canada Model) 300 watts (GEP Model)
--------------------	---

Dimensions:	471 (w) x 157 (h) x 375 (d) mm 18 ⁹ / ₁₆ x 6 ³ / ₁₆ x 14 ³ / ₄ inches
-------------	--

Net weight:	15.2 kg (33 lb 8 oz)
-------------	----------------------

SONY
SERVICE MANUAL

TABLE OF CONTENTS

<u>Section</u>	<u>Title</u>	<u>Page</u>	<u>Section</u>	<u>Title</u>	<u>Page</u>
	SERVICING NOTES	1			
1. TECHNICAL DESCRIPTION			5-3.	Mounting Diagram	
1-1.	Specifications	2	— REC/PB Connector Board —	26	
1-2.	Circuit Description Digest	3	5-4.	Mounting Diagram	
1-3.	Level Diagram	6	— Loudness Control Board —	26	
1-4.	Block Diagram	7	5-5.	Mounting Diagram — A-m Front-End/I-f	
			Amplifier/MPX Board —	27	
			(USA Model: 807,001 ~ /Canada Model:		
			700,001 ~ /GEP Model: 400,001 ~)		
2. DISASSEMBLY AND REPLACEMENT			5-6.	Schematic Diagram	
2-1.	Bottom Plate Removal	9	— Tuner Section —	29	
2-2.	Front Panel Removal	9	(USA Model: 807,001 ~ /Canada Model:		
2-3.	Dial-Cord Restringing	9	700,001 ~ /GEP Model: 400,001 ~)		
2-4.	Power Transistor Replacement	10	5-7.	Schematic Diagram	
2-5.	Dial Glass Removal	11	— Audio Amplifier Section —	31	
2-6.	Meter Replacement	11	(USA Model only: ~ 808,100)		
2-7.	VOLUME Control Replacement	11	5-8.	Mounting Diagram	
2-8.	Control, Jack and Switch		— Control Board —	33	
Replacement	12		(USA Model only: ~ 808,100)		
2-9.	Chassis Layout	13	5-9.	Mounting Diagram	
			— Power Amplifier/Power Supply		
			Board —	35	
			(USA Model only: ~ 808,100)		
3. ALIGNMENT AND ADJUSTMENTS			5-10.	Mounting Diagram	
3-1.	Fm I-f Strip Alignment	14	— Power Amplifier/Power Supply		
3-2.	Fm Discriminator Alignment	15	Board —	37	
3-3.	Fm Frequency Coverage Alignment	16	(USA Model: 808,101 ~ /Canada Model:		
3-4.	Fm Stereo Separation Adjustment	16	700,001 ~ /GEP Model: 400,001 ~)		
3-5.	Muting Adjustment	17	5-11.	Mounting Diagram	
3-6.	A-m I-f Strip Alignment	18	— Control Board —	39	
3-7.	A-m Frequency Coverage and		(USA Model: 808,101 ~ /Canada Model:		
Tracking Alignment	18		700,001 ~ /GEP Model: 400,001 ~)		
3-8.	Tuner Input Meter Calibration	19	5-12.	Schematic Diagram	
3-9.	Power-Amplifier Adjustment	21	— Audio Amplifier Section —	41	
			(USA Model: 808,101 ~ /Canada Model:		
			700,001 ~ /GEP Model: 400,001 ~)		
4. REPACKING		22	6. EXPLODED VIEWS		43
5. DIAGRAMS			7. ELECTRICAL PARTS LIST		48
5-1.	Mounting Diagram				
— Fm Front-End —	24				
5-2.	Mounting Diagram				
— MIC Amp Board —	25				

SERVICING NOTES

1. CAUTIONS ON HANDLING ICs

- a. Excessive heat may destroy an IC. Never reinstall a used IC.
- b. Check the related components for defects before replacing the IC.
- c. When installing new ICs, do not apply excessive heat. Solder quickly while holding a wet rag on the heat-sink tab as shown in Fig. A.
- d. Do not short adjacent IC leads when performing electrical checks as this might damage the IC.
- e. Always solder the IC heat sink to the printed circuit board to avoid damage.

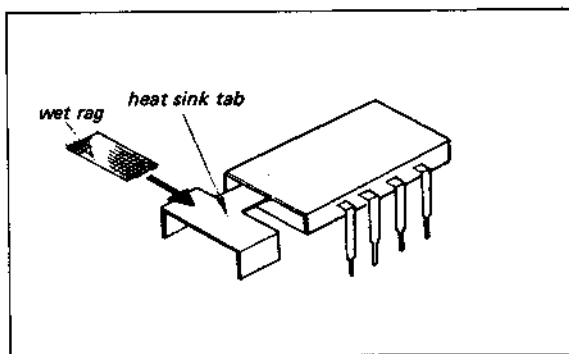


Fig. A. IC installation

2. NYLON RIVET REMOVAL

- a. To remove the nylon rivet, push its end with a tweezers as shown in Fig. B.
- b. To reinstall the rivet, insert the flared part into the opening first, then push its head as far as it will go.

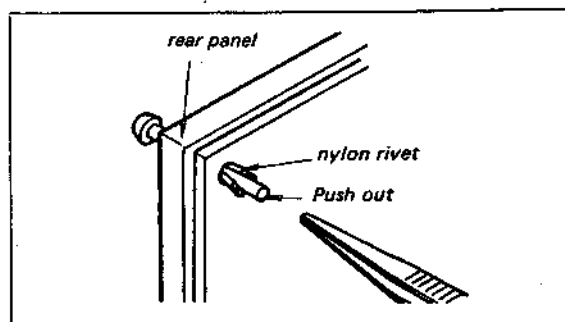


Fig. B. Nylon rivet removal

SECTION 1

TECHNICAL DESCRIPTION

1-1. SPECIFICATIONS

Fm Tuner Section

Frequency range: 87.5 MHz to 108 MHz

Antenna terminals: 300 ohms balanced
75 ohms unbalanced

Intermediate frequency: 10.7 MHz

Sensitivity: 2.0 μ V (IHF), 1.6 μ V (S/N = 30 dB)

Image rejection: 70 dB

I-f rejection: 100 dB

Spurious rejection: 90 dB

A-m suppression: 56 dB

Capture ratio: 1.0 dB

Selectivity: 70 dB, IHF

Signal-to-noise ratio: 70 dB

Frequency response: 20 Hz to 15 kHz $\pm$ 1 dB

Harmonic distortion: Mono 0.2 % at 400 Hz, 100 %
(75 kHz deviation) modulation
Stereo 0.5 % at 400 Hz, 100 %
(75 kHz deviation) modulation

Stereo separation: Better than 38 dB at 400 Hz

19 kHz, 38 kHz suppression: 40 dB

SCA suppression: 55 dB

Muting level: Less than 5 μ V

A-m Tuner Section

Frequency range: 530 kHz to 1,605 kHz

Antenna: Built-in bar antenna and
external antenna terminal

Intermediate frequency: 455 kHz

Sensitivity: 53 dB/m, built-in bar antenna at
1,000 kHz

Image rejection: 30 μ V, external antenna
50 dB at 1,000 kHz

I-f rejection: 40 dB at 1,000 kHz

Signal-to-noise ratio: 50 dB at 50 mV/m

Harmonic distortion: 0.8 % at 50 mV/m

Amplifier Section

Continuous RMS power output: Both channels driven simultaneously
(Less than 0.2 % THD)
60 + 60 watts (8 ohms)
at 20 Hz to 20 kHz
70 + 70 watts (8 ohms),
85 + 85 watts (4 ohms) at 1 kHz
One channel driven separately
85/85 watts (8 ohms)
110/110 watts (4 ohms)

Dynamic power output: 240 watts (8 ohms)
(IHF constant power supply method)
380 watts (4 ohms)

Power bandwidth, IHF: 15 Hz to 35 kHz

Damping factor: 50 (8 ohms)

Harmonic distortion: Less than 0.2 % at continuous RMS power output
Less than 0.1 % at 1 watt output

IM distortion: (60 Hz : 7 kHz = 4 : 1)
Less than 0.2 % at continuous RMS power output
Less than 0.1 % at 1 watt output

Frequency response:

PHONO MIC AUX TAPE REC/PB (input)	RIAA equalization curve $\pm$ 1 dB 100 Hz to 10 kHz $\pm$ $\frac{0}{3}$ dB 10 Hz to 70 kHz $\pm$ $\frac{0}{3}$ dB
--	--

POWER AMP } 10 Hz to 100 kHz ± 0 dB

Signal-to-noise ratio:

	S/N	Weighting network	Input level
PHONO	72 dB	A	3 mV
MIC	65 dB	B	1.6 mV
AUX	90 dB	A	250 mV
TAPE			
REC/PB (input)			
POWER AMP	110 dB		1 V

Input sensitivity and impedance:

	Maximum sensitivity	Impedance
PHONO	2 mV	47 k ohms
MIC	1 mV	47 k ohms
AUX	150 mV	50 k ohms
TAPE		
REC/PB (input)		
POWER AMP	1 V	50 k ohms

Note: Maximum sensitivity means the input level at which the continuous RMS power output is provided into 8 ohms (with both channels driven at full volume) at 1 kHz.

Output level and impedance:

	Level	Impedance
REC OUT	250 mV	10 k ohms
REC/PB (output)	30 mV	82 k ohms
PREAMP OUTPUT	1 V	4.7 k ohms

HEADPHONE: Accepts all low and high impedance headphones.

SPEAKER: Accepts 4 ~ 16 ohm speakers.

Tone controls: BASS ± 10 dB at 100 Hz
TREBLE ± 10 dB at 10 kHz

High filter: 12 dB/oct. above 9 kHz

Low filter: 12 dB/oct. below 50 Hz

Loudness control: + 10 dB at 50 Hz, + 4 dB at 10 kHz
(Attenuation : 30 dB)

General:

System: Superheterodyne fm/a-m, switching MPX
Complementary symmetry circuit
(SEPP OTL), Direct output coupling

Power requirements: 120 volts, 60 Hz ac
(USA and Canada Model)
100, 120, 220, 240 volts, 50/60 Hz ac
(GEP Model)

Power consumption: 180 watts USA Model
360 VA Canada Model
300 watts GEP Model

AC outlets: 2 switched, 200 watts total }
1 unswitched, 200 watts }
(USA and Canada Model only)

Dimensions: 471 (w) x 157 (h) x 375 (d) mm
18⁹/₁₆ x 6³/₁₆ x 14³/₄ inches

Net weight: 15.2 kg (33 lb 8 oz)

Shipping weight: 18.9 kg (41 lb 11 oz)

1-2. CIRCUIT DESCRIPTION DIGEST

1. Noise Elimination Circuit for Tuner Section

This circuit is used to eliminate noises due to B+ voltage fluctuation of tuner when changing the FUNCTION switch S1 to FM or AM from other position. Referring to Fig. 1-1, when S1 is changed

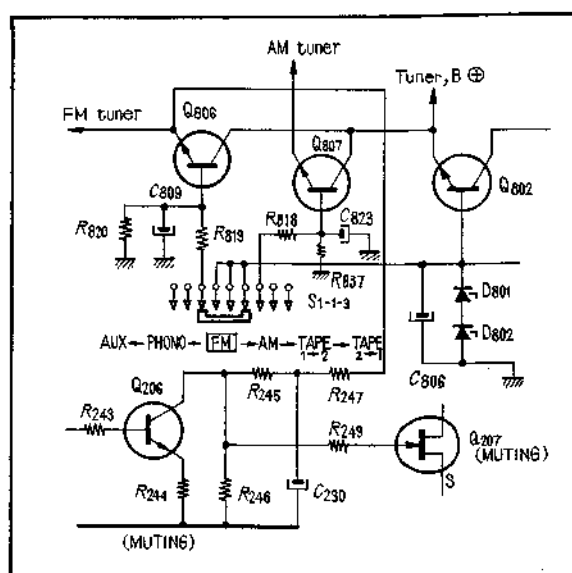


Fig. 1-1. Noise elimination circuit for tuner section

to FM, Q806 is gradually turned on due to the time constant circuit of R819 and C809 and supplies B+ voltage to the FM tuner circuit.

However, Q206 is turned off during the time constant of R247 and C230 since Q806 is turned on, killing the detector output.

Thus, the interstation or "pop" noise is completely eliminated through these two circuits.

R820 is for discharging C809 when FM circuit is disengaged.

When S1 is changed to AM, Q807 is gradually turned on due to the time constant circuit of R818 and C823, supplying power to the a-m local oscillator at A-M mode.

2. Audio Muting Circuit

This muting circuit is used to eliminate the "pop" noise generated when the POWER switch is set to ON or OFF and operates as follows: Referring to Fig. 1-2, when the POWER switch is set to ON, B+ and B- increase quickly to its normal operating voltage. Q803 is off due to the long time constant circuit of R808 and C807. Q804 and Q603 are forced into conduction as the bleeder circuit R810, R811 and R812 are designed so that the point "C" becomes positive. Thus, noises in the pre-stage amplifiers are effectively grounded through Q603.

About 2.5 seconds later after POWER switch is set to ON, Q803 is on as C807 is fully charged. This grounds point "D", forcing point "C" negative. As a result, Q804 and Q603 are off, stopping the muting. Conversely, when the POWER switch is set to OFF, Q803 is immediately turned off as C807 is discharged by R807. C808 holds positive voltage due to the long time constant circuit of R809 and C808, and D809 (reverse resistance). As a result, Q804 and Q603 are turned on, thus PREAMP OUT is effectively grounded.

Referring to Fig. 1-3, Q805 removes the residual "pop" noises at power off caused by unbalanced discharging characteristics of B+ and B- power supply circuit. These noises cannot be removed by the muting circuit previously described.

Q805 operates as follows:

Q805 is normally off, as the base circuit is reverse biased due to the bleeder circuit.

After power is off, when the difference of absolute value of B+ and B- exceeds some extent, Q805 is forward biased and C901 is discharged quickly through Q805 and R817, maintaining equal discharging of B+ and B- power supply.

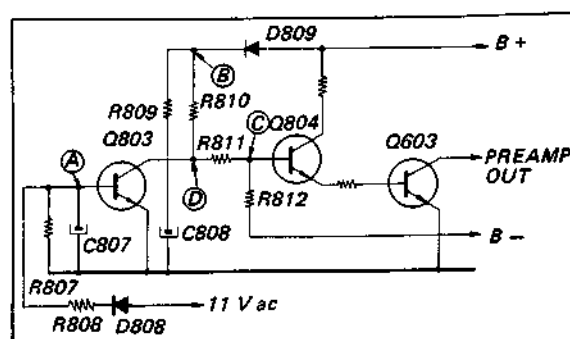


Fig. 1-2. Audio muting circuit (1)

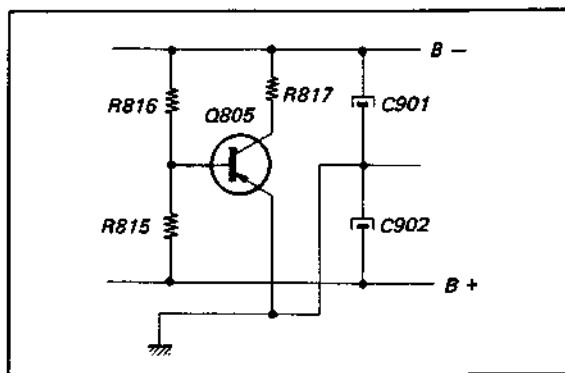


Fig. 1-3. Audio muting circuit (2)

3. Speaker Protection Circuit

In a direct-coupled power amplifier, some faults in transistors appear a large dc voltage across the speaker output terminal.

This might damage a delicate speaker system. The speaker protection circuit is used to remove the dc voltage as shown in Fig. 1-4.

The speaker protection is performed by two ways. One is the circuitry itself (self-defensible) and the other is additional protection circuit (Q708, Q709 and Q710).

They operate as follows:

- (1) In case that any of power transistors (Q706, Q707, Q901 and Q902) shorted.

If Q901 is shorted, for example, excessive current flows in this transistor and a large positive dc voltage will appear across the speaker output terminal (point "a" in Fig. 1-4).

This voltage is fed-back to the base of Q703 through R710. Q703 is turned off and Q705 is excessively forward biased. Thereby, large

bias voltage enough to short Q902 is applied to the base of Q707.

As a result, excessive current flows in Q901 and Q902, pulling voltage at point "a" back to zero, then the fuses in the power supply circuit are blown. Same is true when Q902 is shorted, except for the negative dc voltage at point "a". Then Q705 is off and Q901 is forced to short. Thus, speaker is protected even if one of the power transistor is shorted by accident, by forcing the other power transistor into secondary break-down.

- (2) In case that any of Q701, Q702, Q703 shorted Q705 is forced to either excessively forward biased or cutoff.

When Q705 is excessively forward biased

Q707 and Q902 are turned on and negative dc voltage will appear at point "a". This voltage turns Q709 and Q710 on, shorting Q707 base to ground. As a result, current flows in Q707 and Q902 decrease and the point "a" voltage becomes effectively low.

When Q705 is forced to cutoff

Q706 and Q901 are turned on and the positive dc voltage will appear at point "a". This voltage turns Q708 on, shorting Q706 base to ground and maintaining the point "a" voltage low as previously described.



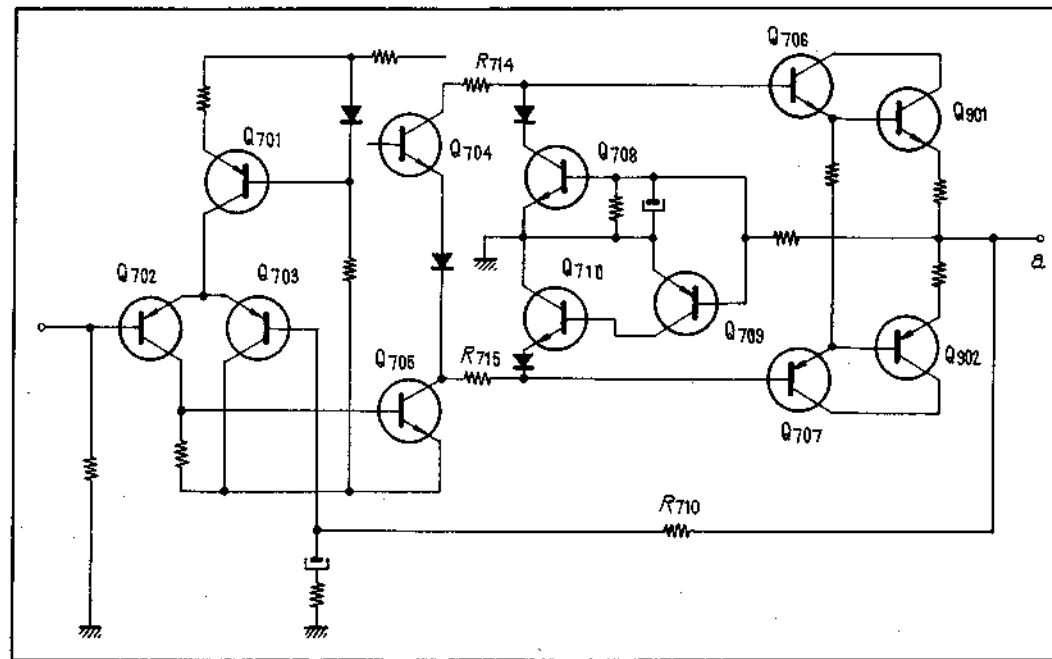



Fig. 1-4. Speaker protection circuit

1-3. LEVEL DIAGRAM

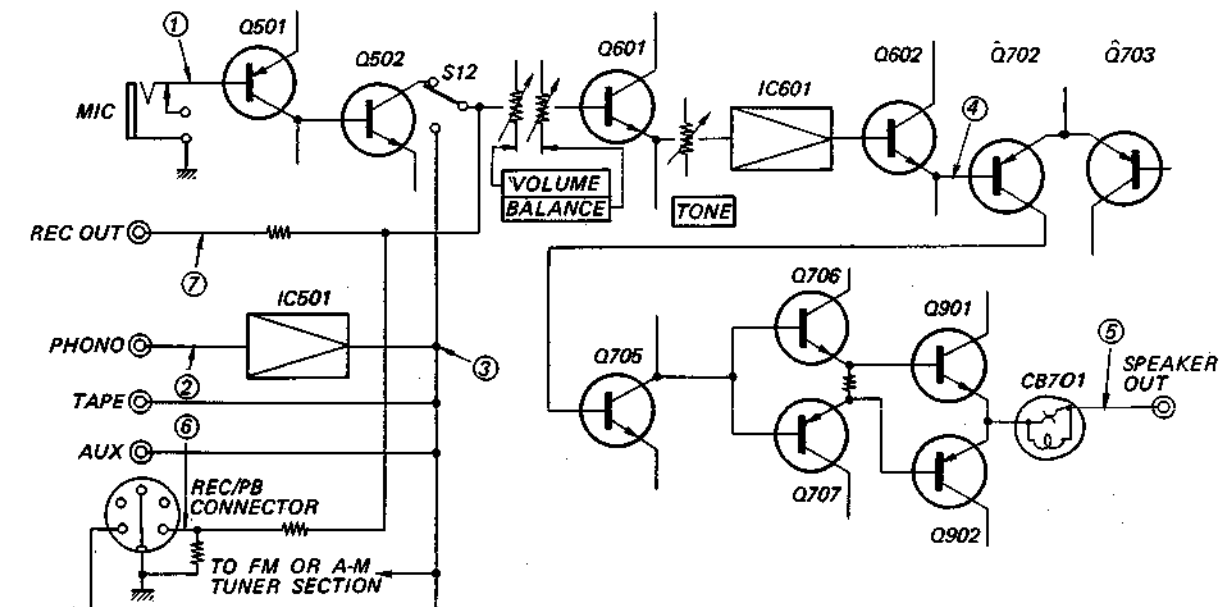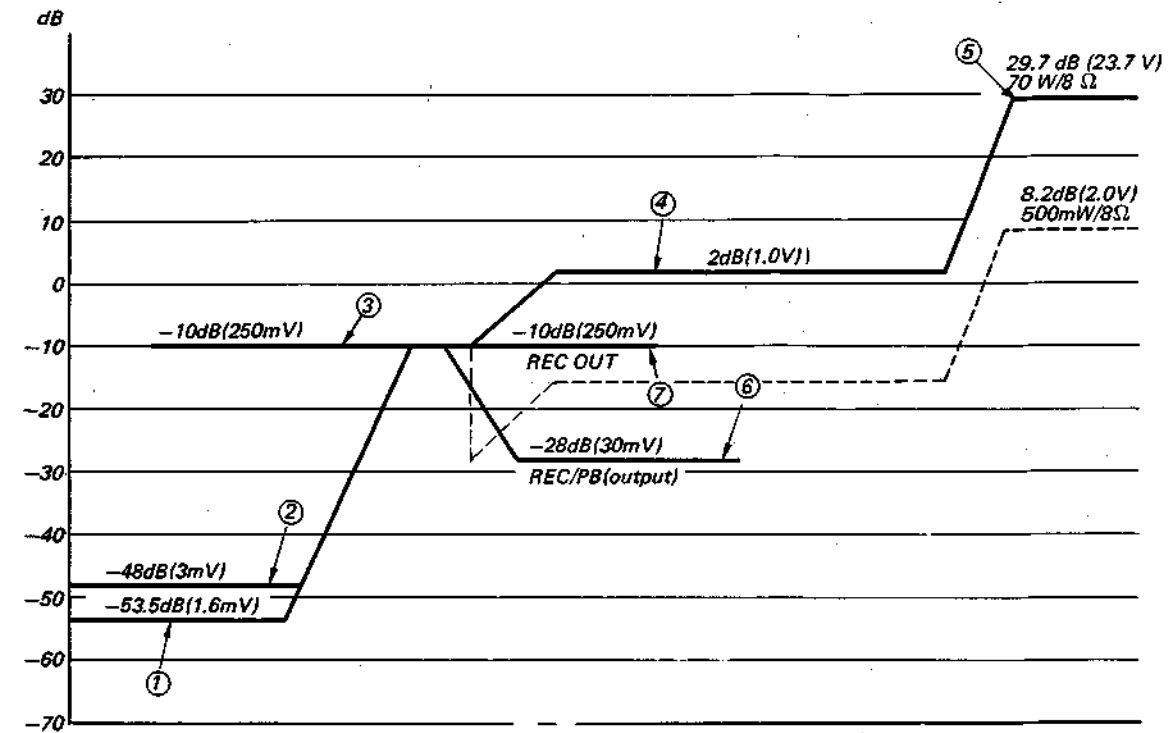

Note: Signal voltages are measured with an ac VTVM at continuous RMS power output and expressed in dB referred to 0.775 V, 1 kHz.

1-4. BLOCK DIAGRAM

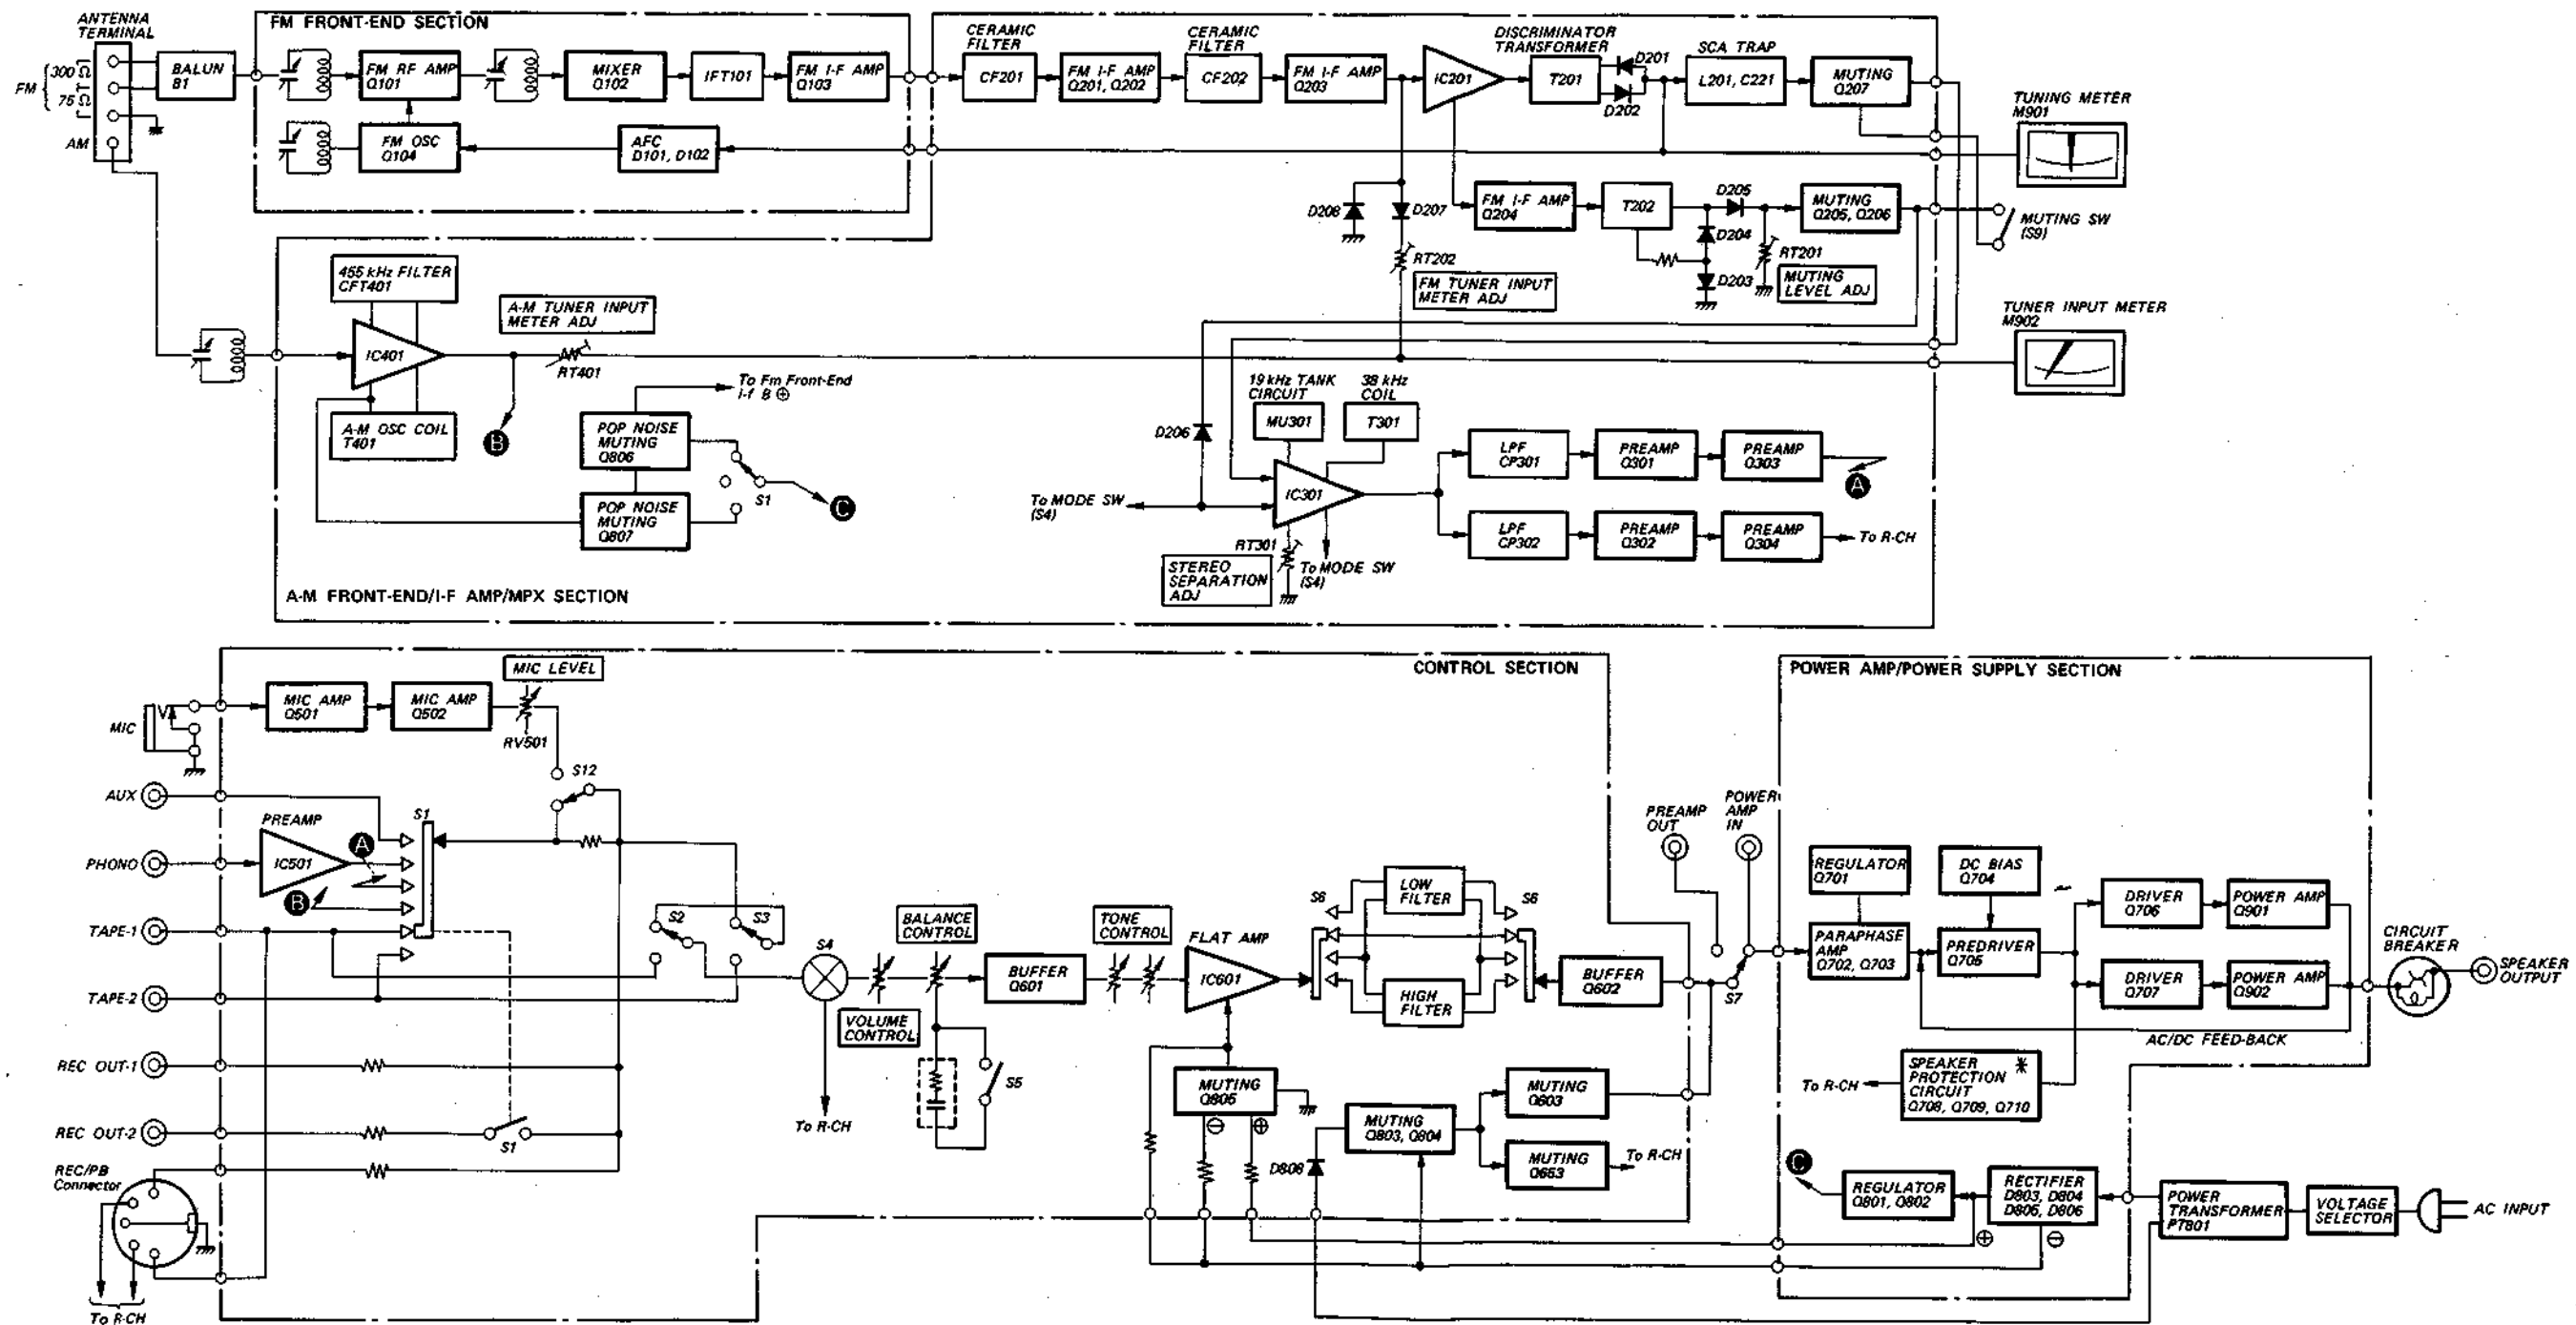

SECTION 2

DISASSEMBLY AND REPLACEMENT

Note: All screws are Phillips (cross recess) type unless otherwise indicated.
(-): slotted head

2-1. BOTTOM PLATE REMOVAL

Remove the eight self-tapping screws shown in Fig. 2-1. This frees the bottom plate.

2-2. FRONT PANEL REMOVAL

1. Remove all the knobs on the front panel.
2. Remove the three self-tapping screws shown in Fig. 2-1.
3. Remove the three screws shown in Fig. 2-2. This frees the front panel.

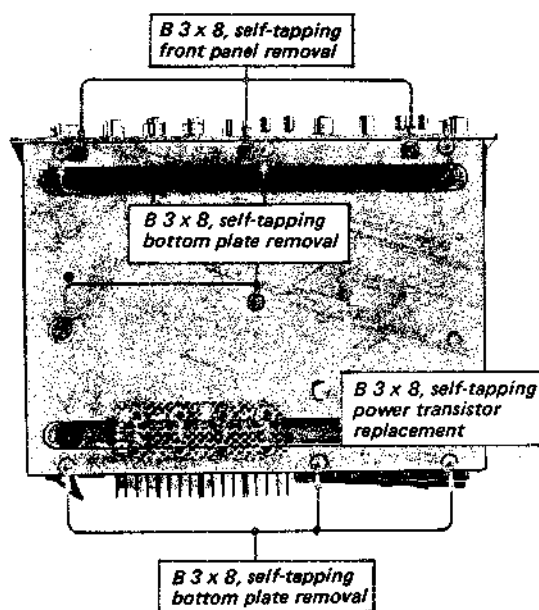


Fig. 2-1. Bottom plate and front panel removal

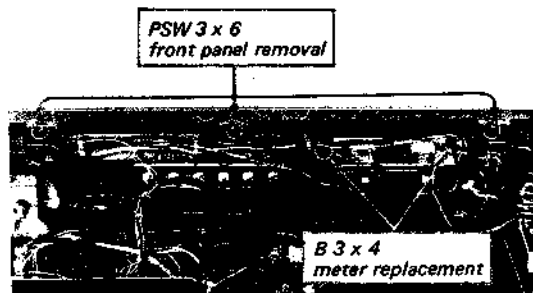


Fig. 2-2. Front panel removal and meter replacement

2-3. DIAL-CORD RESTRINGING

Preparation

1. Cut a 1,600 mm (63-inch) length of 0.3 mm ($1/64$ -inch) diameter dial cord.
2. Turn the tuning shaft fully clockwise.
3. Install the tuning drum as shown in Fig. 2-4.
4. Tie the end of the cord to a spring as shown in Fig. 2-3.
5. Hook the spring to the stud of drum as shown in Fig. 2-4.

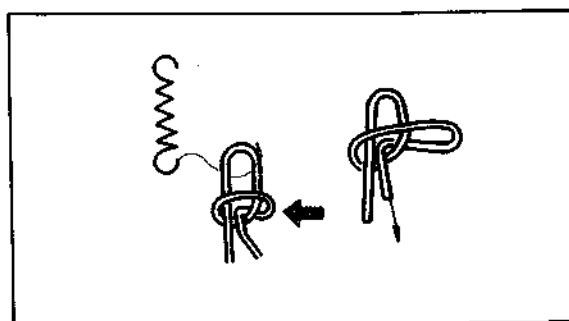


Fig. 2-3. Tying square knot at the tension spring

Procedure

1. String the dial cord in order as shown in Fig. 2-4.

Note: At the finish point, pass the doubled end of the cord through the eyelet (see Fig. 2-5) and tighten the cord and squeeze the eyelet so that the spring is under tension. Make two knots at the cord end to keep it from slipping out of the eyelet as shown in Fig. 2-5.

2. After completing the dial cord stringing, make sure that the tuning system properly works.
3. Put the pointer on the pointer guide as shown in Fig. 2-6 and bend the pointer guide tab as shown in Fig. 2-7, if necessary.
4. Tune the receiver to the local fm station. Move the pointer to the position where the dial indication coincides with the local station's carrier frequency. Apply a drop of contact cement to it.

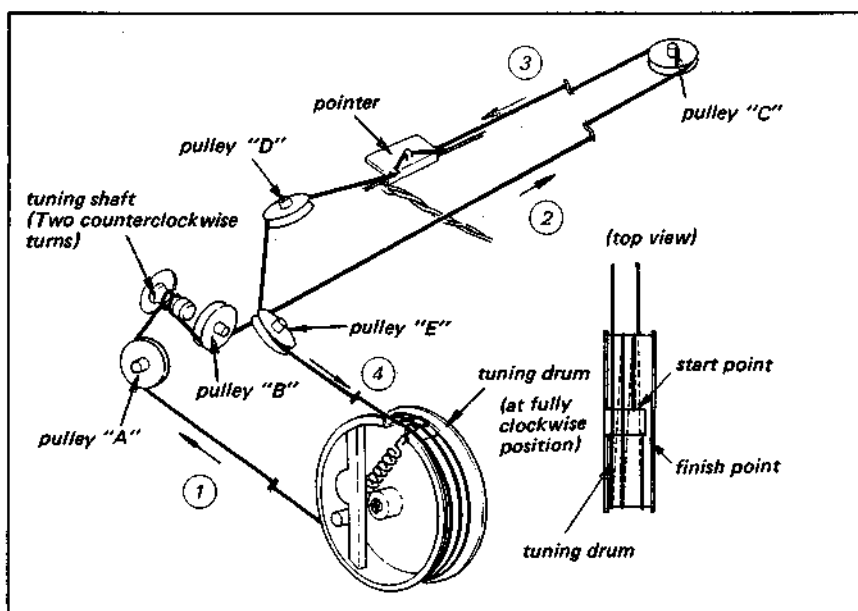


Fig. 2-4. Dial cord stringing

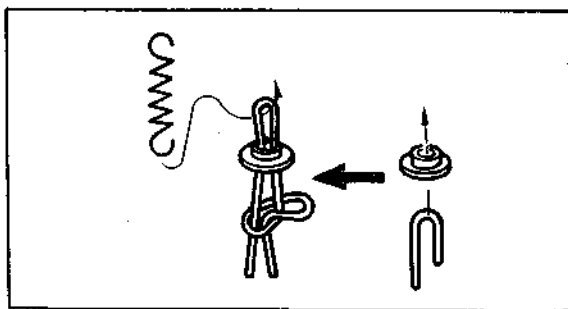


Fig. 2-5. Details of dial cord finish

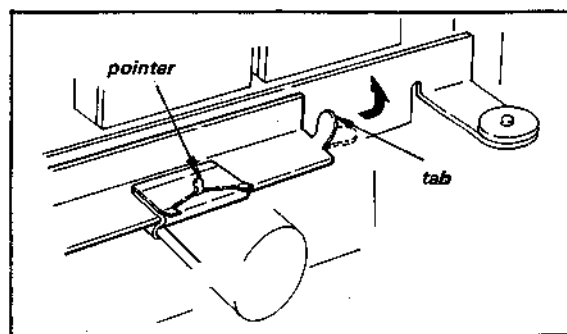


Fig. 2-7. Dial pointer installation (2)

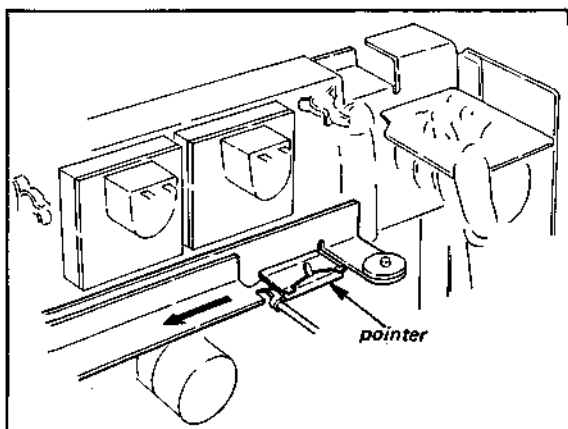


Fig. 2-6. Dial pointer installation (1)

2-4. POWER TRANSISTOR REPLACEMENT

1. Remove the twelve self-tapping screws from heat sink brackets (eight at rear bottom and four rear top) as shown in Fig. 2-1 and Fig. 2-8.
2. Remove the two screws securing the power transistor to the heat sink.

Note: When replacing the power transistor, apply a coating of a heat-transferring grease to both sides of the mica insulator. Any excess grease squeezed out when the mounting bolts are tightened should be wiped off with a clean cloth. This prevents it from accumulating conductive dust particles that might eventually cause a short.

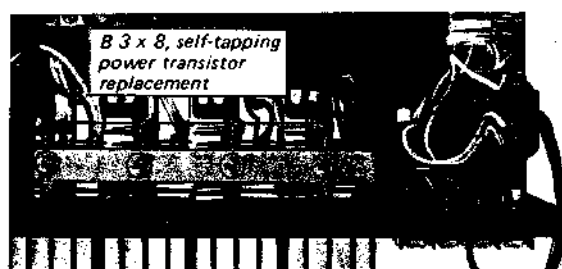


Fig. 2-8. Power transistor replacement

2-5. DIAL GLASS REMOVAL

Remove the five screws shown in Fig. 2-9. This frees the dial glass.

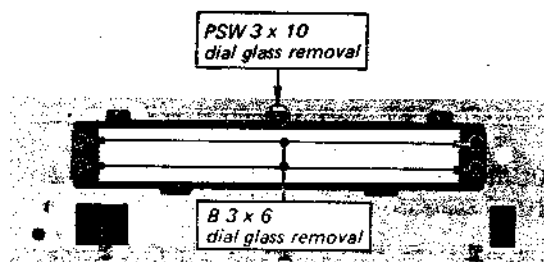


Fig. 2-9. Dial glass removal

2-6. METER REPLACEMENT

1. Remove the meter lamp shade by taking out the two screws shown in Fig. 2-2.
2. Carefully remove the defective meter from the front subchassis and install a new one.

2-7. VOLUME CONTROL REPLACEMENT

1. Remove the power amp/power supply board by taking out the two nylon rivets.
2. Remove the power amp board bracket (c) located near the front subchassis by taking out the screw as shown in Fig. 2-11.
3. Remove the front panel as described in Procedure 2-2.
4. Remove the nut securing the VOLUME control to the front subchassis shown in Fig. 2-10.

(continued to page 12.)

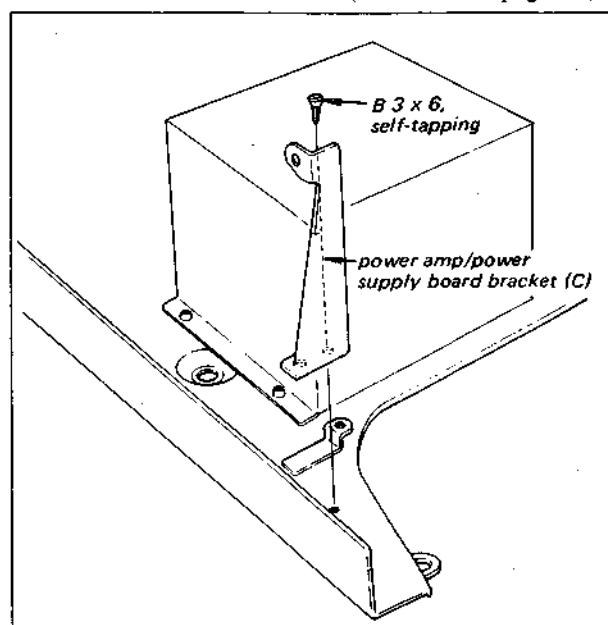


Fig. 2-11. VOLUME control replacement

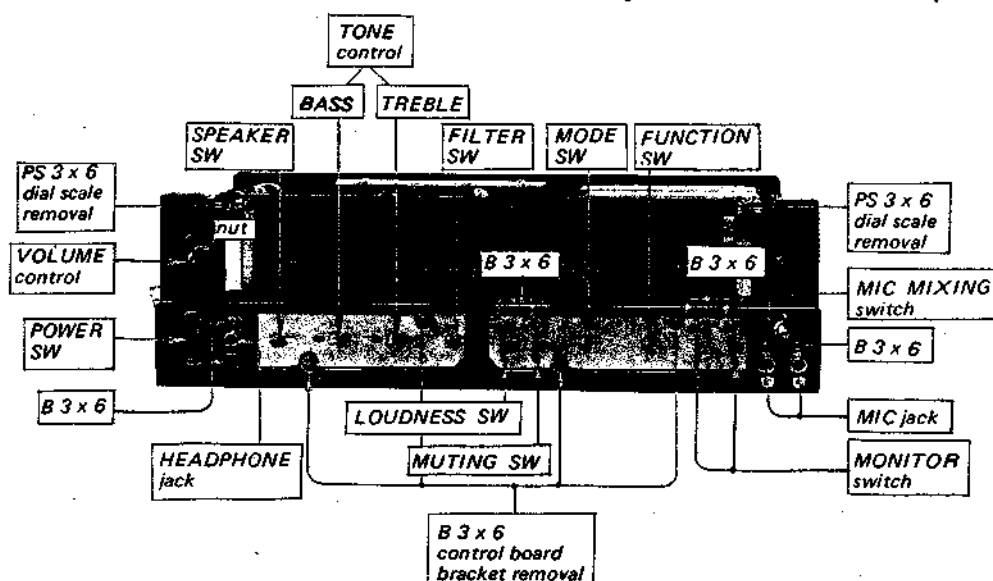


Fig. 2-10. Control, jack and switch replacement (1)

5. Remove the loudness control board along with the VOLUME control.
6. Cut each lug of the defective control on the board.
7. Unsolder and remove the clipped lugs, and clean out the holes in the printed circuit board.
8. Install a new one.

2-8. CONTROL, JACK AND SWITCH REPLACEMENT

Prepare for replacing any of the controls, jacks or switches by removing the front panel described in Procedure 2-2.

Note: Before removing the front subchassis, fasten the dial cord to the drum, pulleys with cellophane tape. This helps you to restring the dial cord.

POWER, MIC MIXING Switches and HEADPHONE, MIC Jacks

1. Remove two screws or the nut securing the defective switch or jack to front subchassis as shown in Fig. 2-10.
2. Unsolder the leads of defective switch or jack.
3. Install a new one.

SPEAKER, FILTER, MODE and FUNCTION Switches

1. Remove the retaining ring securing the defective switch, located at the back side of control board bracket, as shown in Fig. 2-12.
2. Pull out the shaft of the defective switch with a screwdriver as shown in Fig. 2-13.

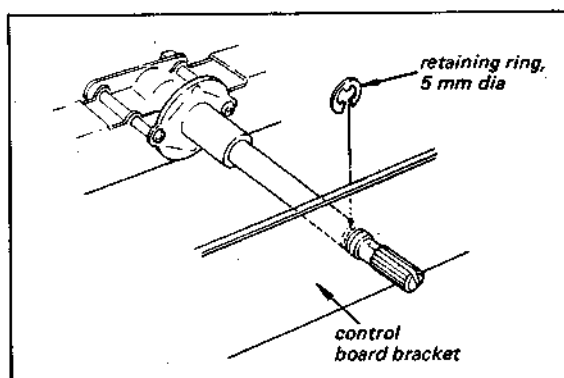


Fig. 2-12. Control board removal

3. Remove the bottom plate as described in Procedure 2-1.
4. With a soldering iron having a solder-sucking tip, clean the solder from each lug of the defective switch and the printed circuit board.
5. Remove the defective switch and install a new one.

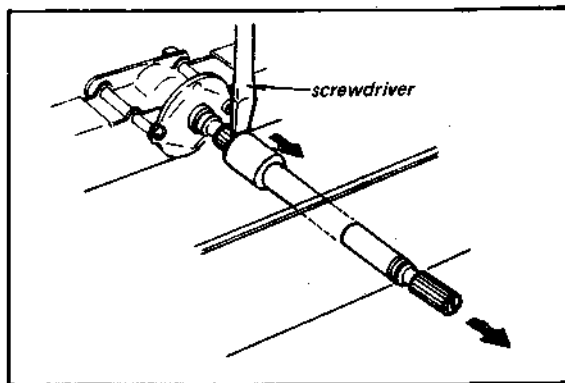


Fig. 2-13. Switch shaft removal

LOUDNESS, MUTING, MONITOR Switches and TONE controls

1. Remove the four screws (B 3 x 6) securing the control board bracket to the front subchassis as shown in Fig. 2-10.
2. Remove the three screws (PSW 3 x 6) securing the control board to the chassis as shown in Fig. 2-14.
3. Remove the nut securing the defective control or two screws (B 3 x 6) securing the defective switch to the control board bracket as shown in Fig. 2-10.
4. Remove the bottom plate as described in Procedure 2-1.
5. Move the control board toward power transformer as far as it goes. This helps in unsoldering the defective part on the board.
6. With a soldering iron having a solder-sucking tip, clean the solder from each lug of the defective part and the printed circuit board.
7. Remove the defective part and install a new one.

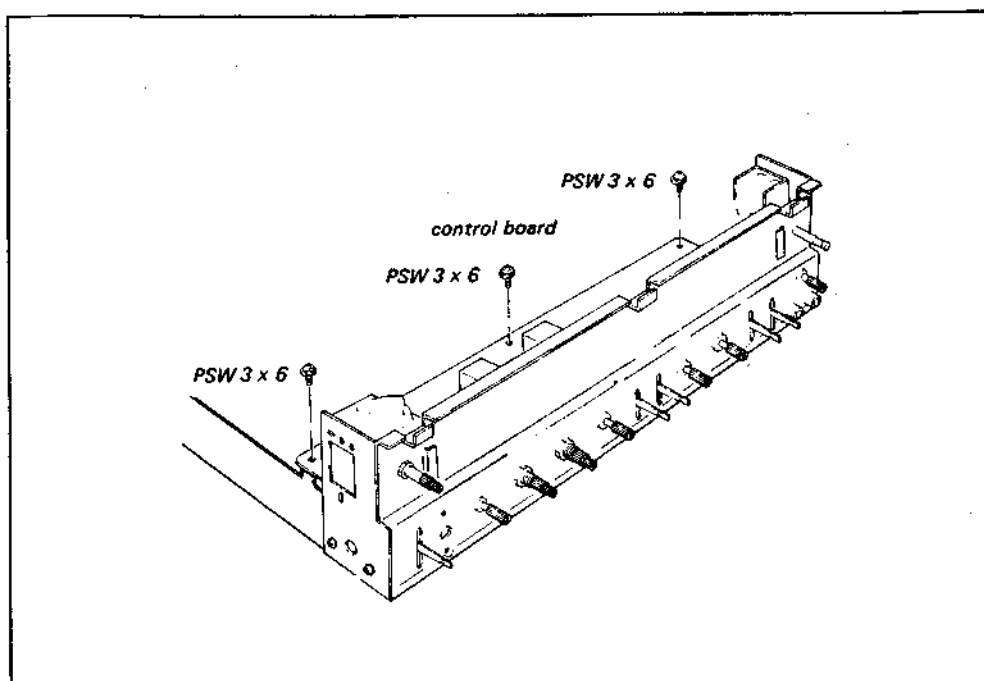


Fig. 2-14. Control, jack and switch replacement (2)

2.9. CHASSIS LAYOUT

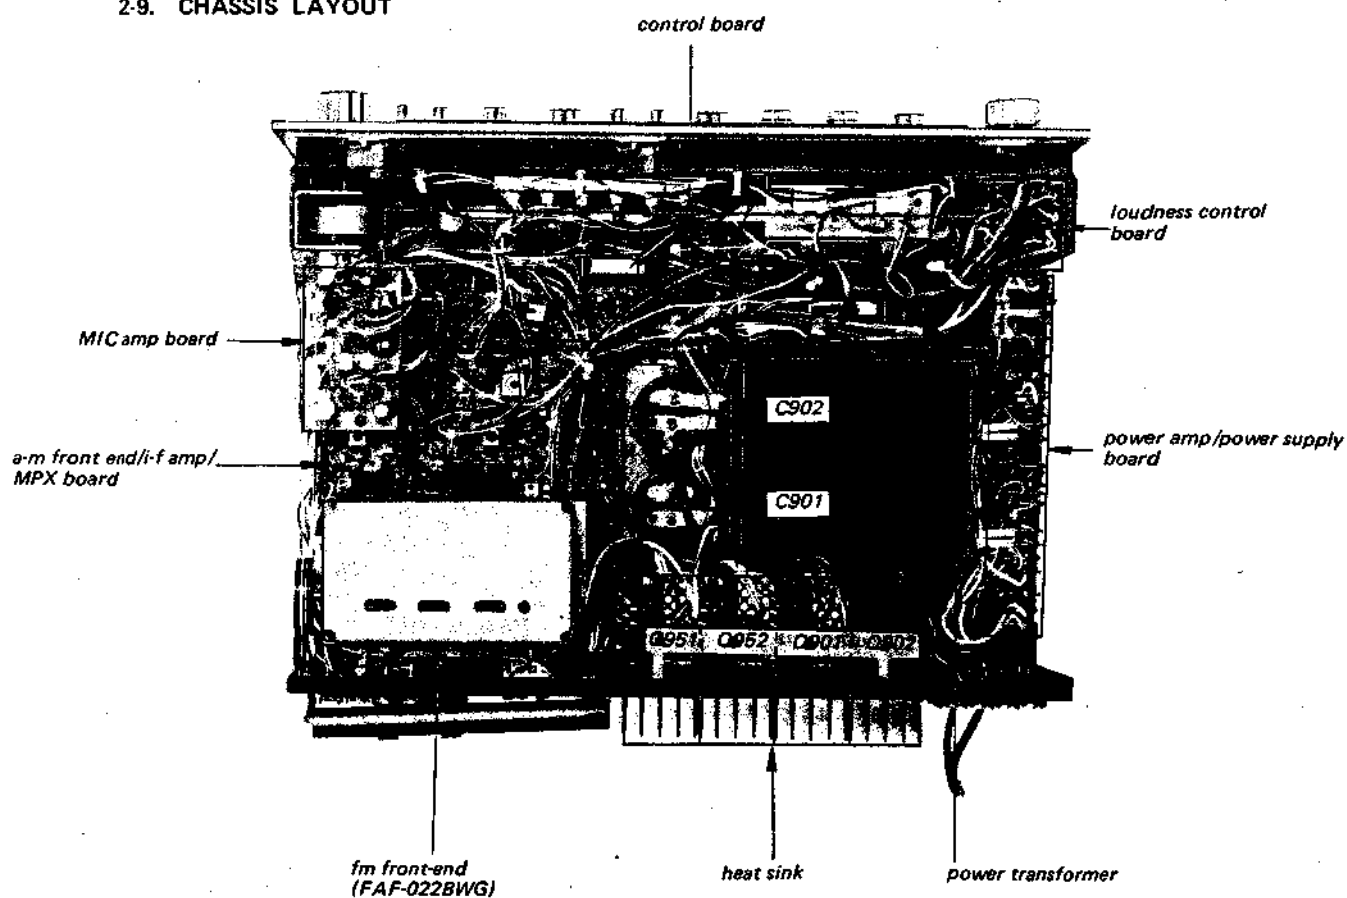


Fig. 2-15. Chassis layout

SECTION 3

3-1. FM I-F STRIP ALIGNMENT

CAUTION

The ceramic filters in the fm i-f circuit are selected according to their specified center frequencies and color coded as shown in Fig. 3-1, and listed in Table 3-1. Check the color code of the filters to identify the same center frequency when replacing any of these filters.

TABLE 3-1.

FM I-F CERAMIC FILTERS		
Part No.	Color	Specified Center Freq.
1-527-507-12	red	10.70 MHz
1-527-507-22	black	10.66 MHz
1-527-507-32	white	10.74 MHz
1-527-507-42	green	10.62 MHz
1-527-507-52	yellow	10.78 MHz

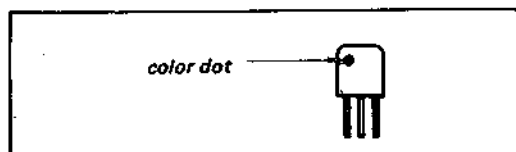


Fig. 3-1. Fm i-f ceramic filter

Note: Fm i-f strip alignment should be performed only after replacing IFT101 in the front-end.

Test Equipment Required

1. Fm signal generator
2. Ac VTVM
3. Oscilloscope
4. Alignment tools
5. Monitor speaker

Preparation

1. Remove the wooden case.
2. Connect the test equipment and a monitor speaker as shown in Fig. 3-4.
3. Short the test point of R226 on the a-m front end/i-f amp/MPX board (AFC circuit) to ground as shown in Fig. 3-2.

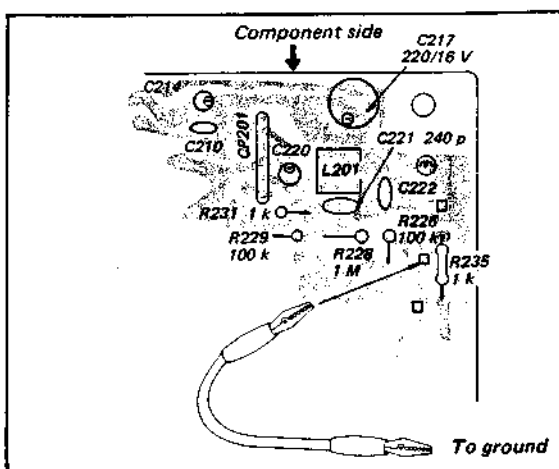


Fig. 3-2. Interruption of afc circuit

Procedure

Note: All signal generator output levels specified in this section are for terminated outputs.

1. With the equipment connected as shown in Fig. 3-4, set the signal generator controls as follows:

Carrier frequency 98 MHz
Modulation Fm, 400 Hz, 100 %
 (75 kHz deviation)
Output level 30 μV (30 dB)
 terminated

- 2. Set the receiver controls as follows:**

FUNCTION switch FM
VOLUME control minimum

3. Precisely tune the receiver to the SG carrier frequency by tuning for zero center on the TUNING meter. Adjust IFT101 for maximum deflection on the TUNER INPUT meter. Carefully adjust

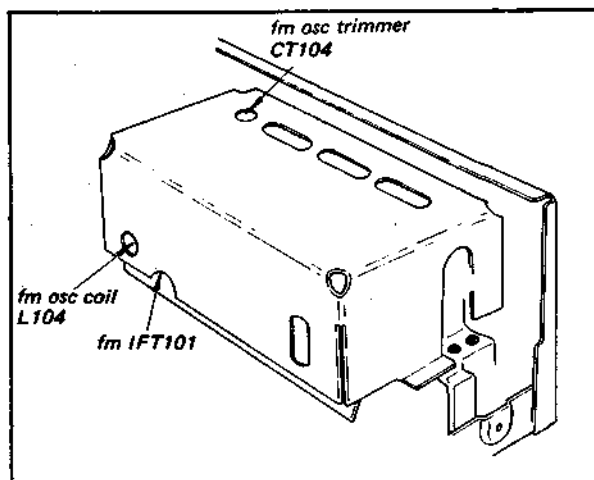


Fig. 3-3. Adjustment parts location

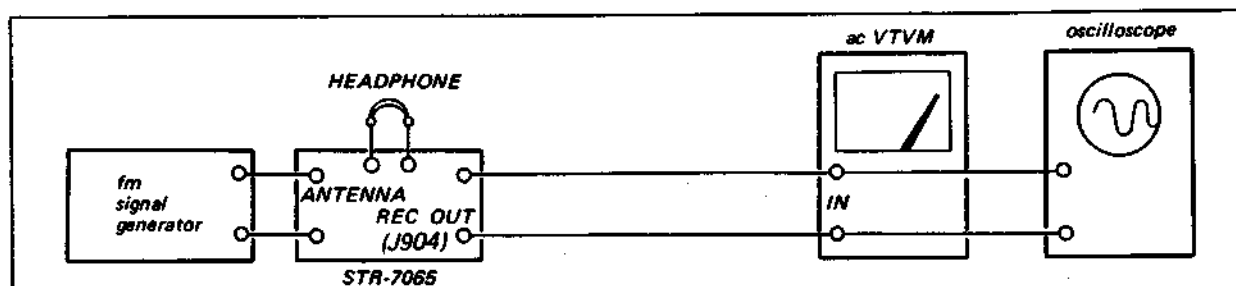


Fig. 3-4. Fm i-f, discriminator, muting and front-end alignment test setup

this slug so that maximum reading on the TUNER INPUT meter always coincides with zero center on the TUNING meter (Rock the TUNING control while observing the two meters and make the adjustment).

Adjust the bottom core (primary side) of T201 (see Fig. 3-11) for maximum output on the Ac VTVM. Then precisely adjust it so that the Ac VTVM indication falls as the set is detuned in either direction (max output corresponds to zero center on the TUNING meter).

3-2. FM DISCRIMINATOR ALIGNMENT

Note: There are two or three methods of discriminator alignment, but only the simplified method using the tuner TUNING meter is described here.

Test Equipment Required

1. Oscilloscope
2. Alignment tools
3. Monitor speaker

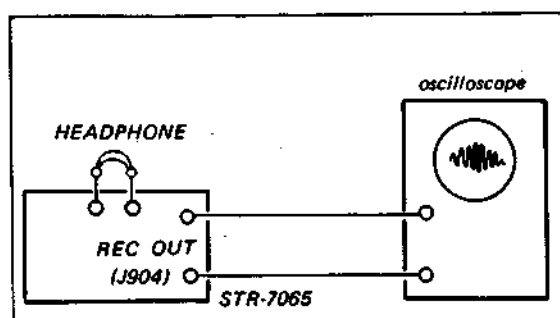


Fig. 3-5. Discriminator alignment test setup

Preparation

1. Remove the wooden case.
2. Connect the input cable of the oscilloscope to REC OUT jack (J904) as shown in Fig. 3-5.
3. Short the test point of R226 on the a-m front end/i-f amp/MPX board (AFC circuit) to ground as shown in Fig. 3-2.

Procedure

1. With the equipment connected as shown in Fig. 3-4, set the receiver controls as follows:

FUNCTION switch FM
VOLUME control minimum
MUTING OFF

2. Tune the receiver to a vacant spot in the band (no signal input). Listen to the monitor speaker and watch the oscilloscope to confirm that the tuner is not receiving any off-the-air signal.
3. Turn the top core (secondary side) of T201 discriminator transformer (see Fig. 3-11) with a hex-head alignment tool to obtain a null-point reading on the TUNING meter. If the discriminator transformer (T201) is not aligned correctly, some deviation on the TUNING meter will be observed.

Note: Turn the core carefully and slowly. At both extreme positions of the top core, a null point will be observed. The real null point should be obtained in the middle of the core thread length.

4. Repeat the above mentioned steps and fm i-f strip alignment (procedure 3-1) alternately two or three times.

3-3. FM FREQUENCY COVERAGE ALIGNMENT

CAUTION

Never attempt alignment of the front-end section except for the frequency-coverage and dial-calibration adjustments. The front-end section of the receiver has been carefully adjusted at the factory, so very little adjustment is necessary in the field. Alignment need not be performed when the front-end FET is replaced since changes in FET parameters have little effect upon tuning. If an rf-stage adjustment is required, ask your nearest SONY Service Station to send your unit to the Factory Service Center for a complete front-end alignment. Exercise caution when returning the faulty unit so that it is not damaged in transit. The warranty will not cover damage incurred in transit to the Factory Service Center.

Note: Before starting this alignment, the discriminator alignment should be performed.

Signal Generator Method

Test Equipment Required

1. Fm signal generator
2. Ac VTVM
3. Alignment tools

Preparation

1. Short the test point of R226 (AFC circuit) to ground as shown in Fig. 3-2.
2. Connect the test equipment as shown in Fig. 3-4.
3. Set the receiver controls as follows:

FUNCTION switch FM
VOLUME control minimum

Procedure

Follow the procedures given in Table 3-2 when performing this alignment with an fm signal generator. Be sure that the dial is mechanically calibrated as described in Procedure 2-3 on page 9.

Off-the-Air Signal Method

Frequency coverage alignment can also be performed by utilizing off-the-air local fm signals. However, before performing the following procedure, be sure that the dial pointer is correctly positioned as described in Procedure 2-3 on page 9.

Procedure

1. Tune the receiver to the lowest-frequency station.
2. Check the dial scale for a calibration accuracy of $\pm 100\text{kHz}$ from the carrier frequency of the station. If the dial-accuracy deviation exceeds this limit, turn the local-oscillator coil L104 (see Fig. 3-3) slightly until optimum dial calibration is obtained.
3. Tune the receiver to the highest-frequency station in your locality. If the dial-calibration error is excessive, adjust local-oscillator trimmer CT104 (see Fig. 3-3) to obtain maximum calibration accuracy.

3-4. FM STEREO SEPARATION ADJUSTMENT

Test Equipment Required

1. Fm stereo signal generator
2. Ac VTVM
3. Oscilloscope

TABLE 3-2 FM FREQUENCY COVERAGE ALIGNMENT

Step	Coupling Between Tuner and SG	SG Frequency and Output Level (terminated)	Receiver Dial Setting	AC VTVM Connection	Adjust	Indication
1.	Direct	87.5 MHz, 400 Hz 100 % (75 kHz deviation) Mod. Output level: as low as possible	87.5 MHz	REC OUT Jack (J904)	OSC coil L104 See Fig. 3-3	Maximum VTVM reading
2.		108 MHz, 400 Hz 100 % (75 kHz deviation) Mod. Output level: as low as possible	108 MHz		OSC trimmer CT104 See Fig. 3-3	

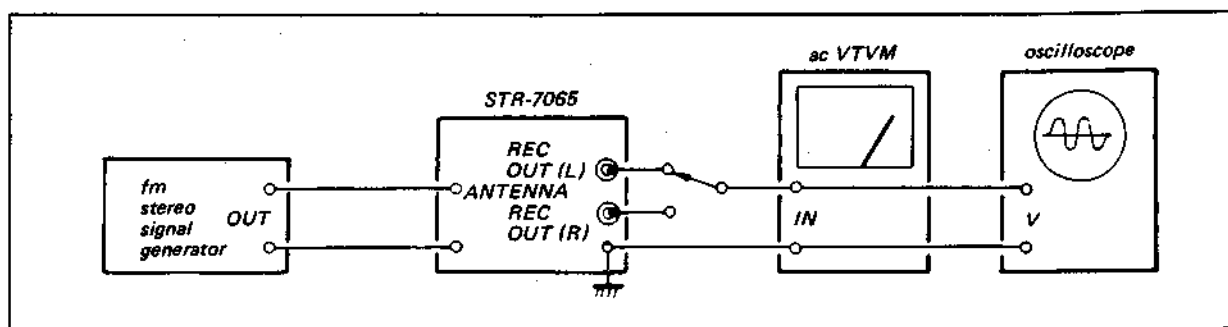


Fig. 3-6. Fm stereo separation adjustment test setup

Preparation

1. Remove the wooden case.
2. Connect the test equipment as shown in Fig. 3-6, then set the fm stereo signal generator controls as follows:

Carrier frequency 98 MHz
 Output level 1,000 μ V (60 dB)
 Mode Stereo
 Audio (400 Hz) Mod 67.5 kHz (90 %) *
 Pilot (19 kHz) Mod 7.5 kHz (10 %)

* Note: 75 kHz (100 %) if the metering indicates total modulation (audio-pilot).

Procedure

1. Precisely tune the receiver to the carrier frequency of stereo signal generator, then turn the top core of switching transformer T301 (see Fig. 3-11) to obtain maximum output at the left channel. Note that this adjustment has a close relationship with stereo distortion.
2. Record the output level of the left channel when the stereo signal generator input selector is set to the left channel.
3. Switch the stereo signal generator input selector to the right channel and read the residual signal level in the left channel.
4. The output-level to residual-level ratio represents the separation. Adjust separation adj. control RT301 (see Fig. 3-11) for minimum residual level. Check the right channel for separation. Usually, about an 8 to 9 dB difference in channel separation exists. Readjust RT301 for minimum difference between left- and right-channel separation. While doing this, remember that the output level also changes according to the setting of RT301.

3-5. MUTING ADJUSTMENT

Note: Readjustment is necessary after replacing Q204 (FET) or if the muting point upon TUNING meter deflection is not symmetrical when detuning higher or lower than the reference carrier frequency. Two methods of muting adjustment are available, signal generator adjustment and adjustment by using an off-the-air signal. You can use either of them.

Signal Generator Method

Test Equipment Required

1. Fm signal generator
2. Ac VTVM or oscilloscope
3. Screwdriver with 3 mm ($\frac{1}{8}$ ") blade

Preparation

1. Remove the wooden case.
2. Short the test point of R226 on the a-m front end/i-f amp/MPX board (AFC circuit) to ground as shown in Fig. 3-2.

Procedure

1. With the equipment connected as shown in Fig. 3-4, set the signal generator and receiver controls as follows:

Carrier frequency 98 MHz
 Modulation Fm, 400 Hz, 100 %
 Output level 1,000 μ V (60 dB)
 FUNCTION switch FM
 VOLUME CONTROL minimum

2. Turn RT201 (see Fig. 3-11) fully clockwise.

TABLE 3-3 MUTING ADJUSTMENT

Coupling Between Tuner and SG	SG Frequency and Output Level	Receiver Dial Setting	Adjust	Remarks
Direct	98 MHz 400 Hz 30 % Mod. 1,000 μ V (60 dB)	98 MHz	T202 See Fig. 3-11.	Turn T202 to obtain proper muting operation.

3. Follow the procedure given in Table 3-3. Tune the receiver to the SG frequency, then adjust T202 (See Fig. 3-11) for proper muting operation. Muting should begin at point equidistant from zero center.

Off-the-Air Signal Method

Accurate muting adjustment can also be performed by utilizing an off-the-air local fm signal instead of the fm SG.

3-6. A-M I-F STRIP ALIGNMENT

Note: The i-f transformers (CFT401 and T402) in the a-m i-f amplifier circuit are adjusted at the factory, so very little adjustment is necessary in the field even if replacing any of these i-f transformers.

3-7. A-M FREQUENCY COVERAGE AND TRACKING ALIGNMENT

Note: Before performing the following procedure, make sure that the dial pointer is correctly positioned as described in Procedure 2-3 on page 9.

Preparation

Connect the input cable of ac VTVM or oscilloscope to REC OUT jack as shown in Fig. 3-7.

Signal Generator Method

Test Equipment Required

1. A-m signal generator
2. Loop antenna
3. Ac VTVM or oscilloscope

Procedure

With the equipment connected as shown in Fig. 3-7, follow the procedures given in Table 3-4 when performing this alignment with an a-m signal generator.

Off-the-Air Signal Method

Accurate frequency-coverage and tracking alignment can also be performed by utilizing off-the-air local a-m signals.

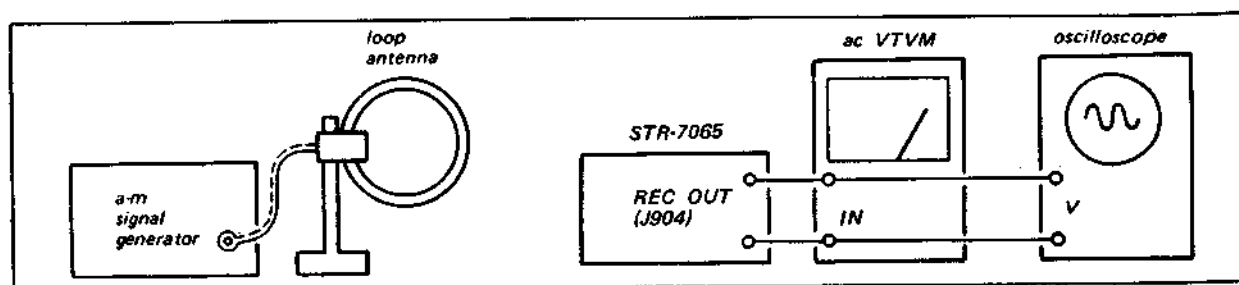


Fig. 3-7. A-m frequency coverage and tracking alignment test setup

TABLE 3-4. A-M FREQUENCY COVERAGE AND TRACKING ALIGNMENT

	A-M FREQUENCY COVERAGE ALIGNMENT					SG Coupling Loop Antenna SG Output Level . . 400 Hz, 30 % (as low as possible)
Step	SG Frequency	Receiver Dial Setting	Ac VTVM Connection	Adjust	Indication	
1.	550 kHz	550 kHz	REC OUT	OSC coil T401 See Fig. 3-11.	Maximum VTVM reading	
2.	1,600 kHz	1,600 kHz		OSC trimmer CT402 See Fig. 3-11.		
	A-M TRACKING ALIGNMENT					SG Coupling Loop Antenna SG Output Level . . 400 Hz, 30 % (as low as possible)
1.	600 kHz	Tune to the SG signal.	REC OUT	Bar antenna coil L901	Maximum VTVM reading	
2.	1,400 kHz			Antenna trimmer CT401 See Fig. 3-11.		

3-8. TUNER INPUT METER CALIBRATION

Test Equipment Required

1. Signal generator (SG)
2. Ac VTVM
3. Loop antenna
4. Alignment tools

Preparation

1. Remove the wooden case.

Procedure

a. FM

1. Connect the test equipment as shown in Fig. 3-8.
2. Set the fm signal generator and receiver controls as follows:
 - Carrier frequency 98 MHz
 - Output level 60 dB
 - Modulation (400 Hz) 100 % (75 kHz deviation)
 - VOLUME control Minimum
 - FUNCTION switch FM
 - MODE switch MONO
 - MONITOR switch SOURCE
3. Precisely tune the receiver to the signal and adjust RT202 (see Fig. 3-11.) to obtain the meter pointer within 1 mm ($\frac{3}{64}$ ") left of its maximum indication as shown in Fig. 3-9.

b. A-M

1. Connect the test equipment as shown in Fig. 3-10.
2. Set the a-m signal generator and receiver controls as follows:
 - Carrier frequency 1,000 kHz
 - Output level 104 dB/m at a-m bar antenna
 - Modulation (400 Hz) 30 %
 - VOLUME control Minimum
 - FUNCTION switch AM
 - MODE switch MONO
 - MONITOR switch SOURCE
3. Precisely tune the receiver to the signal and adjust RT401 (see Fig. 3-11.) to obtain the meter pointer within 1 mm ($\frac{3}{64}$ ") left of its maximum indication as shown in Fig. 3-9.

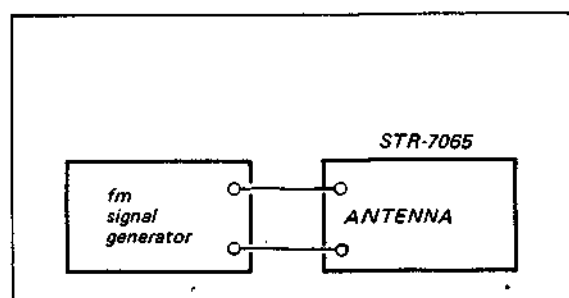


Fig. 3-8. Tuner input meter calibration test setup (Fm)

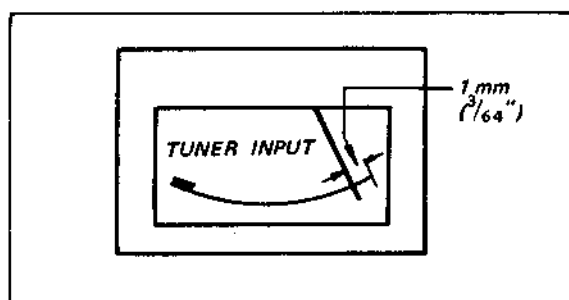


Fig. 3-9. TUNER INPUT meter calibration


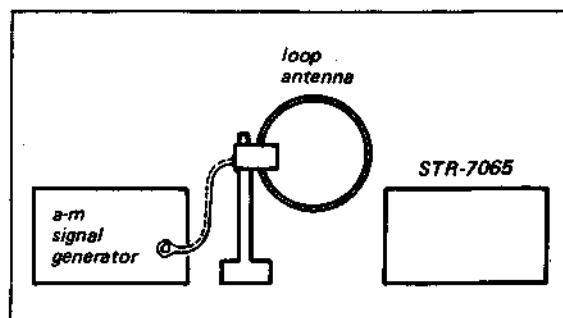


Fig. 3-10. Tuner input meter calibration test setup (A-m)

Adjustment Parts Location

A-m Front-End/I-f Amplifier/MPX Board
— Component Side —

rear panel side

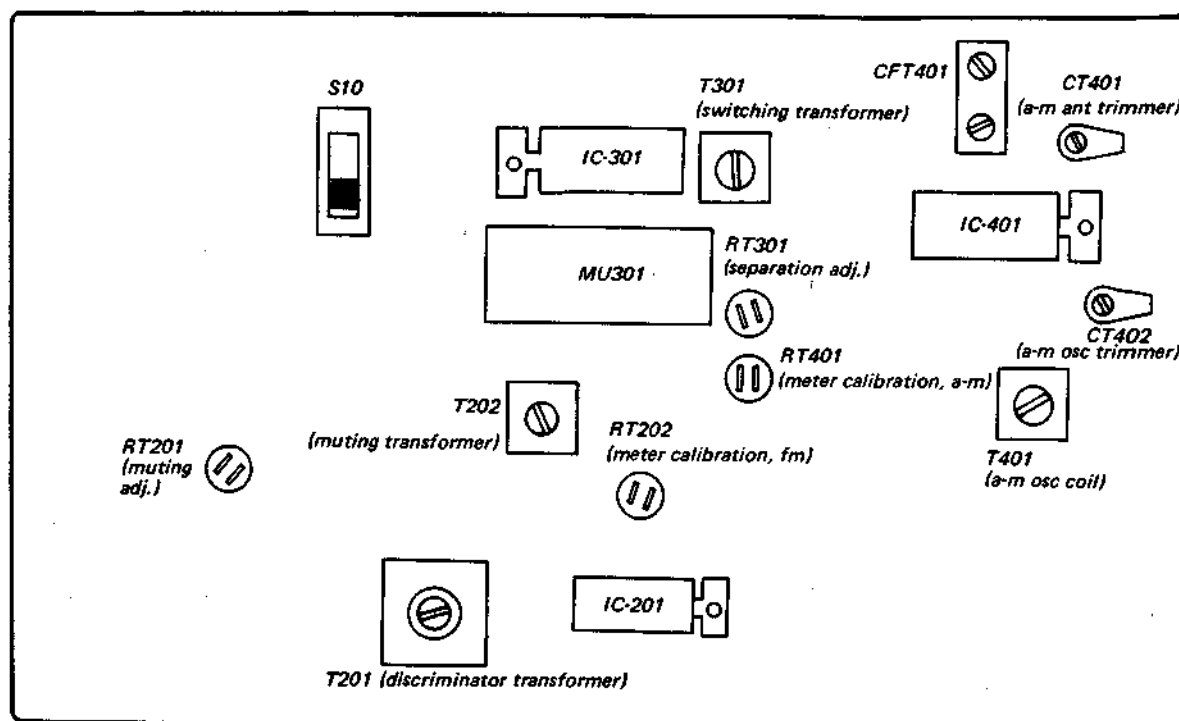

front panel side



Fig. 3-11. Adjustment parts location

3-9. POWER-AMPLIFIER ADJUSTMENT

Dc-Bias Adjustment

Serious deficiencies in performance, such as thermal runaway of power transistors, will result if this adjustment is improperly done.

CAUTION

To avoid accidental power transistor damage, increase the ac line voltage gradually, using a variable transformer.

Test Equipment Required

1. Dc millivoltmeter
2. Variable transformer
3. Screwdriver, 3 mm ($\frac{1}{8}$ ") blade

Preparation

1. Remove the wooden case.
2. Connect the dc millivoltmeter across the test points as shown in Fig. 3-12.
3. Turn the adjustable resistors RT701 and RT751 (see Fig. 3-12) on the power amp/power supply board fully counterclockwise.
4. Set the variable transformer for minimum output.

Procedure

1. Turn on POWER switch, and increase the line voltage up to the rated value.
2. Allow about five minutes for warm-up.
3. Adjust RT701 (RT751) for 50 mV reading on the meter.

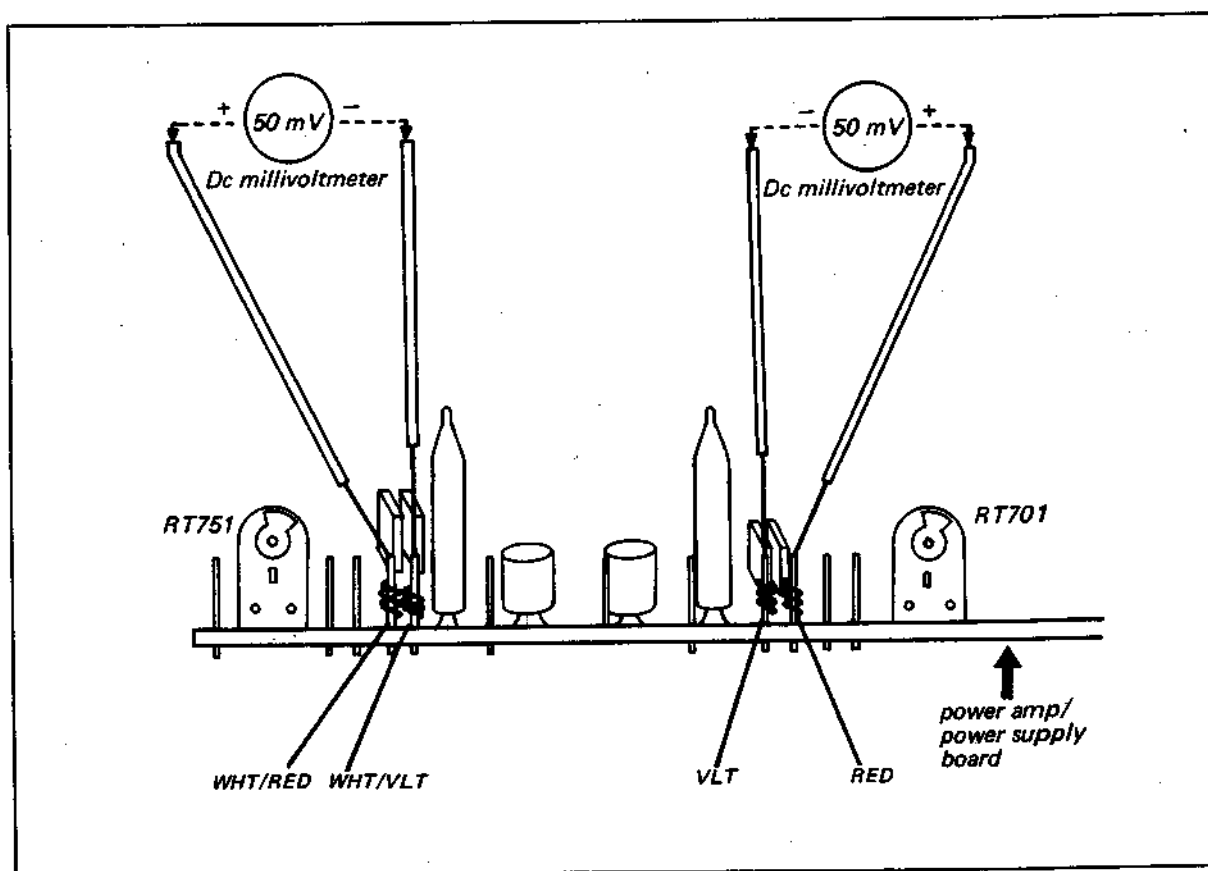



Fig. 3-12. Power-amplifier adjustment test setup

Seite 22 v.23 leer

SECTION 4 REPACKING

The STR-7065 original shipping carton and packing materials are the ideal containers for shipping the unit. For the maximum protection, the STR-7065

must be repacked in these materials precisely as before. The proper repacking procedures are shown in Fig. 4-1.

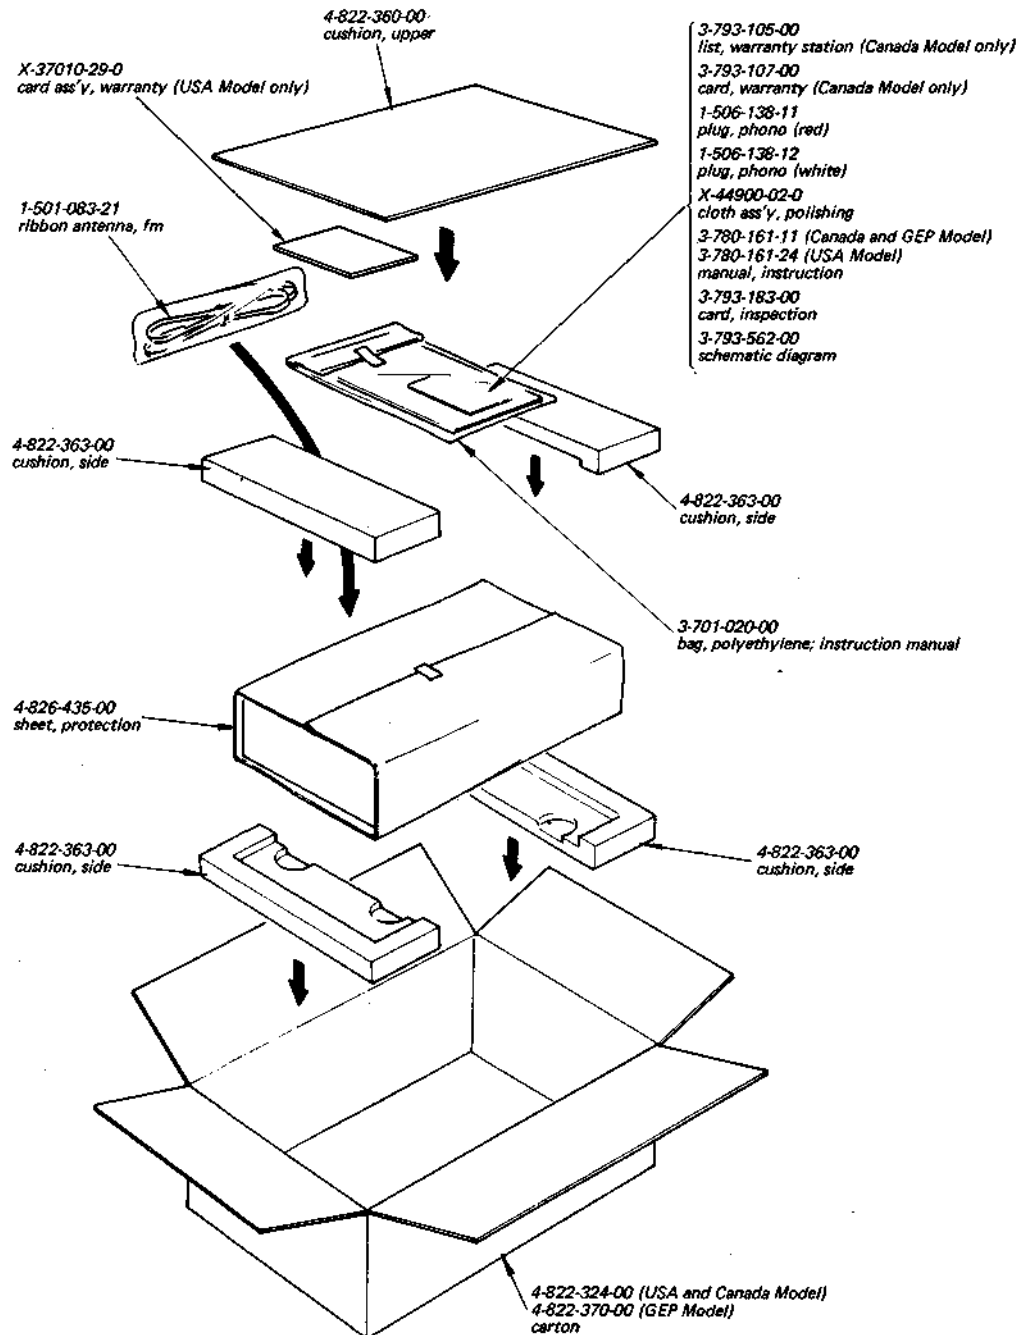

Note:


USA Model Serial No. 807,001 and later
 Canada Model Serial No. 700,001 and later
 GEP Model Serial No. 400,001 and later

Fig. 4-1. Repacking



MEMO

SECTION 5
DIAGRAMS


5-1. MOUNTING DIAGRAM – Fm Front-End –
– Conductor Side – (FAF-022BWG)

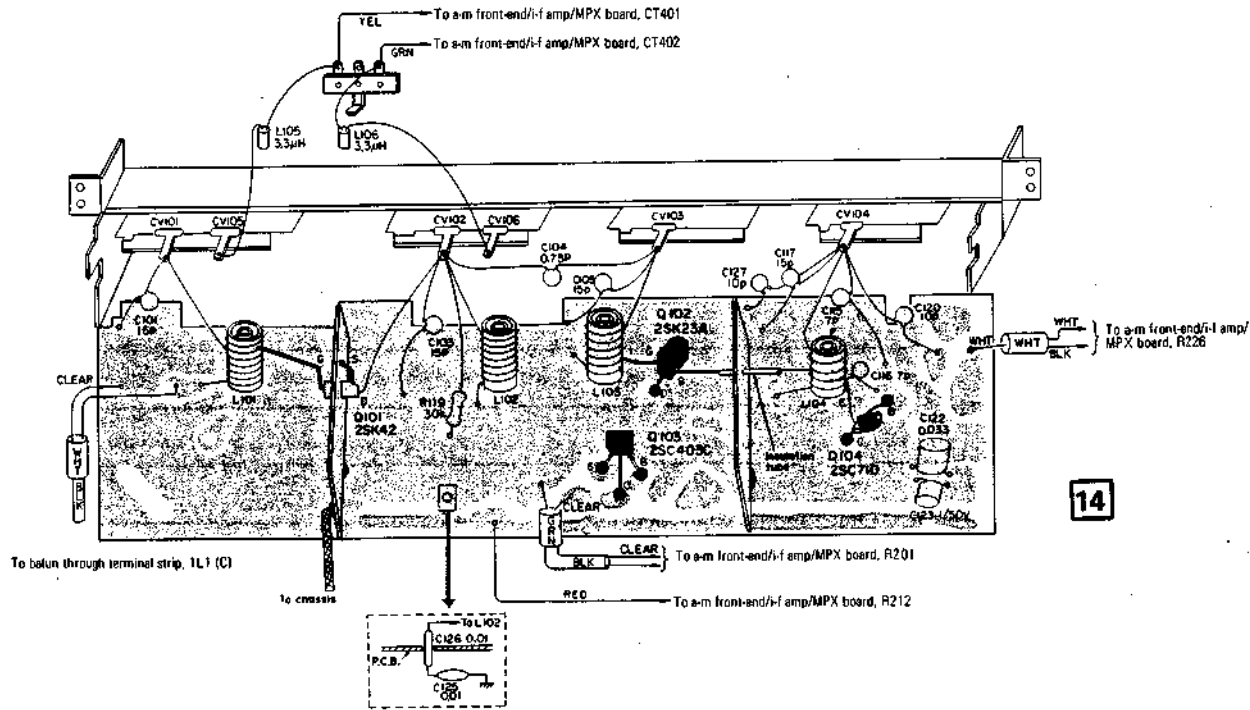


– Component Side –

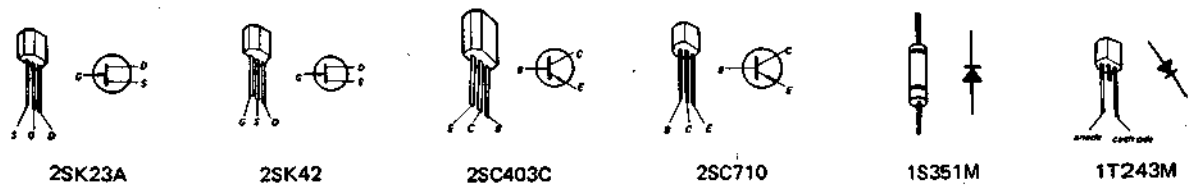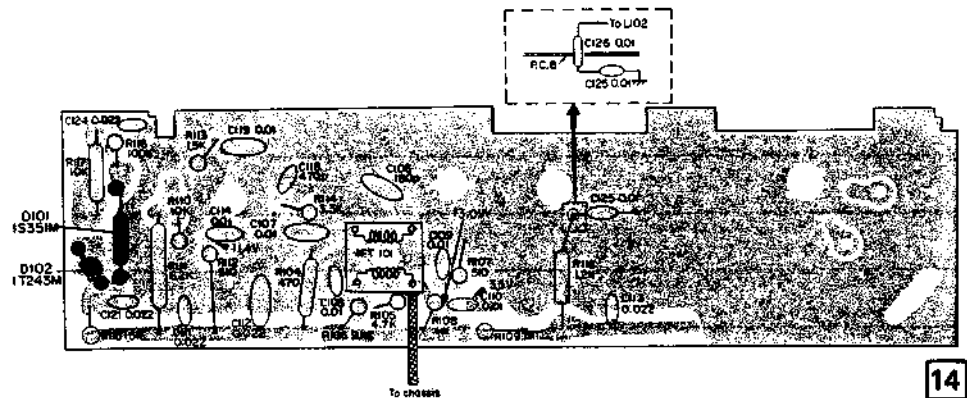


5.2. MOUNTING DIAGRAM – MIC Amp Board – – Conductor Side –

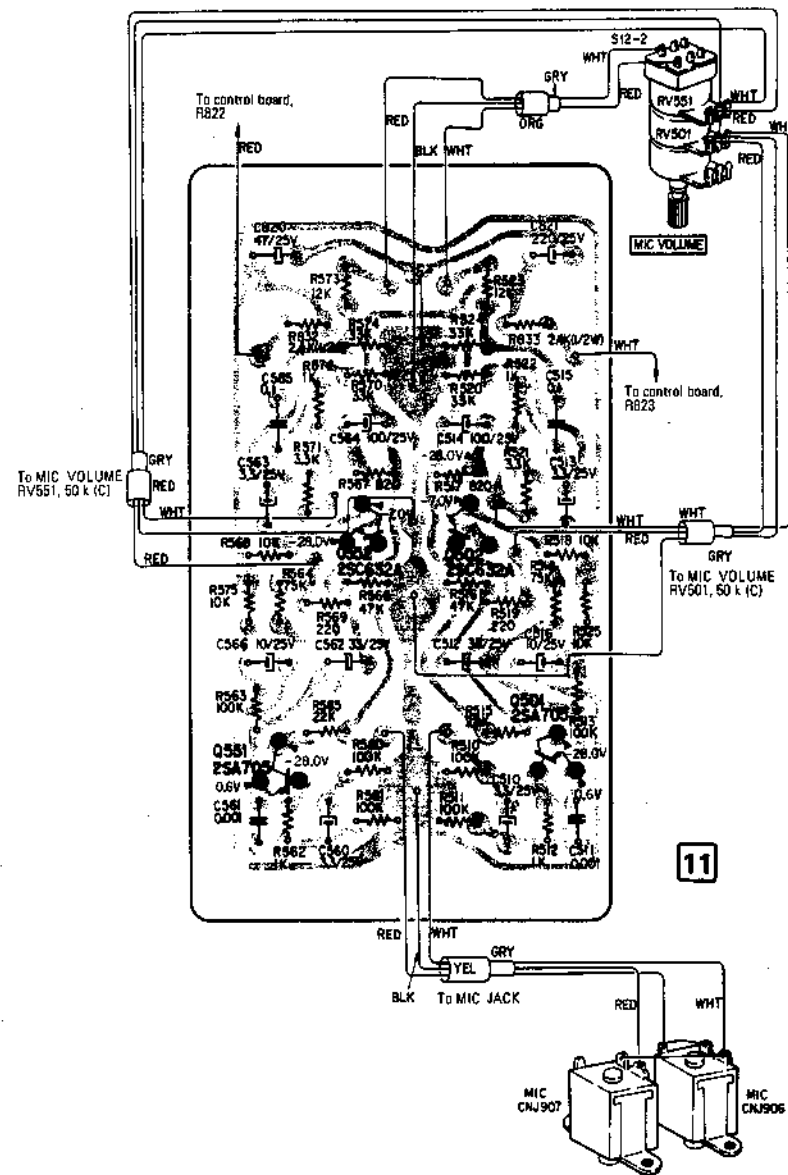

Transistor Location	Q551	Q552	Q502	Q501
---------------------	------	------	------	------




25A705




2SA632A

5-3. MOUNTING DIAGRAM —REC/PB Connector Board — — Conductor Side —

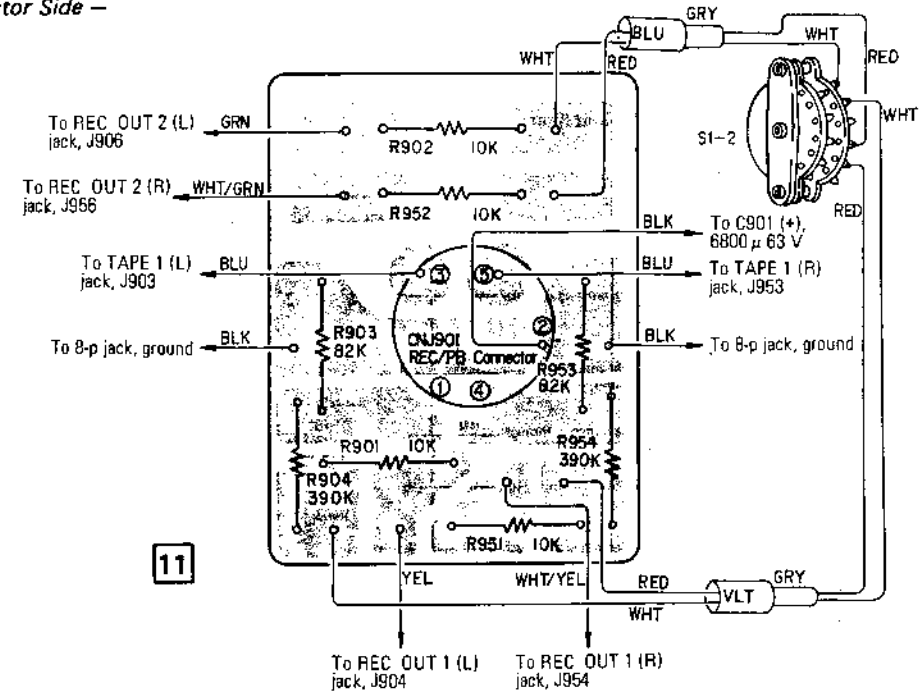


5-4. MOUNTING DIAGRAM - Loudness Control Board - - Conductor Side -

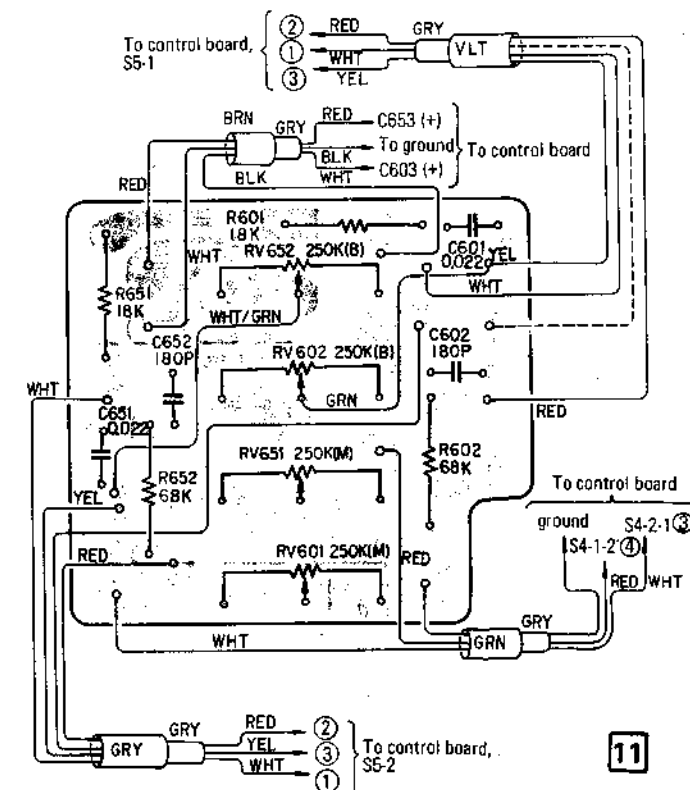


5-5. MOUNTING DIAGRAM – A-m Front-End/I-f Amplifier/MPX Board –
– Conductor Side –

USA Model Serial No. 807,001 and later
Canada Model Serial No. 700,001 and later
GEP Model Serial No. 400,001 and later


2SC403C
2SC631A
2SC633A




2SK23A





CX-0412



CX-0431
CX-0451



1T22A
1S1555

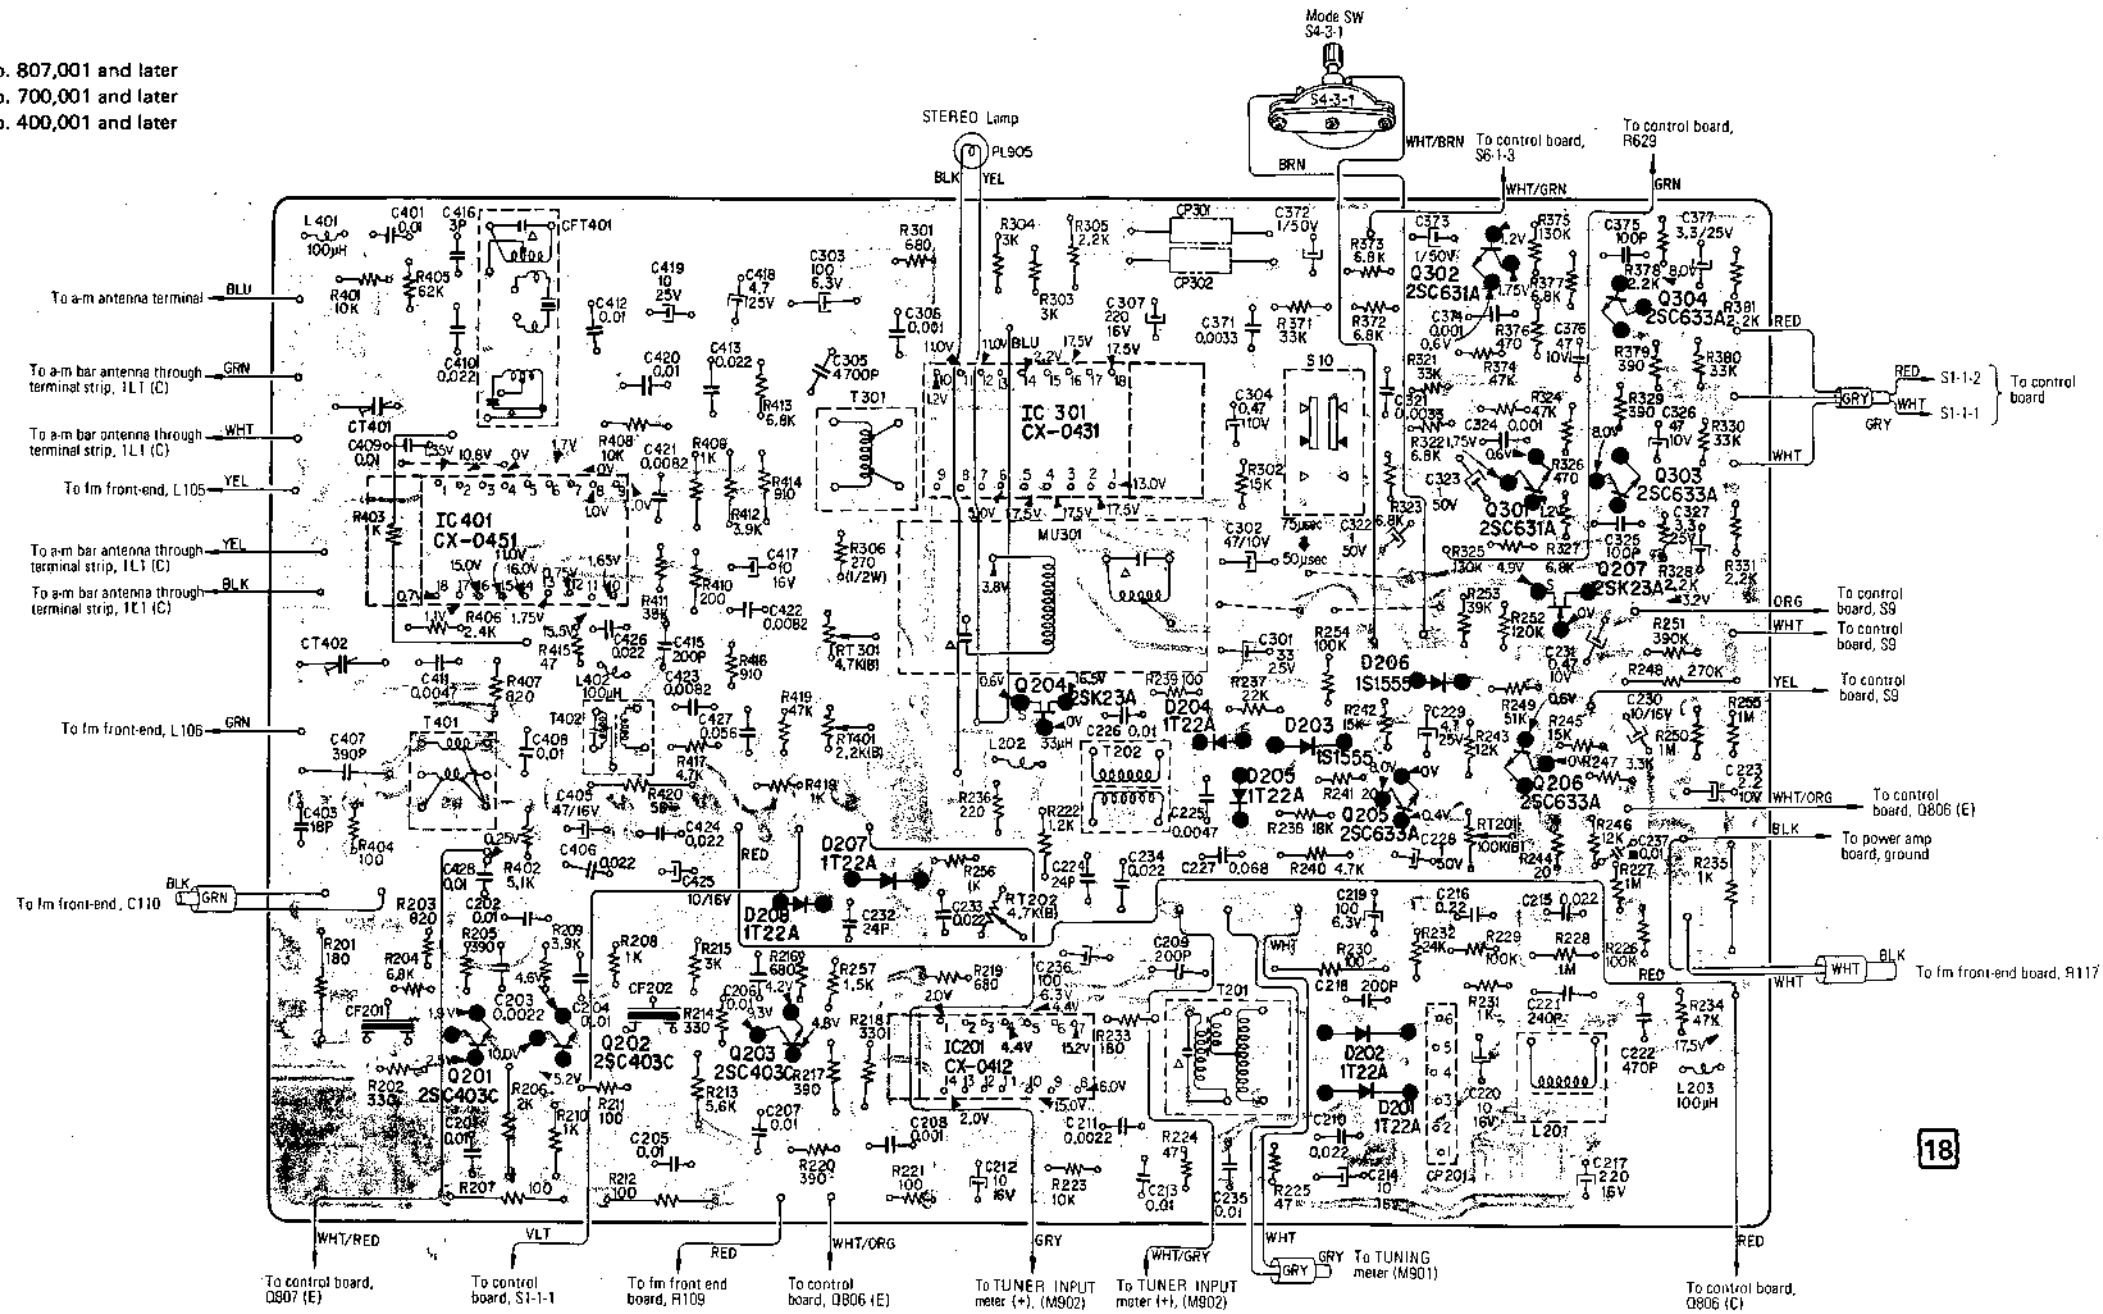


■ C237 is mounted on the conductor side

Parts Location

Q	Q201	Q202	Q203	Q204	Q205	Q206	Q207	Q301	Q302	Q303	Q304
ADJ	CT401 CT402	T401	T301 RT301 RT401	RT202	T201	RT201					

5.6. SCHEMATIC DIAGRAM — Tuner Section —

USA Model Serial No. 807,001 and later
 Canada Model Serial No. 700,001 and later
 GEP Model Serial No. 400,001 and later

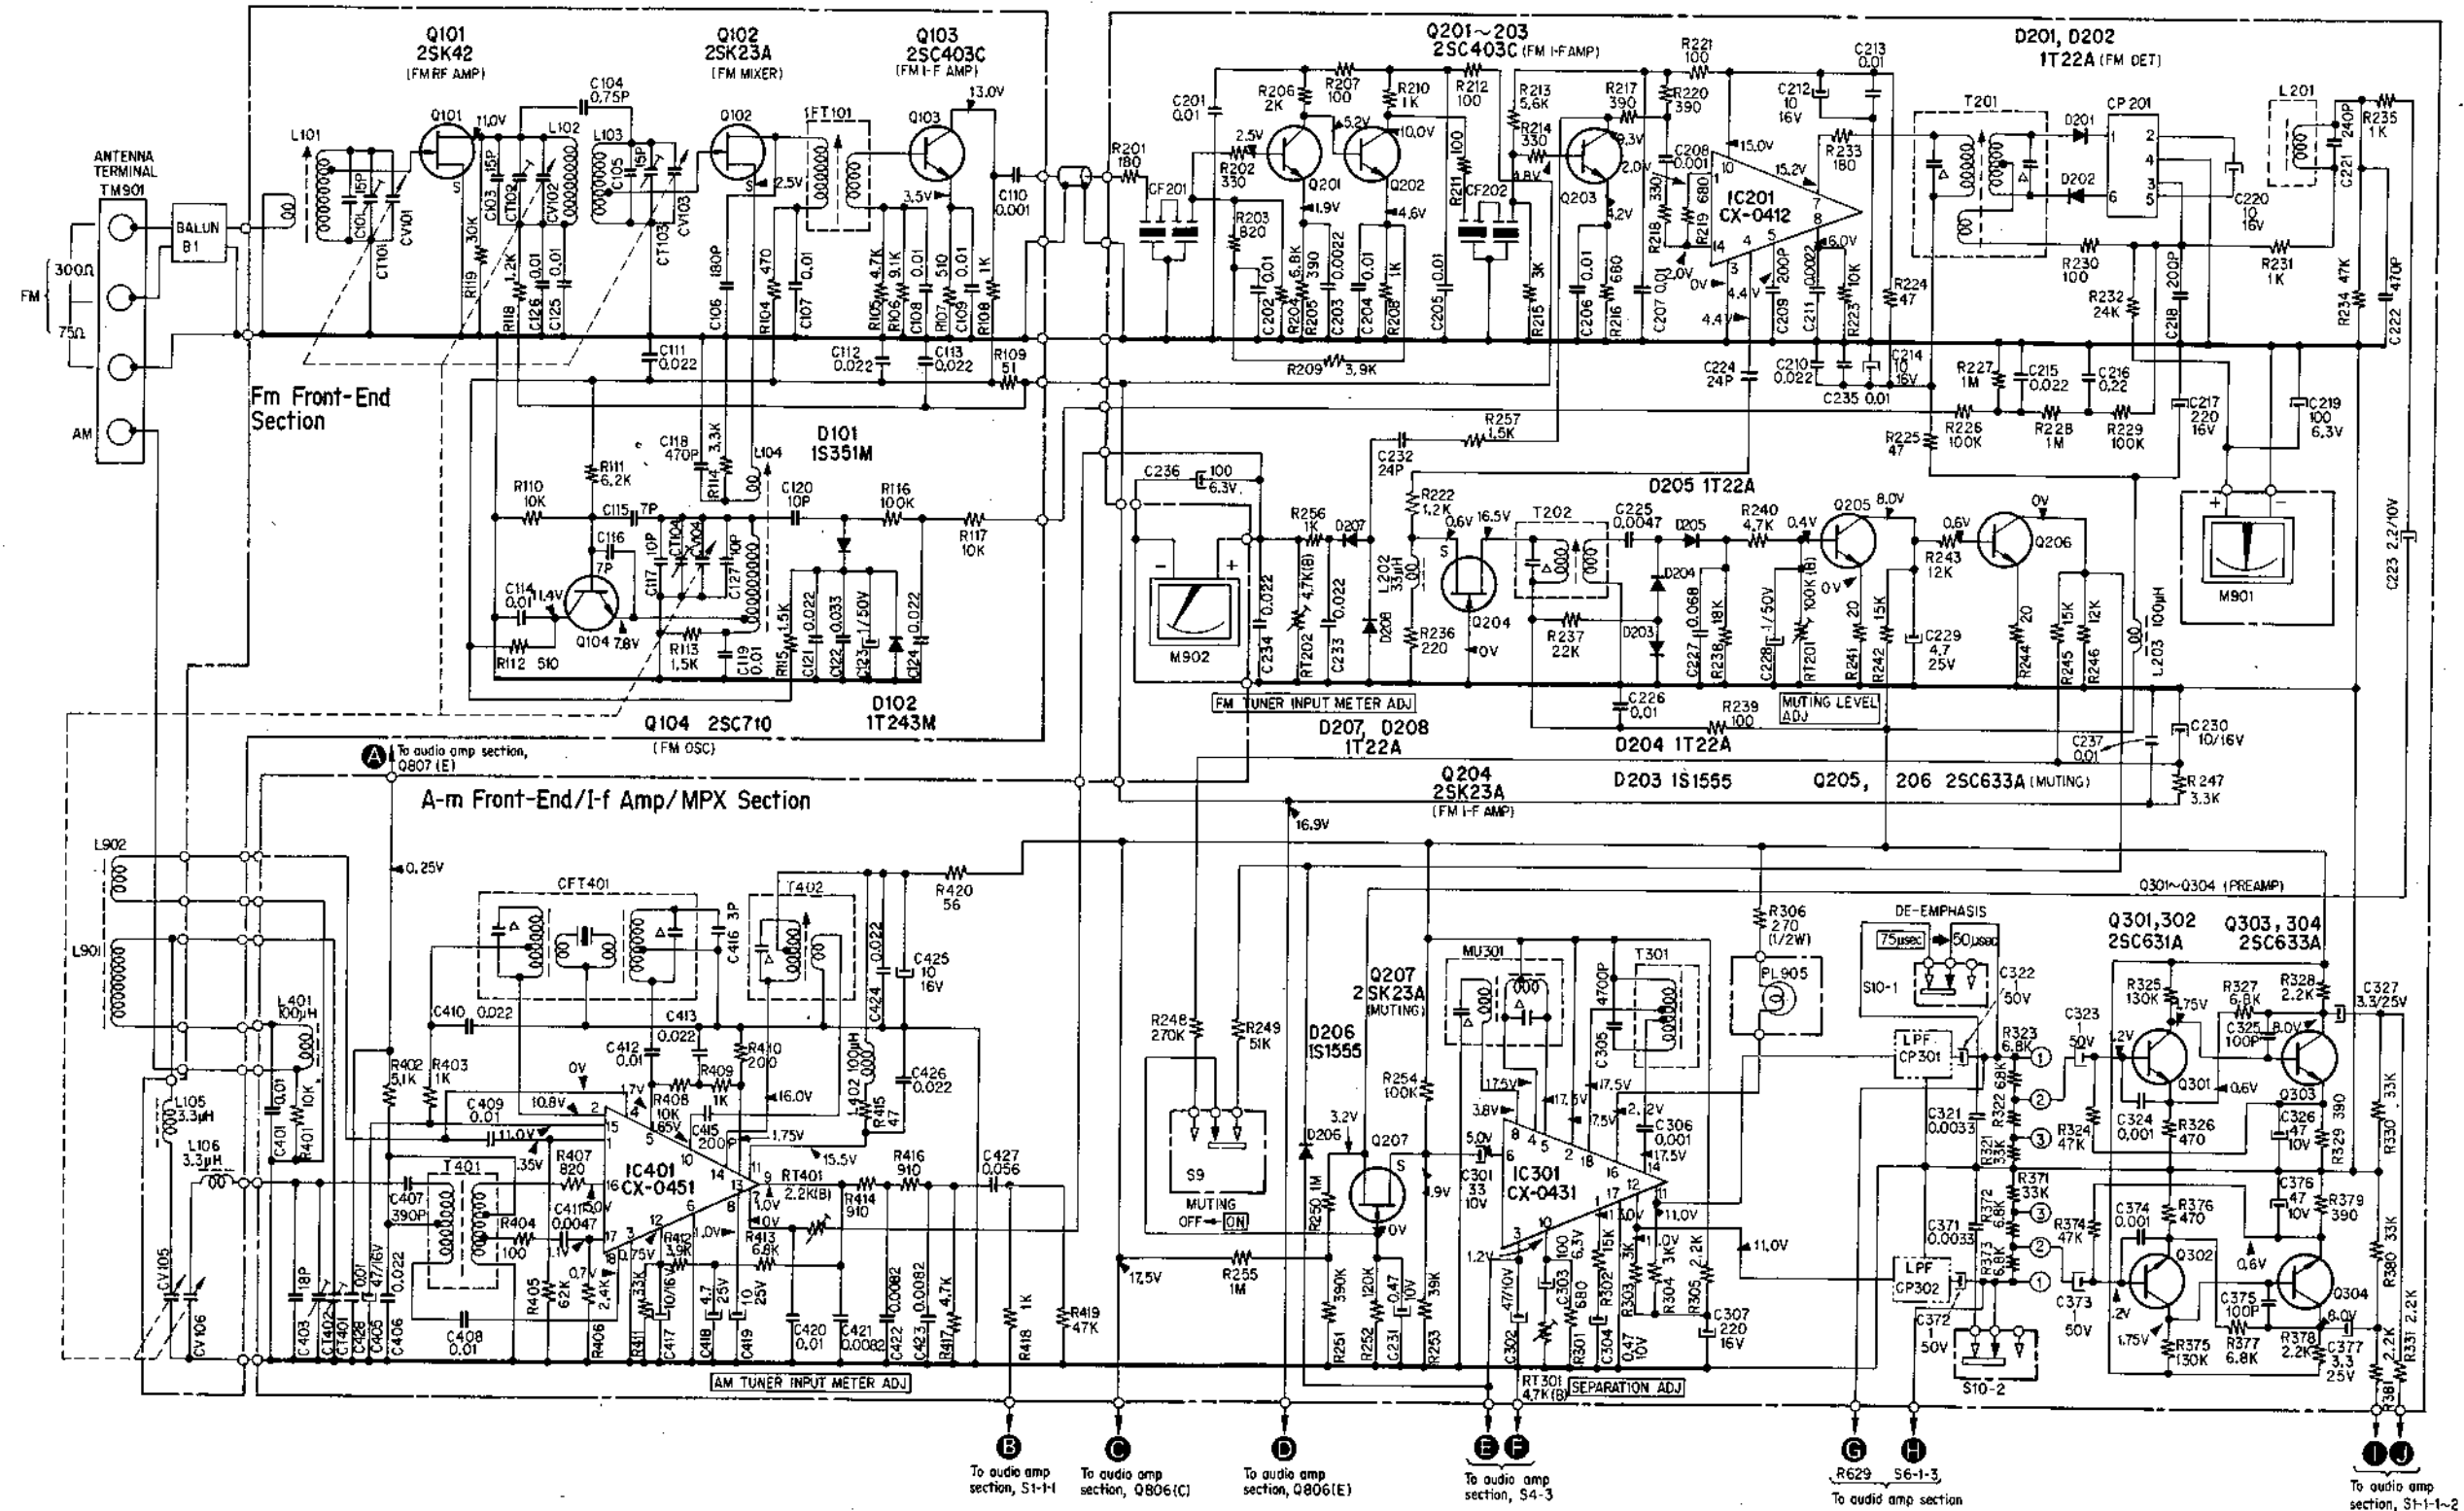


Ref. No.	Description	Position
S9	MUTING switch	ON
S10	DE-EMPHASIS switch	75 μ sec (50 μ sec—75 μ sec)

Note:

All resistance values are in ohms. k = 1000, M = 1000 k
 All capacitance values are in μ F except as indicated with p,
 which means μ F.

Voltage variations may be noted because of normal production tolerances.

All voltages are dc measured with a VOM which has an input impedance of 20 k ohms/volt. No signal in.

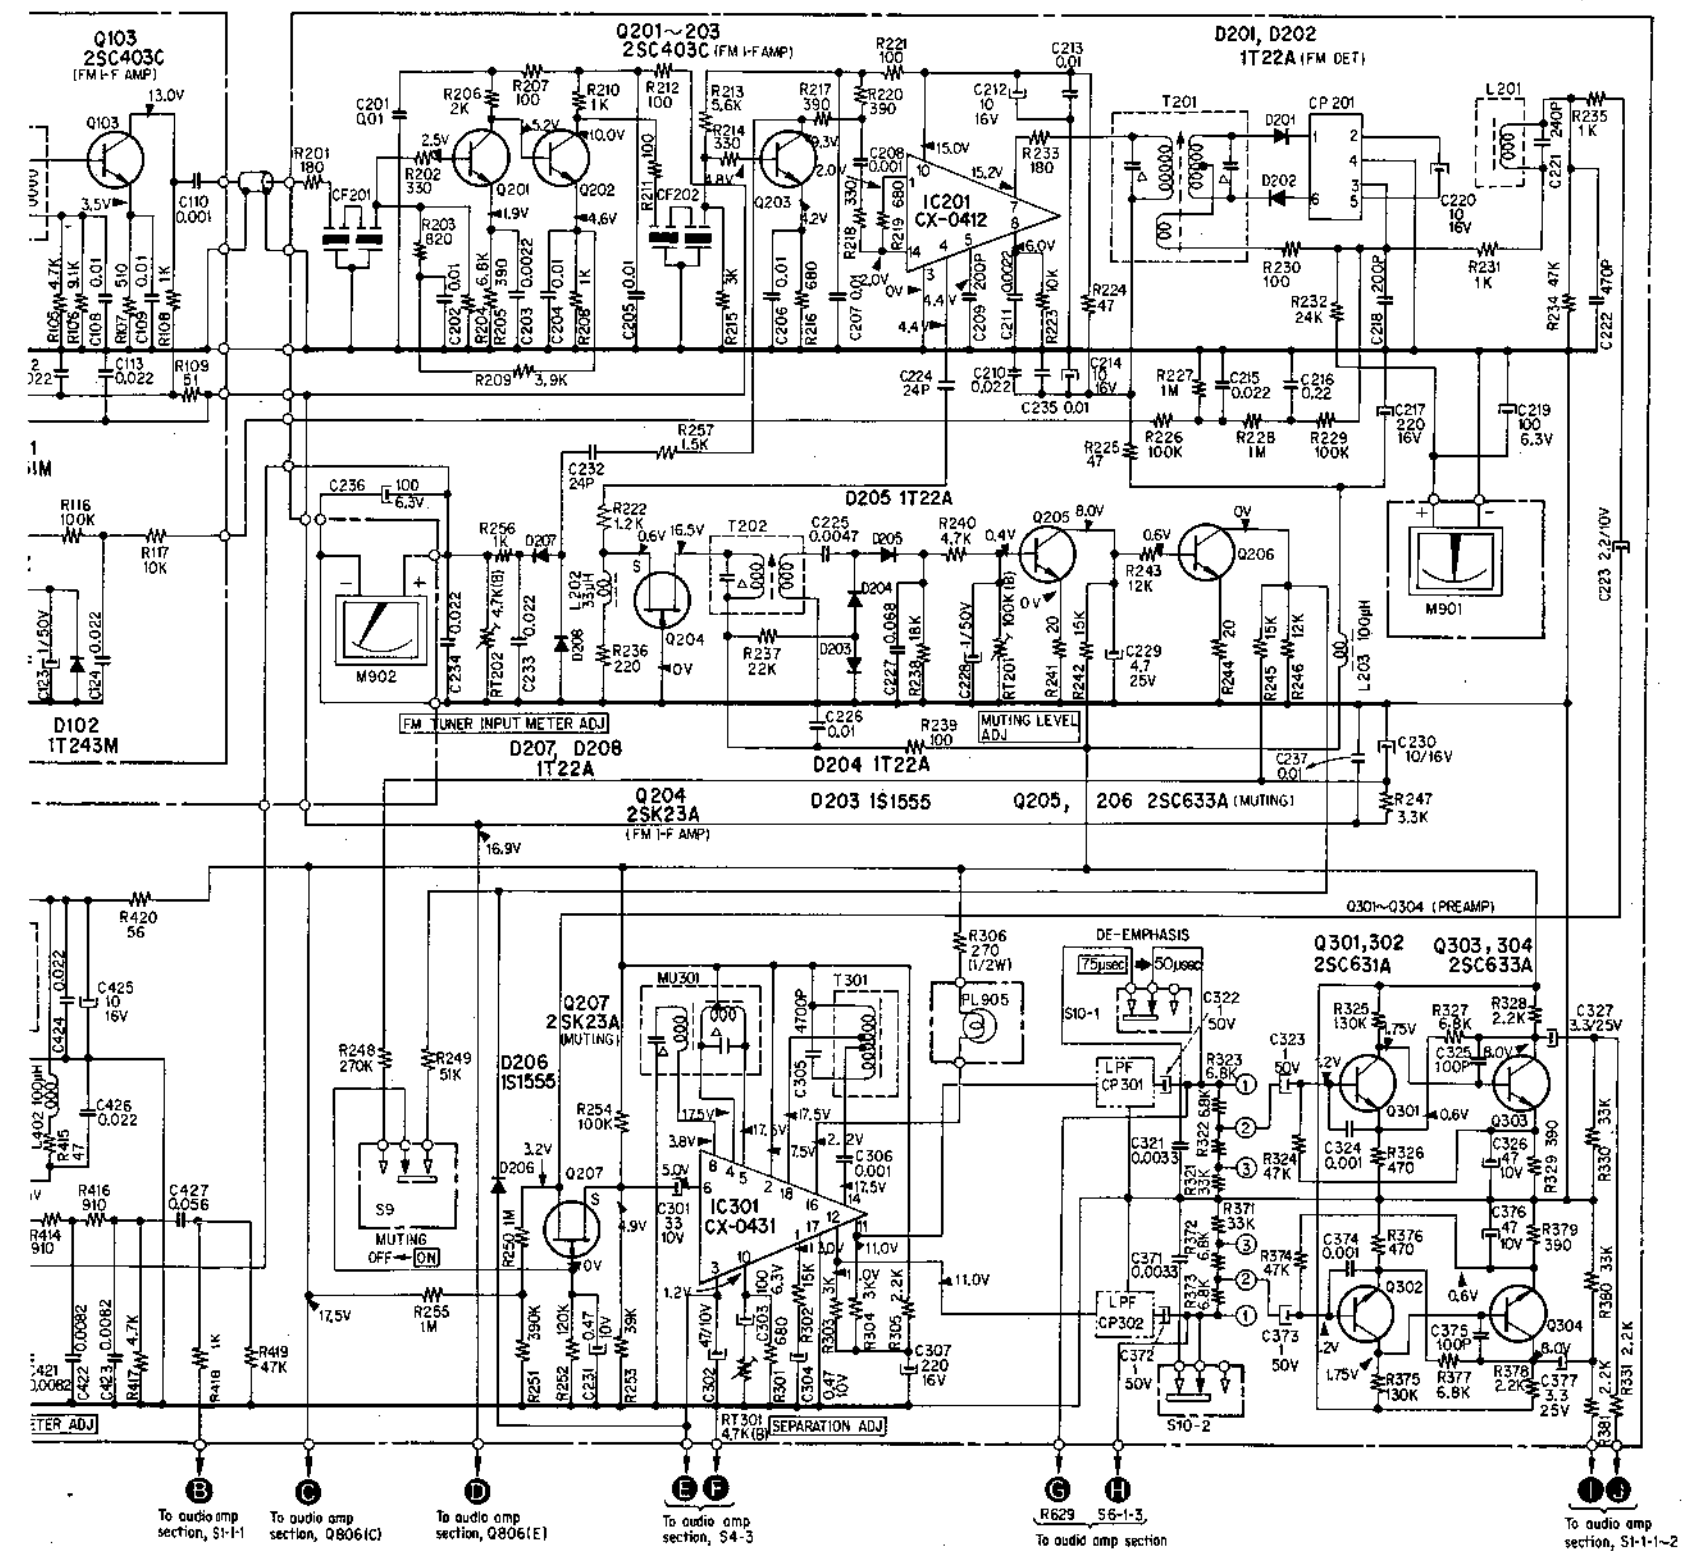

Position

ON

switch 75 μ sec
c)

Note:


All resistance values are in ohms. k = 1000, M = 1000 k

All capacitance values are in μF except as indicated with p, which means $\mu\mu\text{F}$.


Voltage variations may be noted because of normal production tolerances.

All voltages are dc measured with a VOM which has an input impedance of 20 k ohms/volt. No signal in.


IC BLOCK DIAGRAMS

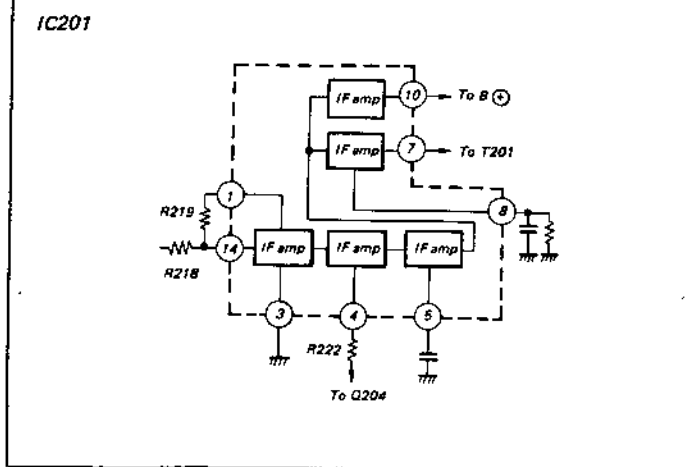

Detailed IC (CX-0412) diagram

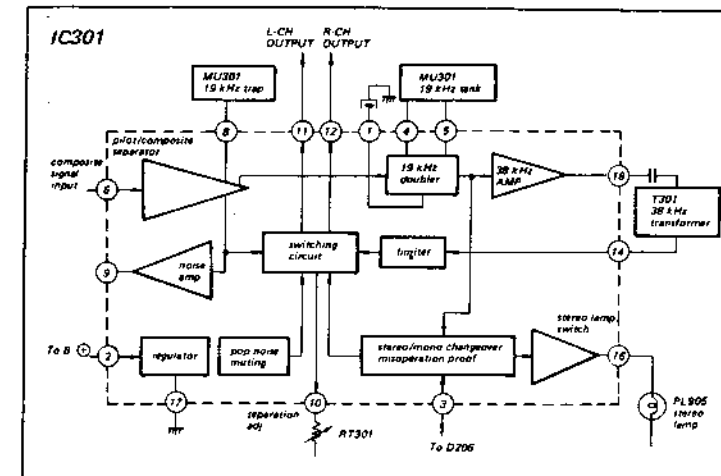


Detailed IC (CX-0431) diagram

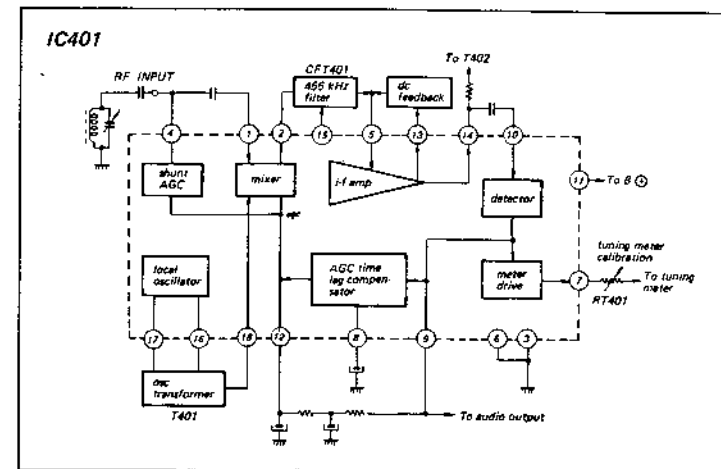

Detailed IC (CX-0451) diagram

IC BLOCK DIAGRAM

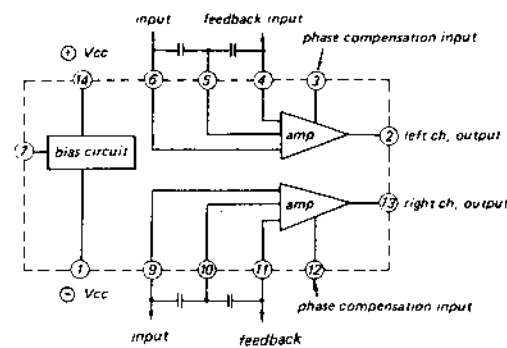


Detailed IC (CX-0461) diagram

<u>Ref. No.</u>	<u>Description</u>	<u>Position</u>
S1-1 ~ 4	FUNCTION switch {AUX ~ PHONO - FM - AM - (TAPE PRINT 1 - 2) - (TAPE PRINT 2 - 1)}	FM
S2-1 ~ 2	MONITOR-1 switch (SOURCE - TAPE)	SOURCE
S3-1 ~ 2	MONITOR-2 switch (SOURCE - TAPE)	SOURCE
S4	MODE switch [REVERSE - STEREO - (L + R) - LEFT - RIGHT]	STEREO
S5	LOUDNESS switch	ON
S6	FILTER switch (LOW - OFF - HIGH - BOTH)	OFF
S7	NORMAL/SEPARATE switch	NORMAL
S8	SPEAKER switch [C - B - OFF - A - (A + B) - (A + C)]	A
S11	POWER switch	OFF
S12	MIC MIXING switch	OFF

5-7. SCHEMATIC DIAGRAM – Audio Amplifier Section –


USA Model only Serial No. up to 808,100

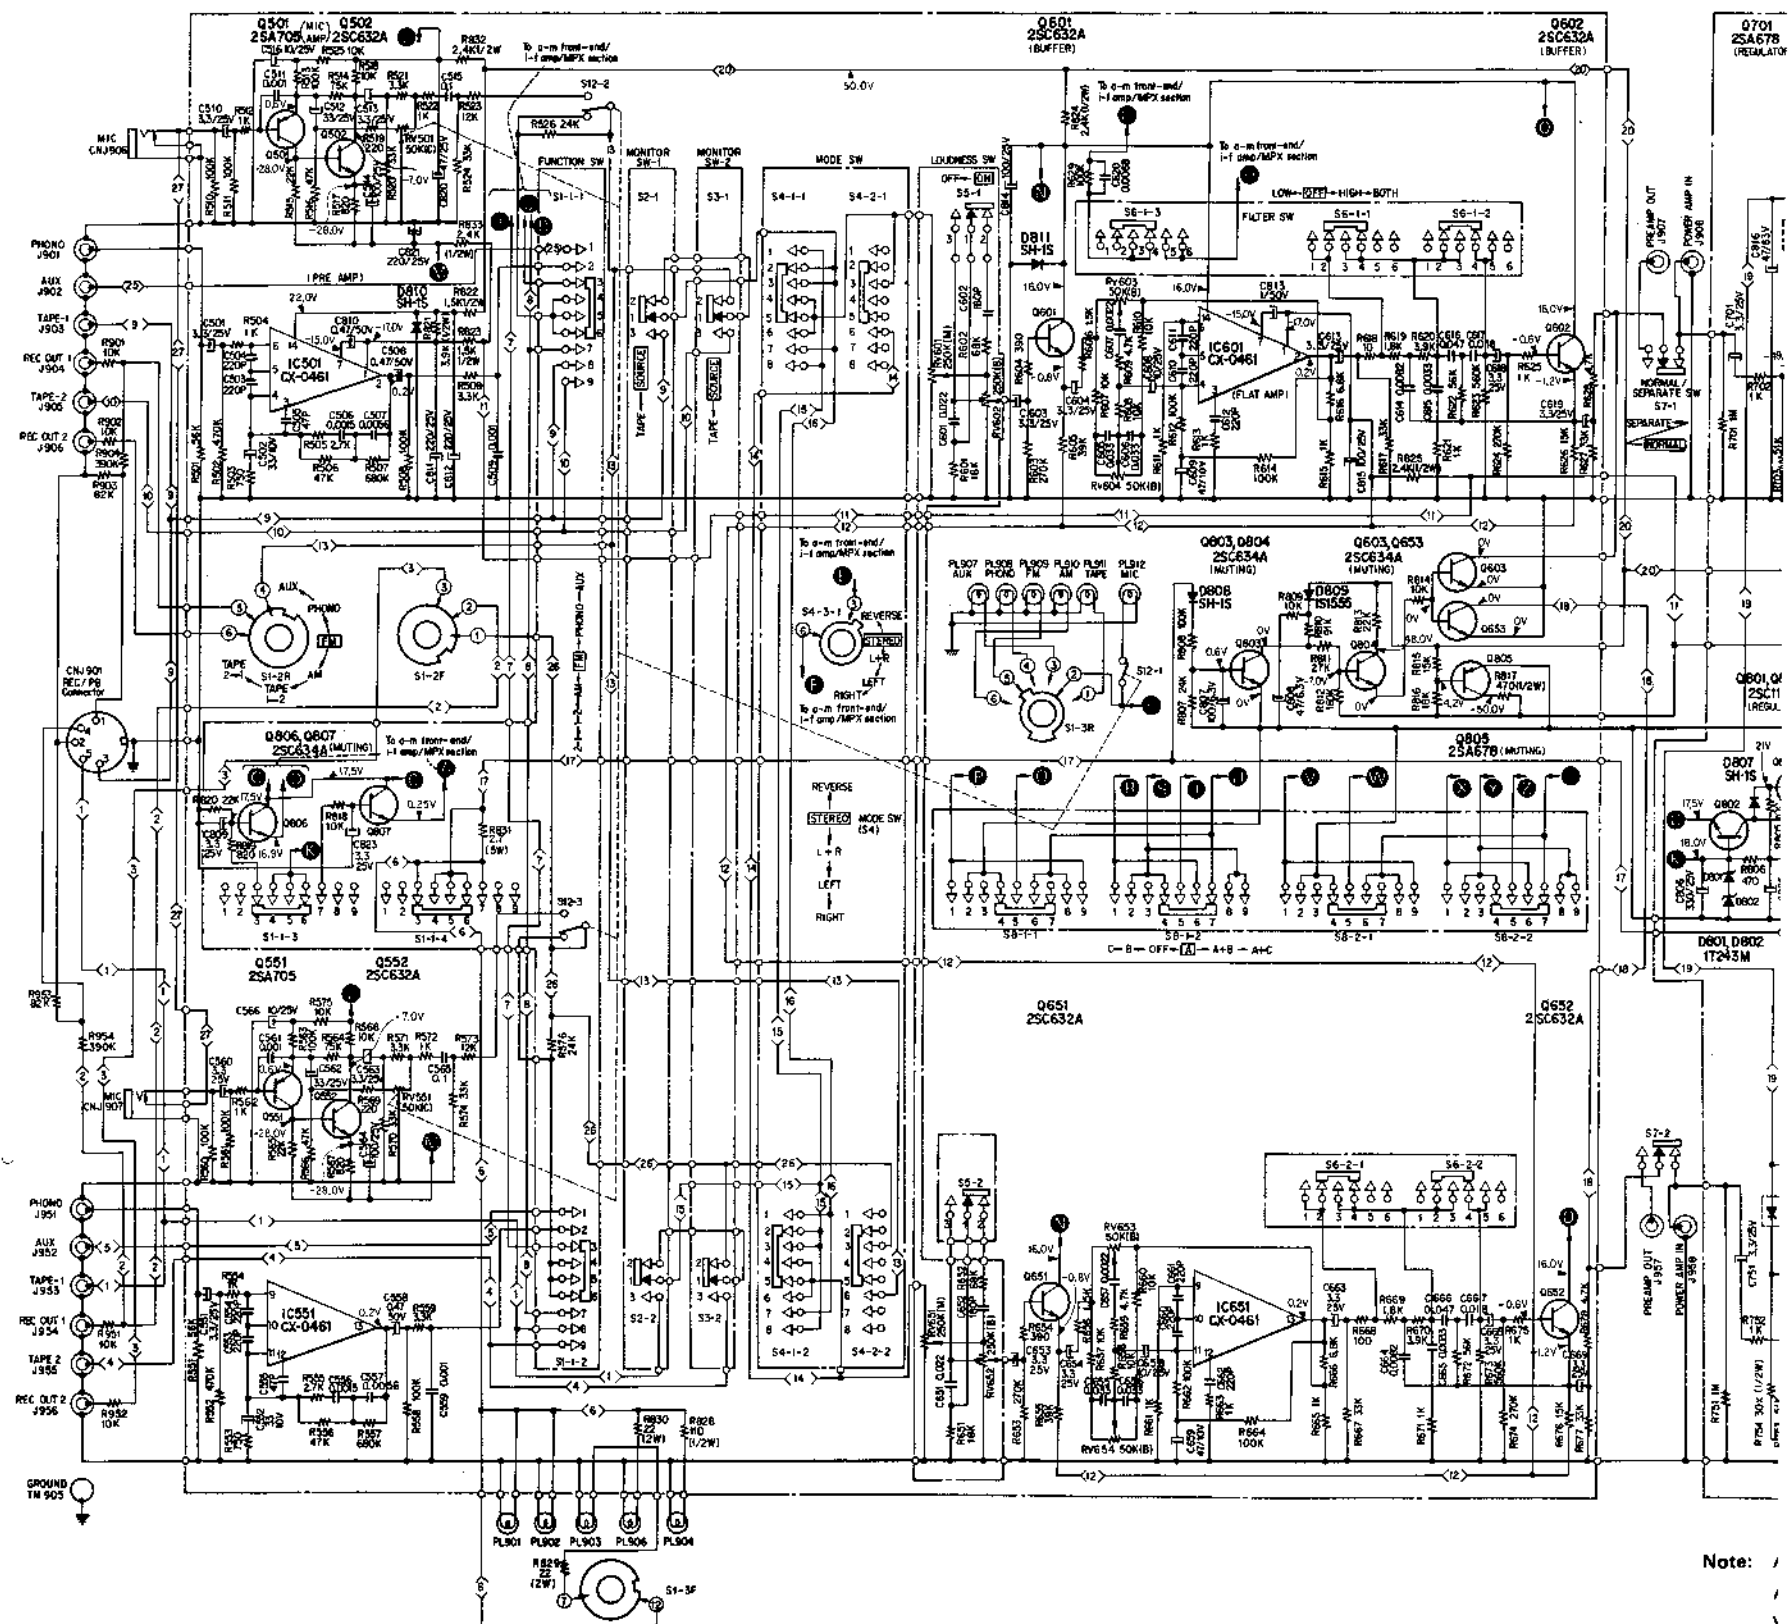

Note: /

5-7. SCHEMATIC DIAGRAM — Audio Amplifier Section —



USA Model only Serial No. up to 808,100

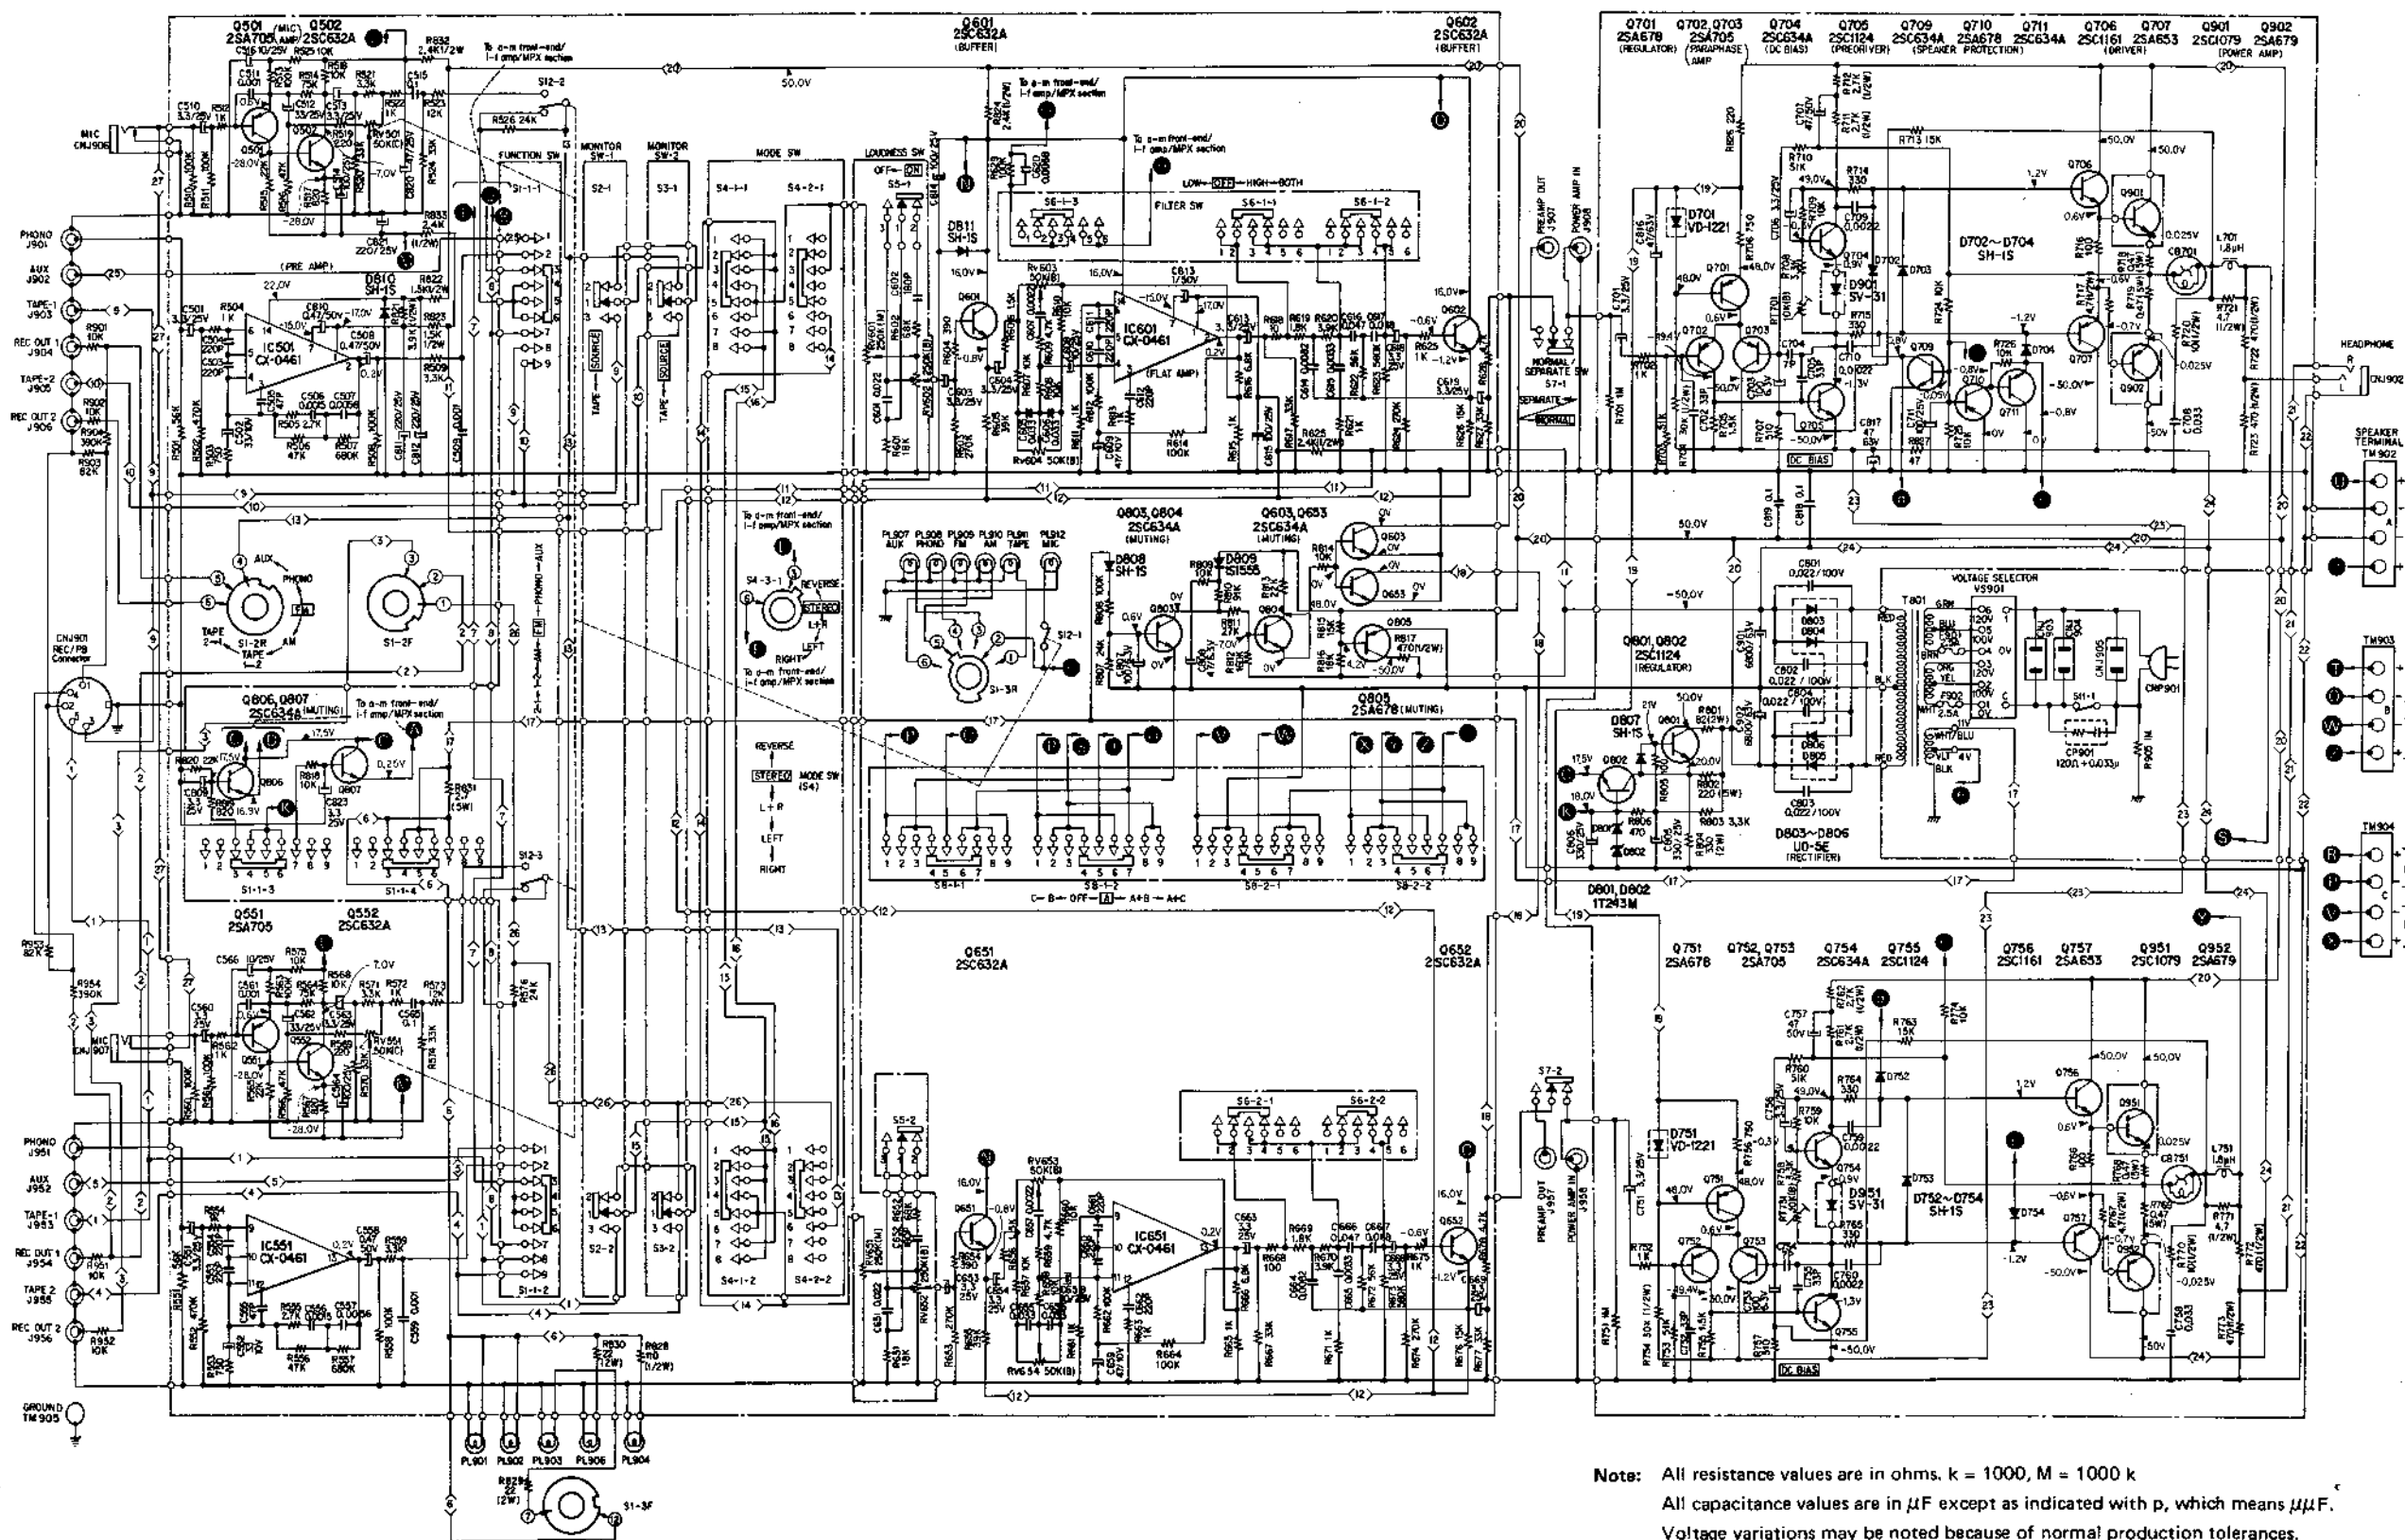

Note: All resistance values are in ohms. k = 1000, M = 1000 k
All capacitance values are in μF except as indicated with p, which means μF .
Voltage variations may be noted because of normal production tolerances.
All voltages are dc measured with a VOM which has an input impedance of 20 k ohms/volt. No signal in.



5-8. MOUNTING DIAGRAM - Control Board -
- Conductor Side - (CCB-115)

USA Model only Serial No. up to 808,100

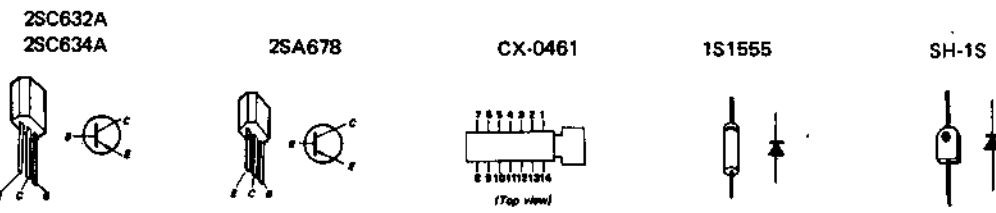
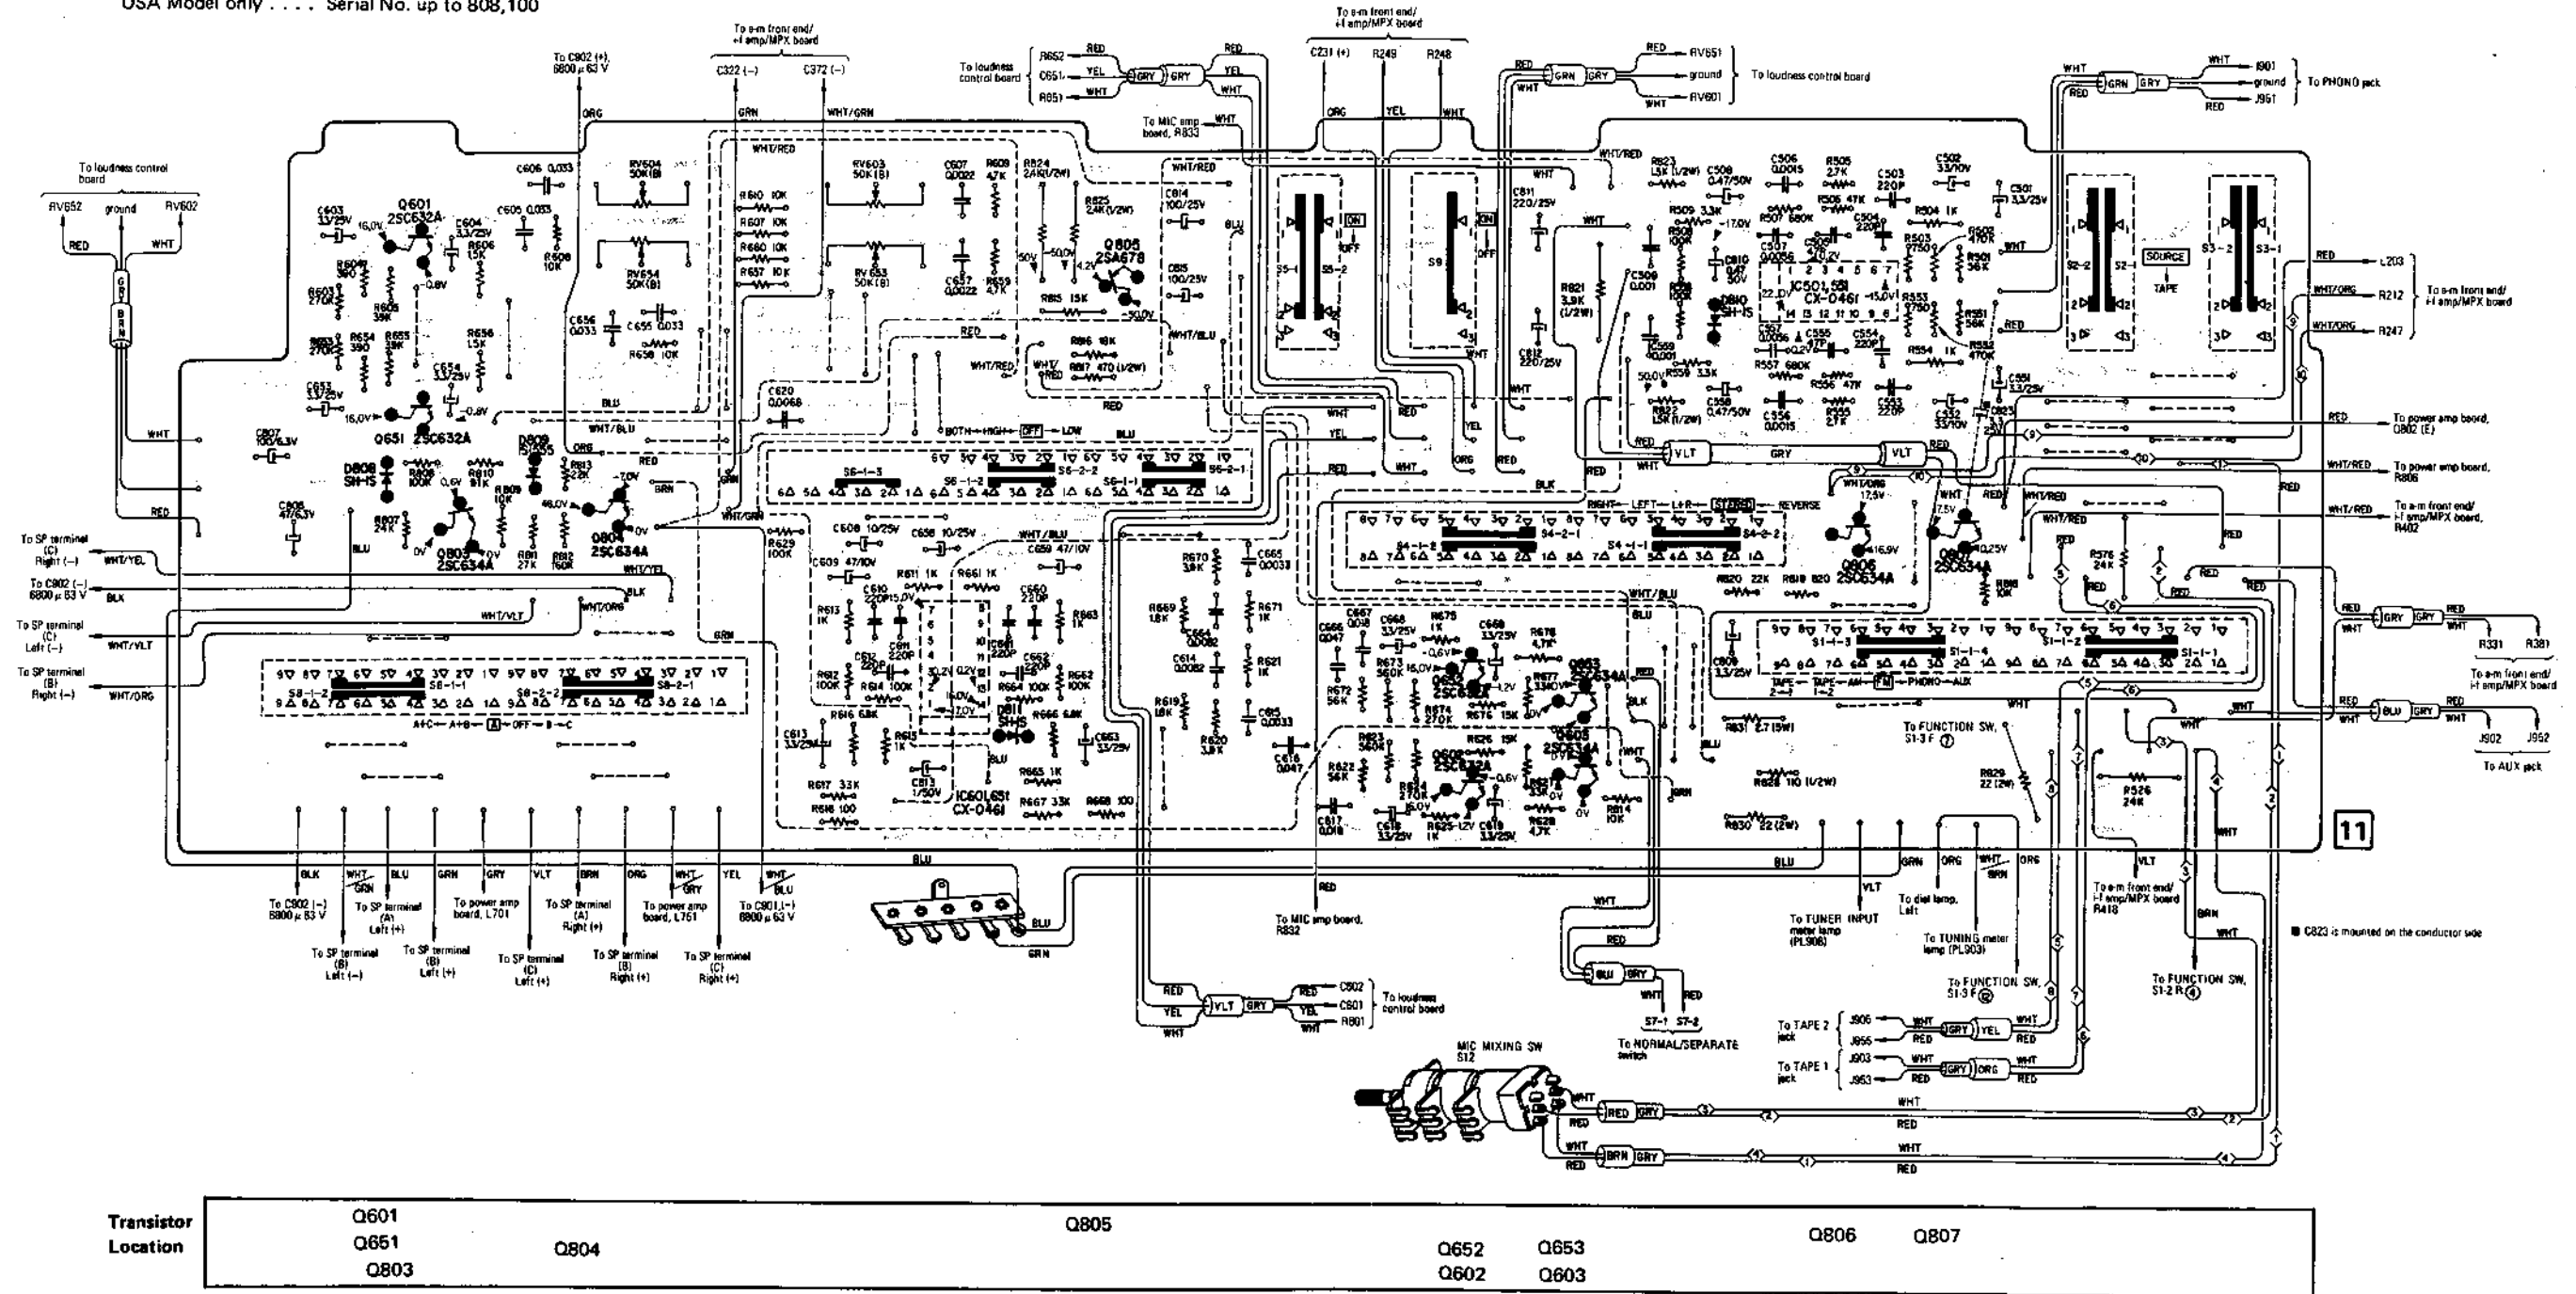


5.9. MOUNTING DIAGRAM – Power Amplifier/Power Supply Board – – Conductor Side –



USA Model only Serial No. up to 808,100

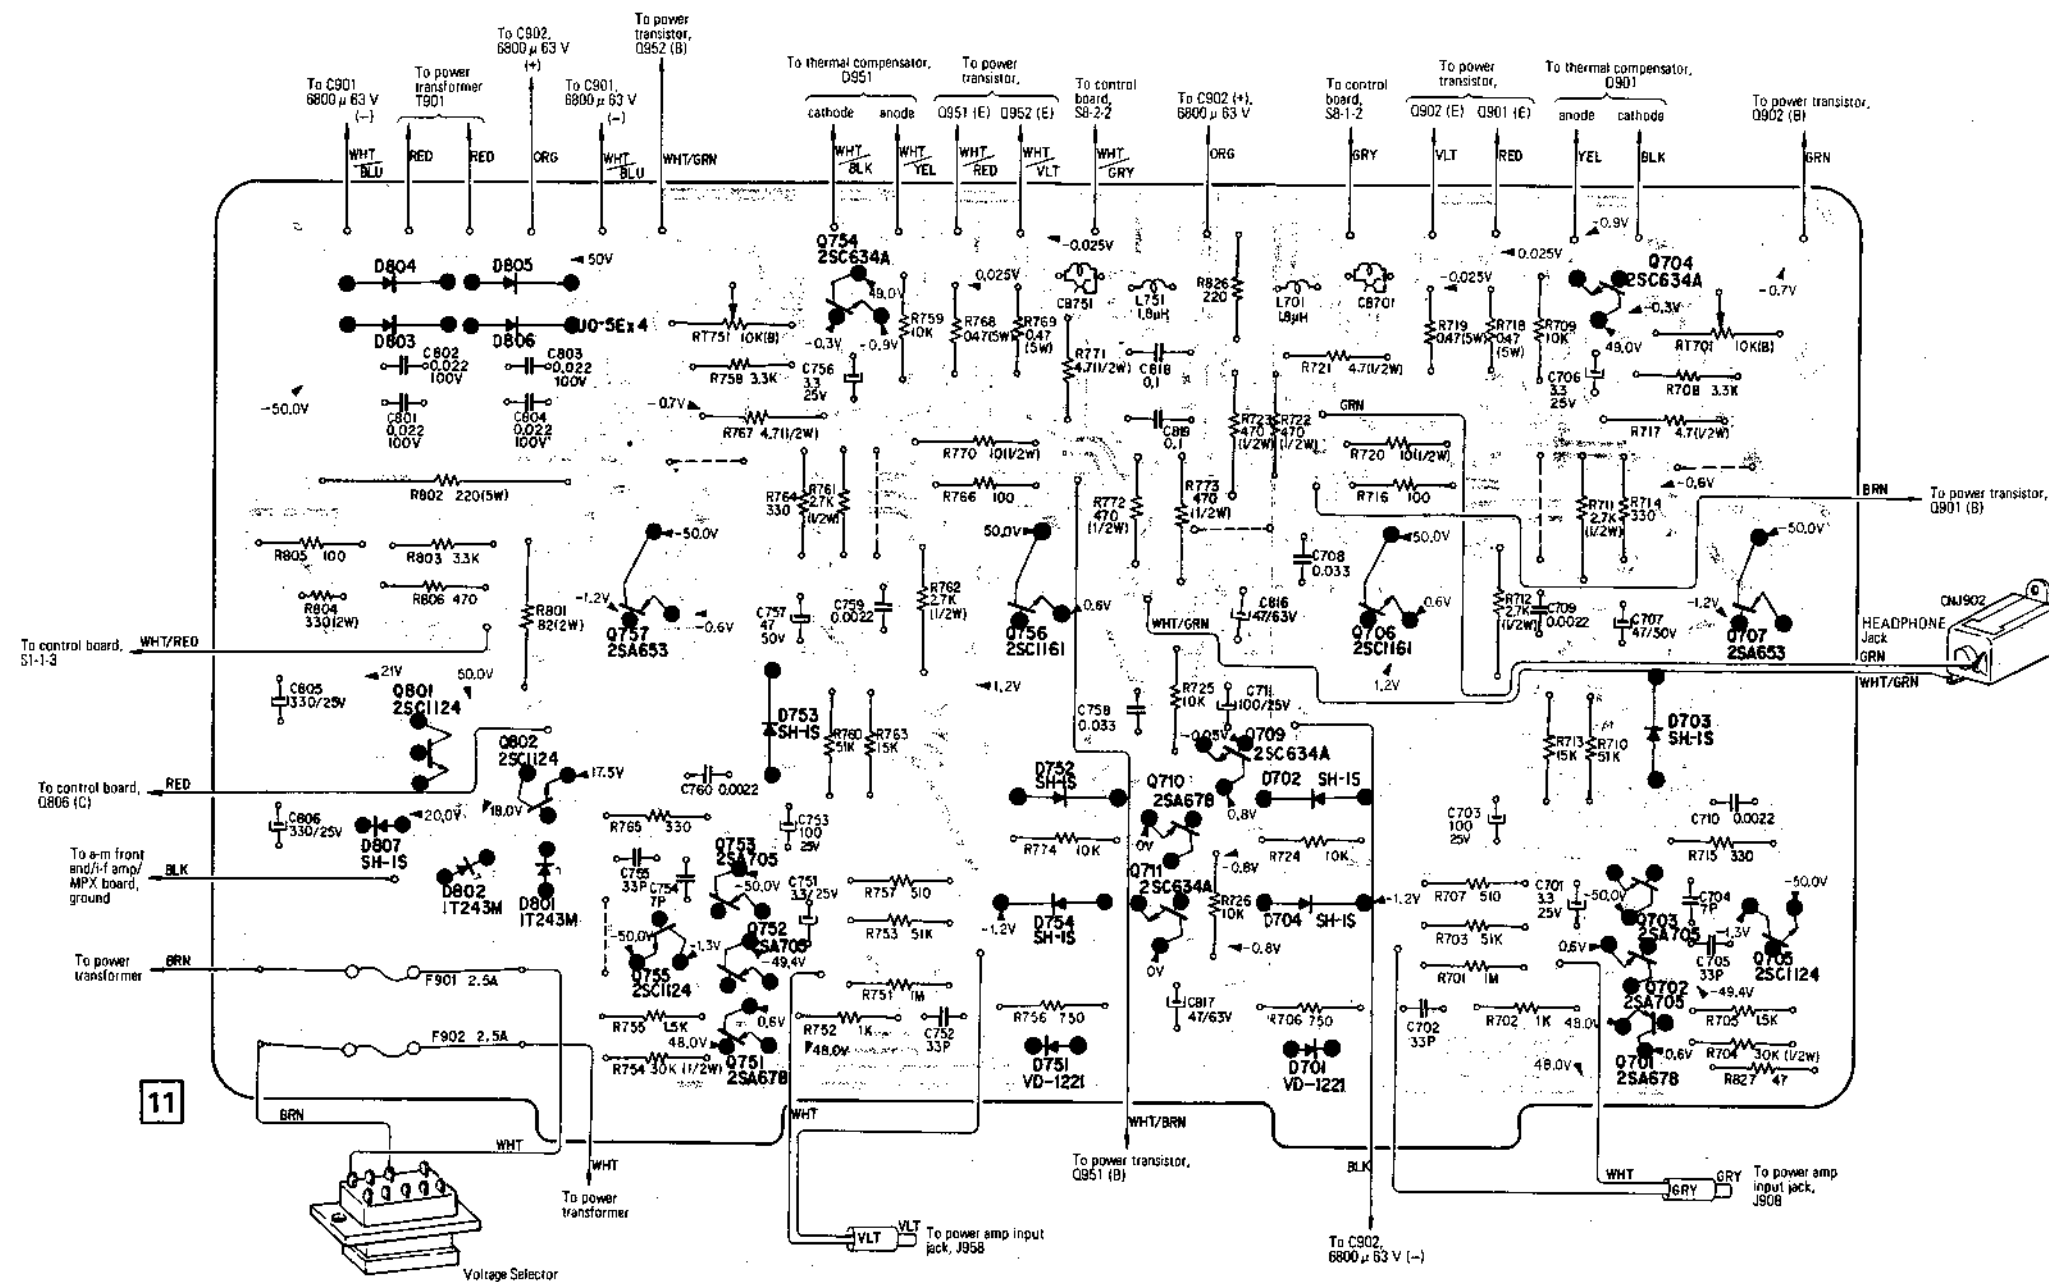2SA678
2SA705

2SC634A

2SA653
2SA679


2SC1124

2SC1079
2SC1161


1T243M




UO-5E



SH-1S



SV-31



VD-1221




Parts Location

Q	Q801	Q802	Q757	Q753	Q754	Q756	Q710	Q709	Q706	Q704	Q703	Q702	Q701	Q707	Q705
D	D804	D805	D803	D806	D807	D802	D801	D753	D752	D754	D751	D704	D701	D702	D703
ADJ	RT751										RT701				


5-10. MOUNTING DIAGRAM – Power Amplifier/Power Supply Board –
– Conductor Side –

USA Model 808,101 and later
Canada Model 700,001 and later
GEP Model 400,001 and later





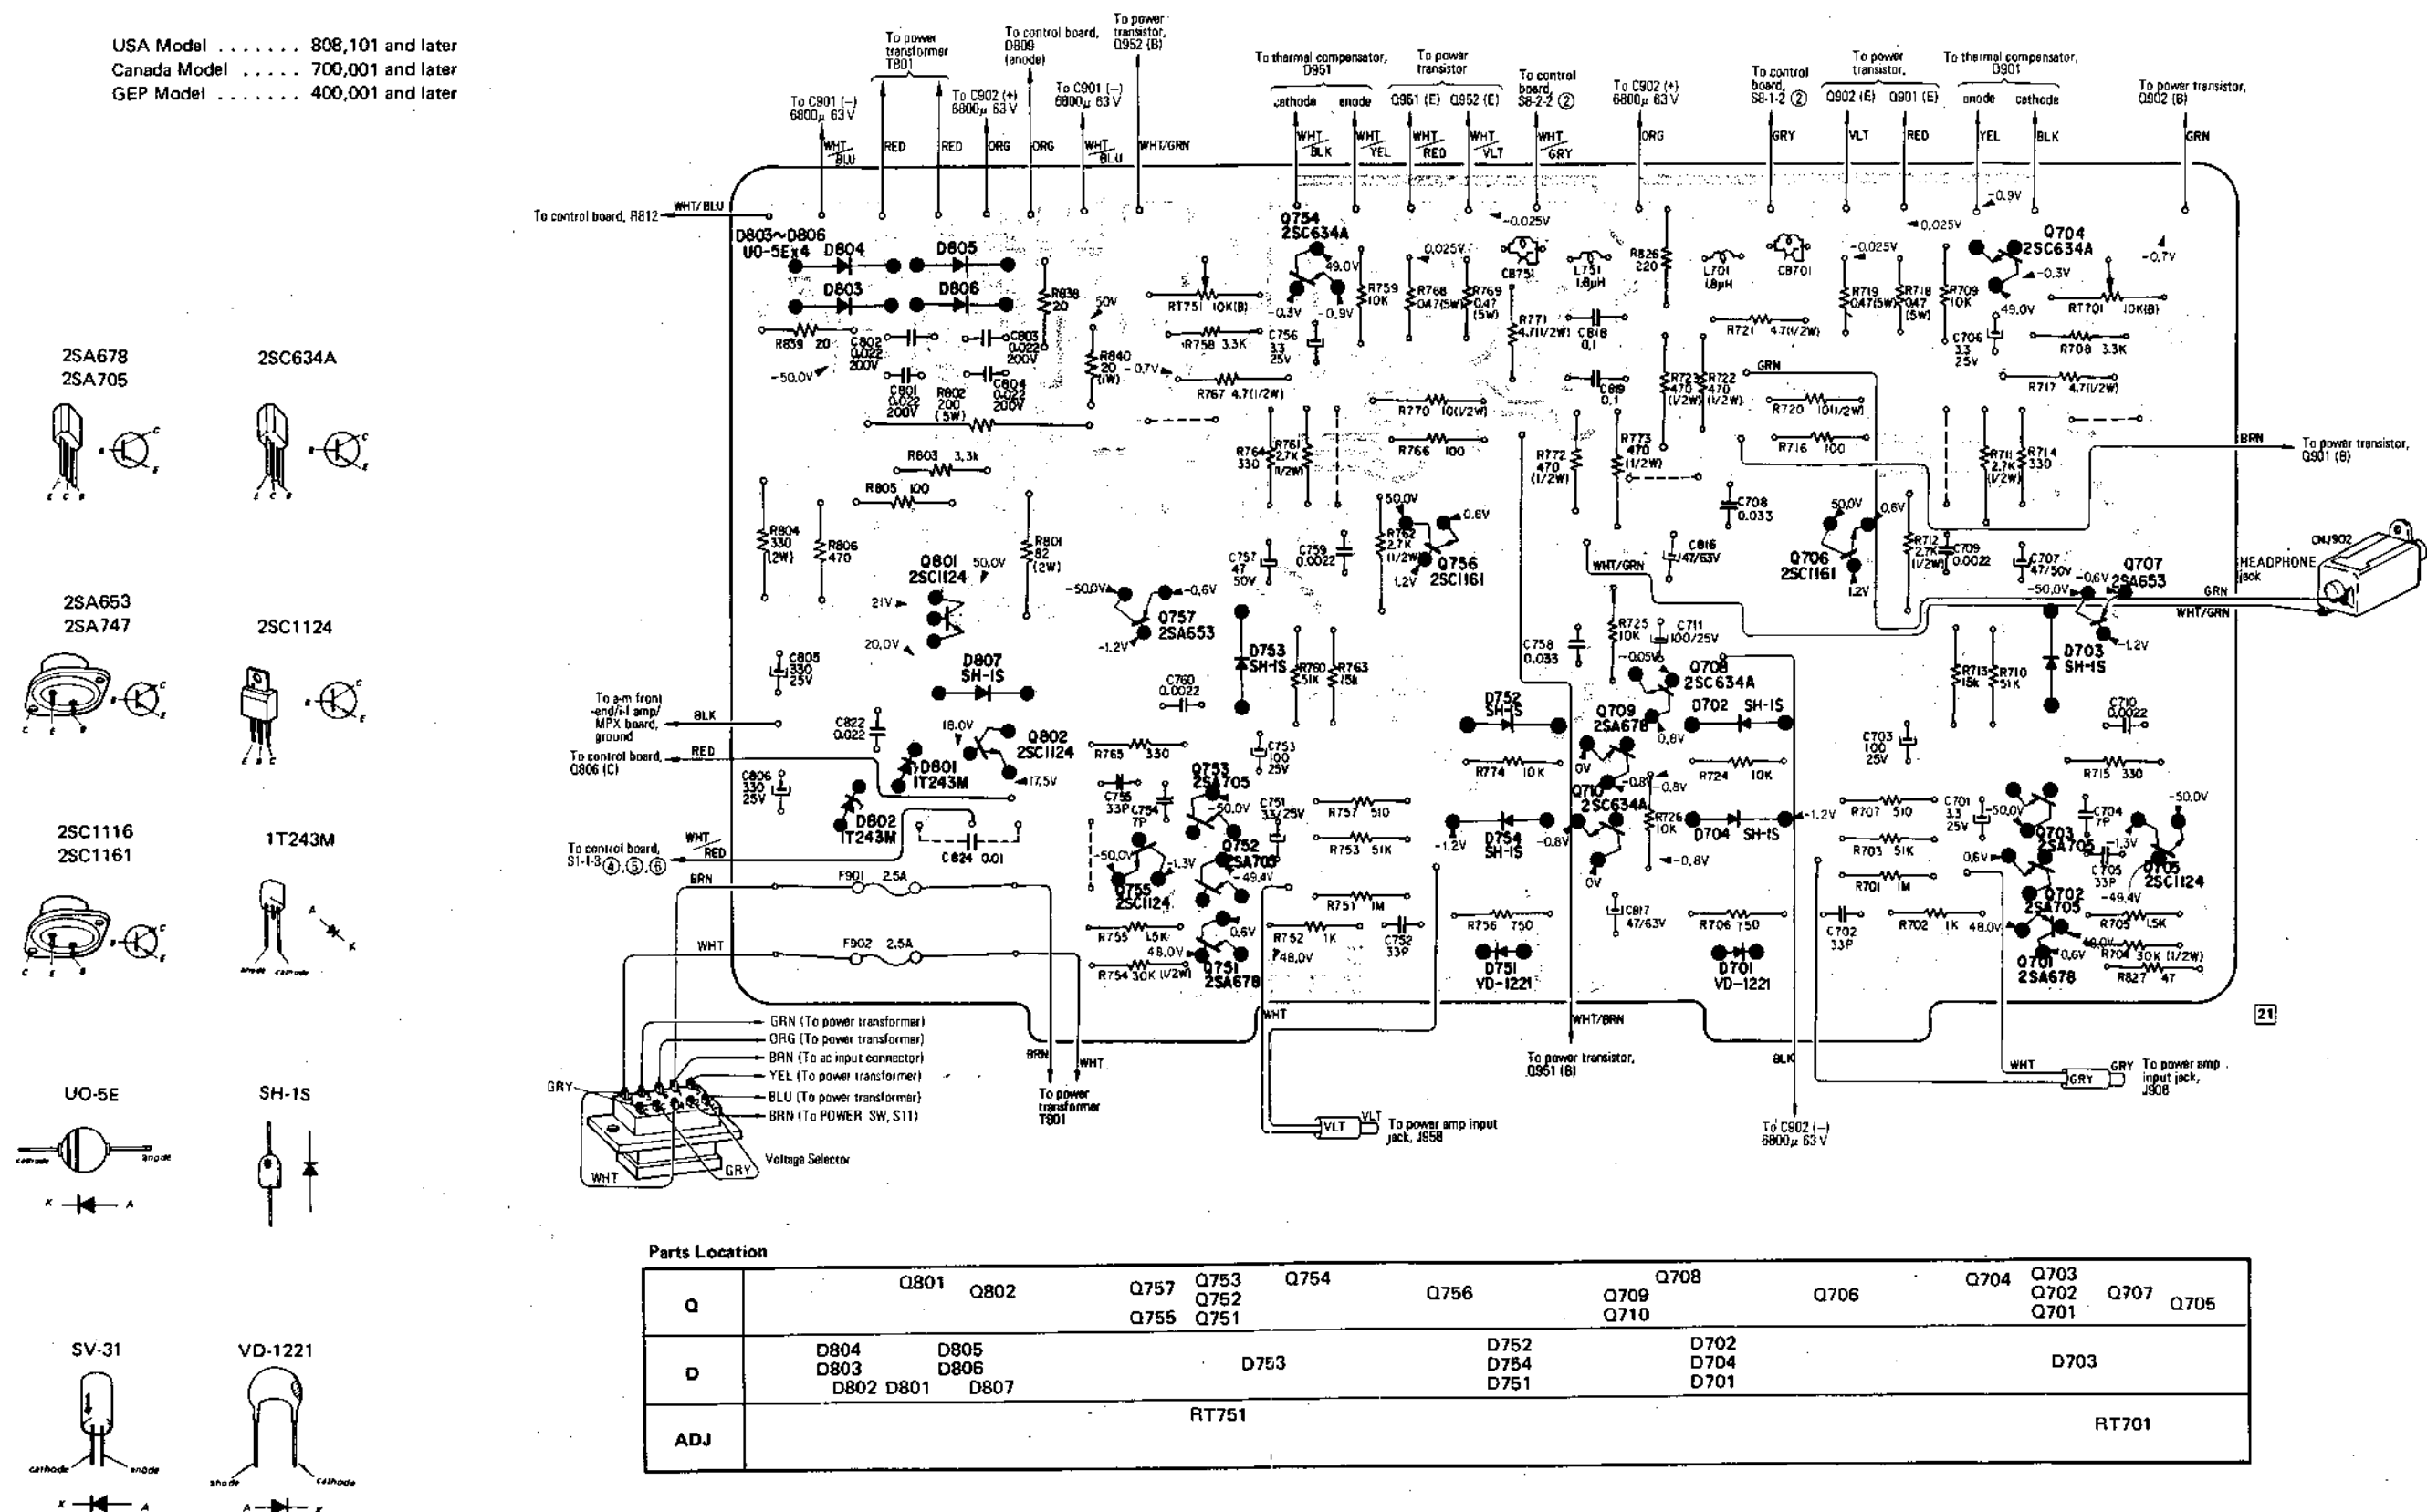


5-11. MOUNTING DIAGRAM — Control Board —
— Conductor Side — (CCB-115)

USA Model Serial No. 808,101 and later
Canada Model Serial No. 700,001 and later
GEP Model Serial No. 400,001 and later

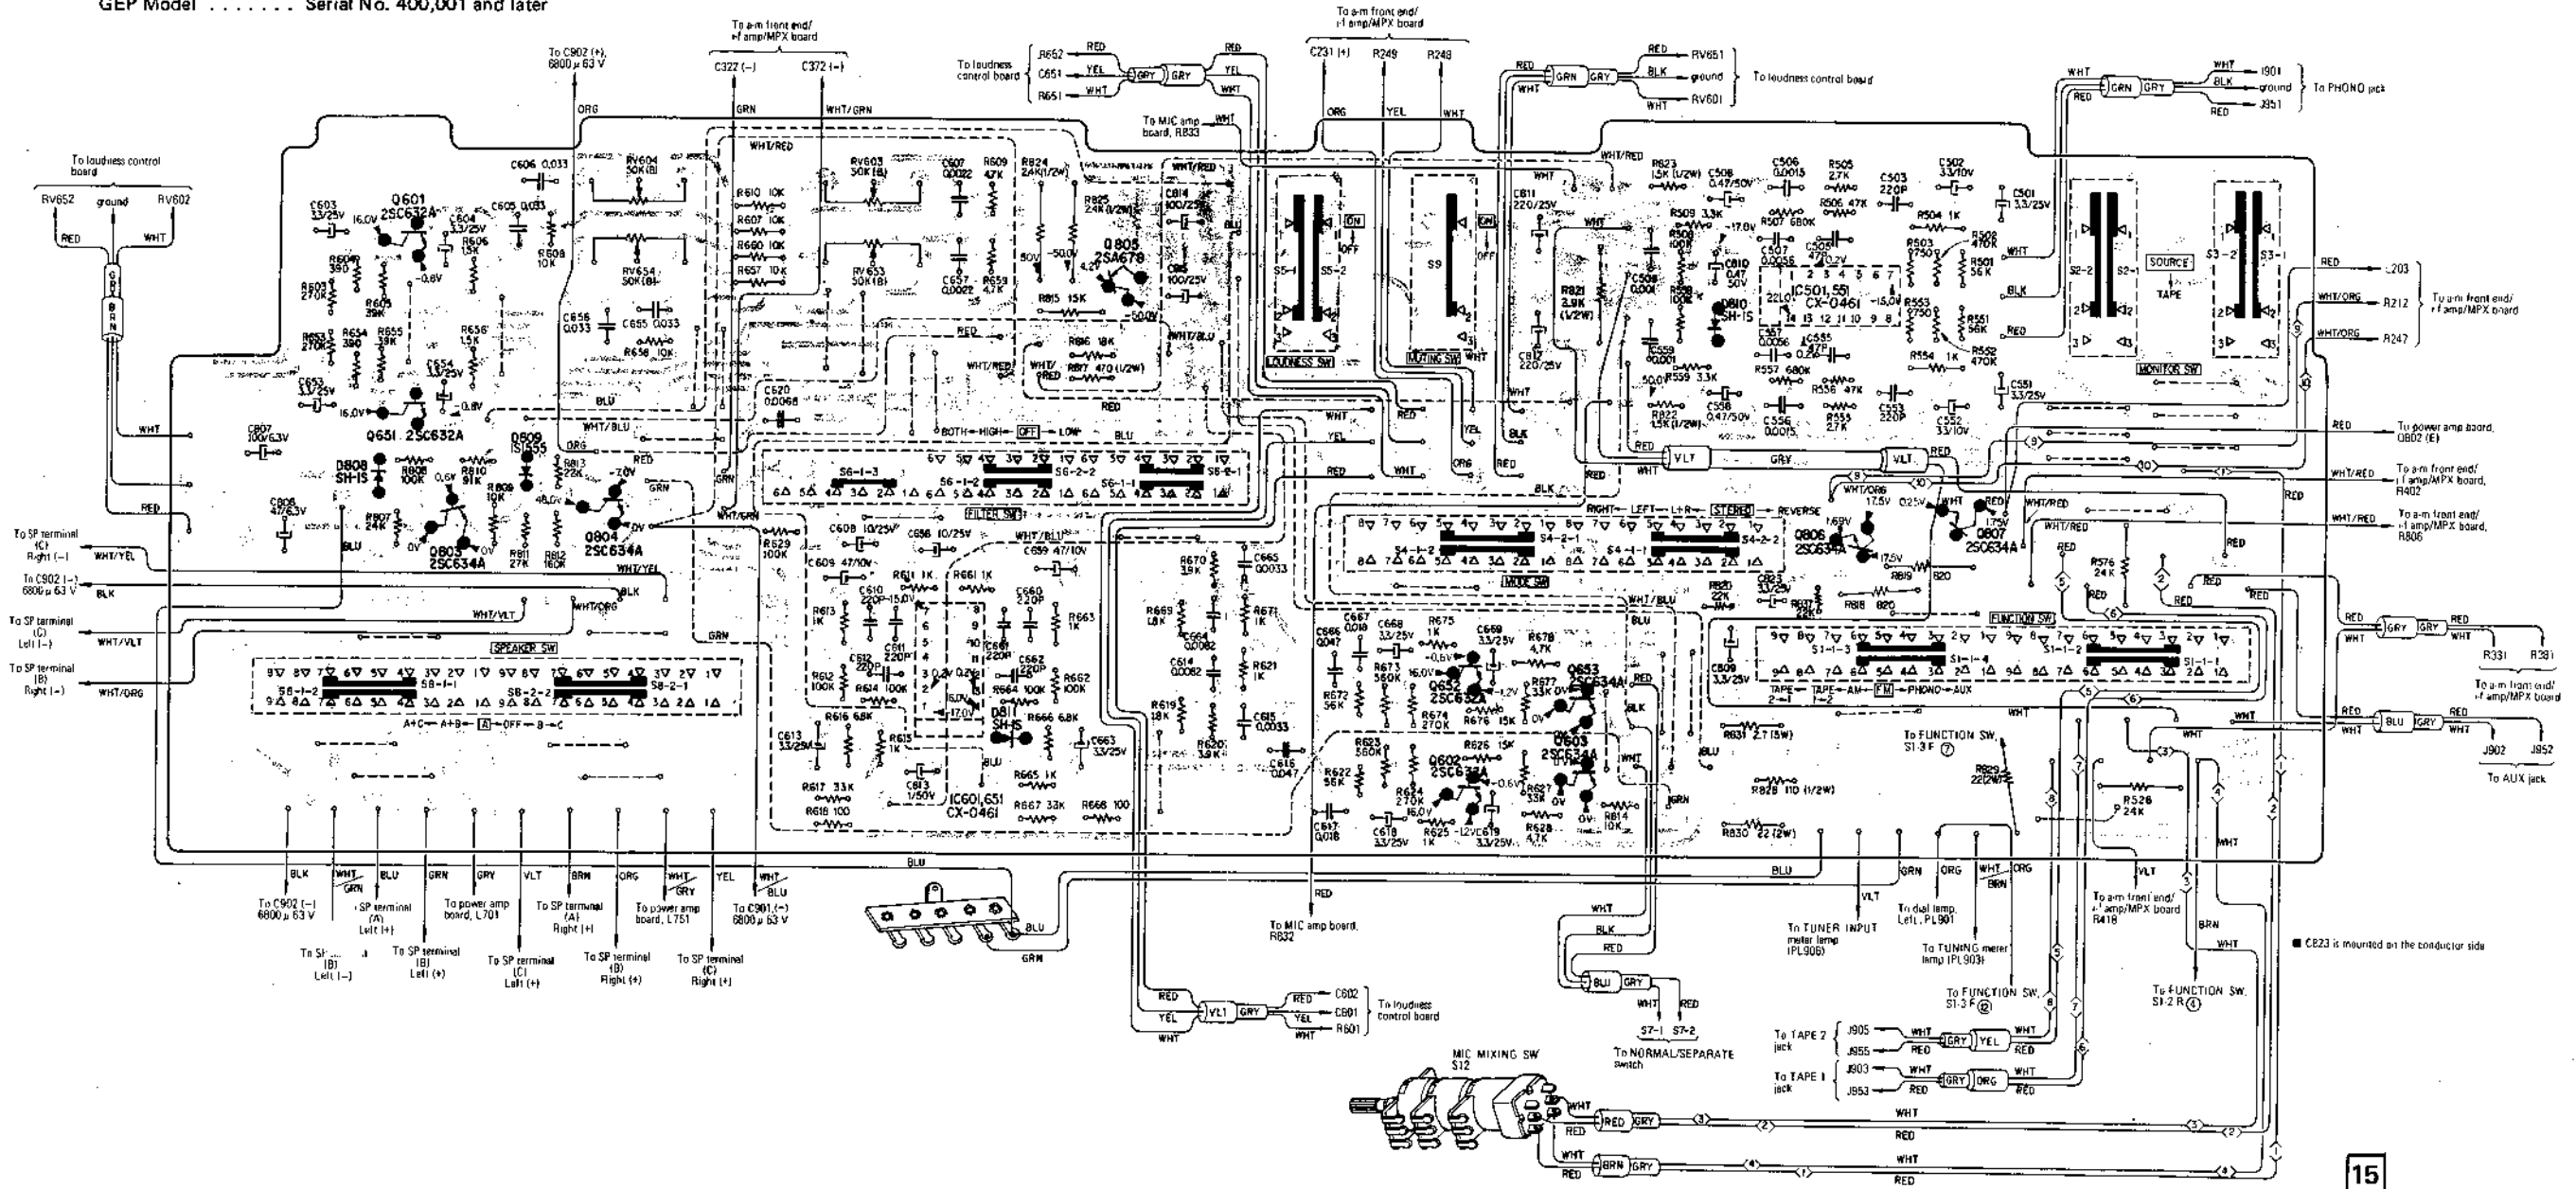


Transistor	Q601		Q805					
Location	Q651 ,	Q804		Q652	Q653	Q806	Q807	
	Q803			Q602	Q603			



STR-7065 STR-7065


USA Model	Serial No. 808,101 and later
Canada Model	Serial No. 700,001 and later
GEP Model	Serial No. 400,001 and later



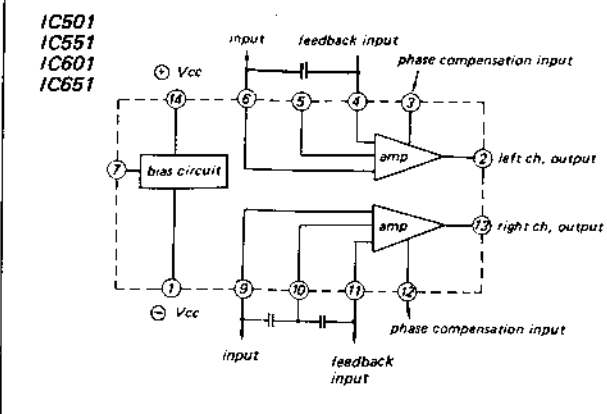

Detailed IC (CX-0461) diagram


GEP Model



Ref. No.	Description	Position
S1-1 ~ 4	FUNCTION switch (AUX - PHONO - FM - AM - TAPE PRINT 1 - 2) - (TAPE PRINT 2 - 1)	FM
S2-1 ~ 2	MONITOR-1 switch (SOURCE - TAPE)	SOURCE
S3-1 ~ 2	MONITOR-2 switch (SOURCE - TAPE)	SOURCE
S4	MODE switch (REVERSE - STEREO - (L + R) - LEFT - RIGHT)	STEREO
S5	LOUDNESS switch	ON
S6	FILTER switch (LOW - OFF - HIGH - BOTH)	OFF
S7	NORMAL/SEPARATE switch	NORMAL
S8	SPEAKER switch (C - B - OFF - A - (A + B) - (A + C))	A
S11	POWER switch	OFF
S12	MIC MIXING switch	OFF

Note:

All resistance values are in ohms. k = 1000, M = 1000 k
All capacitance values are in μF except as indicated with p, which means μF .
Voltage variations may be noted because of normal production tolerances.
All voltages are dc measured with a VOM which has an input impedance of 20 k ohms/volt. No signal in.

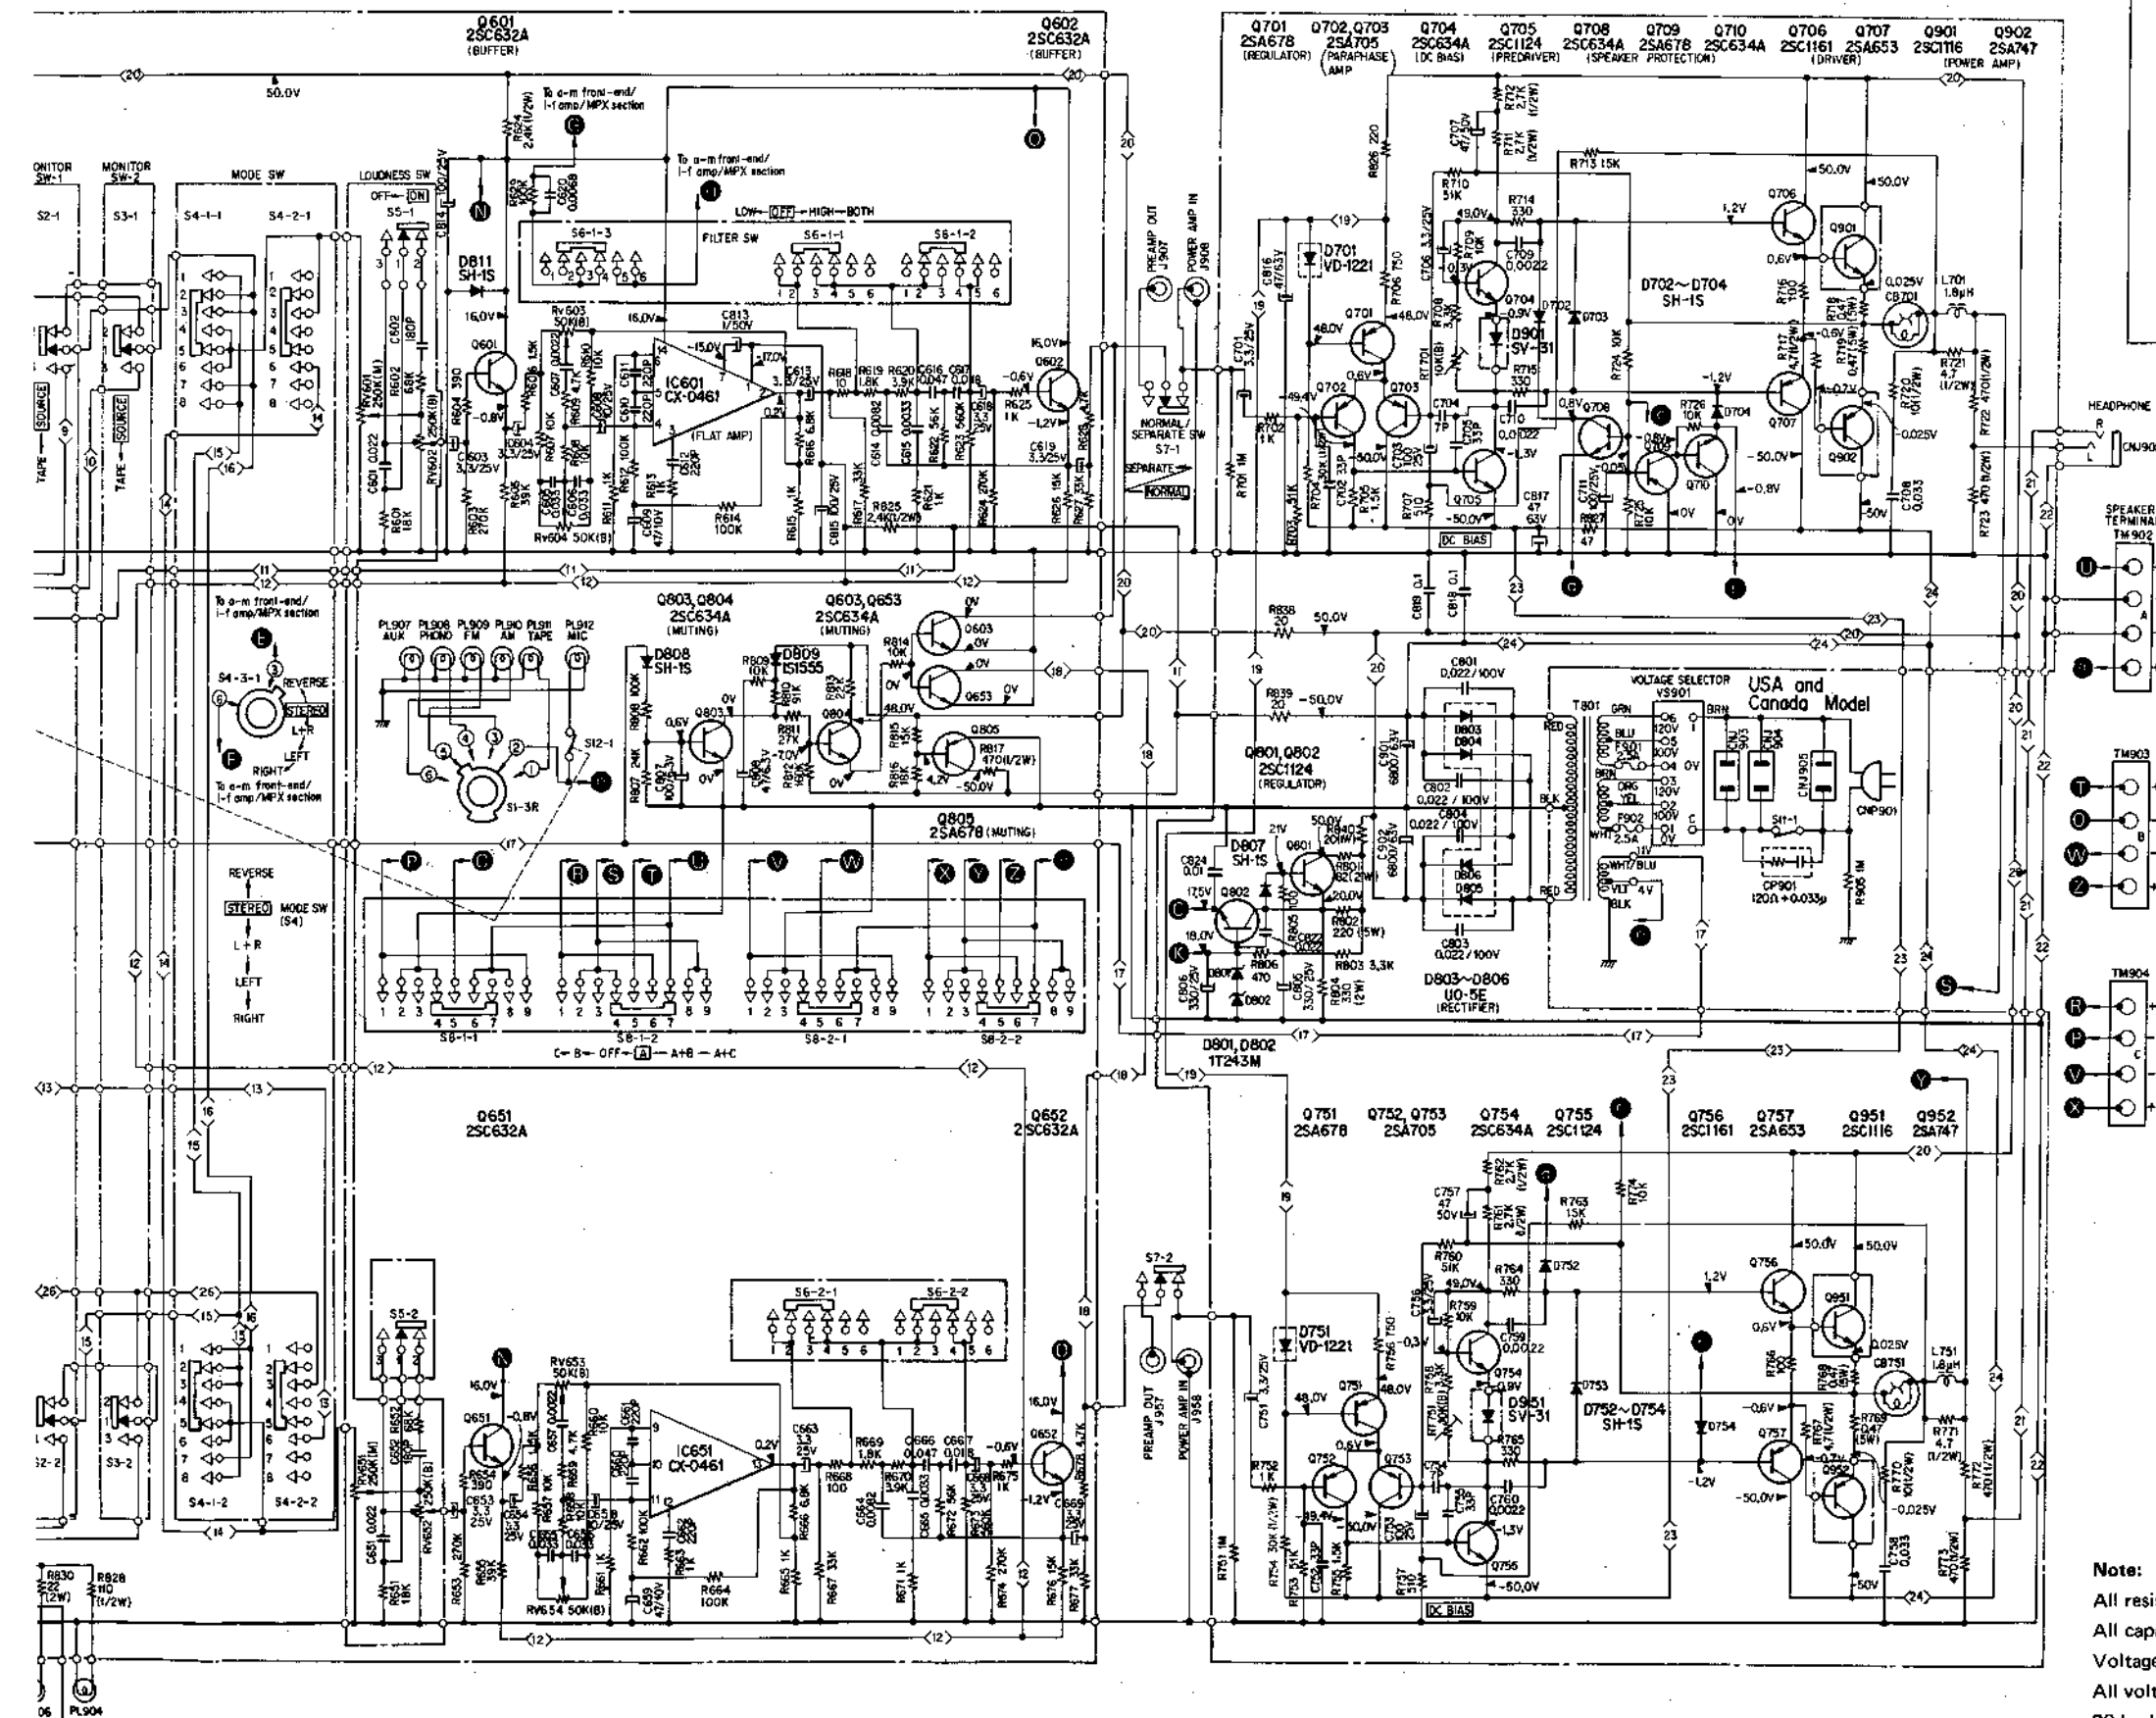

SECTION 6 EXPLODED VIEWS

(1)


Hardware Nomenclature	
P - Pan Head Screw	W - Washer
PS - Pan Head Screw with Spring Washer	SW - Spring Washer
K - Flat Countersunk Head Screw	LW - Lock Washer
B - Binding Head Screw	N - Nut
SC - Set Screw	
E - Retaining Ring (E Washer)	

Example

Type of Slot
P 3x10
Length in mm (L)
Diameter in mm (D)
Type of Head




Note:

USA Model Serial No. 807,001 and later
Canada Model Serial No. 700,001 and later
GEP Model Serial No. 400,001 and later

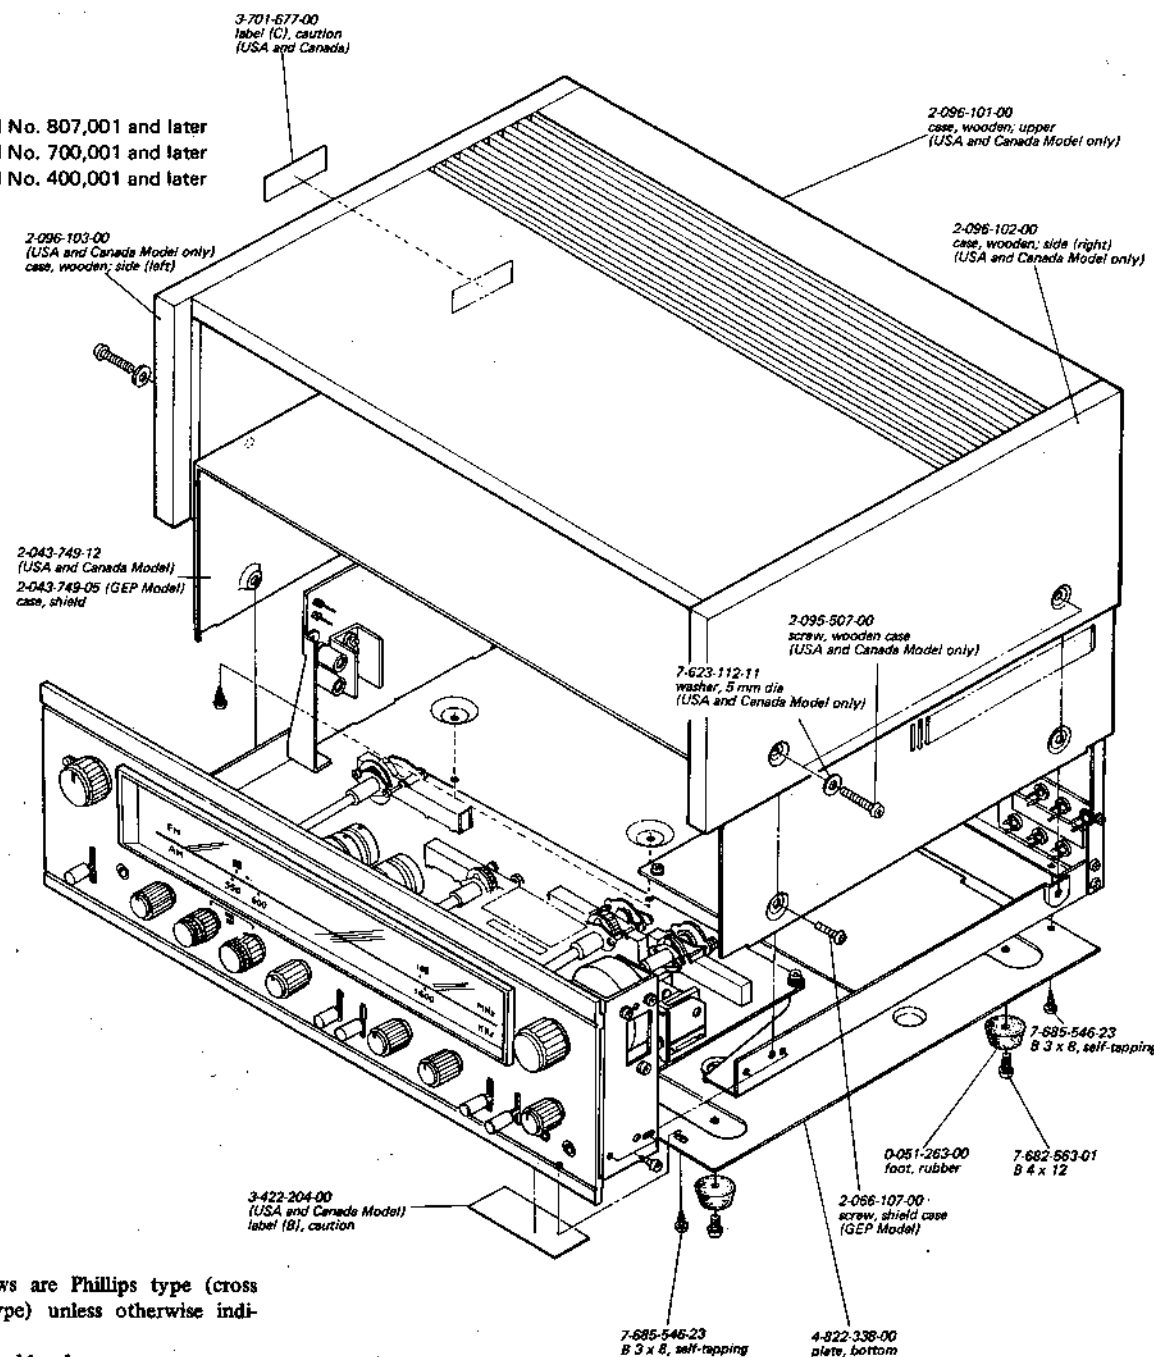

Note: All screws are Phillips type (cross recess type) unless otherwise indicated.
(-): slotted head

(2)

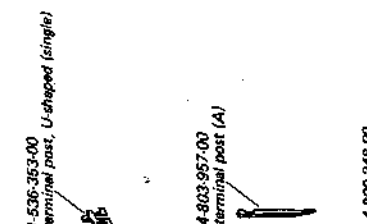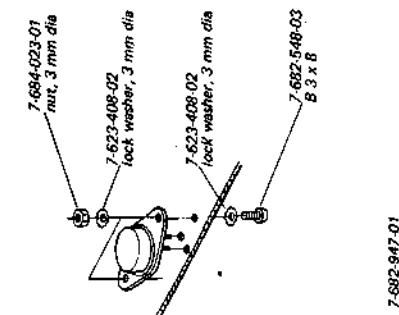


SECTION 6

EXPLODED VIEWS

{1}

P - Pan Head Screw		W - Washer	
PS - Pan Head Screw with Spring Washer		SW - Spring Washer	
K - Flat Countersunk Head Screw		LW - Lock Washer	
B - Binding Head Screw		N - Nut	
SC - Set Screw			
E - Retaining Ring (E Washer)			

Example -



- Serial No. 807,001 and later
- Serial No. 700,001 and later
- Serial No. 400,001 and later


Exploded view diagram of the GE Model 5000 receiver chassis and cabinet assembly. The diagram shows the internal chassis components, including the front panel with various knobs and switches, and the external wooden cabinet with its top, sides, and front. Numerous screws, washers, and feet are shown in their respective positions. Labels with part numbers and descriptions are provided for many of the components.

Labels and part numbers shown in the diagram:

- 3-701-677-00 label (C), caution (USA and Canada)
- No. 807,001 and later
- No. 700,001 and later
- No. 400,001 and later
- 2-096-103-00 case, wooden; side (left) (USA and Canada Model only)
- 2-096-101-00 case, wooden; upper (USA and Canada Model only)
- 2-096-102-00 case, wooden; side (right) (USA and Canada Model only)
- 2-043-749-12 (USA and Canada Model)
- 2-043-749-05 (GEP Model) case, shield
- 2-095-507-00 screw, wooden case (USA and Canada Model only)
- 7-623-112-11 washer, 5 mm dia (USA and Canada Model only)
- 7-685-546-23 8 3 x 8, self-tapping
- 0-061-263-00 foot, rubber
- 7-682-563-01 8 4 x 12
- 2-096-107-00 screw, shield case (GEP Model)
- 4-822-338-00 plate, bottom
- 7-685-546-23 8 3 x 8, self-tapping
- 3-422-204-00 (USA and Canada Model) label (B), caution

1 screws are Phillips type (cross
type) unless otherwise indi-
ted.
); slotted head

(2)

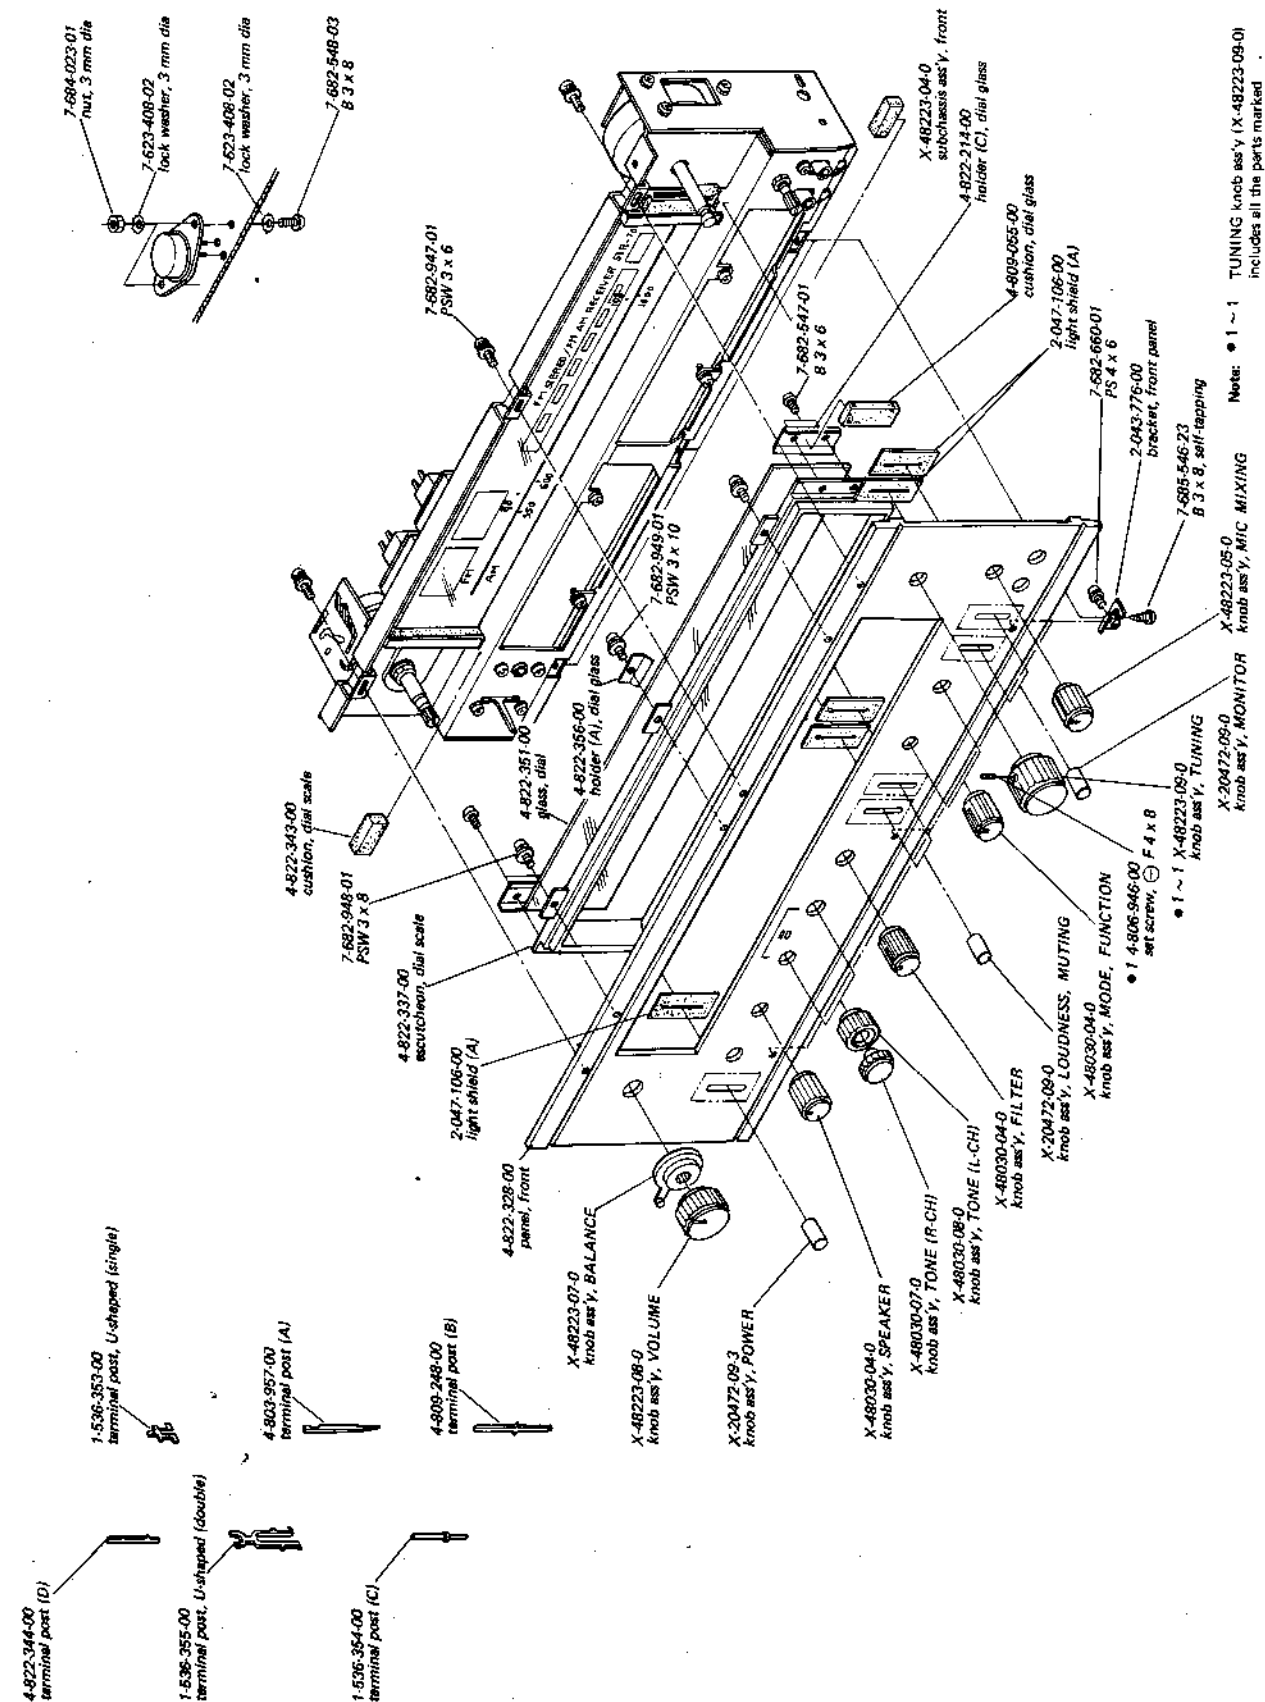

TUNING knob ass'y (X.4B223-09-0)


Notes: 1 ~ 1

MIXING

X-48223-05-0
knob ass'y, M


72-09-0
SS'Y, MONITOR

X-28
known





(5)

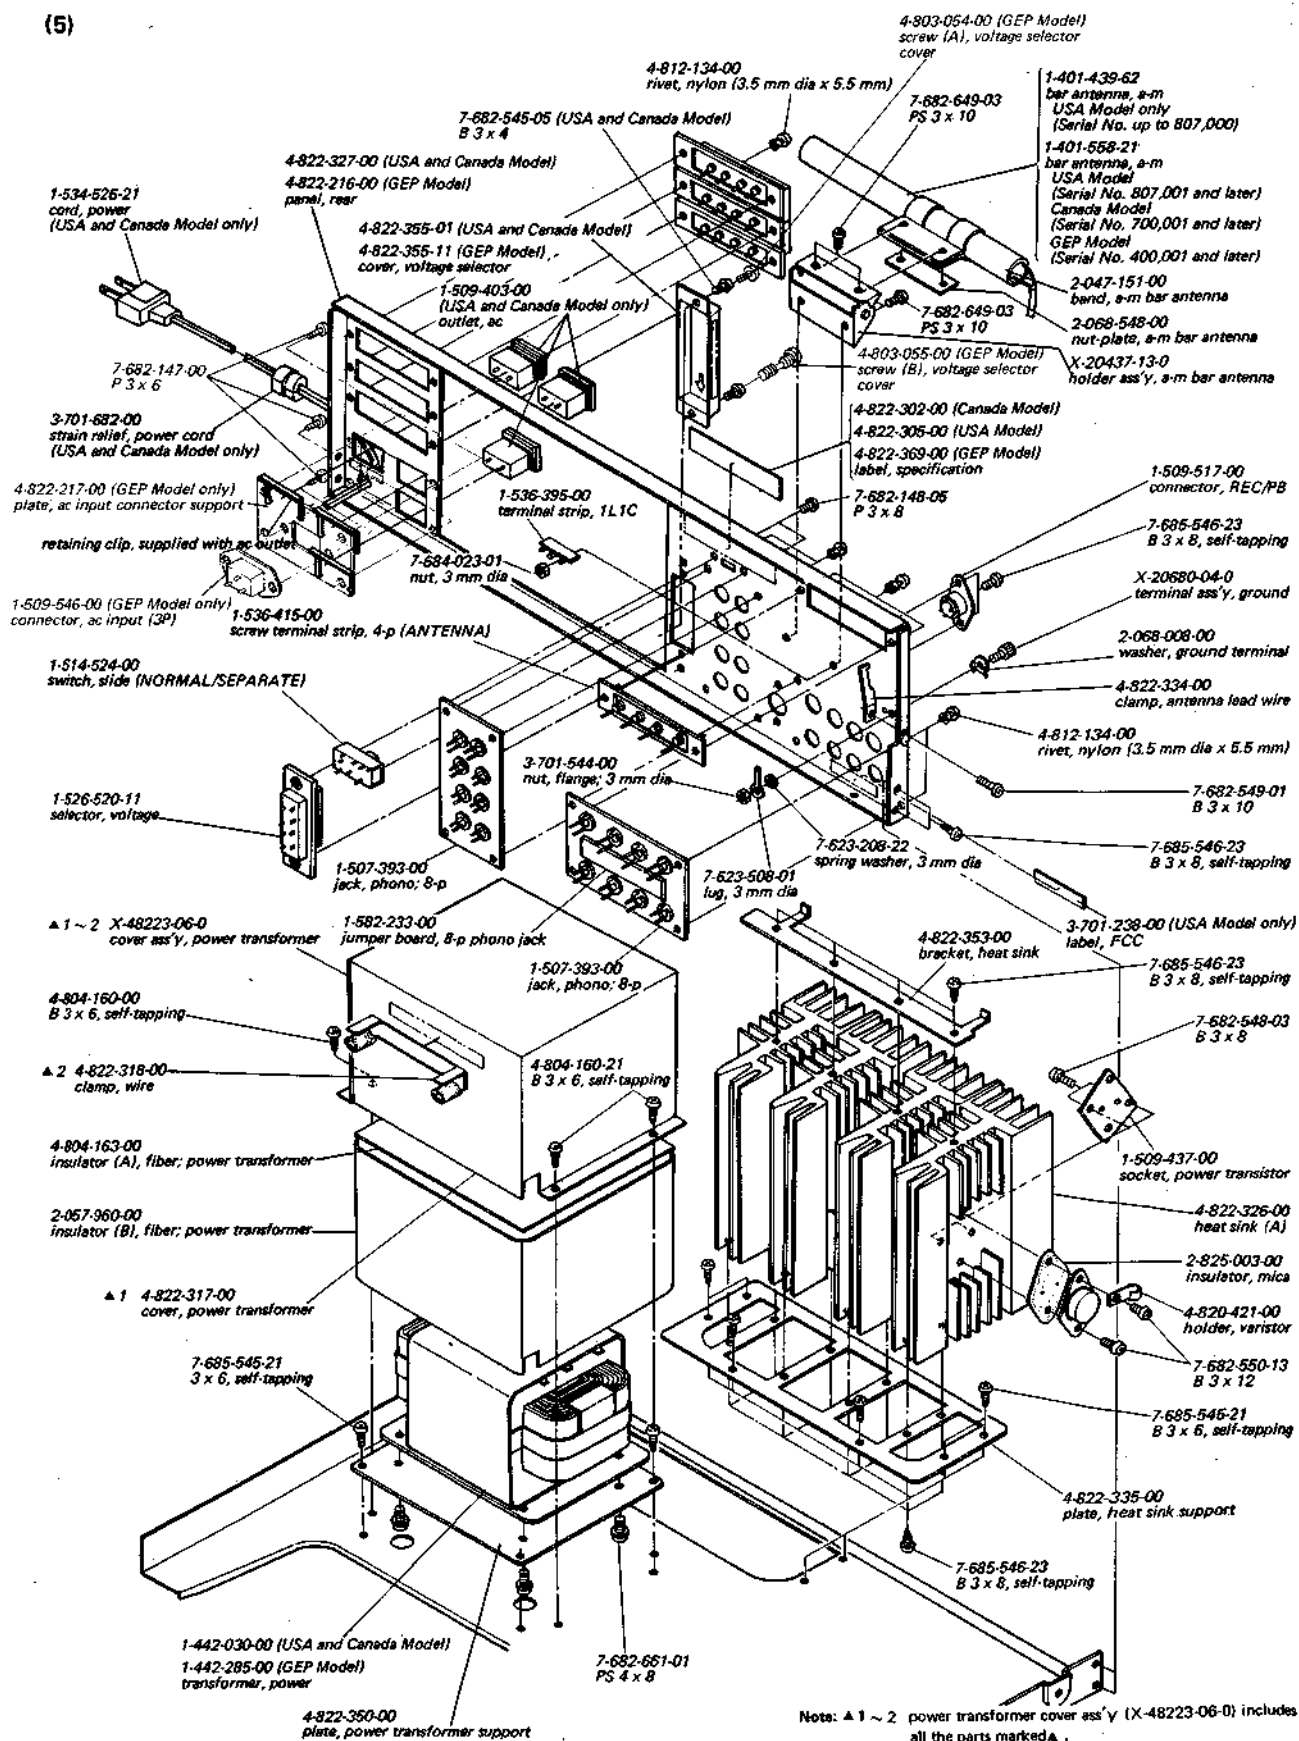

SECTION 7

ELECTRICAL PARTS LIST

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>
COMPLETE CIRCUIT BOARDS					
	8-982-709-11	fm front-end (FAT-022BWG)	Q801		transistor 2SC1124
	8-982-709-27	a-m front-end/i-f amp/MPX USA Model only (Serial No. up to 807,000)	Q802		transistor 2SC1124
	X-4822-324-0	a-m front-end/i-f amp/MPX USA Model (Serial No. 807,001 and later) Canada Model (Serial No. 700,001 and later) GEP Model (Serial No. 400,001 and later)	Q803		transistor 2SC634A
			Q804		transistor 2SC634A
			Q805		transistor 2SA678
			Q806		transistor 2SC634A
			Q807		transistor 2SC634A
	8-982-709-12	control (CCB-115)	(Q901(Q951)		transistor 2SC1079
	X-4822-321-0	loudness control	(Q902(Q952)		transistor 2SA679 (USA Model Serial No. up to 805,000)
	X-4822-322-0	MIC amp	(Q901(Q951)		transistor 2SC1116
	X-4822-325-0	power amp/power supply	(Q902(Q952)		transistor 2SA747 (USA Model 805,001 and later, Canada Model 700,001 and later, GEP Model 400,001 and later)
	X-4822-323-0	REC/PB connector			
SEMICONDUCTORS			IC201	IC	CX-0412
Q101	FET	2SK42	IC301	IC	CX-0431
Q102	FET	2SK23A	IC401	IC	CX-0451
Q103	transistor	2SC403C	IC501	IC	CX-0461
Q104	transistor	2SC710	IC601	IC	CX-0461
Q201	transistor	2SC403C	D101	diode	1S351M
Q202	transistor	2SC403C	D102	diode	1T243M
Q203	transistor	2SC403C	D201	diode	1T22A
Q204	FET	2SK23A	D202	diode	1T22A
Q205	transistor	2SC633A	D203	diode	1S1555
Q206	transistor	2SC633A	D204	diode	1T22A
Q207	FET	2SK23A	D205	diode	1T22A
Q301	transistor	2SC631A	D206	diode	1S1555
Q302	transistor	2SC631A	D207	diode	1T22A
Q303	transistor	2SC633A	D208	diode	1T22A
Q304	transistor	2SC633A	D701(D751)	diode	VD-1221
Q501(Q551)	transistor	2SA705	D702(D752)	diode	SH-1S
Q502(Q552)	transistor	2SC632A	D703(D753)	diode	SH-1S
Q601(Q651)	transistor	2SC632A	D704(D754)	diode	SH-1S
Q602(Q652)	transistor	2SC632A	D801	diode	1T243M
Q603(Q653)	transistor	2SC634A	D802	diode	1T243M
Q701(Q751)	transistor	2SA678	D803	diode	UO-5E
Q702(Q752)	transistor	2SA705	D804	diode	UO-5E
Q703(Q753)	transistor	2SA705	D805	diode	UO-5E
Q704(Q754)	transistor	2SC634A	D806	diode	UO-5E
Q705(Q755)	transistor	2SC1124	D807	diode	SH-1S
Q706(Q756)	transistor	2SC1161	D808	diode	SH-1S
Q707(Q757)	transistor	2SA653	D809	diode	1S1555
* Q708	transistor	2SC634A	D810	diode	SH-1S
* Q709	transistor	2SA678	D811	diode	SH-1S
* Q710	transistor	2SC634A	D901(D951)	diode	SV-31

* For USA Model with Serial No. up to 808,100, Q708, Q709, and Q710 correspond to Q709, Q710, and Q711, respectively.

Note: USA Model Serial No. 807,001 and later
Canada Model Serial No. 700,001 and later
GEP Model Serial No. 400,001 and later

Ref. No. Part No. Description

TRANSFORMERS, COILS & INDUCTORS

B1	1-417-014-21	balun
CFT401	1-403-150-00	CFT
IFT101	1-403-295-12	IFT, fm 10.7 MHz
L101	1-401-489-00	coil, fm antenna
L102	1-425-446-12	coil, fm rf 1
L103	1-425-668-00	coil, fm rf 2
L104	1-405-377-00	coil, fm osc
L105	1-407-184-00	inductor, micro 3.3 μ H
L106	1-407-184-00	inductor, micro 3.3 μ H
L201	1-407-418-00	coil, trap; SCA
L202	1-407-163-00	inductor, micro 33 μ H
L203	1-407-169-00	inductor, micro 100 μ H
L401	1-407-169-00	inductor, micro 100 μ H
L402	1-407-169-00	inductor, micro 100 μ H
L701(L751)	1-407-592-00	inductor, micro 1.8 μ H
L901	1-401-439-62	bar antenna, a-m USA Model only (Serial No. up to 807,000)
L901(L902)	1-401-558-21	bar antenna, a-m USA Model (Serial No. 807,001 and later) Canada Model (Serial No. 700,001 and later) GEP Model (Serial No. 400,001 and later)
MU301	1-464-009-00	MPX unit
T201	1-403-291-00	transformer, discriminator 10.7 MHz
T202	1-403-299-00	transformer, muting
T301	1-425-729-00	transformer, switching 38 kHz
T401	1-405-459-00	coil, a-m osc
T402	1-403-128-00	IFT, a-m
T801	1-442-030-00	transformer, power (USA and Canada Model)
	1-442-285-00	transformer, power (GEP Model)

CAPACITORS

All capacitance values are in μ F except as indicated with p, which means pF.

C101	1-102-880-11	15 p	± 0.5 pF	50 V	ceramic
C102		-----			
C103	1-102-880-11	15 p	± 0.5 pF	50 V	ceramic
C104	1-102-064-11	0.75 p	± 10 %	50 V	ceramic
C105	1-102-880-11	15 p	± 0.5 pF	50 V	ceramic
C106	1-102-848-11	180 p	± 0.5 pF	50 V	ceramic
C107	1-101-923-11	0.01	± 80 %	25 V	ceramic
C108	1-101-923-11	0.01	± 80 %	25 V	ceramic
C109	1-101-923-11	0.01	± 80 %	25 V	ceramic
C110	1-101-918-11	0.001	± 80 %	25 V	ceramic
C111	1-101-924-11	0.022	± 80 %	25 V	ceramic
C112	1-101-924-11	0.022	± 80 %	25 V	ceramic
C113	1-101-924-11	0.022	± 80 %	25 V	ceramic
C114	1-101-923-11	0.01	± 80 %	25 V	ceramic
C115	1-102-875-11	7 p	± 5 %	50 V	ceramic

Ref. No. Part No. Description

C116	1-102-875-11	7 p	± 5 %	50 V	ceramic
C117	1-102-986-11	10 p	± 0.5 pF	50 V	ceramic
C118	1-102-114-11	470 p	± 10 %	50 V	ceramic
C119	1-101-118-11	0.01	± 20 %	50 V	ceramic
C120	1-102-986-11	10 p	± 0.5 pF	50 V	ceramic
C121	1-101-924-11	0.022	± 80 %	25 V	ceramic
C122	1-105-679-12	0.033	± 10 %	50 V	mylar
C123	1-121-391-11	1		50 V	electrolytic
C124	1-101-924-11	0.022	± 80 %	25 V	ceramic
C125	1-101-118-11	0.01	± 20 %	50 V	ceramic
C126	1-101-118-11	0.01	± 20 %	50 V	ceramic
C127	1-102-986-11	10 p	± 0.5 pF	50 V	ceramic
C128	1-101-924-11	0.022	± 80 %	25 V	ceramic
C201	1-101-118-11	0.01	± 20 %	50 V	ceramic
C202	1-101-923-11	0.01	± 80 %	25 V	ceramic
C203	1-102-100-11	0.0022	± 5 %	50 V	ceramic
C204	1-101-923-11	0.01	± 80 %	25 V	ceramic
C205	1-101-118-11	0.01	± 20 %	50 V	ceramic
C206	1-101-923-11	0.01	± 80 %	25 V	ceramic
C207	1-101-923-11	0.01	± 80 %	25 V	ceramic
C208	1-101-918-11	0.001	± 80 %	25 V	ceramic
C209	1-102-977-11	200 p	± 5 %	50 V	ceramic
C210	1-101-924-11	0.022	± 80 %	25 V	ceramic
C211	1-102-100-11	0.0022	± 5 %	50 V	ceramic
C212	1-121-651-11	10		16 V	electrolytic
C213	1-101-118-11	0.01	± 20 %	50 V	ceramic
C214	1-121-651-11	10		16 V	electrolytic
C215	1-105-677-12	0.022	± 10 %	50 V	mylar
C216	1-105-689-12	0.22	± 10 %	50 V	mylar
C217	1-123-068-11	220		16 V	electrolytic
C218	1-102-977-11	200 p	± 5 %	50 V	ceramic
C219	1-121-413-11	100		6.3 V	electrolytic
C220	1-121-651-11	10		16 V	electrolytic
C221	1-107-140-11	240 p	± 10 %	50 V	silvered mica
C222	1-102-824-11	470 p	± 5 %	50 V	ceramic
C223	1-131-196-11	2.2		16 V	tantalum
C224	1-102-960-11	24 p	± 5 %	50 V	ceramic
C225	1-101-922-11	0.0047	± 80 %	25 V	ceramic
C226	1-101-923-11	0.01	± 80 %	25 V	ceramic
C227	1-105-683-12	0.068	± 10 %	50 V	mylar
C228	1-121-391-11	1		50 V	electrolytic
C229	1-121-395-11	4.7		25 V	electrolytic
C230	1-121-651-11	10		16 V	electrolytic
C231	1-127-022-11	0.47	± 10 %	10 V	solid aluminum
C232	1-102-960-11	24 p	± 5 %	50 V	ceramic
C233	1-101-924-11	0.022	± 80 %	25 V	ceramic
C234	1-101-924-11	0.022	± 80 %	25 V	ceramic
C235	1-101-118-11	0.01	± 20 %	50 V	ceramic
C236	1-121-413-11	100		6.3 V	electrolytic
C237	1-101-923-11	0.01	± 80 %	25 V	ceramic
C301	1-121-402-11	33		10 V	electrolytic
C302	1-121-352-11	47		10 V	electrolytic

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>		<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	
C303	1-121-413-11	100	6.3 V electrolytic	C512(C562)	1-123-044-11	33	25 V electrolytic
C304	1-127-022-11	0.47	10 V solid aluminum	C513(C563)	1-121-913-11	3.3	25 V electrolytic
C305	1-103-575-11	4.700 p ± 5 %	50 V styrol	C514(C564)	1-121-416-11	100	25 V electrolytic
C306	1-105-661-12	0.001 ± 10 %	50 V mylar	C515(C565)	1-105-685-12	0.1 ± 10 %	50 V mylar
C307	1-123-068-11	220	16 V electrolytic	C516(C566)	1-121-398-11	10	25 V electrolytic
C321(C371)	1-106-013-12	0.0033 ± 5 %	50 V mylar	C601(C651)	1-105-677-12	0.022 ± 10 %	50 V mylar
C322(C372)	1-121-912-11	1	50 V electrolytic	C602(C652)	1-102-982-11	180 p ± 10 %	50 V ceramic
C323(C373)	1-121-912-11	1	50 V electrolytic	C603(C653)	1-131-206-11	3.3	25 V tantalum
C324(C374)	1-105-661-12	0.001 ± 10 %	50 V mylar	C604(C654)	1-121-392-11	3.3	25 V electrolytic
C325(C375)	1-102-973-11	100 p ± 5 %	50 V ceramic	C605(C655)	1-105-679-12	0.033 ± 10 %	50 V mylar
C326(C376)	1-121-352-11	47	10 V electrolytic	C606(C656)	1-105-679-12	0.033 ± 10 %	50 V mylar
C327(C377)	1-121-392-11	3.3	25 V electrolytic	C607(C657)	1-105-665-12	0.0022 ± 10 %	50 V mylar
C401	1-105-673-12	0.01 ± 10 %	50 V mylar	C608(C658)	1-121-398-11	10	25 V electrolytic
C402		-----		C609(C659)	1-121-352-11	47	10 V electrolytic
C403	1-102-953-11	18 p ± 25 %	25 V ceramic	C610(C660)	1-102-978-11	220 p ± 5 %	50 V ceramic
C404		-----		C611(C661)	1-102-978-11	220 p ± 5 %	50 V ceramic
C405	1-121-409-11	47	16 V electrolytic	C612(C662)	1-102-978-11	220 p ± 5 %	50 V ceramic
C406	1-105-677-12	0.022 ± 10 %	50 V mylar	C613(C663)	1-121-392-11	3.3	25 V electrolytic
C407	1-103-815-11	390 p ± 5 %	25 V styrol	C614(C664)	1-106-023-12	0.0082 ± 5 %	50 V mylar
C408	1-101-923-11	0.01 $\pm \frac{80}{20} \%$	25 V ceramic	C615(C665)	1-106-013-12	0.0033 ± 5 %	50 V mylar
C409	1-101-923-11	0.01 $\pm \frac{80}{20} \%$	25 V ceramic	C616(C666)	1-106-041-12	0.047 ± 5 %	50 V mylar
C410	1-105-677-12	0.022 ± 10 %	50 V mylar	C617(C667)	1-106-031-12	0.018 ± 5 %	50 V mylar
C411	1-105-669-12	0.0047 ± 10 %	50 V mylar	C618(C668)	1-121-392-11	3.3	25 V electrolytic
C412	1-101-923-11	0.01 $\pm \frac{80}{20} \%$	25 V ceramic	C619(C669)	1-121-392-11	3.3	25 V electrolytic
C413	1-105-677-12	0.022 ± 10 %	50 V mylar	C620	1-105-671-12	0.0068 ± 10 %	50 V mylar
C414		-----		C701(C751)	1-121-392-11	3.3	25 V electrolytic
C415	1-102-977-11	200 p ± 5 %	25 V ceramic	C702(C752)	1-102-963-11	33 p ± 5 %	50 V ceramic
C416	1-102-936-11	3 p ± 0.25 pF	25 V ceramic	C703(C753)	1-121-935-11	100	25 V electrolytic
C417	1-121-651-11	10	16 V electrolytic	C704(C754)	1-102-944-11	7 p ± 5 %	50 V ceramic
C418	1-121-395-11	4.7	25 V electrolytic	C705(C755)	1-102-963-11	33 p ± 5 %	50 V ceramic
C419	1-121-398-11	10	25 V electrolytic	C706(C756)	1-121-392-11	3.3	25 V electrolytic
C420	1-101-923-11	0.01 $\pm \frac{80}{20} \%$	25 V ceramic	C707(C757)	1-123-058-11	47	50 V electrolytic
C421	1-105-672-12	0.0082 ± 10 %	50 V mylar	C708(C758)	1-105-679-12	0.033 ± 10 %	50 V mylar
C422	1-105-672-12	0.0082 ± 10 %	50 V mylar	C709(C759)	1-105-665-12	0.0022 ± 10 %	50 V mylar
C423	1-105-672-12	0.0082 ± 10 %	50 V mylar	C710(C760)	1-105-665-12	0.0022 ± 10 %	50 V mylar
C424	1-101-924-11	0.022 $\pm \frac{80}{20} \%$	25 V ceramic	C711	1-121-935-11	100	25 V electrolytic
C425	1-121-651-11	10	16 V electrolytic				
C426	1-101-924-11	0.022 $\pm \frac{80}{20} \%$	25 V ceramic	C801	1-105-917-12	0.022 ± 10 %	200 V mylar
C427	1-105-682-12	0.056 ± 10 %	50 V mylar	C802	1-105-917-12	0.022 ± 10 %	200 V mylar
C428	1-101-923-11	0.01 $\pm \frac{80}{20} \%$	25 V ceramic	C803	1-105-917-12	0.022 ± 10 %	200 V mylar
C501(C551)	1-131-206-11	3.3	25 V tantalum	C804	1-105-917-12	0.022 ± 10 %	200 V mylar
C502(C552)	1-121-926-11	33	10 V electrolytic	C805	1-123-065-11	330	25 V electrolytic
C503(C553)	1-102-978-11	220 p ± 5 %	50 V ceramic	C806	1-123-065-11	330	25 V electrolytic
C504(C554)		-----		C807	1-121-413-11	100	6.3 V electrolytic
C505(C555)	1-101-880-11	47 p ± 5 %	50 V ceramic	C808	1-123-090-11	47	63 V electrolytic
C506(C556)	1-106-005-12	0.0015 ± 5 %	50 V mylar	C809	1-121-392-11	3.3	25 V electrolytic
C507(C557)	1-106-019-12	0.0056 ± 5 %	50 V mylar	C810	1-121-726-11	0.47	50 V electrolytic
C508(C558)	1-121-911-11	0.47	50 V electrolytic	C811	1-121-936-11	220	25 V electrolytic
C509(C559)	1-105-661-12	0.001 ± 10 %	50 V mylar	C812	1-121-936-11	220	25 V electrolytic
C510(C560)	1-131-206-11	3.3	25 V tantalum	C813	1-121-391-11	1	50 V electrolytic
C511(C561)	1-105-661-12	0.001 ± 10 %	50 V mylar	C814	1-121-935-11	100	25 V electrolytic

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>
C815	1-121-935-11	100 25 V electrolytic	R216	1-242-669-11	680
C816	1-123-090-11	47 63 V electrolytic	R217	1-242-663-11	390
C817	1-123-090-11	47 63 V electrolytic	R218	1-242-661-11	330
C818	1-105-725-12	0.1 $\pm 10\%$ 100 V mylar	R219	1-242-669-11	680
C819	1-105-725-12	0.1 $\pm 10\%$ 100 V mylar	R220	1-242-663-11	390
C820	1-121-410-11	47 25 V electrolytic	R221	1-244-649-11	100
C821	1-121-936-11	220 25 V electrolytic	R222	1-242-675-11	1.2 k
C822	1-105-677-12	0.022 $\pm 10\%$ 50 V mylar	R223	1-242-697-11	10 k
C823	1-121-392-11	3.3 25 V electrolytic	R224	1-242-641-11	47
C824	1-105-673-12	0.01 $\pm 10\%$ 50 V mylar	R225	1-242-641-11	47
C901	1-123-089-11	6800 63 V electrolytic	R226	1-242-721-11	100 k
C902	1-123-089-11	6800 63 V electrolytic	R227	1-242-745-11	1 M
CT401,402	1-141-095-11	capacitor, trimmer	R228	1-242-745-11	1 M
CV101,102	1-151-232-12	capacitor, tuning	R229	1-242-721-11	100 k
CV103,104			R230	1-244-649-11	100
CV105,106			R231	1-242-673-11	1 k

RESISTORS

All resistance values are in Ω , $\pm 5\%$, $\frac{1}{4}$ W and carbon type unless otherwise indicated.

R104	1-244-665-11	470	R232	1-242-706-11	24 k
R105	1-242-689-11	4.7 k	R233	1-242-655-11	180
R106	1-242-696-11	9.1 k	R234	1-242-713-11	47 k
R107	1-242-666-11	510	R235	1-244-673-11	1 k
R108	1-242-673-11	1 k	R236	1-242-657-11	220
R109	1-242-642-11	51	R237	1-242-705-11	22 k
R110	1-242-697-11	10 k	R238	1-242-703-11	18 k
R111	1-244-692-11	6.2 k	R239	1-242-649-11	100
R112	1-242-666-11	510	R240	1-242-689-11	4.7 k
R113	1-242-677-11	1.5 k	R241	1-242-632-11	20
R114	1-242-685-11	3.3 k	R242	1-242-701-11	15 k
R115	1-242-677-11	1.5 k	R243	1-242-699-11	12 k
R116	1-242-721-11	100 k	R244	1-242-632-11	20
R117	1-244-697-11	10 k	R245	1-242-701-11	15 k
R118	1-244-675-11	1.2 k	R246	1-242-699-11	12 k
R119	1-244-708-11	30 k	R247	1-242-685-11	3.3 k
R201	1-244-655-11	180	R248	1-244-731-11	270 k
R202	1-242-661-11	330	R249	1-242-714-11	51 k
R203	1-242-671-11	820	R250	1-242-745-11	1 M
R204	1-242-693-11	6.8 k	R251	1-242-735-11	390 k
R205	1-242-663-11	390	R252	1-242-723-11	120 k
R206	1-242-680-11	2 k	R253	1-242-711-11	39 k
R207	1-244-649-11	100	R254	1-242-721-11	100 k
R208	1-242-673-11	1 k	R255	1-242-745-11	1 M
R209	1-242-687-11	3.9 k	R256	1-242-673-11	1 k
R210	1-242-673-11	1 k	R257	1-242-677-11	1.5 k
R211	1-242-649-11	100	R301	1-242-669-11	680
R212	1-244-649-11	100	R302	1-242-701-11	15 k
R213	1-242-691-11	5.6 k	R303	1-242-684-11	3 k
R214	1-242-661-11	330	R304	1-242-684-11	3 k
R215	1-242-684-11	3 k	R305	1-242-681-11	2.2 k
			R306	1-202-559-11	270 $\frac{1}{2}$ W composition
			R321(R371)	1-242-709-11	33 k
			R322(R372)	1-242-693-11	6.8 k
			R323(R373)	1-242-693-11	6.8 k

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>
-----------------	-----------------	--------------------

R324(R374)	1-242-713-11	47 k
R325(R375)	1-242-724-11	130 k
R326(R376)	1-242-665-11	470
R327(R377)	1-242-693-11	6.8 k
R328(R378)	1-242-681-11	2.2 k
R329(R379)	1-242-663-11	390
R330(R380)	1-242-709-11	33 k
R331(R381)	1-242-681-11	2.2 k

R401	1-242-697-11	10 k
R402	1-242-690-11	5.1 k
R403	1-244-673-11	1 k
R404	1-242-649-11	100
R405	1-242-716-11	62 k
R406	1-242-682-11	2.4 k
R407	1-242-671-11	820
R408	1-242-697-11	10 k
R409	1-242-673-11	1 k
R410	1-242-656-11	200
R411	1-242-709-11	33 k
R412	1-242-687-11	3.9 k
R413	1-242-693-11	6.8 k
R414	1-242-672-11	910
R415	1-242-641-11	47
R416	1-242-672-11	910
R417	1-242-689-11	4.7 k
R418	1-242-673-11	1 k
R419	1-242-713-11	47 k
R420	1-244-643-11	56

R501(R551)	1-242-715-11	56 k
R502(R552)	1-242-737-11	470 k
R503(R553)	1-242-670-11	750
R504(R554)	1-242-673-11	1 k
R505(R555)	1-242-683-11	2.7 k
R506(R556)	1-242-713-11	47 k
R507(R557)	1-242-741-11	680 k
R508(R558)	1-242-721-11	100 k
R509(R559)	1-242-685-11	3.3 k
R510(R560)	1-242-721-11	100 k
R511(R561)	1-242-721-11	100 k
R512(R562)	1-242-673-11	1 k
R513(R563)	1-242-721-11	100 k
R514(R564)	1-242-718-11	75 k
R515(R565)	1-242-705-11	22 k
R516(R566)	1-242-713-11	47 k
R517(R567)	1-242-671-11	820
R518(R568)	1-242-697-11	10 k
R519(R569)	1-242-657-11	220
R520(R570)	1-242-709-11	33 k
R521(R571)	1-242-685-11	3.3 k
R522(R572)	1-242-673-11	1 k
R523(R573)	1-242-698-11	12 k

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>
-----------------	-----------------	--------------------

R524(R574)	1-242-709-11	33 k
R525(R575)	1-242-697-11	10 k
R526(R576)	1-244-699-11	24 k

R601(R651)	1-244-703-11	18 k
R602(R652)	1-244-717-11	68 k
R603(R653)	1-242-731-11	270 k
R604(R654)	1-242-663-11	390
R605(R655)	1-242-711-11	39 k
R606(R656)	1-242-677-11	1.5 k
R607(R657)	1-242-697-11	10 k
R608(R658)	1-242-697-11	10 k
R609(R659)	1-242-689-11	4.7 k
R610(R660)	1-242-697-11	10 k
R611(R661)	1-242-673-11	1 k
R612(R662)	1-242-721-11	100 k
R613(R663)	1-242-673-11	1 k
R614(R664)	1-242-721-11	100 k
R615(R665)	1-242-673-11	1 k
R616(R666)	1-242-693-11	6.8 k
R617(R667)	1-242-709-11	33 k
R618(R668)	1-242-649-11	100
R619(R669)	1-242-679-11	1.8 k
R620(R670)	1-242-687-11	3.9 k
R621(R671)	1-242-673-11	1 k
R622(R672)	1-242-715-11	56 k
R623(R673)	1-242-739-11	560 k
R624(R674)	1-242-731-11	270 k
R625(R675)	1-242-673-11	1 k
R626(R676)	1-242-701-11	15 k
R627(R677)	1-242-709-11	33 k
R628(R678)	1-242-689-11	4.7 k
R629	1-242-721-11	100 k

R701(R751)	1-244-745-11	1 M
R702(R752)	1-244-673-11	1 k
R703(R753)	1-244-714-11	51 k
R704(R754)	1-244-908-11	30 k ½ W
R705(R755)	1-244-677-11	1.5 k
R706(R756)	1-244-670-11	750
R707(R757)	1-244-666-11	510
R708(R758)	1-244-685-11	3.3 k
R709(R759)	1-244-697-11	10 k
R710(R760)	1-244-714-11	51 k
R711(R761)	1-202-583-11	2.7 k ½ W composition
R712(R762)	1-202-583-11	2.7 k ½ W composition
R713(R763)	1-244-701-11	15 k
R714(R764)	1-244-661-11	330
R715(R765)	1-244-661-11	330
R716(R766)	1-244-649-11	100
R717(R767)	1-202-517-11	4.7 ½ W composition
R718(R768)	1-217-158-11	0.47 5 W metal
R719(R769)	1-217-158-11	0.47 5 W metal

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	
R720(R770)	1-202-525-11	10	½ W composition
R721(R771)	1-202-517-11	4.7	½ W composition
R722(R772)	1-202-565-11	470	½ W composition
R723(R773)	1-202-565-11	470	½ W composition
R724(R774)	1-244-697-11	10 k	
R725	1-244-697-11	10 k	
R726	1-244-697-11	10 k	
R801	1-207-635-11	82	2 W wirewound
R802	1-207-688-11	220	5 W wirewound
R803	1-244-685-11	3.3 k	
R804	1-207-639-11	330	2 W wirewound
R805	1-244-649-11	100	
R806	1-244-665-11	470	
R807	1-242-706-11	24 k	
R808	1-242-721-11	100 k	
R809	1-242-697-11	10 k	
R810	1-242-720-11	91 k	
R811	1-242-707-11	27 k	
R812	1-242-726-11	160 k	
R813	1-242-705-11	22 k	
R814	1-242-697-11	10 k	
R815	1-242-701-11	15 k	
R816	1-242-703-11	18 k	
R817	1-202-565-11	470	½ W composition
R818	1-242-697-11	10 k	
		USA Model only (Serial No. up to 808,100)	
	1-242-671-11	820	
		USA Model (Serial No. 808,101 and later)	
		Canada Model (Serial No. 700,001 and later)	
		GEP Model (Serial No. 400,001 and later)	
R819	1-242-671-11	820	
R820	1-242-705-11	22 k	
R821	1-202-587-11	3.9 k	½ W composition
R822	1-202-577-11	1.5 k	½ W composition
R823	1-202-577-11	1.5 k	½ W composition
R824	1-202-582-11	2.4 k	½ W composition
R825	1-202-582-11	2.4 k	½ W composition
R826	1-244-657-11	220	
R827	1-244-641-11	47	
R828	1-202-550-11	110	½ W composition
R829	1-207-630-11	22	2 W wirewound
R830	1-207-630-11	22	2 W wirewound
R831	1-207-929-11	2.7	5 W wirewound
R832	1-202-510-11	2.4 k	½ W composition
R833	1-202-510-11	2.4 k	½ W composition
R837	1-242-705-11	22 k	
		USA Model (Serial No. 808,101 and later)	
		Canada Model (Serial No. 700,001 and later)	
		GEP Model (Serial No. 400,001 and later)	
R838	1-244-632-11	20	± 5 % ¼ W carbon

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	
R839	1-244-632-11	20	± 5 % ¼ W carbon
R840	1-213-121-11	20	± 5 % 1 W fuse, metal-coated
R901(R951)	1-244-697-11	10 k	
R902(R952)	1-244-697-11	10 k	
R903(R953)	1-244-719-11	82 k	
R904(R954)	1-244-735-11	390 k	
R905	1-202-645-11	1 M	½ W composition (USA and Canada Model)
RT201	1-222-845-11	100 k (B), adjustable	
RT202	1-221-978-11	4.7 k (B), adjustable	
RT301	1-221-978-11	4.7 k (B), adjustable	
RT401	1-221-997-11	2.2 k (B), adjustable	
RT701 (RT751)	1-221-967-11	10 k (B), adjustable	
RV501 (RV551)	1-224-103-11	50 k (C), variable (MIC MIXING)	
RV601 (RV651)	1-224-102-11	250 k (B)/250 k (M), variable (VOLUME)	
RV602 (RV652)	1-224-102-11	250 k (B)/250 k (M), variable (BALANCE)	
RV603 (RV653)	1-224-101-11	50 k (B), variable (TREBLE)	
RV604 (RV654)	1-224-101-11	50 k (B), variable (BASS)	

SWITCHES

S1	1-516-199-00	rotary/slide (FUNCTION)
S2	1-516-036-00	lever (MONITOR 1)
S3	1-516-036-00	lever (MONITOR 2)
S4	1-516-196-00	rotary/slide (MODE)
S5	1-516-036-00	lever (LOUDNESS)
S6	1-516-197-00	rotary/slide (FILTER)*
S7	1-514-524-00	slide (NORMAL/SEPARATE)
S8	1-514-198-00	rotary/slide (SPEAKER)
S9	1-516-036-00	lever (MUTING)
S10	1-514-448-00	slide (DE-EMPHASIS)
S11	1-516-007-00	seesaw (POWER) (USA and Canada Model)
	1-516-315-00	seesaw (POWER) (GEP Model)
S12-1 ~ 3		MIC MIXING (built in RV501, 551)

FILTERS

CF201,202	1-527-507-12	fm i-f, ceramic 10.70 MHz (red)
	1-527-507-22	fm i-f, ceramic 10.66 MHz (black)
	1-527-507-32	fm i-f, ceramic 10.74 MHz (white)
	1-527-507-42	fm i-f, ceramic 10.62 MHz (green)
	1-527-507-52	fm i-f, ceramic 10.78 MHz (yellow)

Ref. No. Part No. Description

MISCELLANEOUS

CB701 (CB751)	1-515-194-00	breaker, circuit
CP201	1-231-193-00	encapsulated component
CP301,302	1-231-224-00	encapsulated component
CP901	1-231-057-12	encapsulated component, 0.033 μ F + 120 Ω
CNJ901	1-509-517-00	connector, REC/PB
CNJ902	1-507-265-00	jack, HEADPHONE
CNJ903,904 CNJ905 CNJ906 CNJ907	1-509-403-00	outlet, ac (USA and Canada Model only)
CNJ908	1-509-546-00	connector, ac input (3-p) (GEP Model only)
F901, 902	1-532-269-00	fuse, 2.5 A (USA and Canada Model)
F901, 902	1-532-252-00	fuse, 2.5 A (GEP Model)
J901 ~ 908 (J951~958)	1-507-393-00	jack, phono; 8-p
M901	1-520-140-00	meter, TUNING
M902	1-520-141-00	meter, TUNER INPUT
PL901,902	1-518-116-00	lamp, dial 11V/0.36 A

Ref. No. Part No. Description

PL903	1-518-124-00	lamp, TUNING 8 V/0.25 A
PL904	1-518-151-00	lamp, pointer
PL905	1-518-158-00	lamp, STEREO
PL906	1-518-124-00	lamp, TUNER INPUT meter 8 V/0.25 A
PL907 ~ PL912	1-518-121-00	lamp, AUX, PHONO, FM, A-M, TAPE, MIC 4.5 V/0.04 A
VS901	1-526-520-11	selector, voltage
	1-509-437-00	socket, power transistor
	1-517-057-00	holder, meter lamp; 2-p
	1-533-090-00	holder, dial lamp
	1-534-526-21	cord, power (USA and Canada Model only)
	1-535-055-00	lug terminal
	1-536-353-00	terminal post, U-shaped (single)
	1-536-354-00	terminal post (C)
	1-536-355-00	terminal post, U-shaped (double)
	1-536-395-00	terminal strip, 1L1C
	1-536-398-00	terminal strip, 2L2C
TM901 ~ TM904	1-536-415-00	screw terminal strip, 4-p (ANTENNA)
	1-582-233-00	jumper board, 8-p phono jack

SONY®**New Price**

Complete Spare Parts List

FM STEREO / FM-AM RECEIVER

Model **STR-7065**

GEP MODEL**IMPORTANT**

When ordering parts, be sure to furnish the following information:

1. Part Number
2. Model Number
3. Description as contained in this parts list

Due to our use of an electronic data processing system, your orders are processed by the PART NUMBER specified by you.

Please order carefully-wrong part numbers result in wrong parts.

NOTE: Prices are subject to change without notice.

COMPLETE SPARE PARTS LIST FOR STR-7065

GEP Model

FEBRUARY, 1974

<u>Part No.</u>	<u>Description</u>	<u>Unit Price</u>	
I. <u>MECHANICAL PARTS</u>			
X-20437-13-0	Holder Ass'y, a-m bar antenna -----	\$0.06	DMO.17
X-20437-54-0	Flywheel Ass'y -----	0.30	0.84
X-20472-09-0	Knob Ass'y, POWER; LOUDNESS; MUTING; MONITOR ----	0.15	0.42
X-20680-04-0	Terminal Ass'y, ground -----	0.06	0.17
X-48030-04-0	Knob Ass'y, SPEAKER; FILTER; MODE; FUNCTION ----	0.21	0.59
X-48030-07-0	Knob Ass'y, TONE (R-CH) -----	0.19	0.54
X-48030-08-0	Knob Ass'y, TONE (L-CH) -----	0.21	0.59
X-48090-07-0	Illuminator Ass'y, STEREO -----	0.13	0.37
X-48223-01-0	Chassis Ass'y -----	2.12	5.99
X-48223-02-0	Illuminator Ass'y, dial scale -----	0.77	2.17
X-48223-03-0	Bracket Ass'y, dial cord pulley -----	0.15	0.42
X-48223-04-0	Subchassis Ass'y, front -----	2.00	5.65
X-48223-05-0	Knob Ass'y, MIC MIXING -----	0.21	0.59
X-48223-06-0	Cover Ass'y, power transformer -----	0.97	2.73
X-48223-07-0	Knob Ass'y, BALANCE -----	0.15	0.42
X-48223-08-0	Knob Ass'y, VOLUME -----	0.24	0.68
X-48223-09-0	Knob Ass'y, TUNING -----	0.43	1.21
0-051-263-00	Foot, rubber -----	0.03	0.08
2-043-749-05	Case, shield -----	2.13	6.02
2-043-776-00	Bracket, front panel -----	0.03	0.08
2-047-106-00	Light Shield (A) -----	0.01	0.03
2-047-151-00	Band, a-m bar antenna -----	0.01	0.03
2-056-635-00	Bracket (B), tuning capacitor -----	0.11	0.31
2-056-643-00	Cushion, tuning capacitor -----	0.02	0.06
2-056-655-00	Label, DE-EMPHASIS -----	0.01	0.03
2-056-666-00	Clamp, lead wire; 8 mm dia -----	0.01	0.03
2-057-730-00	Pulley, dial cord -----	0.03	0.08
2-057-960-00	Insulator (B), fiber; power transformer -----	0.19	0.54
2-066-107-05	Screw, shield case -----	0.07	0.20
2-068-008-00	Washer, ground terminal -----	0.01	0.03
2-068-548-00	Nut-plate, a-m antenna -----	0.02	0.06

<u>Part No.</u>	<u>Description</u>	<u>Unit Price</u>	
2-825-003-00	Insulator, mica -----	\$0.03	DM0.08
3-442-022-00	Grommet, lamp -----	0.02	0.06
3-701-454-00	Clamp, lead wire -----	0.02	0.06
3-701-544-00	Nut, flange; 3 mm dia -----	0.02	0.06
3-852-803-00	Shield Plate (A), front-end -----	0.03	0.08
3-854-002-00	Shield Plate (C), front-end -----	0.05	0.14
4-303-474-00	Clamp, lead wire -----	0.01	0.03
4-303-820-00	Clamp, lead wire -----	0.02	0.06
4-515-046-00	Heat Sink (B) -----	0.06	0.17
4-803-054-00	Screw (A), voltage selector cover -----	0.02	0.06
4-803-055-00	Screw (B), voltage selector cover -----	0.01	0.03
4-803-957-00	Terminal Post (A) -----	0.01	0.03
4-804-157-00	Clamp, lead wire -----	0.02	0.06
4-804-160-21	Screw, self-tapping; (+) B 3 x 6 -----	0.01	0.03
4-804-163-00	Insulator (A), fiber; power transformer -----	0.01	0.03
4-809-050-00	Spring, tension -----	0.04	0.11
4-809-055-00	Cushion, dial glass -----	0.02	0.06
4-809-248-00	Terminal Post (B) -----	0.02	0.06
4-810-008-00	Guide, lever switch -----	0.02	0.06
4-812-134-00	Rivet, nylon (3.5 mm dia x 5.5 m) -----	0.01	0.03
4-818-032-00	Washer, nylon -----	0.01	0.03
4-818-044-00	Reflector (B) -----	0.02	0.06
4-818-045-00	Light Shield (B) -----	0.01	0.03
4-818-103-00	Clamp, lead wire; 5 mm dia -----	0.02	0.06
4-818-302-00	Shield Plate -----	0.03	0.08
4-820-421-00	Holder, varistor -----	0.03	0.08
4-822-214-00	Holder (C), dial glass -----	0.06	0.17
4-822-216-00	Panel, rear -----	1.17	3.29
4-822-325-00	Scale, dial -----	0.68	1.91
4-822-326-00	Heat Sink (A) -----	1.57	4.44
4-822-328-00	Panel, front -----	0.17	0.48
4-822-329-00	Illuminator, function indication -----	0.35	0.99
4-822-330-00	Shade, meter lamp -----	0.22	0.62
4-822-331-00	Bracket, MIC amp board -----	0.06	0.17
4-822-332-00	Shade, function lamp -----	0.11	0.31
4-822-333-00	Cushion, dial scale -----	0.54	0.14
4-822-334-00	Clamp, antenna lead wire -----	0.02	0.06
4-822-335-00	Plate, heat sink support -----	0.11	0.31
4-822-336-00	Stopper, lead wire -----	0.02	0.06
4-822-337-00	Escutcheon, dial scale -----	2.36	6.67

<u>Part No.</u>	<u>Description</u>	<u>Unit Price</u>	
4-822-338-00	Plate, bottom -----	\$1.40	DM3.96
4-822-340-00	Bracket (A), tuning capacitor -----	0.33	0.93
4-822-341-00	Cover, fm front-end -----	0.65	1.83
4-822-343-00	Cushion, dial scale -----	0.01	0.03
4-822-344-00	Terminal Post (D) -----	0.01	0.03
4-822-345-00	Drum, tuning -----	0.06	0.17
4-822-346-00	Bracket, dial lamp holder -----	0.04	0.11
4-822-347-00	Shaft, tuning -----	0.19	0.54
4-822-348-00	Bracket, flywheel -----	0.17	0.48
4-822-349-00	Holder, dial scale -----	0.02	0.06
4-822-350-00	Plate, power transformer support -----	0.19	0.54
4-822-351-00	Glass, dial -----	0.32	0.90
4-822-352-00	Plate, connection -----	0.02	0.06
4-822-353-00	Bracket, heat sink -----	0.05	0.14
4-822-354-00	Bracket (C), printed circuit board -----	0.03	0.08
4-822-355-11	Cover, voltage selector -----	0.07	0.20
4-822-356-00	Holder (A), dial glass -----	0.03	0.08
4-822-358-00	Bracket (D), printed circuit board -----	0.03	0.08
4-822-359-00	Light Shield (C) -----	0.06	0.17
4-822-369-00	Label, specification -----	0.04	0.11
4-824-701-00	Bracket, control board -----	0.36	1.01
4-824-801-00	Shield Plate, front-end -----	0.02	0.06

<u>Part No.</u>	<u>Description</u>	<u>Unit Price</u>
-----------------	--------------------	-------------------

II. HARDWARE

Screws

All screws are Phillips (cross recess) type unless otherwise indicated. (-): slotted head.

			(Per 100)	
7-621-559-45	K 2.6 x 6	-----	\$0.12	DM0.34
7-621-773-65	B 2.6 x 4	-----	0.19	0.54
7-682-545-05	B 3 4	-----	0.37	1.04
7-682-547-01	B 3 x 6	-----	0.15	0.42
7-682-548-03	B 3 x 8	-----	0.15	0.42
7-682-549-01	B 3 x 10	-----	0.16	0.45
7-682-550-13	B 3 x 12	-----	0.16	0.45
7-682-563-01	B 4 x 12	-----	0.21	0.59
7-682-147-01	P 3 x 6	-----	0.24	0.68
7-682-147-07	P 3 x 6	-----	0.24	0.68
7-682-148-05	P 3 x 8	-----	0.36	1.01
7-682-645-01	PS 3 x 4	-----	0.33	0.93
7-682-647-01	PS 3 x 6	-----	0.24	0.68
7-682-649-03	PS 3 x 10	-----	0.32	0.90
7-682-660-01	PS 4 x 6	-----	0.35	0.99
7-682-661-01	PS 4 x 8	-----	0.29	0.82
7-682-947-01	PSW 3 x 6	-----	0.52	1.46
7-682-948-01	PSW 3 x 8	-----	0.52	1.46
7-682-949-01	PSW 3 x 10	-----	0.57	1.61
7-685-544-22	B 3 x 5, self-tapping	-----	0.47	1.32
7-685-545-21	B 3 x 6, self-tapping	-----	0.29	0.82
7-685-546-23	B 3 x 8, self-tapping	-----	0.32	0.90
7-685-546-25	B 3 x 8, self-tapping	-----	0.74	2.08

Washers

7-623-108-12	3 mm dia (middle)	-----	0.08	0.23
7-623-112-11	5 mm dia (middle)	-----	0.27	0.76
7-623-207-22	2.6 mm dia, spring	-----	0.06	0.17
7-623-208-22	3 mm dia, spring	-----	0.06	0.17
7-623-408-02	3 mm dia, lock (external tooth)	-----	0.22	0.62

<u>Part No.</u>	<u>Description</u>	<u>Unit Price</u>
7-623-508-01	Lug, 3 mm dia -----	\$0.16 DM0.45
7-623-616-01	Eyelet, 2 x 3 mm dia -----	0.06 0.17
7-624-109-01	Retaining Ring, 5 mm dia -----	0.05 0.14
7-684-023-01	Nut, 3 mm dia -----	0.31 0.87
7-633-120-43	Cord, dial -----	0.02/m 0.06/m

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Unit Price</u>
-----------------	-----------------	--------------------	-------------------

III. ELECTRICAL PARTS

Complete Circuit Boards

Y-48248-01-1	Fm Front-end (FAF-022BWG)	-----	\$ 10.84DM 30.53
X-4822-324-0	A-m Front-end/I-f Amp/MPX	-----	19.25 54.21
Y-48247-01-1	Control (CCB-115)	-----	30.52 86.25
X-4822-321-0	Loudness Control	-----	2.31 6.50
X-4822-322-0	MIC Amp	-----	3.13 8.81
X-4822-325-0	Power Amp/Power Supply Board	-----	14.68 41.34
X-4822-323-0	REC/PB	-----	- -

Semiconductors

Q101	FET,	2SK42	-----	0.48	1.35
Q102	FET,	2SK23A	-----	0.48	1.35
Q103	Transistor,	2SC403C	-----	0.20	0.54
Q104	Transistor,	2SC710	-----	0.13	0.37
Q201	Transistor,	2SC403C	-----	0.20	0.56
Q202	Transistor,	2SC403C	-----	0.20	0.56
Q203	Transistor,	2SC403C	-----	0.20	0.56
Q204	FET,	2SK23A	-----	0.48	1.35
Q205	Transistor,	2SC633A	-----	0.16	0.45
Q206	Transistor,	2SC633A	-----	0.16	0.45
Q207	FET,	2SK23A	-----	0.48	1.35
Q301	Transistor,	2SC631A	-----	0.20	0.56
Q302	Transistor,	2SC631A	-----	0.20	0.56
Q303	Transistor,	2SC633A	-----	0.16	0.45
Q304	Transistor,	2SC633A	-----	0.16	0.45
Q501(Q551)	Transistor,	2SA705	-----	0.22	0.62
Q502(Q552)	Transistor,	2SC632A	-----	0.20	0.56
Q601(Q651)	Transistor,	2SC632A	-----	0.20	0.56
Q602(Q652)	Transistor,	2SC632A	-----	0.20	0.56
Q603(Q653)	Transistor,	2SC634A	-----	0.16	0.45
Q701(Q751)	Transistor,	2SA678	-----	0.20	0.56
Q702(Q752)	Transistor,	2SA705	-----	0.22	0.62
Q703(Q753)	Transistor,	2SA705	-----	0.22	0.62
Q704(Q754)	Transistor,	2SC634A	-----	0.16	0.45
Q705(Q755)	Transistor,	2SC1124	-----	0.57	1.61

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Unit Price</u>
Q706(Q756)	Transistor,	2SC1161	----- \$0.88 DM2.48
Q707(Q757)	Transistor,	2SA653	----- 0.60 1.69
Q709	Transistor,	2SC634A	----- 0.16 0.45
Q710	Transistor,	2SA678	----- 0.20 0.56
Q711	Transistor,	2SC634A	----- 0.16 0.45
Q801	Transistor,	2SC1124	----- 0.60 1.69
Q802	Transistor,	2SC1124	----- 0.60 1.69
Q803	Transistor,	2SC634A	----- 0.16 0.45
Q804	Transistor,	2SC634A	----- 0.16 0.45
Q805	Transistor,	2SA678	----- 0.20 0.56
Q806	Transistor,	2SC634A	----- 0.16 0.45
Q807	Transistor,	2SC634A	----- 0.16 0.45
Q901(Q951)	Transistor,	2SC1079	----- 2.30 6.50
Q902(Q952)	Transistor,	2SA679	----- 2.51 7.09
D101	Diode,	1S351M	----- 0.13 0.37
D102	Diode,	1T243M	----- 0.15 0.42
D201	Diode,	1T22A	----- 0.05 0.14
D202	Diode,	1T22A	----- 0.05 0.14
D203	Diode,	1S1555	----- 0.07 0.20
D204	Diode,	1T22A	----- 0.05 0.14
D205	Diode,	1T22A	----- 0.05 0.14
D206	Diode,	1S1555	----- 0.07 0.20
D207	Diode,	1T22A	----- 0.05 0.14
D208	Diode,	1T22A	----- 0.05 0.14
D701(D751)	Diode,	VD-1221	----- 0.07 0.20
D702(D752)	Diode,	SH-1S	----- 0.07 0.20
D703(D753)	Diode,	SH-1S	----- 0.07 0.20
D704(D754)	Diode,	SH-1S	----- 0.07 0.20
D801	Diode,	1T243M	----- 0.15 0.42
D802	Diode,	1T243M	----- 0.15 0.42
D803	Diode,	UO-5E	----- 0.25 0.70
D804	Diode,	UO-5E	----- 0.25 0.70
D805	Diode,	UO-5E	----- 0.25 0.70
D806	Diode,	UO-5E	----- 0.25 0.70
D807	Diode,	SH-1S	----- 0.07 0.20
D808	Diode,	SH-1S	----- 0.07 0.20
D809	Diode,	1S1555	----- 0.07 0.20
D810	Diode,	SH-1S	----- 0.07 0.20
D811	Diode,	SH-1S	----- 0.07 0.20

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Unit Price</u>
D901(D951)		Diode, SV-31 -----	\$0.07 DM0.20
IC201		IC, CX-0412 -----	1.08 3.05
IC301		IC, CX-0431 -----	1.42 4.01
IC401		IC, CX-0451 -----	1.42 4.01
IC501		IC, CX-0461 -----	1.42 4.01
IC601(IC651)		IC, CX-0461 -----	1.42 4.01

Transformers, Coils and Inductors

B1	1-417-014-21	Balun -----	0.06 0.17
CFT401	1-403-150-00	CFT -----	0.21 0.59
IFT101	1-403-295-12	IFT, fm; 10.7 MHz -----	0.13 0.37
L101	1-401-489-00	Coil, fm antenna -----	0.15 0.42
L102	1-425-446-12	Coil, fm rfl -----	0.11 0.31
L103	1-425-668-00	Coil, fm rf2 -----	0.13 0.37
L104	1-405-377-00	Coil, osc -----	0.13 0.37
L105	1-407-184-00	Inductor, micro; 3.3 μ H -----	0.05 0.14
L106	1-407-184-00	Inductor, micro; 3.3 μ H -----	0.05 0.14
L201	1-407-418-00	Coil, trap; SCA -----	0.16 0.45
L202	1-407-163-00	Inductor, micro; 3.3 μ H -----	0.03 0.08
L203	1-407-169-00	Inductor, micro; 100 μ H -----	0.03 0.08
L401	1-407-169-00	Inductor, micro; 100 μ H -----	0.03 0.08
L402	1-407-169-00	Inductor, micro; 100 μ H -----	0.03 0.08
L701(L751)	1-407-592-00	Inductor, micro; 1.8 μ H -----	0.07 0.20
L901(L902)	1-401-558-21	Bar Antenna, a-m -----	0.73 2.06
MU301	1-464-009-00	MPX Unit -----	0.73 2.06
T201	1-403-291-00	Transformer, discriminator; 10.7 MHz -	0.30 0.84
T202	1-403-299-00	Transformer, muting -----	0.15 0.42
T301	1-425-729-00	Transformer, switching; 38 kHz -----	0.43 1.21
T401	1-405-459-00	Coil, MW osc. -----	0.11 0.31
T402	1-403-128-00	IFT, a-m -----	0.10 0.28
T801	1-442-285-00	Transformer, power -----	22.28 62.97

Capacitors

Capacitors listed here are +80 -20%, 25V, ceramic type unless otherwise specified and in μ F except as indicated with p(p means μ p). (elect = electrolytic)

C101	1-102-880-11	15 p $\pm$ 0.5p 50 V -----	0.02 0.06
C102	-	-	-

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>				<u>Unit Price</u>	
C103	1-102-880-11	15 p	±0.5 p	50 V	-----	\$0.02	DMO.06
C104	1-102-064-11	0.75 p	±10 %	50 V	-----	0.03	0.08
C105	1-102-880-11	15 p	±0.5 p	50 V	-----	0.02	0.06
C106	1-102-848-11	180 p	±0.5 p	50 V	-----	0.02	0.06
C107	1-101-923-11	0.01	-----			0.02	0.06
C108	1-101-923-11	0.01	-----			0.02	0.06
C109	1-101-923-11	0.01	-----			0.02	0.06
C110	1-101-918-11	0.001	-----			0.02	0.06
C111	1-101-924-11	0.022	-----			0.02	0.06
C112	1-101-924-11	0.022	-----			0.02	0.06
C113	1-101-924-11	0.022	-----			0.02	0.06
C114	1-101-923-11	0.01	-----			0.02	0.06
C115	1-102-875-11	7 p	±5 %	50 V	-----	0.03	0.08
C116	1-102-875-11	7 p	±5 %	50 V	-----	0.03	0.08
C117	1-102-986-11	10 p	±0.5 p	50 V	-----	0.03	0.08
C118	1-102-114-11	470 p	±10 %	50 V	-----	0.02	0.06
C119	1-101-118-11	0.01	±20 %	50 V	-----	0.02	0.06
C120	1-102-986-11	10 p	±0.5 p	50 V	-----	0.03	0.08
C121	1-101-924-11	0.022	-----			0.02	0.06
C122	1-105-679-12	0.033	±10 %	50 V	mylar -----	0.03	0.08
C123	1-121-391-11	1		50 V	elect -----	0.03	0.08
C124	1-101-924-11	0.022	-----			0.02	0.06
C125	1-101-118-11	0.01	±20 %	50 V	-----	0.02	0.06
C126	1-101-118-11	0.01	±20 %	50 V	-----	0.02	0.06
C127	1-102-986-11	10 p	±0.5 p	50 V	-----	0.03	0.08
C128	1-101-924-11	0.022	-----			0.02	0.06
C201	1-101-118-11	0.01	±20 %	50 V	-----	0.02	0.06
C202	1-101-923-11	0.01	-----			0.02	0.06
C203	1-102-100-11	0.0022	±5 %	50 V	-----	0.02	0.06
C204	1-101-923-11	0.01	-----			0.02	0.06
C205	1-101-118-11	0.01	±20 %	50 V	-----	0.02	0.06
C206	1-101-923-11	0.01	-----			0.02	0.06
C207	1-101-923-11	0.01	-----			0.02	0.06
C208	1-101-918-11	0.001	-----			0.02	0.06
C209	1-102-977-11	200 p	±5 %	50 V	-----	0.02	0.06
C210	1-101-924-11	0.022	-----			0.02	0.06
C211	1-102-100-11	0.0022	±5 %	50 V	-----	0.02	0.06
C212	1-121-651-11	10		16 V	elect -----	0.04	0.11
C213	1-101-118-11	0.01	±20 %	50 V	-----	0.02	0.06
C214	1-121-651-11	10		16 V	elect -----	0.04	0.06

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>					<u>Unit Price</u>	
C215	1-105-677-12	0.022	±10 %	50 V	mylar	-----	\$0.02	DMO.06
C216	1-105-689-12	0.22	±10 %	50 V	mylar	-----	0.10	0.28
C217	1-123-068-11	220		16 V	elect	-----	1.45	4.10
C218	1-102-977-11	200 p	±5 %	50 V	-----	-----	0.02	0.06
C219	1-121-413-11	100		6.3 V	elect	-----	0.05	0.14
C220	1-121-651-11	10		16 V	elect	-----	0.04	0.11
C221	1-107-140-11	240 p	±10 %	50 V	silvered mica	-----	0.02	0.06
C222	1-102-824-11	470 p	±5 %	50 V	-----	-----	0.02	0.06
C223	1-131-196-11	2.2		16 V	tantalum	---	0.07	0.20
C224	1-102-960-11	24 p	±5 %	50 V	-----	-----	0.02	0.06
C225	1-101-922-11	0.0047			-----	-----	0.02	0.06
C226	1-101-923-11	0.01			-----	-----	0.02	0.06
C227	1-105-683-12	0.068	±10 %	50 V	mylar	-----	0.04	0.11
C228	1-121-391-11	1		50 V	elect	-----	0.03	0.08
C229	1-121-395-11	4.7		25 V	elect	-----	0.07	0.20
C230	1-121-651-11	10		16 V	elect	-----	0.04	0.11
C231	1-127-022-11	0.47		10 V	solid aluminum	-----	0.06	0.17
C232	1-102-960-11	24 p	±5 %	50 V	-----	-----	0.02	0.06
C233	1-101-924-11	0.022			-----	-----	0.02	0.06
C234	1-101-924-11	0.022			-----	-----	0.02	0.06
C235	1-101-118-11	0.01	±20 %	50 V	-----	-----	0.02	0.06
C236	1-121-413-11	100		6.3 V	elect	-----	0.05	0.14
C237	1-101-923-11	0.01			-----	-----	0.02	0.06
C301	1-121-402-11	33		10 V	elect	-----	0.05	0.14
C302	1-121-352-11	47		10 V	elect	-----	0.04	0.11
C303	1-121-413-11	100		6.3 V	elect	-----	0.05	0.14
C304	1-127-022-11	0.47		10 V	solid aluminum	-----	0.06	0.17
C305	1-103-575-11	4,700 p	±5 %	50 V	styrol	-----	0.15	0.42
C306	1-105-661-12	0.001	±10 %	50 V	mylar	-----	0.02	0.06
C307	1-123-068-11	220		16 V	elect	-----	1.45	4.10
C321(C371)	1-106-013-12	0.0033	±5 %	50 V	mylar	-----	0.04	0.11
C322(C372)	1-121-912-11	1		50 V	elect	-----	0.03	0.08
C323(C373)	1-121-912-11	1		50 V	elect	-----	0.03	0.08
C324(C374)	1-105-661-12	0.001	±10 %	50 V	mylar	-----	0.02	0.06
C325(C375)	1-102-973-11	100 p	±5 %	50 V	-----	-----	0.02	0.06
C326(C376)	1-121-352-11	47		10 V	elect	-----	0.04	0.11
C327(C377)	1-121-392-11	3.3		25 V	elect	-----	0.04	0.11
C401	1-105-673-12	0.01	±10 %	50 V	mylar	-----	0.02	0.06
C402	-	-				-	-	-

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>					<u>Unit Price</u>	
C403	1-102-953-11	18 p	±25 %	25 V	-----		\$0.02	DM0.06
C404	-	-					-	-
C405	1-121-409-11	47		16 V	elect -----		0.04	0.11
C406	1-105-677-12	0.022	±10 %	50 V	mylar -----		0.02	0.06
C407	1-103-815-11	390 p	±5 %	25 V	styrol -----		0.02	0.06
C408	1-101-923-11	0.01	-----				0.02	0.06
C409	1-101-923-11	0.01	-----				0.02	0.06
C410	1-105-677-12	0.022	±10 %	50 V	mylar -----		0.02	0.06
C411	1-105-669-12	0.0047	±10 %	50 V	mylar -----		0.02	0.06
C412	1-101-923-11	0.01	-----				0.02	0.06
C413	1-105-677-12	0.022	±10 %	50 V	mylar -----		0.02	0.06
C414	-	-					-	-
C415	1-102-977-11	200 p	±5 %	-----			0.02	0.06
C416	1-102-936-11	3 p	±0.25 p		-----		0.02	0.06
C417	1-121-651-11	10		16 V	elect -----		0.04	0.11
C418	1-121-395-11	4.7		25 V	elect -----		0.07	0.20
C419	1-121-398-11	10		25 V	elect -----		0.03	0.08
C420	1-101-923-11	0.01	-----				0.02	0.06
C421	1-105-672-12	0.0082	±10 %	50 V	mylar -----		0.02	0.06
C422	1-105-672-12	0.0082	±10 %	50 V	mylar -----		0.02	0.06
C423	1-105-672-12	0.0082	±10 %	50 V	mylar -----		0.02	0.06
C424	1-101-924-11	0.022	-----				0.02	0.06
C425	1-121-651-11	10		16 V	elect -----		0.04	0.11
C426	1-101-924-11	0.022	-----				0.02	0.06
C427	1-105-682-12	0.056	±10 %	50 V	mylar -----		0.02	0.06
C428	1-101-923-11	0.01	-----				0.02	0.06
C501(C551)	1-131-206-11	3.3		25 V	tantalum -----		0.15	0.42
C502(C552)	1-121-926-11	33		10 V	elect -----		0.05	0.14
C503(C553)	1-102-978-11	220 p	±5 %	50 V	-----		0.02	0.06
C504(C554)	-	-					-	-
C505(C555)	1-101-880-11	47 p	±5 %	50 V	-----		0.02	0.06
C506(C556)	1-106-005-12	0.0015	±5 %	50 V	mylar -----		0.04	0.11
C507(C557)	1-106-019-12	0.0056	±5 %	50 V	mylar -----		0.03	0.08
C508(C558)	1-121-911-11	0.47		50 V	elect -----		0.04	0.11
C509(C559)	1-105-661-12	0.001	±10 %	50 V	mylar -----		0.02	0.06
C510(C560)	1-131-206-11	3.3		25 V	tantalum -----		0.13	0.37
C511(C561)	1-105-661-12	0.001	±10 %	50 V	mylar -----		0.02	0.06
C512(C562)	1-123-044-11	33		25 V	elect -----		0.06	0.17
C513(C563)	1-121-913-11	3.3		25 V	elect -----		0.15	0.42
C514(C564)	1-121-416-11	100		25 V	elect -----		0.07	0.20

Ref. No.	Part No.	Description					Unit Price	
C515(C565)	1-105-685-12	0.1	±10 %	50 V	mylar	-----	\$0.03	DM0.06
C516(C566)	1-121-398-11	10		25 V	elect	-----	0.03	0.08
C601(C651)	1-105-677-12	0.022	±10 %	50 V	mylar	-----	0.02	0.06
C602(C652)	1-102-982-11	180 p	±10 %	50 V	-----	-----	0.02	0.06
C603(C653)	1-131-206-11	3.3		25 V	tantalum	-----	0.15	0.42
C604(C654)	1-121-392-11	3.3		25 V	elect	-----	0.04	0.11
C605(C655)	1-105-679-12	0.033	±10 %	50 V	mylar	-----	0.03	0.08
C606(C656)	1-105-679-12	0.033	±10 %	50 V	mylar	-----	0.03	0.08
C607(C657)	1-105-665-12	0.0022	±10 %	50 V	mylar	-----	0.02	0.06
C608(C658)	1-121-398-11	10		25 V	elect	-----	0.03	0.08
C609(C659)	1-121-352-11	47		10 V	elect	-----	0.04	0.11
C610(C660)	1-102-978-11	220 p	±5 %	50 V	-----	-----	0.02	0.06
C611(C661)	1-102-978-11	220 p	±5 %	50 V	-----	-----	0.02	0.06
C612(C662)	1-102-978-11	220 p	±5 %	50 V	-----	-----	0.02	0.06
C613(C663)	1-121-392-11	3.3		25 V	elect	-----	0.04	0.11
C614(C664)	1-106-023-12	0.0082	±5 %	50 V	mylar	-----	0.04	0.11
C615(C665)	1-106-013-12	0.0033	±5 %	50 V	mylar	-----	0.04	0.11
C616(C666)	1-106-041-12	0.047	±5 %	50 V	mylar	-----	0.05	0.14
C617(C667)	1-106-031-12	0.018	±5 %	50 V	mylar	-----	0.03	0.08
C618(C668)	1-121-392-11	3.3		25 V	elect	-----	0.04	0.11
C619(C669)	1-121-392-11	3.3		25 V	elect	-----	0.04	0.11
C620	1-105-671-12	0.0068	±10 %	50 V	mylar	-----	0.02	0.06
C701(C751)	1-121-392-11	3.3		25 V	elect	-----	0.04	0.11
C702(C752)	1-102-963-11	33 p	±5 %	50 V	-----	-----	0.02	0.06
C703(C753)	1-121-935-11	100		25 V	elect	-----	0.17	0.48
C704(C754)	1-102-944-11	7 p	±5 %	50 V	-----	-----	0.02	0.06
C705(C755)	1-102-963-11	33 p	±5 %	50 V	-----	-----	0.02	0.06
C706(C756)	1-121-392-11	3.3		25 V	elect	-----	0.04	0.11
C707(C757)	1-123-058-11	47		50 V	elect	-----	0.02	0.06
C708(C758)	1-105-679-12	0.033	±10 %	50 V	mylar	-----	0.03	0.08
C709(C759)	1-105-665-12	0.0022	±10 %	50 V	mylar	-----	0.02	0.06
C710(C760)	1-105-665-12	0.0022	±10 %	50 V	mylar	-----	0.02	0.06
C711	1-121-935-11	100		25 V	elect	-----	0.17	0.48
C801	1-105-917-12	0.022	±10 %	200 V	mylar	-----	0.04	0.11
C802	1-105-917-12	0.022	±10 %	200 V	mylar	-----	0.04	0.11
C803	1-105-917-12	0.022	±10 %	200 V	mylar	-----	0.04	0.11
C804	1-105-917-12	0.022	±10 %	200 V	mylar	-----	0.04	0.11
C805	1-123-065-11	330		25 V	elect	-----	0.12	0.34
C806	1-123-065-11	330		25 V	elect	-----	0.12	0.34
C807	1-121-413-11	100		6.3 V	elect	-----	0.05	0.14

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>				<u>Unit Price</u>	
C808	1-123-090-11	47	63 V	elect	-----	\$1.17	DM3.31
C809	1-121-392-11	3.3	25 V	elect	-----	0.04	0.11
C810	1-121-726-11	0.47	50 V	elect	-----	0.03	0.08
C811	1-121-936-11	220	25 V	elect	-----	0.17	0.48
C812	1-121-936-11	220	25 V	elect	-----	0.17	0.48
C813	1-121-391-11	1	50 V	elect	-----	0.03	0.08
C814	1-121-935-11	100	25 V	elect	-----	0.17	0.48
C815	1-121-935-11	100	25 V	elect	-----	0.17	0.48
C816	1-123-090-11	47	63 V	elect	-----	1.17	3.31
C817	1-123-090-11	47	63 V	elect	-----	1.17	3.31
C818	1-105-725-12	0.1 ±10 %	100 V	mylar	-----	0.07	0.20
C819	1-105-725-12	0.1 ±10 %	100 V	mylar	-----	0.07	0.20
C820	1-121-410-11	47	25 V	elect	-----	0.10	0.28
C821	1-121-936-11	220	25 V	elect	-----	0.17	0.48
C822	1-105-677-12	0.022 ±10 %	50 V	mylar	-----	0.02	0.06
C823	1-121-392-11	3.3	25 V	elect	-----	0.04	0.11
C901,902	1-123-089-11	6,800	63 V	elect	-----	5.75	16.25
CV101~106	1-151-232-12	Tuning	-----	-----	-----	3.05	8.62
CT401,402	1-141-095-11	Trimmer	-----	-----	-----	0.07	0.20

Resistors

All resistors are in Ω , $\pm 5\%$, $1/4$ W and carbon type unless otherwise indicated.

R104	1-244-665-11	470	-----	0.02	0.06
R105	1-242-689-11	4.7 k	-----	0.02	0.06
R106	1-242-696-11	9.1 k	-----	0.02	0.06
R107	1-242-666-11	510	-----	0.02	0.06
R108	1-242-673-11	1 k	-----	0.02	0.06
R109	1-242-642-11	51	-----	0.02	0.06
R110	1-242-697-11	10 k	-----	0.02	0.06
R111	1-244-692-11	6.2 k	-----	0.02	0.06
R112	1-242-666-11	510	-----	0.02	0.06
R113	1-242-677-11	1.5 k	-----	0.02	0.06
R114	1-242-685-11	3.3 k	-----	0.02	0.06
R115	1-242-677-11	1.5 k	-----	0.02	0.06
R116	1-242-721-11	100 k	-----	0.02	0.06
R117	1-244-697-11	10 k	-----	0.02	0.06
R118	1-244-675-11	1.2 k	-----	0.02	0.06
R119	1-244-708-11	30 k	-----	0.02	0.06

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Unit Price</u>	
R201	1-244-655-11	180	-----	\$0.02 DM0.06
R202	1-242-661-11	330	-----	0.02 0.06
R203	1-242-671-11	820	-----	0.02 0.06
R204	1-242-693-11	6.8 k	-----	0.02 0.06
R205	1-242-663-11	390	-----	0.02 0.06
R206	1-242-680-11	2 k	-----	0.02 0.06
R207	1-244-649-11	100	-----	0.02 0.06
R208	1-242-673-11	1 k	-----	0.02 0.06
R209	1-242-687-11	3.9 k	-----	0.02 0.06
R210	1-242-673-11	1 k	-----	0.02 0.06
R211	1-242-649-11	100	-----	0.02 0.06
R212	1-244-649-11	100	-----	0.02 0.06
R213	1-242-691-11	5.6 k	-----	0.02 0.06
R214	1-242-661-11	330	-----	0.02 0.06
R215	1-242-684-11	3 k	-----	0.02 0.06
R216	1-242-669-11	680	-----	0.02 0.06
R217	1-242-663-11	390	-----	0.02 0.06
R218	1-242-661-11	330	-----	0.02 0.06
R219	1-242-669-11	680	-----	0.02 0.06
R220	1-242-663-11	390	-----	0.02 0.06
R221	1-244-649-11	100	-----	0.02 0.06
R222	1-242-675-11	1.2 k	-----	0.02 0.06
R223	1-242-697-11	10 k	-----	0.02 0.06
R224	1-242-641-11	47	-----	0.02 0.06
R225	1-242-641-11	47	-----	0.02 0.06
R226	1-242-721-11	100 k	-----	0.02 0.06
R227	1-242-745-11	1 M	-----	0.02 0.06
R228	1-242-745-11	1 M	-----	0.02 0.06
R229	1-242-721-11	100 k	-----	0.02 0.06
R230	1-244-649-11	100	-----	0.02 0.06
R231	1-242-673-11	1 k	-----	0.02 0.06
R232	1-242-706-11	24 k	-----	0.02 0.06
R233	1-242-655-11	180	-----	0.02 0.06
R234	1-242-713-11	47 k	-----	0.02 0.06
R235	1-244-673-11	1 k	-----	0.02 0.06
R236	1-242-657-11	220	-----	0.02 0.06
R237	1-242-705-11	22 k	-----	0.02 0.06
R238	1-242-703-11	18 k	-----	0.02 0.06
R239	1-242-649-11	100	-----	0.02 0.06
R240	1-242-689-11	4.7 k	-----	0.02 0.06

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Unit Price</u>
R241	1-242-632-11	20 -----	\$0.02 DM0.06
R242	1-242-701-11	15 k -----	0.02 0.06
R243	1-242-699-11	12 k -----	0.02 0.06
R244	1-242-632-11	20 -----	0.02 0.06
R245	1-242-701-11	15 k -----	0.02 0.06
R246	1-242-699-11	12 k -----	0.02 0.06
R247	1-242-685-11	3.3 k -----	0.02 0.06
R248	1-244-731-11	270 k -----	0.02 0.06
R249	1-242-714-11	51 k -----	0.02 0.06
R250	1-242-745-11	1 M -----	0.02 0.06
R251	1-242-735-11	390 k -----	0.02 0.06
R252	1-242-723-11	120 k -----	0.02 0.06
R253	1-242-711-11	39 k -----	0.02 0.06
R254	1-242-721-11	100 k -----	0.02 0.06
R255	1-242-745-11	1 M -----	0.02 0.06
R256	1-242-673-11	1 k -----	0.02 0.06
R257	1-242-677-11	1.5 k -----	0.02 0.06
R301	1-242-669-11	680 -----	0.02 0.06
R302	1-242-701-11	15 k -----	0.02 0.06
R303	1-242-684-11	3 k -----	0.02 0.06
R304	1-242-684-11	3 k -----	0.02 0.06
R305	1-242-681-11	2.2 k -----	0.02 0.06
R306	1-202-559-11	270 1/2 W composition ----	0.02 0.06
R321(R371)	1-242-709-11	33 k -----	0.02 0.06
R322(R372)	1-242-693-11	6.8 k -----	0.02 0.06
R323(R373)	1-242-693-11	6.8 k -----	0.02 0.06
R324(R374)	1-242-713-11	47 k -----	0.02 0.06
R325(R375)	1-242-724-11	130 k -----	0.02 0.06
R326(R376)	1-242-665-11	470 -----	0.02 0.06
R327(R377)	1-242-693-11	6.8 k -----	0.02 0.06
R328(R378)	1-242-681-11	2.2 k -----	0.02 0.06
R329(R379)	1-242-663-11	390 -----	0.02 0.06
R330(R380)	1-242-709-11	33 k -----	0.02 0.06
R331(R381)	1-242-681-11	2.2 k -----	0.02 0.06
R401	1-242-697-11	10 k -----	0.02 0.06
R402	1-242-690-11	5.1 k -----	0.02 0.06
R403	1-244-673-11	1 k -----	0.02 0.06
R404	1-242-649-11	100 -----	0.02 0.06
R405	1-242-716-11	62 k -----	0.02 0.06

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Unit Price</u>
R406	1-242-682-11	2.4 k -----	\$0.02 DMO.06
R407	1-242-671-11	820 -----	0.02 0.06
R408	1-242-697-11	10 k -----	0.02 0.06
R409	1-242-673-11	1 k -----	0.02 0.06
R410	1-242-656-11	200 -----	0.02 0.06
R411	1-242-709-11	33 k -----	0.02 0.06
R412	1-242-687-11	3.9 k -----	0.02 0.06
R413	1-242-693-11	6.8 k -----	0.02 0.06
R414	1-242-672-11	910 -----	0.02 0.06
R415	1-242-641-11	47 -----	0.02 0.06
R416	1-242-672-11	910 -----	0.02 0.06
R417	1-242-689-11	4.7 k -----	0.02 0.06
R418	1-242-673-11	1 k -----	0.02 0.06
R419	1-242-713-11	47 k -----	0.02 0.06
R420	1-244-643-11	56 -----	0.02 0.06
R501(R551)	1-242-715-11	56 k -----	0.02 0.06
R502(R552)	1-242-737-11	470 k -----	0.02 0.06
R503(R553)	1-242-670-11	750 -----	0.02 0.06
R504(R554)	1-242-673-11	1 k -----	0.02 0.06
R505(R555)	1-242-683-11	2.7 k -----	0.02 0.06
R506(R556)	1-2-2-713-11	47 k -----	0.02 0.06
R507(R557)	1-242-741-11	680 k -----	0.02 0.06
R508(R558)	1-242-721-11	100 k -----	0.02 0.06
R509(R559)	1-242-685-11	3.3 k -----	0.02 0.06
R510(R560)	1-242-721-11	100 k -----	0.02 0.06
R511(R561)	1-242-721-11	100 k -----	0.02 0.06
R512(R562)	1-242-673-11	1 k -----	0.02 0.06
R513(R563)	1-242-721-11	100 k -----	0.02 0.06
R514(R564)	1-242-718-11	75 k -----	0.02 0.06
R515(R565)	1-242-705-11	22 k -----	0.02 0.06
R516(R566)	1-242-713-11	47 k -----	0.02 0.06
R517(R567)	1-242-671-11	820 -----	0.02 0.06
R518(R568)	1-242-697-11	10 k -----	0.02 0.06
R519(R569)	1-242-657-11	220 -----	0.02 0.06
R520(R570)	1-242-709-11	33 k -----	0.02 0.06
R521(R571)	1-242-685-11	3.3 k -----	0.02 0.06
R522(R572)	1-242-673-11	1 k -----	0.02 0.06
R523(R573)	1-242-698-11	12 k -----	0.02 0.06
R524(R574)	1-242-709-11	33 k -----	0.02 0.06
R525(R575)	1-242-697-11	10 k -----	0.02 0.06
R526(R576)	1-244-699-11	24 k -----	0.02 0.06

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Unit Price</u>	
R601(R651)	1-244-703-11	18 k	-----	\$0.02 DM0.06
R602(R652)	1-244-717-11	68 k	-----	0.02 0.06
R603(R653)	1-242-731-11	270 k	-----	0.02 0.06
R604(R654)	1-242-663-11	390	-----	0.02 0.06
R605(R655)	1-242-711-11	39 k	-----	0.02 0.06
R606(R656)	1-242-677-11	1.5 k	-----	0.02 0.06
R607(R657)	1-242-697-11	10 k	-----	0.02 0.06
R608(R658)	1-242-697-11	10 k	-----	0.02 0.06
R609(R659)	1-242-689-11	4.7 k	-----	0.02 0.06
R610(R660)	1-242-697-11	10 k	-----	0.02 0.06
R611(R661)	1-242-673-11	1 k	-----	0.02 0.06
R612(R662)	1-242-721-11	100 k	-----	0.02 0.06
R613(R663)	1-242-673-11	1 k	-----	0.02 0.06
R614(R664)	1-242-721-11	100 k	-----	0.02 0.06
R615(R665)	1-242-673-11	1 k	-----	0.02 0.06
R616(R666)	1-242-693-11	6.8 k	-----	0.02 0.06
R617(R667)	1-242-709-11	33 k	-----	0.02 0.06
R618(R668)	1-242-649-11	100	-----	0.02 0.06
R619(R669)	1-242-679-11	1.8 k	-----	0.02 0.06
R620(R670)	1-242-687-11	3.9 k	-----	0.02 0.06
R621(R671)	1-242-673-11	1 k	-----	0.02 0.06
R622(R672)	1-242-715-11	56 k	-----	0.02 0.06
R623(R673)	1-244-739-11	560 k	-----	0.02 0.06
R624(R674)	1-242-731-11	270 k	-----	0.02 0.06
R625(R675)	1-242-673-11	1 k	-----	0.02 0.06
R626(R676)	1-242-701-11	15 k	-----	0.02 0.06
R627(R677)	1-242-709-11	33 k	-----	0.02 0.06
R628(R678)	1-242-689-11	4.7 k	-----	0.02 0.06
R629	1-242-721-11	100 k	-----	0.02 0.06
R701(R751)	1-244-745-11	1 M	-----	0.02 0.06
R702(R752)	1-244-673-11	1 k	-----	0.02 0.06
R703(R753)	1-244-714-11	51 k	-----	0.02 0.06
R704(R754)	1-244-705-11	22 k	-----	0.02 0.06
R705(R755)	1-244-677-11	1.5 k	-----	0.02 0.06
R706(R756)	1-244-671-11	820	-----	0.02 0.06
R707(R757)	1-244-666-11	510	-----	0.02 0.06
R708(R758)	1-244-685-11	3.3 k	-----	0.02 0.06
R709(R759)	1-244-697-11	10 k	-----	0.02 0.06
R710(R760)	1-244-714-11	51 k	-----	0.02 0.06

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>				<u>Unit Price</u>	
R711(R761)	1-202-583-11	2.7 k	1/2 W	composition	----	\$0.02	DM0.06
R712(R762)	1-202-583-11	2.7 k	1/2 W	composition	----	0.02	0.06
R713(R763)	1-244-701-11	15 k	-----	-----	-----	0.02	0.06
R714(R764)	1-244-661-11	330	-----	-----	-----	0.02	0.06
R715(R765)	1-244-661-11	330	-----	-----	-----	0.02	0.06
R716(R766)	1-244-649-11	100	-----	-----	-----	0.02	0.06
R717(R767)	1-202-517-11	4.7	1/2 W	composition	----	0.02	0.06
R718(R768)	1-217-158-11	0.47	5 W	metal	-----	0.05	0.14
R719(R769)	1-217-158-11	0.47	5 W	metal	-----	0.05	0.14
R720(R770)	1-202-525-11	10	1/2 W	composition	----	0.02	0.06
R721(R771)	1-202-517-11	4.7	1/2 W	composition	----	0.02	0.06
R722(R772)	1-202-565-11	470	1/2 W	composition	----	0.02	0.06
R723(R773)	1-202-565-11	470	1/2 W	composition	----	0.02	0.06
R724(R774)	1-244-697-11	10 k	-----	-----	-----	0.02	0.06
R725	1-244-697-11	10 k	-----	-----	-----	0.02	0.06
R726	1-244-697-11	10 k	-----	-----	-----	0.02	0.06
R801	1-207-635-11	82	2 W	wirewound	-----	0.06	0.17
R802	1-207-688-11	220	5 W	wirewound	-----	0.07	0.20
R803	1-244-685-11	3.3 k	-----	-----	-----	0.02	0.06
R804	1-207-639-11	330	2 W	wirewound	-----	0.06	0.17
R805	1-244-649-11	100	-----	-----	-----	0.02	0.06
R806	1-244-665-11	470	-----	-----	-----	0.02	0.06
R807	1-242-706-11	24 k	-----	-----	-----	0.02	0.06
R808	1-242-721-11	100 k	-----	-----	-----	0.02	0.06
R809	1-242-697-11	10 k	-----	-----	-----	0.02	0.06
R810	1-242-720-11	91 k	-----	-----	-----	0.02	0.06
R811	1-242-707-11	27 k	-----	-----	-----	0.02	0.06
R812	1-242-726-11	160 k	-----	-----	-----	0.02	0.06
R813	1-242-705-11	22 k	-----	-----	-----	0.02	0.06
R814	1-242-697-11	10 k	-----	-----	-----	0.02	0.06
R815	1-242-701-11	15 k	-----	-----	-----	0.02	0.06
R816	1-242-703-11	18 k	-----	-----	-----	0.02	0.06
R817	1-202-565-11	470	1/2 W	composition	----	0.02	0.06
R818	1-242-671-11	820	-----	-----	-----	0.02	0.06
R819	1-242-671-11	820	-----	-----	-----	0.02	0.06
R820	1-242-705-11	22 k	-----	-----	-----	0.02	0.06
R821	1-202-587-11	3.9 k	1/2 W	composition	----	0.02	0.06
R822	1-202-577-11	1.5 k	1/2 W	composition	----	0.02	0.06
R823	1-202-577-11	1.5 k	1/2 W	composition	----	0.02	0.06
R824	1-202-582-11	2.4 k	1/2 W	composition	----	0.02	0.06
R825	1-202-582-11	2.4 k	1/2 W	composition	----	0.02	0.06

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Unit Price</u>
R826	1-244-657-11	220 -----	\$0.02 DMO.06
R827	1-244-641-11	47 -----	0.02 0.06
R828	1-202-505-11	110 1/2 W composition -----	0.02 0.06
R829	1-207-630-11	22 2 W wirewound -----	0.06 0.17
R830	1-207-630-11	22 2 W wirewound -----	0.06 0.17
R831	1-207-929-11	2.7 5 W wirewound -----	0.06 0.17
R832	1-202-510-11	2.4 k 1/2 W composition -----	0.02 0.06
R833	1-202-510-11	2.4 k 1/2 W composition -----	0.02 0.06
R837	1-242-705-11	22 k -----	0.02 0.06
R901(R951)	1-244-697-11	10 k -----	0.02 0.06
R902(R952)	1-244-697-11	10 k -----	0.02 0.06
R903(R953)	1-244-719-11	82 k -----	0.02 0.06
R904(R954)	1-244-735-11	390 k -----	0.02 0.06
RT201	1-222-845-11	100 k (B), adjustable -----	0.12 0.34
RT202	1-221-978-11	4.7 k (B), adjustable -----	0.13 0.37
RT301	1-221-978-11	4.7 k (B), adjustable -----	0.13 0.37
RT401	1-221-997-11	2.2 k (B), adjustable -----	0.13 0.37
RT701(RT751)	1-221-967-11	10 k (B), adjustable -----	0.11 0.31
RV501(RV551)	1-224-103-11	50 k (C), variable (MIC MIXING) -----	1.04 2.93
RV601(RV651)	1-224-102-11	250 k (B)/250 k (M), variable (VOLUME) -----	1.82 5.14
RV602(RV652)	1-224-102-11	250 k (B)/250 k (M), variable (BALANCE) -----	1.82 5.14
RV603(RV653)	1-224-101-11	50 k (B), variable (TREBLE) -----	0.71 2.00
RV604(RV654)	1-224-101-11	50 k (B), variable (BASS) -----	0.71 2.00

Switches

S1	1-516-199-00	Rotary/slide (FUNCTION) -----	1.73 4.89
S2	1-516-036-00	Lever (MONITOR 1) -----	0.05 0.14
S3	1-516-036-00	Lever (MONITOR 2) -----	0.05 0.14
S4	1-516-196-00	Rotary/slide (MODE) -----	1.47 4.16
S5	1-516-036-00	Lever/slide (LOUDNESS) -----	0.05 0.14
S6	1-516-197-00	Rotary/slide (FILTER) -----	1.24 3.50
S7	1-514-524-00	Slide (NORMAL/SEPARATE) -----	0.13 0.37
S8	1-514-198-00	Rotary/slide (SPEAKER) -----	1.60 4.92
S9	1-516-036-00	Lever (MUTING) -----	0.05 0.14
S10	1-514-448-00	Slide (DE-EMPHASIS) -----	0.13 0.37
S12-1 ~ 3		MIC MIXING (built in RV501, 551) ---	
S11	1-516-315-00	Seesaw (POWER) -----	0.73 2.06

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Unit Price</u>	
<u>Filters</u>				
CF201,202	1-527-507-12	Fm I-f, ceramic 10.70 MHz (red) -----	\$0.26	DMO.73
	1-527-507-22	Fm I-f, ceramic 10.66 MHz (black) ---	0.26	0.73
	1-527-507-32	Ff I-f, ceramic 10.74 MHz (white) ---	0.26	0.73
	1-527-507-42	Fm I-f, ceramic 10.62 MHz (green) ---	0.26	0.73
	1-527-507-52	Fm I-f, ceramic 10.78 MHz (yellow) ---	0.26	0.73
<u>Miscellaneous</u>				
CB701(CB751)	1-515-194-00	Breaker, circuit -----	0.94	2.65
CP201	1-231-193-00	Encapsulated Component -----	0.15	0.42
CP301,302	1-231-224-00	Encapsulated Component -----	0.16	0.45
CP901	1-231-057-12	Encapsulated Component, 0.033 μ F+120 Ω -	0.13	0.37
CNJ901	1-509-517-00	Connector, REC/PL -----	0.16	0.45
CNJ902	1-507-265-00	Jack, HEADPHONE -----	0.16	0.45
CNJ906,907	1-507-394-00	Jack, MIC -----	0.18	0.51
F901,902	1-532-252-00	Fuse, 2.5 A -----	0.11	0.31
J901 ~ 908 (J951 ~ 958)	1-507-393-00	Jack, phono; 8-P -----	0.49	1.38
M901	1-520-140-00	Meter, TUNING -----	1.27	3.59
M902	1-520-141-00	Meter, TUNER INPUT -----	0.24	3.50
PL901,902	1-518-116-00	Lamp, dial 11 V/0.36 A -----	0.13	0.37
PL903	1-518-124-00	Lamp, TUNING 8 V/0.25 A -----	0.13	0.37
PL904	1-518-151-00	Pointer (with lamp) -----	0.63	1.77
PL905	1-518-158-00	Lamp, STEREO 8 V/0.03 A -----	0.19	0.54
PL906	1-518-124-00	Lamp, TUNER INPUT meter 8 V/0.25 A --	0.23	0.65
PL907 ~ 912	1-518-121-00	Lamp, AUX; PHONO; FM; A-M; TAPE; MIC (4.5 V/0.04 A) -	0.19	0.54
VS901	1-526-520-11	Selector, voltage -----	0.11	0.31
	1-509-437-00	Socket, power transistor -----	0.05	0.14
	1-509-546-00	Connector, ac input; 3-P -----	0.47	1.32
	1-517-057-00	Holder, meter lamp; 2-P -----	0.20	0.56
	1-533-090-00	Holder, dial lamp -----	0.04	0.11
	1-535-054-00	Lug Terminal -----	0.02	0.06
	1-535-055-00	Lug Terminal -----	0.03	0.08
	1-536-353-00	Terminal Post, U-shaped (single) ----	0.02	0.06
	1-536-354-00	Terminal Post (C) -----	0.02	0.06
	1-536-355-00	Terminal Post, U-shaped (double) ----	0.02	0.06
	1-536-395-00	Terminal Strip, 1L1C -----	0.02	0.06
	1-536-398-00	Terminal Strip, 2L2C -----	0.02	0.06
TFM901 ~ 904	1-536-415-00	Terminal Strip, 4-P (ANTENNA) -----	0.02	0.06
	1-582-233-00	Jumper Board, 8-P phono jack -----	0.02	0.06

<u>Part No.</u>	<u>Description</u>	<u>Unit Price</u>
III. <u>ACCESSORIES & PACKING MATERIALS</u>		
X-44900-02-0	Cloth Ass'y, polishing -----	\$0.03 DM0.08
1-501-083-21	Ribbon Antenna, f-m -----	0.43 1.21
1-506-138-11	Plug, phono (red) -----	0.03 0.08
1-506-138-12	Plug, phono (white) -----	0.03 0.08
3-701-020-00	Bag, polyethylene; instruction manual -----	0.01 0.03
3-701-359-00	Label, tack -----	0.01 0.03
3-780-161-11	Manual, instruction -----	0.44 1.24
3-793-183-00	Card, inspection -----	0.01 0.03
3-793-562-00	Schematic Diagram -----	0.06 0
4-822-360-00	Cushion, upper -----	0.11 0.31
4-822-363-00	Cushion, side -----	0.17 0.48
4-822-370-00	Carton -----	1.43 4.03
4-826-435-00	Bag, polyethylene; receiver -----	0.25 0.70


(1)

Hardware Nomenclature

P	- Pan Head Screw		W	- Washer
PS	- Pan Head Screw with Spring Washer		SW	- Spring Washer
K	- Flat Countersunk Head Screw		LW	- Lock Washer
B	- Binding Head Screw		N	- Nut
SC	- Set Screw			
E	- Retaining Ring (E Washer)			


- Example -

Type of Slot
P 3x10
Length in mm (L)
Diameter in mm (D)
Type of Head




Note:


USA Model Serial No. 807,001 and later
Canada Model Serial No. 700,001 and later
GEP Model Serial No. 400,001 and later

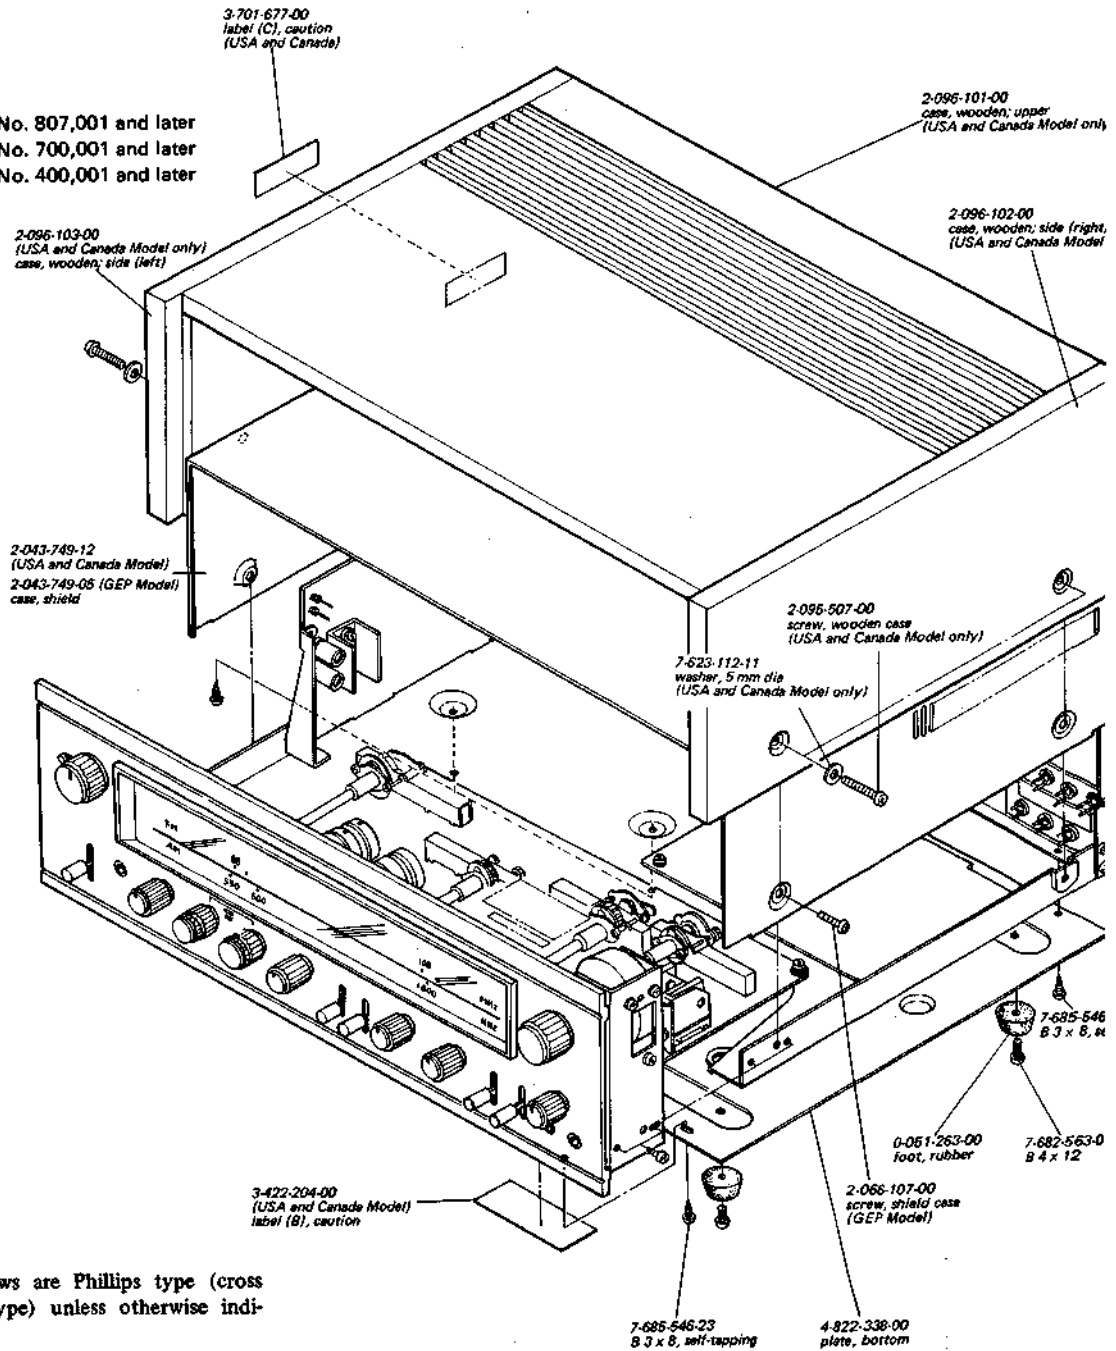


Note: All screws are Phillips type (cross
recess type) unless otherwise indi-
cated.

(-): slotted head

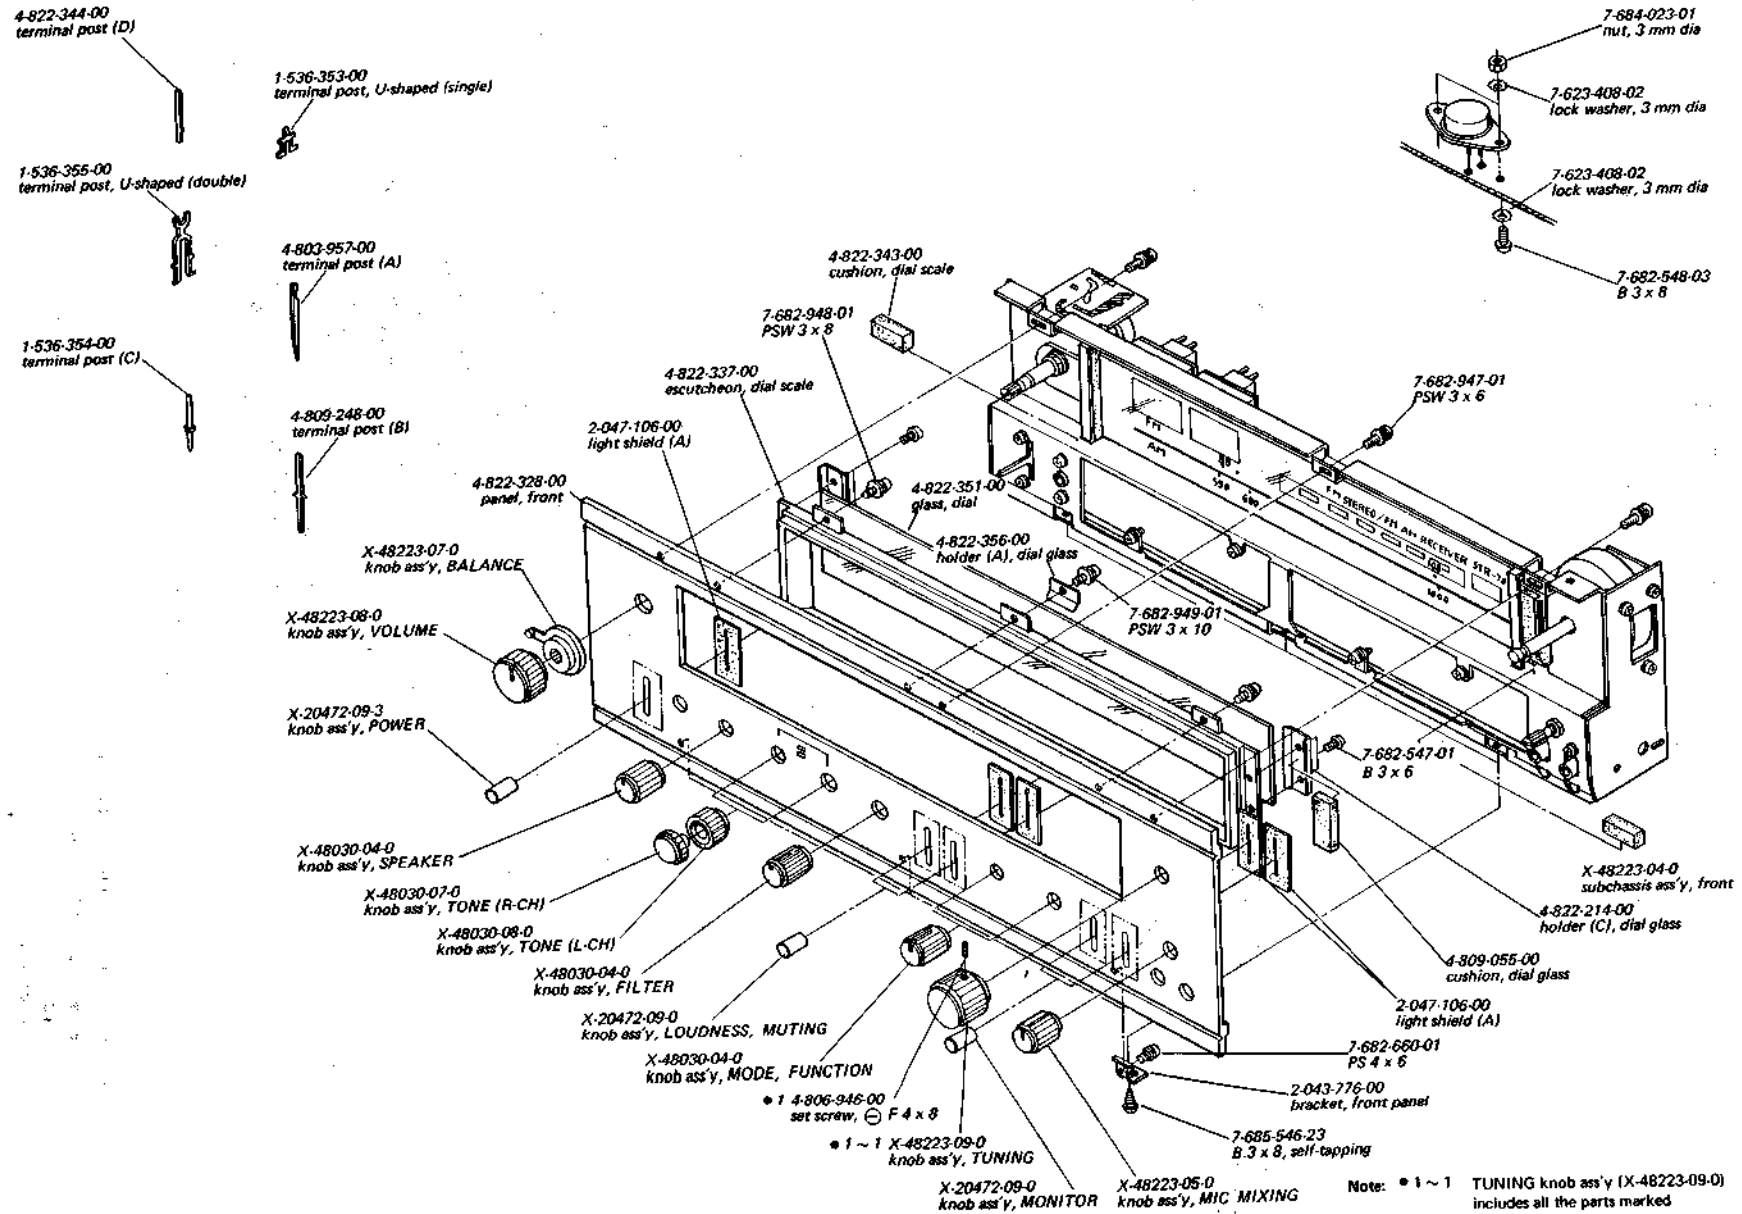


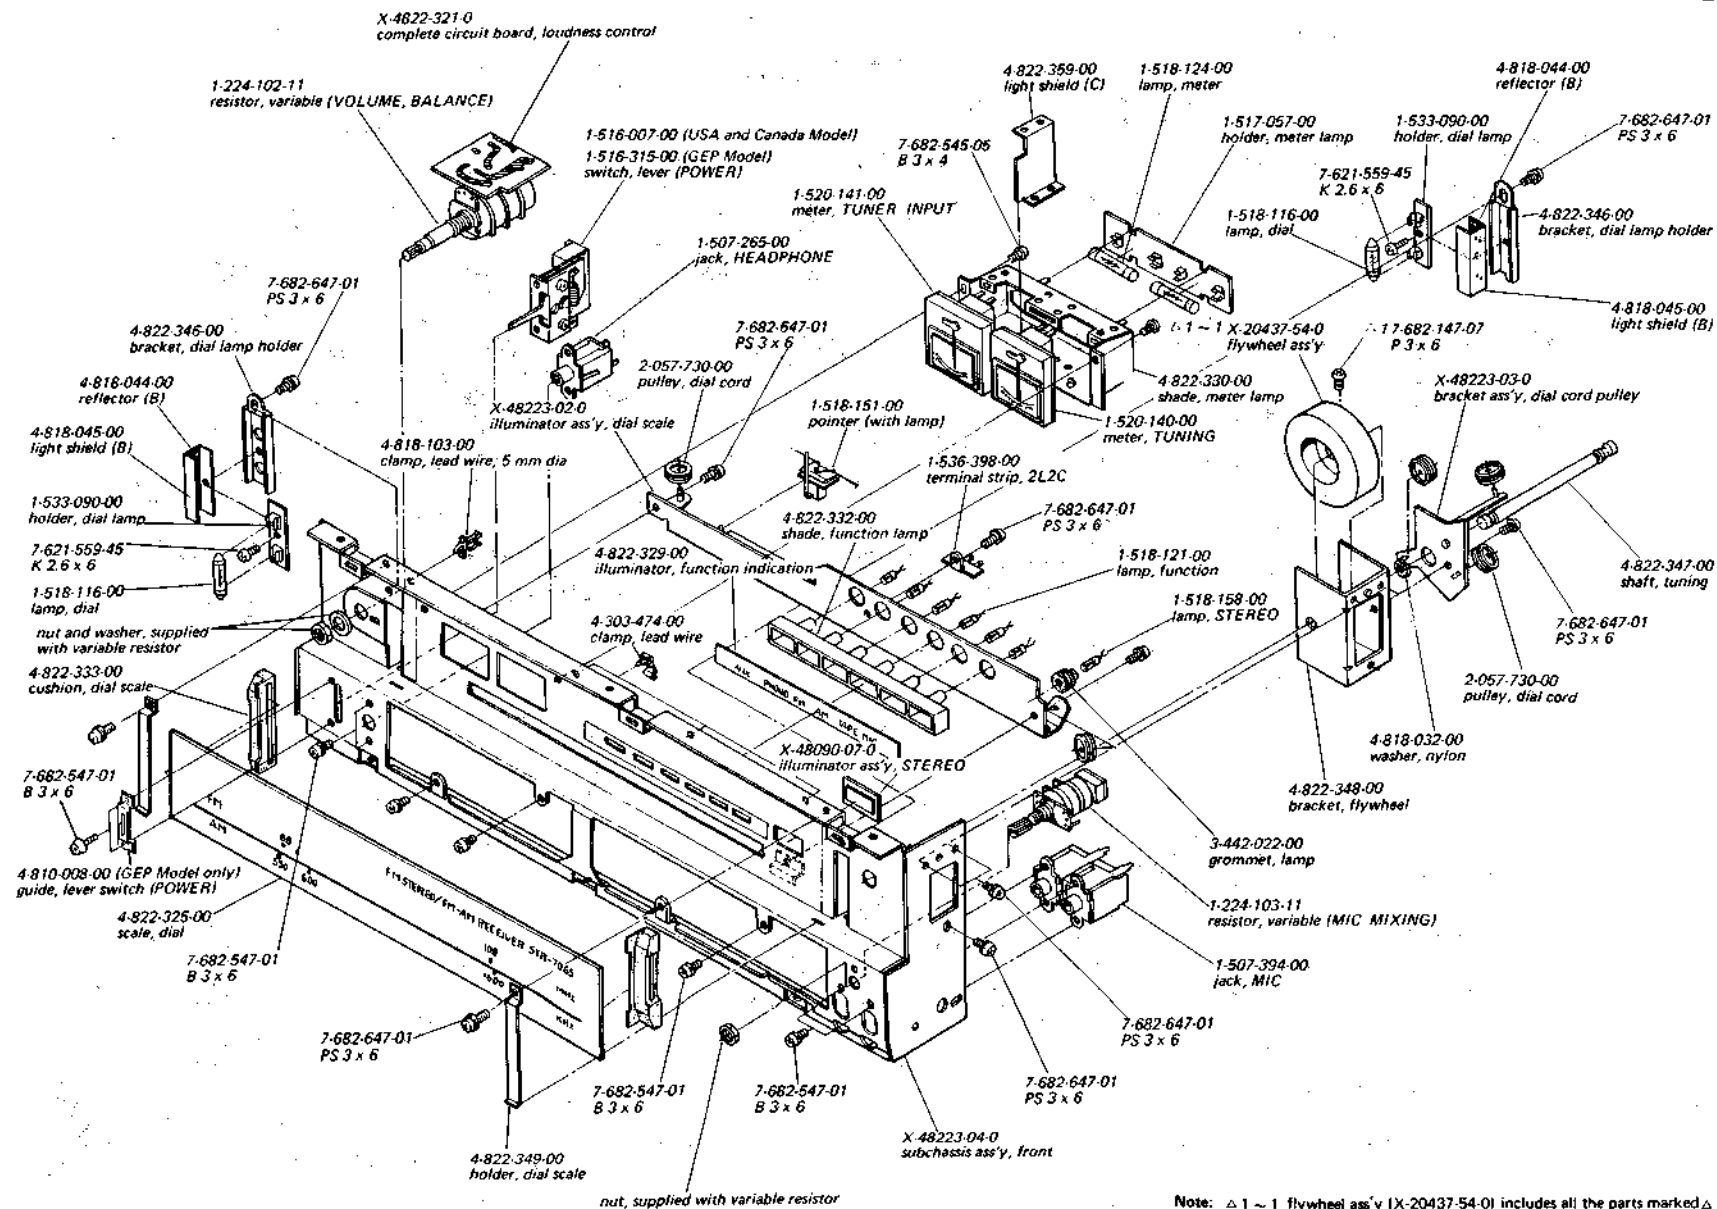


Note: Δ 1 ~ 1 flywheel ass'y (X-20437-54-0) includes all the parts marked Δ .

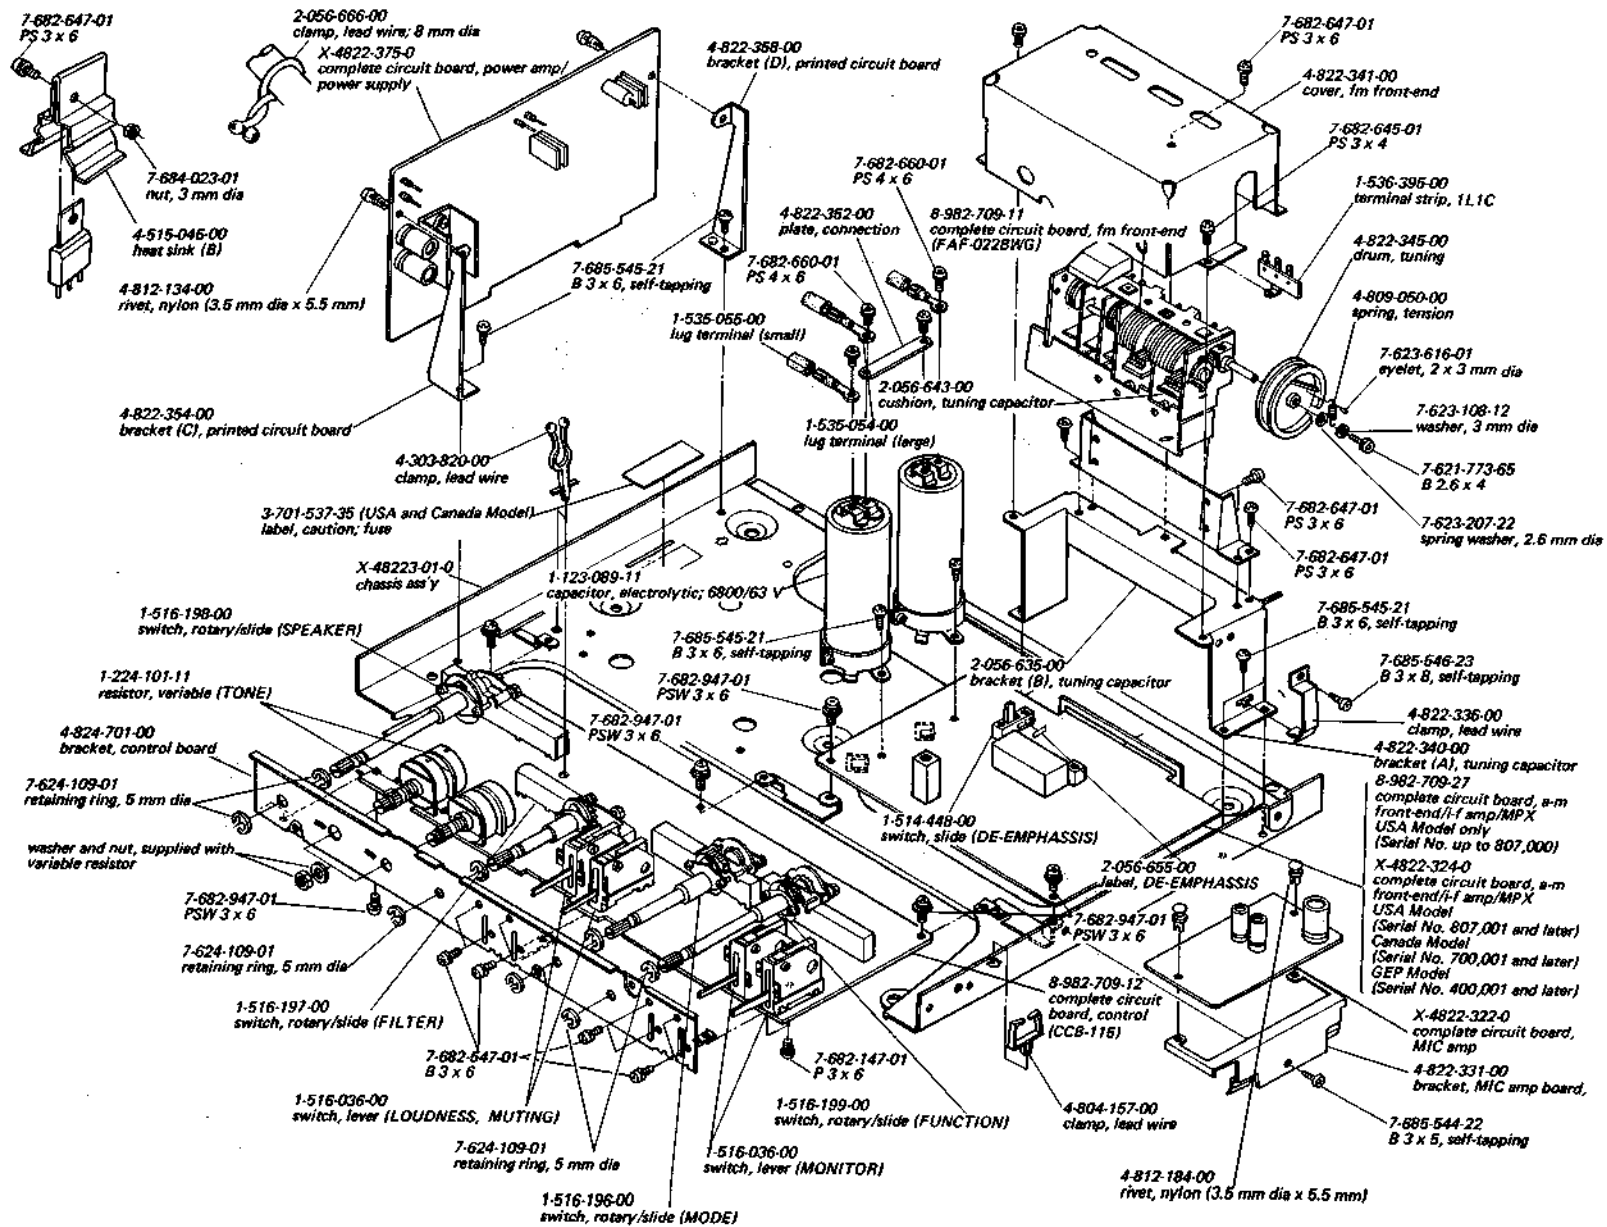

(5)

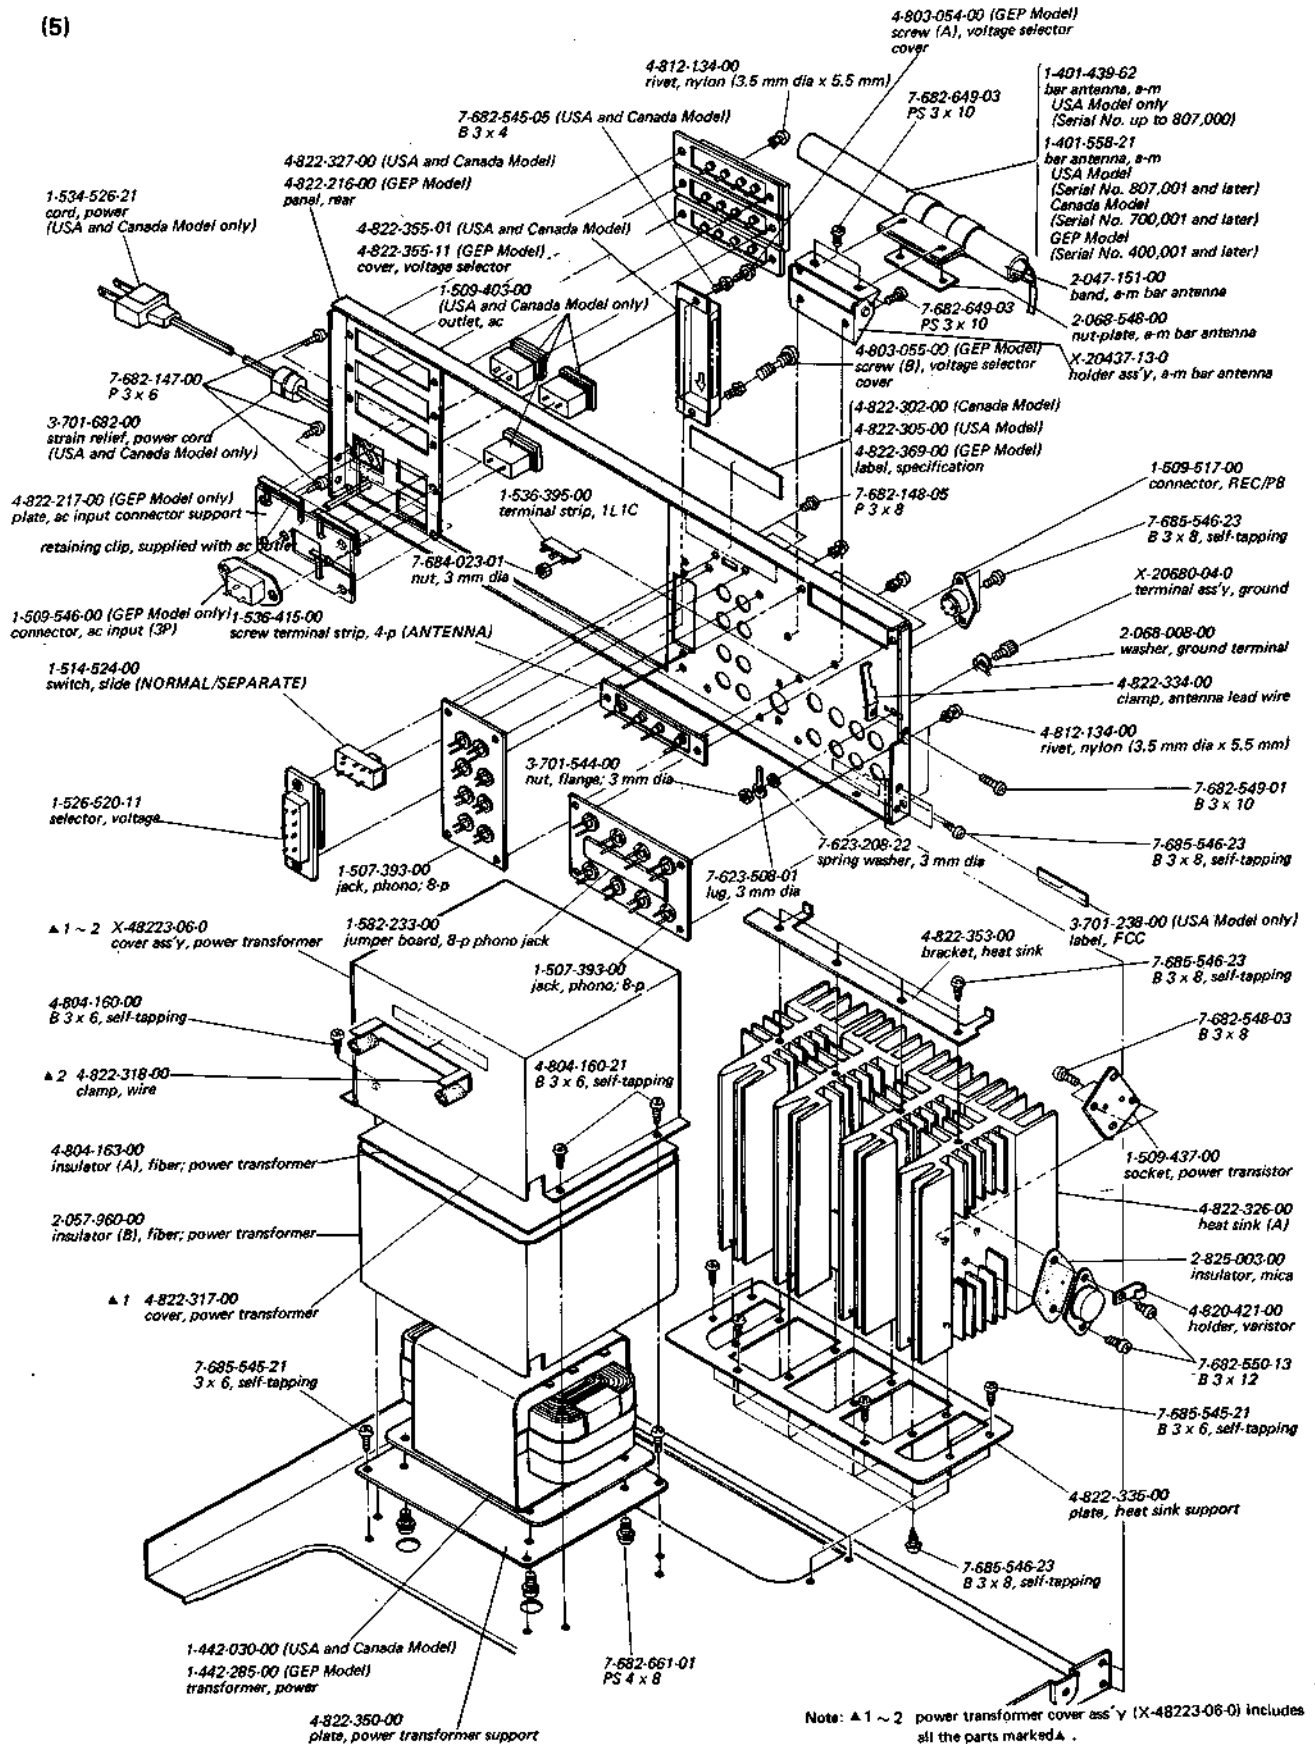

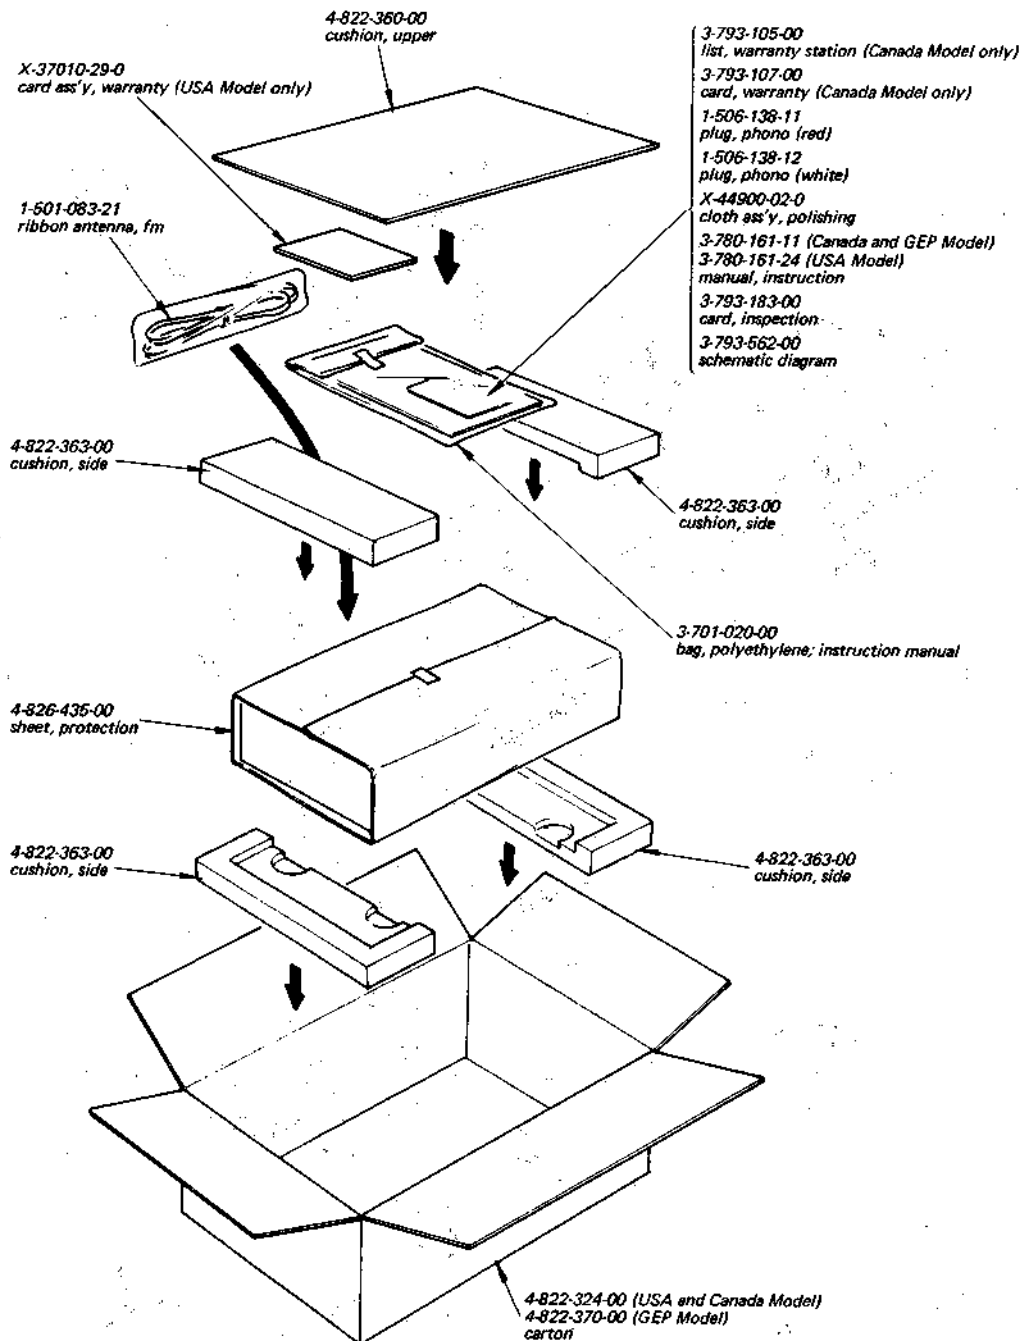

Note:

USA Model Serial No. 807,001 and later
 Canada Model Serial No. 700,001 and later
 GEP Model Serial No. 400,001 and later

Repacking