

TA-F7/TA-F7B

UK Model
AEP Model

TA-F7: silver panel
TA-F7B: black panel



TA-F7

INTEGRATED STEREO AMPLIFIER

SPECIFICATIONS

GENERAL

Power Requirements: 220V, 50/60 Hz (AEP model)
240V, 50/60 Hz (UK model)

Power Consumption: 400W (AEP model)
410W (UK model)

Dimensions: Approx. 430 (w) x 170 (h) x 420 (d) mm
17 (w) x 6 3/4 (h) x 16 5/8 (d) inches
Including projecting parts and controls

Weight: Approx. 20.3 kg, 44 lb 12 oz (net)
Approx. 24.3 kg, 53 lb 9 oz (with shipping
carton)

Frequency Response: PHONO 1, 2 RIAA equalization curve ± 0.2 dB
TUNER
AUX 1, 2 } 5–100,000 Hz ± 0 dB
TAPE 1, 2 }

Tone Controls: BASS ± 10 dB at 30 Hz (TURNOVER
FREQ 150 Hz)
 ± 10 dB at 60 Hz (TURNOVER
FREQ 300 Hz)
TREBLE ± 10 dB at 20 kHz (TURNOVER
FREQ 4 kHz)
 ± 10 dB at 40 kHz (TURNOVER
FREQ 8 kHz)

Filters: LOW 12 dB/oct. below 30 Hz
HIGH 12 dB/oct. above 9 kHz

PREAMPLIFIER SECTION

Harmonic Distortion: Less than 0.015% at rated output
(AEP model)
Less than 0.015% at 1W (UK model)

IM Distortion: Less than 0.015% at rated output
(AEP model)
Less than 0.015% at 1W (UK model)

— Continued on next page —

SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY SHADING AND MARK ON THE SCHEMATIC DIAGRAMS, EXPLODED VIEWS AND IN THE PARTS LIST ARE CRITICAL TO SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS. PUBLISHED BY SONY.

SONY®
SERVICE MANUAL

TA-F7/TA-F7B

Inputs:

	Sensitivity	Impedance	Maximum Input Capability (THD 0.015% at 1kHz)	S/N (weighting network, input level)
PHONO 1 PHONO 2	2.5 mV (-50 dB)	50 kΩ	250 mV (-10 dB)	75 dB (A, 2.5 mV)
TUNER AUX 1, 2 TAPE 1, 2	150 mV (-14.5 dB)	50 kΩ	—	95 dB (A, 150 mV)

Outputs:

	Output Level	Impedance
REC OUT 1,2	150 mV	10 kΩ
PRE OUTPUT	1 V	1.5 kΩ

POWER AMPLIFIER SECTION

Continuous RMS Power Output: Both channels driven simultaneously
 (rated output) At 20–20,000 Hz
 (Less than 0.015% harmonic distortion) 70 + 70W (8Ω)
 According to DIN 45500
 70 + 70W (8Ω)

Power Bandwidth: 5–40,000 Hz, IHF (8Ω, 0.015 THD)

Damping Factor: 60 (8Ω, 1 kHz)

Harmonic Distortion: Less than 0.015% at rated output
 Less than 0.015% at 1W output

IM Distortion: (60 Hz:7 kHz = 4:1) Less than 0.015% at rated output
 Less than 0.015% at 1W output

Frequency Response: dc-100,000 Hz ±1 dB (1W)

S/N Ratio: Greater than 110 dB, short-circuited input

Residual Noise: Less than 0.12 mV

Inputs: POWER INPUT
 Sensitivity 1V (for rated output)
 Impedance 100 kΩ


Outputs: SPEAKER A, B
 Accept speakers of 8Ω or more
 HEADPHONES
 Accepts low- and high-impedance stereo headphones

$$0 \text{ dB} = 0.775 \text{ V}$$




MODEL IDENTIFICATION

— Specification Label —

UK model

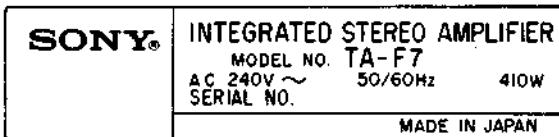

AEP model

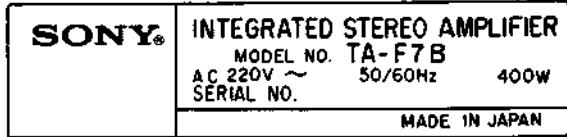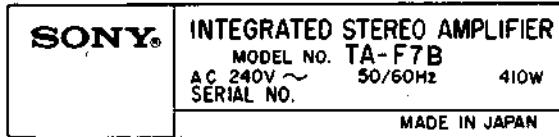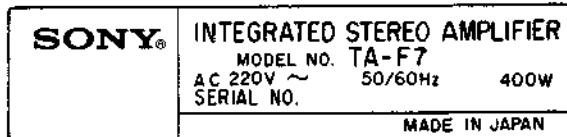

SECTION 1 OUTLINE

1-1. CIRCUIT DESCRIPTION

1-1-1. Equalizing Amplifier

Refer to Fig. 1-1. The input signal from PHONO 1 or PHONO 2 goes to the gate G1 of the dual-FET differential amplifier Q101 and the feedback signal from the output goes to the gate G2. Q101 amplifies these two input signals, and its output signals at the drains D1 and D2 are in reversed phase. Q106 and D101 are the load of the differential amplifier and compose a current-mirror circuit. This current mirror makes the differential amplifier have more gain and less distortion by re-using the output current in other than the load of the differential amplifier and making it a load current. The output signal appeared in the drain D1 next goes to the base of Q107.

Q107 and Q108 compose a darlington circuit, and this circuit has a proper gain by having a constant-current source Q109. Q102 in the source return of the differential amplifier Q101 is a constant-current source and serves as an infinite impedance against the input signal to the differential amplifier. Transistor Q102 is used instead of a large resistor in this stage, because the dual FET Q101 is drawing a relatively large current from the limited B+ voltage to improve audio quality.

Q103 and Q104 compose a voltage regulator and the voltage V_0 , namely the base-bias of Q102, is maintained constant to make Q102 stable. The current I_1 , which flows through the constant-current source Q102 is expressed as

$$I_1 = \frac{V_0 - V_{BE1}}{R106}$$

where $V_0 = V_{BE2} + V_1$

V_1 is determined by I_0 which flows through R112 by V_{BE2}

So, I_1 is determined by V_{BE1} and V_{BE2} and is independent upon B+ and B- voltages, namely I_1 is constant.

Furthermore, this equalizing amplifier is stabilized dc-current-wise by utilizing a dc feedback circuit of Q105 as well as the dependent feedback circuit to produce the RIAA deemphasis curve. Here, Q105 serves as a voltage follower and its dc gain G is determined as

$$G = \frac{R110}{R107} \approx 30 \text{ dB}$$

The lower-side cutoff frequency is determined by R116 and C107 in the gate circuit of Q105.

The RIAA curve to be used as a record amplifier is produced by the feedback components C105, C106, R108, R109, R120 and C109. And the output

signal is fed back to the gate G2 of Q101, thus making a voltage feedback loop.

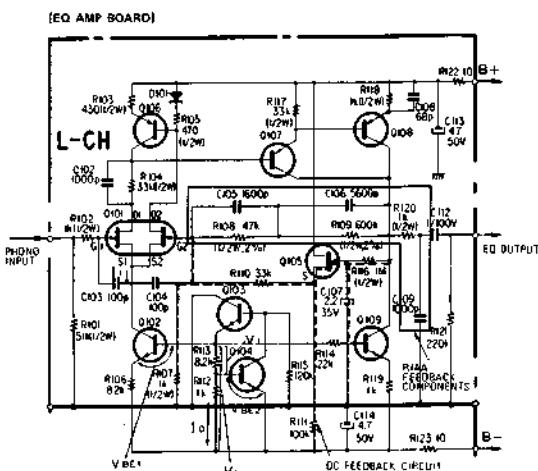


Fig. 1-1.

1-1-2. Power Amplifier

(1) Class-A Amplifier

Refer to Fig. 1-2 and Fig. 1-3. The output signal from the preamplifier section goes to the gate G1 of the dual-FET differential amplifier Q605. The output signal of the class-B amplifier is fed through a feedback route back to the other gate G2 of Q605. These two input signals are amplified in Q605 and mutually reversed-phase output signals are obtained at its drains D1 and D2. Q603, Q604 and Q605 are composing a cascoded differential amplifier, and Q601 and Q602 are its load. Q601 and Q602 also compose a current-mirror circuit and of a push-pull configuration. By utilizing this current-mirror circuit, two outputs are compounded resulting in a high amplification with less distortion.

Due to the high-gain operation of the first stage, Q603 and Q604 lock the drain voltage V_D of Q605 and shift the level, and thus reducing noise component produced by the drain current. The locked drain voltage V_D is expressed as

$$V_D \approx V_{CC} \times \frac{R_{604}}{R_{603} + R_{604}} \approx 15\text{ V}$$

The output signal at the drain of Q603 next goes to the class-A cascoded amplifier composed of Q607 and Q608 which has a constant-current load Q611. And its output signal is next applied to and voltage amplified by the following class-B amplifier.

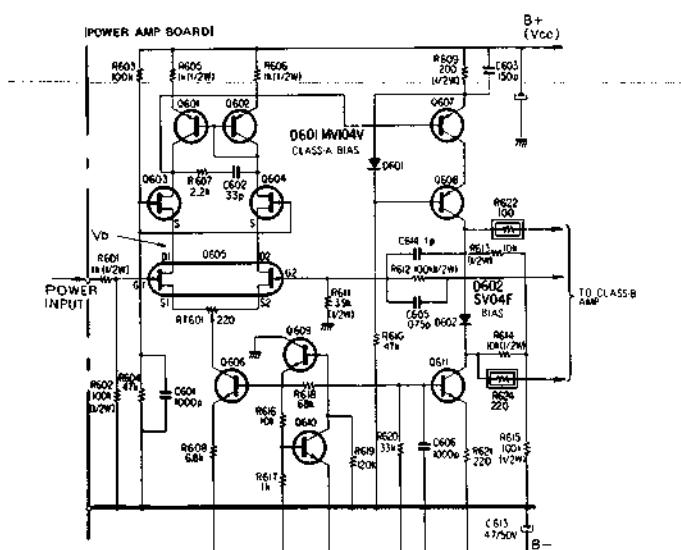


Fig. 1-2.

These two cascaded amplifiers composed of Q603 to Q605, and of Q607 and Q608 are the combination of the common emitter (or source) and

common base (or gate) circuits. In these amplifiers, the mirror effect due to the feedback capacitor from the output side does not present, so they are increasing the transmission capability of high-frequency component. Furthermore, R607 and C602 are connected inbetween the drains of Q603 and Q604 of the first-stage cascaded differential amplifier to make the load impedance low at high frequency, and thus reducing the fluctuation of the amplifier gain.

(B) Class-B Amplifier

Refer to Fig. 1-3. These class-B amplifiers are cascode-type amplifiers utilizing features of the bipolar transistors and V-FETs, and they are improving the signal-transmission characteristics.

Q616 is a class-B driver and emitter follower followed by the final-stage power amplifier. The final-stage power amplifier is a pure-complementary circuit composed of cascode configuration of Q618, Q619 and Q901 to Q903.

When the bipolar transistors and V-FETs are connected in a cascode configuration, V_{CE} of the bipolar transistors Q618 and Q619 becomes the reversed bias of the gate of V-FET and this bias prevents V-FET from damaging, otherwise V-FET may be damaged by a huge current equivalent to $Idss$. This reversed bias of V-FET provides a good rejection characteristic against the fluctuation of the power supply voltage. In this configuration, the voltage applied to the bipolar transistor becomes as low as around 15V and bipolar transistors with a high transition frequency f_T can be combined.

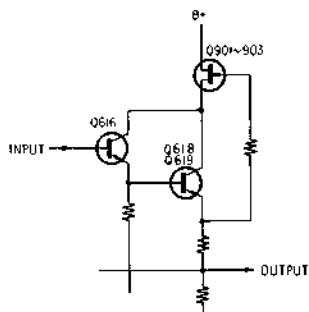


Fig. 1-3.

1-1-3. Power Supply

Refer to Fig. 1-4. This regulated power supply provides a power for the class-B amplifier. This voltage regulator uses a constant-current circuit Q706 in the base-bias circuit of the control transistors Q704 and Q705. And this voltage regulator provides a high input impedance, low output impedance and a good regulation against the fluctuation in the input voltage.

Therefore, a low output impedance is obtainable with a transistor having a large h_{FE} . So in the actual circuit in Fig. 1-4, a darlington configuration is used in the place of Q1 in Fig. 1-5 together with a large resistance R1.

To obtain a good rejection factor against the ripple component, a bootstrap circuit composed of R709 and D711 is used.

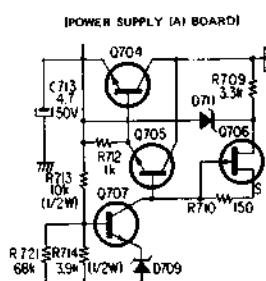


Fig. 1-4.

Fig. 1-5 shows the basic voltage-regulating circuit.




Fig. 1-5.

The voltage regulation factor is expressed as

$$\frac{\Delta V_o}{\Delta V_i} \approx \frac{R_d}{R_1 + R_d}$$

where, ΔV_o = fluctuation of output voltage

ΔV_i = fluctuation of input voltage

R_d = active resistance of D1

Accordingly, on a constant R_d , the larger R_1 the better a voltage regulation. In the circuit in Fig. 1-4, a good voltage regulation is obtained by utilizing an FET-type constant-current source and a large R_1 .

The output impedance of the circuit in Fig. 1-5 is expressed as

$$R_o \approx \frac{\Delta V_o}{\Delta I_o}$$


$$\approx \frac{R_b + R_d}{1 + h_{FE}}$$

where, R_b = base resistance of Q1

h_{FE} = current amplification factor of Q1

TA-F7/TA-F7B



1-2. BLOCK DIAGRAM

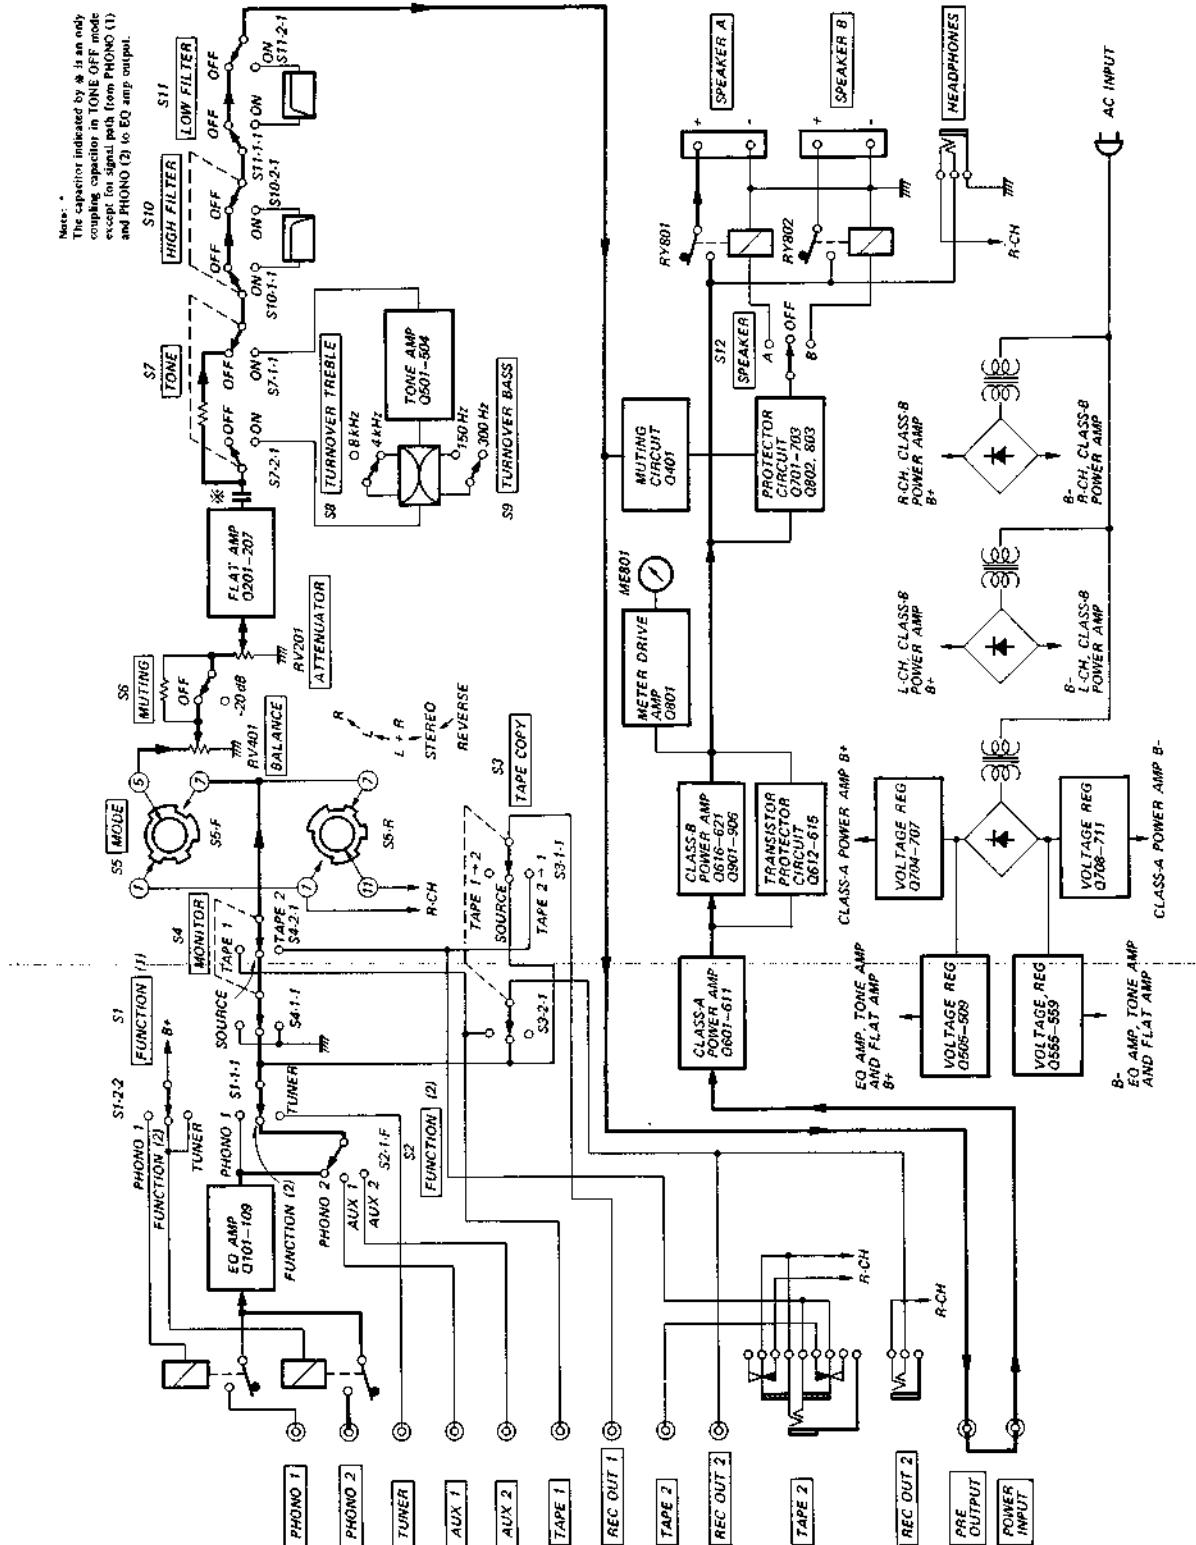


SECTION 2 DISASSEMBLY

Note: Remove in the numerical order.


CASE REMOVAL

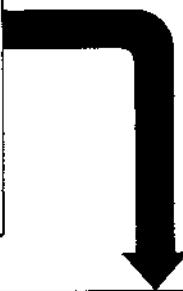
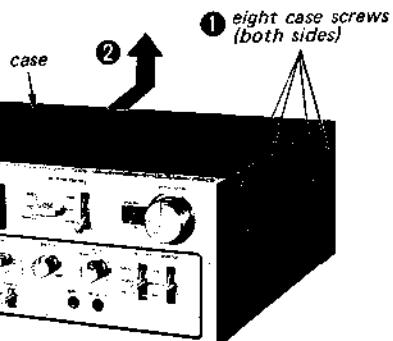


PANEL REMOVAL

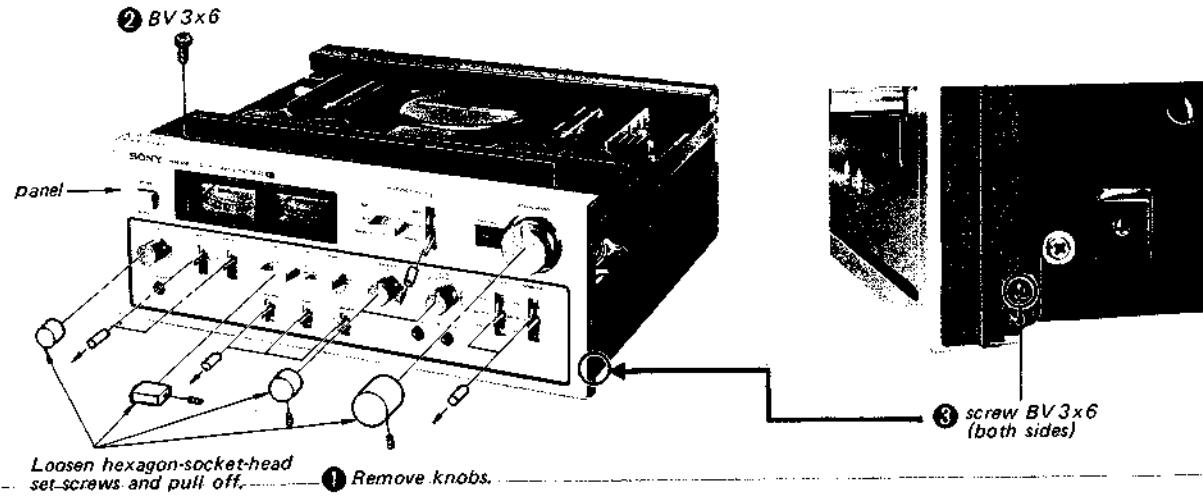


BOTTOM COVER REMOVAL AND PANEL OVERTURNING

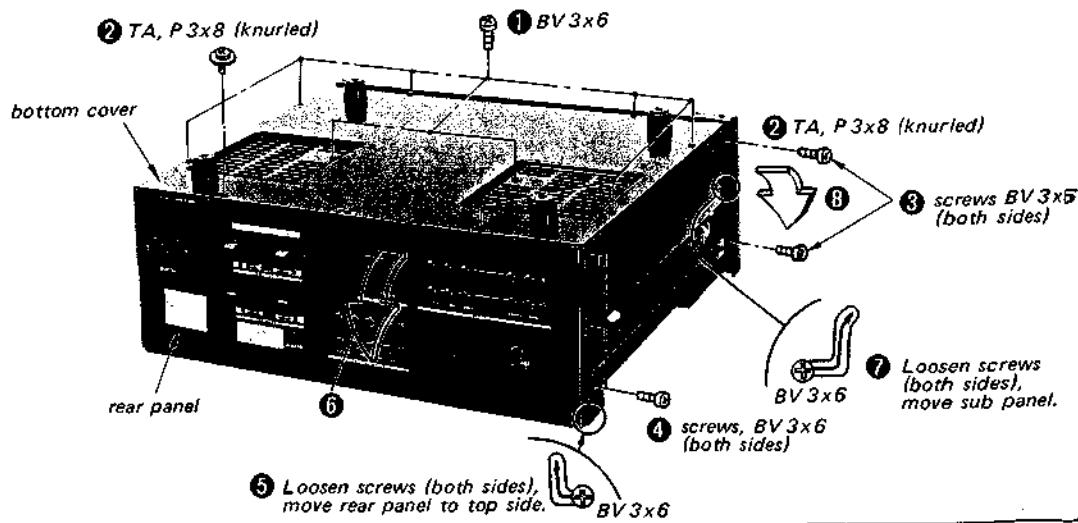

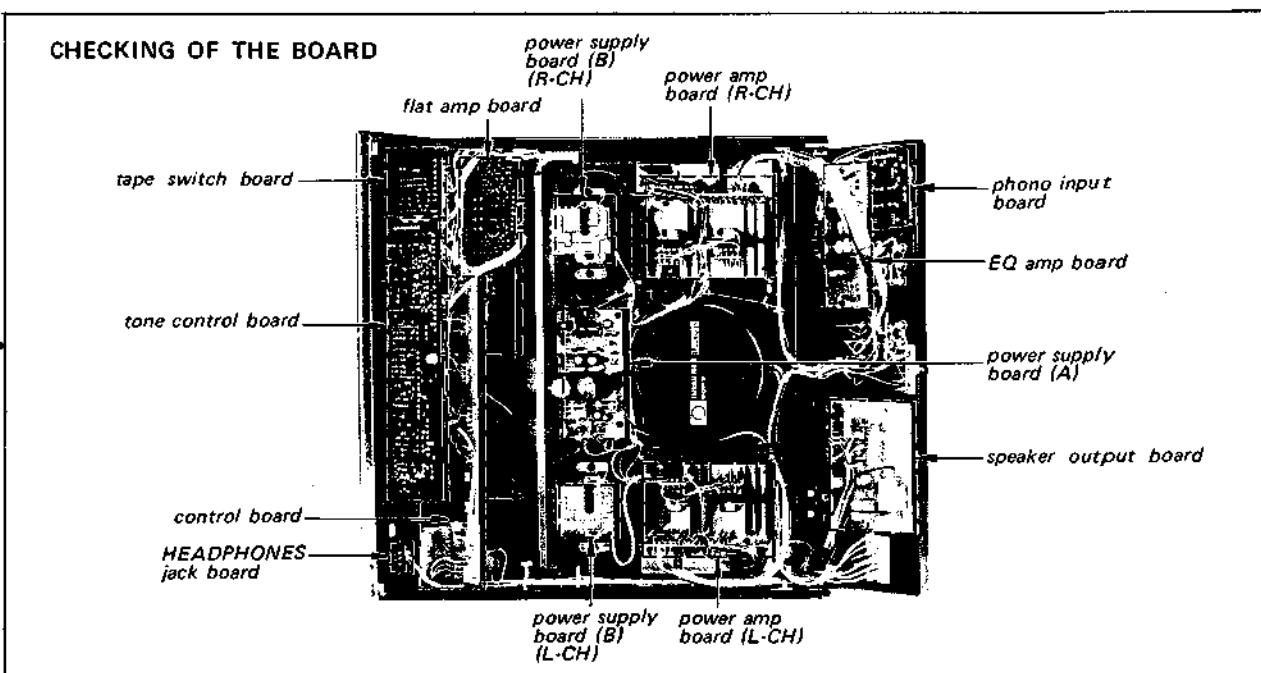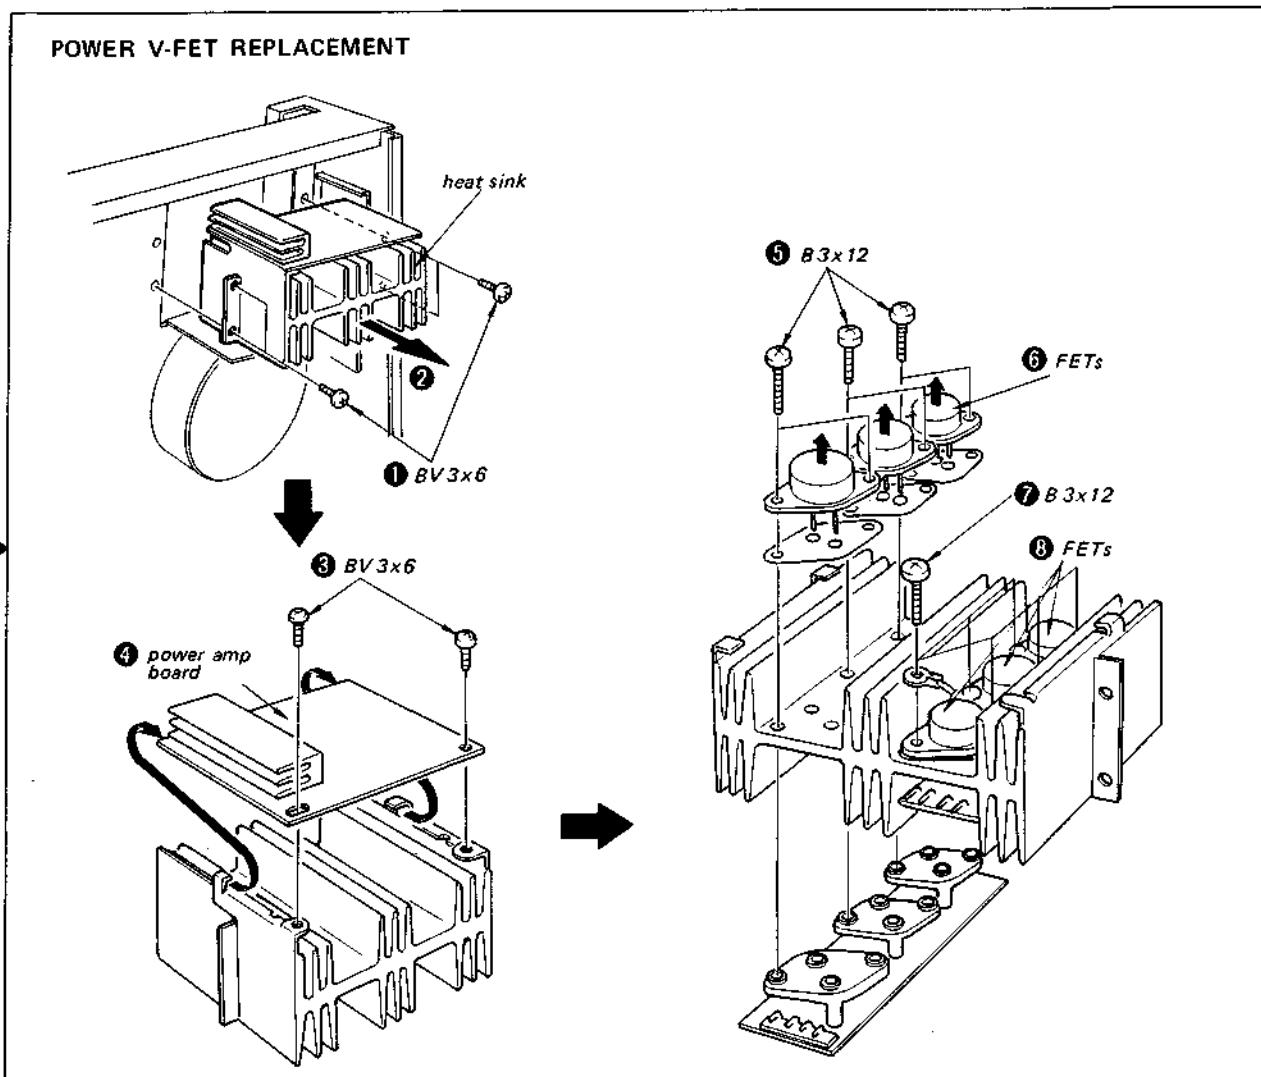

SECTION 3 ADJUSTMENT


Note: 1. As outlined in the circuit description, this set uses bipolar transistors and V-FETs in cascode circuit to maintain stable biasing. When replacing the three P-channel V-FETs 2SK60 and/or the three N-channel V-FETs 2SJ18 in each channel, use three matched ones which have the same V_p (pinch-off voltage)-rank figure printed on them as shown below. The fluctuation of the V_p rank of the three can be acceptable on one-rank-difference basis.




- When the power transistors are replaced, be sure to perform the DC BIAS and DC BALANCE adjustments again.
- Perform DC BIAS and DC BALANCE adjustments a few minutes passed after POWER switch turned ON.
- Repeat DC BIAS and DC BALANCE adjustments a few times because they affect each other.

DC Bias Adjustment

- Connect a dc millivoltmeter to SPEAKER terminals.
- Turn POWER switch ON. Adjust RT601 (L-CH) and RT651 (R-CH) for 0V reading on the millivoltmeter.

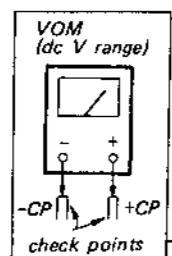

L-CH power amp board
(same as R-CH)

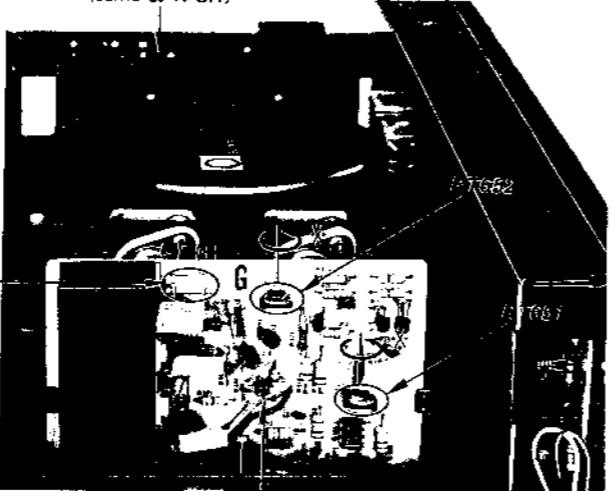

Note:

When the controls are turned in the arrowed direction *, voltage reading increases.

Same power-amp circuit boards are used in both L- and R-channels. Component reference numbers printed on the circuit board are different from the circuit and mounting diagrams.


Power Meter Adjustment

Setting: ATTENUATOR control: maximum
HIGH FILTER switch: OFF
LOW FILTER switch: OFF
MONITOR switch: SOURCE
FUNCTION switch: TUNER

TONE controls:
BALANCE control:
MUTING switch:
OFF

Procedure:

- af osc
 - attenuator 100 kΩ
 - 10W
 - VTVM
 - RT801 (L-CH)
 - RT851 (R-CH)
 - TUNER 1kHz
 - SPEAKER
- Adjust attenuator for 8.9V (10W) reading on VTVM.
 - Adjust RT801 (L-CH) and RT851 (R-CH) so that power meters indicate 10W.

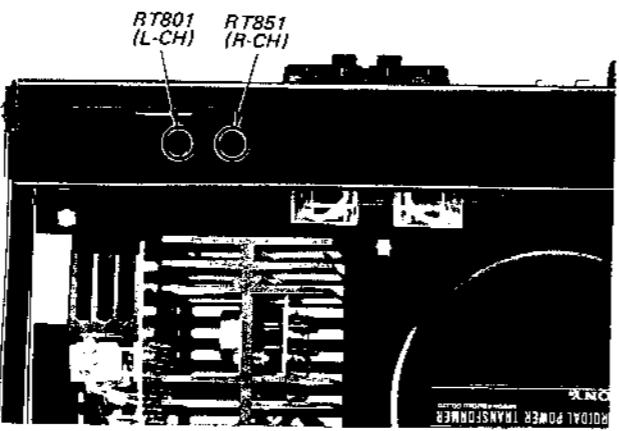


POWER METER TRANSFORMER

SECTION 4 DIAGRAMS

4-1. MOUNTING DIAGRAM (1) — Preamplifier Section —


CIRCUIT BOARD LOCATION

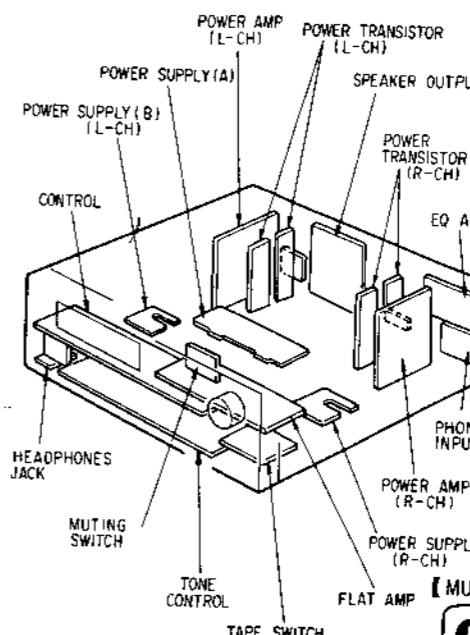


Replacement Semiconductors

For replacement, use semiconductors except in ().


Q101, 151: 2SK97




Q102-104
Q152-154
Q203, 205, 206
Q253, 255, 256




Q105, 155: 2SK43-2 (2SK43)
Q201, 202: 2SK43-3A (2SK43)
Q251, 252




Q106, 107
Q156, 157
Q108, 158
Q204, 254




Q109, 159
Q207, 257



D101, 151: 1S1555




Note:
• Color code of sleeving over the end of the jacket.




- ⊗ : Through hole.
- ⊗⊗ : component-side pattern.
- ⊗⊗⊗ : B+ pattern.
- ⊗⊗⊗⊗ : B- pattern.

Q	206	203	207	204
D	205	202	201	

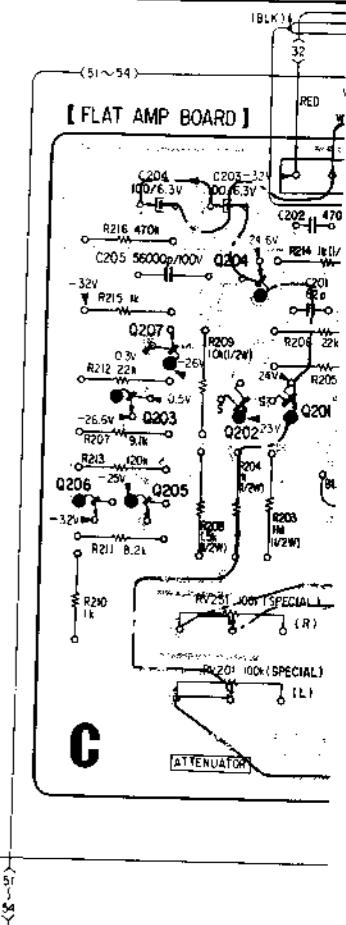

【PHONO INPUT BOARD】

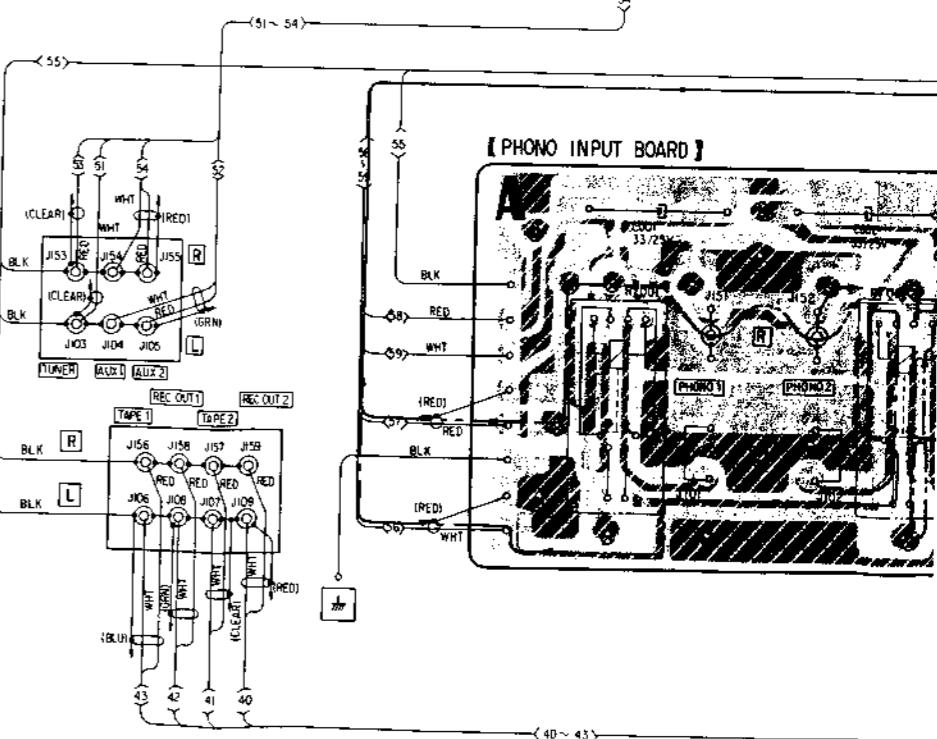


**SECTION 4
DIAGRAMS**

4-1. MOUNTING DIAGRAM (1) – Preamplifier Section – – Conductor Side –


CIRCUIT BOARD LOCATION

Replacement Semiconductors
For replacement, use semiconductors except in ().


Q101, 151: 2SK97




Q102–104
Q152–154
Q203, 205, 206
Q253, 255, 256: 2SC1128




Q105, 155: 2SK43-2 (2SK43)
Q201, 202: 2SK43-3A (2SK43)
Q251, 252: 2SK43-3A (2SK43)




Q106, 107: 2SA639S
Q156, 157: 2SA896
Q204, 254: 2SA896




Q109, 159: 2SC1811
Q207, 257: 2SC1811





D101, 151: 1S1555





Note:
• Color code of sleeving over the end of the jacket.



- : Through hole.
- : component-side pattern.
- : B+ pattern.
- : B- pattern.

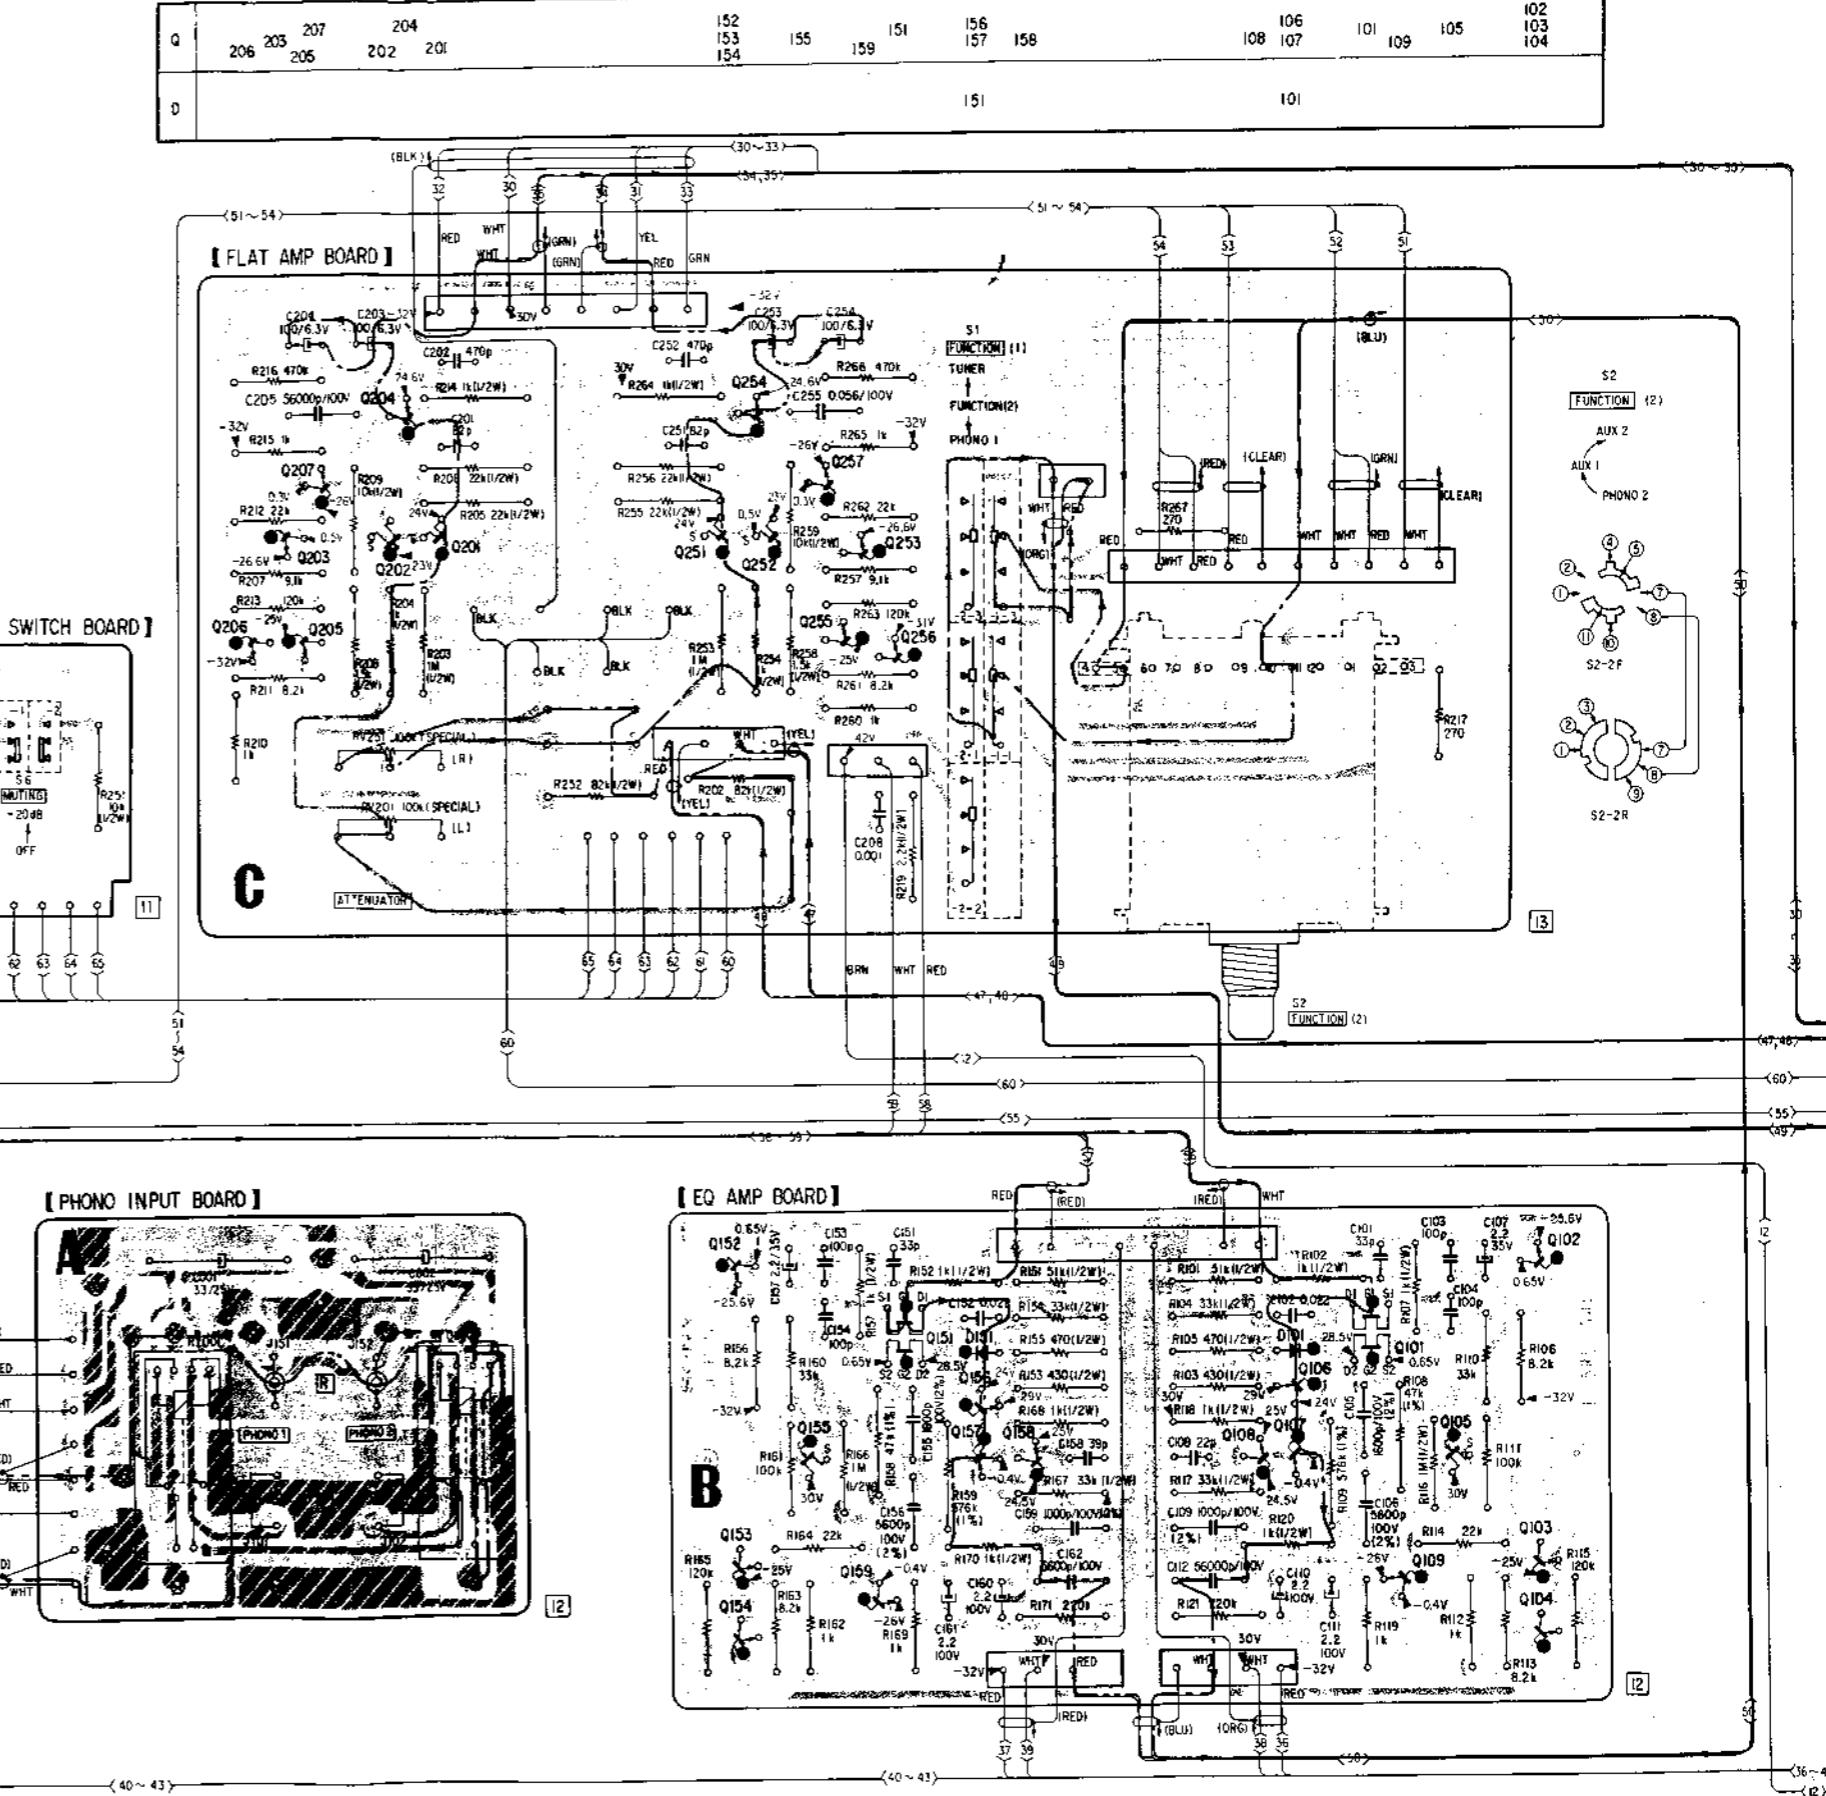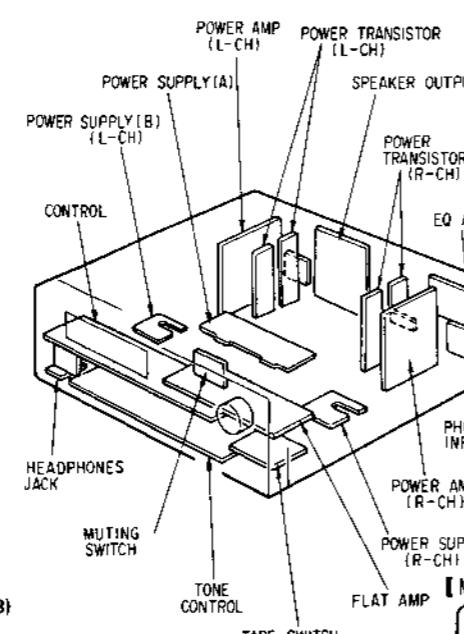

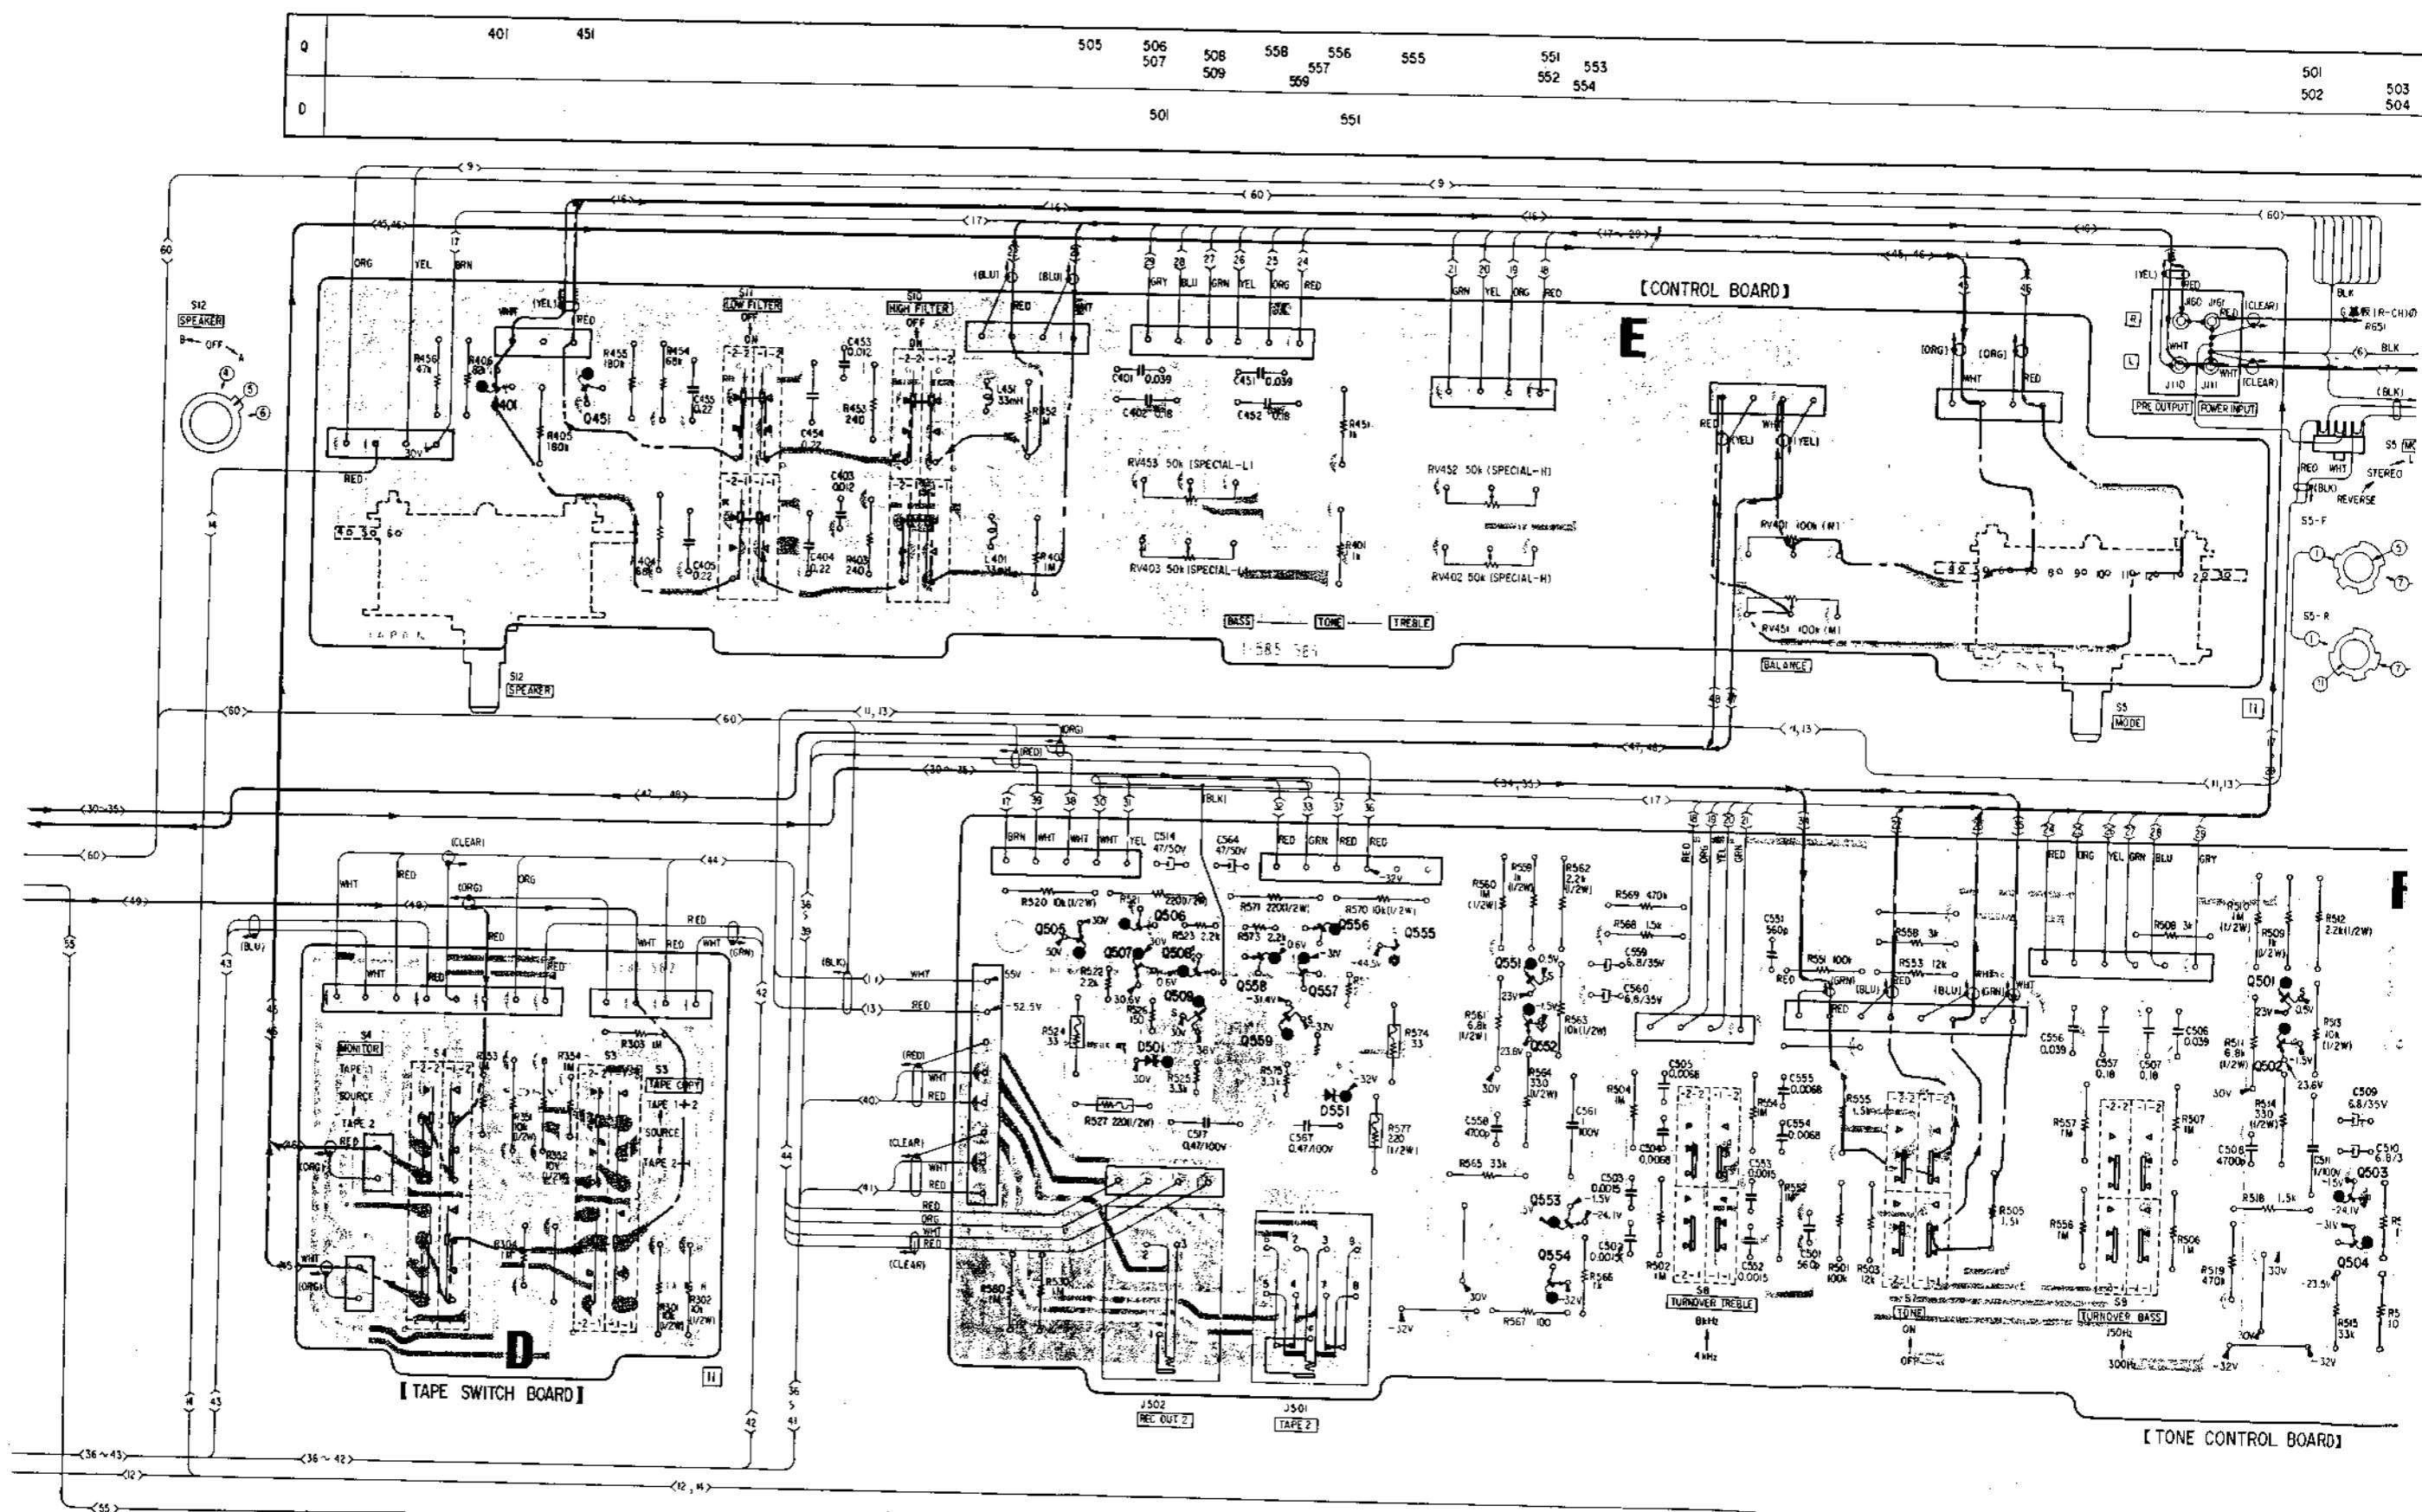


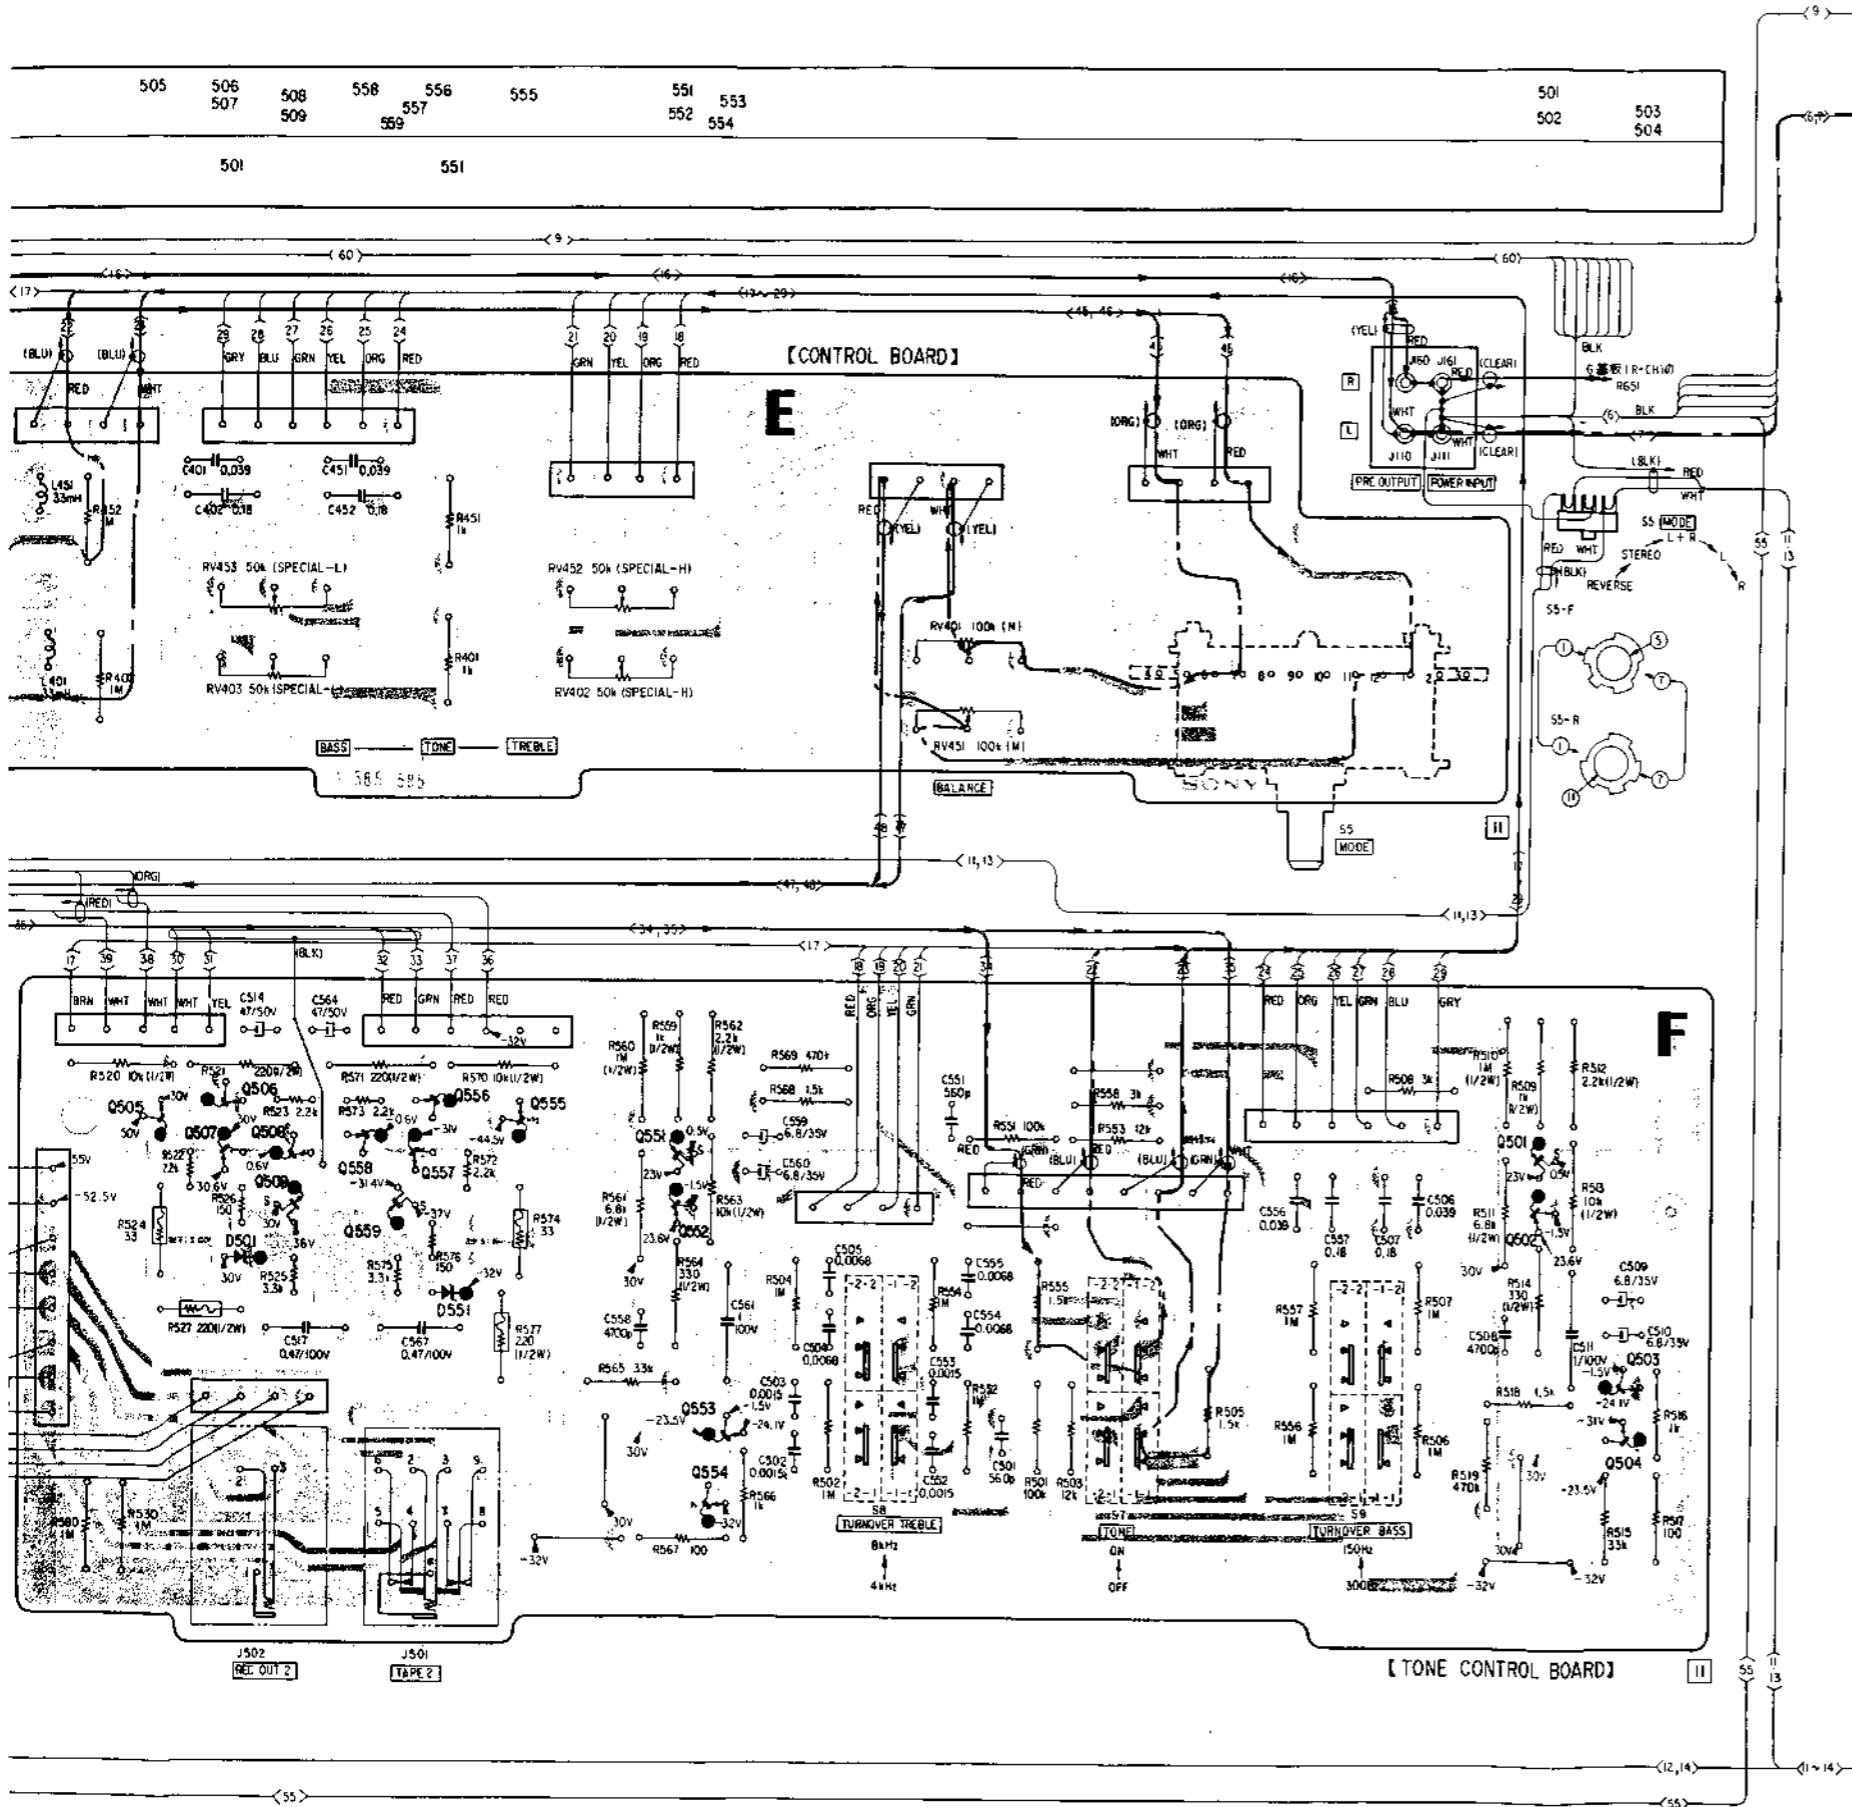


Replacement Semiconductors

For replacement, use semiconductors except in ().


Q401, 451: 2SC1636




Q504, 554: 2SC1128




Q501, 551: 2SK43-3A (2SK43)




Q505: 2SC1061




Q502, 552: 2SA896




— 7 —




Q503, 553: 2SC1811




E C B




Q506, 508, 557: (2SC945)




T
G S D



Q506, 508, 557: 2SC634A




E





Note:

- Color code of sleeves over the end of the jacket.



-  : B+ pattern.
 -  : B- pattern.

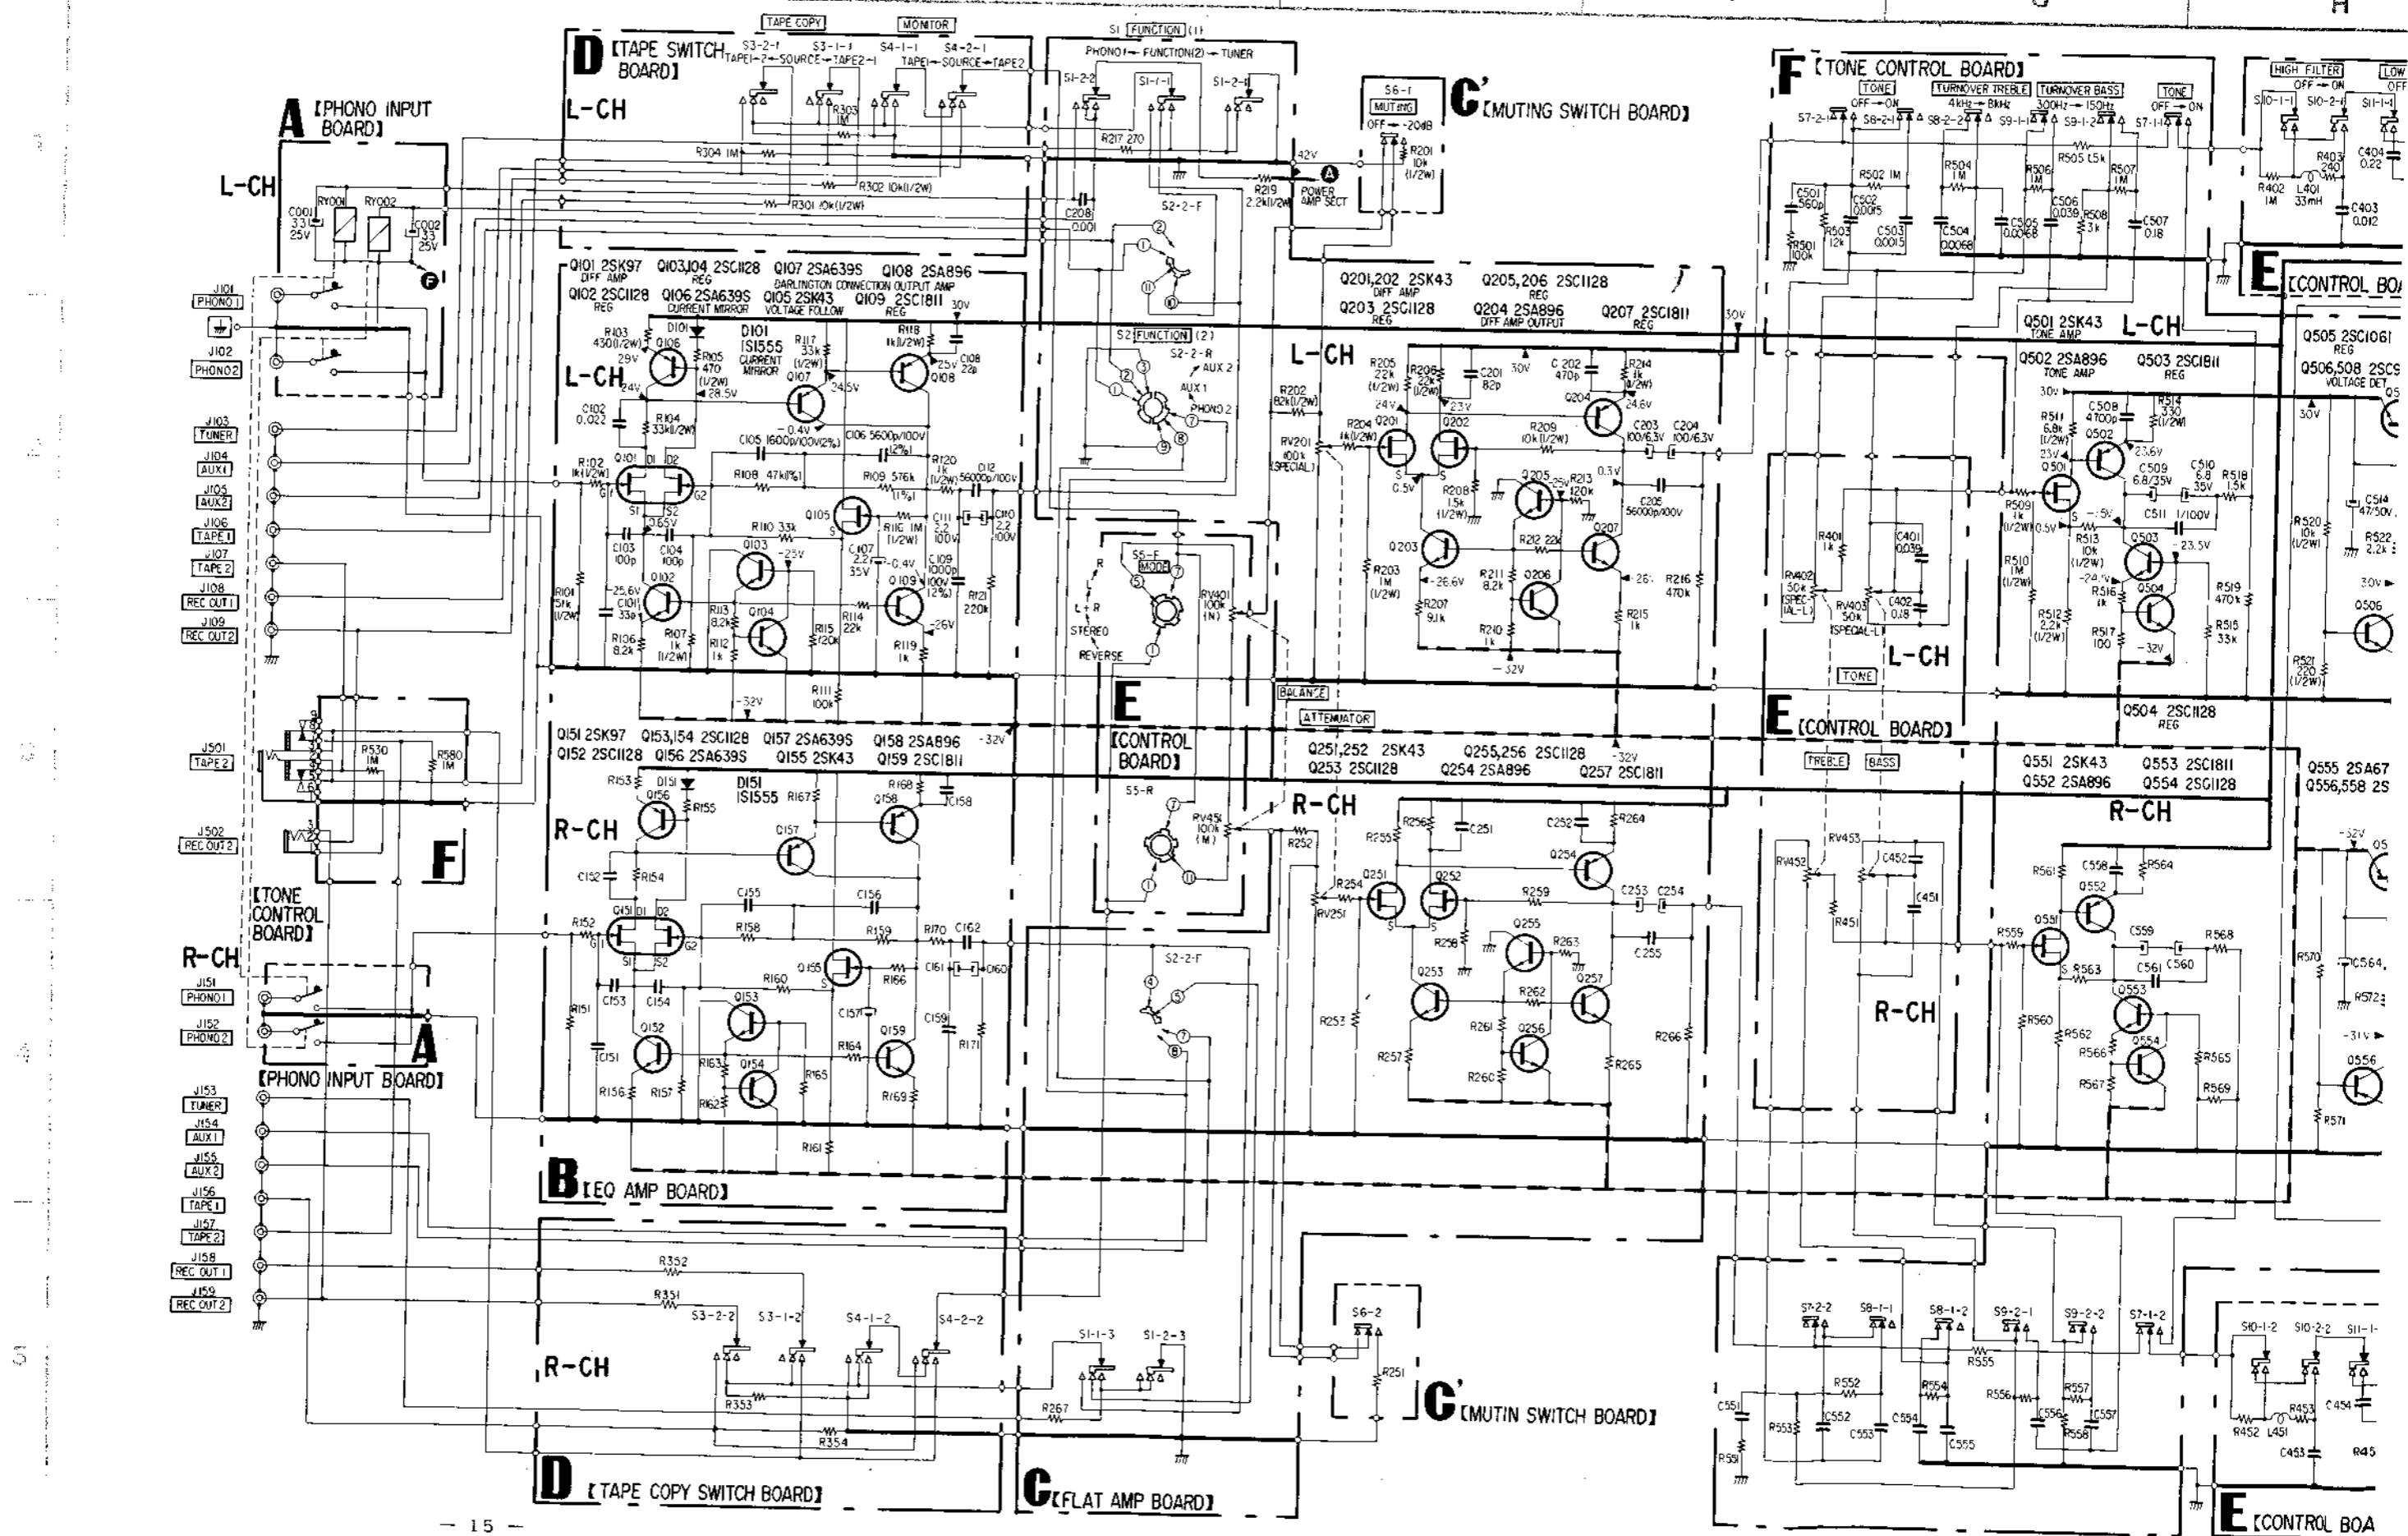

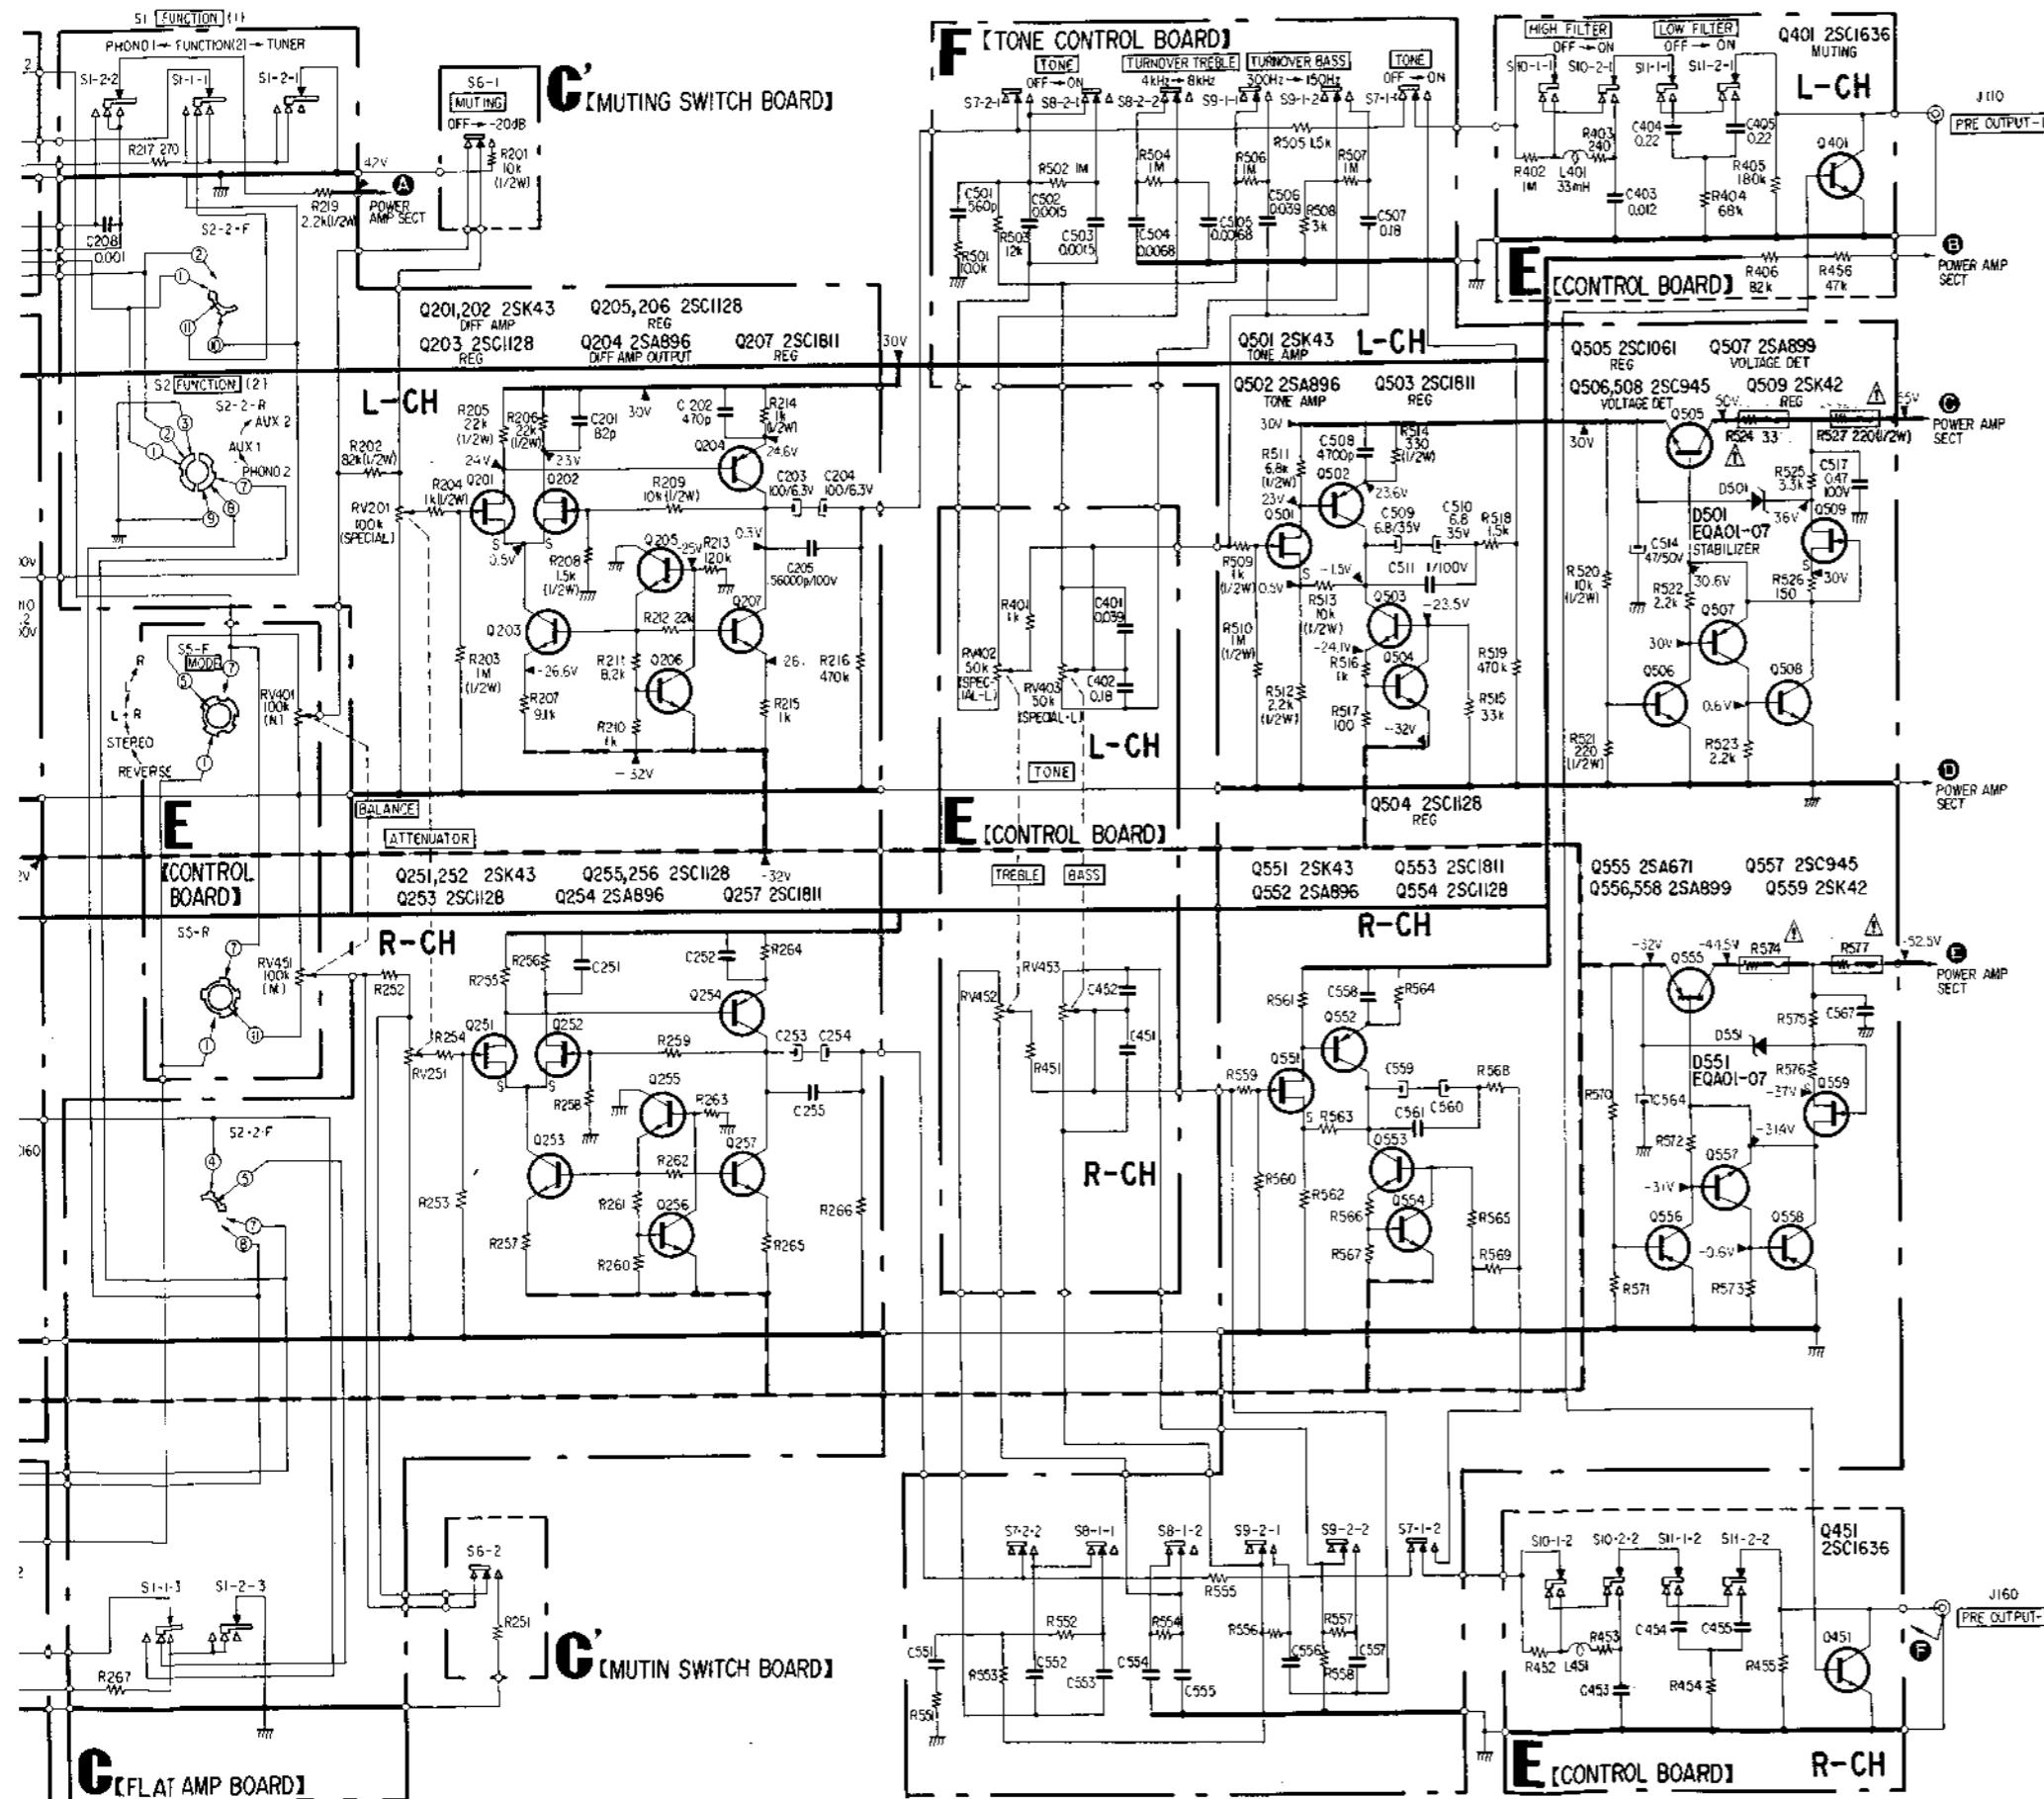

Note: The components identified by shading and **A** mark are critical for safety. Replace only with part number specified.

- Note:**
- Components for right channel have same values as for left channel. Reference numbers are coded from.
 - All capacitors are in μF unless otherwise noted. $\text{pF} = \mu\mu\text{F}$ 50V or less are not indicated except for electrolytics.
 - All resistors are in ohms, $\frac{1}{2}\text{W}$ unless otherwise noted.
 $\text{k}\Omega = 1000\Omega$, $\text{M}\Omega = 1000\text{k}\Omega$
 - --- : fusible resistor.
 - 0% indicates component tolerance.
 - --- : B+ bus.
 - --- : B- bus.
 - \square : panel designation.
 - Readings are taken under no signal conditions with a VOM ($20\text{k}\Omega/\text{V}$).
 - Switch

Ref. No.	Switch	Position
S1	FUNCTION (1)	FUNCTION (2)
S2	FUNCTION (2)	PHONO 2
S3	TAPE COPY	SOURCE
S4	MONITOR	SOURCE
S5	MODE	REVERSE
S6	MUTING	OFF
S7	TONE	OFF
S8	TURNOVER TREBLE	4 kHz
S9	TURNOVER BASS	300 Hz
S10	HIGH FILTER	OFF
S11	LOW FILTER	OFF



Replacement Semiconductors

For replacement, use semiconductors except in ().

Q601, 602	Q613, 614	Q904-906
Q651, 652	Q663, 664	Q954-956
Q612, 615	Q701, 703	: 2SJ18
Q662, 665	Q801, 851	
Q702, 802		
Q803		
Q603, 604	Q616, 666:	Q904-906
Q653, 654} : 2SK30A-GR	2SC1124	2SJ18
(2SK30A)		
Q605, 655:	D601, 651:	D601, 651:
2SK97	(MV104V)	(MV104V)
Q606, 609	Q617, 667:	D601, 651:
Q610, 656} : 2SC1128	2SA706	KB462S
Q659, 660}		
Q607, 657:	Q704:	D602, 652:
2SA639S	2SC1061	SV04F
Q608, 658: 2SA896	Q618, 619}	
	Q668, 669} : 2SC1173	
Q611, 661:	Q710:	D603-606
2SC1811	2SA671	1S1555
	Q620, 621	D653-656
	Q670, 671	D707
Q705, 707:	2SA473	D701-706
(2SC945)		10E2
		D708:
Q705, 707:	2SA899	10E2 (10)
2SC634A		D801, 802} : 1T22A
		D851, 852} : 1T22A
Q901-903	Q709, 710:	D709, 710:
Q951-953} : 2SK60	2SK42-2 (2SK42)	EQB01-11Z (EQ
		D711, 712: EQA01-07 (EOA
D751, 752:	Q901-903	D751, 752:
S5VB	Q951-953} : 2SK60	S5VB












Note

- Color code of sleeveing over the end of the jacket.

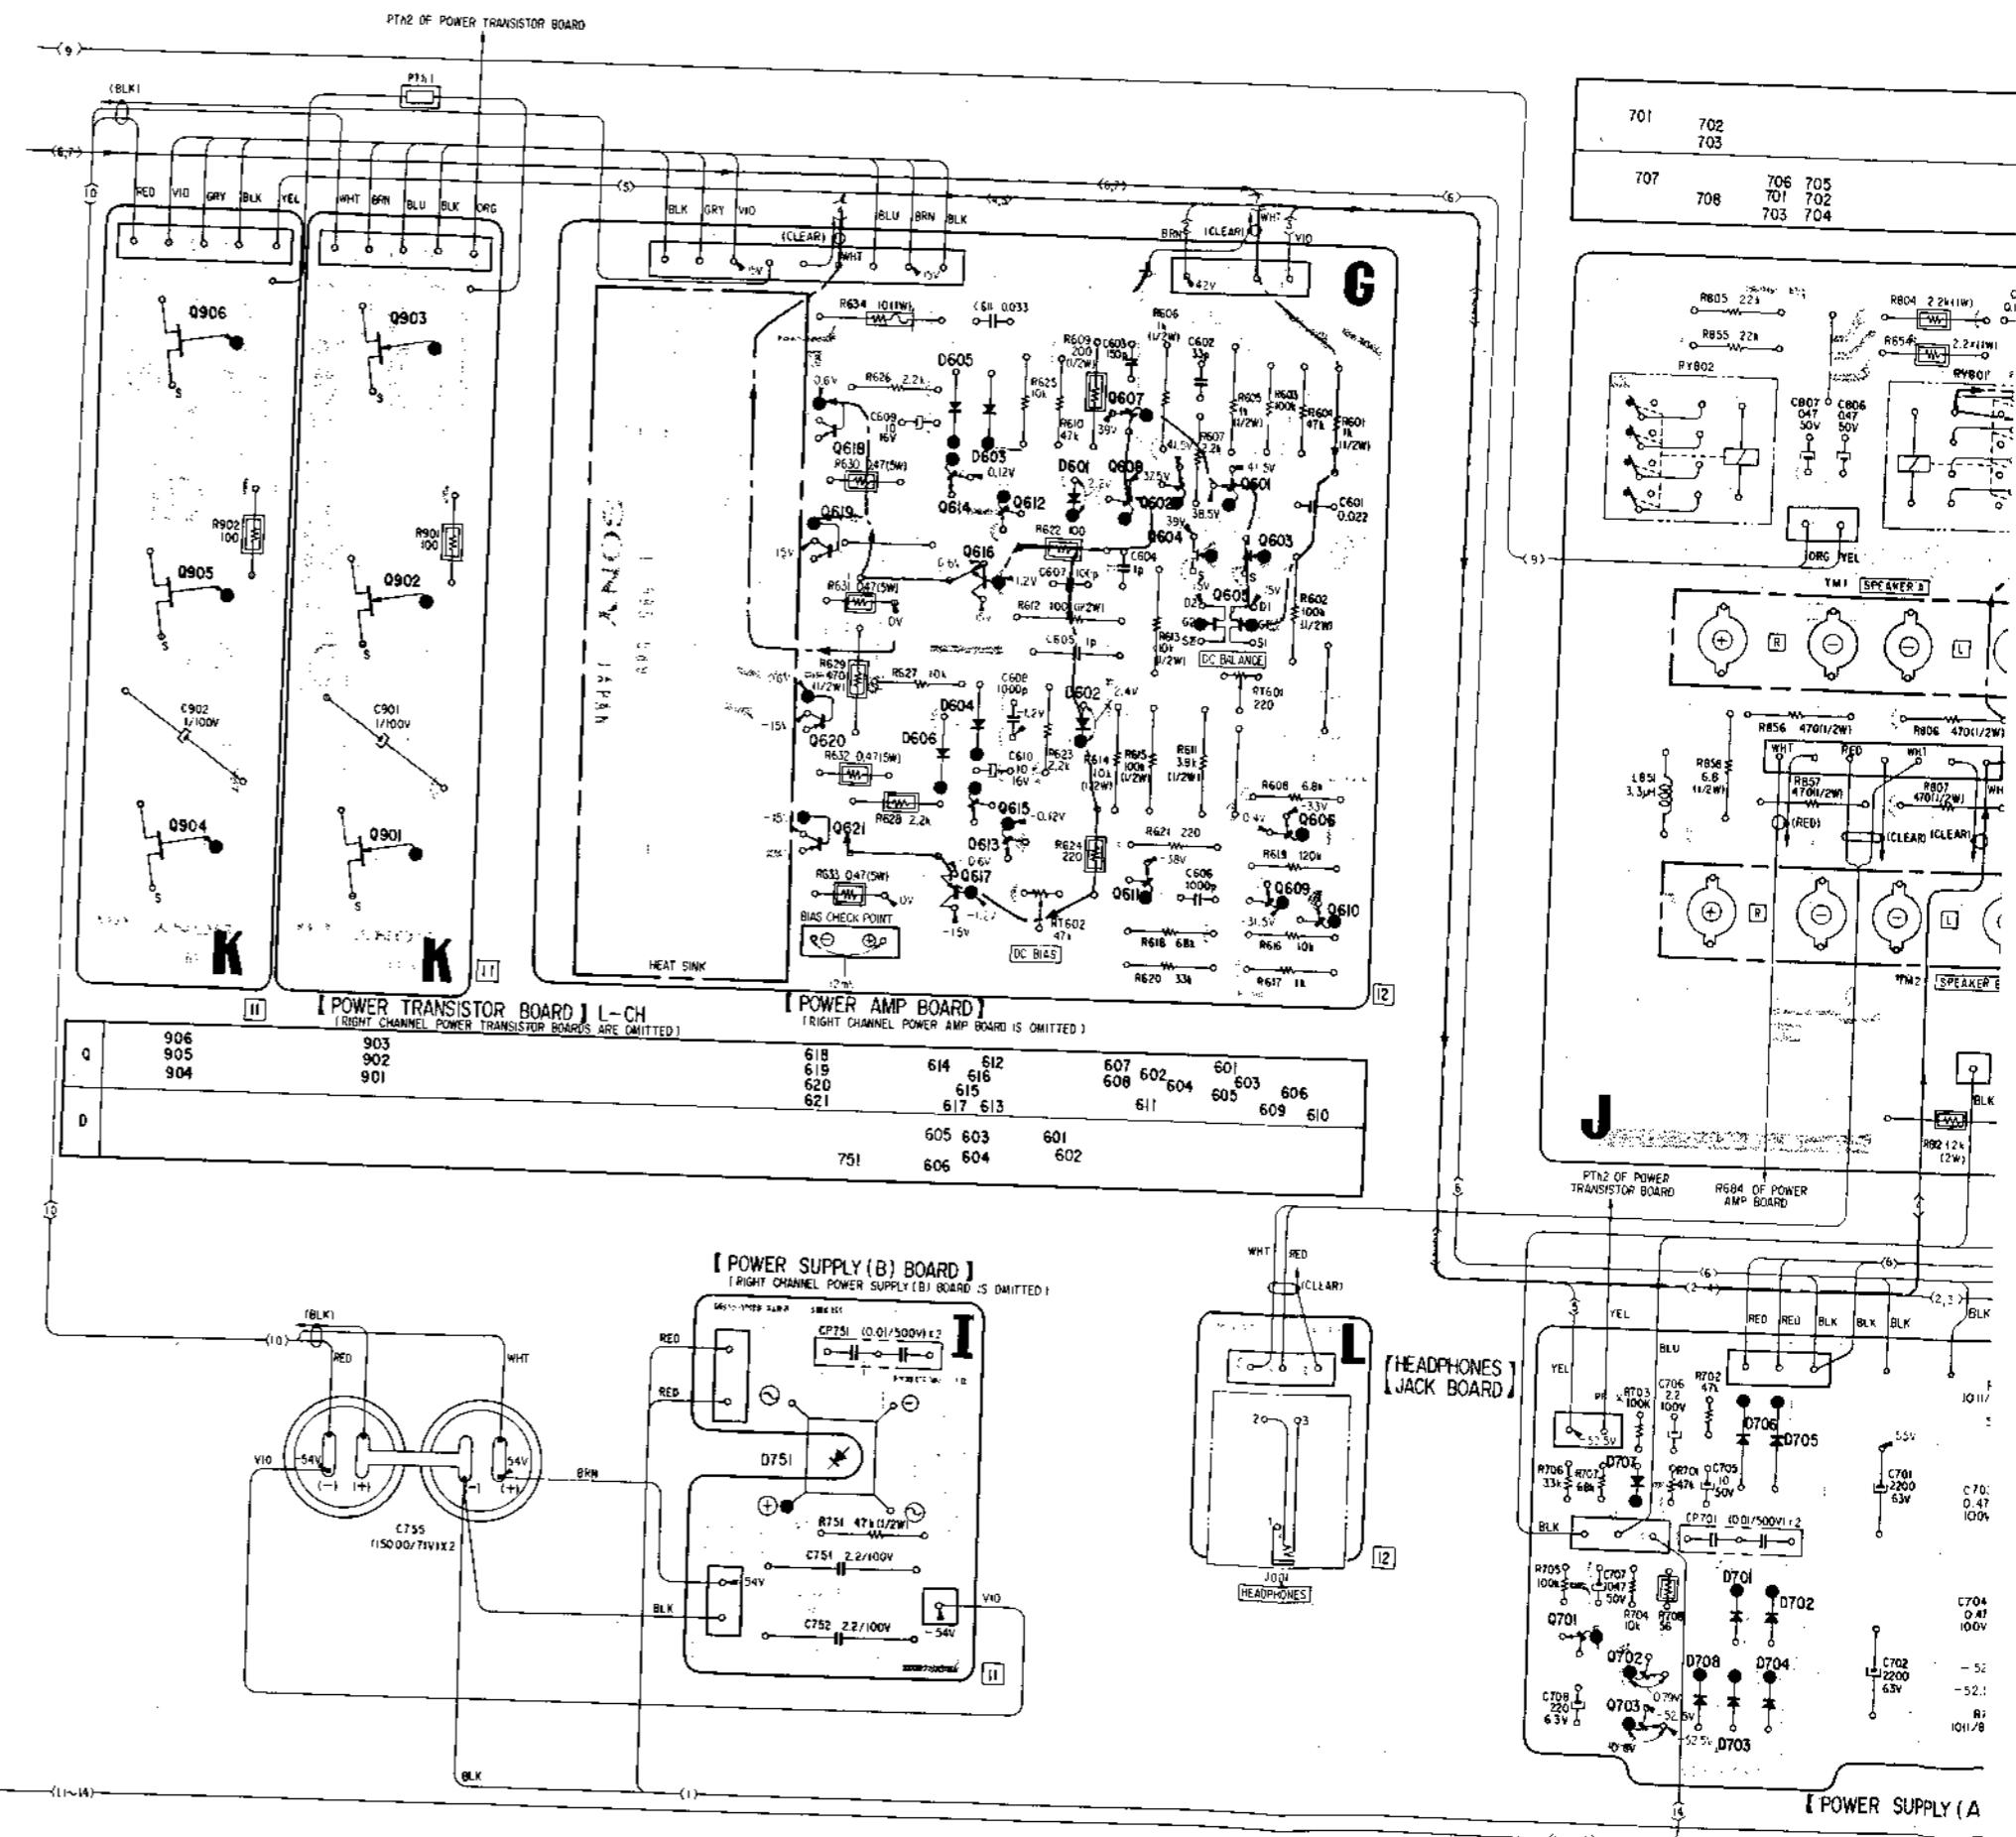


- Conductor Side -


TA-F7/TA-F7B TA-F7/TA-F7B

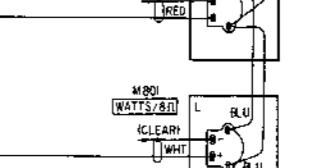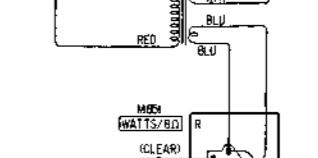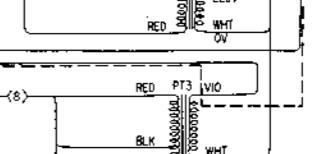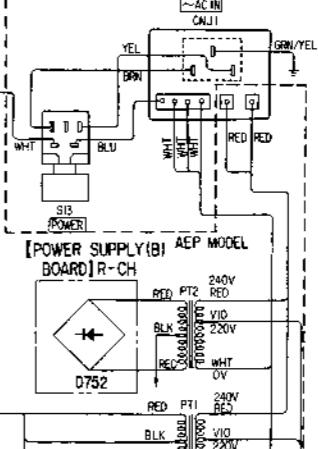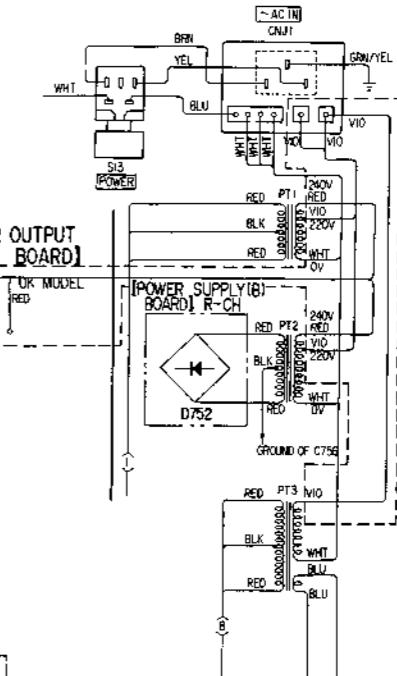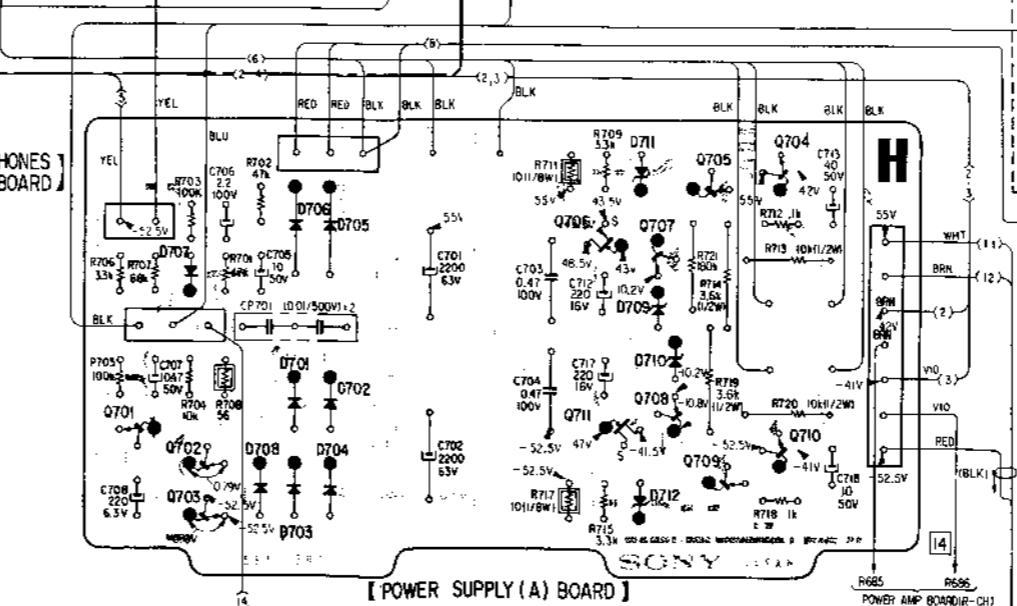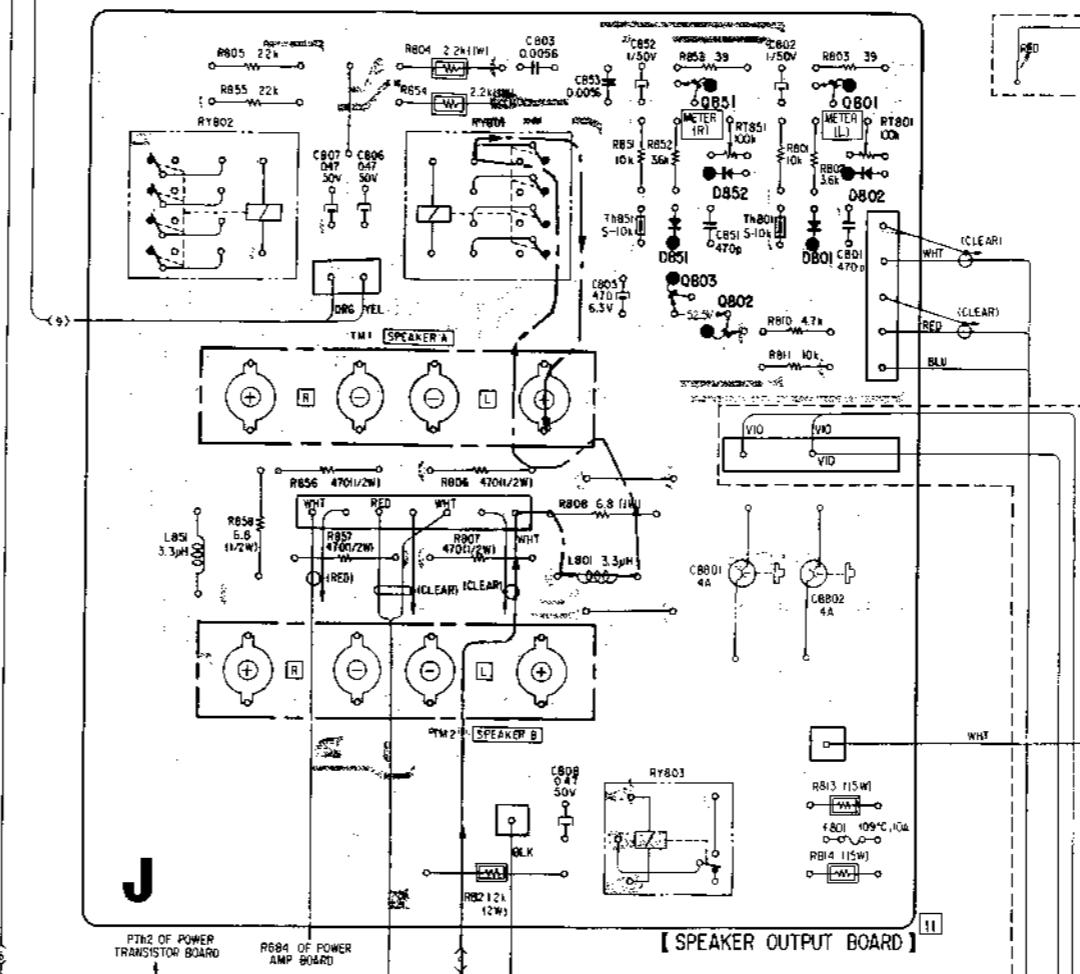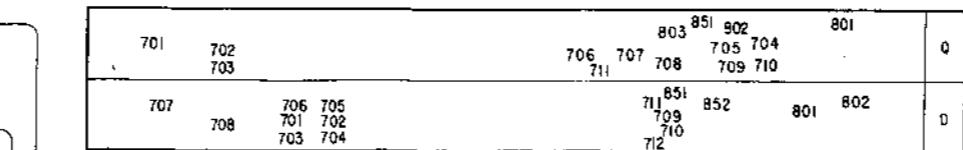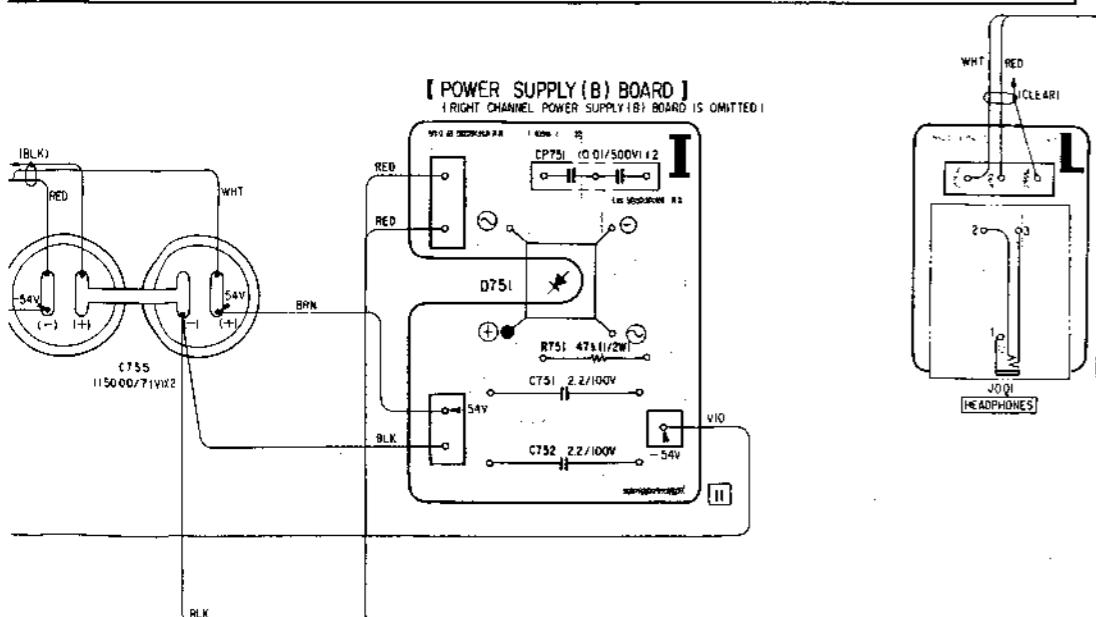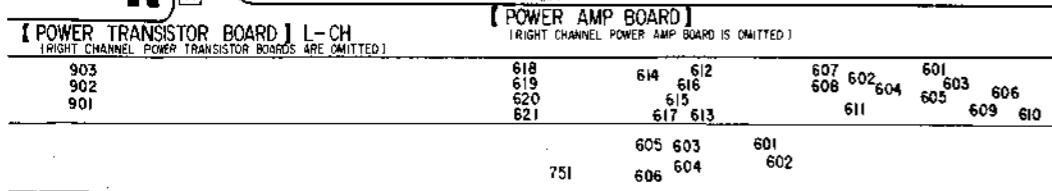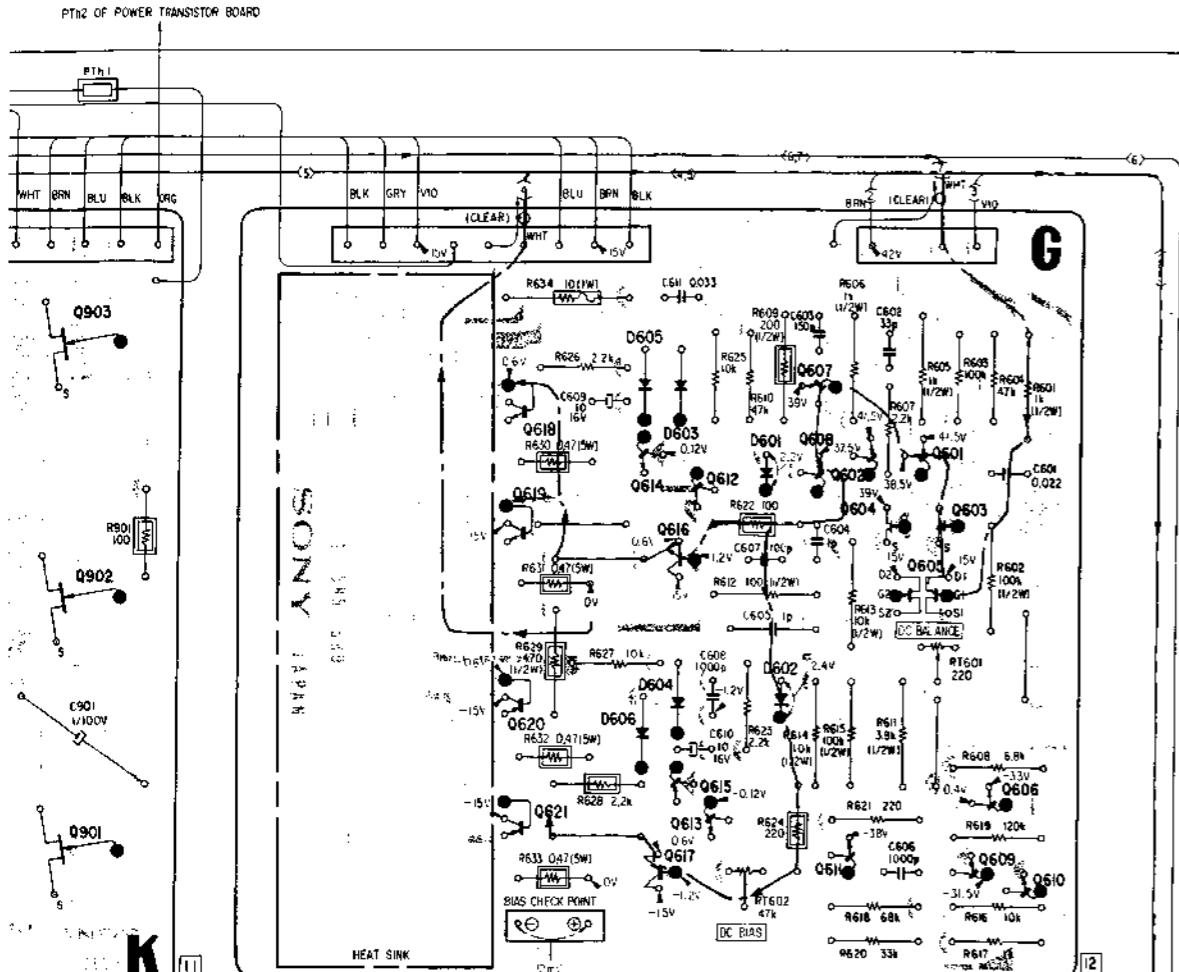

TA-F7/TA-F7B TA-F7/TA-F7B

4-5. SCHEMATIC DIAGRAM – Power Amplifier and Power Supply Sections –

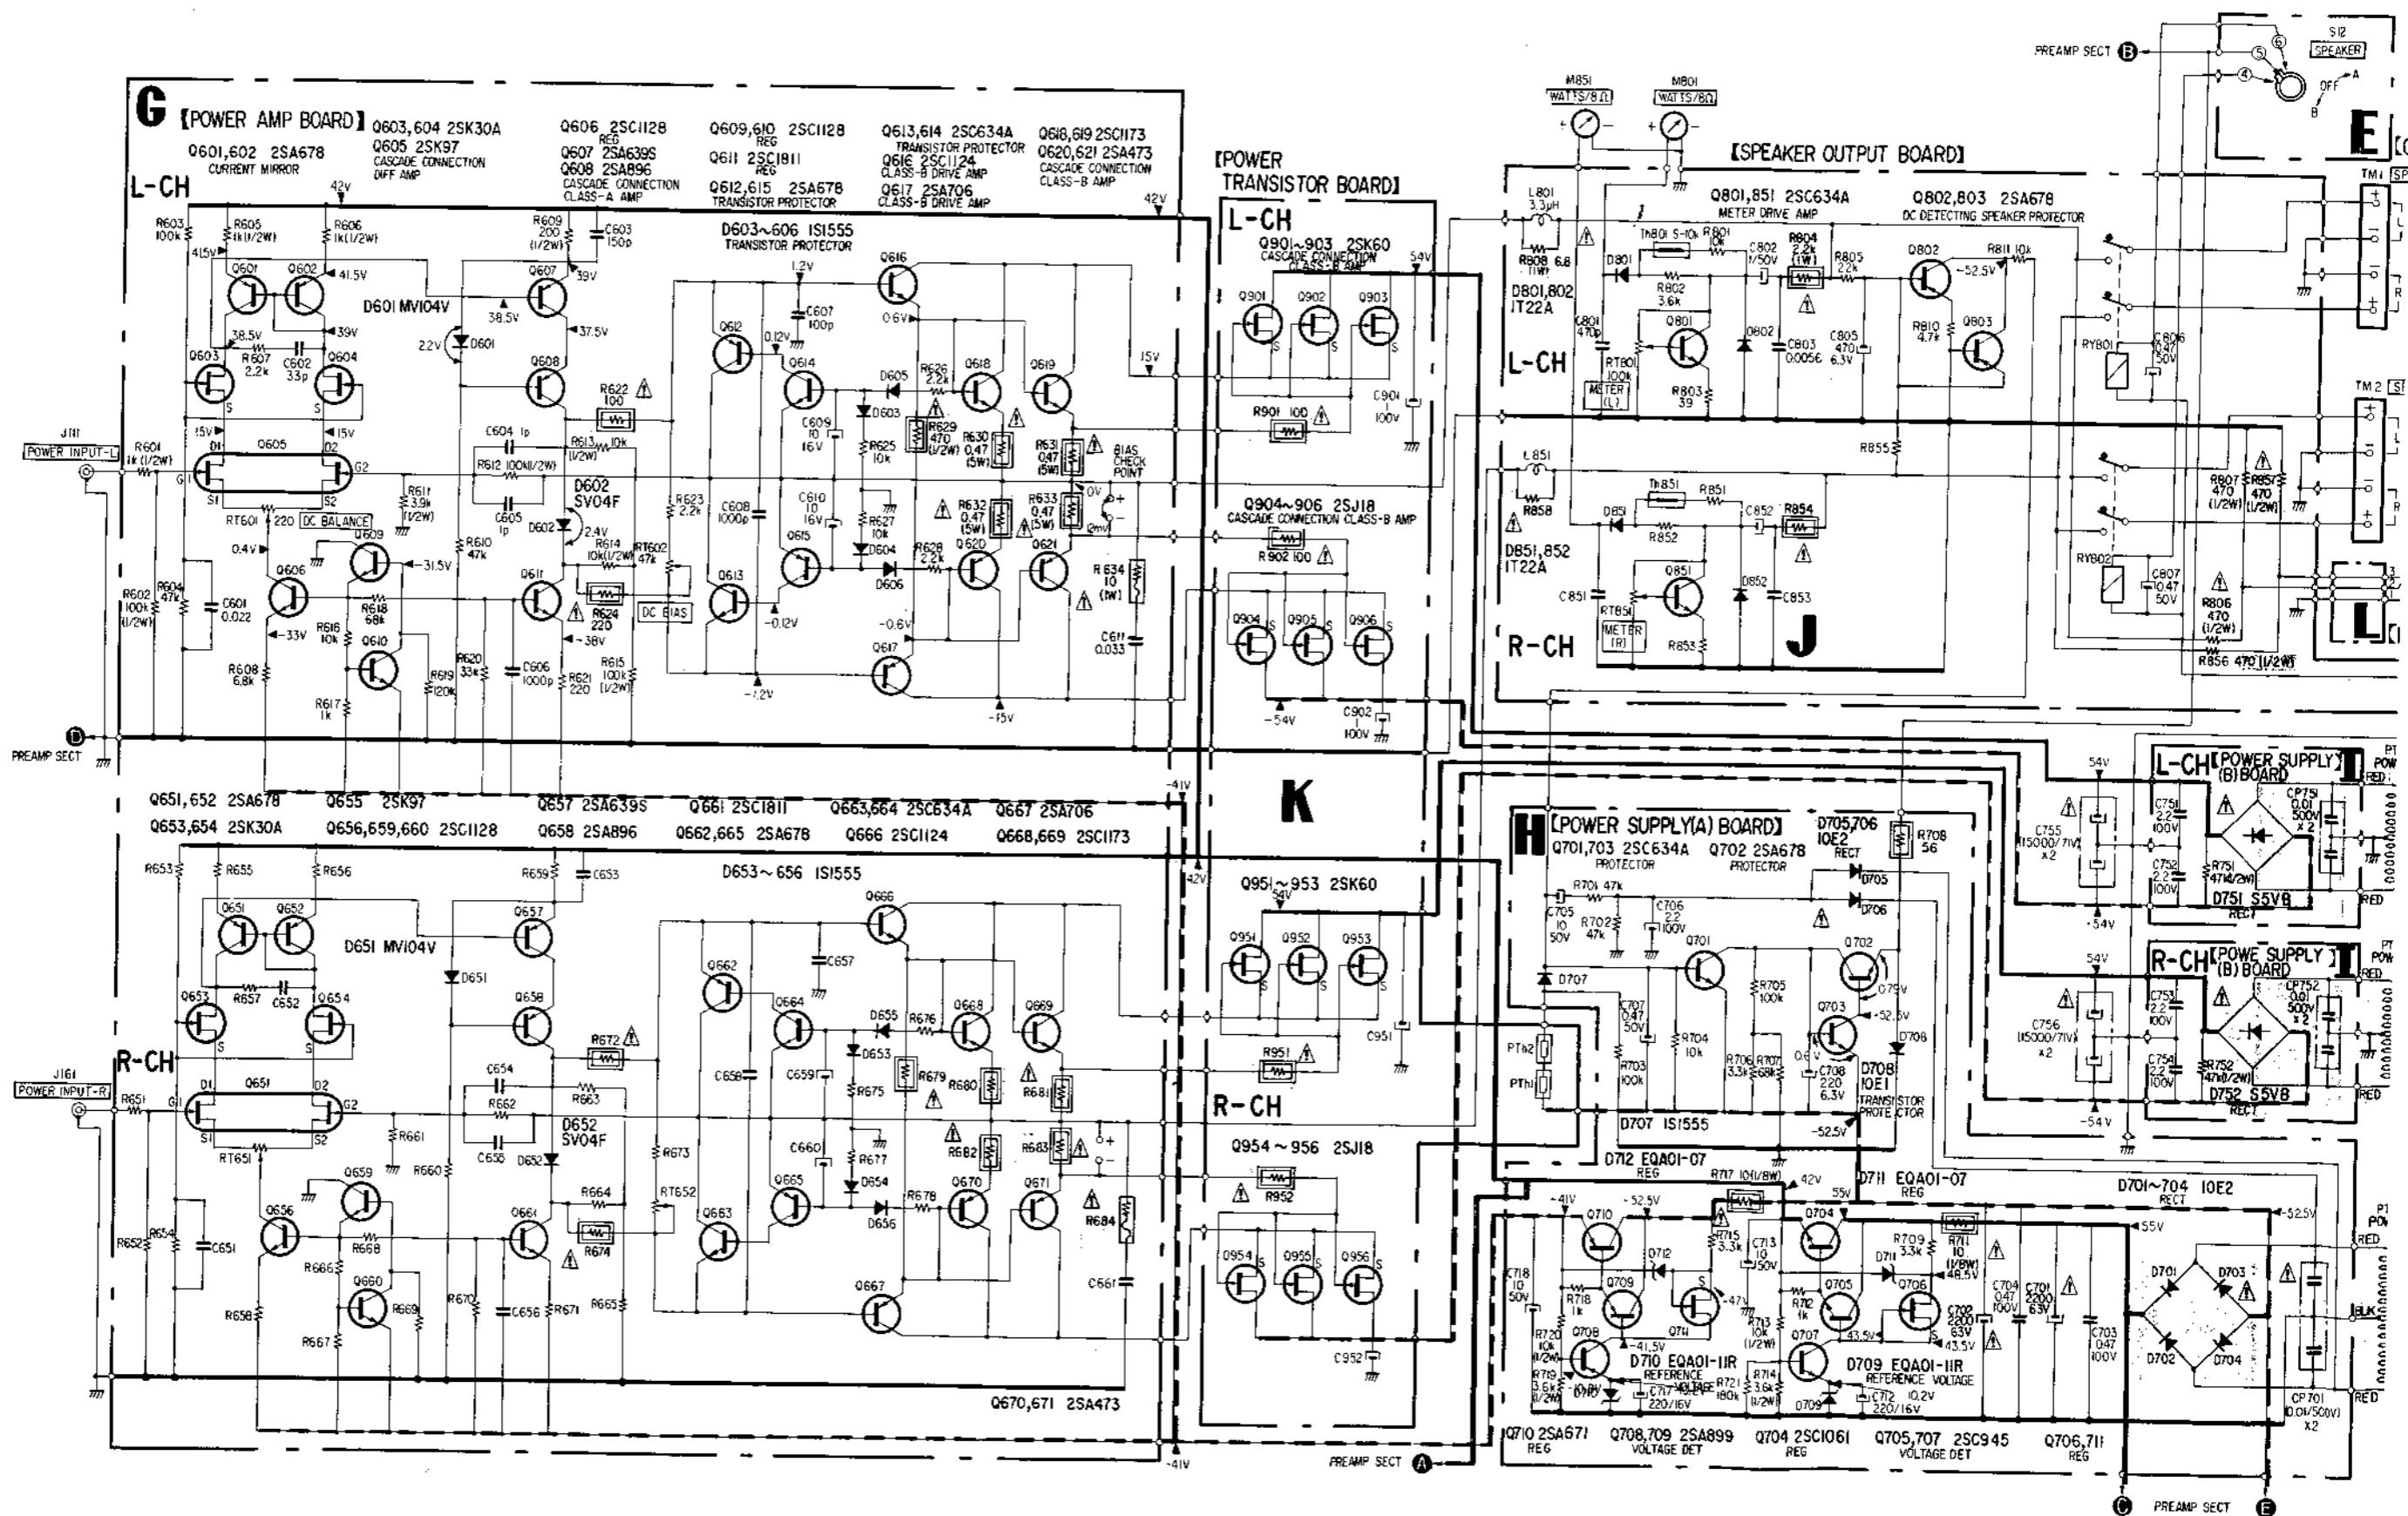

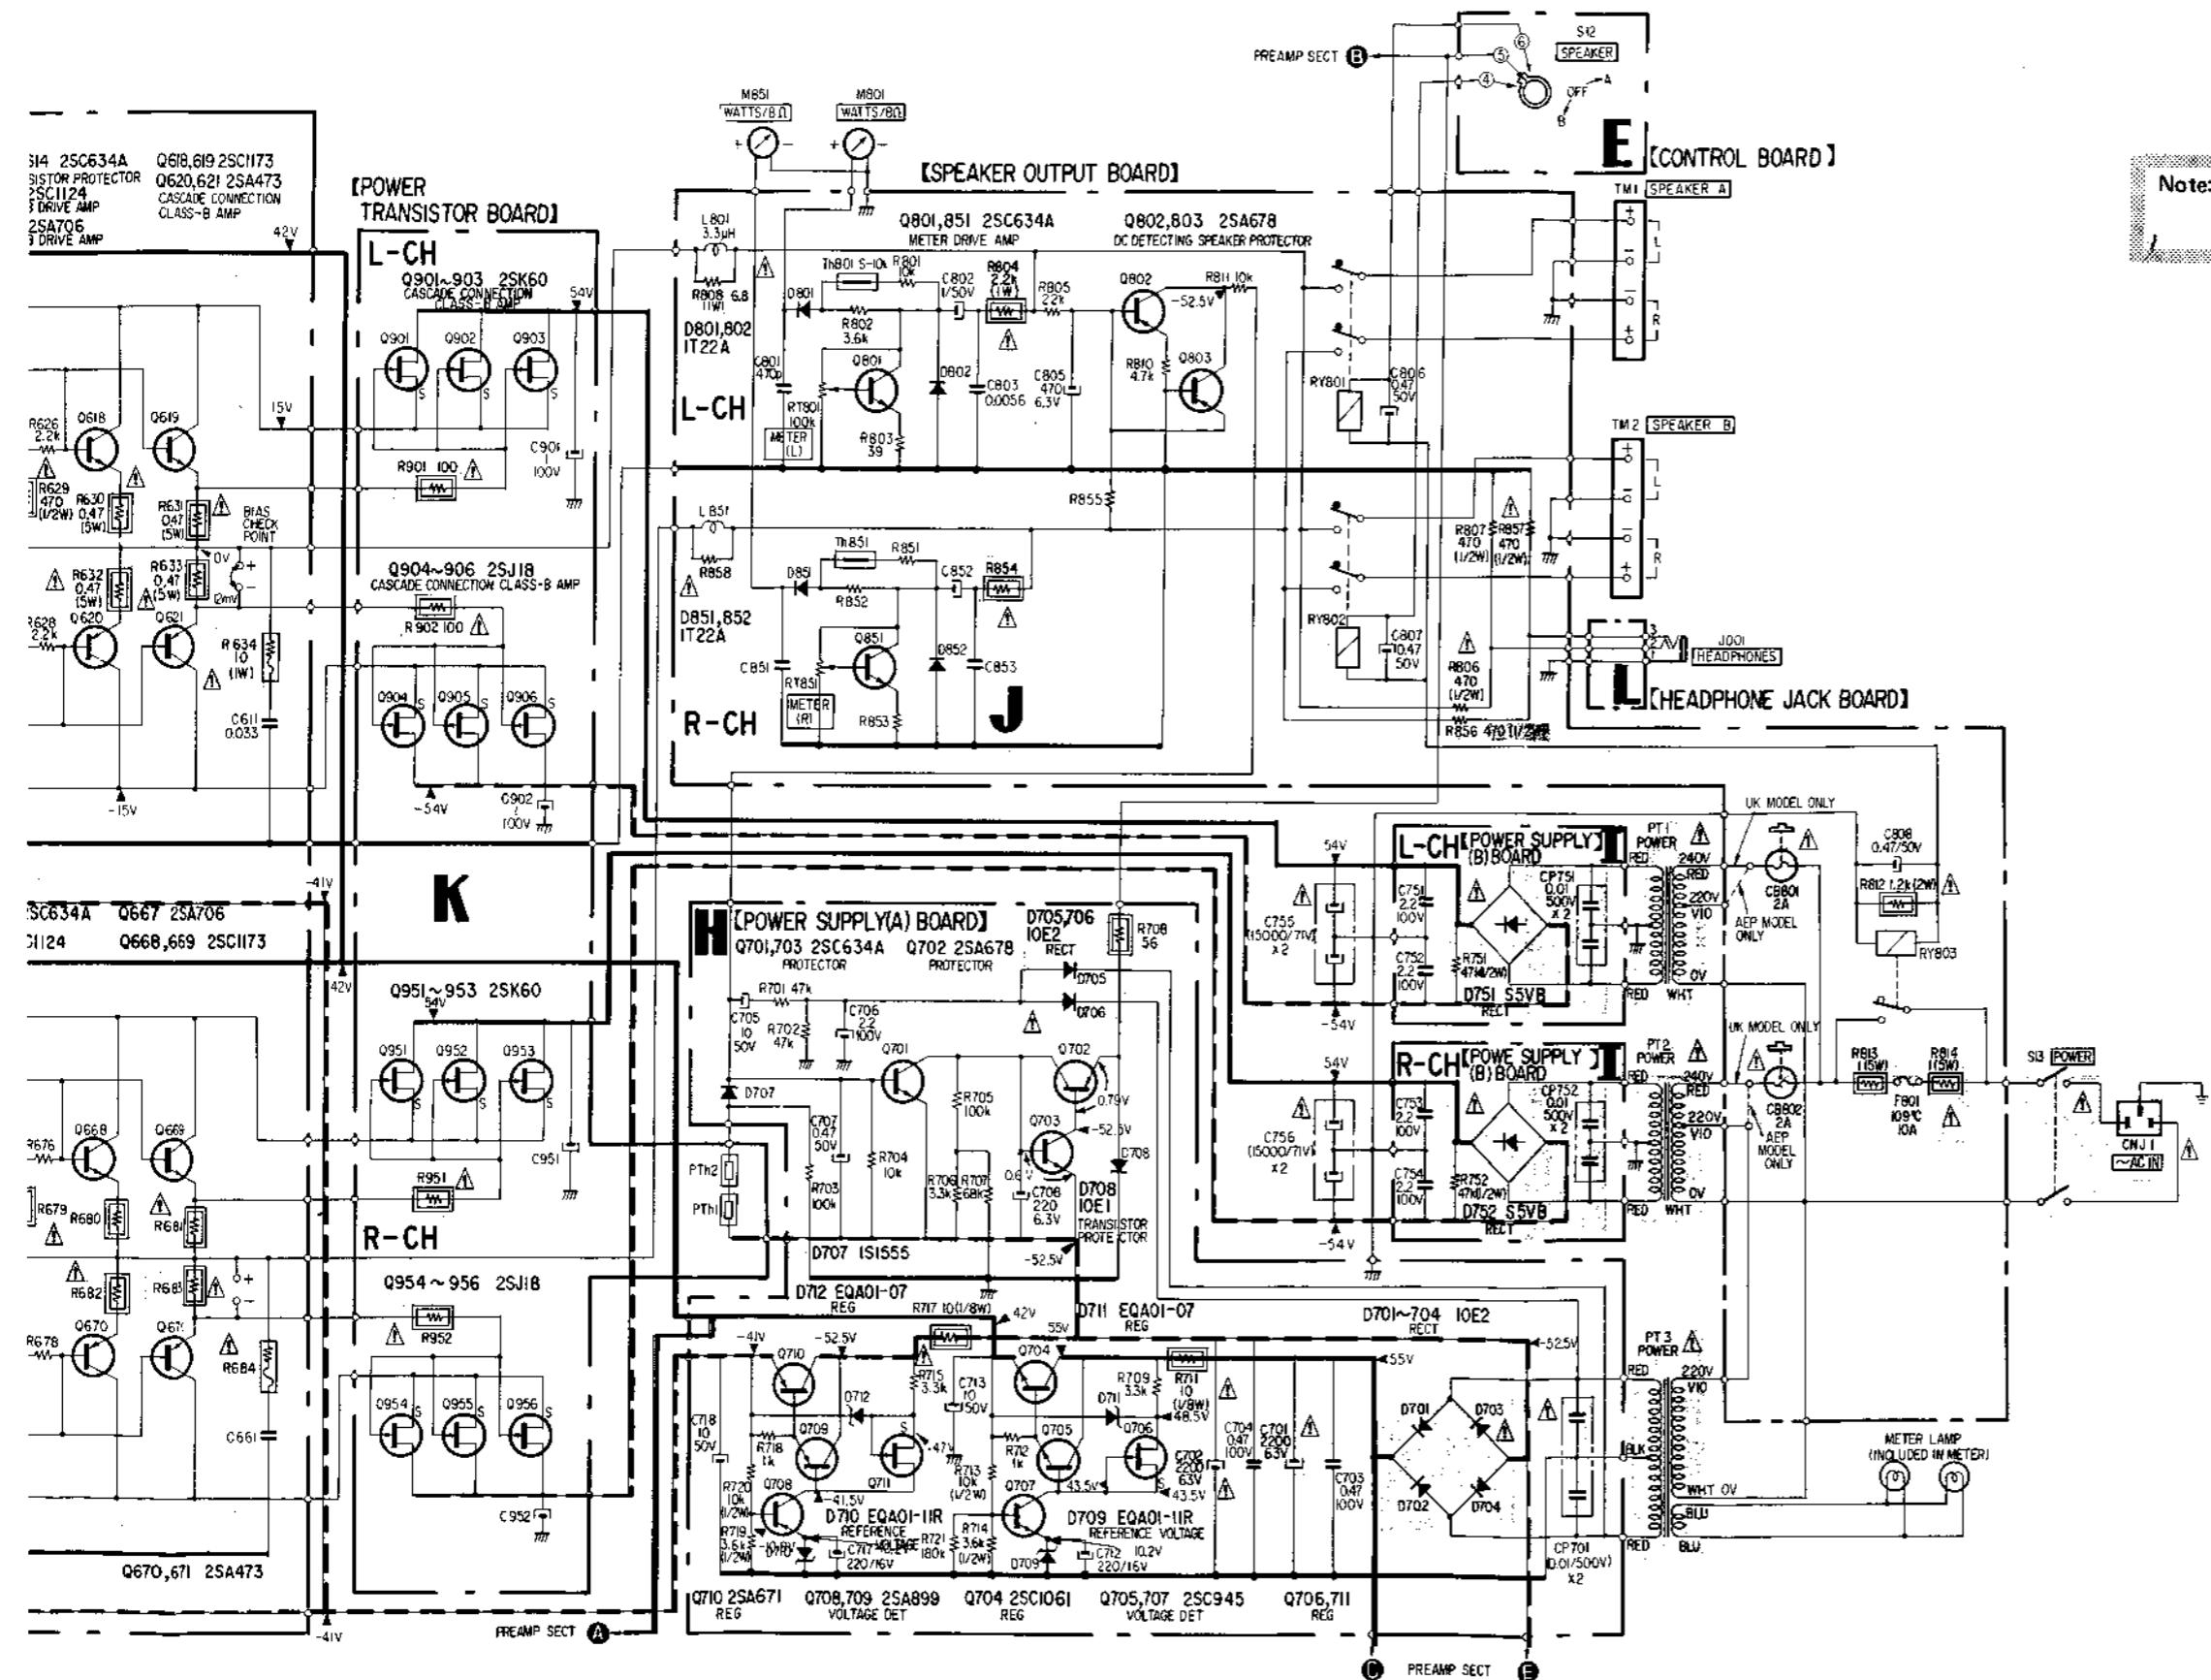


Note: The components identified by shading and mark are critical for safety. Replace only with part number specified.

- Components for right channel have same values as for left channel. Reference numbers are coded from.
- All capacitors are in μF unless otherwise noted. $\text{pF} = \mu\text{F}$
 50WV or less are not indicated except for electrolytics.
- All resistors are in ohms, $\frac{1}{2}\text{W}$ unless otherwise noted.
 $\text{k}\Omega = 1000\Omega$, $\text{M}\Omega = 1000\text{k}\Omega$
-  : nonflammable resistor.
-  : fusible resistor.
-  : B+ bus.
-  : B- bus.
-  : panel designation.
-  : adjustment for repair.
- Readings are taken under no signal conditions with a VOM ($20\text{k}\Omega/\text{V}$).
- Switch

Ref. No.	Switch	Position
S12	SPEAKER	OFF
S13	POWER	OFF

SECTION 5


EXPLODED VIEWS

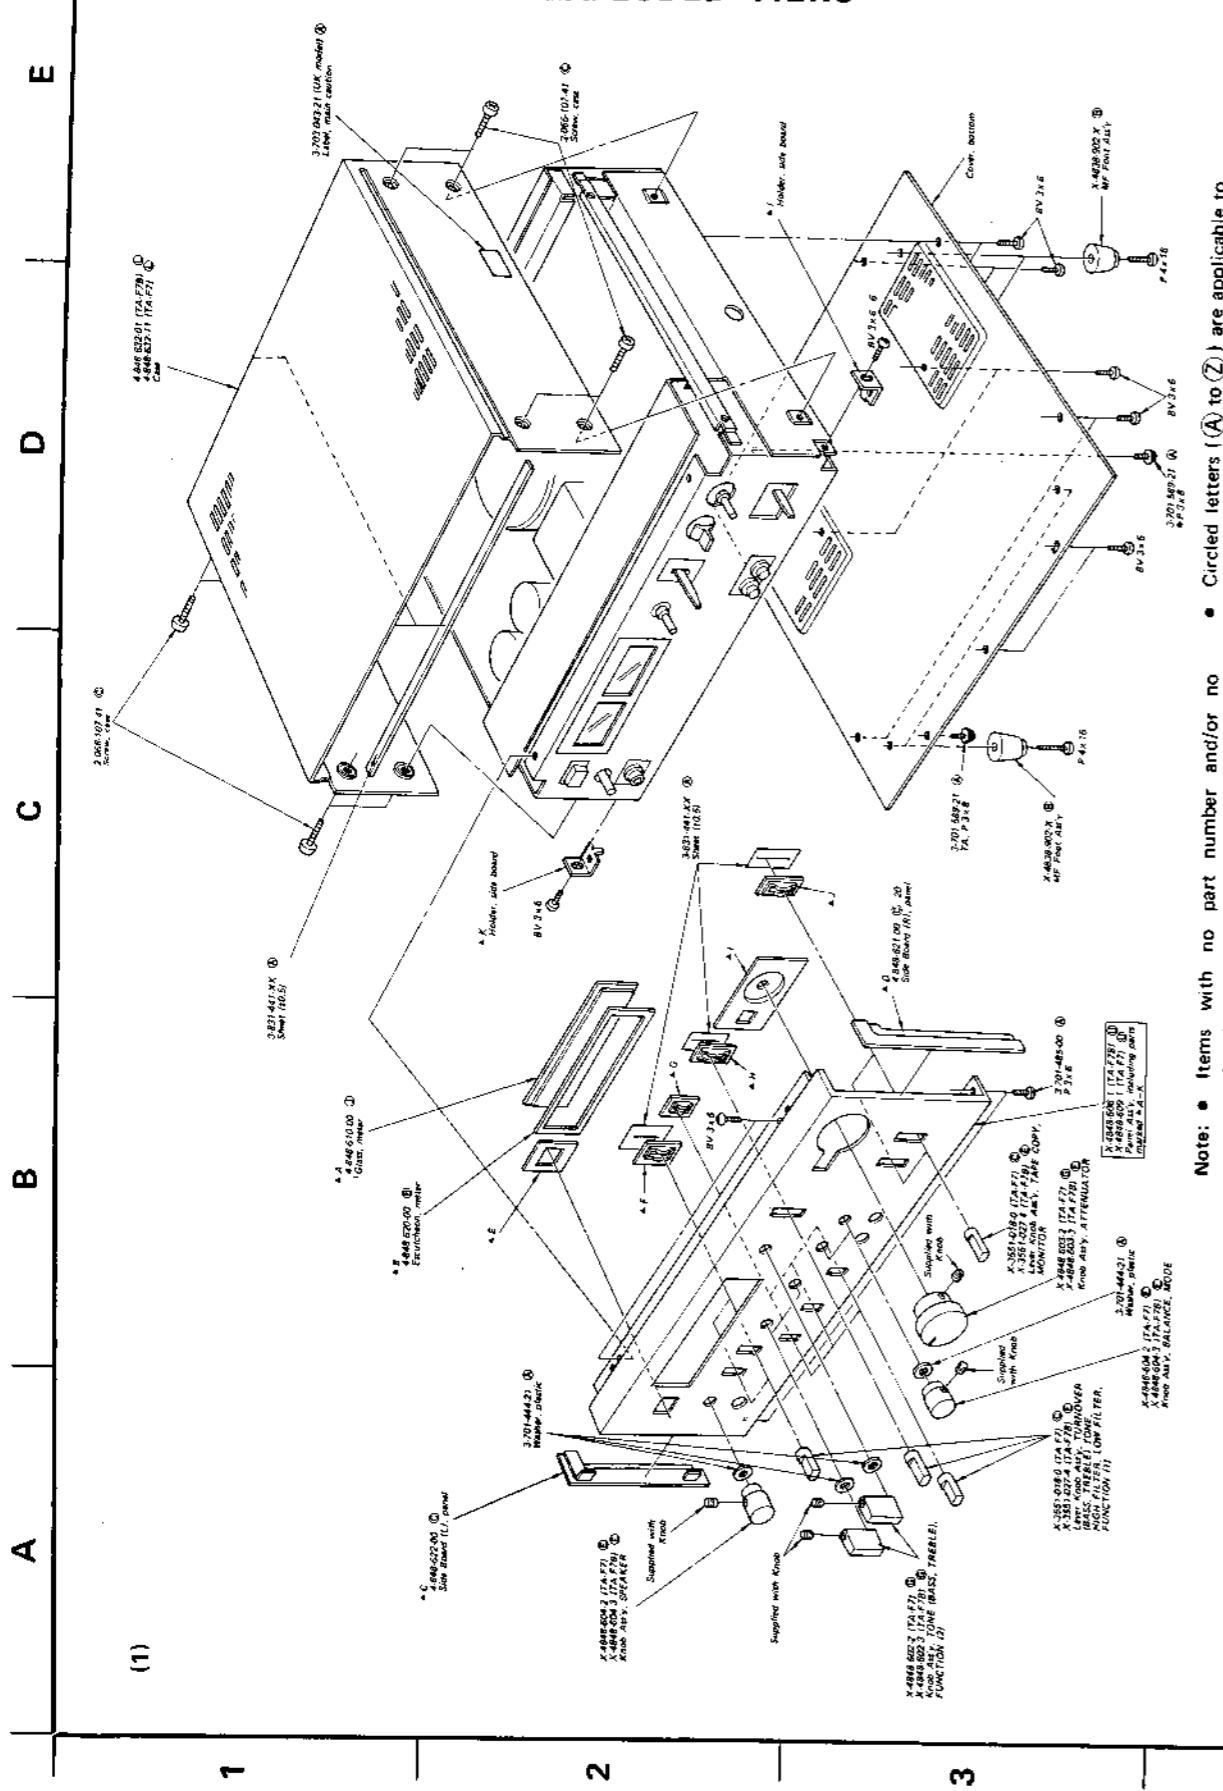

- 24

- Note:** • Items with no part number and/or no description are not stocked because they are seldom required for routine service.


 - All screws are Phillips (cross recess) type unless otherwise noted.
 - Circled letters (**A** to **Z**) are applicable to European models only.

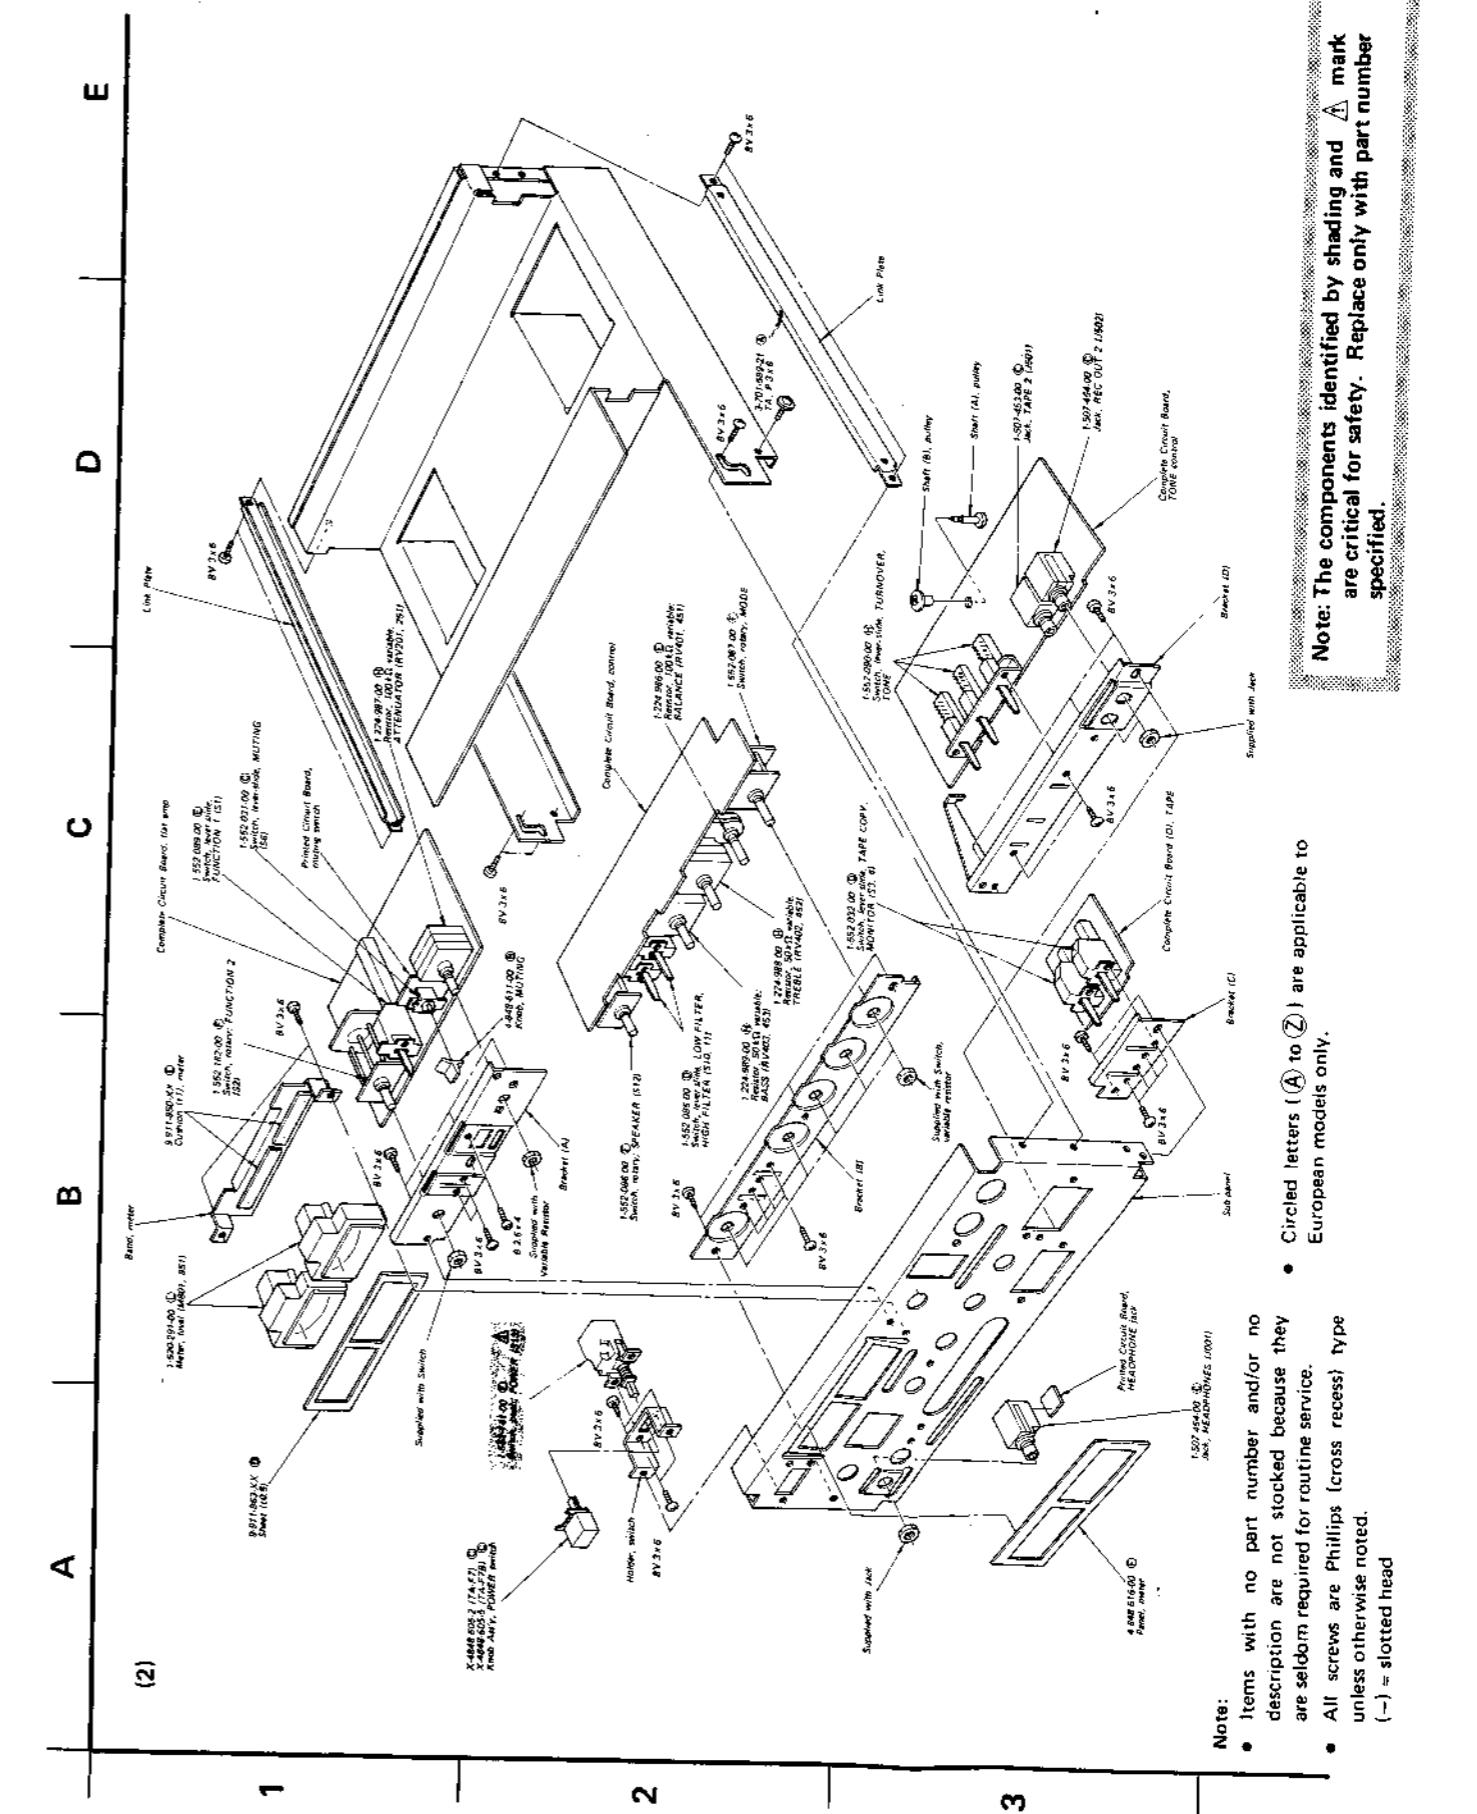

- 25


- Notes:** Items with no part number and/or no description are not stocked because they are seldom required for routine service. All screws are Phillips (cross recess) type unless otherwise noted.

Circled letters (A) to (Z) are applicable to European models only.

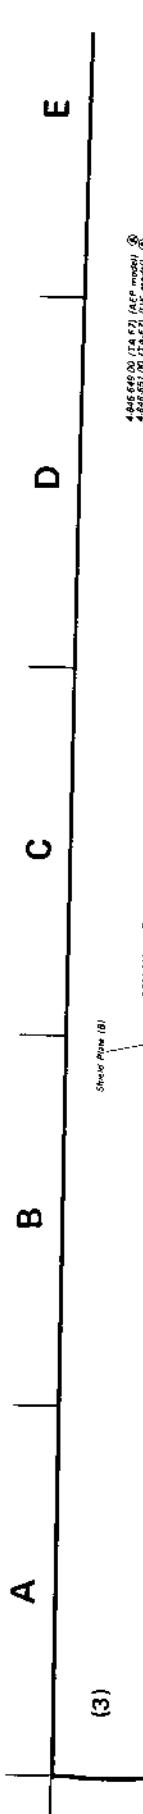


3

TA-F7/TA-F7B TA-F7/TA-F7B

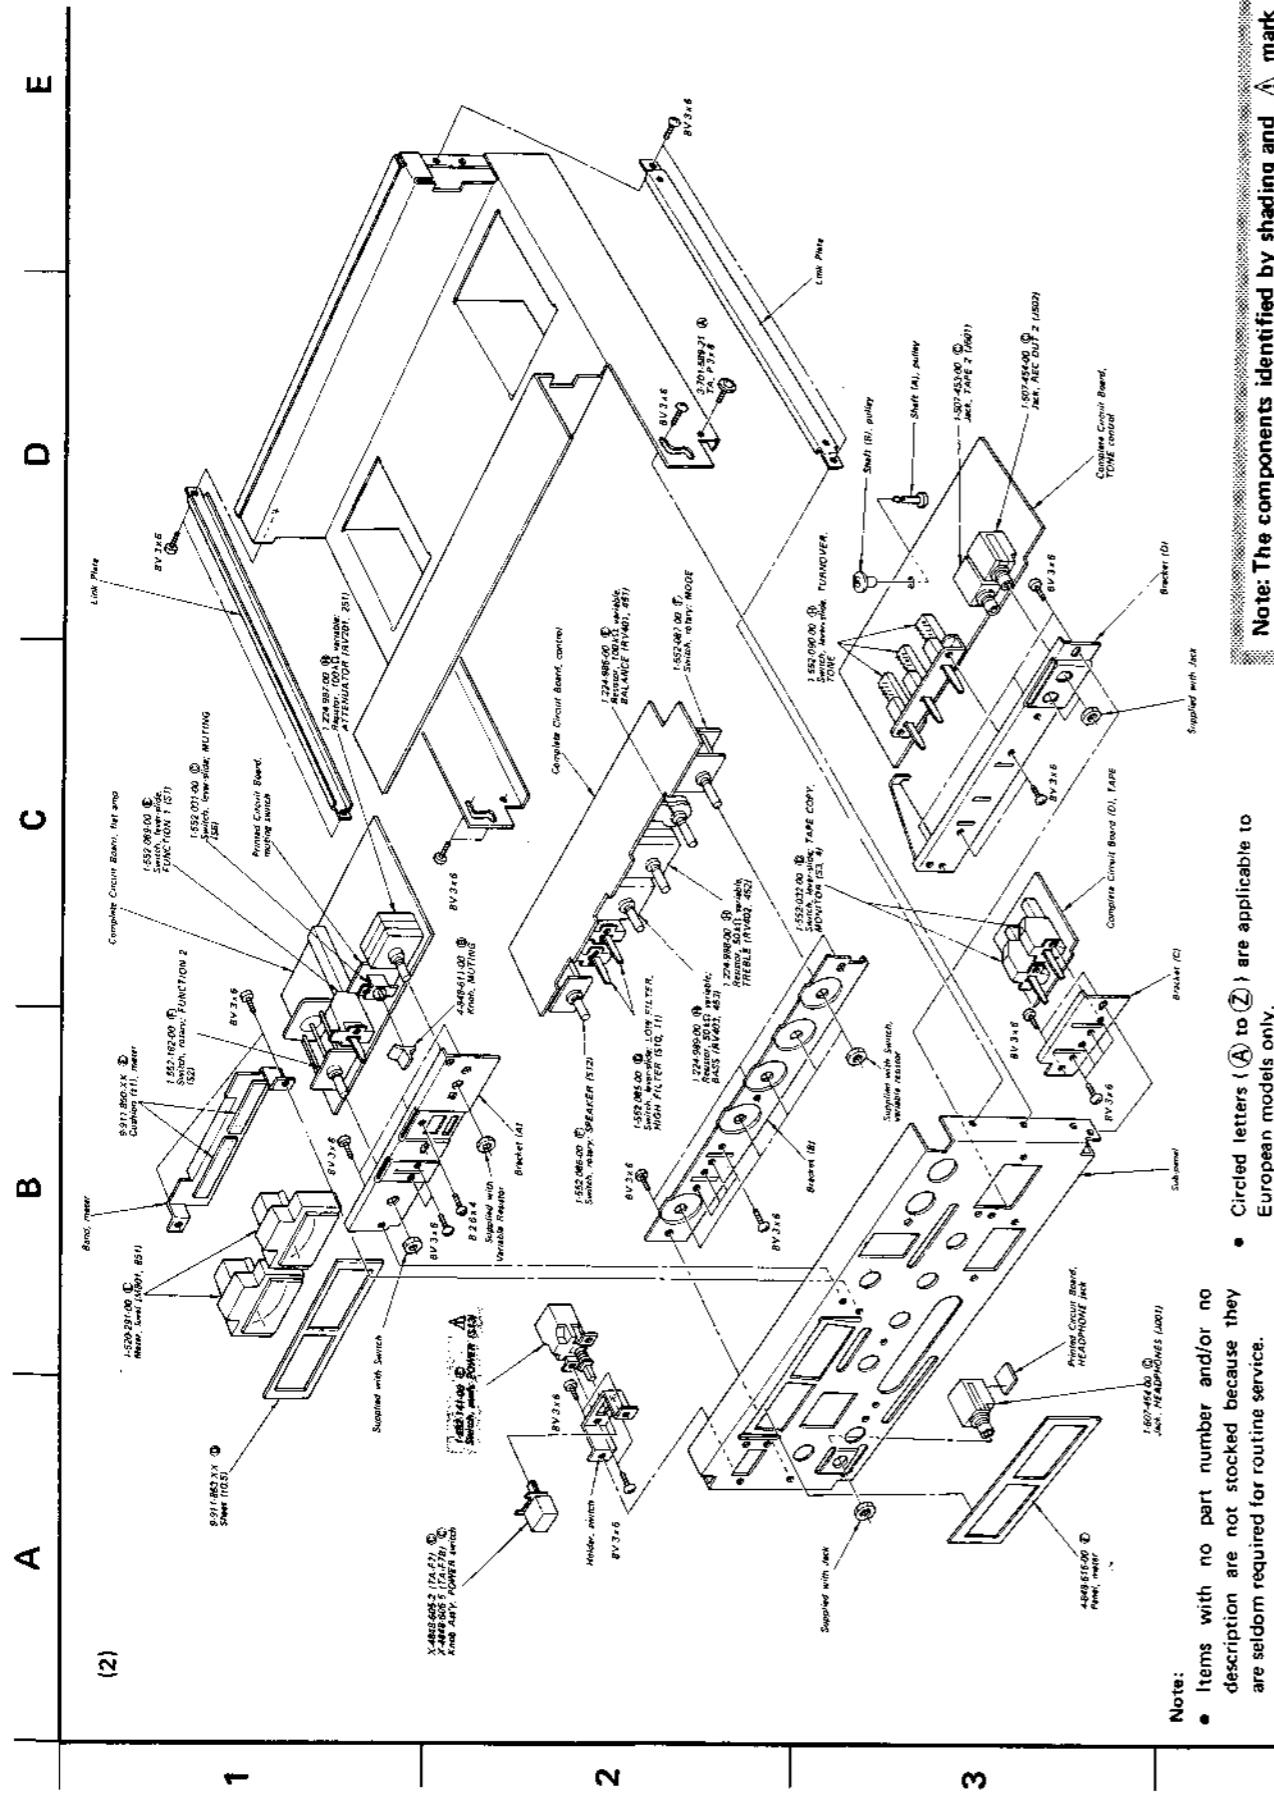

— 25 —

Note: The components identified by shading and \triangle mark are critical for safety. Replace only with part number specified.

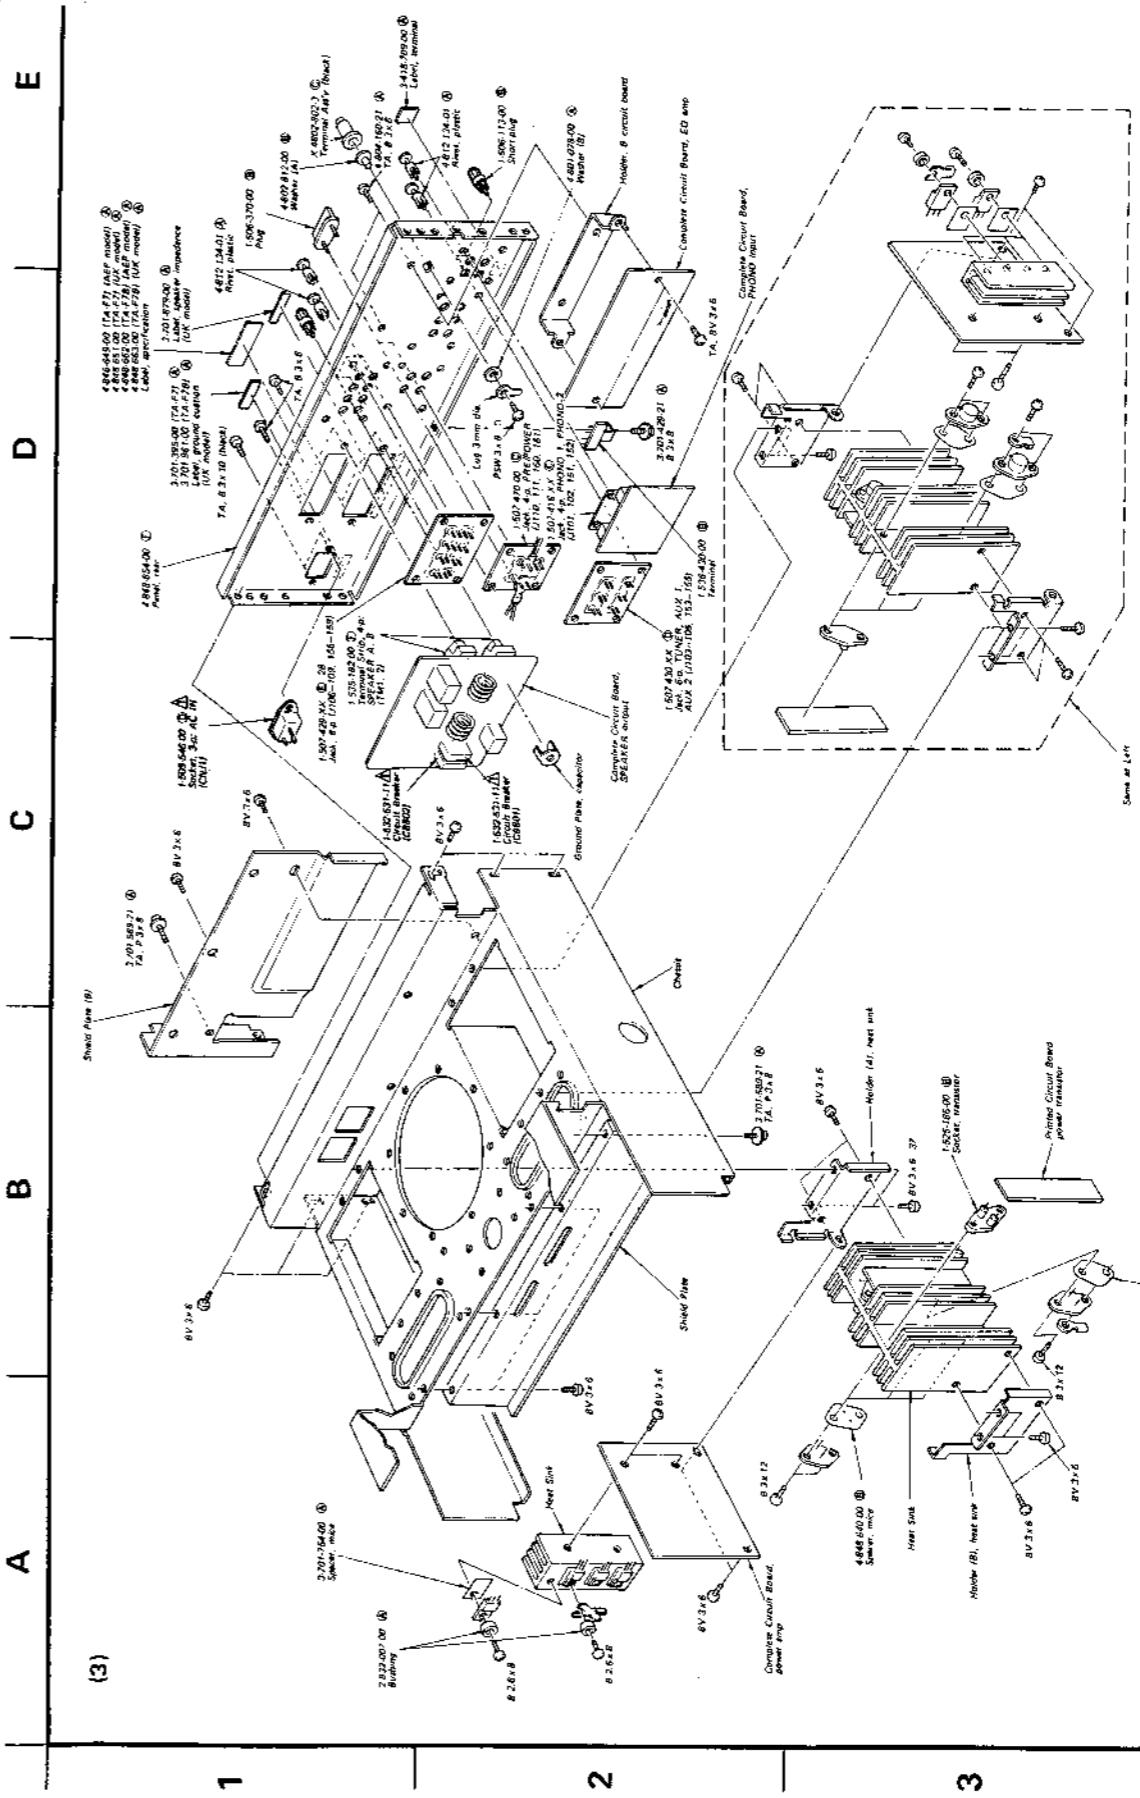

— 26 —

Note: The components identified by shading and \triangle mark are critical for safety. Replace only with part number specified.


Note:

- Circled letters (A to Z) are applicable to European models only.
- Items with no part number and/or no description are not stocked because they are seldom required for routine service.
- All screws are Phillips (cross recess) type unless otherwise noted.

(—) = slotted head

4

A | B | C

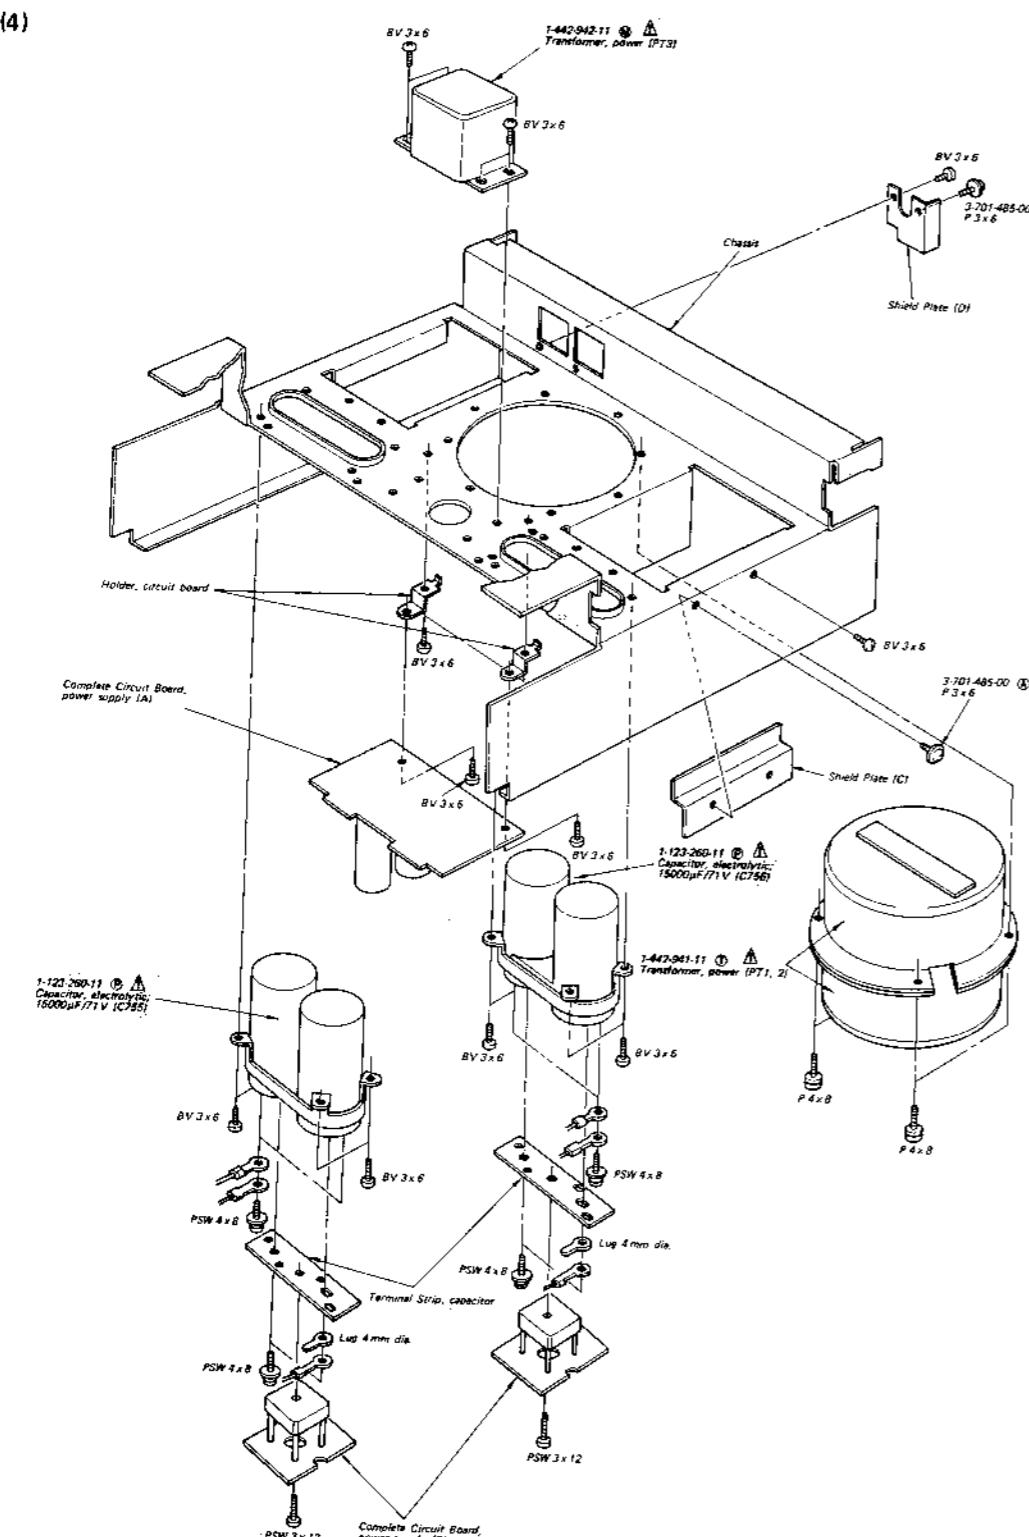

SECTION 6

ELECTRICAL PARTS LIST

- Circled letters (Ⓐ to Ⓛ) are applicable to European models only.

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
PRINTED CIRCUIT BOARD					
	1-585-589-12 Ⓛ	Power Amp	⇒ Q603,604	⇒ Q653,654	⑧ 2SK30A-GR
SEMICONDUCTORS					
Transistors					
Q101,151	⑥ 2SK97	Q605,655	⑥ 2SK97	Q606,656	⑦ 2SC1128
Q102-104	⑦ 2SC1128	Q607,657	⑦ 2SA639S	Q608,658	⑦ 2SA896
Q152-154	⑧ 2SK43-2	Q609,659	⑧ 2SC1128	Q610,660	⑨ 2SC1811
⇒ Q105,155	⑨ 2SA639S	Q611,661	⑩ 2SA678	Q612,662	⑩ 2SA678
Q106,107	⑪ 2SA896	Q613,663	⑪ 2SC634A	Q156,157	⑫ 2SC1811
Q108,158	⑫ 2SC1811	Q614,664	⑫ 2SC1124	Q109,159	⑬ 2SA706
Q201,202	⑬ 2SK43-3A	Q615,665	⑬ 2SA678	Q251,252	⑭ 2SC1173
Q203,253	⑭ 2SC1128	Q616,666	⑭ 2SC1124	Q204,254	⑮ 2SA473
Q205,206	⑮ 2SC1128	Q617,667	⑮ 2SA678	Q255,256	⑯ 2SC634A
Q207,257	⑯ 2SC1811	Q618,668	⑯ 2SC634A	Q401,451	⑰ 2SA678
Q401,451	⑰ 2SC1636	Q619,669	⑰ 2SC634A	⇒ Q501,551	⑱ 2SC634A
⇒ Q501,551	⑱ 2SK43-3A	Q620,670	⑱ 2SC1061	Q502,552	⑲ 2SA678
Q503,553	⑲ 2SA896	Q621,671	⑲ 2SC634A	Q504,554	⑳ 2SC1811
Q505	⑳ 2SC1128	Q701	⑳ 2SC1128	⇒ Q505	⑳ 2SC1061
Q555	⑳ 2SA671	Q702	⑳ 2SC634A	⇒ Q706	⑳ 2SK42-2
⇒ Q506	⑳ 2SC634A	Q703	⑳ 2SC634A	Q707	⑳ 2SC634A
Q556	⑳ 2SA899	Q704	⑳ 2SA899	Q708,709	⑳ 2SA899
Q507	⑳ 2SA899	⇒ Q705	⑳ 2SA671	Q710	⑳ 2SA671
⇒ Q557	⑳ 2SC634A	⇒ Q711	⑳ 2SK42-2	Q901-903	⑳ 2SK60
⇒ Q508	⑳ 2SC634A	Q801,851	⑳ 2SC634A	Q951-953	⑳ 2SJ18
Q558	⑳ 2SA899	Q802,803	⑳ 2SA899	Q904-906	⑳ 2SJ18
⇒ Q509,559	⑳ 2SK42-2	Q954-956	⑳ 2SK42-2	Diodes	
Q601,602	⑳ 2SA678	D101,151	⑳ 2SA678	Q651,652	⑳ 1S1555

- ⇒: Due to standardization, interchangeable replacements may be substituted for parts specified in the diagrams.

SECTION 6 ELECTRICAL PARTS LIST

• Circled letters (Ⓐ to Ⓛ) are applicable to European models only.

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>
PRINTED CIRCUIT BOARD											
1-585-589-12	Ⓐ Power Amp		⇒ Q603,604	Ⓑ 2SK30A-GR		⇒ D501,551	Ⓑ EQB01-07		C102,152	1-101-005-11	Ⓐ 0.022
			⇒ Q653,654	Ⓕ 2SK97		⇒ D601,651	Ⓒ KB462S		C103,153	1-102-973-11	Ⓐ 100p
			Q605,655	Ⓒ 2SC1128		D602,652	Ⓒ SV04S		C104,154	1-130-131-11	Ⓑ 1600p 100V polyethylene
			Q606,656	Ⓒ 2SA639S		D603-606	Ⓑ IS1555		C105,155	1-130-132-11	Ⓑ 5600p 100V polyethylene
			Q607,657			D653-656			C106,156	1-131-217-11	Ⓑ 2.2 35V tantalum
SEMICONDUCTORS											
	Transistors		Q608,658	Ⓒ 2SA896		D701-706	Ⓐ 10E2		C107,157	1-102-959-11	Ⓐ 22p
	Q101,151	Ⓕ 2SK97	Q609,659	Ⓒ 2SC1128		D707	Ⓑ IS1555		C108,158	1-130-122-11	Ⓑ 1000p 100V polyethylene
Q102-104	Ⓒ 2SC1128		Q610,660	Ⓒ 2SC1811		⇒ D708	Ⓑ 10E2		C109,159	1-123-250-11	Ⓑ 2.2 100V elect
Q152-154	Ⓒ 2SK43-2		Q611,661	Ⓒ 2SA678		⇒ D709,710	Ⓑ EQB01-11Z		C110,160	1-130-133-11	Ⓑ 56000p 100V polyethylene
⇒ Q105,155	Ⓒ 2SA639S		Q612,662	Ⓒ 2SC634A		⇒ D711,712	Ⓑ EQB01-07		C111,161	1-108-227-12	Ⓐ 0.001 mylar
Q106,107	Ⓒ 2SA896		Q613,663	Ⓒ 2SC634A		D751,752	Ⓐ 55VB20		C201,251	1-102-971-11	Ⓐ 82p
Q156,157	Ⓒ 2SC1811		Q614,664	Ⓒ 2SA678		D801,851	Ⓑ 1T22M		C202,252	1-102-824-11	Ⓐ 470p
Q108,158	Ⓒ 2SC1128		Q615,665	Ⓒ 2SC1124		D802,852			C203,253	1-131-295-11	Ⓒ 100 6.3V tantalum
Q109,159	Ⓒ 2SC1811		Q616,666	Ⓓ 2SA706					C204,254	1-130-133-11	Ⓑ 56000p 100V polyethylene
Q201,202	Ⓕ 2SK43-3A		Q617,667	Ⓒ 2SC1173					C205,255	1-108-227-12	Ⓐ 0.001 mylar
Q251,252	Ⓒ 2SC1128		Q618,668						C208	1-108-360-12	Ⓐ 0.039
Q203,253	Ⓒ 2SA896		Q619,669						C402,452	1-108-364-12	Ⓑ 0.18 mylar
Q204,254	Ⓒ 2SC1128		Q620,670	Ⓒ 2SA473		TH801,851	1-800-202-XX	Ⓐ Thermistor, S-10K	C403,453	1-108-581-12	Ⓑ 0.012 mylar
Q205,206	Ⓒ 2SC1128		Q621,671			PTh1,2	1-800-427-00	Ⓑ Thermistor	C404,454	1-108-254-12	Ⓑ 0.22 mylar
Q255,256	Ⓒ 2SC1811		Q701	Ⓑ 2SC634A					C405,455	1-102-115-11	Ⓐ 560p
Q207,257	Ⓒ 2SC1811		Q702	Ⓒ 2SA678		L801,851	1-420-879-00	Ⓑ Coil	C501,551	1-108-228-12	Ⓐ 0.0015 mylar
Q401,451	Ⓑ 2SC1636		Q703	Ⓒ 2SC634A					C502,552	1-108-237-12	Ⓐ 0.0068 mylar
			Q704	Ⓓ 2SC1061					C503,553	1-108-364-12	Ⓑ 0.18
			⇒ Q705	Ⓑ 2SC634A					C504,554	1-108-125-11	Ⓐ 4700p
⇒ Q501,551	Ⓕ 2SK43-3A		⇒ Q706	Ⓒ 2SK42-2					C505,555	1-131-239-11	Ⓑ 6.8 35V tantalum
Q502,552	Ⓒ 2SA896		Q707	Ⓑ 2SC634A					C506,556	1-108-360-12	Ⓐ 0.039
Q503,553	Ⓒ 2SC1811		Q708,709	Ⓒ 2SA899					C507,557	1-108-364-12	Ⓑ 0.18
Q504,554	Ⓒ 2SC1128		Q710	Ⓔ 2SA671					C508,558	1-108-237-12	Ⓐ 0.0068 mylar
Q505	Ⓓ 2SC1061		⇒ Q711	Ⓒ 2SK42-2					C509,559	1-102-115-11	Ⓐ 0.039
Q555	Ⓕ 2SA671		Q801,851	Ⓑ 2SC634A		PT1,2	Ⓐ 1-442-941-11	Ⓣ Power	C510,560	1-108-228-12	Ⓐ 0.18
⇒ Q506	Ⓑ 2SC634A		Q802,803	Ⓒ 2SA678		PT3	Ⓐ 1-442-942-11	Ⓜ Power			100V polyethylene
Q556	Ⓒ 2SA899								C511,561	1-121-411-11	Ⓑ 47 50V elect
Q507	Ⓒ 2SA899		Q901-903	Ⓡ 2SK60					C514,564	1-130-083-11	Ⓒ 1 100V polyethylene
⇒ Q557	Ⓑ 2SC634A		Q951-953	Ⓒ 2SJ18					C517,567	1-101-361-11	Ⓑ 0.47 100V polyethylene
⇒ Q508	Ⓑ 2SC634A		Q904-906						C601,651	1-101-005-11	Ⓐ 0.022
Q558	Ⓒ 2SA899		Q954-956						C602,652	1-102-963-11	Ⓐ 33p
⇒ Q509,559	Ⓒ 2SK42-2								C603,653	1-102-934-11	Ⓐ 150p
Q601,602	Ⓒ 2SA678		D101,151	Ⓑ 1S1555					C604,654	1-102-934-11	Ⓐ 1p
Q651,652									C605,655	1-102-934-11	

• ⇒ : Due to standardization, interchangeable replacements may be substituted for parts specified in the diagrams.

⇒ : Due to standardization, interchangeable replacements may be substituted for parts specified in the diagrams.

Note: The components identified by shading and Ⓛ mark are critical for safety. Replace only with part number specified.

Note: Circled letters (Ⓐ to Ⓛ) are applicable to European models only.

Note: Circled letters (Ⓐ to Ⓛ) are applicable to European models only.

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>
C606,656	1-101-001-11	Ⓐ 1000p
C607,657	1-102-973-11	Ⓐ 100p
C608,658	1-101-001-11	Ⓐ 1000p
C609,659	1-121-651-11	Ⓐ 10 16V elect
C610,660	1-108-244-12	Ⓐ 0.033 mylar
C701,702	△ 1-123-261-11	Ⓑ 2200 63V elect
C703,704	1-130-086-11	Ⓑ 0.47 100V polyethylene
C705	1-123-183-11	Ⓐ 10 50V elect
C706	1-123-250-11	Ⓑ 2.2 100V elect
C707	1-121-726-11	Ⓐ 0.47 50V elect
C708	1-121-419-11	Ⓑ 220 6.3V elect
C712,717	1-121-421-11	Ⓑ 220 16V elect
C713,718	1-121-738-11	Ⓑ 10 50V elect
C751-754	1-130-084-11	Ⓓ 2.2 100V polyethylene
C755,756	△ 1-123-260-11	Ⓟ 15000 71V elect
C801,851	1-102-824-11	Ⓐ 470p
C802,852	1-121-391-11	Ⓐ 1 50V elect
C803,853	1-108-355-12	Ⓐ 0.0056 mylar
C805	1-121-424-11	Ⓑ 470 6.3V elect
C806-808	1-121-726-11	Ⓐ 0.47 50V elect
C901,951	1-119-372-11	1 100V elect
C902,952		

RESISTORS

All resistors are in ohms. Common 1/4W carbon resistors are omitted.

Check schematic diagram for values.

R101,151	1-244-914-11	Ⓐ 51k 1/4W
R102,152	1-244-873-11	Ⓐ 1k 1/4W
R103,153	1-244-864-11	Ⓐ 430 1/4W
R104,154	1-244-909-11	Ⓐ 33k 1/4W
R105,155	1-244-865-11	Ⓐ 470 1/4W
R107,157	1-244-873-11	Ⓐ 1k 1/4W
R108,158	1-214-172-11	Ⓑ 47k 1/4W metal oxide
R109,159	1-214-473-11	Ⓑ 576k 1/4W metal oxide
R116,166	1-244-945-11	Ⓐ 1M 1/4W
R117,167	1-244-909-11	Ⓐ 33k 1/4W
R118,168	1-244-873-11	Ⓐ 1k 1/4W

Note: The components identified by shading and △ mark are critical for safety. Replace only with part number specified.

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>
R120,170	1-244-873-11	Ⓐ 1k 1/4W
R202,252	1-244-919-11	Ⓐ 2k 1/4W
R203,253	1-244-945-11	Ⓐ 1M 1/4W
R204,254	1-244-873-11	Ⓐ 1k 1/4W
R205,255	1-244-905-11	Ⓐ 22k 1/4W
R206,256	1-244-873-11	Ⓐ 1.5k 1/4W
R208,258	1-244-877-11	Ⓐ 10k 1/4W
R209,259	1-244-897-11	Ⓐ 10k 1/4W
R214,264	1-244-873-11	Ⓐ 1k 1/4W
R219	1-244-881-11	Ⓐ 2.2k 1/4W
R301,351	1-244-897-11	Ⓐ 10k 1/4W
R302,352	1-244-897-11	Ⓐ 10k 1/4W
R509,559	1-244-873-11	Ⓐ 1k 1/4W
R510,560	1-244-945-11	Ⓐ 1M 1/4W
R511,561	1-244-893-11	Ⓐ 6.8k 1/4W
R512,562	1-244-881-11	Ⓐ 2.2k 1/4W
R513,563	1-244-897-11	Ⓐ 10k 1/4W
R514,564	1-244-861-11	Ⓐ 330 1/4W
R520,570	1-244-897-11	Ⓐ 10k 1/4W
R521,571	1-244-856-11	Ⓐ 200 1/4W
R524,574	△ 1-212-869-11	Ⓐ 33 1/4W fusible
R527,577	△ 1-212-990-11	Ⓐ 220 1/4W fusible
R601,651	1-244-873-11	Ⓐ 1k 1/4W
R602,652	1-244-921-11	Ⓐ 100k 1/4W
R605,655	1-244-873-11	Ⓐ 1k 1/4W
R606,656	1-244-873-11	Ⓐ 1k 1/4W
R611,661	1-244-887-11	Ⓐ 3.9k 1/4W
R612,662	1-244-921-11	Ⓐ 100k 1/4W
R613,663	1-244-897-11	Ⓐ 10k 1/4W
R614,664	1-244-897-11	Ⓐ 10k 1/4W
R615,665	1-244-921-11	Ⓐ 100k 1/4W
R622,672	△ 1-211-522-11	Ⓐ 100 1/4W
R624,674	△ 1-211-530-11	Ⓐ 220 1/4W
R629,679	△ 1-211-630-11	Ⓐ 470 1/4W
R630-633	△ 1-217-158-11	Ⓐ 0.47 5W metal oxide
R680-683		
R634,684	△ 1-217-481-11	Ⓑ 10 1W fusible
R708	△ 1-211-516-11	Ⓐ 56 1/4W

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>
R711,717	△ 1-211-409-11	Ⓐ 10 1/8W
R713,720	1-244-897-11	Ⓐ 10k 1/4W
R714,719	1-244-886-11	Ⓐ 3.6k 1/4W
R751,752	△ 1-244-913-11	Ⓐ 47k 1/4W
R804,854	△ 1-213-147-11	Ⓐ 2.2k 1W metal oxide
R806,856	△ 1-244-865-11	Ⓐ 470 1/4W
R807,857		
R808,858	△ 1-212-370-11	Ⓐ 6.8 1W
R812	△ 1-206-666-11	Ⓐ 1.2k 2W metal oxide
R813,814	△ 1-217-160-11	Ⓐ 1 5W metal oxide
R901,951	△ 1-211-522-11	Ⓐ 100 1/4W
RT601,651	1-224-487-00	Ⓑ 220 adjustable
RT602,652	1-224-661-00	Ⓑ 47k adjustable
RT801,851	1-224-492-00	Ⓑ 100k adjustable
RV201,251	2-224-987-00	Ⓜ 100k, variable; ATTENUATOR
RV401,451	1-224-986-00	Ⓜ 100k, variable; BALANCE
RV402,452	1-224-988-00	Ⓜ 50k, variable; TREBLE
RV403,453	1-224-989-00	Ⓜ 51k, variable; BASS
S1	1-552-089-00	Ⓕ Lever Slide, FUNCTION (1)
S2	1-552-182-00	Ⓕ Rotary Slide, FUNCTION (2)
S3,4	1-552-032-00	Ⓓ Lever Slide, TAPE COPY, MONITOR
S5	1-552-087-00	Ⓕ Rotary, MODE
S6	1-552-031-00	Ⓒ Lever Slide, MUTING
S7-9	1-552-090-00	Ⓜ Lever Slide, TURNOVER (BASS, TREBLE)/TONE
S10,11	1-552-085-00	Ⓓ Lever Slide, LOW FILTER, HIGH FILTER
S12	1-552-086-00	Ⓕ Rotary, SPEAKER
S13	△ 1-552-141-00	Ⓔ Pushbutton, POWER
		JACKS
J001	1-507-454-00	Ⓒ HEADPHONES
J101,151	1-507-416-XX	Ⓒ 4p, PHONO 1, PHONO 2
J102,152		
J103-105	1-507-430-XX	Ⓓ 6p, TUNER, AUX 1, AUX 2
J153-155		

Note: The components identified by shading and △ mark are critical for safety. Replace only with part number specified.

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>
J106-109	1-507-429-XX	Ⓔ 8p, TAPE 1, TAPE 2
J156-159		REC OUT 1, REC OUT 2
J110,160	1-507-470-00	Ⓒ 4p, PRE/POWER
J111,161		
J501	1-507-453-00	Ⓒ TAPE 2
J502	1-507-454-00	Ⓒ REC OUT 2
CNJ	△ 1-509-546-00	Ⓓ 3p, socket; AC IN
		MISCELLANEOUS
CB801,802	△ 1-532-531-11	Ⓒ Circuit Breaker, 2A
CP701	△ 1-102-355-11	Ⓑ Encapsulated Component
F801	△ 1-532-496-11	Ⓒ Fuse 10A
M801,851	1-520-291-00	Ⓛ Meter, level
RY001,002	1-515-277-00	Ⓕ Relay
RY801,802	1-515-257-00	Ⓗ Relay (TA-F7)
RY802,803	1-515-293-00	Ⓗ Relay (TA-F7B)
RY803	1-515-278-00	Ⓕ Relay
TM1,2	1-535-182-00	Ⓕ Terminal Strip, 4p; SPEAKER A, B
1-506-370-00	Ⓑ Plug	
1-525-186-00	Ⓑ Socket, transistor	
1-536-430-12	Ⓑ Terminal Strip	

ACCESSORIES & PACKING MATERIALS	
--	--

Note: Circled letters (Ⓐ to Ⓛ) are applicable to European models only.

TA-F7/TA-F7B TA-F7/TA-F7B

HARDWARE NOMENCLATURE

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>
R711,717	Ⓐ1-211-409-11	(Ⓐ) 10 1/8W
R713,720	1-244-897-11	(Ⓐ) 10k 1/2W
R714,719	1-244-886-11	(Ⓐ) 3.6k 1/2W
R751,752	Ⓐ1-244-913-11	(Ⓐ) 47k 1/2W
R804,854	Ⓐ1-213-147-11	(Ⓐ) 2.2k 1W metal oxide
R806,856	Ⓐ1-244-865-11	(Ⓐ) 470 1/2W
R807,857	Ⓐ1-244-865-11	(Ⓐ) 470 1/2W
R808,858	Ⓐ1-212-370-11	(Ⓐ) 6.8 1W
R812	Ⓐ1-206-666-11	(Ⓐ) 1.2k 2W metal oxide
R813,814	Ⓐ1-217-160-11	(Ⓐ) 1 SW metal oxide
R901,951	Ⓐ1-211-522-11	(Ⓐ) 100 1/4W
R902,952	Ⓐ1-211-522-11	(Ⓐ) 100 1/4W
RT601,651	1-224-487-00	(Ⓑ) 220 adjustable
RT602,652	1-224-661-00	(Ⓑ) 47k adjustable
RT801,851	1-224-492-00	(Ⓑ) 100k adjustable
RV201,251	2-224-987-00	(Ⓗ) 100k, variable; ATTENUATOR
RV401,451	1-224-986-00	(Ⓔ) 100k, variable; BALANCE
RV402,452	1-224-988-00	(Ⓗ) 50k, variable; TREBLE
RV403,453	1-224-989-00	(Ⓗ) 51k, variable; BASS

SWITCHES

S1	1-552-089-00	(Ⓕ) Lever Slide, FUNCTION (1)
S2	1-552-182-00	(Ⓕ) Rotary Slide, FUNCTION (2)
S3,4	1-552-032-00	(Ⓓ) Lever Slide, TAPE COPY, MONITOR
S5	1-552-087-00	(Ⓕ) Rotary, MODE
S6	1-552-031-00	(Ⓒ) Lever Slide, MUTING
S7-9	1-552-090-00	(Ⓗ) Lever Slide, TURNOVER (BASS, TREBLE)/TONE
S10,11	1-552-085-00	(Ⓓ) Lever Slide, LOW FILTER, HIGH FILTER
S12	1-552-086-00	(Ⓕ) Rotary, SPEAKER
S13	Ⓐ1-552-141-00	(Ⓔ) Pushbutton, POWER
		JACKS
J001	1-507-454-00	(Ⓒ) HEADPHONES
J101,151	1-507-416-XX	(Ⓒ) 4p, PHONO 1, PHONO 2
J102,152	1-507-430-XX	(Ⓓ) 6p, TUNER, AUX 1, AUX 2
J103-105	1-507-430-XX	(Ⓓ) 6p, TUNER, AUX 1, AUX 2
J153-155	1-507-430-XX	(Ⓓ) 6p, TUNER, AUX 1, AUX 2

Note: The components identified by shading and Ⓛ mark are critical for safety. Replace only with part number specified.

REF. NO. PART NO. DESCRIPTION

J106-109	1-507-429-XX	(Ⓔ) 8p, TAPE 1, TAPE 2
J156-159	1-507-470-00	(Ⓒ) REC OUT 1, REC OUT 2
J110,160	1-507-453-00	(Ⓒ) TAPE 2
J111,161	1-507-454-00	(Ⓒ) REC OUT 2

CNJ	Ⓐ1-509-546-00	(Ⓓ) 3p, socket; AC IN
-----	---------------	-----------------------

MISCELLANEOUS

CB801,802	Ⓐ1-532-531-11	(Ⓒ) Circuit Breaker, 2A
CP701	Ⓐ1-102-355-11	(Ⓓ) Encapsulated Component

F801	Ⓐ1-532-496-11	(Ⓒ) Fuse 10A
------	---------------	--------------


M801,851	1-520-291-00	(Ⓛ) Meter, level
----------	--------------	------------------

RY001,002	1-515-277-00	(Ⓕ) Relay
RY801,802	1-515-257-00	(Ⓗ) Relay (TA-F7)
RY801,802	1-515-293-00	(Ⓗ) Relay (TA-F7B)
RY803	1-515-278-00	(Ⓕ) Relay


TM1,2	1-535-182-00	(Ⓕ) Terminal Strip, 4p; SPEAKER A, B
-------	--------------	--------------------------------------

1-506-370-00	(Ⓑ) Plug
1-525-186-00	(Ⓑ) Socket, transistor
1-536-430-12	(Ⓓ) Terminal Strip

ACCESSORIES & PACKING MATERIALS	
<u>Part No.</u>	<u>Description</u>
1-506-113-00	(Ⓑ) Short Plug
1-534-819-12	(Ⓖ) Cord, power (UK model)
3-701-020-00	(Ⓐ) Bag, SS check sheet
3-701-622-00	(Ⓐ) Bag, plastic (UK model)
3-770-394-11	(Ⓚ) Manual, instruction
4-848-648-00	(Ⓑ) Bag, protection
4-848-659-00	(Ⓗ) Carton (TA-F7)
4-848-664-00	(Ⓗ) Carton (TA-F7B)
4-848-660-00	(Ⓓ) Frame
4-848-661-00	(Ⓒ) Cushion, lower
4-848-658-00	(Ⓒ) Cushion, upper

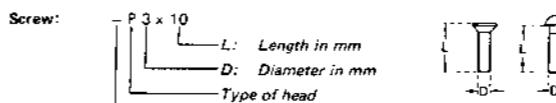

Indicated slotted-head only.
Unless otherwise indicated, it means cross-recessed head (Phillips type).



<u>Reference Designation</u>	<u>Shape</u>	<u>Description</u>	<u>Remarks</u>
SELF-TAPPING SCREWS			
TA		self-tapping screw	ex: TA, P 3 x 10
PTP		pan-head self-tapping screw	binding-head self-tapping (TA, B) screw for replacement
PTPWH		pan-head self-tapping screw with washer face	binding-head self-tapping (TA, B) screw and flat washer for replacement
PTTWH		pan-head thread-rolling screw with washer face	binding-head (B) screw and flat washer for replacement
SET SCREWS			
SC		set screw	
SC		hexagon socket set screw	ex: SC 2.6 x 4, hexagon socket
NUT			
N		nut	
WASHERS			
W		flat washer	
SW		spring washer	
LW		internal-tooth lock washer	ex: LW3, internal
LW		external-tooth lock washer	ex: LW3, external
RETAINING RINGS			
E		retaining ring	
G		grip-type retaining ring	

1/4 WATT CARBON RESISTORS Ⓛ Note: Circled letter Ⓛ is applicable to European model only.

Ω	Part No.	Ω	Part No.	Ω	Part No.	Ω	Part No.	Ω	Part No.	Ω	Part No.
1.0	1-244-601-11	10	1-244-625-11	100	1-244-649-11	1.0k	1-244-673-11	10k	1-244-697-11	100k	1-244-721-11
1.1	1-244-602-11	11	1-244-626-11	110	1-244-650-11	1.1k	1-244-674-11	11k	1-244-698-11	110k	1-244-722-11
1.2	1-244-603-11	12	1-244-627-11	120	1-244-651-11	1.2k	1-244-675-11	12k	1-244-699-11	120k	1-244-723-11
1.3	1-244-604-11	13	1-244-628-11	130	1-244-652-11	1.3k	1-244-676-11	13k	1-244-700-11	130k	1-244-724-11
1.5	1-244-605-11	15	1-244-629-								