

# TA-F303ESD/FA630ESD

## SERVICE MANUAL



photo : TA-F630ESD

Canadian Model  
AEP Model  
UK Model  
TA-F630ESD

E Model  
TA-F303ESD

### SPECIFICATIONS

#### Amplifier section

Item	Condition		Data
Continuous RMS power output (both channels driven simultaneously)	4 ohms, 20 Hz-20 kHz THD 0.008%	Canadian, UK, E model	120 W + 120 W (THD 0.01%) (DIN: 160 W + 160 W)
	6 ohms, 20 Hz-20 kHz THD 0.006%	Canadian, UK, E model	100 W + 100 W (DIN: 120 W + 120 W)
		AEP, West Germany model	95 W + 95 W (DIN: 115 W + 115 W)
	8 ohms, 20 Hz-20 kHz THD 0.004%	Canadian, UK, E model	90 W + 90 W (DIN: 110 W + 110 W)
		AEP, West Germany model	80 W + 80 W (DIN: 100 W + 100 W)
Power band width (IHF)	8 ohms, THD 0.02%		10 Hz - 100 kHz at 45 W
Dynamic headroom ('78 IHF)	4 ohms		2 dB
	8 ohms		1.2 dB
Total harmonic distortion	8 ohms, at 10 watt output		0.003%
Intermodulation (IM) distortion 60 Hz: 7 kHz = 4:1	4 ohm, at rated output		0.008%
	6 ohms at rated output		0.006%
	8 ohms at rated output		0.004%
Damping factor	8 ohms, 1 kHz		50
Residual noise	network A		less than 90 µV
Frequency response	PHONO MM		RIAA equalization curve ±0.2 dB
	TUNER, CD, TAPE 1, 2, 3, DIRECT IN		2 Hz - 200 kHz +0 -3 dB
Input sensitivity	PHONO	MC	0.17 mV, 100 ohms
		MM	2.5 mV, 50 kohms
	TUNER, CD, DIRECT IN, TAPE 1, 2, 3 ADAPTOR IN		150 mV, 50 kohms
S/N (network)	PHONO	MC	68 dB 76 dB* (A)
		MM	80 dB 87 dB* (A)
+78 (IHF)		TUNER, CD, DIRECT IN, TAPE 1, 2, 3 ADAPTOR IN	84 dB 105 dB* (A)

-Continued on page 2-

**INTEGRATED STEREO AMPLIFIER**  
**SONY®**

Item	Condition	Data
Output voltage impedance	REC OUT 1, 2, 3 ADAPTOR OUT	150 mV, 1 kohm
	HEADPHONES	25 milliwatts (at 8 ohms) Accepts low and high impedance headphones.
Tone controls	BASS, at 100 Hz	±6 dB (turnover freq. 400 Hz)
	TREBLE, at 10 kHz	±6 dB (freq. 4 kHz)

**DA converter section**

Item	Condition	Data
Input sensitivity	DIGITAL COAXIAL IN	0.5 Vp-p, ±20%, 75 ohms
	DIGITAL OPTICAL IN 1, 2	TOSLINK
Output voltage impedance	DIGITAL OPTICAL 2 REC OUT	TOSLINK
Output voltage	DA converter	2 V

**General**

System Preamplifier section: Low-noise high gain NFB type equalizer amplifier, passive type direct tone control  
Power amplifier section: Pure-complementary SEPP power amplifier

**Power requirements**

AEP, West Germany model : 220 V AC, 50 Hz  
U K model: 240 V AC, 50 Hz  
E model : 120 V, 220 V or 240 V AC  
adjustable, 50/60 Hz  
Canadian model : 120 V, AC, 50/60Hz

**Power consumption**

Canadian model	510 VA
AEP, UK, West Germany model	220 W
UK model	600 W
E model	340 W

**AC outlet**

Canadian model	2 switched, 1 unswitched, 100 watts max. each
AEP, UK, West Germany model	—
E model	1 switched, 1 unswitched, 100 watts each

**Dimensions**


Approx. 430 x 150 x 390 mm (w/h/d)  
(17 x 5 7/8 x 15 3/8 inches)

**Weight:**

Approx. 13.7 kg (30 lbs 4 oz) net

**MODEL IDENTIFICATION**

— Specification Label —

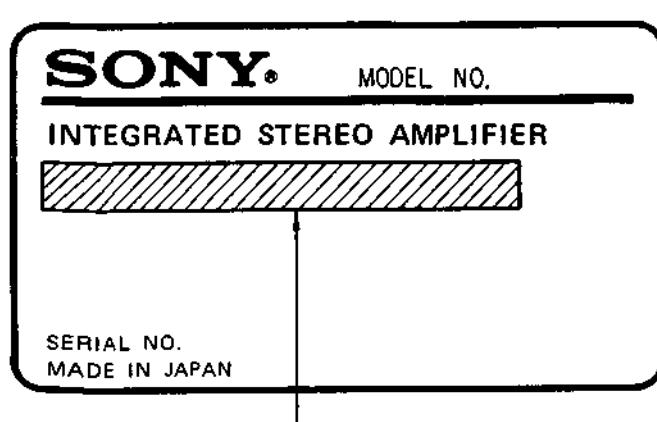

AEP, West Germany Model: AC: 220 V ~ 50/60 Hz

UK Model: AC: 240 V ~ 50/60 Hz

E Model: AC: 120/220/240 V

~ 50/60 Hz

Canadian Model: AC: 120V 60Hz

**TABLE OF CONTENTS**

Section	Title	Page
Specification	1	
Model Identification	2	
Safety Check-Out	2	
On Operating Voltage	3	
1. GENERAL		
Parts Identification	4	
2. ELECTRICAL ADJUSTMENTS	5	
3. DIAGRAMS		
3-1. Schematic Diagrammp (Amp Section)	7	
3-2. Printed Wiring Boards (Amp Section)	11	
3-3. Printed Wiring Boards (D/A Converter Section)	16	
3-4. Schematic Diagram (D/A Converter Section)	18	
4. EXPLODED VIEWS	22	
5. ELECTRICAL PARTS LIST	25	

## SAFETY CHECK-OUT

After correcting the original service problem, perform the following safety check before releasing the set to the customer:

Check the antenna terminals, metal trim, "metallized" knobs, screws, and all other exposed metal parts for AC leakage. Check leakage as described below.

### LEAKAGE TEST

The AC leakage from any exposed metal part to earth ground and from all exposed metal parts to any exposed metal part having a return to chassis, must not exceed 0.5 mA (500 microamperes). Leakage current can be measured by any one of three methods.

1. A commercial leakage tester, such as the Simpson 229 or RCA WT-540A. Follow the manufacturers' instructions to use these instruments.
2. A battery-operated AC milliammeter. The Data Precision 245 digital multimeter is suitable for this job.
3. Measuring the voltage drop across a resistor by means of a VOM or battery-operated AC voltmeter. The "limit" indication is 0.75 V, so analog meters must have an accurate low-voltage scale. The Simpson 250 and Sanwa SH-63Trd are examples of a passive VOM that is suitable. Nearly all battery operated digital multimeters that have a 2 V AC range are suitable. (See Fig. A)

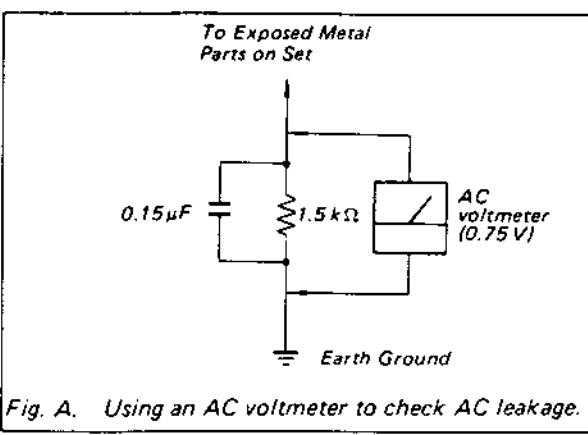



Fig. A. Using an AC voltmeter to check AC leakage.

### On operating voltage

Before operating the unit, check that the operating voltage of your unit is identical with the voltage of your local power supply.

Where purchased	Operating voltage
UK Model	240 V AC
Canadian Model	120V AC
AEP, West Germany Model	220 V AC
E Model	120 V, 220 V or 240 V AC adjustable by AC voltage selector

## SECTION 1 GENERAL

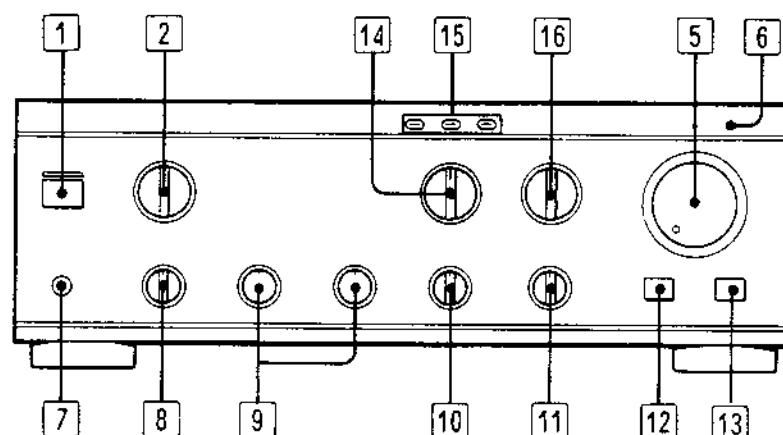

#### ① POWER switch and power/standby indicator

Immediately after turning ON the power, the standby indicator lights in red as the built-in muting circuit activates.

When the amplifier stays in a stable operating condition, the indicator lights in green. The indicator lights in red when the unit detects shorting of circuit of the speaker outputs or in case of short-circuit of the inputs of DC components. In such a case, disconnect the power source and check the connected components and speaker systems.

#### ② SPEAKERS selector

Select speaker system A or B, or both. To use power amplifier or active speaker system connected to the PRE OUT jacks, set the selector to B/PRE OUT. For headphone monitoring only, set the selector to OFF.

#### ③ ATTENUATOR knob

Regulates the sound level.

#### ④ MUTING switch and indicator

Generally, keep the switch released (OFF). Depress the switch to reduce the sound level by 20 dB. (Output voltage becomes 1/10.)

#### ⑤ HEADPHONES jack (stereo phone jack)

#### ⑥ MODE selector

STEREO: For listening to a stereo program.  
MONO: For listening to a monaural program.

#### ⑦ BASS and TREBLE controls

#### ⑧ REC OUT SELECTOR

Selects the program source sent to the REC OUT jacks (rear panel). When set to DIGITAL, the selection is made with the DIGITAL INPUT SELECTOR.

#### ⑨ BALANCE control

Controls the sound level of left and right speakers.

#### ⑩ SOURCE DIRECT switch and indicator

Depress the switch. The red indicator lights and the circuits of the tone control, subsonic filter switch, balance control and mode switch are disengaged without regard to the setting of the switches. When this switch is activated, the indicator of the TONE switch does not light.

#### ⑪ CARTRIDGE selector

Set the selector according to your cartridge.  
MM: For moving-magnet type cartridge  
MC: For moving-coil type cartridge.

#### ⑫ DIGITAL INPUT SELECTOR

Selects the desired digital program source. When set to ANALOG, selection is made with the ANALOG INPUT SELECTOR.

#### ⑬ SAMPLING FREQ (frequency) indicator

When a digital signal is being input correctly, the sampling frequency of the signal is displayed (44.1 kHz is displayed when CD player is being played). The indicator lights in a second after the DIGITAL INPUT is selected and the program source starts at the same time.

#### ⑭ ANALOG INPUT SELECTOR

Selects the desired analog program source. The selection is made only when the DIGITAL INPUT SELECTOR is set to ANALOG.

## PRECAUTION

1. Adjust 10-15

2. Always the po


## IDLING AD

Procedure


Set the A adjust RTD voltmeter

## ADJUSTMENT

digital voltmeter  
(0.00-25V range)



TP35  
(R-C)

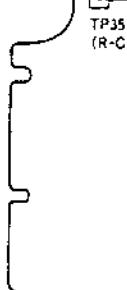

## SECTION 2 ELECTRICAL ADJUSTMENTS

### PRECAUTIONS


1. Adjust the idling after tuning the unit on for about 10-15 minutes, giving it time to warm up.
2. Always make sure to adjust the idling when repairing the power amp section or when replacing any parts.

### IDLING ADJUSTMENT

#### Procedure :


Set the ATTENUATOR control as low as possible and adjust RT301 (L-CH) and RT351 (R-CH) so that the voltmeter reads 7mV at TP301 (L-CH) and TP351 (R-CH).

#### Adjustment Location: power board

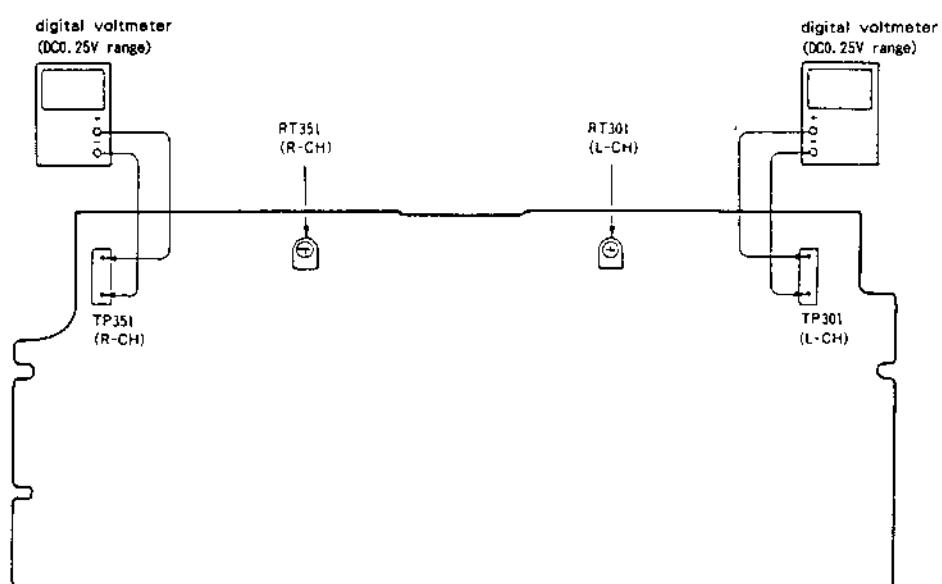


## SECTION 3 DIAGRAMS

### CIRCUIT BOARD LOCATION

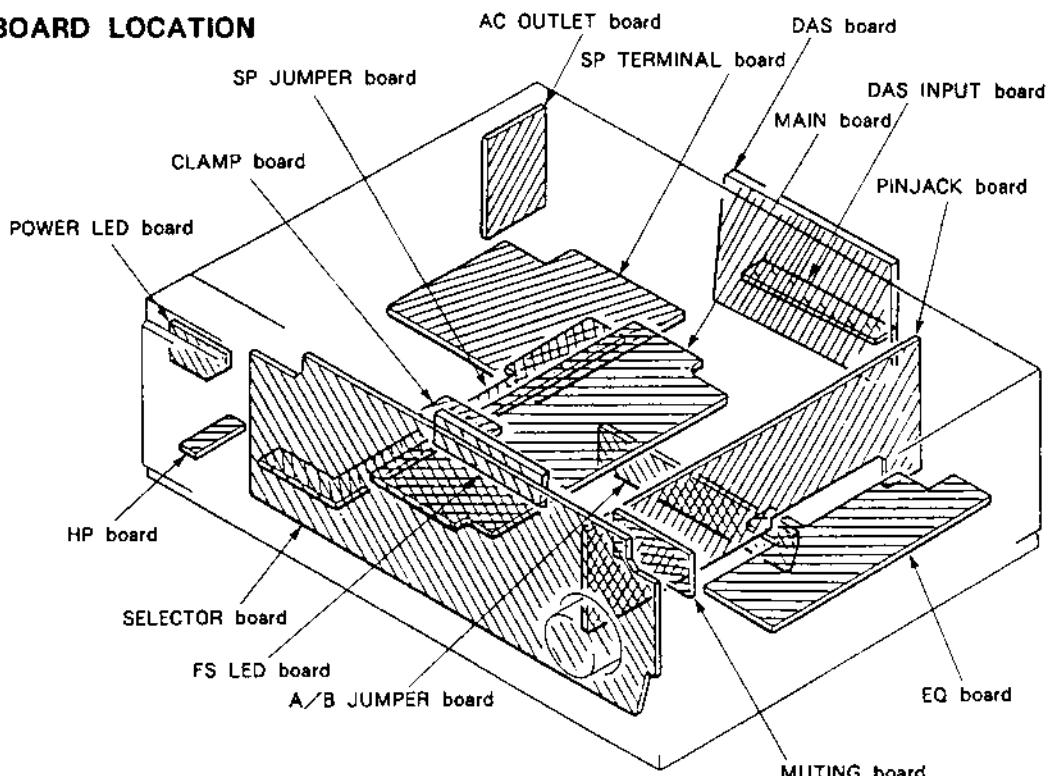

### ● Semiconductor Lead Layouts

STK-3102-3




2SA733-Q  
2SA988-F  
2SC945-P  
2SC2545  
2SC3622A-L


2SC3423




HZS7B2L  
1SS168



SEL2810A



M5F7806



2SD774-3  
2SA985A  
2SC2275-P




SEL2213C



US1060M  
UZL-16L  
10E2N  
30DF2



SEL2510C



DTA124ES  
DTC124ES



2SA1215M-O  
2SC2921M-O



cathode  
anode



### 3-1. SCHEMATIC DIAGRAMS – AMP SECTION –

#### Note on Schematic Diagrams :

- All capacitors are in  $\mu\text{F}$  unless otherwise noted. pF:  $\mu\mu\text{F}$
- 50WV or less are not indicated except for electrolytics and tantalums.
- All resistors are in  $\Omega$  and  $1/4\text{W}$  or less unless otherwise specified.
- Components for right channel have same values as for left channel.
- : nonflammable resistor.
- : fusible resistor.

**Note:**  
The components identified by mark or dotted line with mark are critical for safety. Replace only with part number specified.

- : adjustment for repair.
- Voltage and waveforms are dc with respect to ground under no-signal conditions.

[ ] : PHONO

- Voltages are taken with a VOM.  
(Input impedance  $10\text{M}\Omega$ )


Voltage variations may be noted due to normal production tolerances.


- Signal path.

: PHONO


WG : West Germany


CND : Canadian

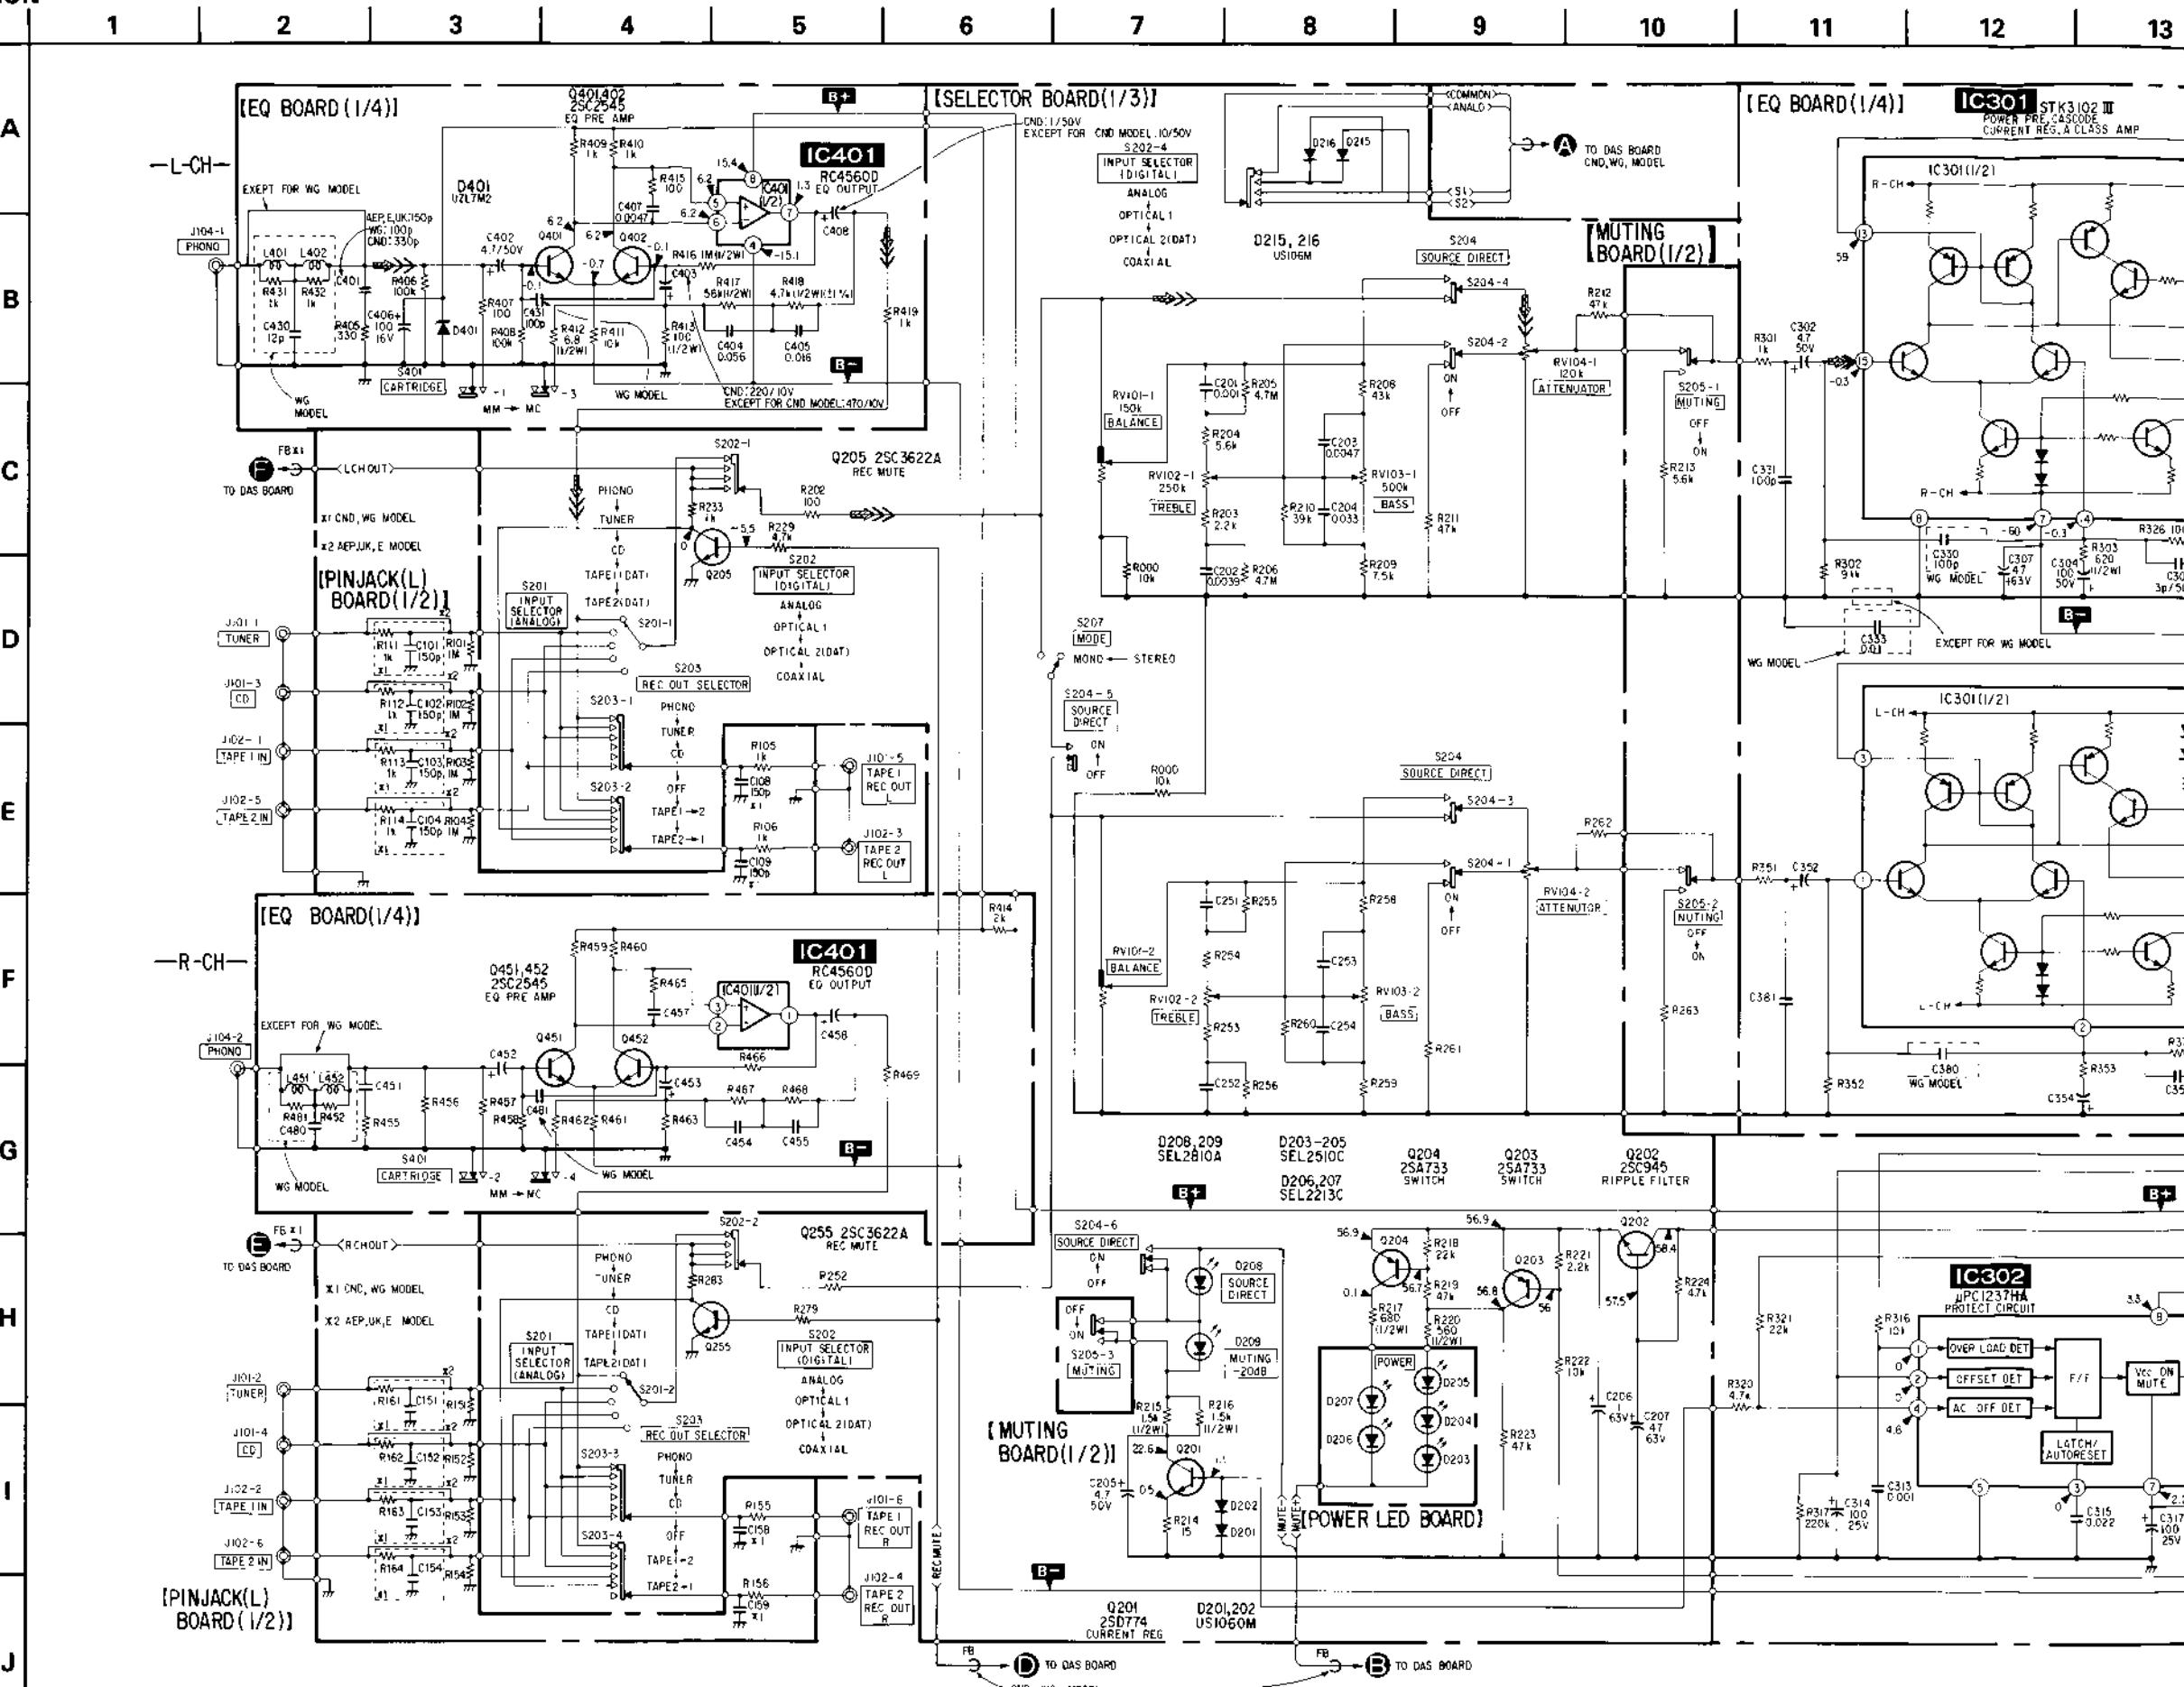

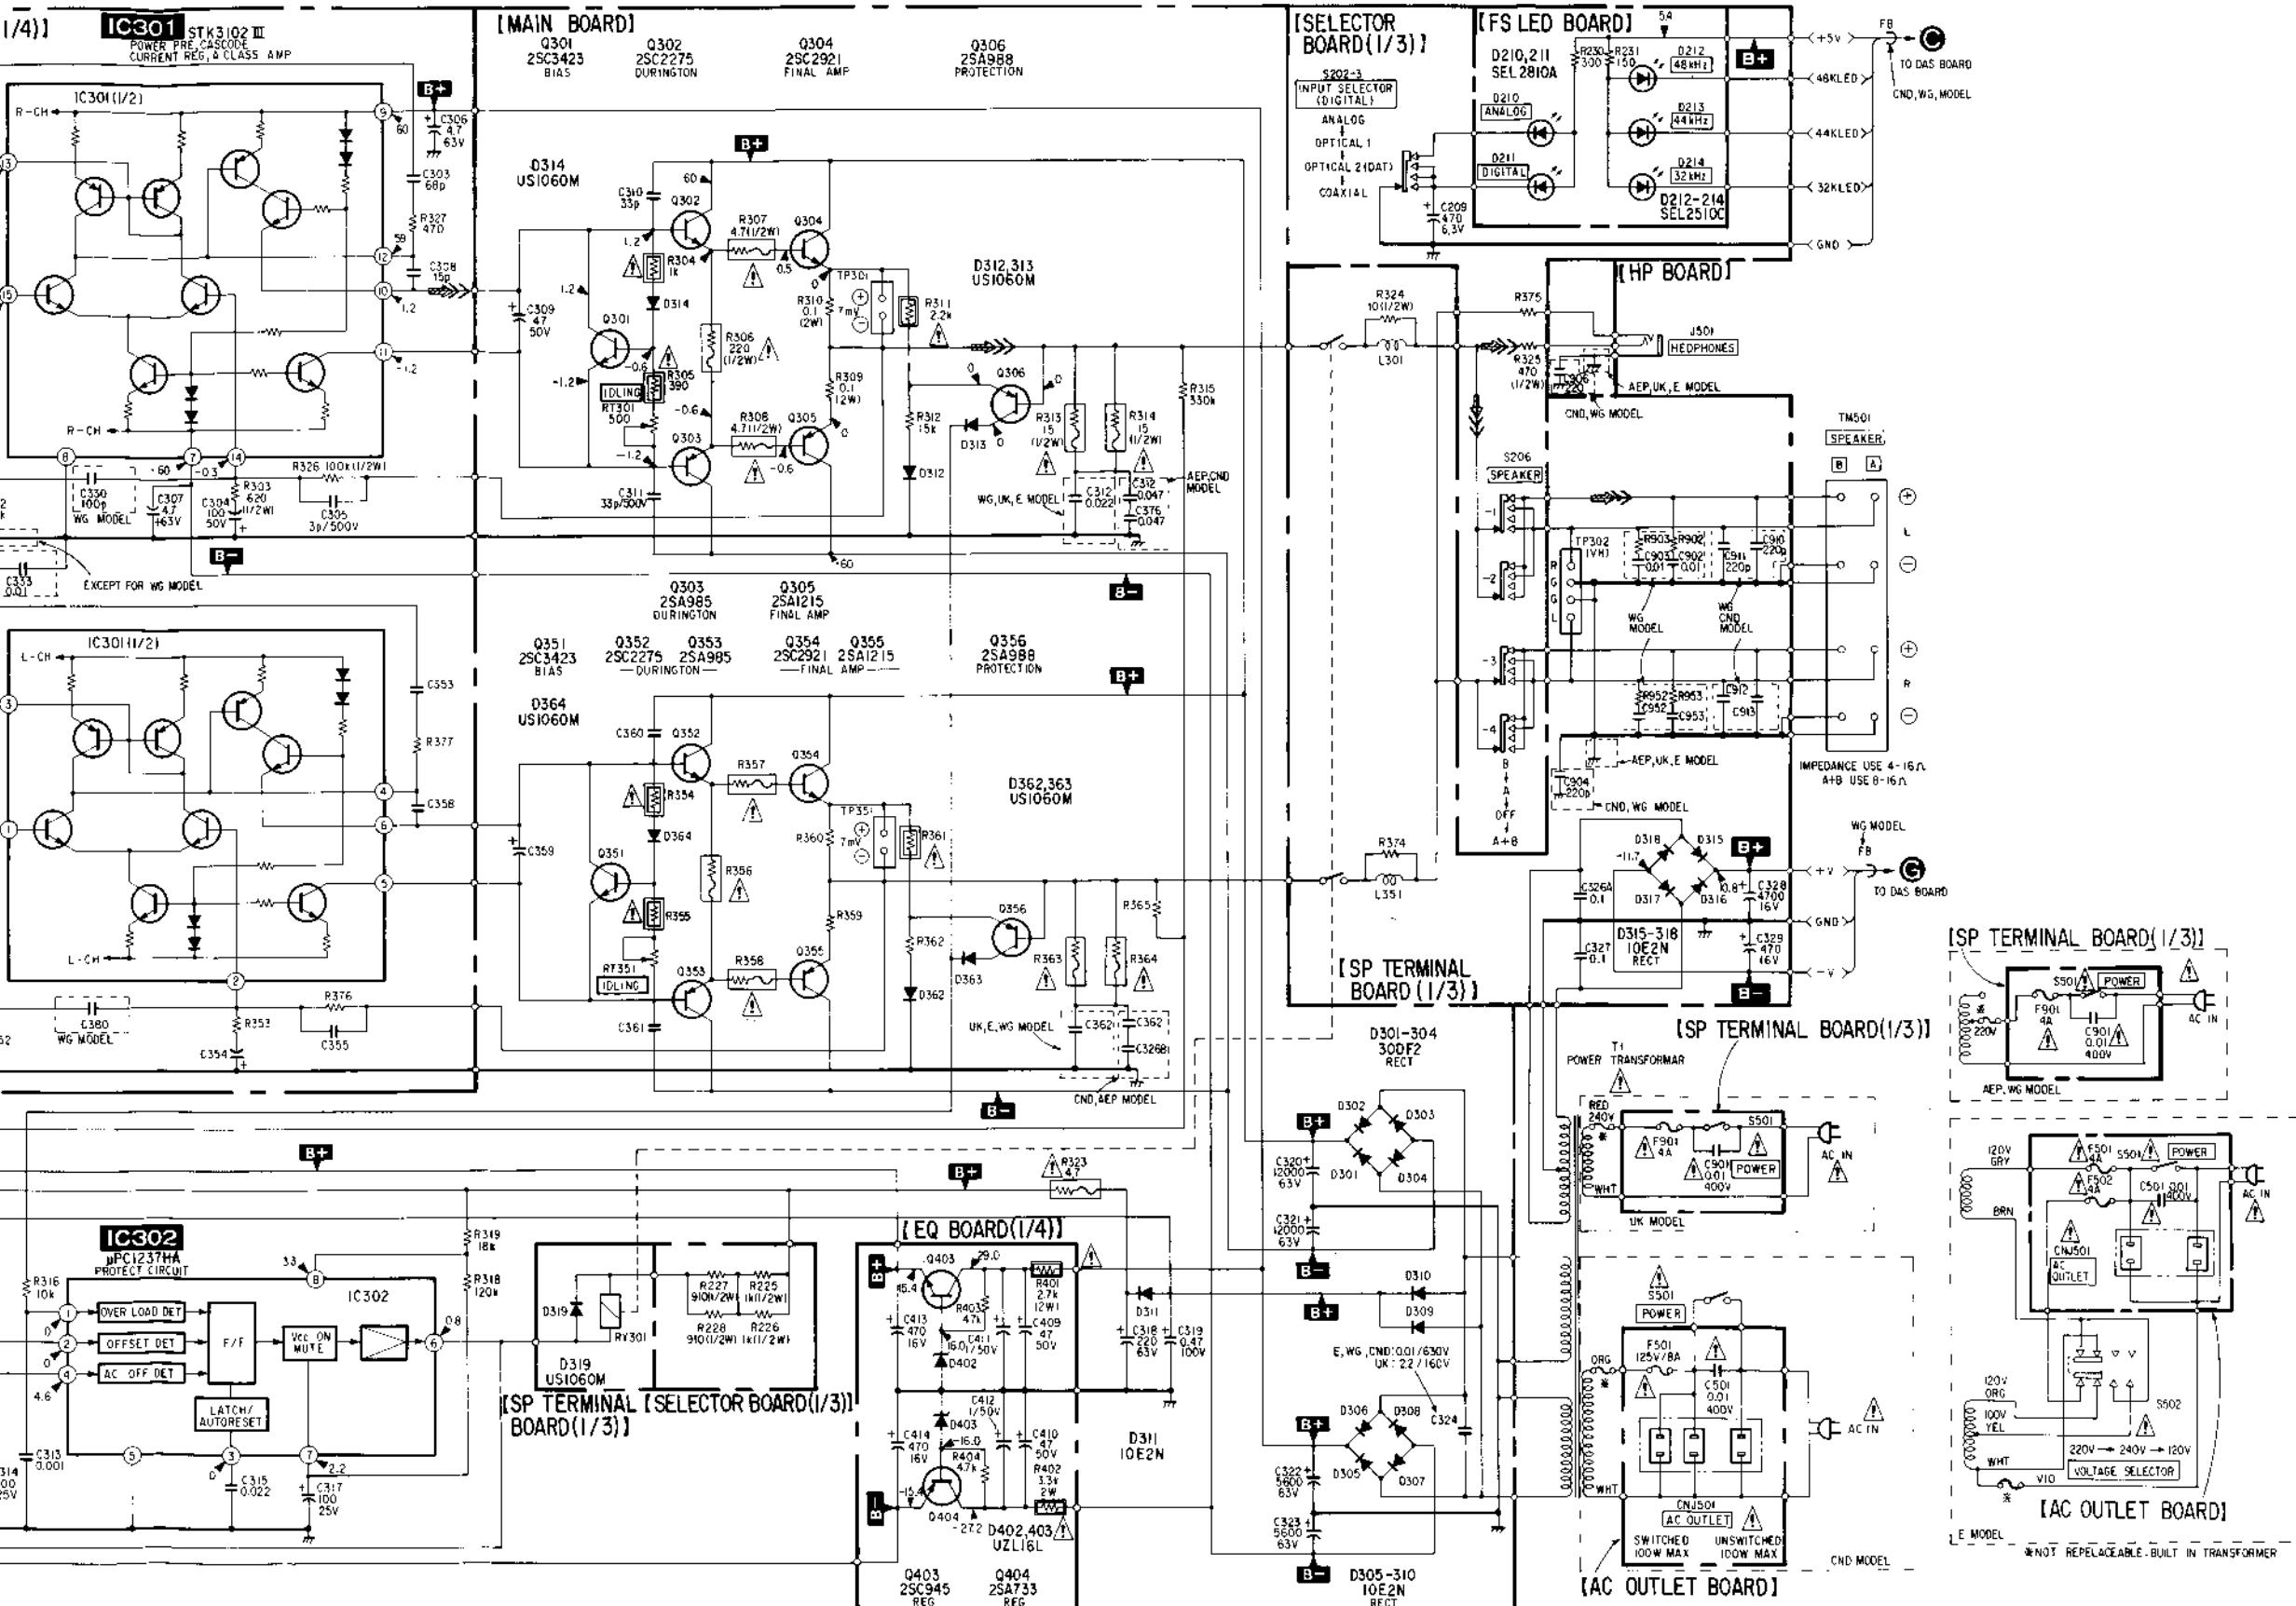

3-2. PRINTED WIRING BOARDS - AMP SECTION -

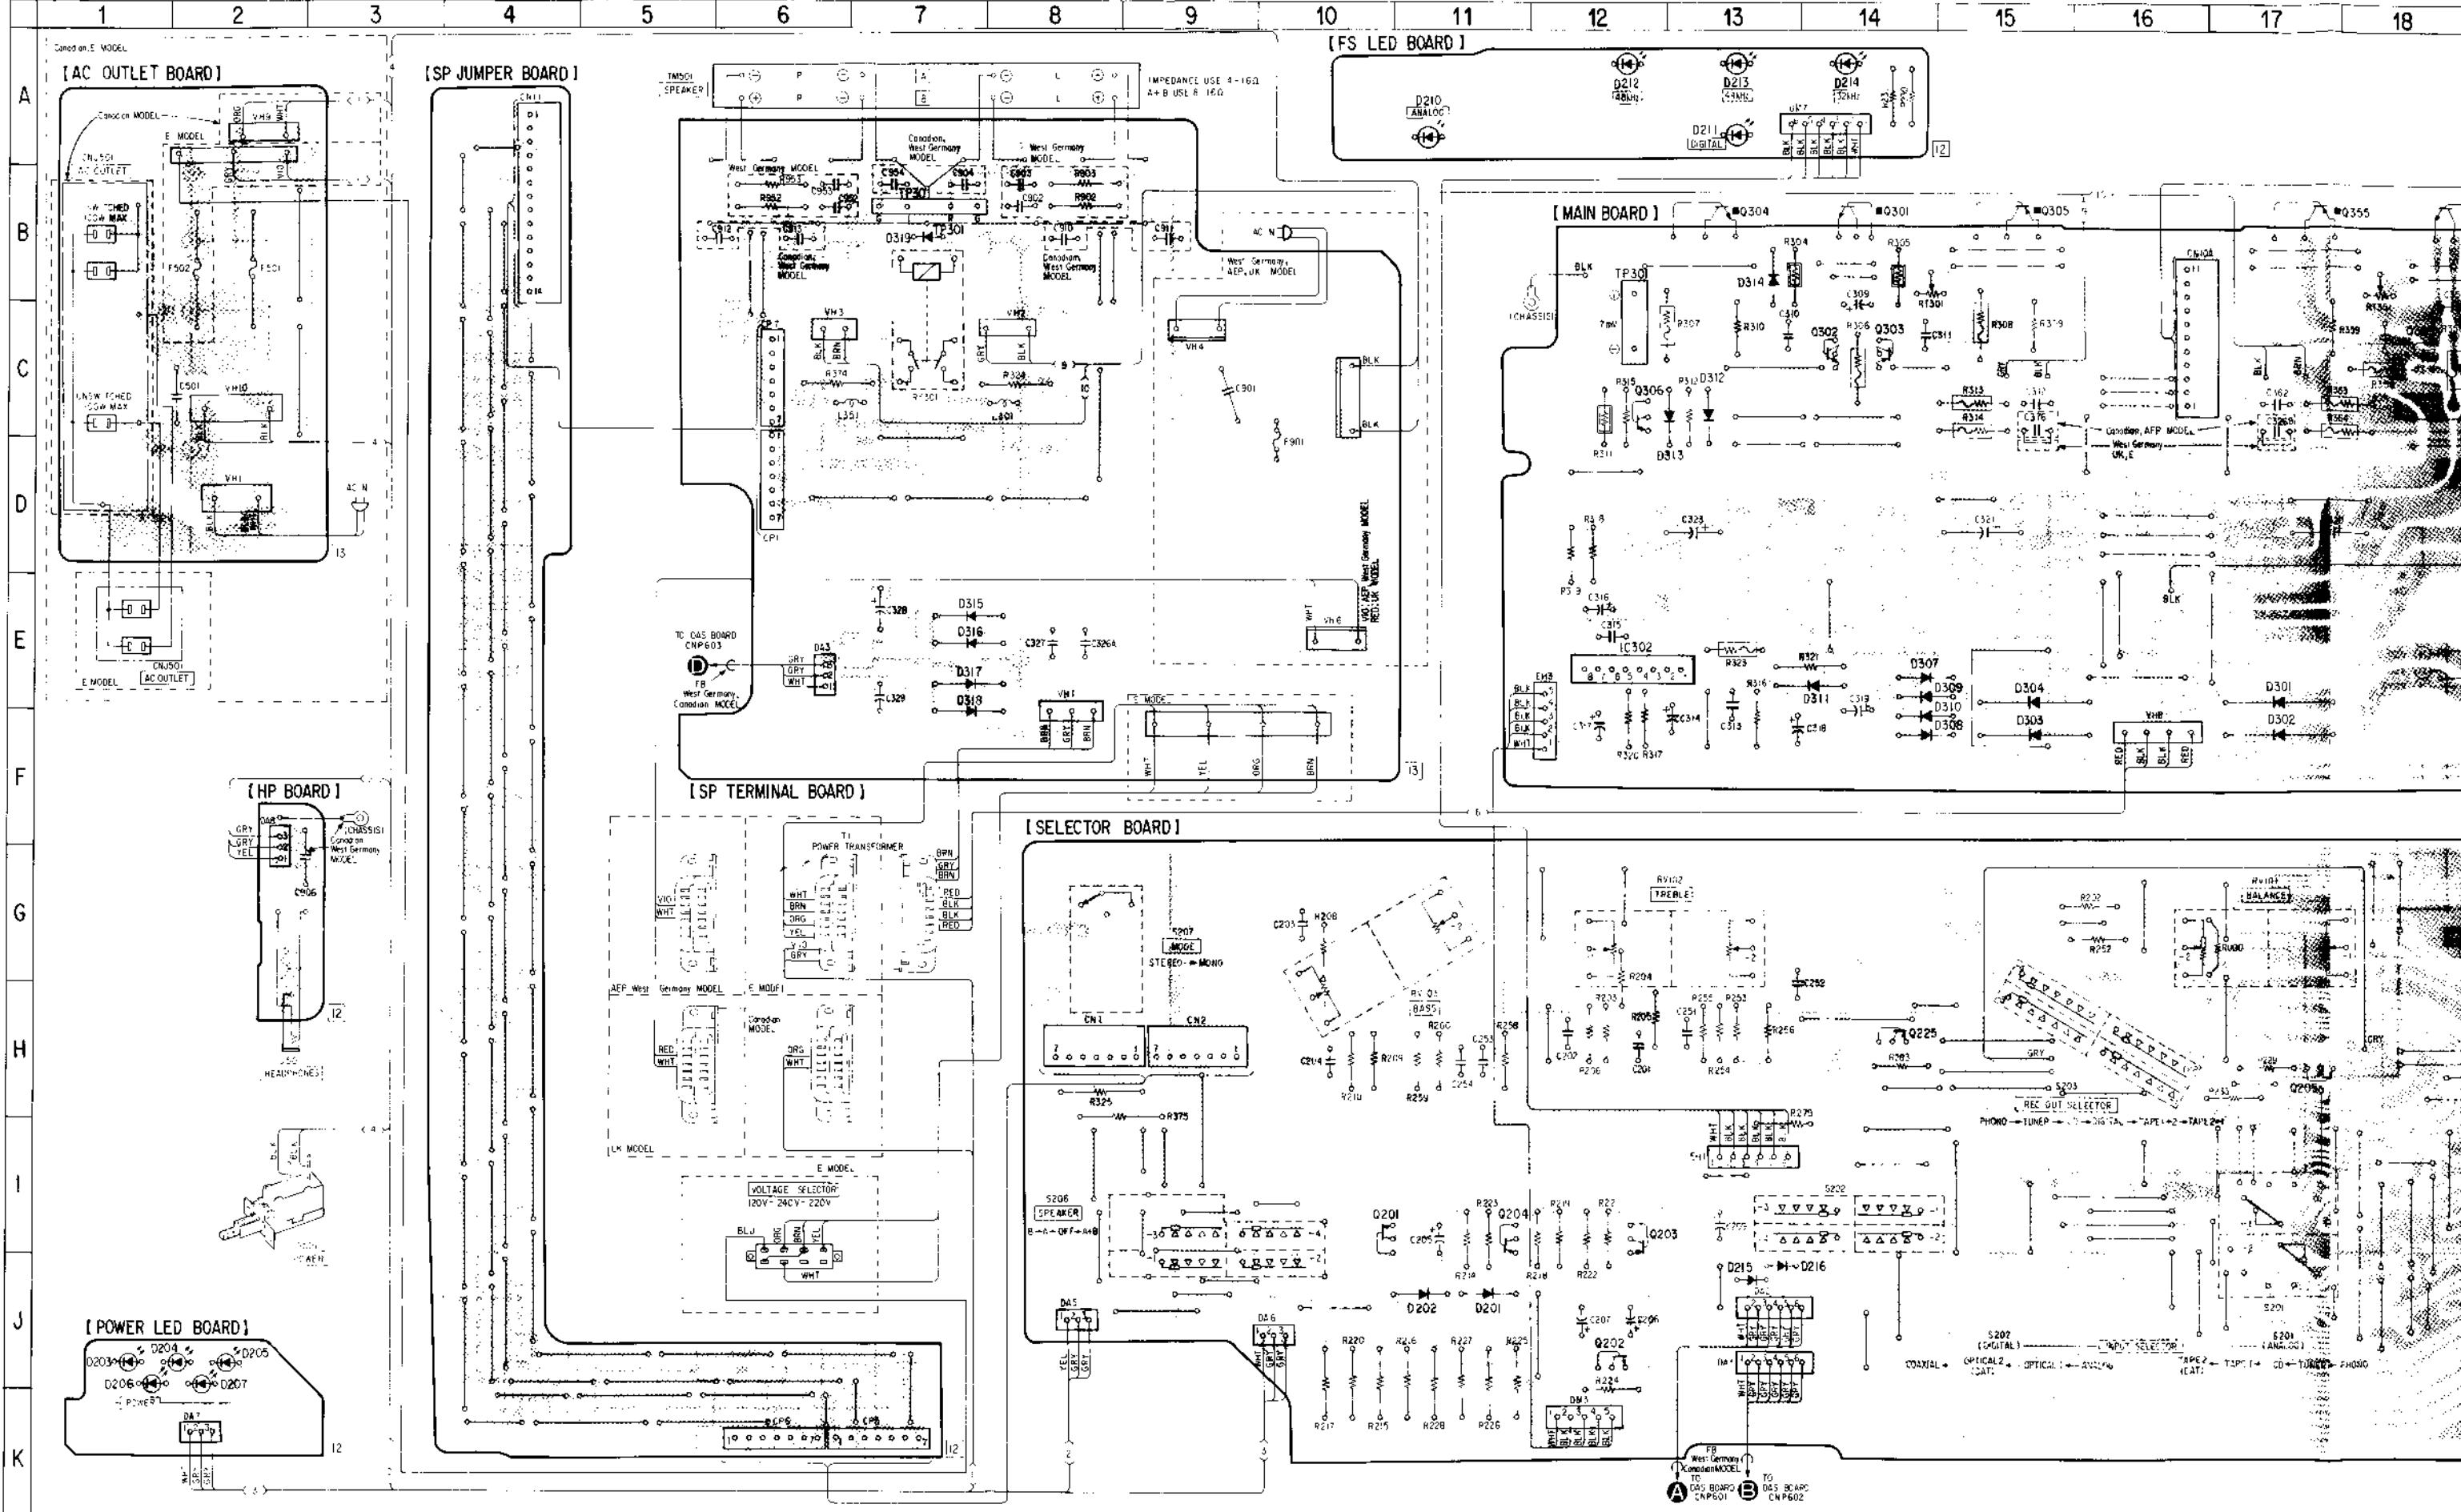

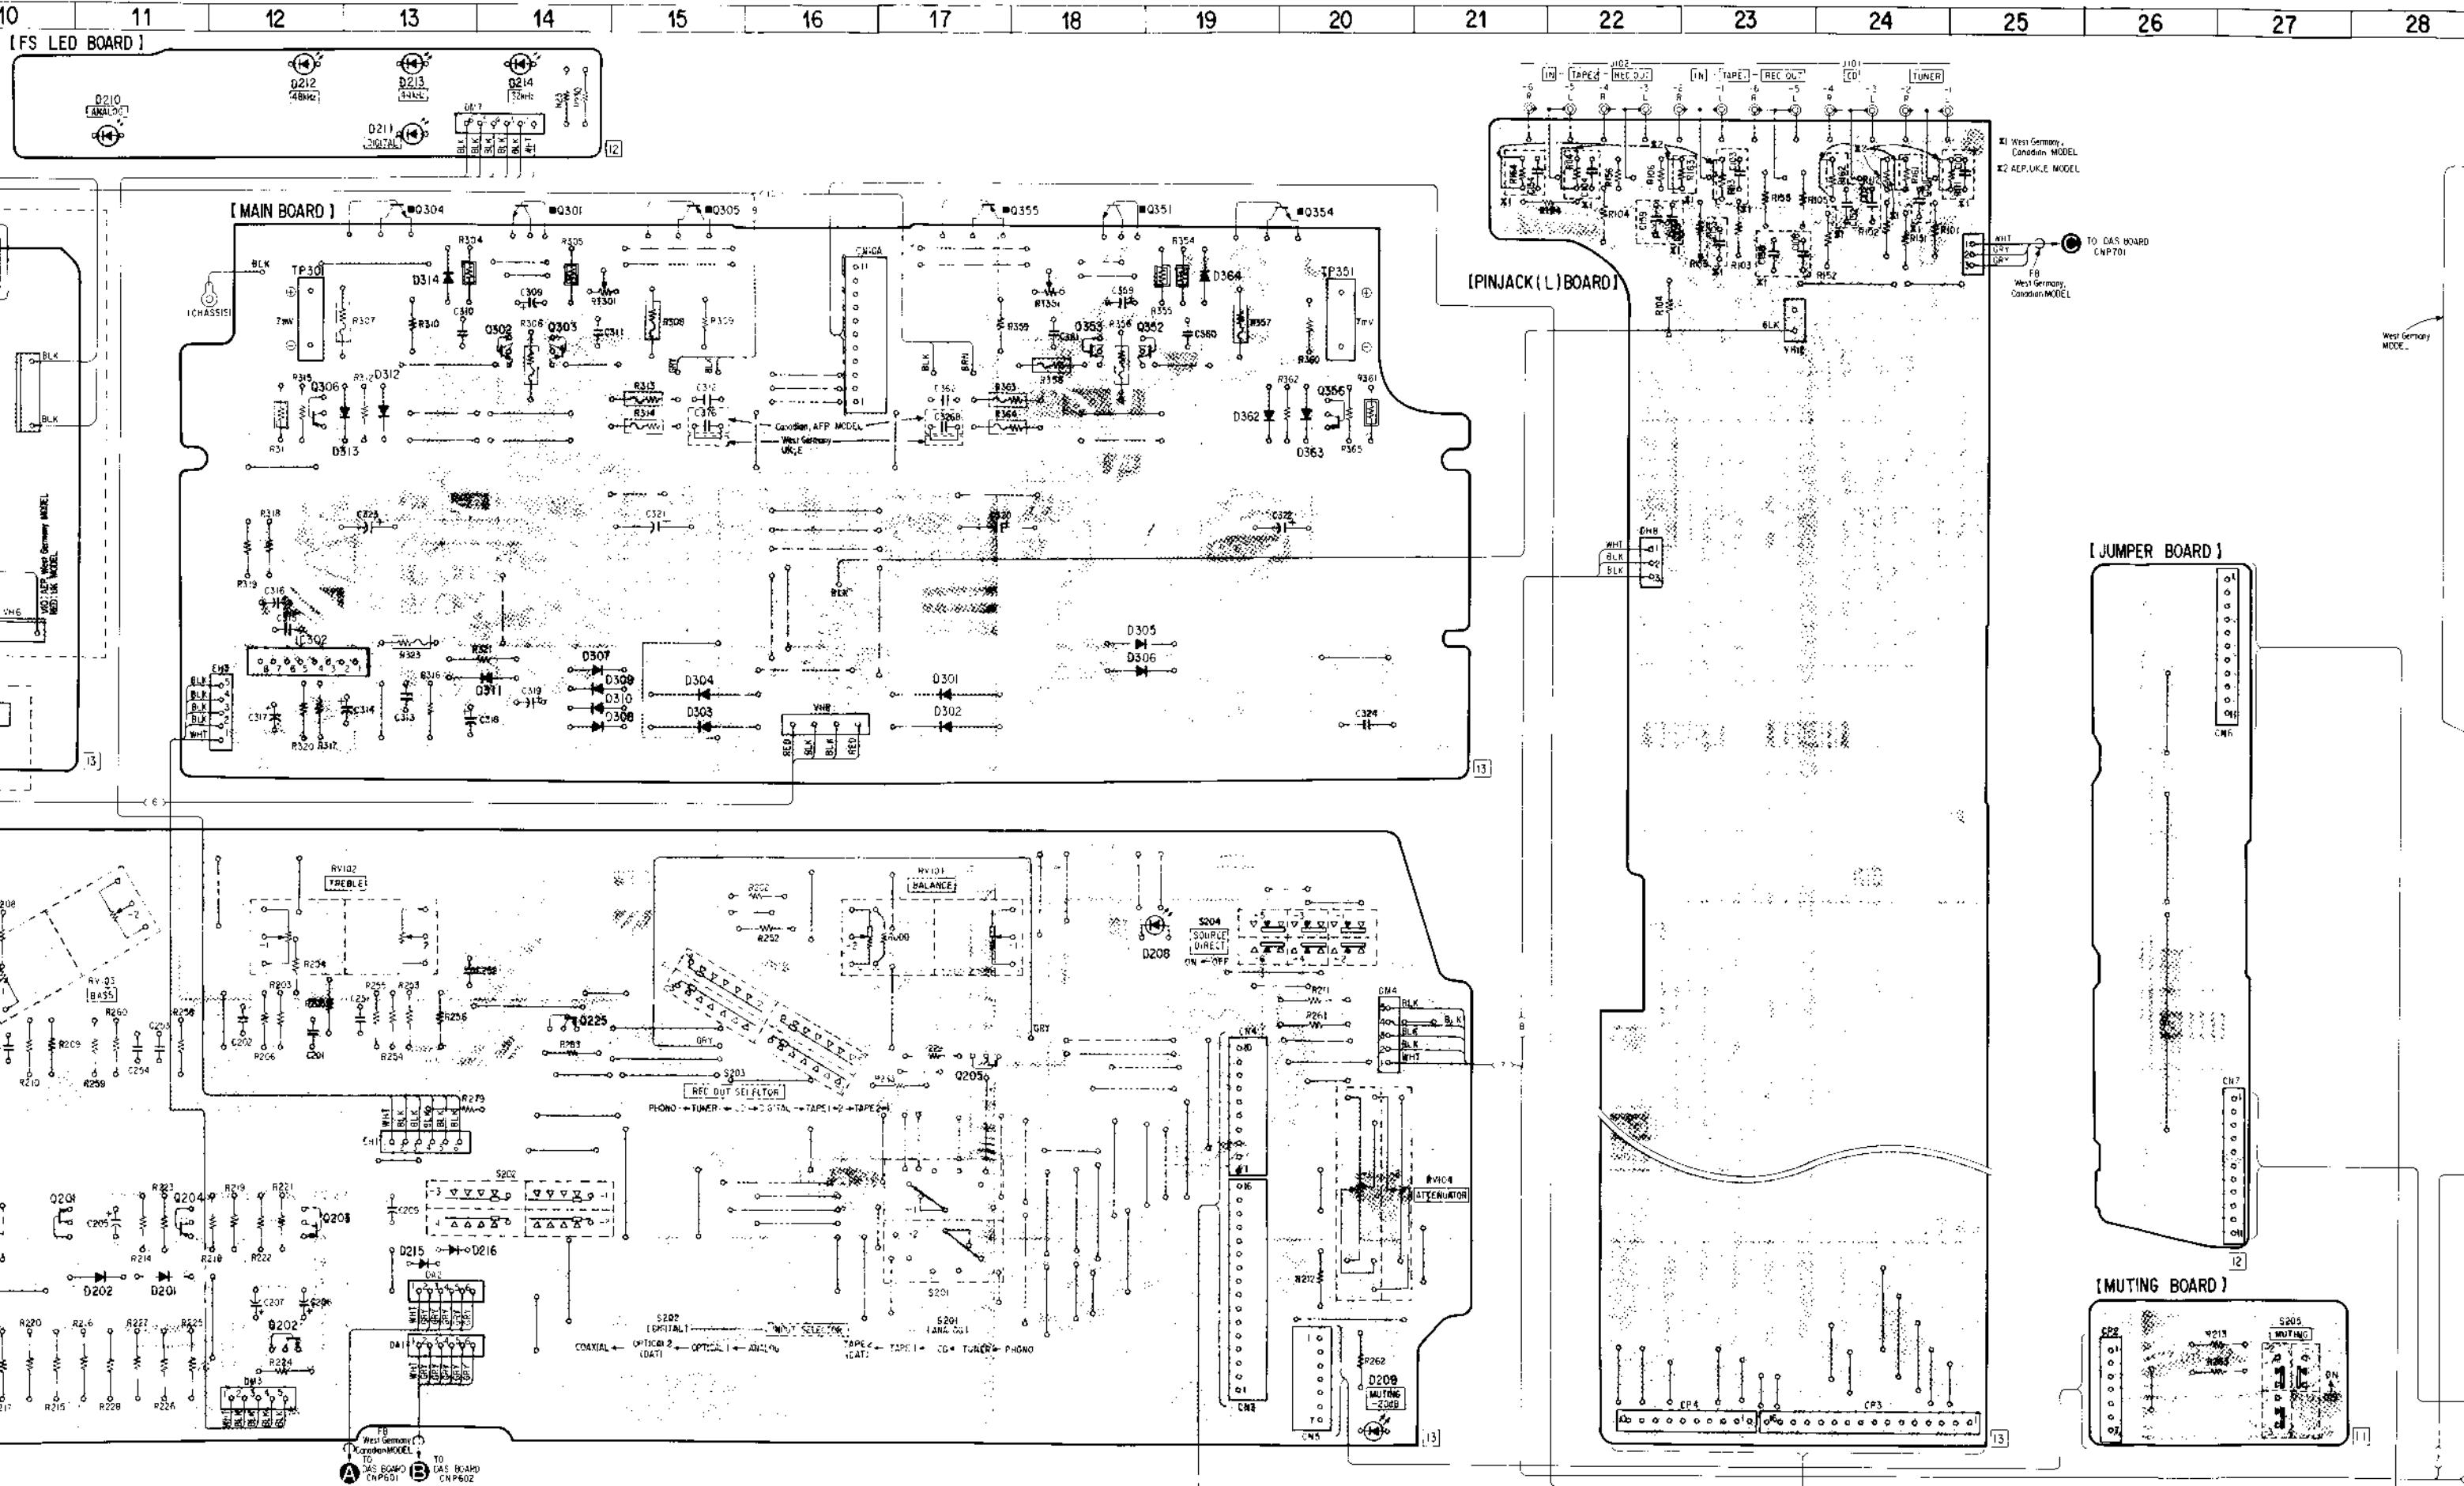

22

23

---

24

25

1

1

1

1

9

---

30


37

1

1

1

1

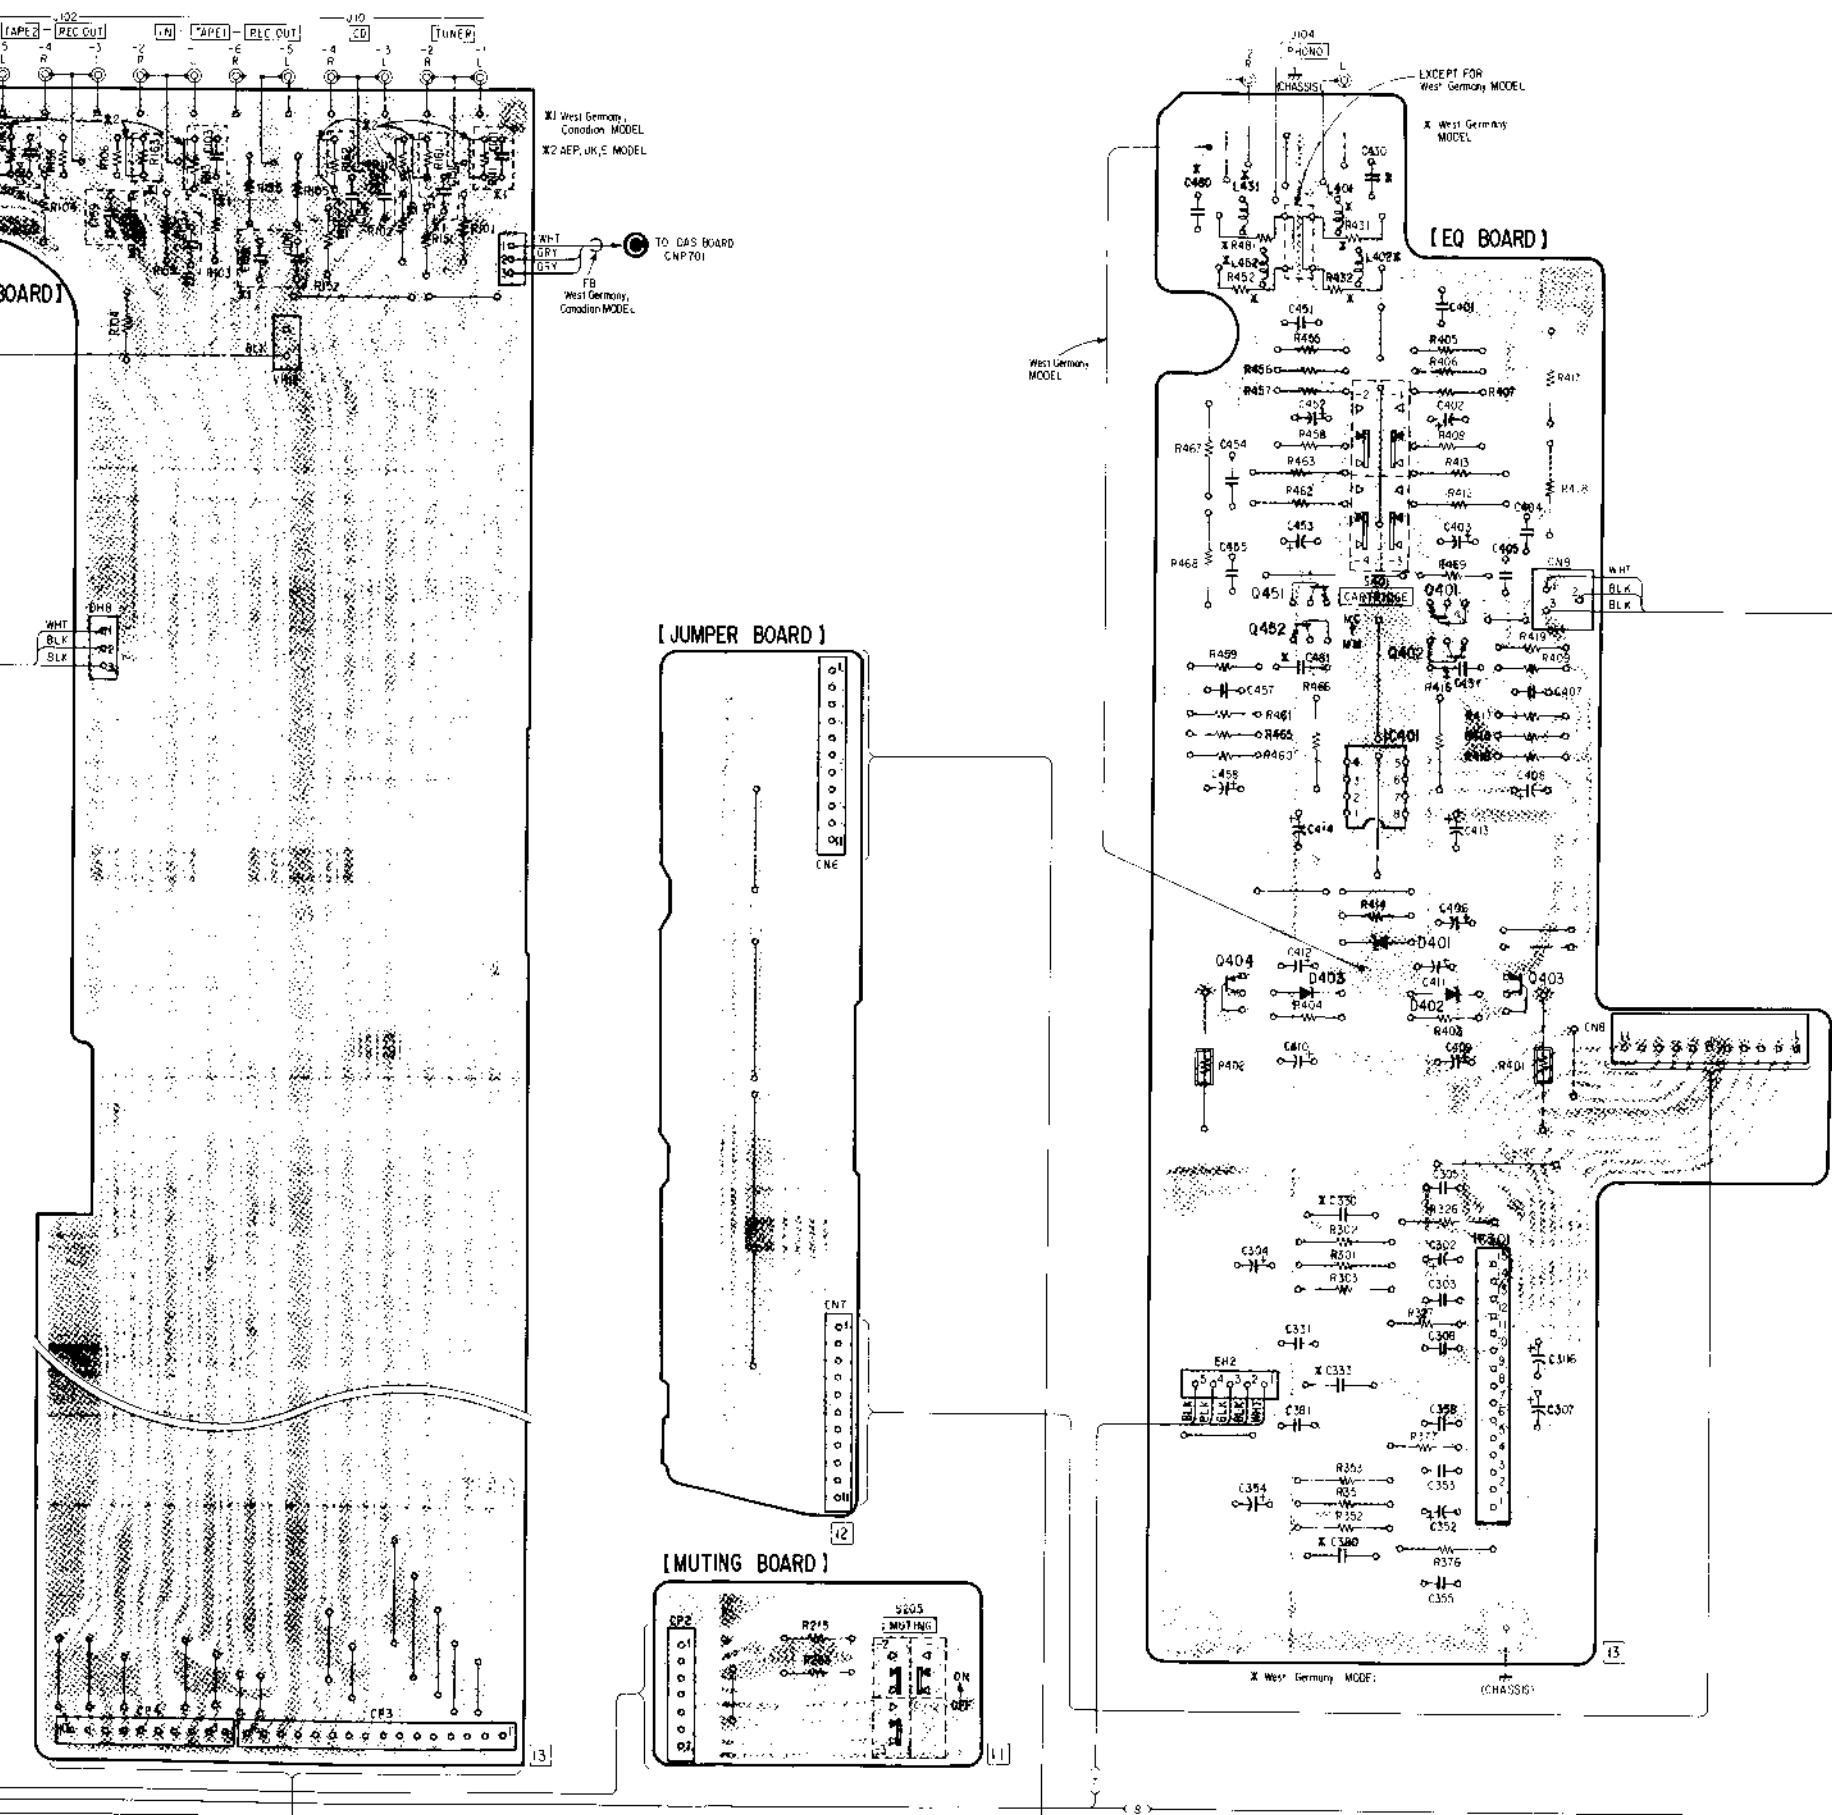

#### ● Semiconductor Location


Ref. No.	Location	Ref. No.	Location
D201	J-11	D363	C-20
D202	J-11	D364	B-19
D203	J-1	D401	F-30
D204	J-2	D402	F-30
D205	J-2	D403	F-29
D206	J-1		
D207	J-2	IC301	I-30
D208	G-19	IC302	E-12
D209	K-20	IC401	E-30
D210	A-11		
D211	A-13	Q201	I-10
D212	A-12	Q202	J-12
D213	A-13	Q203	I-12
D214	A-14	Q204	I-11
D215	J-13	Q205	H-17
D216	J-13	Q255	H-14
D301	E-17	Q301	B-14
D302	F-17	Q302	C-14
D303	F-15	Q303	C-14
D304	E-15	Q304	B-13
D305	E-18	Q305	B-15
D306	E-18	Q306	C-12
D307	E-14	Q351	B-18
D308	F-14	Q352	C-18
D309	E-14	Q353	C-18
D310	F-14	Q354	B-19
D311	E-14	Q355	B-17
D312	C-13	Q356	C-20
D313	C-13	Q401	D-30
D314	B-13	Q402	D-30
D315	E-7	Q403	F-31
D316	E-7	Q404	F-29
D317	E-7	Q451	D-29
D318	E-7	Q452	D-29
D319	B-7		
D362	C-19		

#### **Note on Printed Wiring Boards :**

- — : parts extracted from the component side.
  - — : parts extracted from the conductor side.
  - ■ : parts mounted on the conductor side.

### **3-3. PRINTED WIRING BOARDS - D/A CONVERTER SECTION -**


● Semiconductor Locations	
Ref. No.	Location
D604	F-2
D605	F-2
D606	F-1
D607	G-2
D609	D-2
D610	E-2
D611	F-2
IC601	E-2
IC602	F-2
IC603	G-3
IC604	E-3
IC605	F-4
IC606	E-4
IC607	D-2
IC608	C-2
IC609	F-4
IC610	D-6
IC701	E-5
IC703	G-6
IC801	A-3
IC802	A-6
IC803	A-5
IC804	A-5
IC805	B-2
IC806	A-7
Q601	C-2
Q602	C-4
Q603	C-5
Q604	G-6
Q606	C-6
Q607	D-2
Q654	F-6

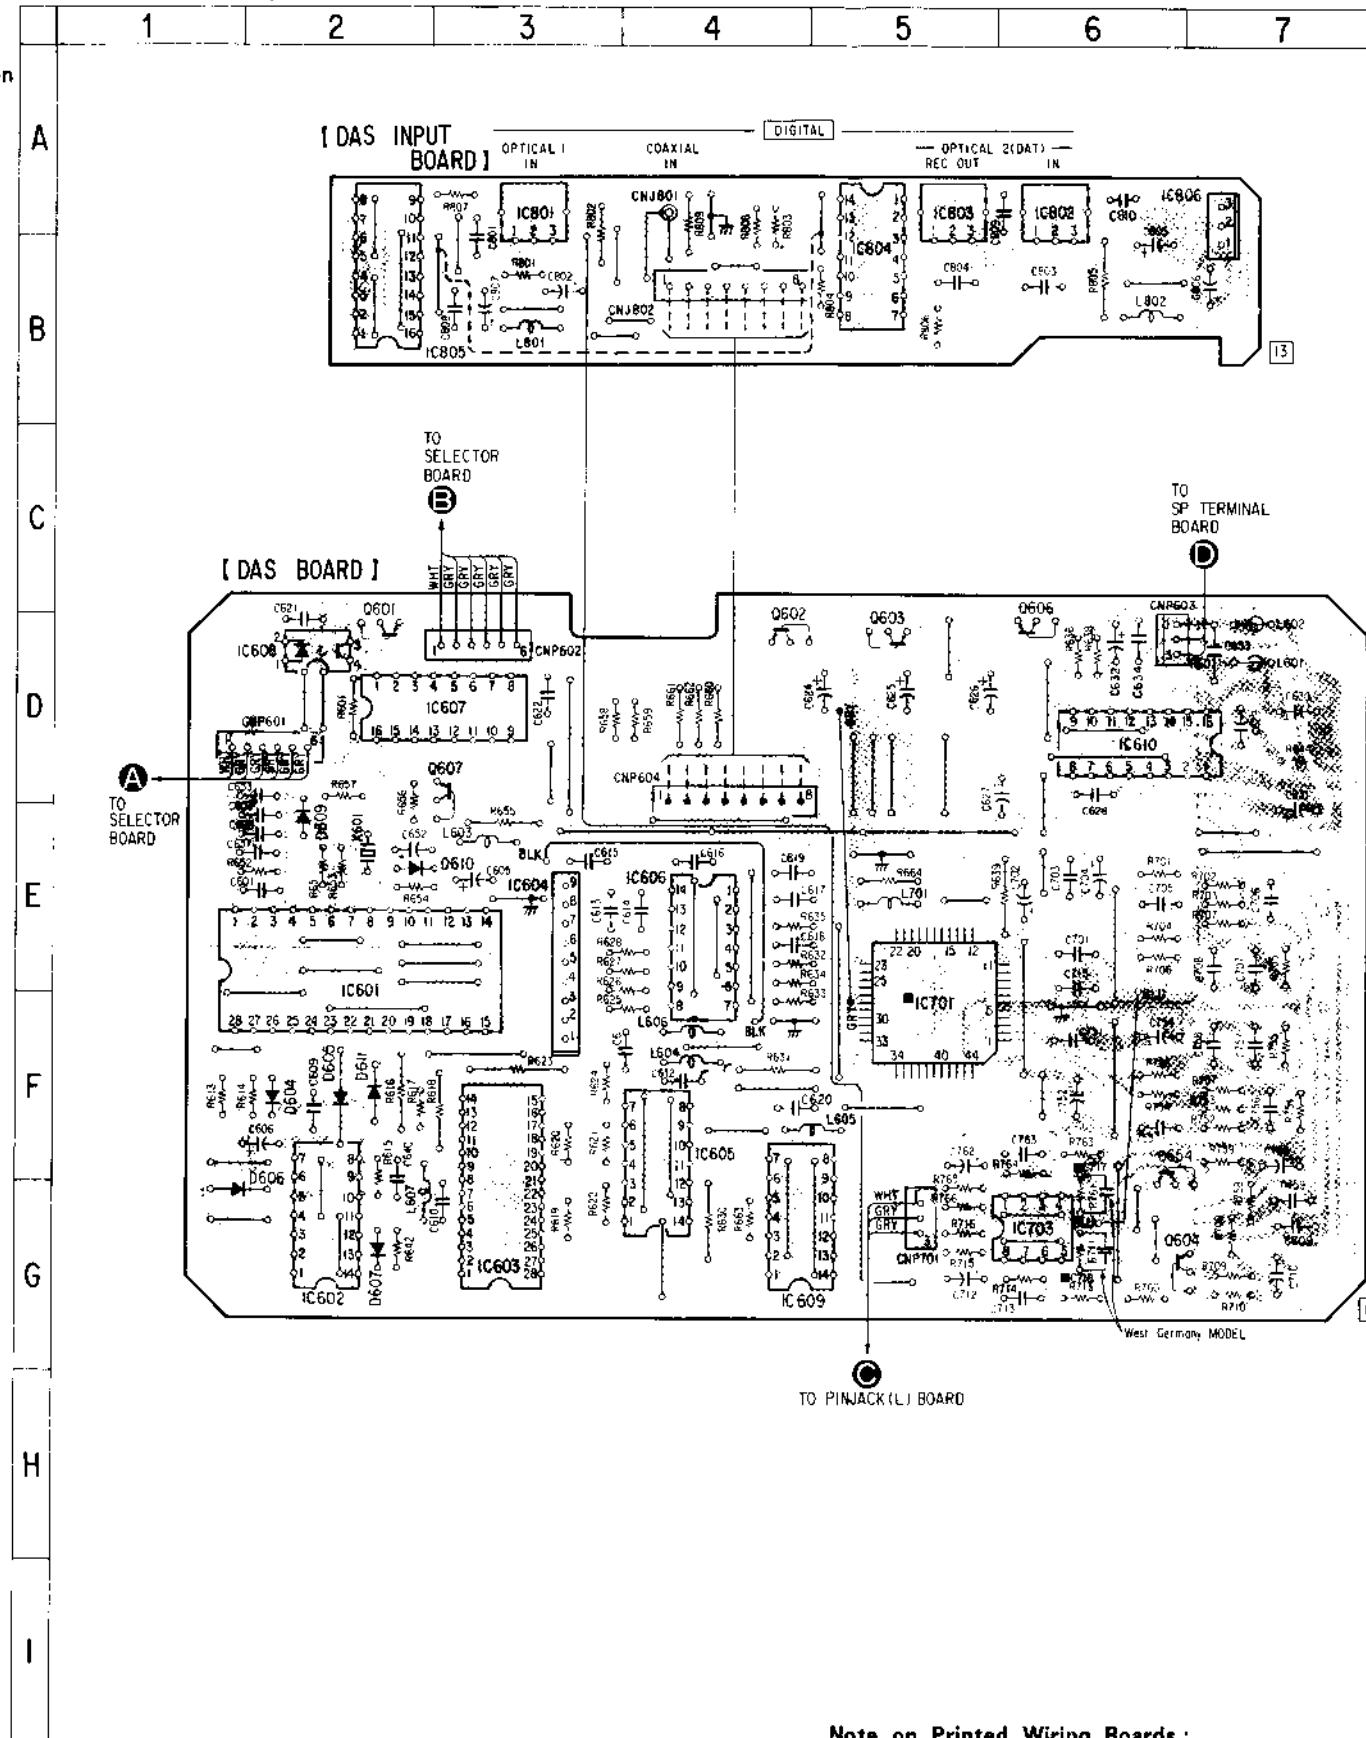

### Note on Printed Wiring Boards

- : parts extracted from the component side.
  - : parts mounted on the conductor side.
  - : Jumper wire connected to the ground pattern on the component side.


### **3-4. SCHEMATIC DIAGRAM - D/A CONVERTER SECTION -**

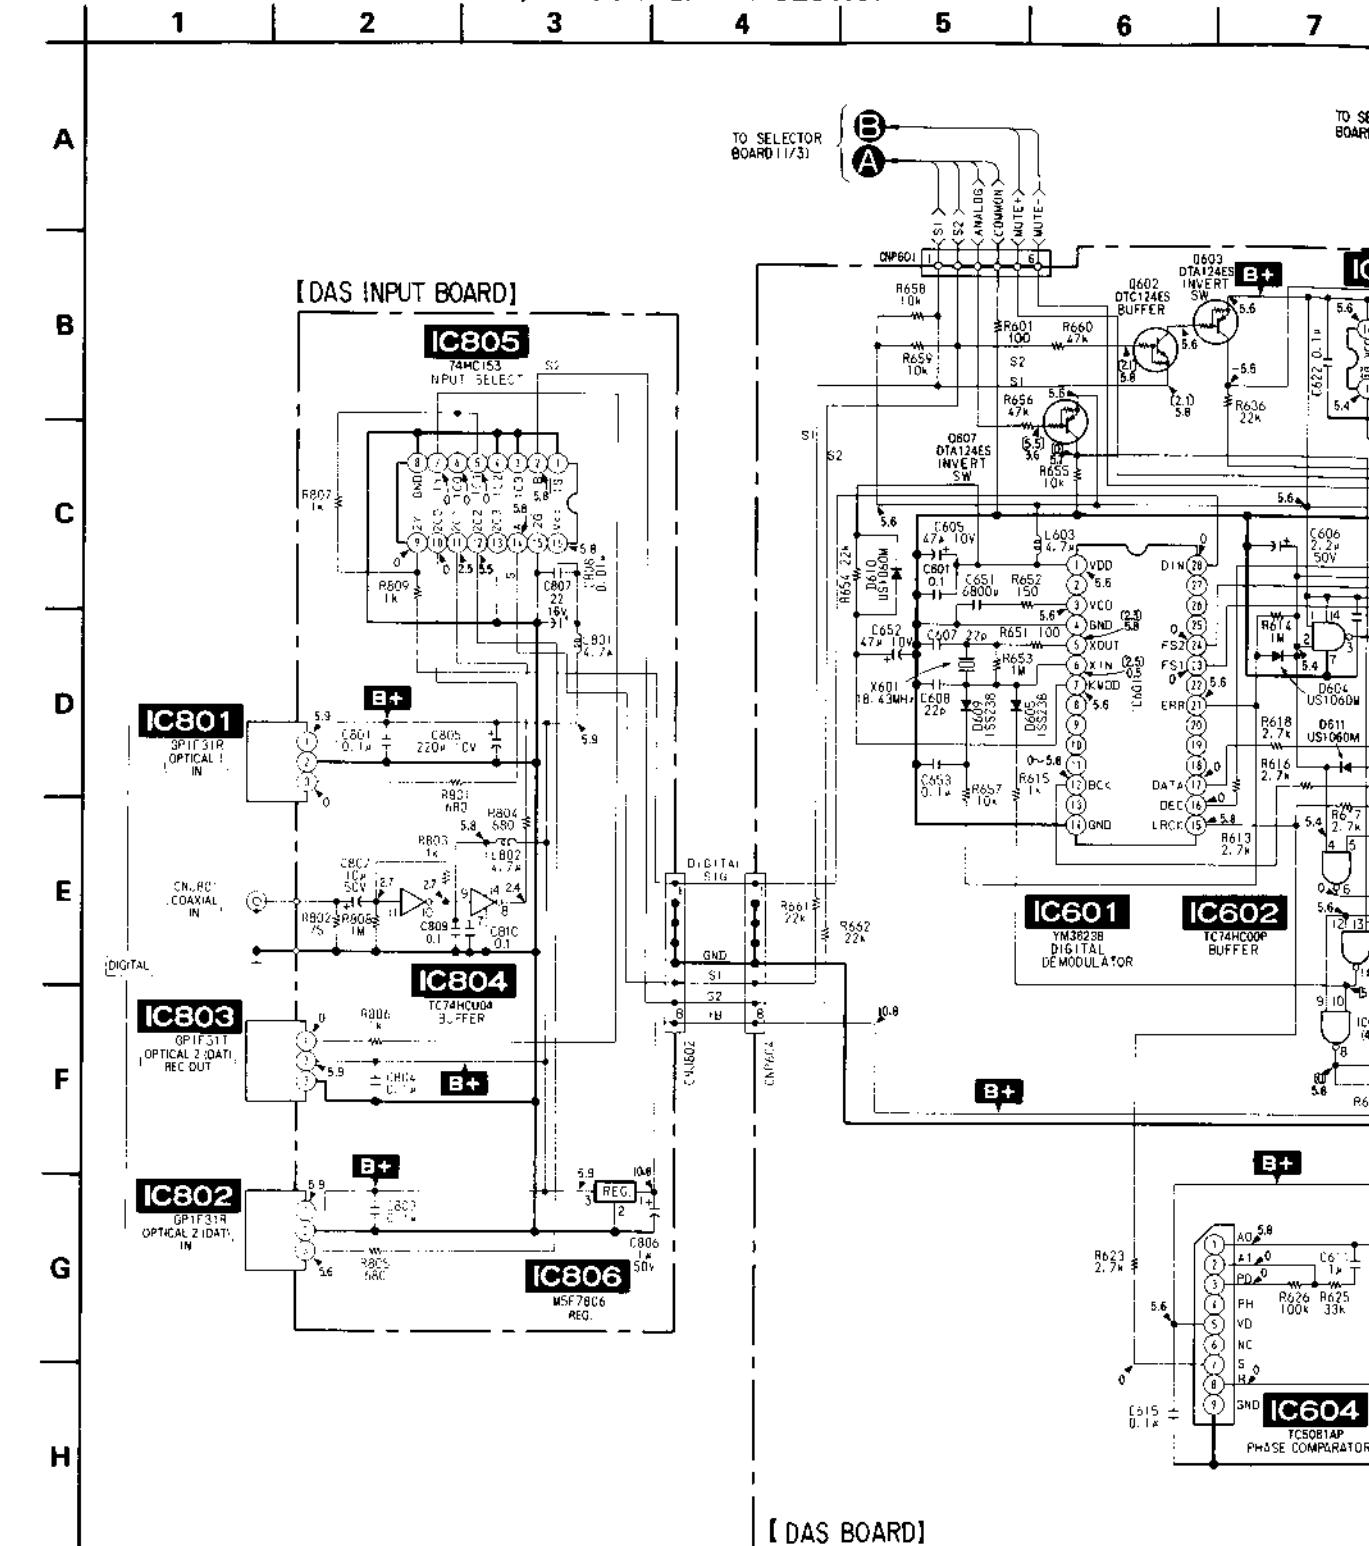

\* caution on repairing the DAS board

When repairing the DAS board, remove the shielding case. Since the chassis, which had been acting as ground, is disconnected at that time, connect a ground lead wire during repair.




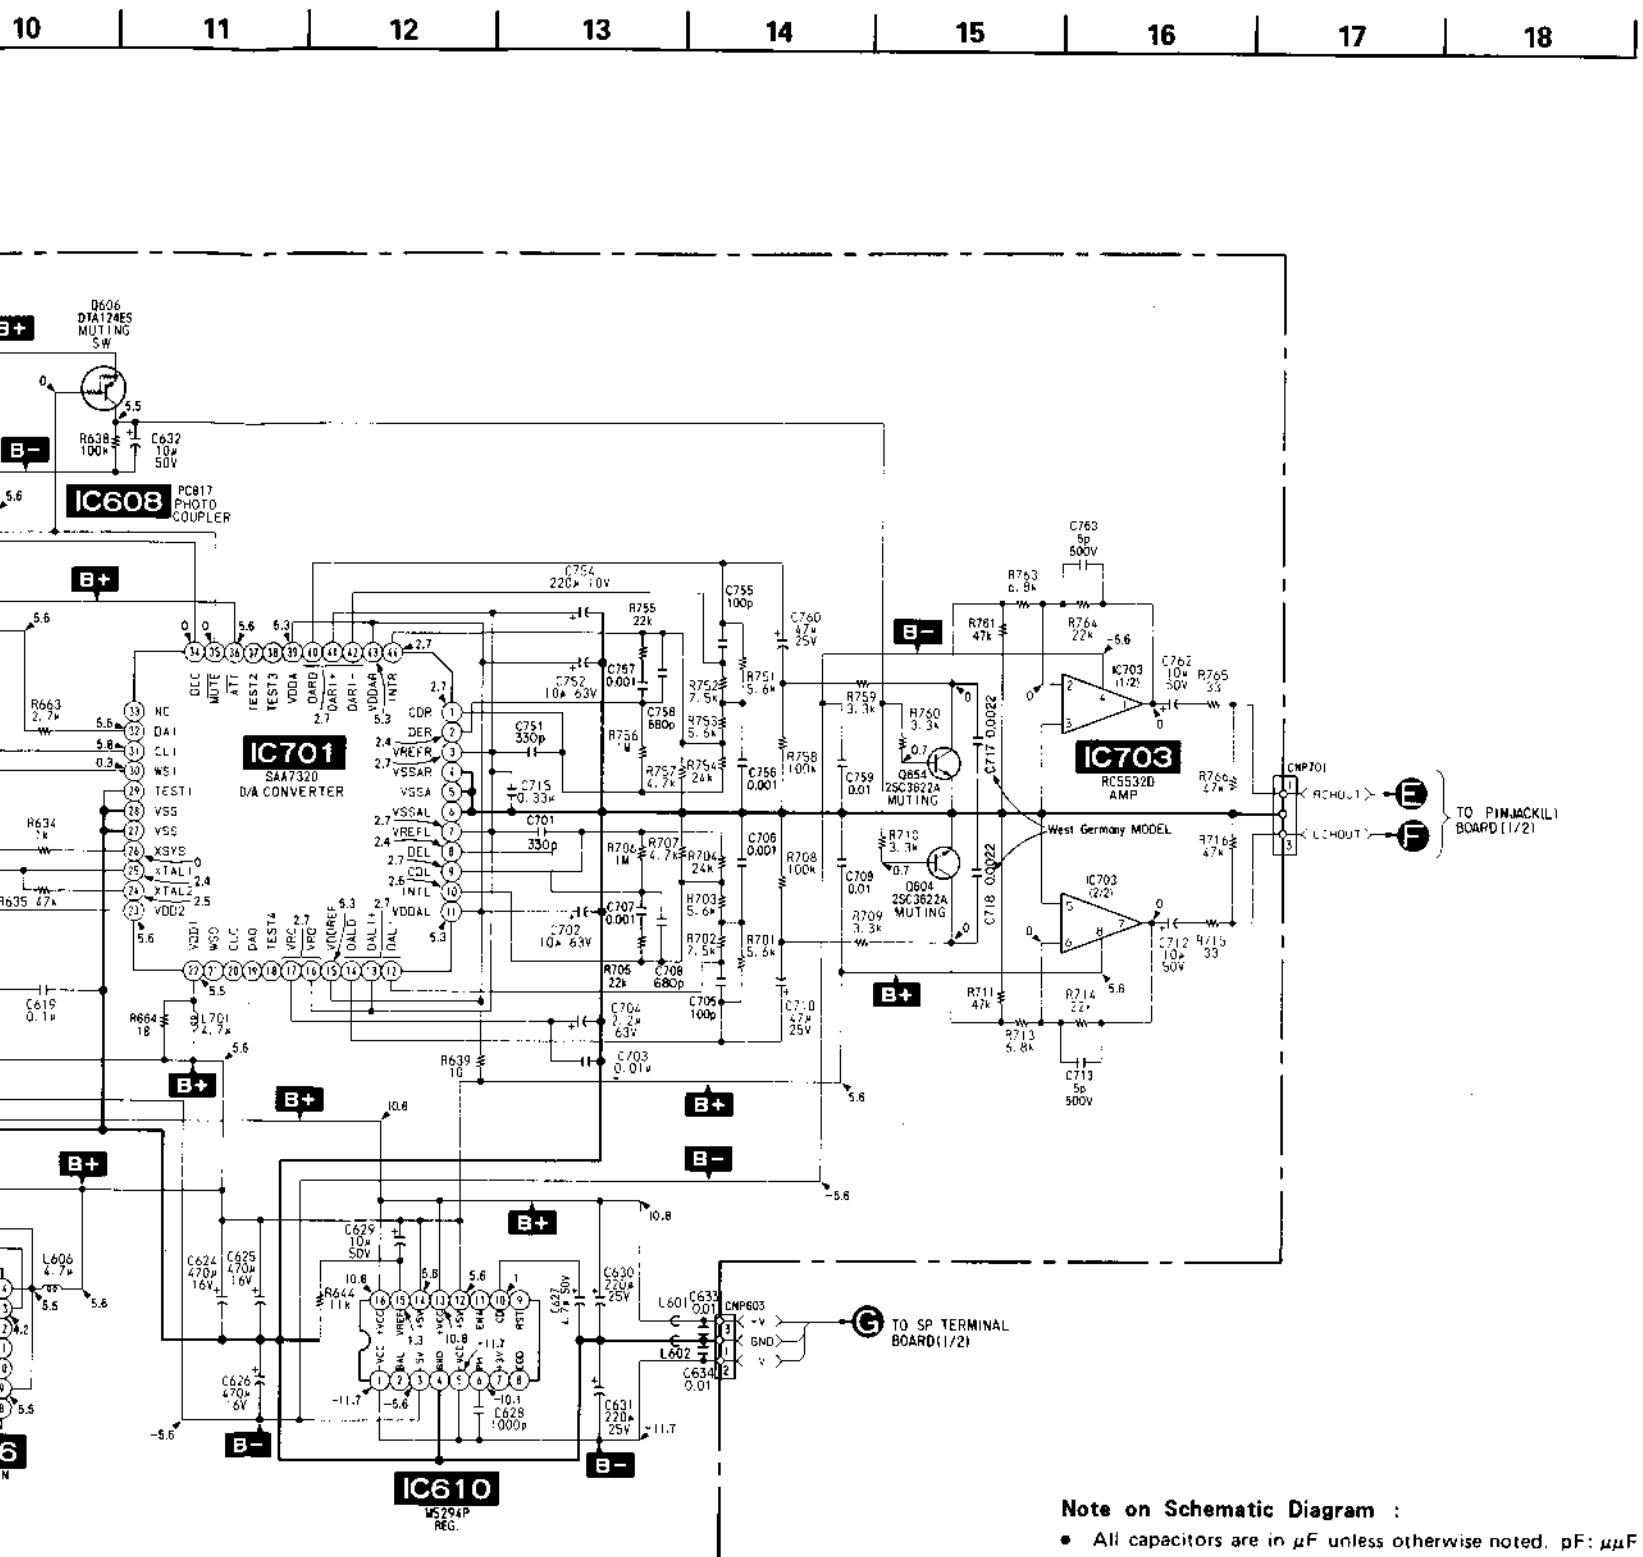


Note on Schematic Diagram :

- All capacitors are in  $\mu\text{F}$  unless otherwise noted.  $\mu\text{F}$ :  $\mu\mu\text{F}$  50WV or less are not indicated except for electrolytics and tantalums.
- All resistors are in  $\Omega$  and  $1/4\text{W}$  or less unless otherwise specified.
- Voltage and waveforms are dc with respect to ground under no-signal conditions.  
no mark: PHONO  
[ ]: digital
- Voltages are taken with a VOM.  
(Input impedance  $10\text{M}\Omega$ )  
Voltage variations may be noted due to normal production tolerances.
- Signal path:  
[ ]: digital input signal


SAA7320

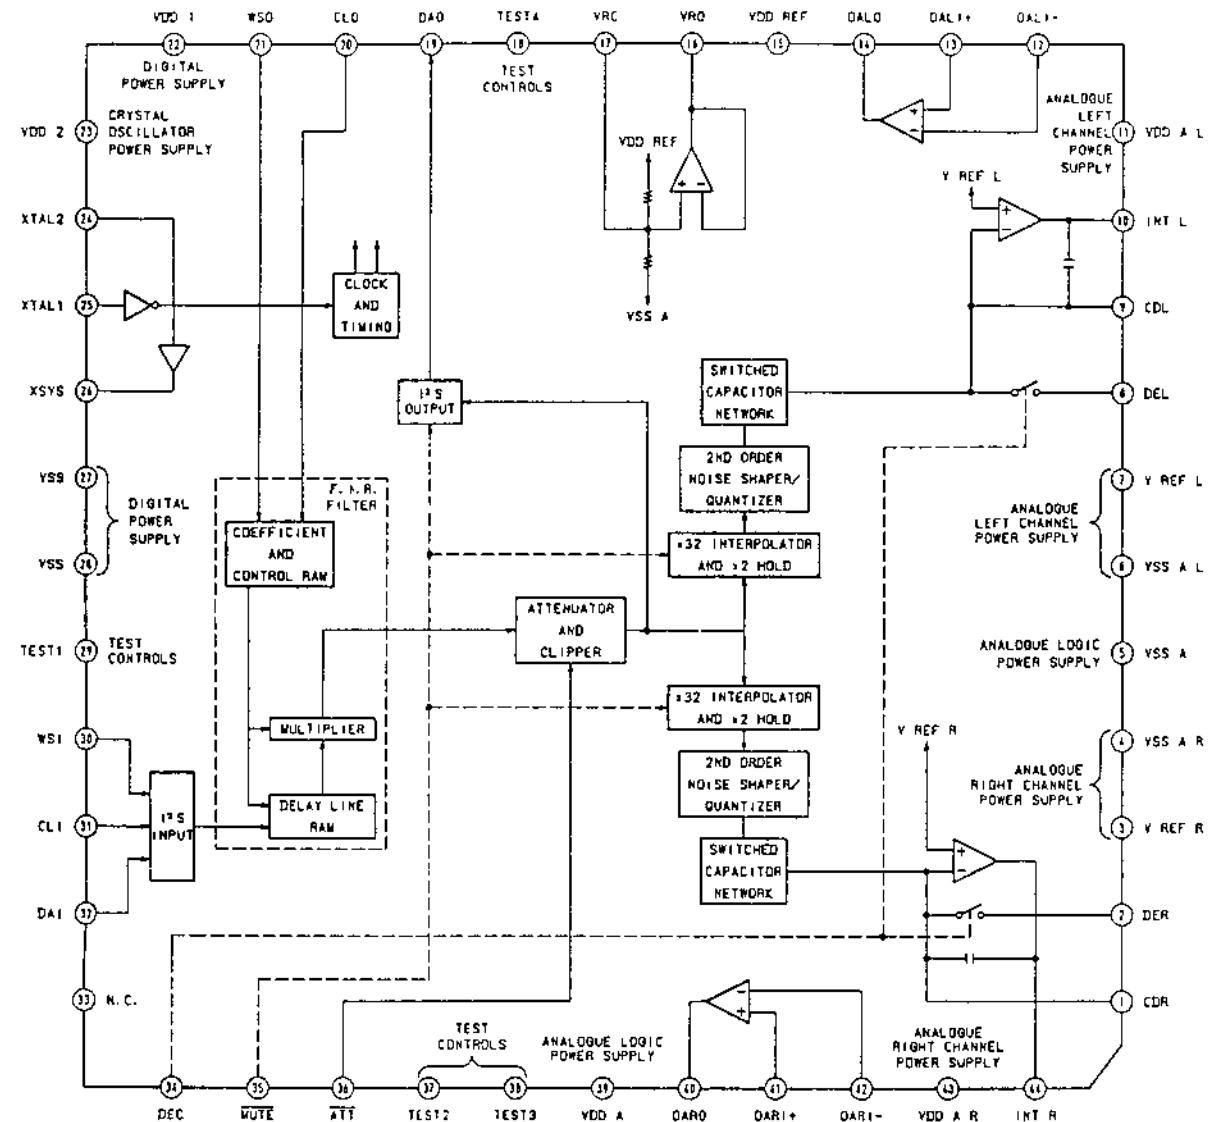


CXD-8003S

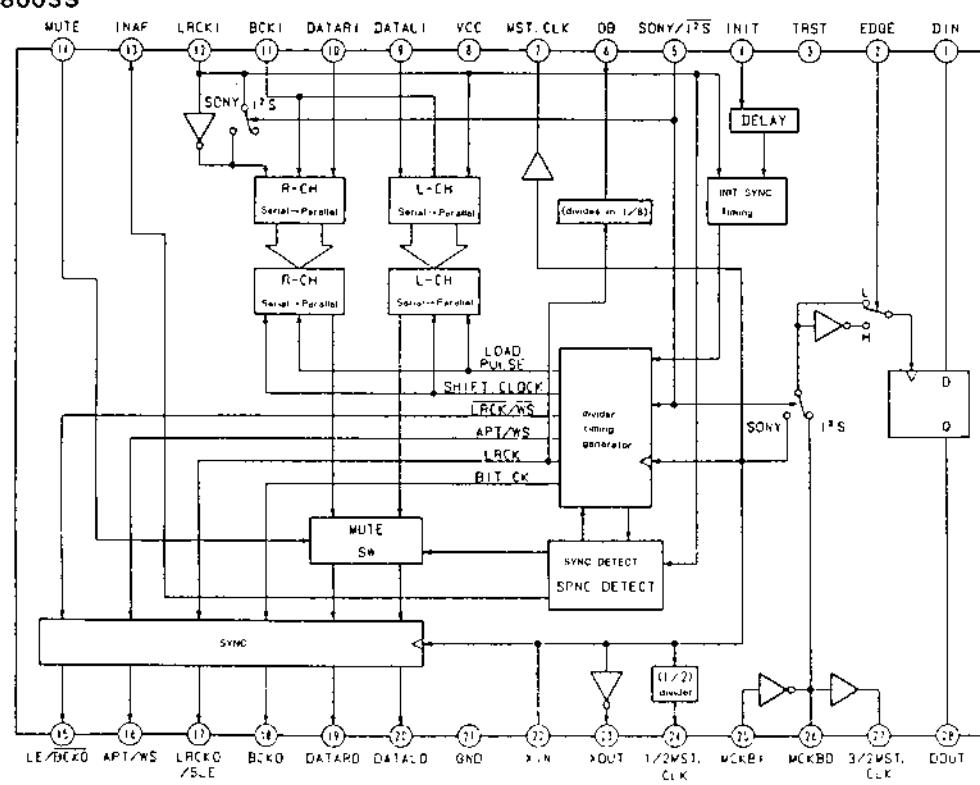


TC5081AP

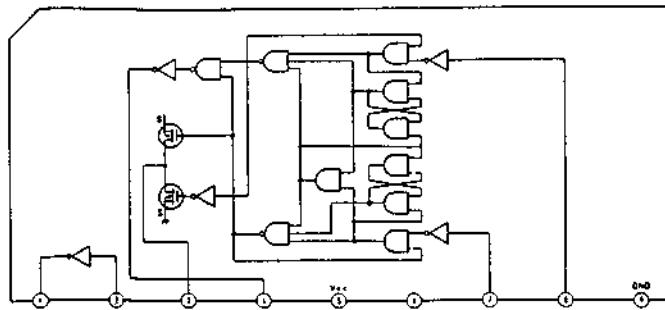


TC74HC00P

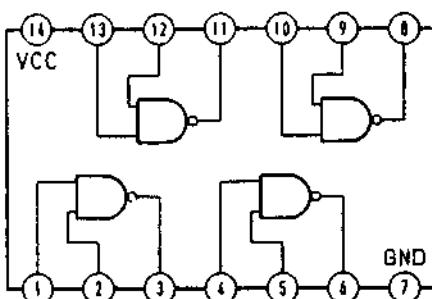


YM3623B

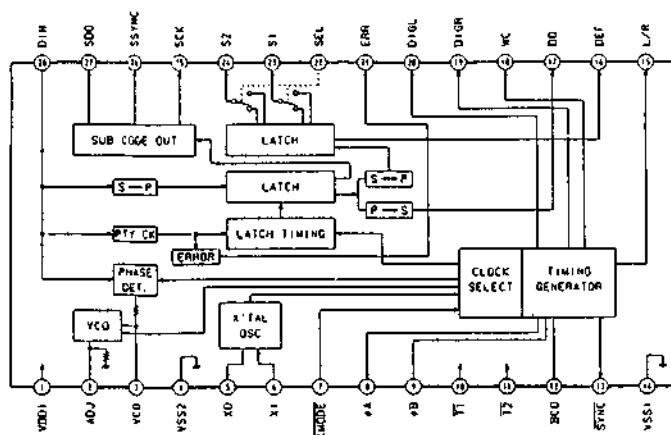


TC74HC393P

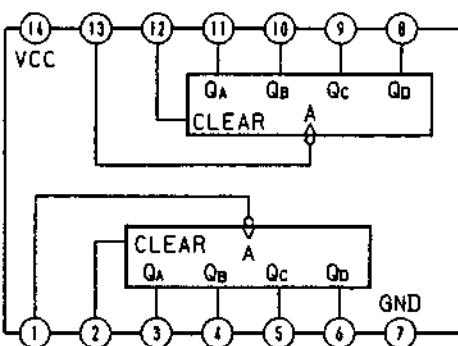


SN74HC139N

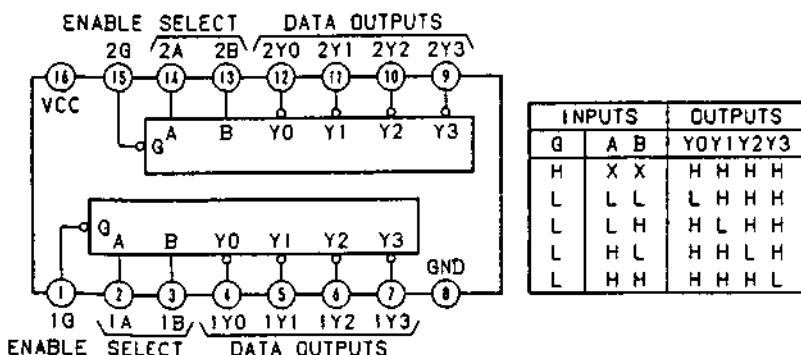

SN74LS624N

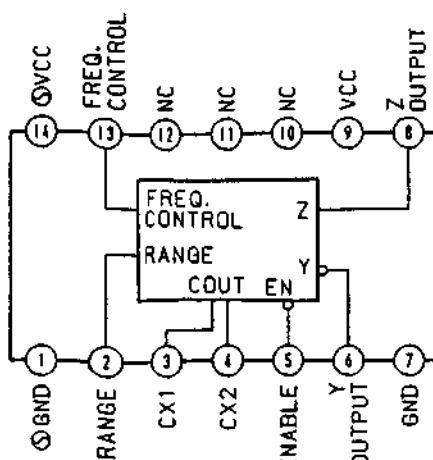

TC74HC153P

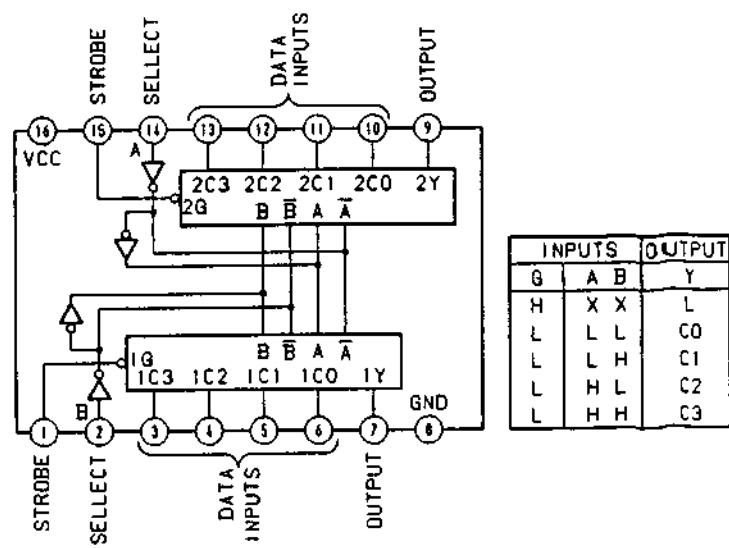

## SECTION 4

### EXPLODED VIEWS


**NOTE:**

- The mechanical parts with no reference number in the exploded views are not supplied.
- The construction parts of an assembled part are indicated with a collation number in the remark column.
- Items marked "\*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

- Due to standardization, parts with part number suffix -XX and -X may be different from the parts specified in the components used on the set.
- Color Indication of Appearance Parts Example:**  
(RED) ... KNOB, BALANCE (WHITE)  
↑   ↑  
Cabinet's Color                          Parts' Color  
WG : West Germany model


The components identified by mark or dotted line with mark are critical for safety. Replace only with part number specified.

Les composants identifiés par une marque sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

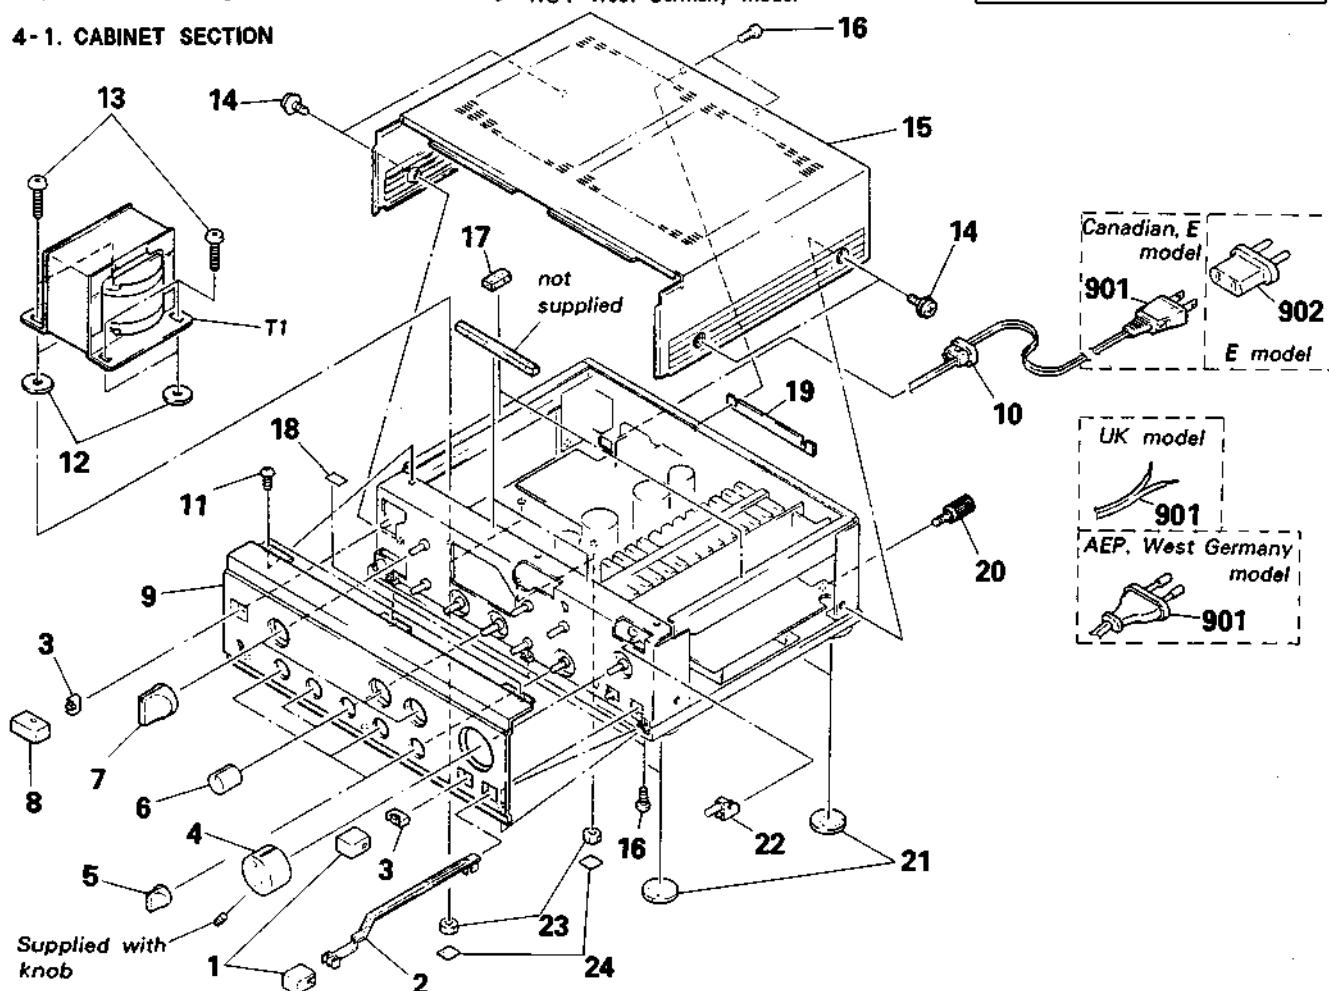**4-1. CABINET SECTION**

No.	Part No.	Description	Remarks	No.	Part No.	Description	Remarks
1	4-908-875-01	KNOB, SQUARE		16	7-685-873-09	SCREW +BVTT 3X10 (S)	
2	4-929-227-01	JOINT		17	*2-527-517-00	(UK)...CUSHION, CASE RETAINER	
3	4-864-307-00	RING		18	*3-846-067-21	(UK)...SPACER (C)	
4	4-929-224-01	KNOB (NA-48)		19	*4-929-232-01	SPACER	
5	4-916-745-01	KNOB (DIA.21)		20	3-706-165-00	SCREW	
6	4-916-746-11	KNOB (DIA. 21), ROUND		21	*4-923-850-01	FOOT (DIA. 46)	
7	4-916-729-01	KNOB (DIA.29)		22	4-923-879-01	BUTTON (DIA.4)	
8	4-908-866-01	KNOB, SQUARE		23	7-684-024-04	N 4, TYPE 2	
9	A-4317-985-A	(Canadian)...PANEL ASSY, FRONT		24	*4-929-266-01	CUSHION	
	A-4317-987-A	(AEP,WG,UK)...PANEL ASSY, FRONT			901	1-574-381-11 (E).....CORD, POWER	
	A-4323-064-A	(E).....PANEL ASSY, FRONT				1-551-478-00 (Canadian)...CORD, POWER	
10	*3-703-244-00	(Canadian,AEP,WG,UK) ...BUSHING (2104), CORD				1-574-805-11 (AEP,WG)....CORD, POWER	
		3-703-571-11 (E).....BUSHING (S) (4516), CORD				1-574-804-11 (UK).....CORD, POWER	
11	7-682-547-09	SCREW +BVTT 3X6 (S)		902	1-526-565-00 (E)...AC PLUG ADAPTOR		
12	4-885-984-21	(UK)...WASHER			T1	1-449-691-11 (Canadian)...TRANSFORMER, POWER	
13	7-682-566-09	SCREW +B 4X20			T1	1-449-693-11 (AEP).....TRANSFORMER, POWER	
14	4-887-802-00	SCREW			T1	1-449-694-11 (WG).....TRANSFORMER, POWER	
15	4-916-737-01	CASE			T1	1-449-695-11 (E).....TRANSFORMER, POWER	
					T1	1-449-769-11 (UK).....TRANSFORMER, POWER	

## 4-2. CHASSIS SECTION

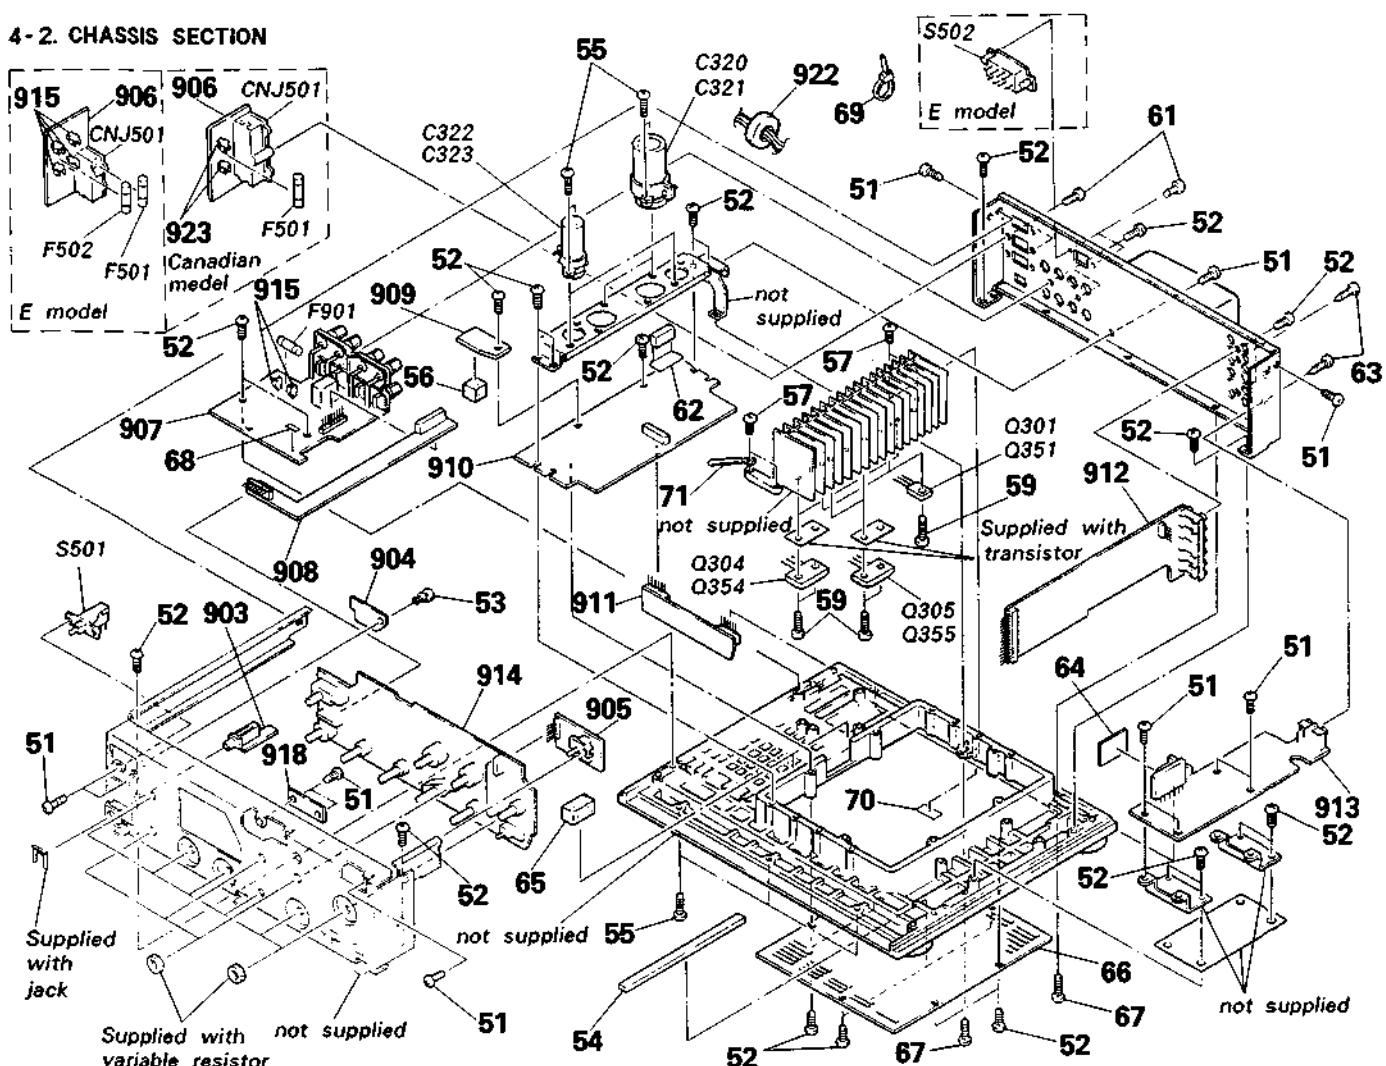


**Note:**  
The components identified by mark or dotted line with mark are critical for safety.  
Replace only with part number specified.

**Note:**  
Les composants identifiés par une marque sont critiques pour la sécurité.  
Ne les remplacer que par une pièce portant le numéro spécifié.

No.	Part No.	Description	Remarks	No.	Part No.	Description	Remarks
51	7-68-547-09	SCREW +BVTT 3X6 (S)		911	*1-629-750-11	PC BOARD, A/B JUMPER	
52	7-68-647-79	SCREW +BVTP 3X10 TYPE2 SLIT		912	*1-629-758-11	PC BOARD, PINJACK (L)	
53	4-812-134-00	RIVET NYLON, 3.5		913	*A-4333-336-A (WG).....	..MOUNTED PCB, EQ	
54	*4-916-782-21 (UK)...	DAMPER			*A-4333-341-A (Canadian,AEP,E)...	..MOUNTED PCB, EQ	
55	7-68-873-09	SCREW +BVTT 3X10 (S)			*A-4333-726-A (UK).....	..MOUNTED PCB, EQ	
56	*4-921-410-91 (UK)...	CUSHION		914	*A-4410-898-A (E).....	..MOUNTED PCB, SELECTOR	
57	7-68-650-79	SCREW +BVTP 3X16 TYPE2 SLIT			*A-4333-383-A (AEP).....	..MOUNTED PCB, SELECTOR	
59	7-68-648-79	SCREW +BVTP 3X12 TYPE2 IT-3			*A-4333-905-A (Canadian,WG,UK)...	..MOUNTED PCB, SELECTOR	
61	7-68-534-19	SCREW +BTP 2.6X8 TYPE2 N-S		915	1-533-183-11	HOLDER, FUSE	
62	*4-921-941-31 (UK)...	CUSHION (FL)		918	*1-629-752-11	PC BOARD, FS-LED	
63	7-621-819-00	SCREW, TAPPING		922	1-543-648-11	(Canadian,WG)...BEAD, FERRITE (FB)	
64	*4-916-782-61 (UK)...	DAMPER		923	1-533-190-11	(Canadian)...CLIP, FUSE	
65	*4-921-410-81 (UK)...	CUSHION		C320	1-125-568-11	ELECT 12000MF	
66	*4-916-732-01	BOARD, BOTTOM		C321	1-125-568-11	ELECT 12000MF	
67	7-68-876-09	SCREW +BVTT 3X16 (S)		C322	1-125-569-11	ELECT 5600MF	
68	*3-701-948-20	LABEL (TAA), FUSE		C323	1-125-569-11	ELECT 5600MF	
69	3-655-653-21	BAND (TAITON), BINDING		CNJ501	*1-540-041-21 (E)...	OUTLET, AC (NONPOLAR) (2P) (AC OUTPUT)	
70	*3-703-079-21 (UK)...	LABEL, CAUTION (BACK)		CNJ501	*1-540-062-31 (Canadian)...	OUTLET, AC (NONPOLAR) (AC OUTPUT)	
71	*4-908-882-01 (Canadian,WG)...	CLAMP		F501	*1-532-350-00 (E).....	FUSE, TIME-LAG 4A	
903	*1-629-749-11	PC BOARD, HP		F501	*1-532-510-00 (Canadian)...	FUSE, GLASS TUBE 8A	
904	*1-629-751-11	PC BOARD, POWER LED		F502	*1-532-350-00 (E)....	FUSE, TIME-LAG 4A	
905	*1-629-747-11	PC BOARD, MUTING		F901	*1-532-350-00 (AEP,WG,UK)...	FUSE, TIME-LAG 4A	
906	*1-629-755-11 (Canadian,E)...	PC BOARD, AC OUTLET		Q301	8-729-203-45	TRANSISTOR 2SC3423	
907	*1-629-753-11	PC BOARD, SP TERMINAL		Q304	8-729-320-01	TRANSISTOR 2SA1215M	
908	*1-629-757-11	PC BOARD, SP JUMPER		Q305	8-729-320-03	TRANSISTOR 2SC2921M	
909	*1-630-146-11 (UK)...	PC BOARD, CLAMP		Q351	8-729-203-45	TRANSISTOR 2SC3423	
910	*A-4333-731-A (UK).....	MOUNTED PCB, MAIN		Q354	8-729-320-01	TRANSISTOR 2SA1215M	
	*A-4333-734-A (Canadian,AEP)...	MOUNTED PCB, MAIN		Q355	8-729-320-03	TRANSISTOR 2SC2921M	
	*A-4333-729-A (E,WG).....	MOUNTED PCB, MAIN		S501	*1-554-920-31 (E)...	SWITCH, PUSH (AC POWER)(1 KEY)(POWER)	
				S502	*1-570-307-11 (E)...	SWITCH, VOLTAGE CHANGE (VOLTAGE SELECTOR)	

## 4-3. D/A CONVERTER SECTION

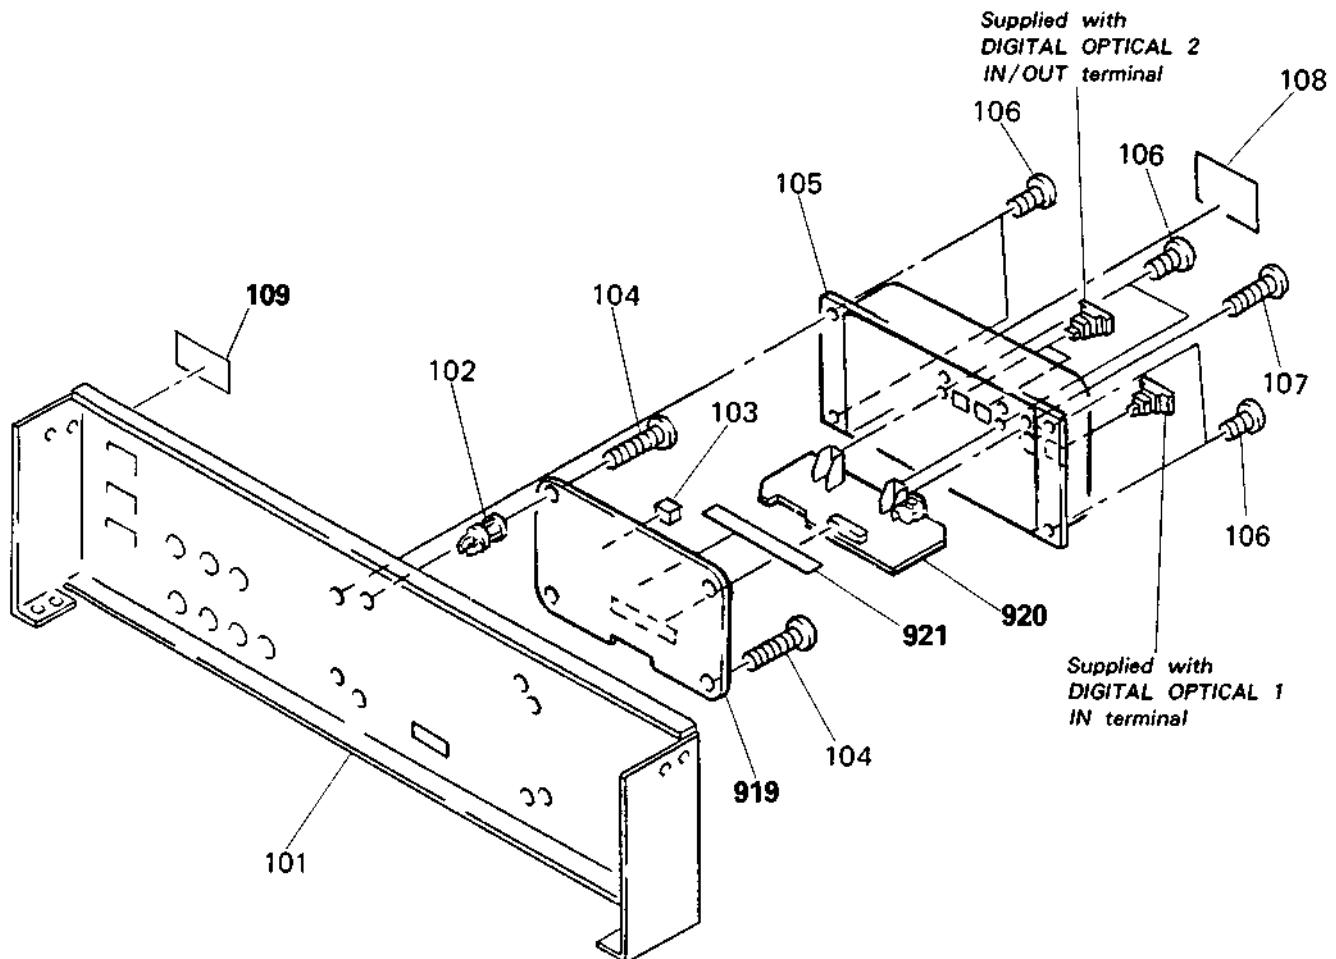

No.	Part No.	Description	Remarks	No.	Part No.	Description	Remarks
101	*4-929-239-03 *4-929-239-21 *4-929-281-01	(Canadian)...PANEL, BACK (AEP,WG,UK)...PANEL, BACK (E).....PANEL, BACK		108	*4-929-275-01 *4-929-277-01 *4-929-278-01 *4-929-279-01 *4-929-907-01	(Canadian)...LABEL, MODEL NUMBER (WG).....LABEL, MODEL NUMBER (UK).....LABEL, MODEL NUMBER (E).....LABEL, MODEL NUMBER (AEP).....LABEL, MODEL NUMBER	
102	*4-884-992-00	SUPPORT, PC		109	*A-4333-387-A *A-4333-755-A *A-4410-909-A	(WG).....MOUNTED PCB, DAS (Canadian,E,AEP)....MOUNTED PCB, DAS (UK).....MOUNTED PCB, DAS	
103	*4-929-244-01	(UK)...CUSHION		919	*1-629-760-11	PC BOARD, DAS INPUT	
104	7-686-650-79	SCREW +BVTP 3X16 TYPE2 N-S		920	*1-560-242-21	BUS BAR 4P	
105	*4-929-238-01	CASE, SHIELD		921			
106	7-682-547-09	SCREW +BVTT 3X6 (S)					
107	7-621-849-00	SCREW, TAPPING					

## SECTION 4

### ELECTRICAL PARTS LIST

**NOTE:**

- Due to standardization, replacements in the parts list may be different from the parts specified in the diagrams or the components used on the set.
- Items marked "\*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- If there are two or more same circuits in a set such as a stereophonic machine, only typical circuit parts may be indicated and capacitors and resistors in other same circuits may be omitted.

**CAPACITORS:**MF:  $\mu\text{F}$ , PF:  $\mu\mu\text{F}$ .**RESISTORS**

- All resistors are in ohms.
- F: nonflammable

**COILS**

- MMH: mH, UH:  $\mu\text{H}$

**SEMICONDUCTORS**

In each case, U:  $\mu$ , for example:  
 UA...:  $\mu\text{A}$ ..., UPA...:  $\mu\text{PA}$ ...,  
 UPC...:  $\mu\text{PC}$ , UPD...:  $\mu\text{PD}$ ...

- WG: West Germany model

The components identified by mark or dotted line with mark are critical for safety.  
Replace only with part number specified.

Les composants identifiés par une marque sont critiques pour la sécurité.  
Ne les remplacer que par une pièce portant le numéro spécifié.

Ref.No.	Part No.	Description	Ref.No.	Part No.	Description
901	A1-551-478-00 A1-574-381-11 A1-574-804-11 A1-574-805-11	(Canadian)...CORD, POWER (E).....CORD, POWER (UK).....CORD, POWER (AEP,WG)....CORD, POWER	C152	1-162-284-31	(Canadian,WG)... ...CERAMIC 150PF 10% 50V
902	A1-526-565-00	(E)...AC PLUG ADAPTOR	C153	1-162-284-31	(Canadian,WG)... ...CERAMIC 150PF 10% 50V
903	*1-629-749-11	PC BOARD, HP	C154	1-162-284-31	(Canadian,WG)... ...CERAMIC 150PF 10% 50V
904	*1-629-751-11	PC BOARD, POWER LED	C158	1-162-284-31	(Canadian,WG)... ...CERAMIC 150PF 10% 50V
905	*1-629-747-11	PC BOARD, MUTING	C159	1-162-284-31	(Canadian,WG)... ...CERAMIC 150PF 10% 50V
906	*1-629-755-11	(Canadian,E)....PC BOARD, AC OUTLET	C201	1-130-471-00	MYLAR 0.001MF 5% 50V
907	*1-629-753-11	PC BOARD, SP TERMINAL	C202	1-130-478-00	MYLAR 0.0039MF 5% 50V
908	*1-629-757-11	PC BOARD, SP JUMPER	C203	1-130-479-00	MYLAR 0.0047MF 5% 50V
909	*1-630-146-11	(UK)...PC BOARD, CLAMP	C204	1-136-159-00	FILM 0.033MF 5% 50V
910	*A-4333-729-A *A-4333-731-A *A-4333-734-A	(E,WG).....MOUNTED PCB, MAIN (UK).....MOUNTED PCB, MAIN (Canadian,AEP)...MOUNTED PCB, MAIN	C205	1-123-369-00	ELECT 4.7MF 20% 50V
911	*1-629-750-11	PC BOARD, A/B JUMPER	C206	1-123-380-00	ELECT 1MF 20% 63V
912	*1-629-758-11	PC BOARD, PINJACK (L)	C207	1-124-918-11	ELECT 47MF 20% 63V
913	*A-4333-336-A *A-4333-341-A *A-4333-726-A	(WG).....MOUNTED PCB, EQ (Canadian,AEP,E)...MOUNTED PCB, EQ (UK).....MOUNTED PCB, EQ	C209	1-124-472-11	ELECT 470MF 20% 6.3V
914	*A-4410-898-A *A-4333-383-A *A-4333-905-A	(E).....MOUNTED PCB, SELECTOR (AEP).....MOUNTED PCB, SELECTOR (Canadian,WG,UK)..MOUNTED PCB, SELECTOR	C251	1-130-471-00	MYLAR 0.001MF 5% 50V
915	1-533-188-11	HOLDER, FUSE	C252	1-130-478-00	MYLAR 0.0039MF 5% 50V
918	*1-629-752-11	PC BOARD, FS-LED	C253	1-130-479-00	MYLAR 0.0047MF 5% 50V
919	*A-4333-387-A *A-4333-755-A *A-4410-909-A	(WG).....MOUNTED PCB, DAS (Canadian,E,AEP)...MOUNTED PCB, DAS (UK).....MOUNTED PCB, DAS	C254	1-136-159-00	FILM 0.033MF 5% 50V
920	*1-629-760-11	PC BOARD, DAS INPUT	C302	1-123-369-00	(WG)...ELECT 4.7MF 20% 50V
921	*1-560-242-21	BUS BAR 4P	C303	1-101-888-00	(Canadian,AEP,E,WG) ...CERAMIC 6.8PF 5% 50V
922	1-543-648-11	(Canadian,WG)...BEAD, FERRITE (FB)	C303	1-104-276-11	(UK)...STYROL 6.8PF 10% 50V
923	1-533-190-11	(Canadian)...CLIP, FUSE	C304	1-123-360-00	(Canadian,AEP,E,WG) ...ELECT 100MF 20% 50V
C101	1-162-284-31	(Canadian,WG)... ...CERAMIC 150PF 10% 50V	C304	1-126-052-11	(UK)...ELECT 100MF 20% 50V
C102	1-162-284-31	(Canadian,WG)... ...CERAMIC 150PF 10% 50V	C305	1-102-936-00	(Canadian,AEP,E,WG) ...CERAMIC 3PF 0.5PF 50V
C103	1-162-284-31	(Canadian,WG)... ...CERAMIC 150PF 10% 50V	C305	1-107-276-11	(UK)...MICA 3PF 0.5PF 500V
C104	1-162-284-31	(Canadian,WG)... ...CERAMIC 150PF 10% 50V	C306	1-123-369-00	ELECT 4.7MF 20% 63V
C108	1-162-284-31	(Canadian,WG)... ...CERAMIC 150PF 10% 50V	C307	1-123-369-00	ELECT 4.7MF 20% 63V
C109	1-162-284-31	(Canadian,WG)... ...CERAMIC 150PF 10% 50V	C308	1-102-951-00	(Canadian,AEP,E,WG) ...CERAMIC 15PF 5% 50V
C111	1-162-284-31	(Canadian,WG)... ...CERAMIC 150PF 10% 50V	C308	1-104-263-11	(UK)...STYROL 15PF 10% 50V
C112	1-162-284-31	(Canadian,WG)... ...CERAMIC 150PF 10% 50V	C309	1-123-359-00	(Canadian,AEP,E,WG) ...ELECT 4.7MF 20% 50V
C113	1-162-284-31	(Canadian,WG)... ...CERAMIC 150PF 10% 50V	C309	1-124-910-11	(UK)...ELECT 4.7MF 20% 50V
C114	1-162-284-31	(Canadian,WG)... ...CERAMIC 150PF 10% 50V	C310	1-102-963-00	(Canadian,AEP,E,WG) ...CERAMIC 33PF 5% 50V
C115	1-162-284-31	(Canadian,WG)... ...CERAMIC 150PF 10% 50V	C310	1-107-159-00	(UK)...MICA 33PF 5% 500V
C116	1-162-284-31	(Canadian,WG)... ...CERAMIC 150PF 10% 50V	C311	1-102-963-00	(Canadian,AEP,E,WG) ...CERAMIC 33PF 5% 50V
C117	1-162-284-31	(Canadian,WG)... ...CERAMIC 150PF 10% 50V	C311	1-107-159-00	(UK)...MICA 33PF 5% 500V

Ref. No.	Part No.	Description				Ref. No.	Part No.	Description			
C312	1-130-487-00	MYLAR	0.022MF	5%	50V	C403	1-126-103-11	ELECT	470MF	20%	10V
C313	1-130-471-00	MYLAR	0.001MF	5%	50V	C404	1-130-341-00	(UK)...FILM	0.056MF	3%	100V
C314	1-123-333-00	ELECT	100MF	20%	25V	C404	1-136-162-00	(Canadian,AEP,E,WG) ...FILM	0.056MF	5%	50V
C315	1-130-487-00	MYLAR	0.022MF	5%	50V	C405	1-130-971-00	(UK)...FILM	0.016MF	3%	100V
C317	1-123-333-00	ELECT	100MF	20%	25V	C405	1-136-032-51	(Canadian,AEP,E,WG) ...FILM	0.016MF	5%	50V
C318	1-123-604-00	ELECT	220MF	20%	63V	C406	1-123-333-00	ELECT	100MF	20%	16V
C319	1-123-379-00	ELECT	0.47MF	20%	100V	C407	1-130-479-00	MYLAR	0.0047MF	5%	50V
C320	1-125-568-11	ELECT	12000MF			C408	1-123-356-00	(Canadian,AEP,E,WG) ...ELECT	10MF	20%	50V
C321	1-125-568-11	ELECT	12000MF			C408	1-126-059-11	(UK)...ELECT	10PF	20%	50V
C322	1-125-569-11	ELECT	5600MF			C409	1-123-359-00	(Canadian,AEP,E,WG) ...ELECT	47MF	20%	50V
C323	1-125-569-11	ELECT	5600MF			C409	1-124-910-11	(UK)...ELECT	47PF	20%	50V
C324	1-136-601-11	(Canadian,AEP,E,WG) ...FILM	0.01MF	10%	630V	C410	1-123-359-00	(Canadian,AEP,E,WG) ...ELECT	47MF	20%	50V
C324	1-136-880-11	(UK)...FILM	2.2MF	10%	160V	C410	1-124-910-11	(UK)...ELECT	47PF	20%	50V
C326	1-136-165-00	FILM	0.1MF	5%	50V	C411	1-123-380-00	ELECT	1MF	20%	50V
C327	1-136-165-00	FILM	0.1MF	5%	50V	C412	1-123-380-00	ELECT	1MF	20%	50V
C328	1-124-523-11	ELECT	4700MF	20%	16V	C413	1-126-103-11	ELECT	470MF	20%	16V
C329	1-126-103-11	ELECT	470MF	20%	16V	C414	1-126-103-11	ELECT	470MF	20%	16V
C330	1-162-282-31	(WG)...CERAMIC	100PF	5%	50V	C430	1-102-816-00	(WG)...CERAMIC	120PF	5%	50V
C331	1-102-973-00	(Canadian,AEP,E,WG) ...CERAMIC	100PF	5%	50V	C431	1-102-816-00	(WG)...CERAMIC	120PF	5%	50V
C331	1-136-808-11	(UK)...FILM	100PF	5%	100V	C451	1-101-361-00	(Canadian,AEP,E) ...CERAMIC	150PF	5%	50V
C333	1-161-379-00	(WG)...CERAMIC	0.01MF	30%	25V	C451	1-102-973-00	(WG)...CERAMIC	100PF	5%	50V
C352	1-123-369-00	(WG)...ELECT	4.7MF	20%	50V	C451	1-104-282-91	(UK)...STYROL	150PF	5%	50V
C353	1-101-888-00	(Canadian,AEP,E,WG) ...CERAMIC	6.8PF	5%	50V	C452	1-123-369-00	(Canadian,AEP,E,WG) ...ELECT	4.7MF	20%	50V
C353	1-104-276-11	(UK)...STYROL	6.8PF	10%	50V	C453	1-124-472-11	ELECT	470MF	20%	10V
C354	1-123-360-00	(Canadian,AEP,E,WG) ...ELECT	100MF	20%	50V	C454	1-136-162-00	(Canadian,AEP,E,WG) ...FILM	0.056MF	5%	50V
C354	1-126-052-11	(UK)...ELECT	100MF	20%	50V	C454	1-130-341-00	(UK)...FILM	0.056MF	3%	100V
C355	1-102-936-00	(Canadian,AEP,E,WG) ...CERAMIC	3PF	0.5PF	50V	C455	1-136-032-51	(Canadian,AEP,E,WG) ...FILM	0.016MF	5%	50V
C355	1-107-276-11	(UK)...MICA	3PF	0.5PF	500V	C455	1-130-971-00	(UK)...FILM	0.016MF	3%	100V
C358	1-102-951-00	(Canadian,AEP,E,WG) ...CERAMIC	15PF	5%	50V	C457	1-130-479-00	MYLAR	0.0047MF	5%	50V
C358	1-104-263-11	(UK)...STYROL	15PF	10%	50V	C458	1-123-356-00	(Canadian,AEP,E,WG) ...ELECT	10MF	20%	50V
C359	1-123-359-00	(Canadian,AEP,E,WG) ...ELECT	47MF	20%	50V	C458	1-126-054-11	(UK)...ELECT	10MF	20%	50V
C359	1-124-910-11	(UK)...ELECT	47MF	20%	50V	C480	1-102-816-00	(WG)...CERAMIC	120PF	5%	50V
C360	1-102-963-00	(Canadian,AEP,E,WG) ...CERAMIC	33PF	5%	50V	C481	1-162-282-31	(WG)...CERAMIC	100PF	5%	50V
C360	1-107-159-00	(UK)...MICA	33PF	5%	500V	C501	▲1-161-744-00	(Canadian,E) ...CERAMIC	0.01MF		400V
C361	1-102-963-00	(Canadian,AEP,E,WG) ...CERAMIC	33PF	5%	50V	C601	1-136-165-00	FILM	0.1MF	5%	50V
C361	1-107-159-00	(UK)...MICA	33PF	5%	500V	C606	1-123-381-00	ELECT	2.2MF	20%	50V
C362	1-130-487-00	MYLAR	0.022MF	5%	50V	C607	1-162-207-31	CERAMIC	22PF	5%	50V
C380	1-162-282-31	(WG)...CERAMIC	100PF	5%	50V	C608	1-162-207-31	CERAMIC	22PF	5%	50V
C381	1-102-973-00	(Canadian,AEP,E,WG) ...CERAMIC	100PF	5%	50V	C609	1-136-165-00	FILM	0.1MF	5%	50V
C381	1-136-808-11	(UK)...FILM	100PF	5%	100V	C610	1-136-165-00	FILM	0.1MF	5%	50V
C401	1-101-361-00	(Canadian,AEP,E) ...CERAMIC	150PF	5%	50V	C611	1-136-746-11	(Canadian,AEP,E,WG) ...FILM	1MF	5%	50V
C401	1-102-973-00	(WG)...CERAMIC	100PF	5%	50V	C611	1-136-921-11	(UK)...FILM	1MF	5%	50V
C401	1-104-282-91	(UK)...STYROL	150PF	5%	50V						
C402	1-123-369-00	(Canadian,AEP,E,WG) ...ELECT	4.7MF	20%	50V						

**Note:**  
The components identified by mark or dotted line with mark are critical for safety. Replace only with part number specified.

**Note:**  
Les composants identifiés par une marque sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

Ref. No.	Part No.	Description			Ref. No.	Part No.	Description	
C612	1-136-165-00	FILM	0.1MF	5%	50V	C755	1-102-973-00	(Canadian,AEP,WG,E)
C613	1-136-155-00	FILM	0.015MF	5%	50V	C755	1-136-808-11	...CERAMIC 100PF
C614	1-130-477-00	MYLAR	0.0033MF	5%	50V	C755	(UK)...FILM 100PF	5%
C615	1-136-165-00	FILM	0.1MF	5%	50V	C756	1-102-074-00	(Canadian,AEP,WG,E)
C616	1-136-165-00	FILM	0.1MF	5%	50V	C756	1-136-814-11	...CERAMIC 0.001MF
C617	1-162-217-31	CERAMIC	56PF	5%	50V	C756	(UK)...FILM 0.001MF	10%
C618	1-162-284-31	CERAMIC	150PF	10%	50V	C757	1-102-074-00	(Canadian,AEP,WG,E)
C619	1-136-165-00	FILM	0.1MF	5%	50V	C757	1-136-814-11	...CERAMIC 0.001MF
C620	1-136-165-00	FILM	0.1MF	5%	50V	C757	(UK)...FILM 0.001MF	10%
C621	1-136-165-00	FILM	0.1MF	5%	50V	C758	1-102-116-00	(Canadian,AEP,WG,E)
C622	1-136-165-00	FILM	0.1MF	5%	50V	C758	1-136-813-11	...CERAMIC 680PF
C624	1-126-103-11	ELECT	470MF	20%	16V	C758	(UK)...FILM 680PF	10%
C625	1-126-103-11	ELECT	470MF	20%	16V	C759	1-136-153-00	FILM 0.01MF
C626	1-126-103-11	ELECT	470MF	20%	16V	C760	1-123-332-00	ELECT 47MF
C627	1-126-163-11	ELECT	4.7MF	20%	50V	C762	1-126-059-11	ELECT 10MF
C628	1-162-294-31	CERAMIC	0.001MF	10%	50V	C763	1-107-026-00	MICA 5PF
C629	1-126-059-11	ELECT	10MF	20%	50V	C801	1-136-165-00	FILM 0.1MF
C630	1-123-334-00	ELECT	220MF	20%	25V	C802	1-123-356-00	(Canadian,AEP,WG,E)
C631	1-123-334-00	ELECT	220MF	20%	25V	C802	1-126-059-11	...ELECT 10MF
C632	1-126-059-11	ELECT	10MF	20%	50V	C802	(UK)...ELECT 10MF	20%
C633	1-161-379-00	CERAMIC	0.01MF	30%	16V	C803	1-136-165-00	FILM 0.1MF
C634	1-161-379-00	CERAMIC	0.01MF	30%	16V	C804	1-136-165-00	FILM 0.1MF
C640	1-136-165-00	FILM	0.1MF	5%	50V	C805	1-126-335-11	ELECT 220MF
C651	1-130-481-00	MYLAR	0.0068MF	5%	50V	C806	1-123-380-00	ELECT 1MF
C652	1-123-306-00	ELECT	47MF	20%	10V	C807	1-124-234-00	ELECT 22MF
C653	1-136-165-00	FILM	0.1MF	5%	50V	C808	1-136-153-00	FILM 0.01MF
C701	1-102-820-00	(Canadian,AEP,WG,E)				C809	1-164-159-11	CERAMIC 0.1MF
		...CERAMIC	330PF	5%	50V	C810	1-164-159-11	CERAMIC 0.1MF
C701	1-136-811-11	(UK)...FILM	330PF	5%	100V	C901	1-161-744-00	(AEP,WG,UK)...CERAMIC 0.01MF
C702	1-124-915-11	ELECT	10MF	20%	63V	C902	1-136-153-00	(WG)...FILM 0.01MF
C703	1-136-153-00	FILM	0.01MF	5%	50V	C903	1-136-153-00	(WG)...FILM 0.01MF
C704	1-123-361-00	ELECT	2.2MF	20%	63V	C904	1-102-978-00	(Canadian,WG)
								...CERAMIC 220PF
C705	1-102-973-00	(Canadian,AEP,WG,E)				C906	1-162-286-31	(Canadian,WG)
		...CERAMIC	100PF	5%	50V	C906	1-102-978-00	...CERAMIC 220PF
C705	1-136-808-11	(UK)...FILM	100PF	5%	100V	C910	1-102-978-00	(Canadian,WG)
C706	1-102-074-00	(Canadian,AEP,WG,E)				C911	1-102-978-00	...CERAMIC 220PF
		...CERAMIC	0.001MF	10%	50V	C911	(Canadian,WG)	5%
C706	1-136-814-11	(UK)...FILM	0.001MF	5%	100V	C912	1-102-978-00	...CERAMIC 220PF
C707	1-102-074-00	(Canadian,AEP,WG,E)				C913	1-102-978-00	(Canadian,WG)
		...CERAMIC	0.001MF	10%	50V	C913	1-102-978-00	...CERAMIC 220PF
C707	1-136-814-11	(UK)...FILM	0.001MF	5%	100V	C914	1-102-978-00	(Canadian,WG)
C708	1-102-116-00	(Canadian,AEP,WG,E)				C914	1-102-978-00	...CERAMIC 220PF
		...CERAMIC	680PF	10%	50V	C915	1-136-153-00	(WG)...FILM 0.01MF
C708	1-136-813-11	(UK)...FILM	680PF	5%	100V	C915	1-136-153-00	0.01MF 5%
C709	1-136-153-00	FILM	0.01MF	5%	50V	C952	1-136-153-00	(WG)...FILM 0.01MF
C710	1-123-332-00	ELECT	47MF	20%	25V	C953	1-136-153-00	0.01MF 5%
C712	1-126-059-11	ELECT	10MF	20%	50V	CN1	*1-561-651-00	SOCKET, CONNECTOR 7P
C713	1-107-026-00	MICA	5PF	0.5PF	500V	CN2	*1-561-651-00	SOCKET, CONNECTOR 7P
C715	1-136-171-00	FILM	0.33MF	5%	50V	CN3	1-568-118-11	SOCKET, CONNECTOR 16P
C717	1-102-121-00	(WG)...CERAMIC	0.0022MF	10%	50V	CN4	*1-562-334-00	SOCKET, CONNECTOR 10P
C718	1-102-121-00	(WG)...CERAMIC	0.0022MF	10%	50V	CN5	*1-561-651-00	SOCKET, CONNECTOR 7P
C751	1-102-820-00	(Canadian,AEP,WG,E)				CN6	1-568-203-11	PIN, CONNECTOR (PC BOARD) 11P
		...CERAMIC	330PF	5%	50V	CN7	1-568-203-11	PIN, CONNECTOR (PC BOARD) 11P
C751	1-136-811-11	(UK)...FILM	330PF	5%	100V	CN8	*1-563-381-11	SOCKET, CONNECTOR 11P
C752	1-124-915-11	ELECT	10MF	20%	63V	CN9	*1-566-451-11	HOUSING, CONNECTOR 3P
C754	1-126-335-11	ELECT	220MF	20%	10V	CN10	*1-563-381-11	SOCKET, CONNECTOR 11P
					CN11	1-568-117-11	SOCKET, CONNECTOR 14P	

Ref.No.	Part No.	Description
CNJ501A1-540-041-21	(E)...OUTLET, AC (NONPOLAR) (2P) (AC OUTPUT)	
CNJ501A1-540-062-31	(Canadian)...OUTLET, AC (NONPOLAR) (2P) (AC OUTPUT)	
CNJ801 1-568-249-11	JACK, PIN 1P (DIGITAL IN COAXIAL)	
CNJ802*1-565-484-11	CONNECTOR, BOARD TO BOARD 8P	
CNP601*1-564-340-00	PIN, CONNECTOR 6P	
CNP602*1-564-340-61	PIN, CONNECTOR 6P	
CNP603*1-564-337-71	PIN, CONNECTOR 3P	
CNP604*1-568-694-00	CONNECTOR PIN 8P	
CNP701*1-564-337-00	PIN, CONNECTOR 3P	
CP1 *1-560-532-00	PIN, CONNECTOR 7P	
CP2 *1-560-532-00	PIN, CONNECTOR 7P	
CP3 *1-560-532-00	PIN, CONNECTOR 7P	
CP4 *1-568-202-11	PIN, CONNECTOR (PC BOARD) 10P	
CP5 1-568-120-11	PIN, CONNECTOR (PC BOARD) 7P	
CP6 1-568-120-11	PIN, CONNECTOR (PC BOARD) 7P	
CP7 *1-568-204-11	PIN, CONNECTOR (PC BOARD) 16P	
D201 8-719-000-26	DIODE US1060M	
D202 8-719-000-26	DIODE US1060M	
D203 8-719-303-00	DIODE SEL2510C	
D204 8-719-303-00	DIODE SEL2510C	
D205 8-719-303-00	DIODE SEL2510C	
D206 8-719-300-82	DIODE SEL2213C	
D207 8-719-300-82	DIODE SEL2213C	
D208 8-719-301-52	DIODE SEL2810A	
D209 8-719-301-52	DIODE SEL2810A	
D210 8-719-301-52	DIODE SEL2810A	
D211 8-719-301-52	DIODE SEL2810A	
D212 8-719-303-00	DIODE SEL2510C	
D213 8-719-303-00	DIODE SEL2510C	
D214 8-719-303-00	DIODE SEL2510C	
D215 8-719-000-26	DIODE US1060M	
D216 8-719-000-26	DIODE US1060M	
D301 8-719-230-02	DIODE 30DF2	
D302 8-719-230-02	DIODE 30DF2	
D303 8-719-230-02	DIODE 30DF2	
D304 8-719-230-02	DIODE 30DF2	
D305 8-719-200-77	DIODE 10E2N	
D306 8-719-200-77	DIODE 10E2N	
D307 8-719-200-77	DIODE 10E2N	
D308 8-719-200-77	DIODE 10E2N	
D309 8-719-200-77	DIODE 10E2N	
D310 8-719-200-77	DIODE 10E2N	
D311 8-719-200-77	DIODE 10E2N	
D312 8-719-000-26	DIODE US1060M	
D313 8-719-000-26	DIODE US1060M	
D314 8-719-000-26	DIODE US1060M	
D315 8-719-200-77	DIODE 10E2N	
D316 8-719-200-77	DIODE 10E2N	
D317 8-719-200-77	DIODE 10E2N	
D318 8-719-200-77	DIODE 10E2N	
D319 8-719-000-26	DIODE US1060M	
D362 8-719-000-26	DIODE US1060M	
D363 8-719-000-26	DIODE US1060M	
D364 8-719-000-26	DIODE US1060M	
D401 8-719-933-47	DIODE HZS7B2L	
D402 8-719-001-97	DIODE UZL-16L	
D403 8-719-001-97	DIODE UZL-16L	
D604 8-719-000-26	DIODE US1060M	

Ref.No.	Part No.	Description
D605	8-719-903-27	DIODE ISS168
D606	8-719-000-26	DIODE US1060M
D607	8-719-000-26	DIODE US1060M
D609	8-719-903-27	DIODE ISS168
D610	8-719-000-26	DIODE US1060M
D611	8-719-000-26	DIODE US1060M
EH2	*1-564-508-11	PLUG, CONNECTOR 5P
EH3	*1-564-508-11	PLUG, CONNECTOR 5P
F501	▲1-532-350-00	(E).....FUSE, TIME-LAG 4A
F501	▲1-532-510-00	(Canadian)...FUSE, GLASS TUBE 8A
F502	▲1-532-350-00	(E)...FUSE, TIME-LAG 4A
F901	▲1-532-350-00	(AEP,WG,UK)...FUSE, TIME-LAG 4A
IC301	8-749-920-70	IC STK3102-3
IC302	8-759-111-68	IC UPC1237HA
IC401	8-759-981-96	IC RC4560D
IC601	8-759-973-98	IC YM3623B
IC602	8-759-202-11	IC TC74HC00P
IC603	8-759-978-53	IC CXD8003S
IC604	8-759-250-81	IC TC5081AP
IC605	8-759-203-40	IC TC74HC393P
IC606	8-759-906-24	IC SN74LS624N
IC607	8-759-202-89	IC TC74HCT139P
IC608	8-719-902-56	DIODE PC817
IC609	8-759-202-11	IC TC74HC00P
IC610	8-759-631-40	IC M6294P
IC701	8-759-980-13	IC SAA7320
IC703	8-759-982-03	IC RC5532DD
IC801	8-759-977-72	IC GP1F31R (DIGITAL OPTICAL 1 IN)
IC802	8-759-977-72	IC GP1F31R (DIGITAL OPTICAL 2 IN)
IC803	8-759-977-71	IC GP1F31T (DIGITAL OPTICAL 2 REC OUT)
IC804	8-759-202-13	IC TC74HC04P
IC805	8-759-202-93	IC TC74HC153P
IC806	8-759-604-84	(UK)...IC M6F7806
J101	1-565-320-41	JACK, PIN 6P (TUNER/CD/TAPE1 REC OUT)
J102	1-565-320-51	JACK, PIN 6P(TAPE1 IN/TAPE2 REC OUT,IN)
J104	1-568-250-11	JACK, PIN 2P (PHONE)
J501	1-507-863-51	JACK, LARGE TYPE (HEADPHONES)
JR601	1-535-731-21	LEAD, JUMPER (OFC)
JR602	1-535-731-21	LEAD, JUMPER (OFC)
L301	*1-420-872-00	COIL, AIR CORE
L361	*1-420-872-00	COIL, AIR CORE
L401	1-413-101-00	(WG)...COIL, INPUT
L402	1-413-101-00	(WG)...COIL, INPUT
L451	1-413-101-00	(WG)...COIL, INPUT
L452	1-413-101-00	(WG)...COIL, INPUT
L601	1-410-396-41	FERRITE BEAD INDUCTOR
L602	1-410-396-41	FERRITE BEAD INDUCTOR
L603	1-410-324-11	INDUCTOR 4.7UH
L604	1-410-324-11	INDUCTOR 4.7UH
L605	1-410-324-11	INDUCTOR 4.7UH
L606	1-410-324-11	INDUCTOR 4.7UH
L607	1-410-324-11	INDUCTOR 4.7UH
L701	1-410-324-11	INDUCTOR 4.7UH
L801	1-410-324-11	INDUCTOR 4.7UH
L802	1-410-324-11	INDUCTOR 4.7UH

**Note:**  
The components identified by mark ▲ or dotted line with mark ▲ are critical for safety. Replace only with part number specified.

**Note:**  
Les composants identifiés par une marque ▲ sont critiques pour la sécurité.  
Ne les remplacer que par une pièce portant le numéro spécifié.

Ref.No.	Part No.	Description	Ref.No.	Part No.	Description
Q201	8-729-117-42	TRANSISTOR 2SD774-3	R212	1-249-465-11	CARBON 47K 5% 1/4W
Q202	8-729-194-57	TRANSISTOR 2SC945P	R213	1-247-722-11	CARBON 5.6K 5% 1/4W
Q203	8-729-173-36	TRANSISTOR 2SA733Q	R214	1-247-693-11	CARBON 27 5% 1/4W
Q204	8-729-173-36	TRANSISTOR 2SA733Q	R215	1-247-754-11	CARBON 1.5K 5% 1/2W
Q205	8-729-107-98	TRANSISTOR 2SC3622A-L	R216	1-247-754-11	CARBON 1.5K 5% 1/2W
Q255	8-729-107-98	TRANSISTOR 2SC3622A-L	R217	1-247-750-11	CARBON 680 5% 1/2W
Q301	8-729-203-45	TRANSISTOR 2SC3423	R218	1-249-462-11	CARBON 22K 5% 1/4W
Q302	8-729-127-53	TRANSISTOR 2SC2275P	R219	1-249-465-11	CARBON 47K 5% 1/4W
Q303	8-729-190-53	TRANSISTOR 2SA985A	R220	1-247-749-11	CARBON 560 5% 1/2W
Q304	8-729-320-03	TRANSISTOR 2SC2921M-0	R221	1-247-717-11	CARBON 2.2K 5% 1/4W
Q305	8-729-320-01	TRANSISTOR 2SA1215M-0	R222	1-247-725-11	CARBON 10K 5% 1/4W
Q306	8-729-108-14	TRANSISTOR 2SA985F	R223	1-249-465-11	CARBON 47K 5% 1/4W
Q351	8-729-203-45	TRANSISTOR 2SC3423	R224	1-247-721-11	CARBON 4.7K 5% 1/4W
Q352	8-729-127-53	TRANSISTOR 2SC2275P	R225	1-247-752-11	CARBON 1K 5% 1/2W
Q353	8-729-190-53	TRANSISTOR 2SA985A	R226	1-247-752-11	CARBON 1K 5% 1/2W
Q354	8-729-320-03	TRANSISTOR 2SC2921M-0	R227	1-247-239-00	(AEP)....CARBON 1K 5% 1/4W
Q355	8-729-320-01	TRANSISTOR 2SA1215M-0	R227	1-247-752-11	(Canadian,WG,UK,E) ...CARBON 1K 5% 1/2W
Q356	8-729-108-14	TRANSISTOR 2SA985F	R228	1-247-239-00	(AEP)....CARBON 1K 5% 1/4W
Q401	8-729-354-52	TRANSISTOR 2SC2545	R228	1-247-752-11	(Canadian,WG,UK,E) ...CARBON 1K 5% 1/2W
Q402	8-729-354-52	TRANSISTOR 2SC2545	R229	1-247-721-11	CARBON 4.7K 5% 1/4W
Q403	8-729-194-57	TRANSISTOR 2SC945P	R230	1-247-118-00	CARBON 300 5% 1/4W
Q404	8-729-173-36	TRANSISTOR 2SA733Q	R231	1-247-702-11	CARBON 150 5% 1/4W
Q451	8-729-354-52	TRANSISTOR 2SC2545	R233	1-247-713-11	CARBON 1K 5% 1/4W
Q452	8-729-354-52	TRANSISTOR 2SC2545	R252	1-247-700-11	CARBON 100 5% 1/4W
Q601	8-729-900-63	TRANSISTOR DTA124ES	R253	1-247-717-11	CARBON 2.2K 5% 1/4W
Q602	8-729-900-36	TRANSISTOR DTC124ES	R254	1-247-722-11	CARBON 5.6K 5% 1/4W
Q603	8-729-900-63	TRANSISTOR DTA124ES	R255	1-249-753-15	CARBON 4.7M 5% 1/4W
Q604	8-729-107-98	TRANSISTOR 2SC3622AL	R256	1-249-753-15	CARBON 4.7M 5% 1/4W
Q606	8-729-900-63	TRANSISTOR DTA124ES	R258	1-247-170-00	CARBON 43K 5% 1/4W
Q607	8-729-900-63	TRANSISTOR DTA124ES	R259	1-247-152-00	CARBON 7.5K 5% 1/4W
Q654	8-729-107-98	TRANSISTOR 2SC3622AL	R260	1-249-464-11	CARBON 39K 5% 1/4W
R000	1-247-725-11	CARBON 10K 5% 1/4W	R261	1-249-465-11	CARBON 47K 5% 1/4W
R101	1-246-545-00	CARBON 1M 5% 1/4W	R262	1-249-465-11	CARBON 47K 5% 1/4W
R102	1-246-545-00	CARBON 1M 5% 1/4W	R263	1-247-722-11	CARBON 5.6K 5% 1/4W
R103	1-246-545-00	CARBON 1M 5% 1/4W	R279	1-247-721-11	CARBON 4.7K 5% 1/4W
R104	1-246-545-00	CARBON 1M 5% 1/4W	R283	1-247-713-11	CARBON 1K 5% 1/4W
R105	1-247-713-11	CARBON 1K 5% 1/4W	R301	1-247-713-11	CARBON 1K 5% 1/4W
R106	1-249-417-11	CARBON 1K 5% 1/4W	R302	1-249-599-11	CARBON 91K 5% 1/4W
R111	1-249-417-11	(Canadian,WG)...CARBON 1K 5% 1/4W	R303	1-249-668-11	CARBON 620 5% 1/2W
R112	1-249-417-11	(Canadian,WG)...CARBON 1K 5% 1/4W	R304	1-247-713-11	CARBON 1K 5% 1/4W
R113	1-249-417-11	(Canadian,WG)...CARBON 1K 5% 1/4W	R305	1-247-707-11	CARBON 390 5% 1/4W
R114	1-249-417-11	(Canadian,WG)...CARBON 1K 5% 1/4W	R306	▲1-212-950-00	FUSIBLE 220 5% 1/2W F
R151	1-246-545-00	CARBON 1M 5% 1/4W	R307	▲1-212-950-00	FUSIBLE 4.7 5% 1/2W F
R152	1-246-545-00	CARBON 1M 5% 1/4W	R308	▲1-212-950-00	FUSIBLE 4.7 5% 1/2W F
R153	1-246-545-00	CARBON 1M 5% 1/4W	R309	1-217-611-00	METAL PLATE 0.1 10% 2W
R154	1-246-545-00	CARBON 1M 5% 1/4W	R310	1-217-611-00	METAL PLATE 0.1 10% 2W
R155	1-247-713-11	CARBON 1K 5% 1/4W	R311	▲1-247-717-11	CARBON 2.2K 5% 1/4W F
R156	1-249-417-11	CARBON 1K 5% 1/4W	R312	1-249-460-11	CARBON 15K 5% 1/4W
R161	1-249-417-11	(Canadian,WG)...CARBON 1K 5% 1/4W	R313	▲1-212-962-00	FUSIBLE 15 5% 1/2W F
R162	1-249-417-11	(Canadian,WG)...CARBON 1K 5% 1/4W	R314	▲1-212-952-00	FUSIBLE 15 5% 1/2W F
R163	1-249-417-11	(Canadian,WG)...CARBON 1K 5% 1/4W	R315	1-247-897-00	CARBON 330K 5% 1/4W
R164	1-249-417-11	(Canadian,WG)...CARBON 1K 5% 1/4W	R316	1-247-725-11	CARBON 10K 5% 1/4W
R202	1-247-700-11	CARBON 100 5% 1/4W	R317	1-247-887-00	CARBON 220K 5% 1/4W
R203	1-247-717-11	CARBON 2.2K 5% 1/4W			
R204	1-247-722-11	CARBON 5.6K 5% 1/4W			
R205	1-249-753-15	CARBON 4.7M 5% 1/4W			
R206	1-249-753-15	CARBON 4.7M 5% 1/4W			
R208	1-247-170-00	CARBON 43K 5% 1/4W			
R209	1-247-152-00	CARBON 7.5K 5% 1/4W			
R210	1-249-464-11	CARBON 39K 5% 1/4W			
R211	1-249-465-11	CARBON 47K 5% 1/4W			

Note:  
The components identified by mark ▲ or dotted line with mark ▲ are critical for safety.  
Replace only with part number specified.

Note:  
Les composants identifiés par une marque ▲ sont critiques pour la sécurité.  
Ne les remplacer que par une pièce portant le numéro spécifié.

Ref.No.	Part No.	Description					Ref.No.	Part No.	Description				
R318	1-247-881-00	...CARBON	120K	5%	1/4W		R461	1-247-725-11	CARBON	10K	5%	1/4W	
R319	1-249-461-11	CARBON	18K	5%	1/4W		R462	1-249-484-11	CARBON	6.8	5%	1/2W	
R320	1-247-721-11	CARBON	4.7K	5%	1/4W		R463	1-247-739-11	CARBON	100	5%	1/2W	
R321	1-249-462-11	CARBON	22K	5%	1/4W	F	R465	1-247-700-11	CARBON	100	5%	1/4W	
R323	▲1-212-849-00	FUSIBLE	4.7	5%	1/4W		R466	1-214-937-00	CARBON	1M	5%	1/2W	
R324	1-247-727-11	(WG,UK,E,AEP)					R467	1-249-844-11	CARBON	56K	5%	1/2W	
R325	1-247-747-11	CARBON	...CARBON	10	5%	1/2W		R468	1-249-818-11	CARBON	4.7K	1%	1/2W
R326	1-249-721-11	CARBON	470	5%	1/2W		R469	1-247-713-11	CARBON	1K	5%	1/4W	
R327	1-247-708-11	(WG,UK,E,AEP)	...CARBON	100K	5%	1/4W		R481	1-247-713-11	(WG)....CARBON	1K	5%	1/4W
R351	1-247-713-11	CARBON	1K	5%	1/4W		R482	1-247-713-11	(WG)....CARBON	1K	5%	1/4W	
R352	1-249-599-11	CARBON	91K	5%	1/4W		R601	1-249-405-11	CARBON	100	5%	1/4W	
R353	1-249-668-11	CARBON	620	5%	1/2W		R613	1-249-422-11	CARBON	2.7K	5%	1/4W	
R354	1-247-713-11	CARBON	1K	5%	1/4W		R614	1-247-903-00	CARBON	1M	5%	1/4W	
R355	1-247-707-11	CARBON	390	5%	1/4W		R615	1-249-417-11	CARBON	1K	5%	1/4W	
R356	▲1-212-990-00	FUSIBLE	220	5%	1/2W	F	R616	1-249-422-11	CARBON	2.7K	5%	1/4W	
R357	▲1-212-950-00	FUSIBLE	4.7	5%	1/2W	F	R617	1-249-422-11	CARBON	2.7K	5%	1/4W	
R358	▲1-212-950-00	FUSIBLE	4.7	5%	1/2W	F	R618	1-249-422-11	CARBON	2.7K	5%	1/4W	
R359	1-217-611-00	METAL PLATE	0.1	10%	2W		R619	1-249-422-11	CARBON	2.7K	5%	1/4W	
R360	1-217-611-00	METAL PLATE	0.1	10%	2W		R620	1-249-422-11	CARBON	2.7K	5%	1/4W	
R361	▲1-247-717-11	CARBON	2.2K	5%	1/4W	F	R621	1-249-422-11	CARBON	2.7K	5%	1/4W	
R362	1-249-460-11	CARBON	15K	5%	1/4W		R622	1-249-421-11	CARBON	2.2K	5%	1/4W	
R363	▲1-212-962-00	FUSIBLE	15	5%	1/2W	F	R623	1-249-422-11	CARBON	2.7K	5%	1/4W	
R364	▲1-212-962-00	FUSIBLE	15	5%	1/2W	F	R624	1-249-422-11	CARBON	2.7K	5%	1/4W	
R365	1-247-891-00	CARBON	330K	5%	1/4W		R625	1-259-464-11	CARBON	33K	5%	1/6W	
R374	1-247-727-11	(AEP,WG,UK,E)...CARBON	10	5%	1/2W		R626	1-259-476-11	CARBON	100K	5%	1/6W	
R375	1-247-747-11	CARBON	470	5%	1/2W		R627	1-249-427-11	CARBON	6.8K	5%	1/4W	
R376	1-249-721-11	CARBON	100K	5%	1/2W		R628	1-249-434-11	CARBON	27K	5%	1/4W	
R377	1-247-708-11	CARBON	470	5%	1/4W		R630	1-249-421-11	CARBON	2.2K	5%	1/4W	
R401	▲1-216-459-00	METAL OXIDE	2.7K	5%	2W	F	R631	1-249-411-11	CARBON	330	5%	1/4W	
R402	▲1-215-895-11	METAL OXIDE	3.3K	5%	2W	F	R632	1-259-426-11	CARBON	820	5%	1/6W	
R403	1-247-721-11	CARBON	4.7K	5%	1/4W		R633	1-259-428-11	CARBON	1K	5%	1/6W	
R404	1-247-721-11	CARBON	4.7K	5%	1/4W		R634	1-249-417-11	CARBON	1K	5%	1/4W	
R405	1-247-706-11	(Canadian,AEP,E,UK)	330	5%	1/4W		R635	1-259-468-11	CARBON	47K	5%	1/6W	
R406	1-249-469-11	CARBON	100K	5%	1/4W		R636	1-249-433-11	CARBON	22K	5%	1/4W	
R407	1-247-700-11	CARBON	100	5%	1/4W		R638	1-249-441-11	CARBON	100K	5%	1/4W	
R408	1-249-469-11	CARBON	100K	5%	1/4W		R639	1-249-393-11	CARBON	10	5%	1/4W	
R409	1-247-713-11	CARBON	1K	5%	1/4W		R642	1-249-441-11	CARBON	100K	5%	1/4W	
R410	1-247-713-11	CARBON	1K	5%	1/4W		R644	1-259-453-11	CARBON	11K	5%	1/6W	
R411	1-247-725-11	CARBON	10K	5%	1/4W		R651	1-249-405-11	CARBON	100	5%	1/4W	
R412	1-249-484-11	CARBON	6.8	5%	1/2W		R652	1-249-407-11	CARBON	150	5%	1/4W	
R413	1-247-739-11	CARBON	100	5%	1/2W		R653	1-247-903-00	CARBON	1M	5%	1/4W	
R414	1-247-138-00	CARBON	2K	5%	1/4W		R654	1-249-433-11	CARBON	22K	5%	1/4W	
R415	1-247-700-11	CARBON	100	5%	1/4W		R655	1-249-429-11	CARBON	10K	5%	1/4W	
R416	1-214-937-00	CARBON	1M	5%	1/2W		R656	1-249-437-11	CARBON	47K	5%	1/4W	
R417	1-249-844-11	CARBON	56K	5%	1/2W		R657	1-249-429-11	CARBON	10K	5%	1/4W	
R418	1-249-818-11	CARBON	4.7K	1%	1/2W		R658	1-249-429-11	CARBON	10K	5%	1/4W	
R419	1-247-713-11	CARBON	TK	5%	1/4W		R659	1-249-429-11	CARBON	10K	5%	1/4W	
R431	1-247-713-11	(WG)...CARBON	TK	5%	1/4W		R660	1-249-437-11	CARBON	47K	5%	1/4W	
R432	1-247-713-11	(WG)...CARBON	TK	5%	1/4W		R661	1-249-433-11	CARBON	22K	5%	1/4W	
R455	1-247-706-11	(Canadian,AEP,E,UK)	330	5%	1/4W		R662	1-249-433-11	CARBON	22K	5%	1/4W	
R456	1-249-469-11	CARBON	100K	5%	1/4W		R663	1-249-422-11	CARBON	2.7K	5%	1/4W	
R457	1-247-700-11	CARBON	100	5%	1/4W		R664	1-249-396-11	CARBON	18	5%	1/4W	
R458	1-249-469-11	CARBON	100K	5%	1/4W		R701	1-259-446-11	CARBON	5.6K	5%	1/6W	
R459	1-247-713-11	CARBON	1K	5%	1/4W		R702	1-259-449-11	CARBON	7.5K	5%	1/6W	
R460	1-247-713-11	CARBON	1K	5%	1/4W		R703	1-259-446-11	CARBON	5.6K	5%	1/6W	
							R704	1-259-461-11	CARBON	24K	5%	1/6W	
							R705	1-259-460-11	CARBON	22K	5%	1/6W	

Note:  
The components identified by mark ▲ or dotted line with mark ▲ are critical for safety. Replace only with part number specified.

Note:  
Les composants identifiés par une marque ▲ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

<u>Ref.No.</u>	<u>Part No.</u>	<u>Description</u>					<u>Ref.No.</u>	<u>Part No.</u>	<u>Description</u>				
R706	1-259-500-11	CARBON	1M	5%	1/6W		T1	▲1-449-691-11	(Canadian)....TRANSFORMER, POWER				
R707	1-259-444-11	CARBON	4.7K	5%	1/6W		T1	▲1-449-693-11	(AEP).....TRANSFORMER, POWER				
R708	1-259-476-11	CARBON	100K	5%	1/6W		T1	▲1-449-694-11	(WG).....TRANSFORMER, POWER				
R709	1-259-440-11	CARBON	3.3K	5%	1/6W		T1	▲1-449-695-11	(E).....TRANSFORMER, POWER				
R710	1-259-440-11	CARBON	3.3K	5%	1/6W		T1	▲1-449-769-11	(UK).....TRANSFORMER, POWER				
R711	1-259-468-11	CARBON	47K	5%	1/6W		TM501	1-537-235-11	(UK)....TERMINAL BOARD(SP)				
R713	1-259-448-11	CARBON	6.8K	5%	1/6W		TM501	1-537-235-11	(E)....TERMINAL BOARD(SP)(SPEAKER A,B)				
R714	1-259-460-11	CARBON	22K	5%	1/6W		TM501	1-537-227-11	(AEP)....TERMINAL BOARD(SP)(SPEAKER A,B)				
R715	1-259-392-11	CARBON	33	5%	1/6W		TM501	1-537-228-11	(WG,Canadian) ...TERMINAL BOARD(SP)(SPEAKER A,B)				
R716	1-259-468-11	CARBON	47K	5%	1/6W		VH1	*1-564-104-00	PIN, CONNECTOR 3P				
R751	1-259-446-11	CARBON	5.6K	5%	1/6W		VH2	*1-564-321-00	PIN, CONNECTOR 2P				
R752	1-259-449-11	CARBON	7.5K	5%	1/6W		VH3	1-564-320-00	PIN, CONNECTOR 2P				
R753	1-259-446-11	CARBON	5.6K	5%	1/6W		VH4	*1-564-321-00	(AEP,WG,UK)...PIN, CONNECTOR 2P				
R754	1-259-461-11	CARBON	24K	5%	1/6W		VH5	*1-565-792-11	PIN, CONNECTOR 2P				
R755	1-259-460-11	CARBON	22K	5%	1/6W		VH6	*1-564-321-00	(AEP,WG,UK)...PIN, CONNECTOR 2P				
R756	1-259-500-11	CARBON	1M	5%	1/6W		VH8	*1-564-241-00	PIN, CONNECTOR 4P				
R757	1-259-444-11	CARBON	4.7K	5%	1/6W		VH9	*1-560-595-21	(E).....TERMINAL (WITH BASE)				
R758	1-259-476-11	CARBON	100K	5%	1/6W		VH9	*1-564-321-00	(UK,Canadian)...PIN, CONNECTOR 2P				
R759	1-259-440-11	CARBON	3.3K	5%	1/6W		VH11	*1-564-321-00	(E)...PIN, CONNECTOR 2P				
R760	1-259-440-11	CARBON	3.3K	5%	1/6W		VH12	1-564-320-00	PIN, CONNECTOR 2P				
R761	1-259-468-11	CARBON	47K	5%	1/6W		VH20	1-535-141-00	(E)...BASE POST 22MM (10MM PITCH) 4P				
R763	1-259-448-11	CARBON	6.8K	5%	1/6W		X601	1-577-269-11	VIBRATOR, CRYSTAL (18.43MHz)				
R764	1-259-460-11	CARBON	22K	5%	1/6W								
R765	1-259-392-11	CARBON	33	5%	1/6W								
R766	1-259-468-11	CARBON	47K	5%	1/6W								
R801	1-249-415-11	CARBON	680	5%	1/4W								
R802	1-247-804-11	CARBON	75	5%	1/4W								
R803	1-249-417-11	CARBON	1K	5%	1/4W								
R804	1-249-415-11	CARBON	680	5%	1/4W								
R805	1-249-415-11	CARBON	680	5%	1/4W								
R806	1-249-417-11	CARBON	1K	5%	1/4W								
R807	1-249-417-11	CARBON	1K	5%	1/4W								
R808	1-247-903-00	CARBON	1M	5%	1/4W								
R809	1-249-417-11	CARBON	1K	5%	1/4W								
R902	1-247-727-11	(WG)....CARBON	10	5%	1/2W								
R903	1-247-727-11	(WG)....CARBON	10	5%	1/2W								
R952	1-247-727-11	(WG)....CARBON	10	5%	1/2W								
R953	1-247-727-11	(WG)....CARBON	10	5%	1/2W								
RT301	1-237-455-11	RES, ADJ, CARBON	500										
RT351	1-237-455-11	RES, ADJ, CARBON	500										
RV101	1-238-448-11	RES, VAR, CARBON	150K/150K(BALANCE)										
RV102	1-238-446-11	RES, VAR, CARBON	250K/250K(TREBLE)										
RV103	1-238-447-11	RES, VAR, CARBON	25K/50K (BASS)										
RV104	1-237-472-11	RES, VAR, CARBON	120K/120K(ATTENUATOR)										
RY301	1-515-501-00	RELAY											
S201	1-571-824-11	SWITCH, ROTARY	(INPUT SELECTOR-ANALOG)										
S202	1-571-821-11	SWITCH, ROTARY	SLIDE (INPUT SELECTOR-DIGITAL)										
S203	1-571-823-11	SWITCH, ROTARY	SLIDE(REC OUT SELECTOR)										
S204	1-571-828-11	SWITCH, PUSH	(1 KEY)(SOURCE DIRECT)										
S205	1-571-827-11	SWITCH, PUSH	(1 KEY)(MUTING)										
S206	1-571-822-11	SWITCH, ROTARY	SLIDE(SPEAKER)										
S207	1-571-825-11	SWITCH, ROTARY	(MODE)										
S401	1-571-111-11	SWITCH, PUSH	(1 KEY)(CARTRIDGE)										
S501	▲1-554-920-31	SWITCH, PUSH	(AC POWER)(1 KEY)(POWER)										
S502	▲1-570-307-11	(E)...SWITCH, VOLTAGE	CHANGE (VOLTAGE SELECTOR)										

**Note:**  
The components identified by mark ▲ or dotted line with mark ▲ are critical for safety.  
Replace only with part number specified.

**Note:**  
Les composants identifiés par une marque ▲ sont critiques pour la sécurité.  
Ne les remplacer que par une pièce portant le numéro spécifié.

