

TC-WR701ES/WR735S

SERVICE MANUAL

US Model


TC-WR701ES

Canadian Model

AEP Model

Australian Model

TC-WR735S

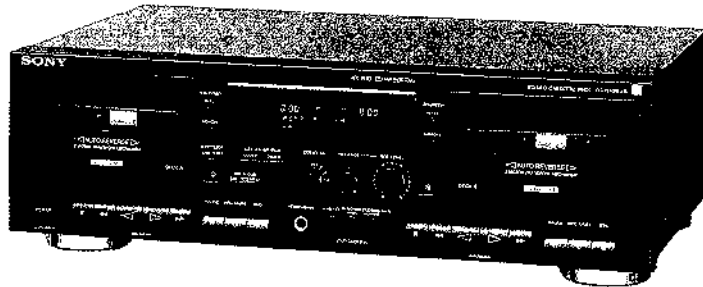

This photo is TC-WR701ES.

Model Name Using Similar Mechanism	TC-WR690/WR790	
Tape Transport Mechanism Type	DECK A	TCM-190RB11C
	DECK B	TCM-190RB11C

SPECIFICATIONS

Recording system 4-track 2-channel stereo
 Fast winding time Approx. 90 sec. (with Sony C-60 cassette)
 Bias AC bias
 Signal-to-noise ratio (at peak level and weighted)

Cassette (Dolby NR off)	Type IV	Type II	Type I
	58 dB	57 dB	55 dB

S/N ratio improvement (approximate values)
 with Dolby B NR on: 5 dB at 1 kHz; 10 dB at 5 kHz
 with Dolby C NR on: 15 dB at 500 Hz; 20 dB at 1 kHz
 with Dolby S NR on: 10 dB at 100 Hz; 24 dB at 1 kHz

Harmonic distortion 0.4% (with Type I, 160 nWb/m, 315 Hz, 3rd H.D.)
 1.8% (with Type IV, 250 nWb/m, 315 Hz, 3rd H.D.)

Frequency response (Dolby NR off)

Type IV cassette	30 - 19,000 Hz (±3 dB, IEC) 30 - 13,000 Hz (±3 dB (-4 dB) recording)
Type II cassette	30 - 18,000 Hz (±3 dB, IEC)
Type I cassette	30 - 16,000 Hz (±3 dB, IEC)

Type IV : Sony METAL-S
 Type II : Sony UX-S
 Type I : Sony HF-S

Wow and flutter ± 0.13% W.Peak (IEC)
 0.07% W.RMS (NAB)
 ± 0.18% W.Peak (DIN)

Inputs

Line inputs (phono jacks)	Sensitivity	0.16 V
	Input impedance	47 k ohms

Outputs

Line outputs (phono jacks)	Rated output level	0.5 V at a load impedance of 47 k ohms
	Load impedance	Over 10 k ohms
Headphones (stereo phone jack)	Output level	1 mW at a load impedance of 32 ohms

General

Power requirements 120 V AC, 60 Hz (US, Canadian model)
 220-230 V AC, 50/60 Hz (AEP, German model)
 240 V AC, 50/60 Hz (Australian model)
 Power consumption 33 W
 Dimensions Approx. 430×135×295 mm (w/h/d)
 (17×5³/₈×11³/₈ inches) including projecting parts and controls
 Mass Approx. 4.8 kg (10 lbs 10 oz)

Supplied accessories

Audio connecting cords (2)

Design and specifications are subject to change without notice.

STEREO CASSETTE DECK
SONY®



Features

For higher quality recording/playback

- The **Dolby HX PRO*** system which improves the linearity of the tape's high-range response during recording.
- **B, C and S type Dolby NR*** systems which reduce tape noise.
- **Automatic calibration on each deck** which ensures optimum recording conditions to bring out the best in every tape.


For your convenience

- **Automatic tape type detection** during playback and recording.
- **The Multi-AMS and Memory Play functions** which provide easy access to a desired selection.
- **A relay function** for long recording and playback.
- **Auto play function** which automatically starts playback after tape rewinding to start.
- **Synchronized dubbing** at normal or high speed.
- **Simultaneous Recording function** for the simultaneous recording of the same source to cassettes in both decks.


For easier operation

- **Twin easy-to-read linear counters** which show the elapsed recording or playing time on each deck.
- **An optional remote commander** which allows the remote control of various operations.

* Dolby noise reduction and HX Pro headroom extension manufactured under license from Dolby Laboratories Licensing Corporation. HX Pro originated by Bang & Olufsen.

"DOLBY", the double-D symbol  and "HX PRO" are trademarks of Dolby Laboratories Licensing Corporation.

MODEL IDENTIFICATION (Specification Label)

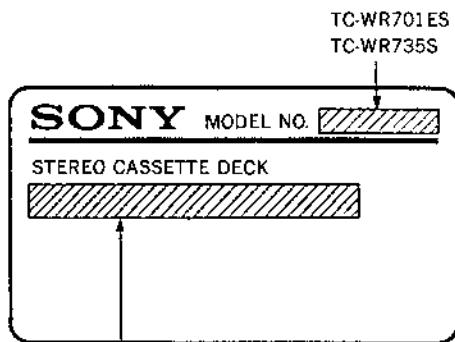

US, Canadian model: AC 120V 60Hz 33W
 AEP, German model: AC 220—230V~50/60Hz 33W
 Australian model: AC 240V~50/60Hz

SAFETY CHECK-OUT (US Model)

After correcting the original service problem, perform the following safety check before releasing the set to the customer:

Check the antenna terminals, metal trim, "metallized" knobs, screws, and all other exposed metal parts for AC leakage. Check leakage as described below.

LEAKAGE TEST

The AC leakage from any exposed metal part to earth ground and from all exposed metal parts to any exposed metal part having a return to chassis, must not exceed 0.5 mA (500 microamperes). Leakage current can be measured by any one of three methods.

1. A commercial leakage tester, such as the Simpson 229 or RCA WT-540A. Follow the manufacturers' instructions to use these instruments.
2. A battery-operated AC milliammeter. The Data Precision 245 digital multimeter is suitable for this job.
3. Measuring the voltage drop across a resistor by means of a VOM or battery-operated AC voltmeter. The "limit" indication is 0.75 V, so analog meters must have an accurate low-voltage scale. The Simpson 250 and Sanwa SH-63Trd are examples of a passive VOM that is suitable. Nearly all battery operated digital multimeters that have a 2V AC range are suitable. (See Fig. A)

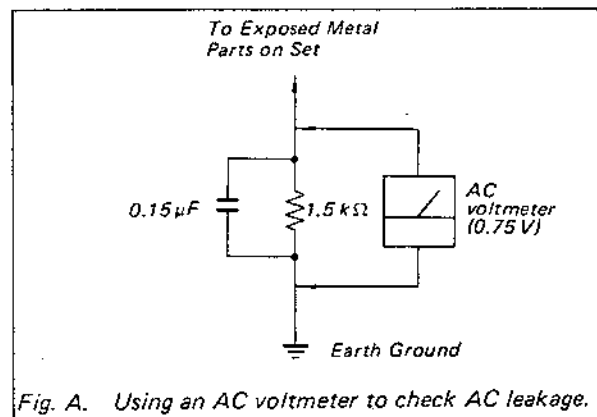




Fig. A. Using an AC voltmeter to check AC leakage.


TABLE OF CONTENTS

<u>Section</u>	<u>Title</u>	<u>Page</u>
1. GENERAL		
1-1.	Identifying the Parts	4
2. DISASSEMBLY		
2-1.	Cassette Lid Assy	5
2-2.	Front Panel Assy	5
2-3.	Mechanism Deck	6
2-4.	Capstan Motor, Reel Motor (1)	6
2-5.	Capstan Motor, Reel Motor (2)	7
2-6.	Head, Pinch Roller	7
3. MECHANICAL ADJUSTMENTS		8
4. ELECTRICAL ADJUSTMENTS		8
5. DIAGRAMS		
5-1.	Circuit Boards Location	12
5-2.	Printed Wiring Boards—Main Section—	13
5-3.	Schematic Diagram—Main Section—	17
5-4.	Schematic Diagram—Panel Section—	21
5-5.	Printed Wiring Boards—Panel Section—	25
5-6.	Semiconductor Lead Layouts	27
6. EXPLODED VIEWS		
6-1.	Cabinet Section	30
6-2.	Front Panel Section	31
6-3.	Mechanism Section (1)	32
6-4.	Mechanism Section (2)	33
7. ELECTRICAL PARTS LIST		34

SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY MARK  OR DOTTED LINE WITH MARK  ON THE SCHEMATIC DIAGRAMS AND IN THE PARTS LIST ARE CRITICAL TO SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY.

ATTENTION AU COMPOSANT AYANT RAPPORT À LA SÉCURITÉ!

LES COMPOSANTS IDENTIFIÉS PAR UNE MARQUE  SUR LES DIAGRAMMES SCHÉMATIQUES ET LA LISTE DES PIÈCES SONT CRITIQUES POUR LA SÉCURITÉ DE FONCTIONNEMENT. NE REMPLACER CES COMPOSANTS QUE PAR DES PIÈCES SONY DONT LES NUMÉROS SONT DONNÉS DANS CE MANUEL OU DANS LES SUPPLÉMENTS PUBLIÉS PAR SONY.


SECTION 1 GENERAL

This section is extracted from instruction manual.

Identifying the Parts

Front Panel



For details, refer to the page number(s) indicated in parentheses.

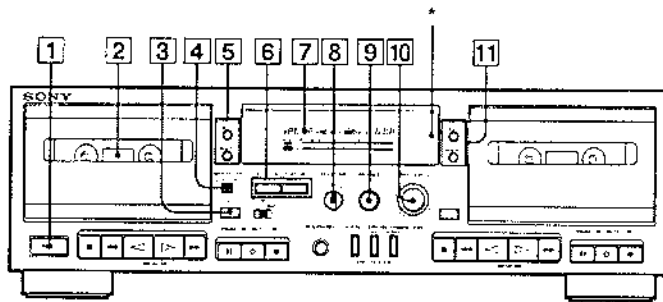


- 1 POWER switch
- 2 Deck A
- 3 ▲ (eject) button (deck A)
- 4 MPX (multiplex) FILTER ON/OFF switch (36)
- 5 COUNTER buttons (deck A) (30)
RESET button
MEMORY button
- 6 AUTO CAL (calibration) buttons (DECK A, DECK B) (48,50)
- 7 Display panel
- 8 DOLBY NR (Dolby noise reduction) switch (18,22,32,42,44)
- 9 BALANCE control (32)
- 10 REC (recording) LEVEL control (32,36)
- 11 COUNTER buttons (deck B) (30)
RESET button
MEMORY button

* Remote control sensor

You can remotely control this cassette deck with:

- A remote commander that came with a Sony amplifier or receiver if it has the  mark and cassette deck control capability.
- Any optional Sony remote commander with the  mark and cassette deck control capability.

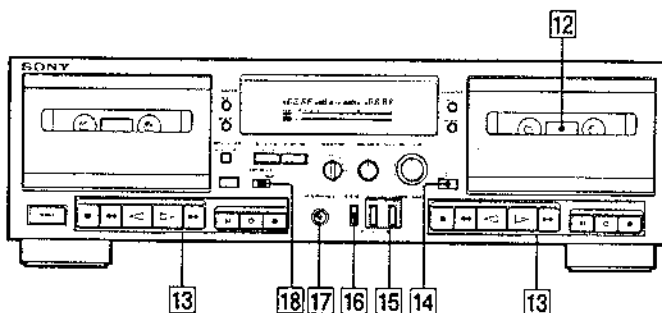


- 12 Deck B
- 13 Tape operation buttons
 - (stop) button
 - ◀◀ (leftward fast winding) (Multi-AMS**) button
 - ◀ (reverse play) button
 - ▶ (forward play) button
 - ▶▶ (rightward fast winding) (Multi-AMS**) button
 - || PAUSE button.
 - REC MUTE (record muting) button (46)
 - REC (recording) button
- 14 ▲ (eject) button (deck B)
- 15 SYNCHRO DUBBING buttons (52)
HIGH speed button
NORMAL speed button
- 16 A+B REC (simultaneous recording) button (42)
- 17 HEADPHONES jack (stereo phone jack)
- 18 DIR (direction) MODE switch (18,22,32,42,44,52)

** AMS is an abbreviation for Automatic Music Sensor.

SECTION 2 DISASSEMBLY


Note : Follow the disassembly procedure in the numerical order given.

2-1. CASSETTE LID ASSY

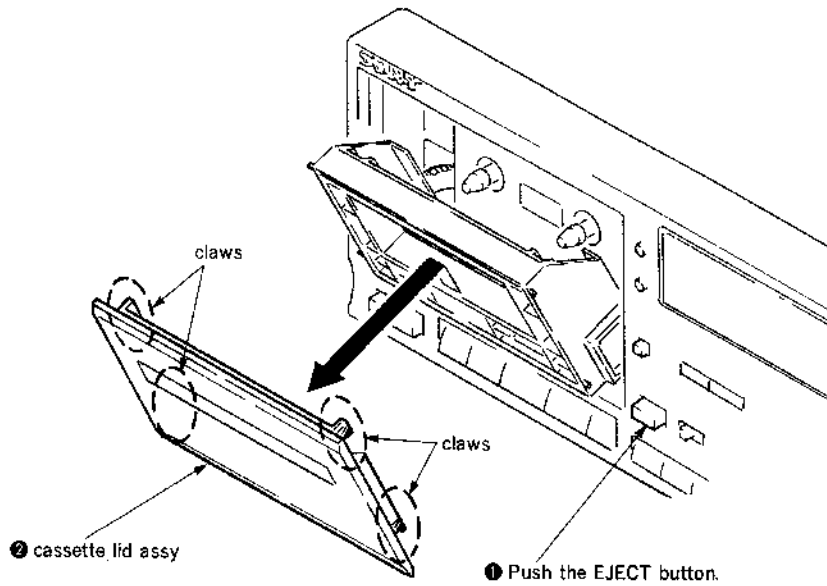


2-2. FRONT PANEL ASSY


① Remove the connectors.

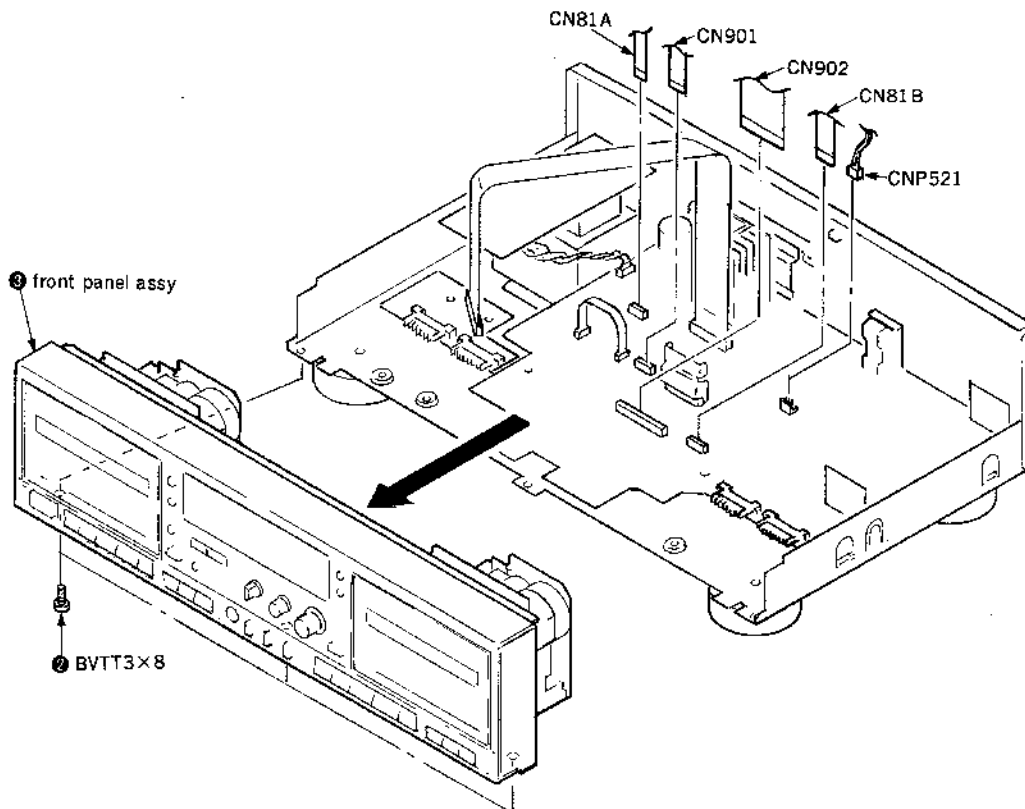


2-3. MECHANISM DECK

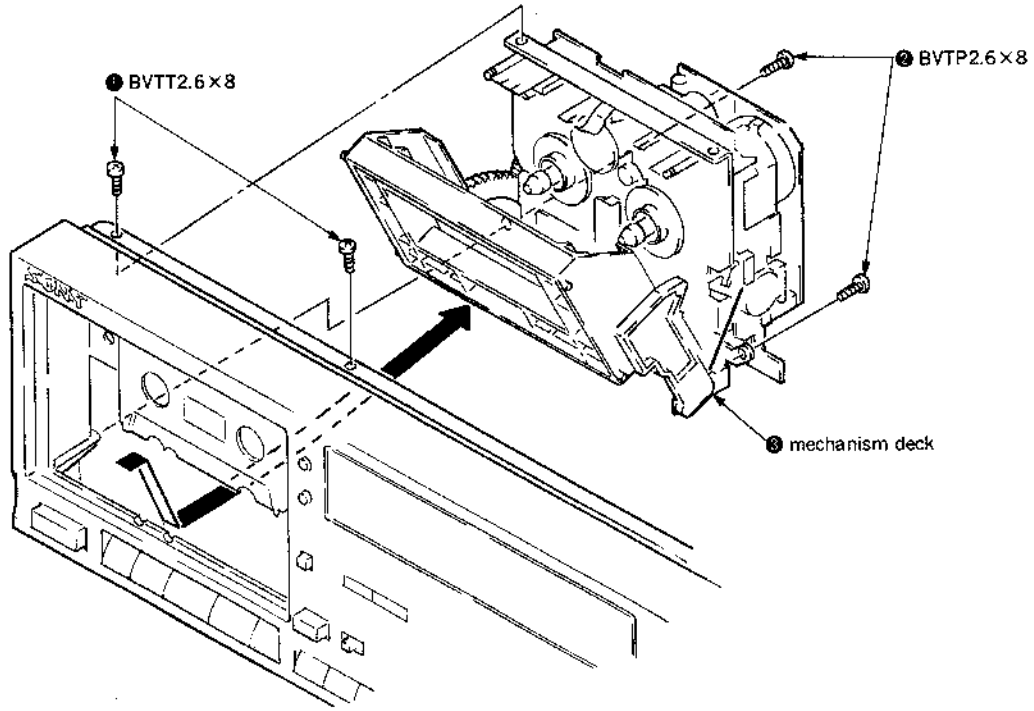


2-4. CAPSTAN MOTOR, REEL MOTOR (1)

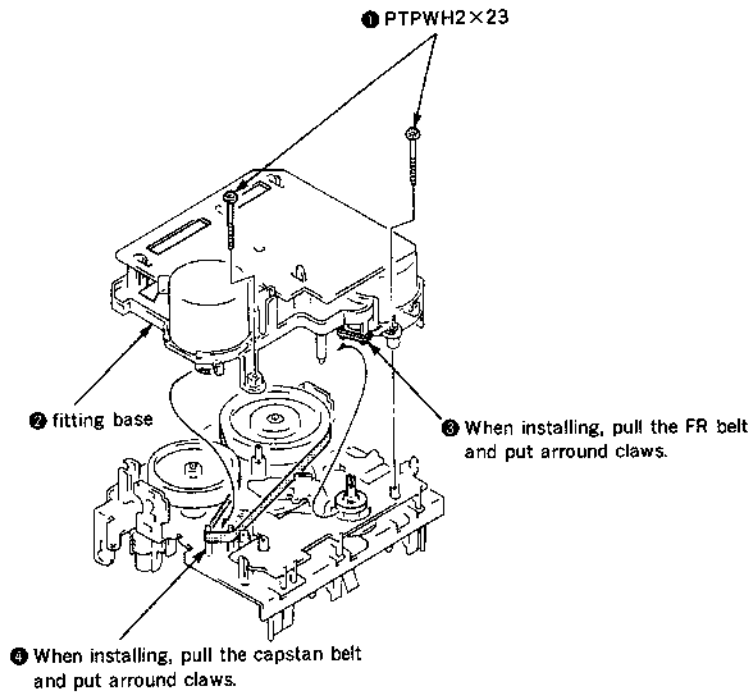

2-5. CAPSTAN MOTOR, REEL MOTOR (2)

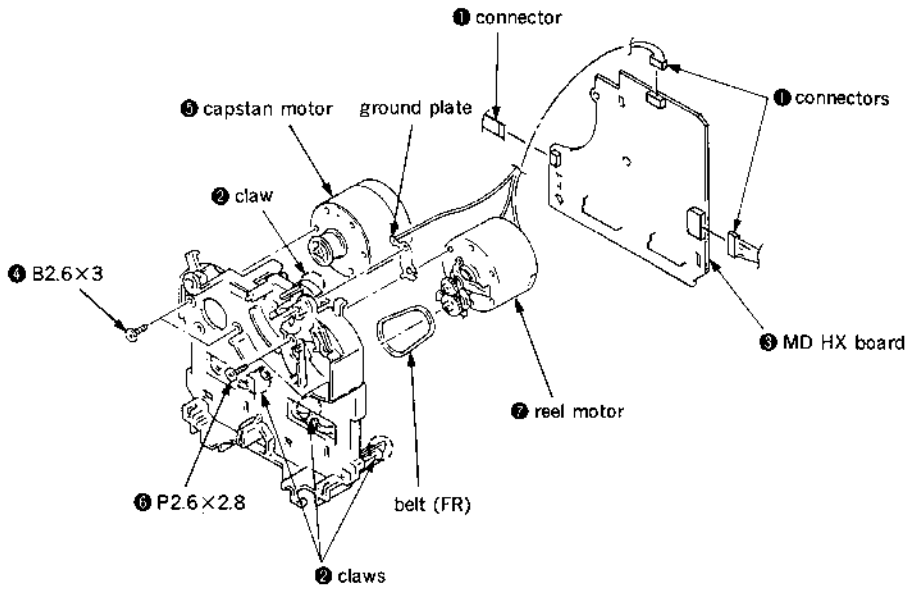

2-6. HEAD, PINCH ROLLER

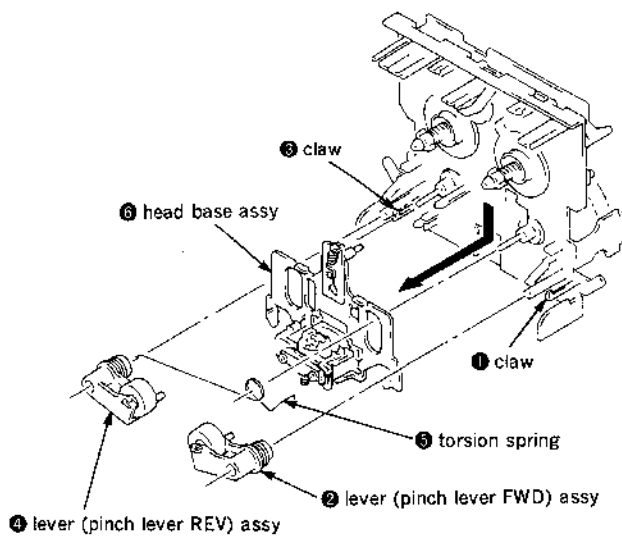

SECTION 3 MECHANICAL ADJUSTMENTS

PRECAUTION

1. Clean the following parts with a denatured alcohol-moistened swab :

record/playback/erase head	pinch roller
rubber belts	idlers
capstan	
2. Demagnetize the record/playback head with a head demagnetizer.
(Head demagnetizer do not approach for the erase head.)
3. Do not use a magnetized screwdriver for the adjustment.
4. After the adjustments, apply suitable locking compound to the parts adjusted.
5. The adjustments should be performed with the rated power supply voltage unless otherwise noted.

Torque Measurement


Torque	Torque meter	Meter reading
Forward	CQ-102C	30 to 65g·cm (0.42 to 0.90 oz·inch)
Forward back tension	CQ-102C	1 to 6g·cm (0.014 to 0.08 oz·inch)
Reverse	CQ-102RC	30 to 65g·cm (0.42 to 0.90 oz·inch)
Reverse back tension	CQ-102RC	1 to 6g·cm (0.014 to 0.08 oz·inch)
Forward, Reverse	CQ-201B	70 to 120g·cm (0.98 to 1.67 oz·inch)

SECTION 4 ELECTRICAL ADJUSTMENTS

PRECAUTION

1. The adjustment should be performed in the publication.
(Be sure to make playback adjustment at first.)
2. The adjustment and measurement should be performed for both L-CH and R-CH.
 - Switch position
DOLBY NR switch : OFF
DIR MODE switch : ⇄
 - Standard record position
Deliver the standard input signal level to input jack and set the REC LEVEL control to obtain the standard output signal level as follows.

—Record Mode—

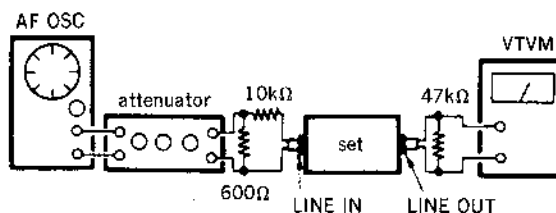

Standard Input Level

Input terminal	LINE IN
source impedance	10kΩ
input signal level	0.25V (-10dB)

Standard Output Level

Output terminal	LINE OUT
load impedance	47kΩ
output signal level	0.44V (-5dB)

Test Tape


Tape	Contents	Use
P-4-A100	10kHz, -10dB	Azimuth Adjustment
P-4-L300	315Hz, 0dB	Level Adjustment
WS-48B	3kHz, 0dB	Tape Speed Adjustment

Record/Playback Head Azimuth Adjustment


DECK A **DECK B**

Procedure :


1. Reverse Playback Mode

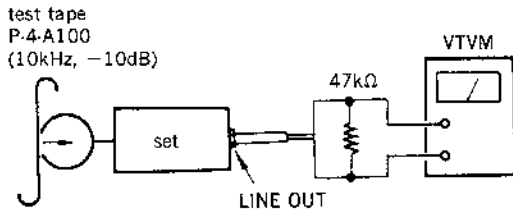

2. Turn the adjustment screw for the maximum output levels. If these levels do not match, turn the adjustment screw until both of output levels match together within 1dB.

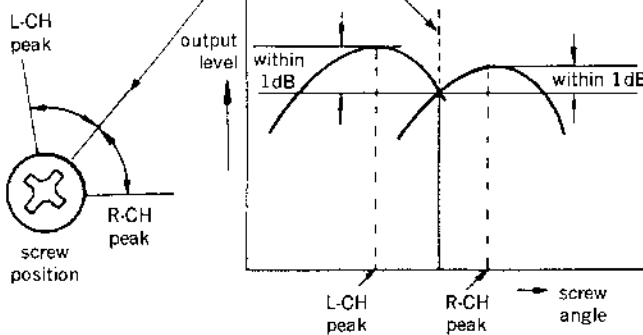


3. Playback Mode

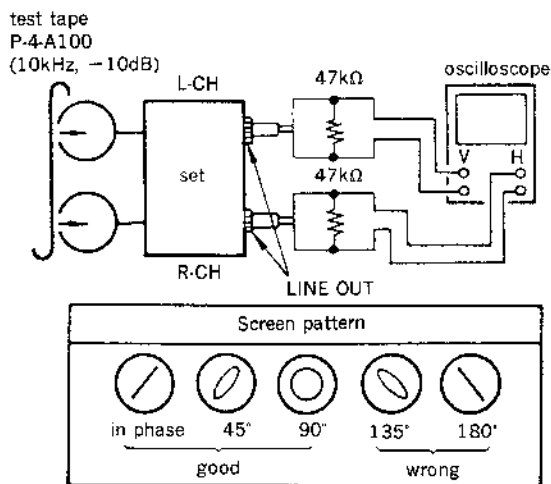

4. Change the forward playback mode and repeat the steps 1 to 3.
5. After the adjustment, lock the adjustment screws with suitable locking compound.

Adjustment Location : —record/playback head—

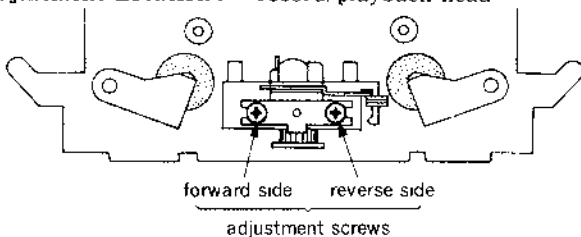


Tape Speed Adjustment **DECK A** **DECK B**

Perform high speed adjustment before normal speed adjustment.

Procedure :

—Forward Playback Mode—

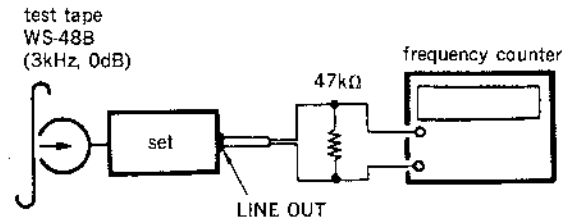

(high speed adjustment)

1. Short the connector TP1 (pins ① and ②). (test mode)
2. Keep on pressing the SYNCHRO DUBBING HIGH switch.
3. Adjust each RV72 so that the frequency counter reading becomes within adjustment limits of $6,000 \pm 20\text{Hz}$ on both of deck A and deck B.
4. Change the reverse playback mode and repeat the steps 2 and 3.

(normal speed adjustment)

5. After adjustment, open the connector TP1.
6. Keep on pressing the SYNCHRO DUBBING NORM switch.
7. Adjust each RV71 so that the frequency counter reading becomes within adjustment limits of $3,000 \pm 10\text{Hz}$ on both of deck A and deck B.
8. Change the reverse playback mode and repeat the steps 6 and 7.

Frequency difference between the beginning and the end of the tape should be within 3%.


Frequency difference between deck A and deck B the beginning of the tape should be within 1.5%.

Adjustment Location : MD HX board

Playback Level Adjustment DECK A DECK B

Procedure :

—Forward Playback Mode—

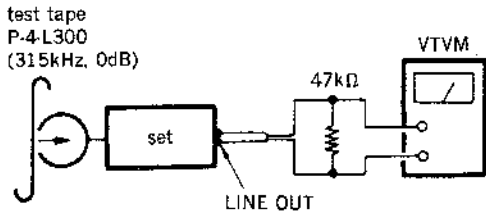

Adjust each RV11 (L-CH) and RV21 (R-CH) so that the VTVM reading becomes within adjustment limits below on both of deck A and deck B.

Adjustment Limits :

LINE OUT level : $-7.7 \pm 0.5\text{dB}$ (0.301 to 0.338V)

Level difference between channels : within 0.5dB

Confirm the LINE OUT level does not change in playback mode while changing the mode from playback to stop several times.


Adjustment Location : MD HX board

Bias Consumption Current Adjustment

DECK A DECK B

This adjustment should be performed when replacing the head assy or the bias oscillating transformer (T81, T91).

Procedure :

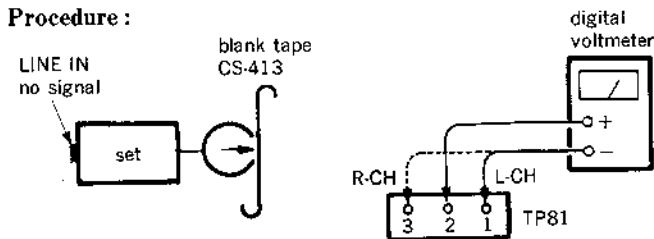

1. Connect the digital voltmeter to test point TP81.
2. Set RV81 (L-CH) and RV91 (R-CH) to mechanical center.
3. Set to forward record mode.
4. Adjust T81 (L-CH) and T91 (R-CH) so that the digital voltmeter reading becomes minimum.

Adjustment Location : MD HX board


Record Bias Adjustment DECK A DECK B

Setting :


REC LEVEL control : standard record position (Refer to page 8.)

Procedure :

1. Record Mode

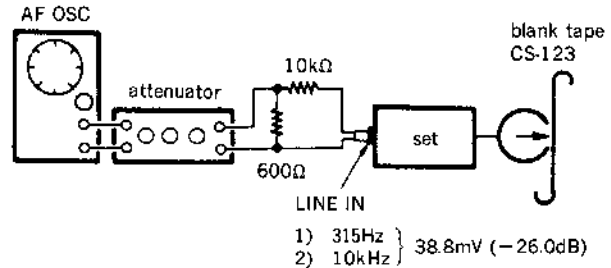

2. Playback Mode

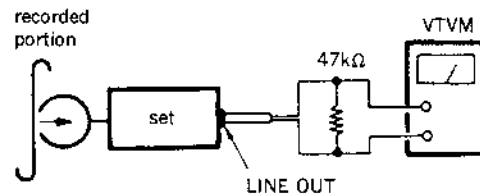

3. Playback the signal recorded in step 1, and confirm that the 10kHz playback output level is VTVM reading becomes within adjustment limits below relative to the 315Hz output.
4. If the adjustment limits are not satisfied, adjust each RV81 (L-CH) and RV91 (R-CH) so that the VTVM reading becomes within adjustment limits below.

Adjustment Limits :

10kHz playback output

relative to the 315Hz output : $0 \pm 0.5\text{dB}$

(0.732 to 0.821V)

Adjustment Location : MD HX board


Record Level Adjustment **DECK A** **DECK B**

Setting :


REC LEVEL control : standard record position (Refer to page 8.)

Procedure :

1. Record Mode

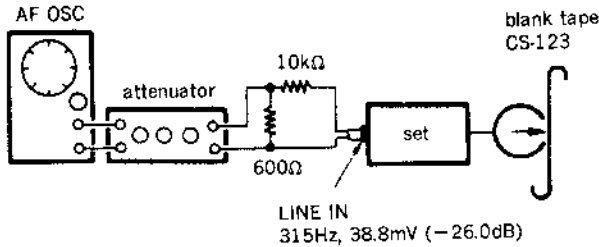

2. Playback Mode

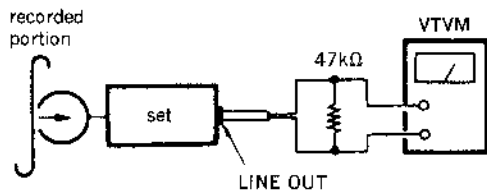

(Deck A)

3. Playback the signal recorded in step 1, and confirm that the playback output level is VTVM reading becomes within adjustment limits below.
4. If the adjustment limits are not satisfied, adjust each RV181 (L-CH) and RV281 (R-CH) so that the VTVM reading becomes within adjustment limits below.

(Deck B)

5. Similarly, playback the signal recorded in step 1, and confirm that the playback output level is VTVM reading becomes within adjustment limits below.
6. If the adjustment limits are not satisfied, adjust each RV171 (L-CH) and RV271 (R-CH) so that the VTVM reading becomes within adjustment limits below.


Adjustment Limits :

315Hz playback output level : $-26.0 \pm 0.5\text{dB}$ (36.7 to 41.1mV)


Adjustment Location : main board

Adjustment Location :


【 MD HX BOARD 】
(CONDUCTOR SIDE)

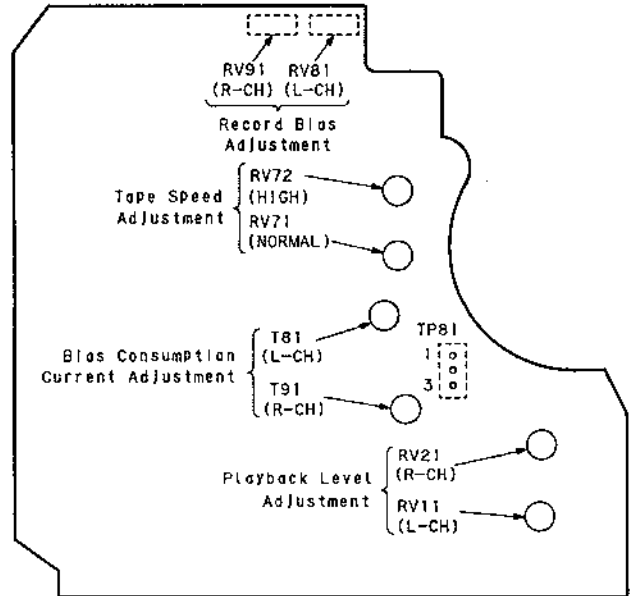

【 MAIN BOARD 】
(COMPONENT SIDE)

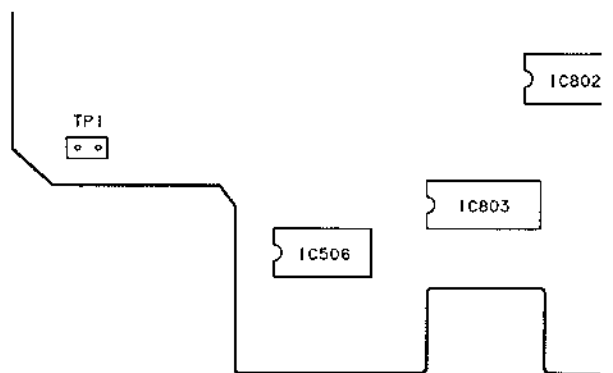


【 MAIN BOARD 】
(COMPONENT SIDE)

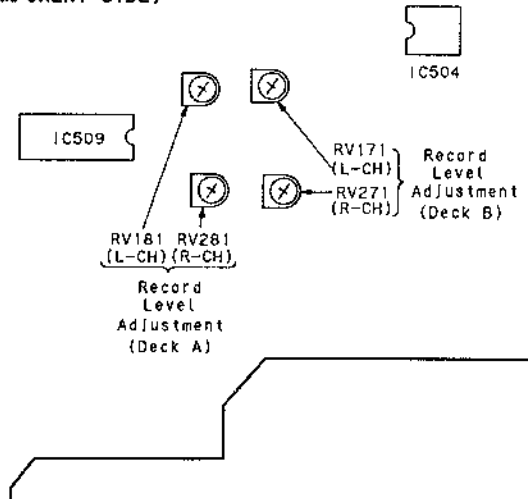

SECTION 5 DIAGRAMS

5-1. CIRCUIT BOARDS LOCATION

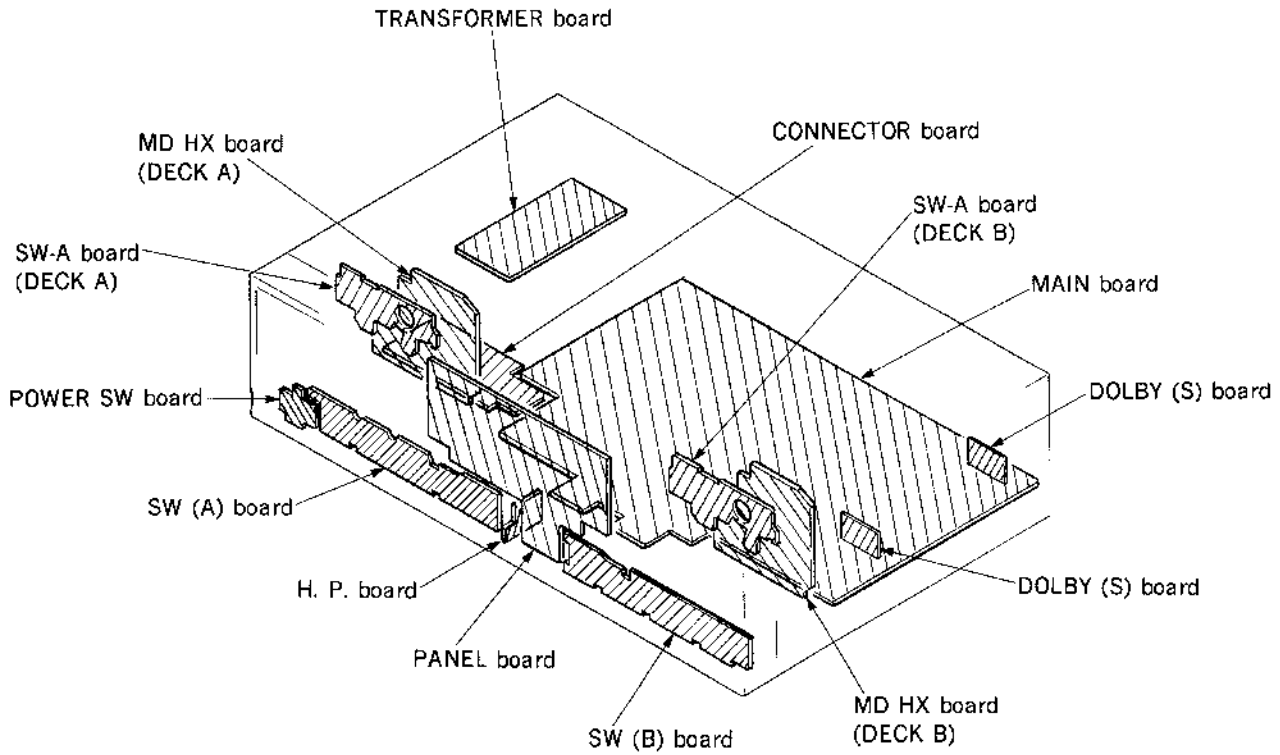




• Semiconductor Location

Ref. No.	Location	Ref. No.	Location
D31	C-2	Q52	B-3
D121	E-15	Q53	B-3
D221	E-15	Q71	C-5
D502	D-14	Q101	C-11
D505	C-12	Q121	C-14
D551	E-9	Q122	D-15
D552	E-9	Q141	B-11
D553	D-9	Q201	E-11
D554	D-9	Q221	C-13
D561	F-11	Q222	D-15
D562	F-11	Q241	B-11
D601	C-19	Q501	D-12
D611	I-15	Q504	C-12
D702	B-21	Q505	C-12
D703	B-21	Q506	C-11
D704	B-21	Q507	D-12
D705	B-21	Q521	C-14
D706	C-21	Q522	C-16
D707	C-21	Q523	D-16
D708	D-21	Q524	C-14
D709	D-21	Q525	D-16
D710	A-20	Q526	H-16
D711	A-17	Q541	G-13
D712	B-18	Q561	F-12
D713	C-20	Q562	F-11
D714	C-21	Q563	F-12
D715	D-21	Q564	F-12
D716	B-18	Q570	C-15
D717	B-15	Q571	I-20
D801	H-18	Q601	D-21
D802	E-18	Q602	E-21
		Q603	D-21
		Q604	E-21
		Q605	E-20
IC31	D-3	Q611	I-16
IC81	B-4	Q612	J-16
(IC81)	H-4	Q613	I-16
IC82	H-2	Q614	J-16
IC151	B-10	Q615	J-15
IC251	F-10	Q621	D-20
IC501	D-10	Q631	I-15
IC502	D-14	Q651	E-14
IC503	B-11	Q652	G-14
IC504	E-12	Q653	E-14
IC505	F-21	Q702	B-20
IC506	J-18	Q703	A-18
IC507	E-21	Q704	A-21
IC508	J-15	Q705	B-17
IC509	F-14	Q706	A-17
IC511	B-13	Q707	B-19
IC702	B-17	Q708	C-21
IC801	F-18	Q709	C-20
IC802	H-16	Q801	E-19
IC803	I-17	Q804	E-18
IC804	F-16	Q805	E-18
IC805	D-19	Q806	E-18
IC811	F-19	Q807	G-19


(): SW-A BOARD

- Note:
- : parts extracted from the component side.
 - : parts mounted on the conductor side.
 - : Through hole.
 - ▨ : Pattern on the side which is seen.
 - ▩ : Pattern of the rear side.

5-2. PRINTED WIRING BOARDS — MAIN SECTION — • Refer to Page 27 for Semiconductor Lead Layouts.

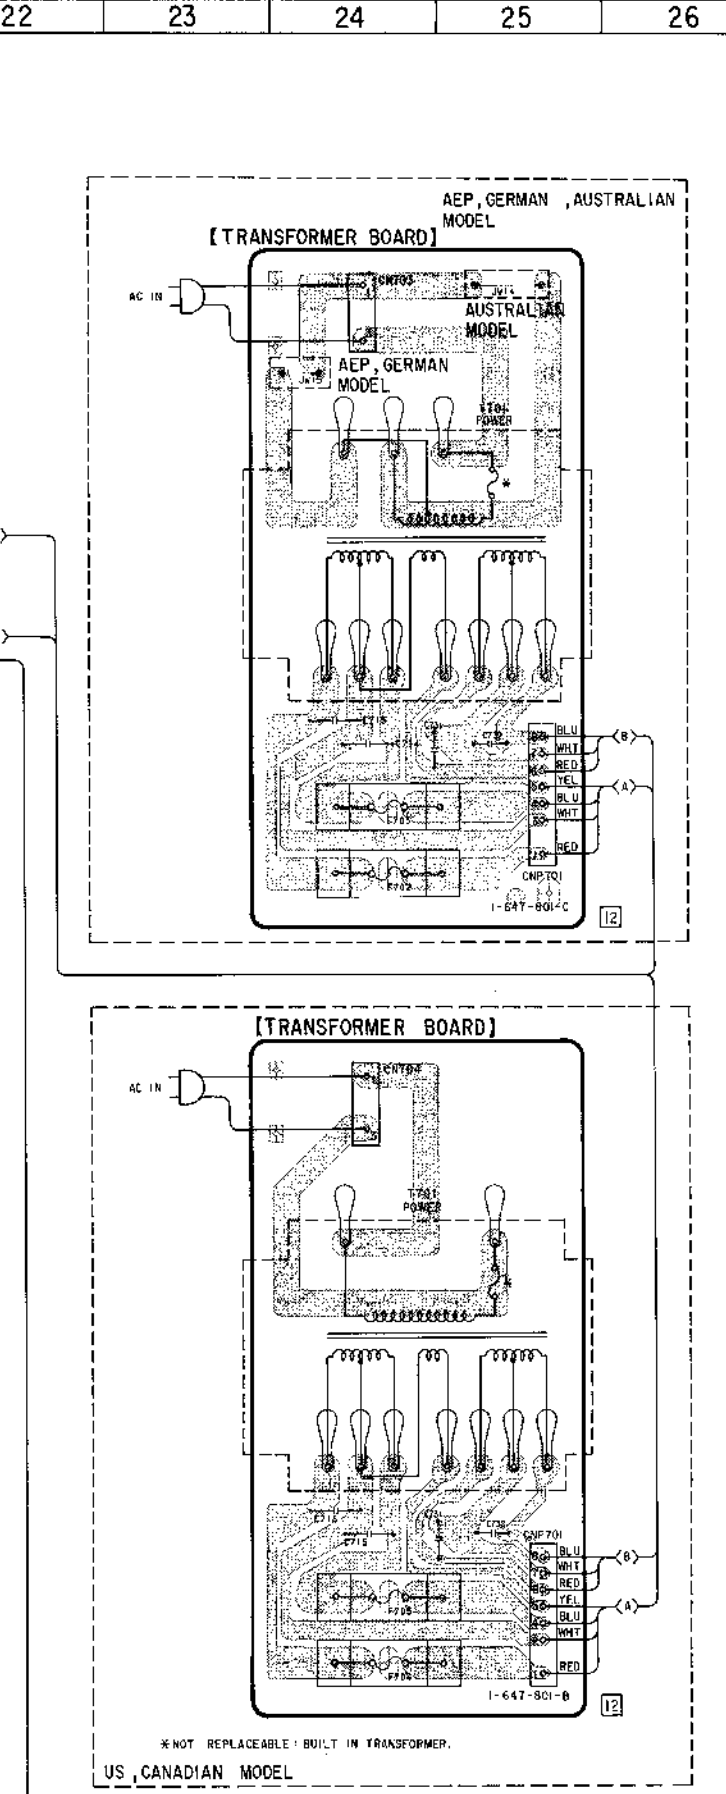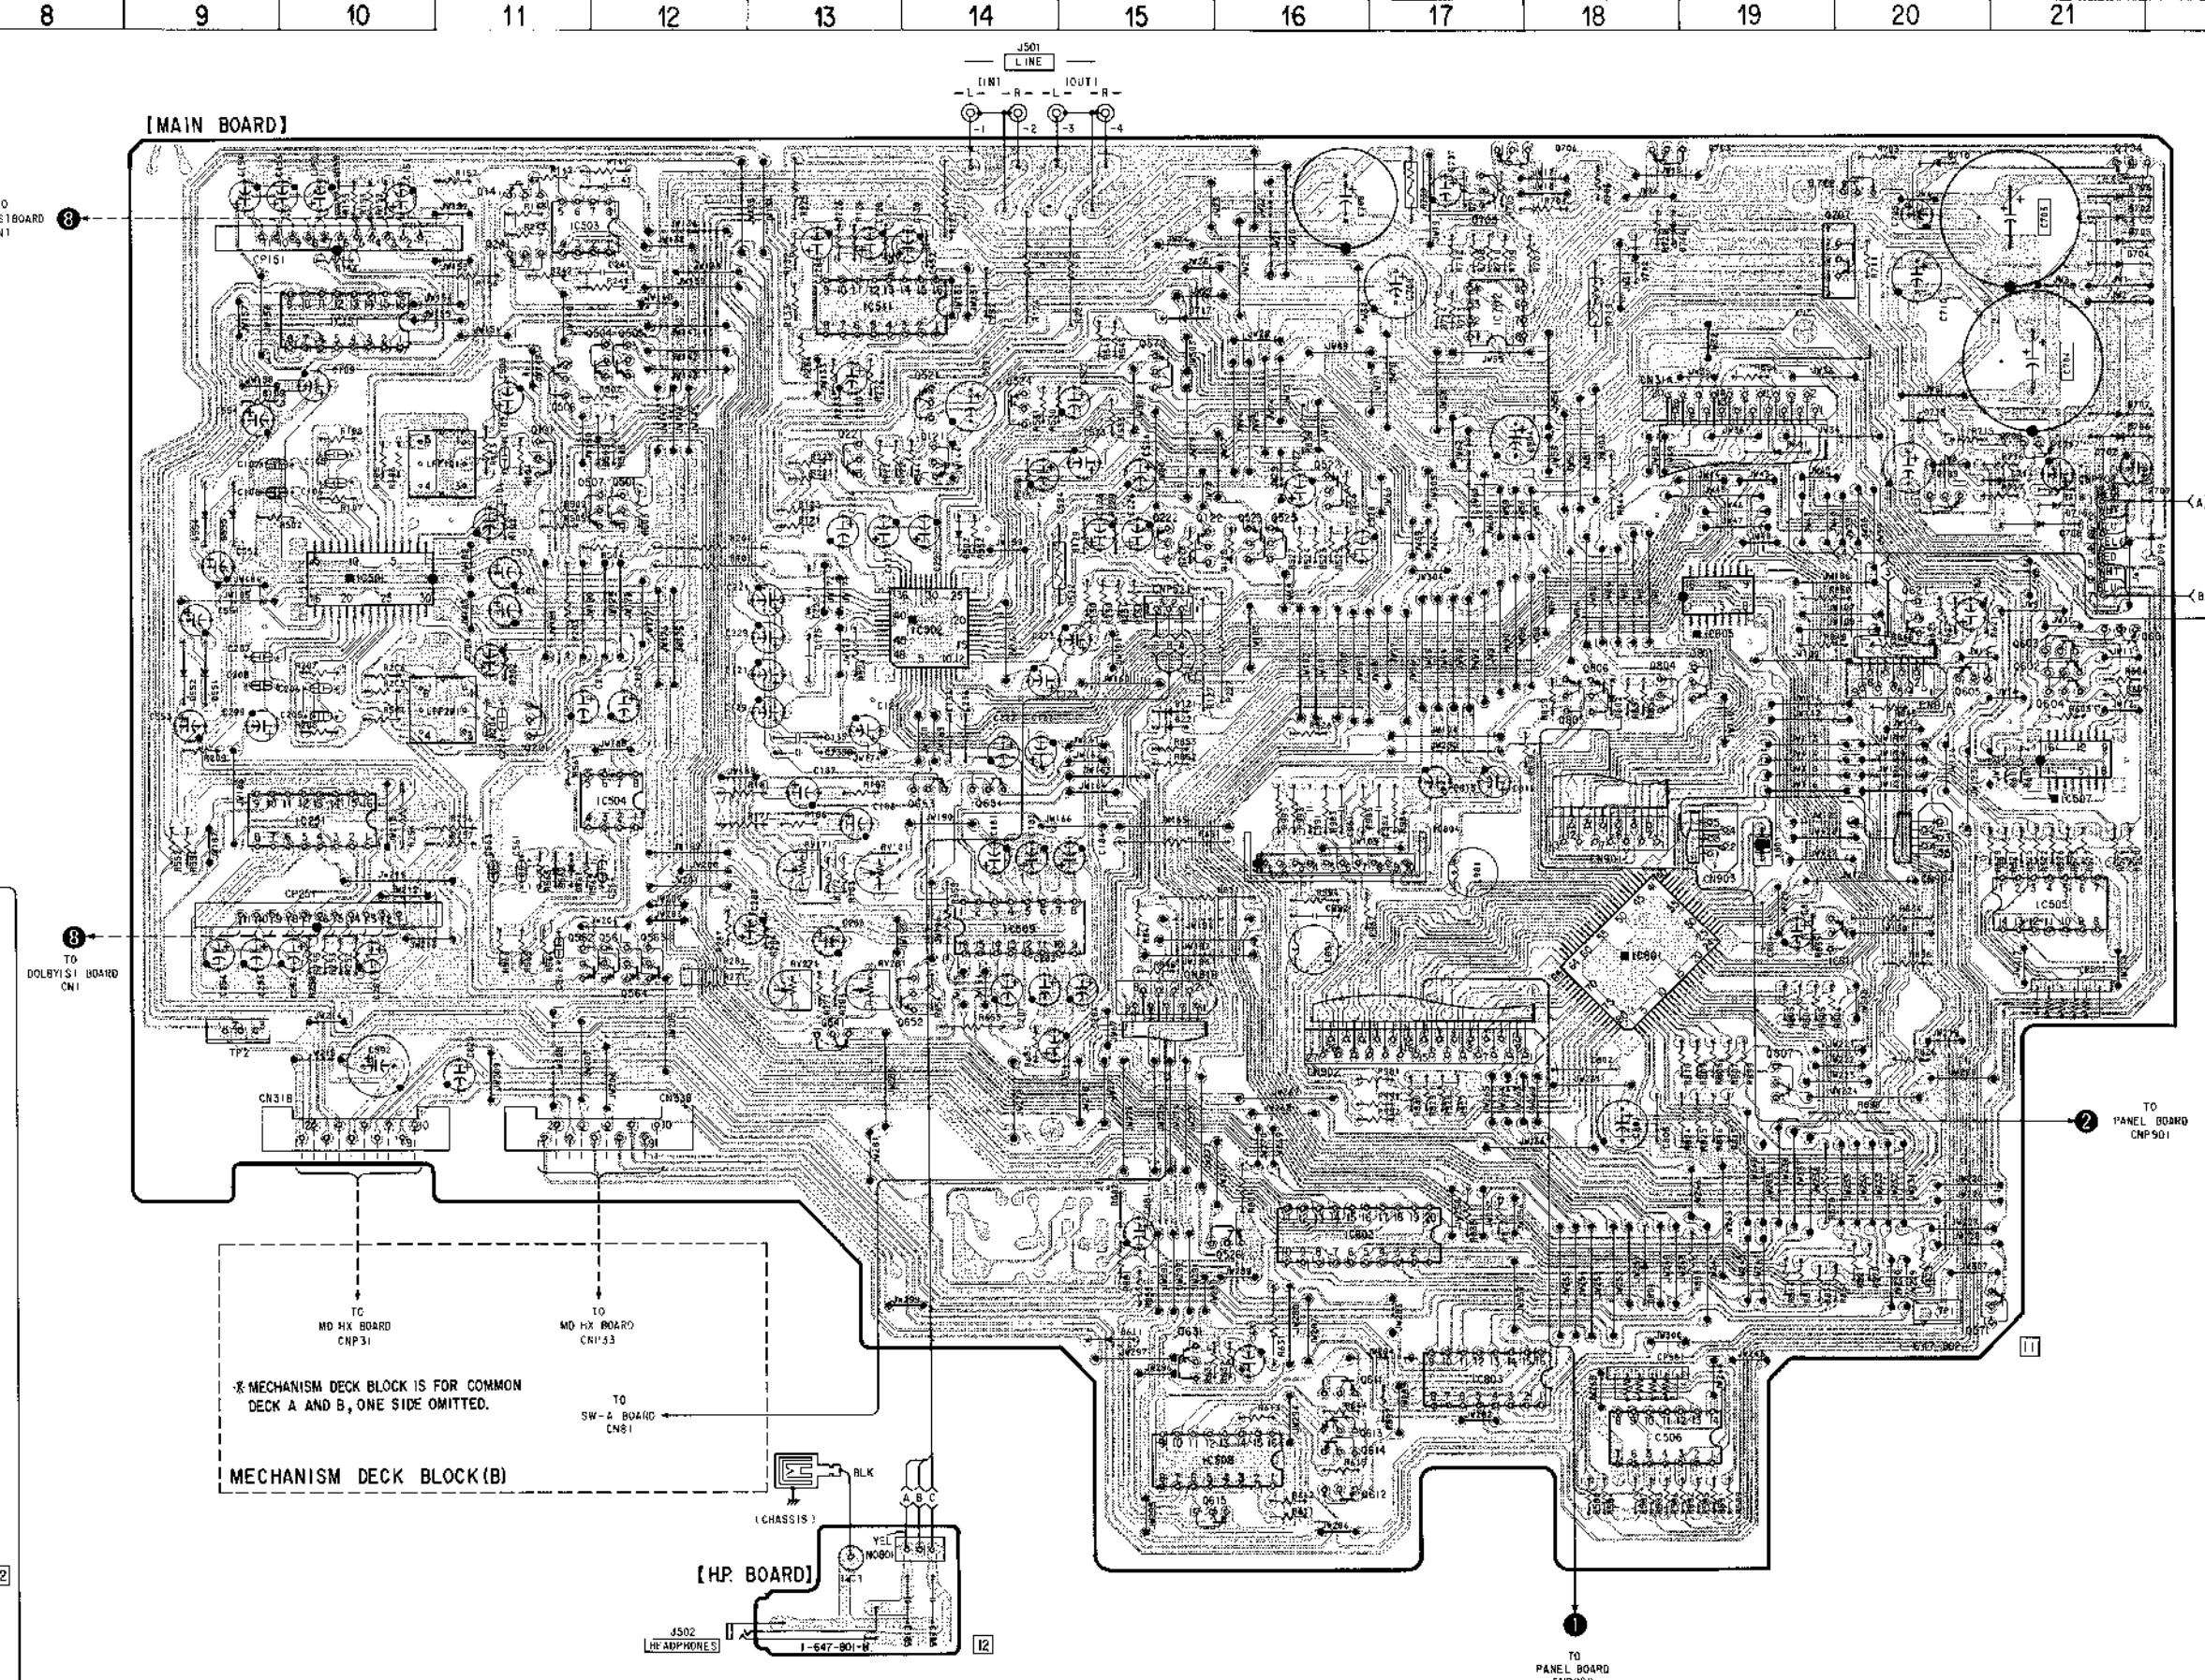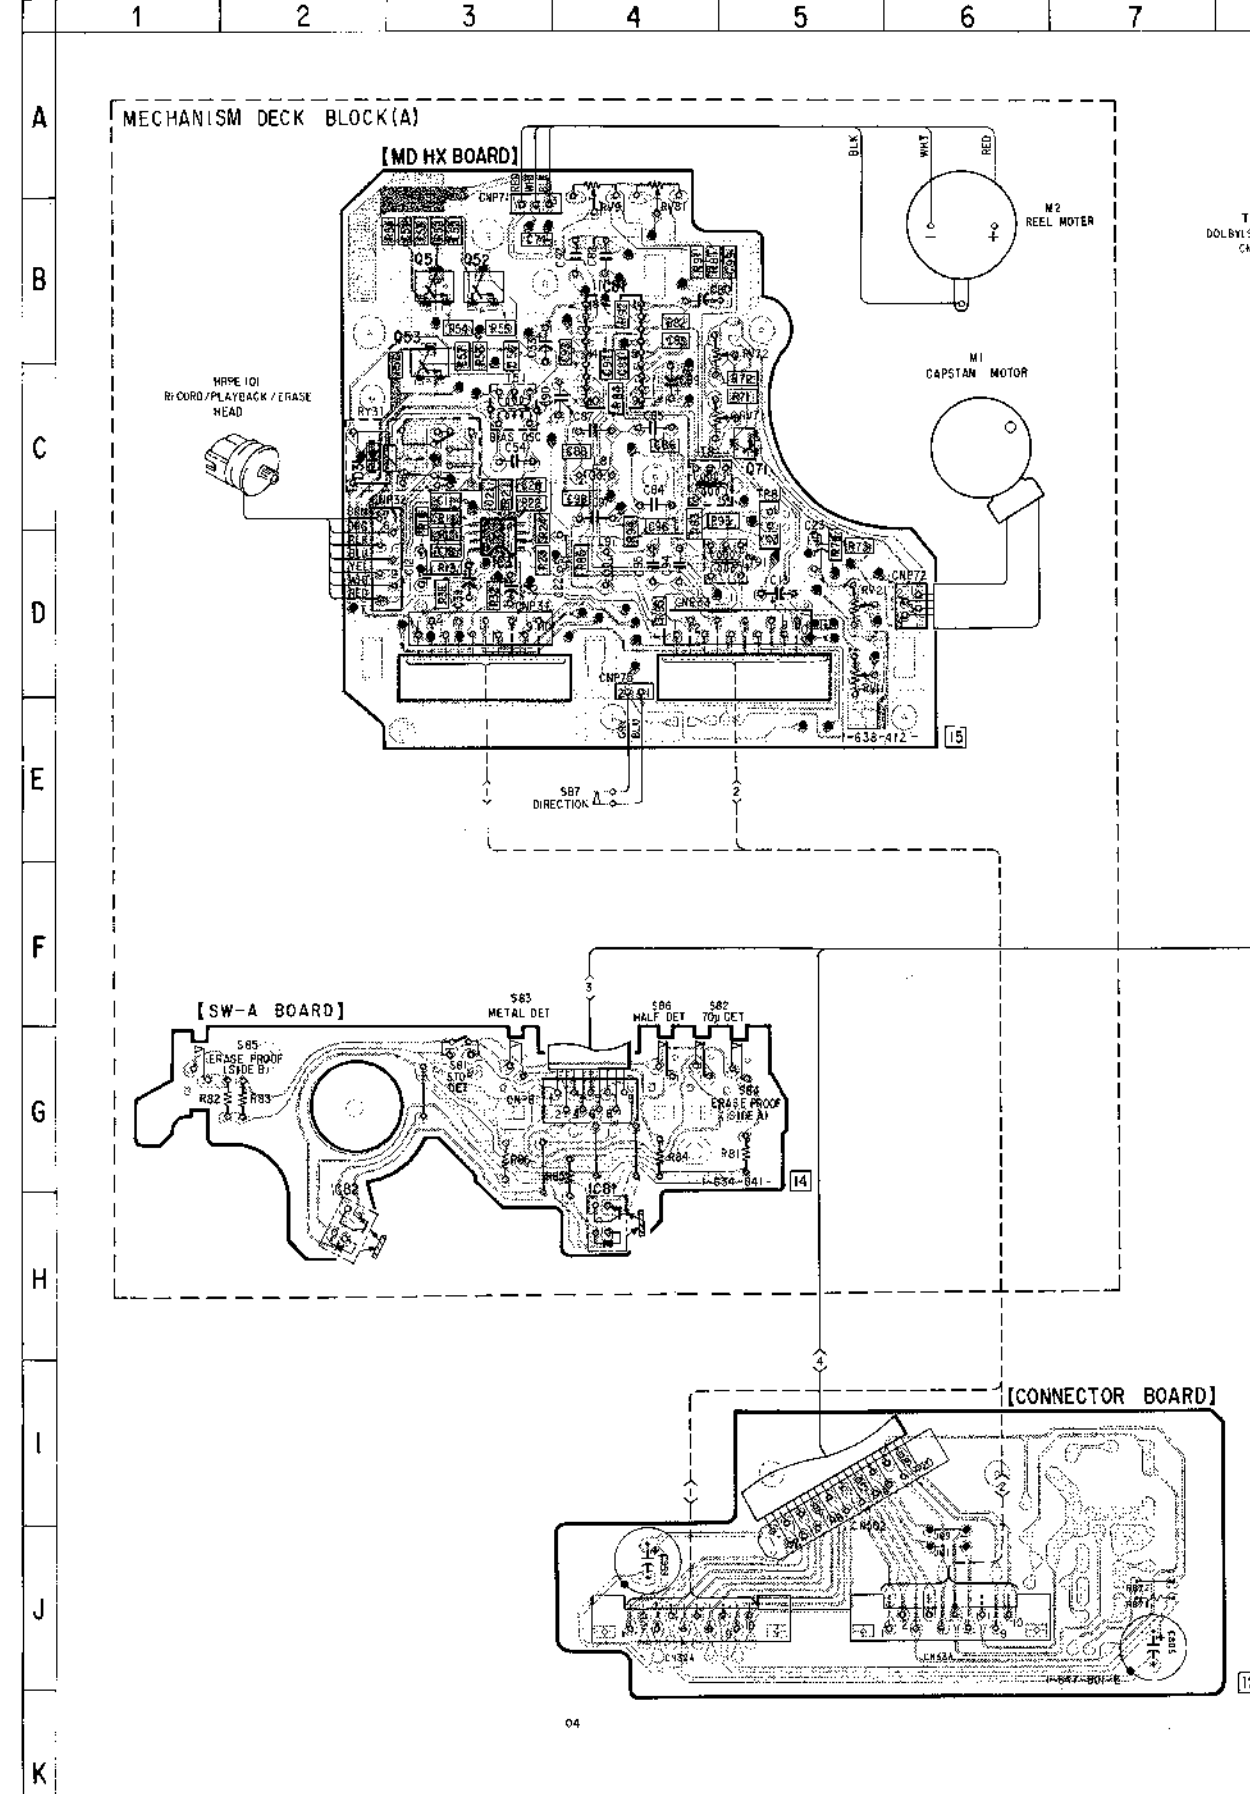

5-3. SCHEMATIC DIAGRAM — MAIN SECTION — Refer to Page 28 for IC Block Diagrams.

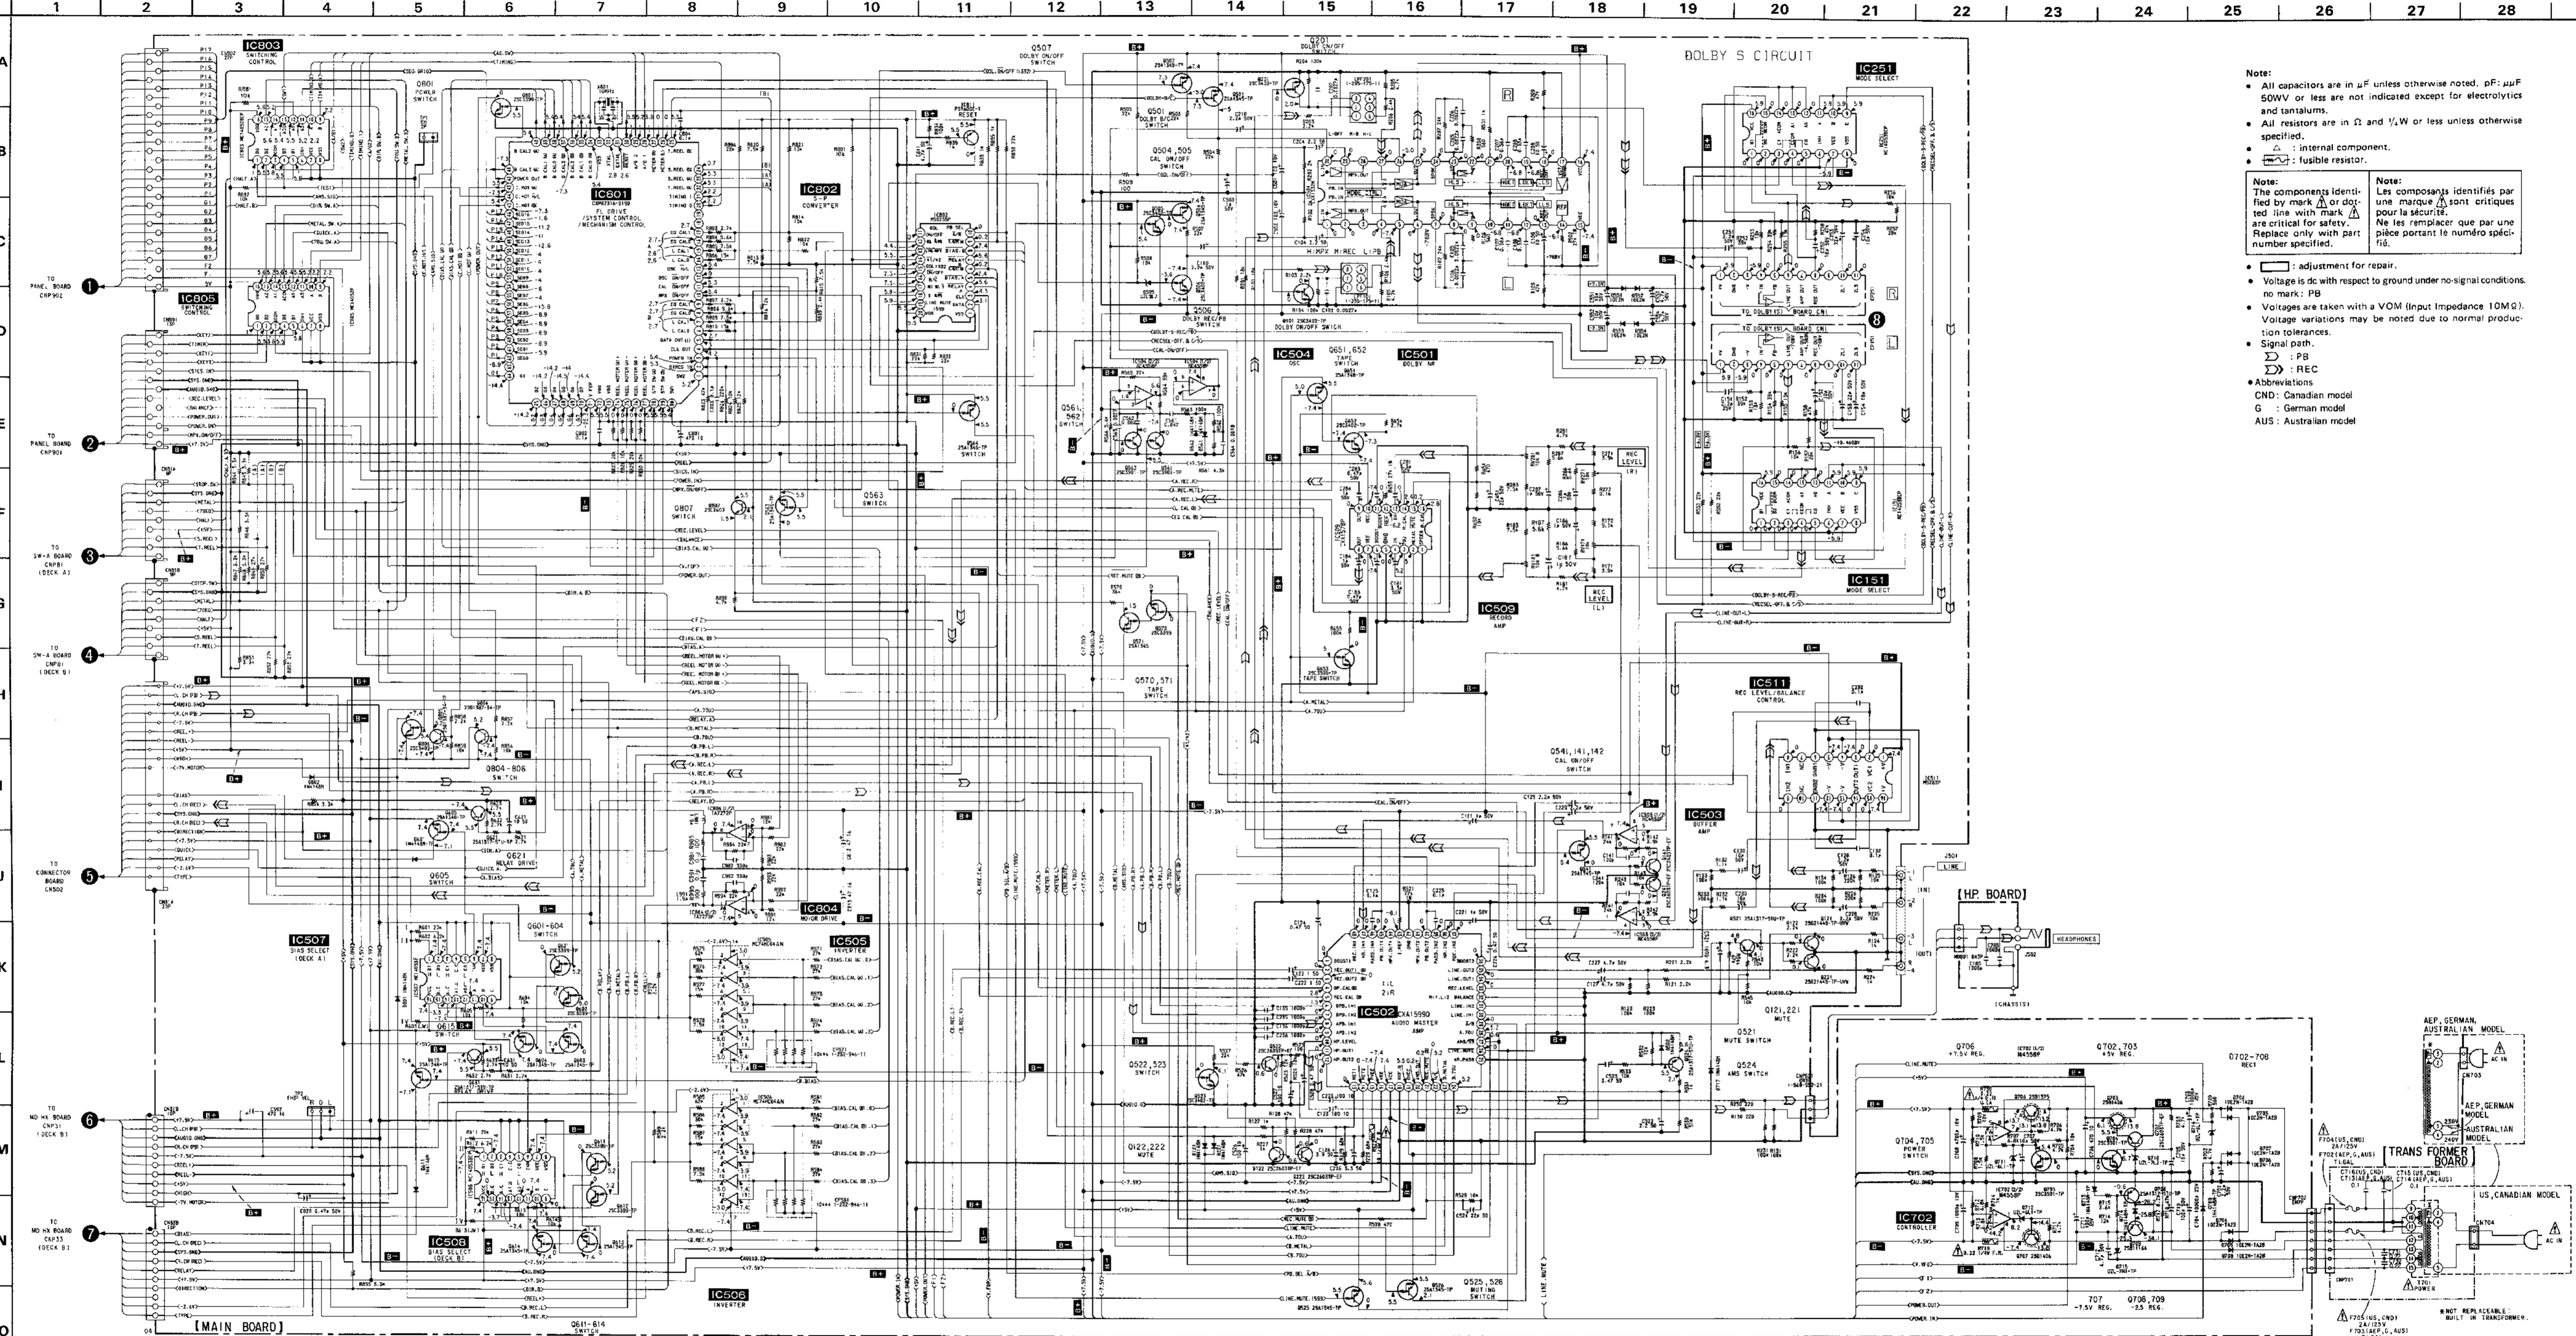

Note:

- All capacitors are in μF unless otherwise noted, pF : μF
- 50WV or less are not indicated except for electrolytics and tantalums.
- All resistors are in Ω and $\frac{1}{2}\text{W}$ or less unless otherwise specified.
- Δ : internal component.
- \square : fusible resistor.

Note:

The components identified by mark Δ or dotted line with mark Δ are critical for safety. Replace only with part number specified.

Note:

Les composants identifiés par une marque Δ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

\square : adjustment for repair.

Voltage is dc with respect to ground under no-signal conditions, no mark: PB

Voltages are taken with a VOM (Input Impedance 10M Ω). Voltage variations may be noted due to normal production tolerances.


Signal path:

- \square : PB
- \square : REC

Abbreviations

- CND: Canadian model
- G: German model
- AUS: Australian model


5-4. SCHEMATIC DIAGRAM —PANEL SECTION— • Refer to Page 28 for IC Block Diagrams.

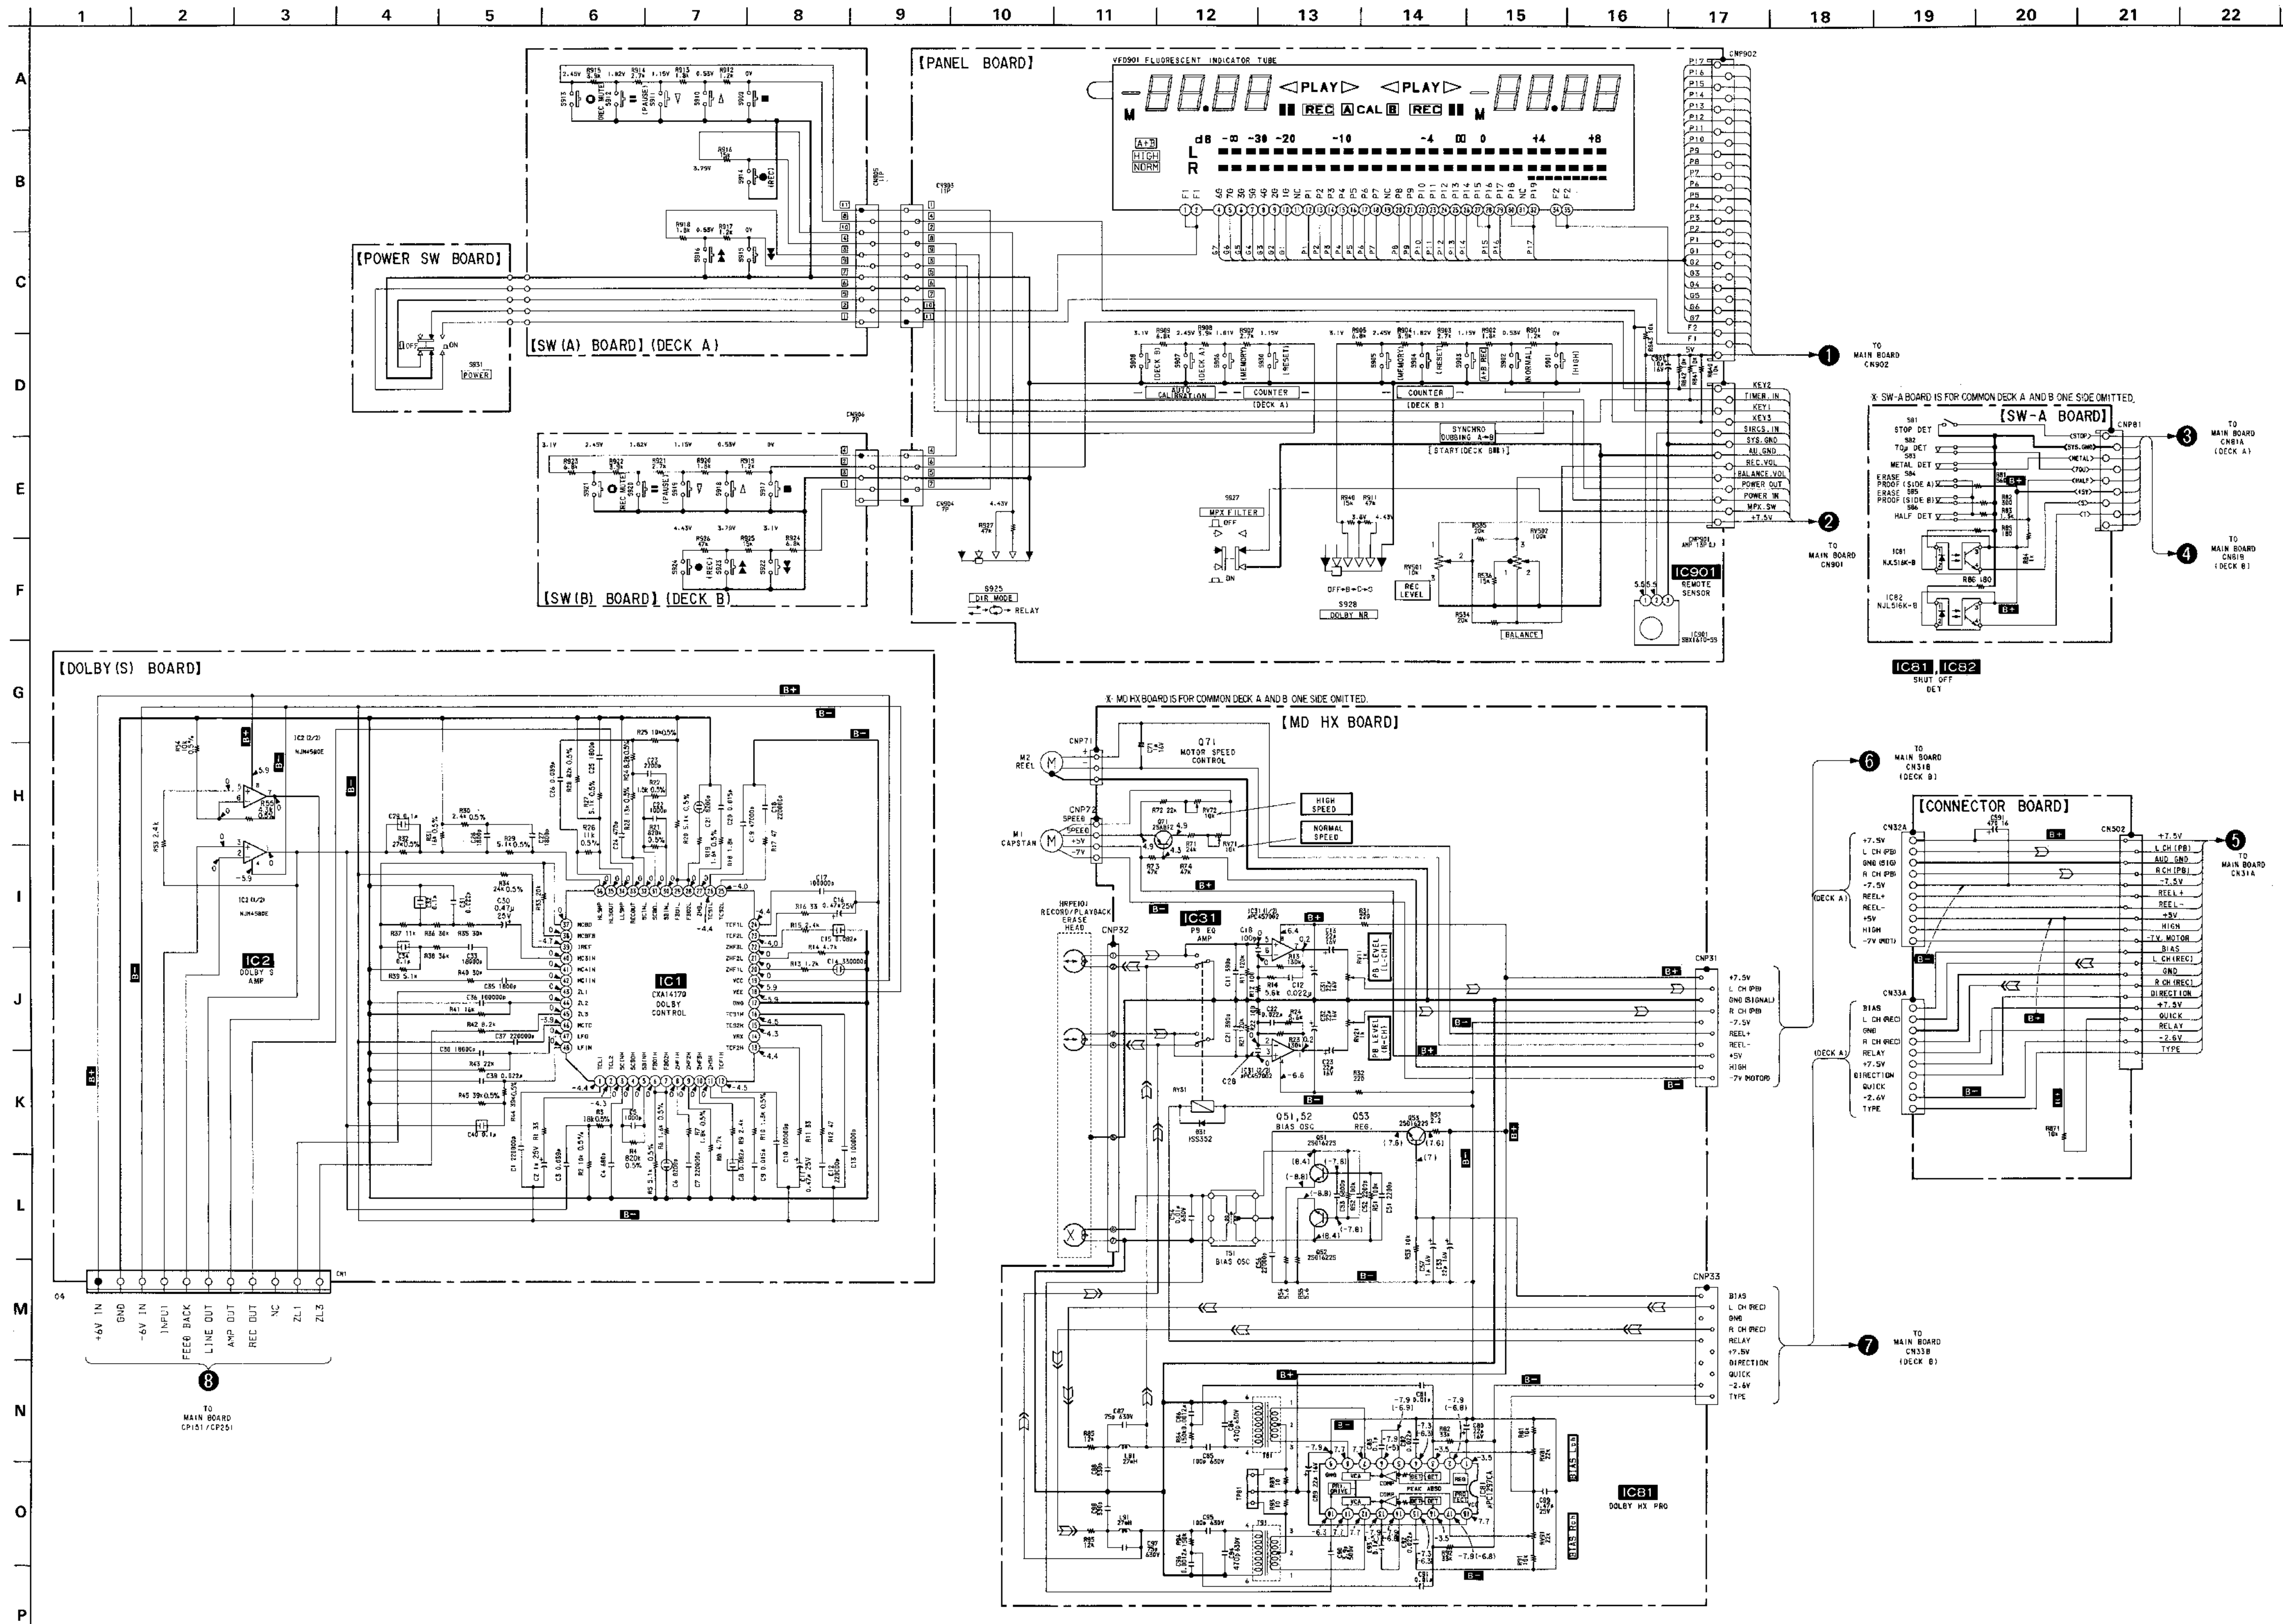

Note:


- All capacitors are in μF unless otherwise noted. pF: μF 50WV or less are not indicated except for electrolytics and tantalums.
- All resistors are in Ω and $\frac{1}{2}W$ or less unless otherwise specified.
- % : indicates tolerance.
- □ : adjustment for repair.
- Voltage is dc with respect to ground under no-signal conditions. no mark: PB (): REC
- Voltages are taken with a VOM (input impedance $10M\Omega$). Voltage variations may be noted due to normal production tolerances.
- Signal path: ○ : PB ○ : REC

5-5. PRINTED WIRING BOARDS —PANEL SECTION—

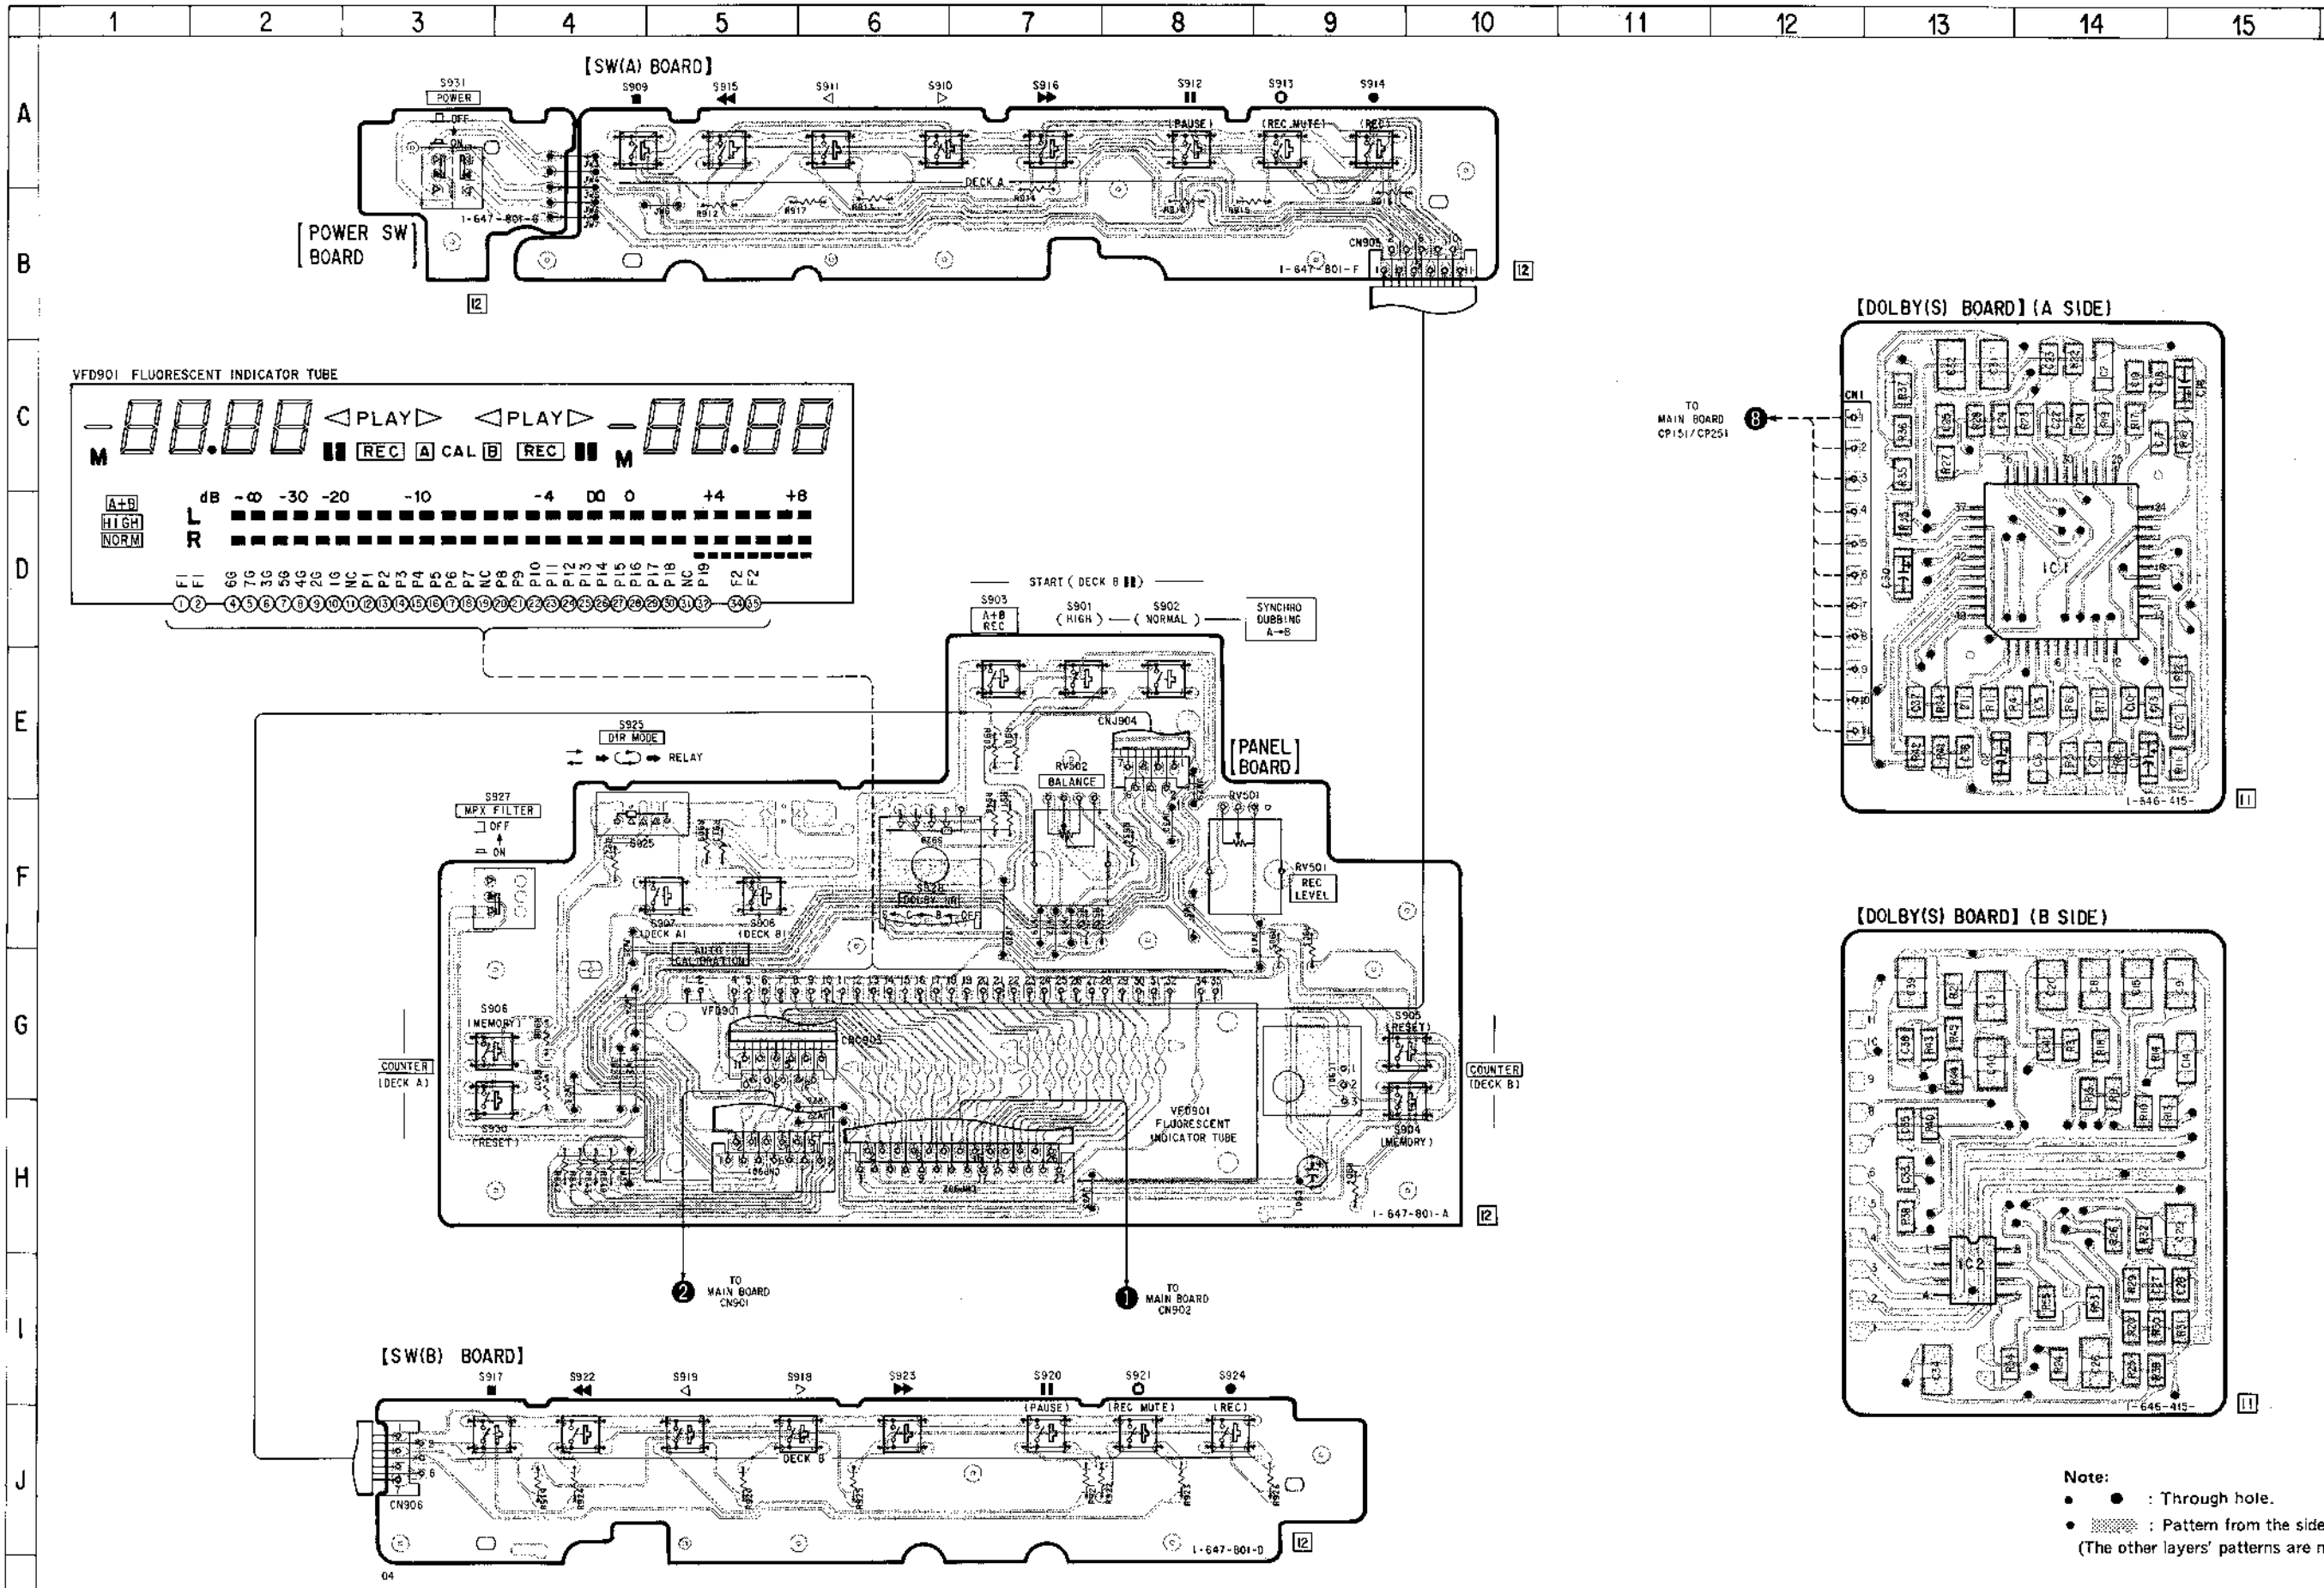


5-6. SEMICONDUCTOR LEAD LAYOUTS

CXA1332M




TOP VIEW

M5218AP




(Top view)

μ PC1297CA




(Top view)

2SB1116A-L
2SD1387-3




CXA1417Q
CXA1599Q




(TOP VIEW)

NJL5165K-B (H1)




μ PC4570G2




(TOP VIEW)

2SD1622-S




CXA1578P
HD140538FP
MC14052BCP
M5283P
UP14053BC



(TOP VIEW)

NJM4580E-D
 μ PC4558C




(TOP VIEW)


DTA114ES
DTA144ES
DTC114ES
DTC143TS
2SA1317-STU
2SC2603-EF
2SD2144S-UVW




HZS6A1L
HZS9A2L
UZL-7H1
UZL-7L2




MA110




CXP82316-019Q




(TOP VIEW)



SBX1610-59




SN74HC04N



(TOP VIEW)


DTC144ES




2SB1094-LK
2SD1406-YGR




1N4148M
10E2N



MC14052BF




M50255P




(Top view)

TA7272P




MARKING SIDE VIEW




2SA1162-G
2SA1235-F

• IC Block Diagrams


IC511 M5283P

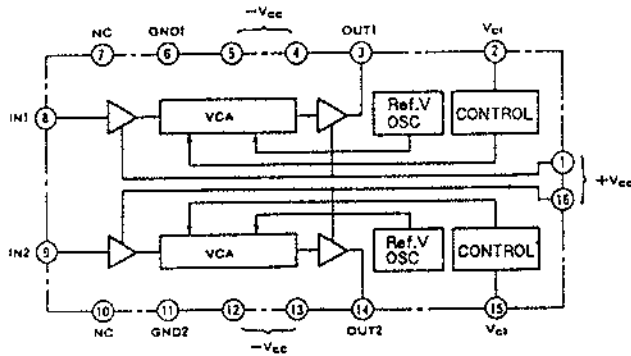


IC502 CXA1599Q

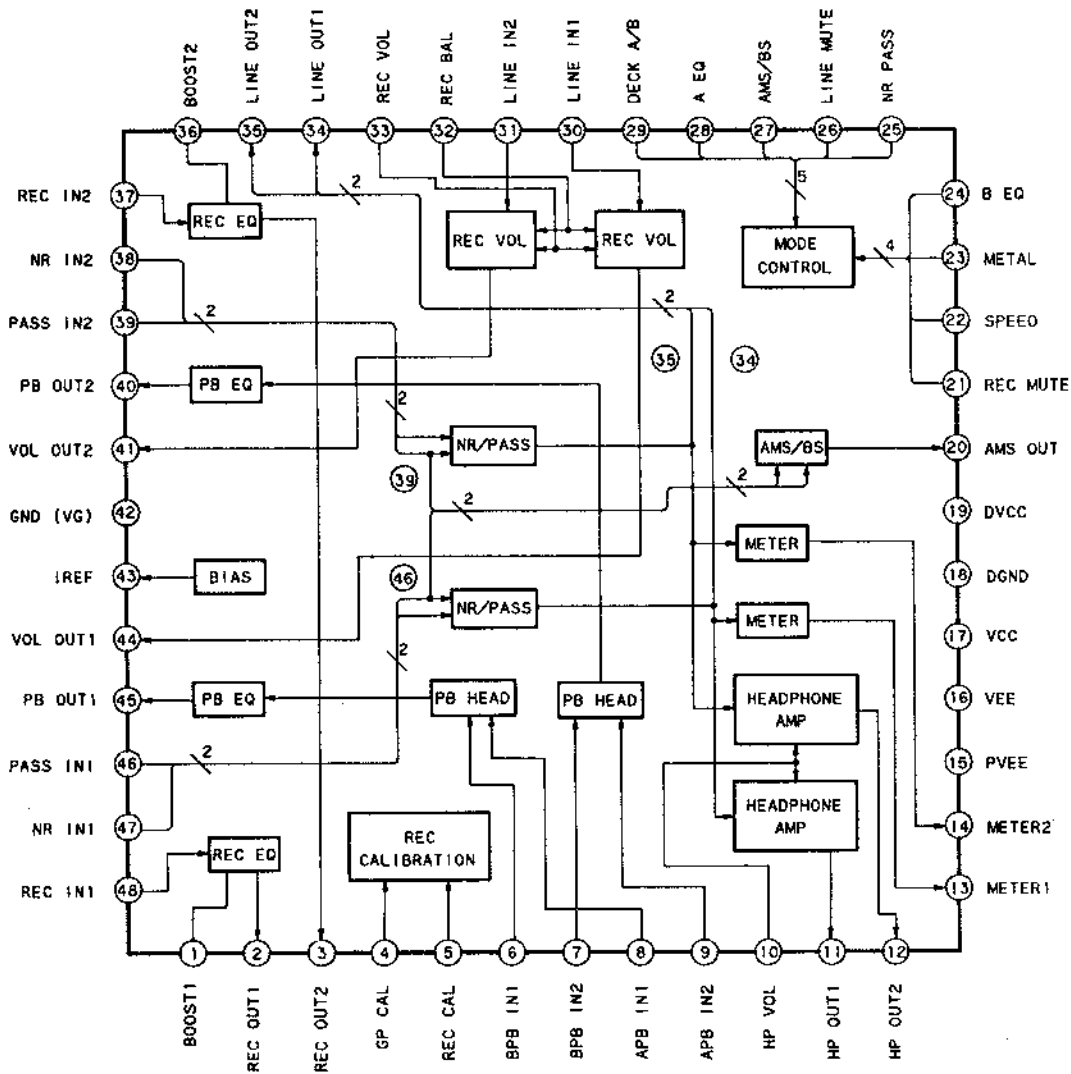


IC509 CXA1578P

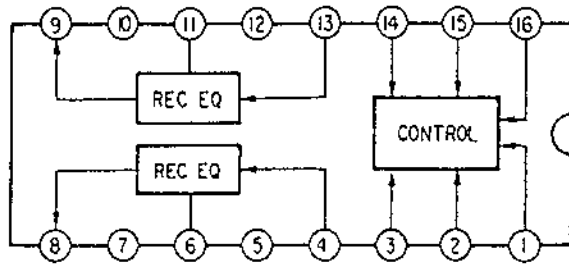

IC803, 805 MC14052BCP

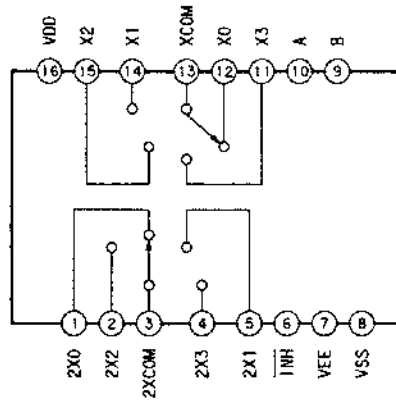

IC151, 251, 507, 508 MC14053BCP

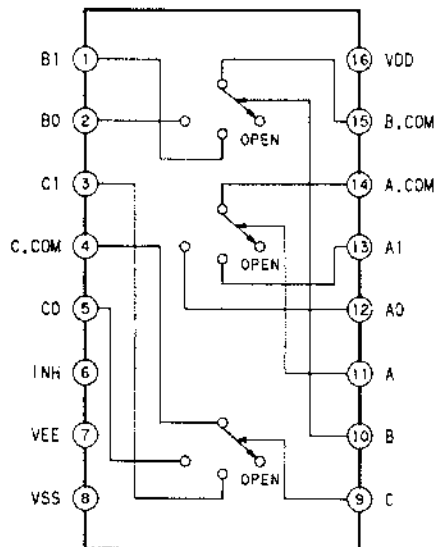

SECTION 6 EXPLODED VIEWS

NOTE:

- The mechanical parts with no reference number in the exploded views are not supplied.
- Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

- Abbreviations
G : German model
AUS : Australian model

- -XX and -X mean standardized parts, so they may have some difference from the original one.

- Color Indication of Appearance Parts
Example :
KNOB, BALANCE (WHITE)... (RED)


- Hardware (# mark) list is given in the last of this parts list.

The components identified by mark Δ or dotted line with mark Δ are critical for safety. Replace only with part number specified.

Les composants identifiés par une marque Δ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

6-1. CABINET SECTION

- ▲ B: TRANSFORMER board (US, Canadian model)
- ▲ C: TRANSFORMER board (AEP, G, AUS model)
- ▲ E: CONNECTOR board

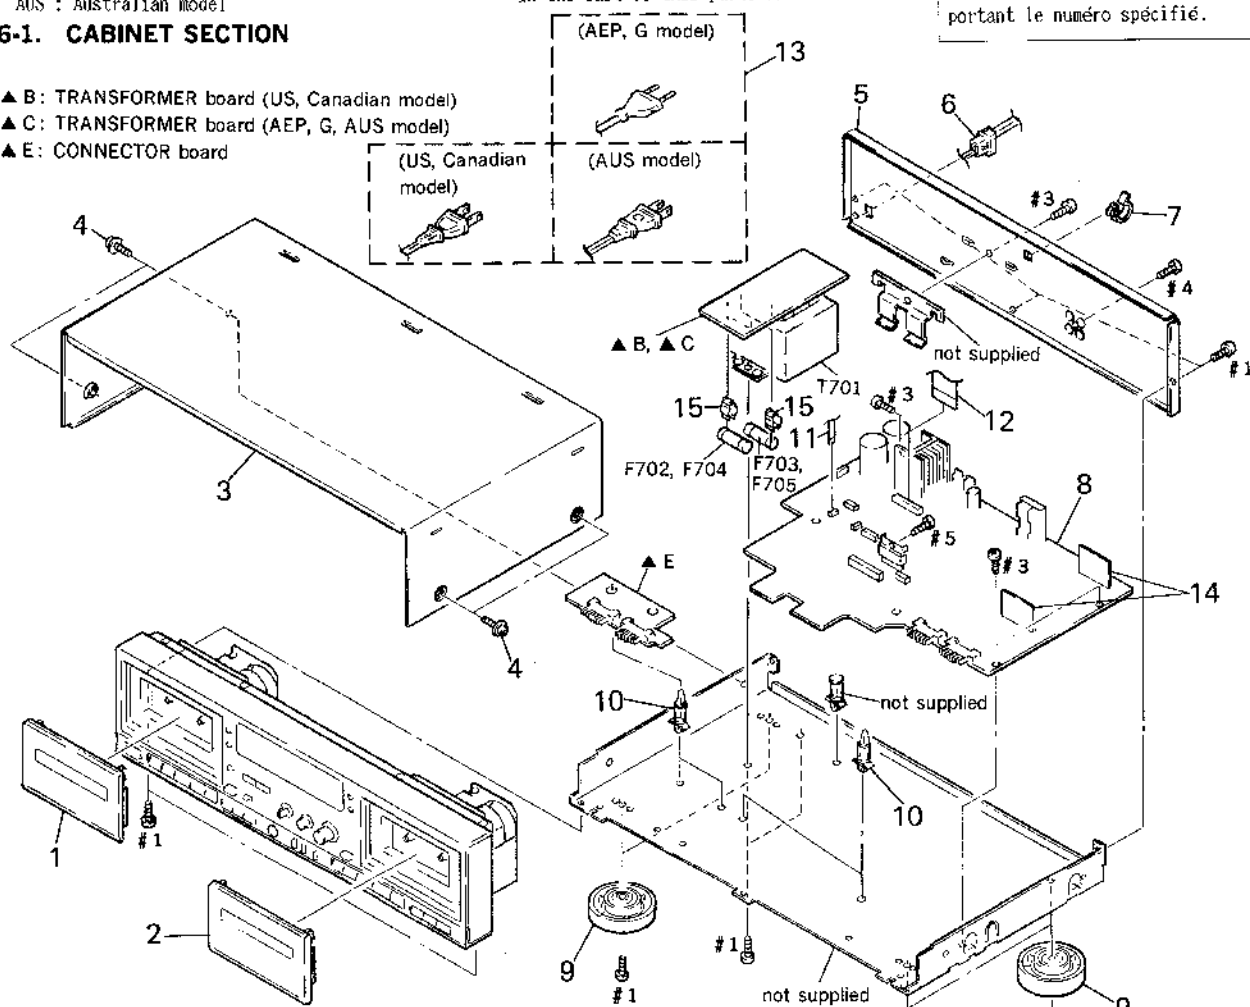


Ref. No.	Part No.	Description	Remark
1	X-3366-515-1	LID ASSY (A), CASSETTE (WR701ES)	
1	X-3366-517-1	LID ASSY (A), CASSETTE (WR735S)	
2	X-3366-516-1	LID ASSY (B), CASSETTE (WR701ES)	
2	X-3366-518-1	LID ASSY (B), CASSETTE (WR735S)	
* 3	4-929-294-42	CASE	
4	3-704-366-01	SCREW (CASE) (M3X8)	
* 5	3-387-824-01	PANEL, BACK (WR701ES)	
* 5	3-387-824-11	PANEL, BACK (WR735S:Canadian)	
* 5	3-387-824-21	PANEL, BACK (WR735S:AEP, G)	
* 5	3-387-824-31	PANEL, BACK (WR735S:AUS)	
* 6	3-703-244-00	BUSHING (2104), CORD (WR735S)	
* 6	3-703-571-11	BUSHING (S) (4516), CORD (WR701ES)	
* 7	4 949-235-01	HOOK (WR735S:Canadian, AEP, G, WR701ES)	
* 8	A-2007-028-A	MAIN BOARD, COMPLETE (WR735S:Canadian, WR701ES)	
* 8	A-2007-057-A	MAIN BOARD, COMPLETE (WR735S:AEP, G, AUS)	
9	4-943-148-32	FOOT (F58175SW) (WR735S:Canadian)	
9	4-943-148-42	FOOT (F58175SW) (WR735S:AEP, G, AUS, WR701ES)	

Ref. No.	Part No.	Description	Remark
* 10	3-346-265-11	HOLDER, PC BOARD	
11	1-575-730-11	WIRE, FLAT TYPE (5 CORE)	
12	1-590-217-11	WIRE, FLAT TYPE (20 CORE)	
Δ 13	1-558-945-21	CORD, POWER (POLAR SPT 1) (WR735S:Canadian, WR701ES)	
Δ 13	1-575-651-21	CORD, POWER (WR735S:AEP, G)	
Δ 13	1-696-845-11	CORD, POWER (WR735S:AUS)	
* 14	A-2006-954-A	DOLBY (S) BOARD, COMPLETE	
15	1-533-183-11	HOLDER, FUSE	
Δ F702	1-532-259-00	FUSE, TIME-LAG (T1.6A) (WR735S:AEP, G, AUS)	
Δ F703	1-532-259-00	FUSE, TIME-LAG (T1.6A) (WR735S:AEP, G, AUS)	
Δ F704	1-532-743-11	FUSE, GLASS TUBE (2A/125V) (WR735S:Canadian, WR701ES)	
Δ F705	1-532-743-11	FUSE, GLASS TUBE (2A/125V) (WR735S:Canadian, WR701ES)	
Δ T701	1-450-869-11	TRANSFORMER, POWER (WR735S:Canadian, WR701ES)	
Δ T701	1-450-870-11	TRANSFORMER, POWER (WR735S:AEP, G, AUS)	

6-2. FRONT PANEL SECTION

- ▲ A: PANEL board
- ▲ D: SW (B) board
- ▲ F: SW (A) board
- ▲ G: POWER SW board
- ▲ H: H. P. board

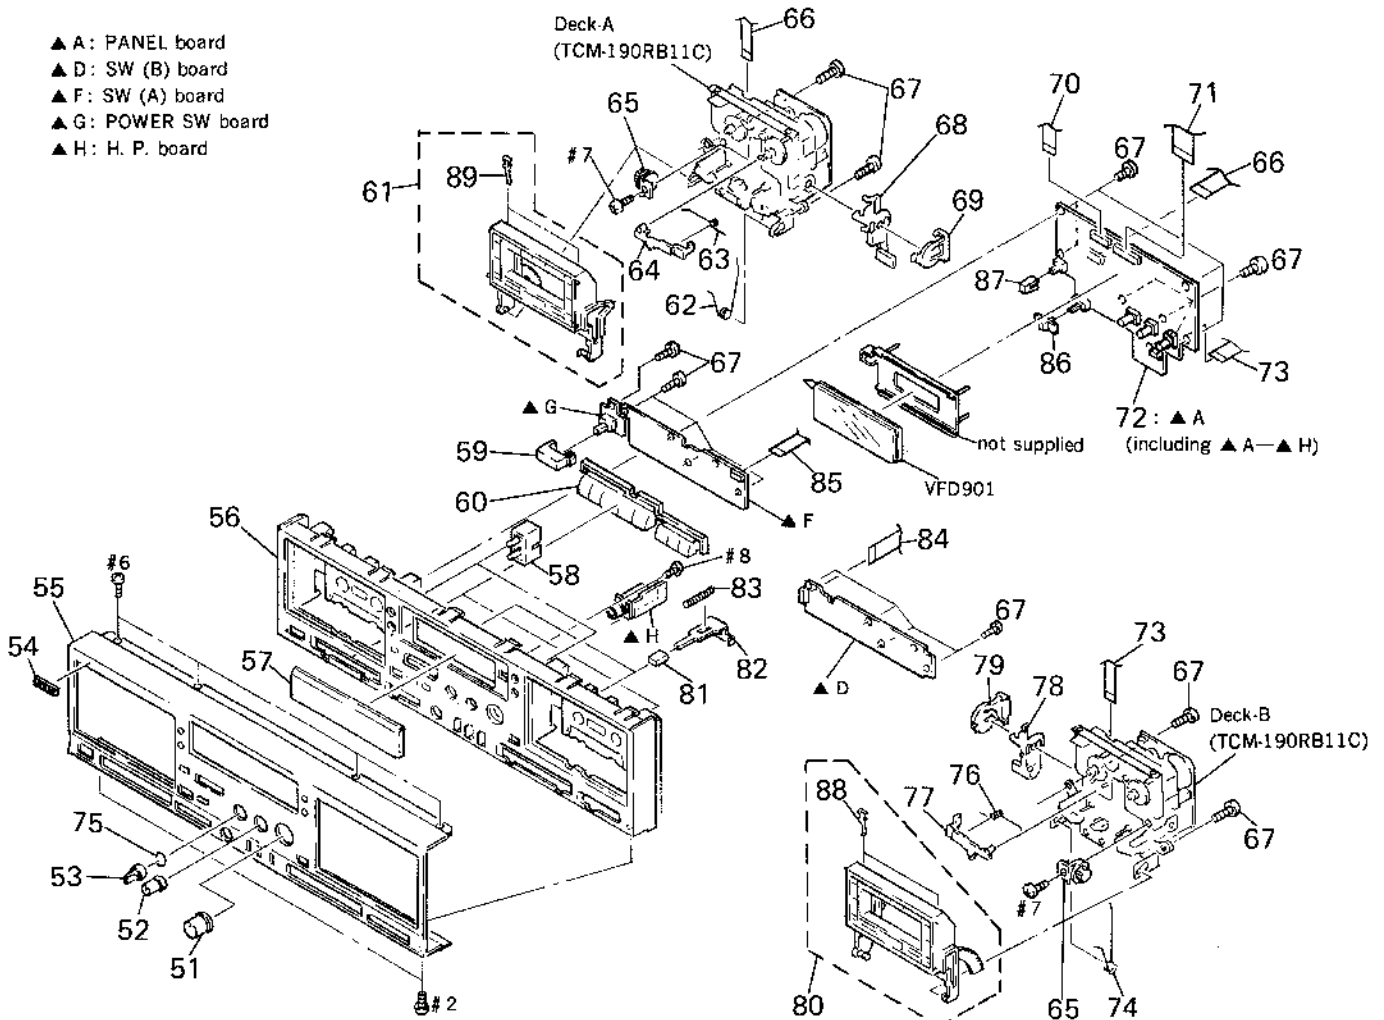


Ref. No.	Part No.	Description	Remark
51	3-377-334-01	KNOB (REC)	
52	3-367-431-01	KNOB (BAL)	
53	3-380-950-01	KNOB (VOL)	
54	4-942-568-01	EMBLEM (NO. 5), SONY	
55	3-387-820-11	PANEL, FRONT (WR735S:Canadian)	
56	3-387-820-21	PANEL, FRONT (WR735S:AEP, G, AUS)	
57	X-3356-923-1	PANEL (BASE) ASSY	
57	3-387-823-01	WINDOW (M) (WR735S:AEP, G, AUS)	
57	3-387-823-11	WINDOW (M) (WR735S:Canadian)	
58	3-377-329-11	BUTTON (COUNTER)	
59	3-354-932-01	BUTTON (POWER)	
60	3-387-825-01	BUTTON (CONTROL)	
61	X-3340-195-1	HOLDER (R) ASSY, CASSETTE	
62	3-354-960-01	SPRING (LOADING R), TORSION	
63	3-354-962-01	SPRING (EJ SAFETY SPRING R)	
64	3-354-956-01	LEVER (EJ SAFETY LEVER R)	
65	3-354-963-01	DAMPER	
66	1-575-905-11	WIRE, FLAT TYPE (9 CORE)	
67	4-951-620-01	SCREW (2.6X8), +BVTP	
* 68	3-354-954-01	LEVER (LOCK LEVER R)	
69	3-354-957-01	JOINT (LOCK LEVER)	
70	1-690-589-31	WIRE, FLAT TYPE (13 CORE)	
70	3-354-963-01	DAMPER	

Ref. No.	Part No.	Description	Remark
71	1-690-729-11	WIRE, FLAT TYPE (27 CORE)	
* 72	A-2007-029-A	PANEL BOARD, COMPLETE (WR735S:Canadian, WR701ES)	
* 72	A-2007-030-A	PANEL BOARD, COMPLETE (WR735S:AEP, G, AUS)	
73	1-575-905-11	WIRE, FLAT TYPE (9 CORE)	
74	3-354-959-01	SPRING (LOADING L), TORSION	
75	3-356-935-01	SPRING	
76	3-354-961-01	SPRING (EJ SAFETY SPRING L)	
77	3-354-955-01	LEVER (EJ SAFETY LEVER L)	
* 78	3-354-953-01	LEVER (LOCK LEVER L)	
79	3-354-957-01	JOINT (LOCK LEVER)	
80	X-3340-194-1	HOLDER (L) ASSY, CASSETTE	
81	3-377-328-01	BUTTON (EJECT)	
82	3-387-822-01	SLIDER (EJECT)	
83	3-382-382-01	SPRING, COMPRESSION	
84	1-590-241-11	WIRE, FLAT TYPE (7 CORE)	
85	1-590-241-11	WIRE, FLAT TYPE (11 CORE)	
86	4-922-518-01	KNOB (TIMER)	
87	3-380-952-01	BUTTON	
88	3-308-823-11	SPRING	
89	3-308-823-11	SPRING	

VFD901 1-517-162-11 INDICATOR TUBE, FLUORESCENT


**6-3. MECHANISM SECTION (1)
(DECK A, B: TCM-190RB11C)**

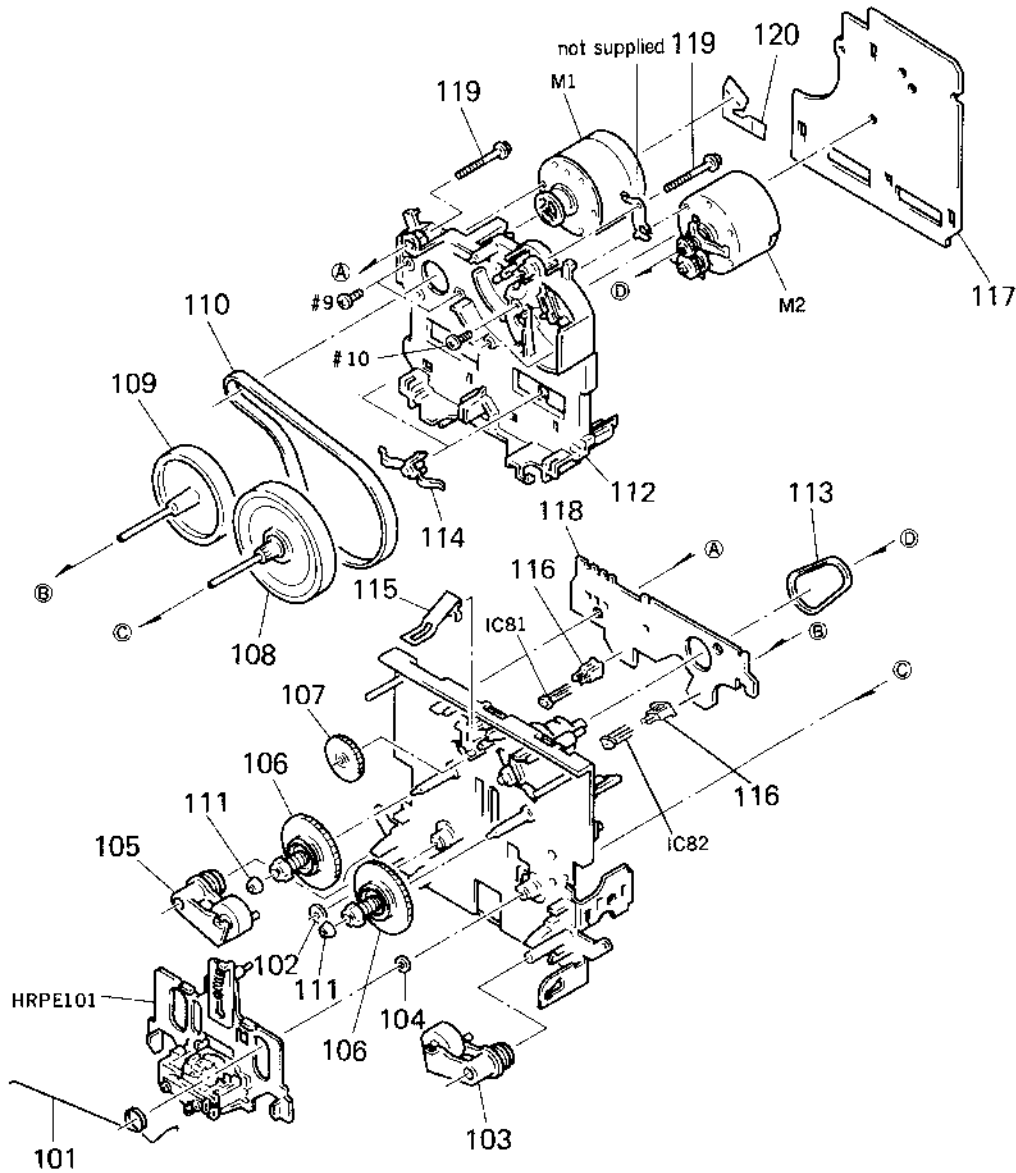

Ref. No.	Part No.	Description	Remark
101	3-359-455-01	SPRING, TORSION	
102	3-356-714-01	WASHER	
103	X-3359-408-1	LEVER (PINCH LEVER FWD) ASSY	
104	3-356-713-01	WASHER	
105	X-3359-409-1	LEVER (PINCH LEVER REV) ASSY	
106	X-3362-078-1	TABLE ASSY (B), REEL	
107	3-359-424-01	GEAR (REV GEAR)	
108	X-3359-406-1	FLYWHEEL (FWD) ASSY	
109	X-3359-410-1	FLYWHEEL (REV) ASSY	
110	3-359-417-01	BELT (FLAT), CAPSTAN	
111	3-362-308-01	CAP (REEL)	
* 112	3-359-436-01	BASE (THRUST RETAINER), FITTING	
113	3-359-466-01	BELT (FR), SQUARE	

Ref. No.	Part No.	Description	Remark
114	3-575-321-00	RETAINER, THRUST, CAPSTAN	
115	3-359-430-01	SPRING (CASSETTE RETAINER), LEAF	
116	3-343-419-01	HOLDER (S SENSOR A)	
* 117	A-2006-401-A	MD HX BOARD, COMPLETE	
118	1-634-841-14	SW-A BOARD	
119	3-359-414-01	SCREW (+PTPWH 2X23)	
120	1-638-983-11	MOTOR FLEXIBLE BOARD	
	HRPE101	A 2003 838-F DECK ASSY, HEAD (RECORD/PLAYBACK/ERASE)	
	IC81	8-719-710-03 PHOTO REFLECTOR NJL5165K-B (H1)	
	IC82	8-719-710-03 PHOTO REFLECTOR NJL5165K-B (H1)	
M1	X-3365-377-1	MOTOR (CAPSTAN) ASSY	
M2	X-3363-501-1	MOTOR (REEL) ASSY	

6-4. MECHANISM SECTION (2)
(DECK A, B: TCM-190RB11C)

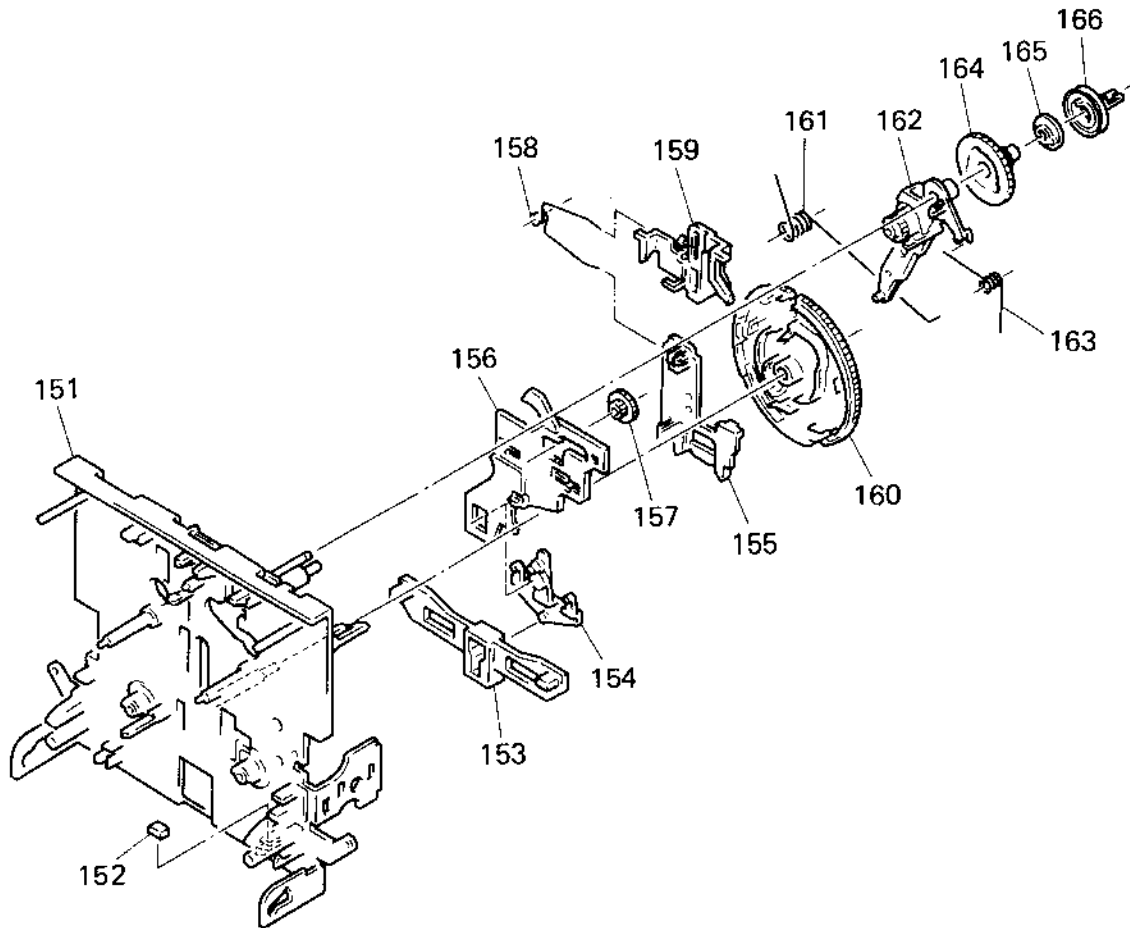

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
151	X-3359-415-1	CHASSIS ASSY, MECHANICAL		159	3-359-429-01	SLIDER (BRAKE PLATE)	
152	3-359-489-01	SPACER		160	3-359-420-01	GEAR (CAM GEAR)	
* 153	3-359-425-01	SLIDER (REVERSE SLIDER)		161	3-359-456-01	SPRING (TRIGGER SPRING), TORSION	
154	3-359-426-01	LEVER (REVERSE LEVER)		162	X-3359-405-1	LEVER (FR ARM) ASSY	
* 155	3-359-427-01	SLIDER (REVERSE SLIDER)		163	3-359-453-01	SPRING (FR ARM), TORSION	
* 156	3-359-415-01	SLIDER (TRIGGER SLIDER)		164	3 359-419-01	GEAR (FR GEAR)	
157	3-359 448-01	GEAR (TRIGGER)		165	3-359-421-01	CLUTCH (REEL DISK)	
158	3-359-454-01	SPRING, TORSION		166	3-359-418-01	PULLEY (FR PULLEY)	

DOLBY (S)

**SECTION 7
ELECTRICAL PARTS LIST**

NOTE:

- Due to standardization, replacements in the parts list may be different from the parts specified in the diagrams or the components used on the set.
- XX and -X mean standardized parts, so they may have some difference from the original one.
- RESISTORS
All resistors are in ohms.
METAL: Metal-film resistor.
METAL OXIDE: Metal oxide-film resistor.
F: nonflammable

- Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- SEMICONDUCTORS
In each case, u: μ , for example:
uA.: μ A. uPA.: μ PA..
uPB.: μ PB. uPC.: μ PC. uPD.: μ PD..
- CAPACITORS
uF: μ F
- COILS
uH: μ H

When indicating parts by reference number, please include the board.

The components identified by mark Δ or dotted line with mark Δ are critical for safety. Replace only with part number specified.

Les composants identifiés par une marque Δ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

- Abbreviations
G : German model
AUS : Australian model

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
*	A-2006-954-A	DOLBY (S) BOARD, COMPLETE *****		C36	1-165-319-11	CERAMIC CHIP	0.1uF 50V
		< CAPACITOR >		C37	1-164-222-11	CERAMIC CHIP	0.22uF 25V
C1	1-164-222-11	CERAMIC CHIP	0.22uF 25V	C38	1-163-024-00	CERAMIC CHIP	0.018uF 10% 50V
C2	1-135-177-21	TANTALUM CHIP	1uF 20% 20V	C39	1-104-555-11	FILM CHIP	0.022uF 5% 16V
C3	1-104-558-91	FILM CHIP	0.039uF 5% 16V	C40	1-104-563-11	FILM CHIP	0.1uF 5% 16V
C4	1-163-007-11	CERAMIC CHIP	680PF 10% 50V			< CONNECTOR >	
C5	1-163-009-11	CERAMIC CHIP	0.001uF 10% 50V	* CN1	1-537-473-11	TERMINAL (LEAD PIN)	
C6	1-164-717-11	CERAMIC CHIP	0.0082uF 5% 50V			< IC >	
C7	1-164-222-11	CERAMIC CHIP	0.22uF 25V	IC1	8-752-056-51	IC CXA1417Q	
C8	1-104-562-11	FILM CHIP	0.082uF 5% 16V	IC2	8-759-711-85	IC NJM4580E-D	
C9	1-104-553-11	FILM CHIP	0.015uF 5% 16V			< RESISTOR >	
C10	1-165-319-11	CERAMIC CHIP	0.1uF 50V	R1	1-216-013-00	METAL CHIP	33 5% 1/10W
C11	1-135-145-11	TANTALUM CHIP	0.47uF 10% 35V	R2	1-216-675-11	METAL CHIP	10K 0.5% 1/10W
C12	1-164-222-11	CERAMIC CHIP	0.22uF 25V	R3	1-216-681-11	METAL CHIP	18K 0.5% 1/10W
C13	1-165-319-11	CERAMIC CHIP	0.1uF 50V	R4	1-218-774-11	METAL CHIP	820K 0.50% 1/10W
C14	1-162-568-11	CERAMIC CHIP	0.33uF 10% 16V	R5	1-216-668-11	METAL CHIP	5.1K 0.5% 1/10W
C15	1-104-562-11	FILM CHIP	0.082uF 5% 16V	R6	1-216-656-11	METAL CHIP	1.6K 0.5% 1/10W
C16	1-135-145-11	TANTALUM CHIP	0.47uF 10% 35V	R7	1-216-657-11	METAL CHIP	1.8K 0.5% 1/10W
C17	1-165-319-11	CERAMIC CHIP	0.1uF 50V	R8	1-216-065-00	METAL CHIP	4.7K 5% 1/10W
C18	1-164-222-11	CERAMIC CHIP	0.22uF 25V	R9	1-216-058-00	METAL GLAZE	2.4K 5% 1/10W
C19	1-163-035-00	CERAMIC CHIP	0.047uF 50V	R10	1-216-654-11	METAL CHIP	1.3K 0.5% 1/10W
C20	1-104-553-11	FILM CHIP	0.015uF 5% 16V	R11	1-216-013-00	METAL CHIP	33 5% 1/10W
C21	1-164-717-11	CERAMIC CHIP	0.0082uF 5% 50V	R12	1-216-017-00	METAL CHIP	47 5% 1/10W
C22	1-163-009-11	CERAMIC CHIP	0.001uF 10% 50V	R13	1-216-051-00	METAL CHIP	1.2K 5% 1/10W
C23	1-164-161-11	CERAMIC CHIP	0.0022uF 10% 100V	R14	1-216-065-00	METAL CHIP	4.7K 5% 1/10W
C24	1-163-005-11	CERAMIC CHIP	470PF 10% 50V	R15	1-216-058-00	METAL GLAZE	2.4K 5% 1/10W
C25	1-163-012-00	CERAMIC CHIP	0.0018uF 10% 50V	R16	1-216-013-00	METAL CHIP	33 5% 1/10W
C26	1-104-558-91	FILM CHIP	0.039uF 5% 16V	R17	1-216-017-00	METAL CHIP	47 5% 1/10W
C27	1-163-012-00	CERAMIC CHIP	0.0018uF 10% 50V	R18	1-216-055-00	METAL CHIP	1.8K 5% 1/10W
C28	1-163-012-00	CERAMIC CHIP	0.0018uF 10% 50V	R19	1-216-656-11	METAL CHIP	1.6K 0.5% 1/10W
C29	1-104-563-11	FILM CHIP	0.1uF 5% 16V	R20	1-216-668-11	METAL CHIP	5.1K 0.5% 1/10W
C30	1-135-145-11	TANTALUM CHIP	0.47uF 10% 35V	R21	1-218-774-11	METAL CHIP	820K 0.50% 1/10W
C31	1-104-555-11	FILM CHIP	0.022uF 5% 16V	R22	1-216-655-11	METAL CHIP	1.5K 0.5% 1/10W
C32	1-104-563-11	FILM CHIP	0.1uF 5% 16V	R23	1-216-678-11	METAL CHIP	13K 0.5% 1/10W
C33	1-163-024-00	CERAMIC CHIP	0.018uF 10% 50V	R24	1-216-673-11	METAL CHIP	8.2K 0.5% 1/10W
C34	1-104-563-11	FILM CHIP	0.1uF 5% 16V	R25	1-216-675-11	METAL CHIP	10K 0.5% 1/10W
C35	1-163-012-00	CERAMIC CHIP	0.0018uF 10% 50V				

Ref. No.	Part No.	Description	Remark		
R26	1-216-676-11	METAL CHIP	11K	0.5%	1/10W
R27	1-216-668-11	METAL CHIP	5.1K	0.5%	1/10W
R28	1-216-697-11	METAL CHIP	82K	0.5%	1/10W
R29	1-216-668-11	METAL CHIP	5.1K	0.5%	1/10W
R30	1-216-660-11	METAL CHIP	2.4K	0.5%	1/10W
R31	1-216-680-11	METAL CHIP	16K	0.5%	1/10W
R32	1-216-685-11	METAL CHIP	27K	0.5%	1/10W
R33	1-216-080-00	METAL CHIP	20K	5%	1/10W
R34	1-216-684-11	METAL CHIP	24K	0.5%	1/10W
R35	1-216-084-00	METAL CHIP	30K	5%	1/10W
R36	1-216-084-00	METAL CHIP	30K	5%	1/10W
R37	1-216-074-00	METAL CHIP	11K	5%	1/10W
R38	1-216-086-00	METAL GLAZE	36K	5%	1/10W
R39	1-216-066-00	METAL CHIP	5.1K	5%	1/10W
R40	1-216-084-00	METAL CHIP	30K	5%	1/10W
R41	1-216-078-00	METAL GLAZE	16K	5%	1/10W
R42	1-216-071-00	METAL CHIP	8.2K	5%	1/10W
R43	1-216-081-00	METAL CHIP	22K	5%	1/10W
R44	1-216-689-11	METAL CHIP	39K	0.5%	1/10W
R45	1-216-689-11	METAL CHIP	39K	0.5%	1/10W
R53	1-216-058-00	METAL GLAZE	2.4K	5%	1/10W
R54	1-216-675-11	METAL CHIP	10K	0.5%	1/10W
R55	1-216-666-11	METAL CHIP	4.3K	0.5%	1/10W

*	A-2007-028-A	MAIN BOARD, COMPLETE (WR735S:Canadian, WR701ES)			
*	A-2007-057-A	MAIN BOARD, COMPLETE (WR735S:AEP, G, AUS) *****			
	7-685-646-79	SCREW +BVTP 3X8 TYPE2 IT-3			
	7-682-547-09	SCREW +BVTT 3X6 (S)			
		< CAPACITOR >			
C102	1-130-476-00	MYLAR	0.0027uF	5%	50V
C104	1-124-925-11	ELECT	2.2uF	20%	100V
C105	1-130-475-00	MYLAR	0.0022uF	5%	50V
C106	1-130-475-00	MYLAR	0.0022uF	5%	50V
C107	1-136-174-00	FILM	0.56uF	5%	50V
C108	1-136-171-00	FILM	0.33uF	5%	50V
C109	1-124-907-11	ELECT	10uF	20%	50V
C110	1-124-925-11	ELECT	2.2uF	20%	100V
C121	1-124-903-11	ELECT	1uF	20%	50V
C122	1-124-903-11	ELECT	1uF	20%	50V
C123	1-124-443-00	ELECT	100uF	20%	10V
C124	1-124-902-00	ELECT	0.47uF	20%	50V
C125	1-164-159-11	CERAMIC	0.1uF		50V
C126	1-123-382-00	ELECT	3.3uF	20%	100V
C127	1-124-927-11	ELECT	4.7uF	20%	100V
C128	1-124-925-11	ELECT	2.2uF	20%	100V

Ref. No.	Part No.	Description	Remark		
C129	1-124-925-11	ELECT	2.2uF	20%	100V
C130	1-124-907-11	ELECT	10uF	20%	50V
C132	1-164-159-11	CERAMIC	0.1uF		50V
C135	1-162-294-31	CERAMIC	0.001uF	10%	50V
C136	1-162-294-31	CERAMIC	0.001uF	10%	50V
C141	1-162-283-31	CERAMIC	120PF	10%	50V
C151	1-124-925-11	ELECT	2.2uF	20%	100V
C152	1-124-907-11	ELECT	10uF	20%	50V
C153	1-124-916-11	ELECT	22uF	20%	63V
C154	1-124-907-11	ELECT	10uF	20%	50V
C181	1-123-382-00	ELECT	3.3uF	20%	100V
C183	1-124-902-00	ELECT	0.47uF	20%	50V
C184	1-124-903-11	ELECT	1uF	20%	50V
C186	1-124-903-11	ELECT	1uF	20%	50V
C187	1-124-903-11	ELECT	1uF	20%	50V
C202	1-130-476-00	MYLAR	0.0027uF	5%	50V
C204	1-124-925-11	ELECT	2.2uF	20%	100V
C205	1-130-475-00	MYLAR	0.0022uF	5%	50V
C206	1-130-475-00	MYLAR	0.0022uF	5%	50V
C207	1-136-174-00	FILM	0.56uF	5%	50V
C208	1-136-171-00	FILM	0.33uF	5%	50V
C209	1-124-907-11	ELECT	10uF	20%	50V
C210	1-124-925-11	ELECT	2.2uF	20%	100V
C221	1-124-903-11	ELECT	1uF	20%	50V
C222	1-124-903-11	ELECT	1uF	20%	50V
C223	1-124-443-00	ELECT	100uF	20%	10V
C224	1-124-902-00	ELECT	0.47uF	20%	50V
C225	1-164-159-11	CERAMIC	0.1uF		50V
C226	1-123-382-00	ELECT	3.3uF	20%	100V
C227	1-124-927-11	ELECT	4.7uF	20%	100V
C228	1-124-925-11	ELECT	2.2uF	20%	100V
C229	1-124-925-11	ELECT	2.2uF	20%	100V
C230	1-124-907-11	ELECT	10uF	20%	50V
C232	1-164-159-11	CERAMIC	0.1uF		50V
C235	1-162-294-31	CERAMIC	0.001uF	10%	50V
C236	1-162-294-31	CERAMIC	0.001uF	10%	50V
C241	1-162-283-31	CERAMIC	120PF	10%	50V
C251	1-124-925-11	ELECT	2.2uF	20%	100V
C252	1-124-907-11	ELECT	10uF	20%	50V
C253	1-124-916-11	ELECT	22uF	20%	63V
C254	1-124-907-11	ELECT	10uF	20%	50V
C281	1-123-382-00	ELECT	3.3uF	20%	100V
C283	1-124-902-00	ELECT	0.47uF	20%	50V
C284	1-124-903-11	ELECT	1uF	20%	50V
C286	1-124-903-11	ELECT	1uF	20%	50V
C287	1-124-903-11	ELECT	1uF	20%	50V
C501	1-124-443-00	ELECT	100uF	20%	10V
C502	1-124-443-00	ELECT	100uF	20%	10V
C503	1-124-903-11	ELECT	1uF	20%	50V

MAIN

Ref. No.	Part No.	Description	Remark
C521	1-126-916-11	ELECT	1000uF 20% 6.3V
C522	1-124-925-11	ELECT	2.2uF 20% 100V
C523	1-124-902-00	ELECT	0.47uF 20% 50V
C524	1-124-916-11	ELECT	22uF 20% 63V
C526	1-124-443-00	ELECT	100uF 20% 10V
C527	1-124-443-00	ELECT	100uF 20% 10V
C528	1-124-902-00	ELECT	0.47uF 20% 50V
C551	1-124-907-11	ELECT	10uF 20% 50V
C552	1-124-907-11	ELECT	10uF 20% 50V
C553	1-124-927-11	ELECT	4.7uF 20% 100V
C554	1-124-927-11	ELECT	4.7uF 20% 100V
C561	1-136-161-00	FILM	0.047uF 5% 50V
C562	1-136-164-00	FILM	0.082uF 5% 50V
C563	1-130-476-00	MYLAR	0.0027uF 5% 50V
C564	1-130-474-00	MYLAR	0.0018uF 5% 50V
C592	1-126-103-11	ELECT	470uF 20% 16V
C621	1-124-907-11	ELECT	10uF 20% 50V
C631	1-124-907-11	ELECT	10uF 20% 50V
C651	1-124-916-11	ELECT	22uF 20% 63V
C702	1-124-925-11	ELECT	2.2uF 20% 100V
C703	1-124-772-11	ELECT	10000uF 20% 25V
C704	1-124-772-11	ELECT	10000uF 20% 25V
C705	1-124-907-11	ELECT	10uF 20% 50V
C706	1-124-472-11	ELECT	470uF 20% 10V
C707	1-124-907-11	ELECT	10uF 20% 50V
C708	1-126-929-11	ELECT	4700uF 20% 10V
C709	1-126-926-11	ELECT	1000uF 20% 10V
C710	1-124-122-11	ELECT	100uF 20% 50V
C711	1-124-122-11	ELECT	100uF 20% 50V
C712	1-124-927-11	ELECT	4.7uF 20% 100V
C801	1-124-472-11	ELECT	470uF 20% 10V
C802-804	1-164-159-11	CERAMIC	0.1uF 50V
C811	1-124-927-11	ELECT	4.7uF 20% 100V
C812	1-124-477-11	ELECT	47uF 20% 25V
C813	1-124-477-11	ELECT	47uF 20% 25V
C820	1-124-902-00	ELECT	0.47uF 20% 50V
C981	1-164-159-11	CERAMIC	0.1uF 50V
C982	1-162-288-31	CERAMIC	330PF 10% 50V
C991	1-164-159-11	CERAMIC	0.1uF 50V
C992	1-162-288-31	CERAMIC	330PF 10% 50V
< CONNECTOR >			
CN31A	1-750-425-11	CONNECTOR, FFC/FPC 20P	
* CN31B	1-580-784-11	CONNECTOR, BOARD TO BOARD	
* CN33B	1-580-784-11	CONNECTOR, BOARD TO BOARD	
CN81A	1-750-414-11	CONNECTOR, FFC/FPC 9P	
CN81B	1-750-414-11	CONNECTOR, FFC/FPC 9P	
CN901	1-750-418-11	CONNECTOR, FFC/FPC 13P	

Ref. No.	Part No.	Description	Remark
CN902	1-750-432-11	CONNECTOR, FFC/FPC 27P	
CN903	1-750-410-11	CONNECTOR, FFC/FPC 5P	
CN904	1-750-410-11	CONNECTOR, FFC/FPC 5P	
CNP521	1-506-468-11	PIN, CONNECTOR 3P	
CNP702	1-564-510-11	PLUG, CONNECTOR 7P	
< COMPOSITION CIRCUIT BLOCK >			
CP571	1-232-946-11	COMPOSITION CIRCUIT BLOCK	
CP581	1-232-946-11	COMPOSITION CIRCUIT BLOCK	
< DIODE >			
D121	8-719-987-63	DIODE 1N4148M	
D221	8-719-987-63	DIODE 1N4148M	
D502	8-719-987-63	DIODE 1N4148M	
D505	8-719-933-54	DIODE HZS9A2L	
D551-554	8-719-200-77	DIODE 10E2N	
D561	8-719-987-63	DIODE 1N4148M	
D562	8-719-987-63	DIODE 1N4148M	
D601	8-719-987-63	DIODE 1N4148M	
D611	8-719-987-63	DIODE 1N4148M	
D702-708	8-719-200-77	DIODE 10E2N	
D709	8-719-987-63	DIODE 1N4148M	
D710	8-719-000-78	DIODE UZL-7L2	
D711	8-719-933-33	DIODE HZS6A1L	
D712	8-719-933-33	DIODE HZS6A1L	
D713	8-719-987-63	DIODE 1N4148M	
D714	8-719-987-63	DIODE 1N4148M	
D715	8-719-000-93	DIODE UZL-7H1	
D716	8-719-933-33	DIODE HZS6A1L	
D717	8-719-987-63	DIODE 1N4148M	
D801	8-719-987-63	DIODE 1N4148M	
D802	8-719-987-63	DIODE 1N4148M	
< IC >			
IC151	8-759-140-53	IC UP140538C	
IC251	8-759-140-53	IC UP140538C	
IC501	8-752-055-10	IC CXA1332M	
IC502	8-752-058-57	IC CXA1599Q	
IC503	8-759-145-58	IC uPC4558C	
IC504	8-759-145-58	IC uPC4558C	
IC505	8-759-916-14	IC SN74HC04N	
IC506	8-759-916-14	IC SN74HC04N	
IC507	8-759-300-71	IC HD149538FP	
IC508	8-759-140-53	IC UP140538C	
IC509	8-752-055-61	IC CXA1578P	
IC511	8-759-635-26	IC M5283P	
IC702	8-759-634-51	IC M5218AP	

Ref. No.	Part No.	Description	Remark
IC801	8-752-841-99	IC CXP82316-019Q	
IC802	8-759-634-84	IC MS0255P	
IC803	8-759-000-48	IC MC140528CP	
IC804	8-759-207-05	IC TA7272P	
IC805	8-759-009-06	IC MC14052BF	
IC811	8-759-165 82	IC PST600E-T	
		< JACK >	
J501	1-565-258-11	JACK, PIN 4P (LINE)	
		< COIL >	
* L981	1-420-872-00	COIL, AIR CORE	
* L991	1-420-872-00	COIL, AIR CORE	
		< FILTER >	
LPF101	1-231-388-00	FILTER, LOW PASS	
LPF201	1-231-388-00	FILTER, LOW PASS	
		< TRANSISTOR >	
Q101	8-729-900-80	TRANSISTOR DTC114ES	
Q121	8-729-922-37	TRANSISTOR 2SD2144S-UVW	
Q122	8-729-620-05	TRANSISTOR 2SC2603-EF	
Q141	8-729-620-05	TRANSISTOR 2SC2603-EF	
Q201	8-729-900-80	TRANSISTOR DTC114ES	
Q221	8-729-922-37	TRANSISTOR 2SD2144S-UVW	
Q222	8-729-620-05	TRANSISTOR 2SC2603-EF	
Q241	8-729-620-05	TRANSISTOR 2SC2603-EF	
Q501	8-729-900-65	TRANSISTOR DTA144ES	
Q504	8-729-900-65	TRANSISTOR DTA144ES	
Q505	8-729-900-80	TRANSISTOR DTC114ES	
Q506	8-729-900-80	TRANSISTOR DTC114ES	
Q507	8-729-900-65	TRANSISTOR DTA144ES	
Q521	8-729-821-04	TRANSISTOR 2SA1317-STU	
Q522	8-729-620-05	TRANSISTOR 2SC2603-EF	
Q523	8-729-900 80	TRANSISTOR DTC114ES	
Q524	8-729-821-04	TRANSISTOR 2SA1317-STU	
Q525	8-729-900-65	TRANSISTOR DTA144ES	
Q526	8-729-900-65	TRANSISTOR DTA144ES	
Q541	8-729-900-65	TRANSISTOR DTA144ES	
Q561	8-729-900-74	TRANSISTOR DTC143TS	
Q562	8-729-900-74	TRANSISTOR DTC143TS	
Q563	8-729-900-65	TRANSISTOR DTA144ES	
Q564	8-729-900-65	TRANSISTOR DTA144ES	
Q570	8-729 900-89	TRANSISTOR DTC144ES	
Q571	8-729-900-65	TRANSISTOR DTA144ES	
Q601	8-729-900-89	TRANSISTOR DTC144ES	
Q602	8-729-900-89	TRANSISTOR DTC144ES	
Q603	8-729-900-65	TRANSISTOR DTA144ES	

Ref. No.	Part No.	Description	Remark
Q604	8-729-900-65	TRANSISTOR DTA144ES	
Q605	8-729-900-61	TRANSISTOR DTA114ES	
Q611	8-729-900-89	TRANSISTOR DTC144ES	
Q612	8-729-900-89	TRANSISTOR DTC144ES	
Q613	8-729-900-65	TRANSISTOR DTA144ES	
Q614	8-729-900-65	TRANSISTOR DTA144ES	
Q615	8-729-900-61	TRANSISTOR DTA114ES	
Q621	8-729-821-04	TRANSISTOR 2SA1317-STU	
Q631	8-729-821-04	TRANSISTOR 2SA1317-STU	
Q651	8-729-900-61	TRANSISTOR DTA114ES	
Q652	8-729-900-80	TRANSISTOR DTC114ES	
Q653	8-729-900-89	TRANSISTOR DTC144ES	
Q702	8-729-620-05	TRANSISTOR 2SC2603-EF	
Q703	8-729-231-60	TRANSISTOR 2SD1406-YGR	
Q704	8-729-900-74	TRANSISTOR DTC143TS	
Q705	8-729-900-74	TRANSISTOR DTC143TS	
Q706	8-729-141-83	TRANSISTOR 2SB1094-LK	
Q707	8-729-231-60	TRANSISTOR 2SD1406-YGR	
Q708	8-729-821-04	TRANSISTOR 2SA1317-STU	
Q709	8-729-140-04	TRANSISTOR 2SB1116A-L	
Q801	8-729-900-89	TRANSISTOR DTC144ES	
Q804	8-729-801-93	TRANSISTOR 2SD1387-3	
Q805	8-729-801-93	TRANSISTOR 2SD1387-3	
Q806	8-729-900-80	TRANSISTOR DTC114ES	
Q807	8-729-620 05	TRANSISTOR 2SC2603-EF	
		< RESISTOR >	
R101	1-249-461-11	CARBON 18K 5% 1/4W	
R102	1-247-838-00	CARBON 2K 5% 1/4W	
R103	1-249-421-11	CARBON 2.2K 5% 1/4W	
R104	1-249-441-11	CARBON 100K 5% 1/4W	
R105	1-249-425-11	CARBON 4.7K 5% 1/4W	
R106	1-247-840-00	CARBON 2.4K 5% 1/4W	
R107	1-247-864-11	CARBON 24K 5% 1/4W	
R108	1-249-414-11	CARBON 560 5% 1/4W	
R109	1-249-437-11	CARBON 47K 5% 1/4W	
R121	1-249-421-11	CARBON 2.2K 5% 1/4W	
R122	1-249-421-11	CARBON 2.2K 5% 1/4W	
R123	1-249-441-11	CARBON 100K 5% 1/4W	
R124	1-247-713-11	CARBON 1K 5% 1/4W	
R125	1-249-429-11	CARBON 10K 5% 1/4W	
R126	1-247-887-00	CARBON 220K 5% 1/4W	
R127	1-247-713-11	CARBON 1K 5% 1/4W	
R128	1-249-437-11	CARBON 47K 5% 1/4W	
R129	1-249-439-11	CARBON 68K 5% 1/4W	
R130	1-249-409-11	CARBON 220 5% 1/4W	
R131	1-249-441-11	CARBON 100K 5% 1/4W	
R132	1-247 832-11	CARBON 1.1K 5% 1/4W	
R133	1-249-441-11	CARBON 100K 5% 1/4W	

MAIN

Ref. No.	Part No.	Description	Remark
R134	1-249-441-11	CARBON	100K 5% 1/4W
R141	1-247-864-11	CARBON	24K 5% 1/4W
R142	1-249-424-11	CARBON	3.9K 5% 1/4W
R143	1-249-429-11	CARBON	10K 5% 1/4W
R152	1-249-436-11	CARBON	39K 5% 1/4W
R153	1-247-858-11	CARBON	13K 5% 1/4W
R154	1-249-436-11	CARBON	39K 5% 1/4W
R155	1-247-858-11	CARBON	13K 5% 1/4W
R156	1-249-429-11	CARBON	10K 5% 1/4W
R157	1-247-862-11	CARBON	20K 5% 1/4W
R158	1-249-437-11	CARBON	47K 5% 1/4W
R171	1-249-424-11	CARBON	3.9K 5% 1/4W
R172	1-247-854-11	CARBON	9.1K 5% 1/4W
R181	1-249-425-11	CARBON	4.7K 5% 1/4W
R183	1-247-852-11	CARBON	7.5K 5% 1/4W
R186	1-249-426-11	CARBON	5.6K 5% 1/4W
R187	1-249-426-11	CARBON	5.6K 5% 1/4W
R201	1-249-461-11	CARBON	18K 5% 1/4W
R202	1-247-838-00	CARBON	2K 5% 1/4W
R203	1-249-421-11	CARBON	2.2K 5% 1/4W
R204	1-249-441-11	CARBON	100K 5% 1/4W
R205	1-249-425-11	CARBON	4.7K 5% 1/4W
R206	1-247-840-00	CARBON	2.4K 5% 1/4W
R207	1-247-864-11	CARBON	24K 5% 1/4W
R208	1-249-414-11	CARBON	560 5% 1/4W
R209	1-249-437-11	CARBON	47K 5% 1/4W
R221	1-249-421-11	CARBON	2.2K 5% 1/4W
R222	1-249-421-11	CARBON	2.2K 5% 1/4W
R223	1-249-441-11	CARBON	100K 5% 1/4W
R224	1-247-713-11	CARBON	1K 5% 1/4W
R225	1-249-429-11	CARBON	10K 5% 1/4W
R226	1-247-887-00	CARBON	220K 5% 1/4W
R227	1-247-713-11	CARBON	1K 5% 1/4W
R228	1-249-437-11	CARBON	47K 5% 1/4W
R229	1-249-439-11	CARBON	68K 5% 1/4W
R230	1-249-409-11	CARBON	220 5% 1/4W
R231	1-249-441-11	CARBON	100K 5% 1/4W
R232	1-247-832-11	CARBON	1.1K 5% 1/4W
R233	1-249-441-11	CARBON	100K 5% 1/4W
R234	1-249-441-11	CARBON	100K 5% 1/4W
R241	1-247-864-11	CARBON	24K 5% 1/4W
R242	1-249-424-11	CARBON	3.9K 5% 1/4W
R243	1-249-429-11	CARBON	10K 5% 1/4W
R252	1-249-436-11	CARBON	39K 5% 1/4W
R253	1-247-858-11	CARBON	13K 5% 1/4W
R254	1-249-436-11	CARBON	39K 5% 1/4W
R255	1-247-858-11	CARBON	13K 5% 1/4W
R256	1-249-429-11	CARBON	10K 5% 1/4W
R257	1-247-862-11	CARBON	20K 5% 1/4W

Ref. No.	Part No.	Description	Remark
R258	1-249-437-11	CARBON	47K 5% 1/4W
R271	1-249-424-11	CARBON	3.9K 5% 1/4W
R272	1-247-854-11	CARBON	9.1K 5% 1/4W
R281	1-249-425-11	CARBON	4.7K 5% 1/4W
R283	1-247-852-11	CARBON	7.5K 5% 1/4W
R286	1-249-426-11	CARBON	5.6K 5% 1/4W
R287	1-249-426-11	CARBON	5.6K 5% 1/4W
R501	1-249-417-11	CARBON	1K 5% 1/4W
R502	1-215-455-00	METAL	27K 1% 1/6W
R503-505	1-249-433-11	CARBON	22K 5% 1/4W
R507	1-249-433-11	CARBON	22K 5% 1/4W
R508	1-249-429-11	CARBON	10K 5% 1/4W
R509	1-249-405-11	CARBON	100 5% 1/4W
R521	1-215-455-00	METAL	27K 1% 1/6W
R522	1-212-863-00	FUSIBLE	18 5% 1/4W
R523	1-249-430-11	CARBON	12K 5% 1/4W
R524	1-249-432-11	CARBON	18K 5% 1/4W
R525	1-249-405-11	CARBON	100 5% 1/4W
R526	1-249-437-11	CARBON	47K 5% 1/4W
R527	1-249-433-11	CARBON	22K 5% 1/4W
R528	1-249-413-11	CARBON	470 5% 1/4W
R529	1-249-429-11	CARBON	10K 5% 1/4W
R530	1-247-872-11	CARBON	51K 5% 1/4W
R531	1-249-417-11	CARBON	1K 5% 1/4W
R532	1-249-429-11	CARBON	10K 5% 1/4W
R533	1-249-429-11	CARBON	10K 5% 1/4W
R543	1-249-429-11	CARBON	10K 5% 1/4W
R544	1-249-437-11	CARBON	47K 5% 1/4W
R545	1-249-429-11	CARBON	10K 5% 1/4W
R551	1-249-433-11	CARBON	22K 5% 1/4W
R552	1-249-433-11	CARBON	22K 5% 1/4W
R561	1-247-846-11	CARBON	4.3K 5% 1/4W
R562	1-249-441-11	CARBON	100K 5% 1/4W
R563	1-249-441-11	CARBON	100K 5% 1/4W
R564	1-249-436-11	CARBON	39K 5% 1/4W
R565	1-249-433-11	CARBON	22K 5% 1/4W
R566	1-249-426-11	CARBON	5.6K 5% 1/4W
R570	1-247-868-11	CARBON	36K 5% 1/4W
R571-574	1-249-434-11	CARBON	27K 5% 1/4W
R575	1-247-874-11	CARBON	62K 5% 1/4W
R576	1-247-866-11	CARBON	30K 5% 1/4W
R577	1-249-431-11	CARBON	15K 5% 1/4W
R578	1-247-852-11	CARBON	7.5K 5% 1/4W
R579	1-249-421-11	CARBON	2.2K 5% 1/4W
R581-584	1-249-434-11	CARBON	27K 5% 1/4W
R585	1-247-874-11	CARBON	62K 5% 1/4W

Ref. No.	Part No.	Description	Remark
R586	1-247-866-11	CARBON	30K 5% 1/4W
R587	1-249-431-11	CARBON	15K 5% 1/4W
R588	1-247-852-11	CARBON	7.5K 5% 1/4W
R589	1-249-421-11	CARBON	2.2K 5% 1/4W
R601	1-247-862-11	CARBON	20K 5% 1/4W
R602	1-247-850-11	CARBON	6.2K 5% 1/4W
R604	1-249-429-11	CARBON	10K 5% 1/4W
R605	1-249-429-11	CARBON	10K 5% 1/4W
R611	1-247-862-11	CARBON	20K 5% 1/4W
R612	1-247-850-11	CARBON	6.2K 5% 1/4W
R614	1-249-429-11	CARBON	10K 5% 1/4W
R615	1-249-429-11	CARBON	10K 5% 1/4W
R621-623			
	1-249-422-11	CARBON	2.7K 5% 1/4W
R631-633			
	1-249-422-11	CARBON	2.7K 5% 1/4W
R651	1-247-708-11	CARBON	470 5% 1/4W
R652	1-249-429-11	CARBON	10K 5% 1/4W
R653	1-215-455-00	METAL	27K 1% 1/6W
R654	1-249-422-11	CARBON	2.7K 5% 1/4W
R655	1-249-441-11	CARBON	100K 5% 1/4W
R702	1-249-425-11	CARBON	4.7K 5% 1/4W
R703	1-249-425-11	CARBON	4.7K 5% 1/4W
R704	1-249-429-11	CARBON	10K 5% 1/4W
R705	1-249-425-11	CARBON	4.7K 5% 1/4W
R706	1-249-425-11	CARBON	4.7K 5% 1/4W
R707	1-249-427-11	CARBON	6.8K 5% 1/4W
R708	1-249-419-11	CARBON	1.5K 5% 1/4W
R709	1-249-429-11	CARBON	10K 5% 1/4W
R710	1-249-419-11	CARBON	1.5K 5% 1/4W
R711	1-249-425-11	CARBON	4.7K 5% 1/4W
R712	1-249-427-11	CARBON	6.8K 5% 1/4W
R713	1-249-427-11	CARBON	6.8K 5% 1/4W
R714	1-249-417-11	CARBON	1K 5% 1/4W
R715	1-247-844-11	CARBON	3.8K 5% 1/4W
R716	1-249-430-11	CARBON	12K 5% 1/4W
R717	1-249-428-11	CARBON	8.2K 5% 1/4W
R718	1-249-437-11	CARBON	47K 5% 1/4W
R719	1-219-136-11	FUSIBLE	0.22 10% 1/4W
R720	1-249-414-11	CARBON	560 5% 1/4W
R730	1-219-136-11	FUSIBLE	0.22 10% 1/4W
R801	1-249-429-11	CARBON	10K 5% 1/4W
R803	1-249-422-11	CARBON	2.7K 5% 1/4W
R804	1-249-426-11	CARBON	5.6K 5% 1/4W
R805	1-247-852-11	CARBON	7.5K 5% 1/4W
R806	1-247-858-11	CARBON	13K 5% 1/4W
R807	1-249-422-11	CARBON	2.7K 5% 1/4W
R808	1-249-426-11	CARBON	5.6K 5% 1/4W
R809	1-247-852-11	CARBON	7.5K 5% 1/4W

Ref. No.	Part No.	Description	Remark
R810	1-247-858-11	CARBON	13K 5% 1/4W
R812	1-249-429-11	CARBON	10K 5% 1/4W
R813	1-247-852-11	CARBON	7.5K 5% 1/4W
R814	1-249-429-11	CARBON	10K 5% 1/4W
R815	1-247-852-11	CARBON	7.5K 5% 1/4W
R816	1-249-430-11	CARBON	12K 5% 1/4W
R820	1-247-852-11	CARBON	7.5K 5% 1/4W
R821	1-249-429-11	CARBON	10K 5% 1/4W
R823	1-249-437-11	CARBON	47K 5% 1/4W
R824	1-249-429-11	CARBON	10K 5% 1/4W
R825	1-249-430-11	CARBON	12K 5% 1/4W
R826	1-247-887-00	CARBON	220K 5% 1/4W
R827	1-247-862-11	CARBON	20K 5% 1/4W
R828	1-249-429-11	CARBON	10K 5% 1/4W
R829	1-247-862-11	CARBON	20K 5% 1/4W
R830	1-249-429-11	CARBON	10K 5% 1/4W
R831	1-249-433-11	CARBON	22K 5% 1/4W
R832	1-249-433-11	CARBON	22K 5% 1/4W
R834	1-249-441-11	CARBON	100K 5% 1/4W
R835	1-249-417-11	CARBON	1K 5% 1/4W
R838	1-249-417-11	CARBON	1K 5% 1/4W
R839	1-249-433-11	CARBON	22K 5% 1/4W
R844-848			
	1-249-423-11	CARBON	3.3K 5% 1/4W
R849	1-249-434-11	CARBON	27K 5% 1/4W
R850	1-249-434-11	CARBON	27K 5% 1/4W
R851	1-249-423-11	CARBON	3.3K 5% 1/4W
R852	1-249-434-11	CARBON	27K 5% 1/4W
R853	1-249-434-11	CARBON	27K 5% 1/4W
R854	1-249-423-11	CARBON	3.3K 5% 1/4W
R855	1-249-423-11	CARBON	3.3K 5% 1/4W
R856	1-249-429-11	CARBON	10K 5% 1/4W
R857	1-249-421-11	CARBON	2.2K 5% 1/4W
R858	1-249-421-11	CARBON	2.2K 5% 1/4W
R859	1-249-429-11	CARBON	10K 5% 1/4W
R881	1-249-429-11	CARBON	10K 5% 1/4W
R895	1-249-417-11	CARBON	1K 5% 1/4W
R896	1-249-433-11	CARBON	22K 5% 1/4W
R897	1-249-429-11	CARBON	10K 5% 1/4W
R898	1-249-425-11	CARBON	4.7K 5% 1/4W
R899	1-247-840-00	CARBON	2.4K 5% 1/4W
R981	1-249-430-11	CARBON	12K 5% 1/4W
R982-984			
	1-249-433-11	CARBON	22K 5% 1/4W
R985	1-249-405-11	CARBON	100 5% 1/4W
R991	1-249-430-11	CARBON	12K 5% 1/4W
R992-994			
	1-249-433-11	CARBON	22K 5% 1/4W
R995	1-249-405-11	CARBON	100 5% 1/4W

Ref. No.	Part No.	Description	Remark
< VARIABLE RESISTOR >			
RV171	1-238-600-11	RES. ADJ. CARBON 10K	
RV181	1-238-600-11	RES. ADJ. CARBON 10K	
RV271	1-238-600-11	RES. ADJ. CARBON 10K	
RV281	1-238-600-11	RES. ADJ. CARBON 10K	
< TEST PIN >			
* TP1	1-564-505-11	PLUG, CONNECTOR 2P	
* TP2	1-564-506-11	PLUG, CONNECTOR 3P	
< VIBRATOR >			
X801	1-579-175-11	VIBRATOR, CERAMIC (10MHz)	

* A-2006-401-A	MD HX BOARD, COMPLETE		

< CAPACITOR >			
C11	1-163-131-00	CERAMIC CHIP 390PF	5% 50V
C12	1-136-157-00	FILM 0.022uF	5% 50V
C13	1-124-234-00	ELECT 22uF	20% 16V
C18	1-163-117-00	CERAMIC CHIP 100PF	5% 50V
C21	1-163-131-00	CERAMIC CHIP 390PF	5% 50V
C22	1-136-157-00	FILM 0.022uF	5% 50V
C23	1-124-234-00	ELECT 22uF	20% 16V
C28	1-163-117-00	CERAMIC CHIP 100PF	5% 50V
C31-33	1-124-234-00	ELECT 22uF	20% 16V
C51	1-164-161-11	CERAMIC CHIP 0.0022uF	10% 100V
C52	1-164-161-11	CERAMIC CHIP 0.0022uF	10% 100V
C53	1-163-019-00	CERAMIC CHIP 0.0068uF	10% 50V
C54	1-136-601-11	FILM 0.01uF	5% 630V
C56	1-164-505-11	CERAMIC CHIP 2.2uF	16V
C57	1-164-346-11	CERAMIC CHIP 1uF	16V
C71	1-164-346-11	CERAMIC CHIP 1uF	16V
C80	1-124-234-00	ELECT 22uF	20% 16V
C81	1-164-232-11	CERAMIC CHIP 0.01uF	50V
C82	1-136-157-00	FILM 0.022uF	5% 50V
C83	1-164-004-11	CERAMIC CHIP 0.1uF	10% 25V
C84	1-136-478-11	FILM 470PF	5% 630V
C85	1-136-433-11	FILM 100PF	5% 630V
C86	1-163-143-00	CERAMIC CHIP 0.0012uF	5% 50V
C87	1-136-273-91	FILM 75PF	5% 630V
C88	1-163-003-11	CERAMIC CHIP 330PF	10% 50V
C89	1-124-234-00	ELECT 22uF	20% 16V
C90	1-107-045-00	MICA 3.9PF	500V
C91	1-164-232-11	CERAMIC CHIP 0.01uF	50V
C92	1-136-157-00	FILM 0.022uF	5% 50V
C93	1-164-004-11	CERAMIC CHIP 0.1uF	10% 25V

Ref. No.	Part No.	Description	Remark
C94	1-136-478-11	FILM 470PF	5% 630V
C95	1-136-433-11	FILM 100PF	5% 630V
C96	1-163-143-00	CERAMIC CHIP 0.0012uF	5% 50V
C97	1-136-273-91	FILM 75PF	5% 630V
C98	1-163-003-11	CERAMIC CHIP 330PF	10% 50V
C99	1-164-005-11	CERAMIC CHIP 0.47uF	25V
< CONNECTOR >			
* CNP31	1-580-782-11	CONNECTOR, BOARD TO BOARD	
* CNP32	1-580-781-11	PIN, CONNECTOR (PC BOARD) 7P	
* CNP33	1-580-782-11	CONNECTOR, BOARD TO BOARD	
* CNP71	1-564-719-11	PIN, CONNECTOR (SMALL TYPE) 3P	
* CNP72	1-580-411-11	SOCKET, CONNECTOR 4P	
< DIODE >			
D31	8-719-404-46	DIODE MA110	
< IC >			
IC31	8-759-106-02	IC uPC4570G2	
IC81	8-759-106-56	IC uPC1297CA	
< INDUCTOR >			
L81	1-410-780-11	INDUCTOR 27mH	
L91	1-410-780-11	INDUCTOR 27mH	
< TRANSISTOR >			
Q51-53	8-729-808-01	TRANSISTOR 2SD1622-S	
Q71	8-729-216-22	TRANSISTOR 2SA1162-G	
< RESISTOR >			
R11	1-216-099-00	METAL CHIP 120K 5%	1/10W
R12	1-216-025-00	METAL CHIP 100 5%	1/10W
R13	1-216-100-00	METAL GLAZE 130K 5%	1/10W
R14	1-216-067-00	METAL CHIP 5.6K 5%	1/10W
R21	1-216-099-00	METAL CHIP 120K 5%	1/10W
R22	1-216-025-00	METAL CHIP 100 5%	1/10W
R23	1-216-100-00	METAL GLAZE 130K 5%	1/10W
R24	1-216-067-00	METAL CHIP 5.6K 5%	1/10W
R31	1-216-033-00	METAL CHIP 220 5%	1/10W
R32	1-216-033-00	METAL CHIP 220 5%	1/10W
R51	1-216-097-00	METAL CHIP 100K 5%	1/10W
R52	1-216-097-00	METAL CHIP 100K 5%	1/10W
R53	1-216-073-00	METAL CHIP 10K 5%	1/10W
R54	1-216-309-00	METAL CHIP 5.6 5%	1/10W
R55	1-216-309-00	METAL CHIP 5.6 5%	1/10W
R57	1-216-298-00	METAL CHIP 2.2 5%	1/10W
R71	1-216-082-00	METAL GLAZE 24K 5%	1/10W

Ref. No.	Part No.	Description	Remark		
R72	1-216-081-00	METAL CHIP	22K	5%	1/10W
R73	1-216-089-00	METAL CHIP	47K	5%	1/10W
R74	1-216-089-00	METAL CHIP	47K	5%	1/10W
R81	1-216-073-00	METAL CHIP	10K	5%	1/10W
R82	1-216-085-00	METAL CHIP	33K	5%	1/10W
R83	1-216-001-00	METAL CHIP	10	5%	1/10W
R84	1-216-101-00	METAL CHIP	150K	5%	1/10W
R85	1-216-075-00	METAL CHIP	12K	5%	1/10W
R91	1-216-073-00	METAL CHIP	10K	5%	1/10W
R92	1-216-085-00	METAL CHIP	33K	5%	1/10W
R93	1-216-001-00	METAL CHIP	10	5%	1/10W
R94	1-216-101-00	METAL CHIP	150K	5%	1/10W
R95	1-216-075-00	METAL CHIP	12K	5%	1/10W

< VARIABLE RESISTOR >

RV11	1-238-012-11	RES, ADJ, CARBON 1K
RV21	1-238-012-11	RES, ADJ, CARBON 1K
RV71	1-241-630-11	RES, ADJ, CARBON 10K
RV72	1-241-630-11	RES, ADJ, CARBON 10K
RV81	1-241-122-11	RES, ADJ, CARBON 22K
RV91	1-241-122-11	RES, ADJ, CARBON 22K

< RELAY >

RY31	1-515-913-11	RELAY
------	--------------	-------

< TRANSFORMER >

T51	1-406-417-11	COIL, BIAS OSCILLATION
T81	1-433-381-11	TRANSFORMER, BIAS OSCILLATOR
T91	1-433-381-11	TRANSFORMER, BIAS OSCILLATOR

< TEST PIN >

* TP81 1-568-449-11 HOUSING, CONNECTOR(PC BOARD) 3P

Ref. No.	Part No.	Description	Remark		
*	A-2007-029-A	PANEL BOARD, COMPLETE	(WR735S:Canadian, WR701ES)		
*	A-2007-030-A	PANEL BOARD, COMPLETE	(WR735S:AEP, G, AUS)		

TRANSFORMER BOARD

SW(B) BOARD

CONNECTOR BOARD

SW(A) BOARD

POWER SW BOARD

H. P. BOARD

1-533-183-11 HOLDER, FUSE

< CAPACITOR >

C185	1-162-294-31	CERAMIC	0.001uF	10%	50V
C285	1-162-294-31	CERAMIC	0.001uF	10%	50V
C591	1-126-103-11	ELECT	470uF	20%	16V
C713	1-164-159-11	CERAMIC	0.1uF		50V
		(WR735S:AEP, G, AUS)			
C714	1-164-159-11	CERAMIC	0.1uF		50V
		(WR735S:AEP, G, AUS)			
C715	1-164-159-11	CERAMIC	0.1uF		50V
		(WR735S:Canadian, WR701ES)			
C716	1-164-159-11	CERAMIC	0.1uF		50V
		(WR735S:Canadian, WR701ES)			
C731	1-136-169-00	FILM	0.22uF	5%	50V
C732	1-136-169-00	FILM	0.22uF	5%	50V
C901	1-126-157-11	ELECT	10uF	20%	16V

< CONNECTOR >

* CN32A	1-580-784-11	CONNECTOR, BOARD TO BOARD
* CN33A	1-580-784-11	CONNECTOR, BOARD TO BOARD
CN502	1-750-425-11	CONNECTOR, FFC/FPC 20P
* CN703	1-580-230-31	PIN, CONNECTOR (PC BOARD) 2P
		(WR735S:AEP, G, AUS)
* CN704	1-580-230-31	PIN, CONNECTOR (PC BOARD) 2P
		(WR735S:Canadian, WR701ES)
CN903	1-691-646-11	SOCKET, CONNECTOR 11P
CN904	1-691-644-11	SOCKET, CONNECTOR 7P
CN905	1-691-646-11	SOCKET, CONNECTOR 11P
CN906	1-691-644-11	SOCKET, CONNECTOR 7P
CNP901	1-750-454-11	CONNECTOR, FFC/FPC 13P
CNP902	1-750-468-11	CONNECTOR, FFC/FPC 27P

Ref. No.	Part No.	Description	Remark
		< CONNECTOR >	
ECP1	1-690-880-81	LEAD (WITH CONNECTOR)	
		< FUSE >	
△F702	1-532-259-00	FUSE, TIME-LAG (Tl. 6AL) (WR735S:AEP, G. AUS)	
△F703	1-532-259-00	FUSE, TIME-LAG (Tl. 6AL) (WR735S:AEP, G. AUS)	
△F704	1-532-743-11	FUSE, GLASS TUBE (2A/125V) (WR735S:Canadian, WR701ES)	
△F705	1-532-743-11	FUSE, GLASS TUBE (2A/125V) (WR735S:Canadian, WR701ES)	
		< IC >	
IC901	8-741-100-48	IC SBX1610-59	
		< JACK >	
J502	1-507-796-71	JACK (HEADPHONES)	
		< RESISTOR >	
R534	1-247-862-11	CARBON 20K 5% 1/4W	
R535	1-247-862-11	CARBON 20K 5% 1/4W	
R536	1-249-431-11	CARBON 15K 5% 1/4W	
R840-843	1-249-429-11	CARBON 10K 5% 1/4W	
R871	1-249-429-11	CARBON 10K 5% 1/4W	
R901	1-249-418-11	CARBON 1.2K 5% 1/4W F	
R902	1-249-420-11	CARBON 1.8K 5% 1/4W F	
R903	1-249-422-11	CARBON 2.7K 5% 1/4W F	
R904	1-249-424-11	CARBON 3.9K 5% 1/4W F	
R905	1-249-427-11	CARBON 6.8K 5% 1/4W F	
R907	1-249-422-11	CARBON 2.7K 5% 1/4W F	
R908	1-249-424-11	CARBON 3.9K 5% 1/4W F	
R909	1-249-427-11	CARBON 6.8K 5% 1/4W F	
R910	1-249-431-11	CARBON 15K 5% 1/4W	
R911	1-249-437-11	CARBON 47K 5% 1/4W	
R912	1-249-418-11	CARBON 1.2K 5% 1/4W F	
R913	1-249-420-11	CARBON 1.8K 5% 1/4W F	
R914	1-249-422-11	CARBON 2.7K 5% 1/4W F	
R915	1-249-424-11	CARBON 3.9K 5% 1/4W F	
R916	1-249-431-11	CARBON 15K 5% 1/4W	
R917	1-249-418-11	CARBON 1.2K 5% 1/4W F	
R918	1-249-420-11	CARBON 1.8K 5% 1/4W F	
R919	1-249-418-11	CARBON 1.2K 5% 1/4W F	
R920	1-249-420-11	CARBON 1.8K 5% 1/4W F	
R921	1-249-422-11	CARBON 2.7K 5% 1/4W F	
R922	1-249-424-11	CARBON 3.9K 5% 1/4W F	
R923	1-249-427-11	CARBON 6.8K 5% 1/4W F	

Ref. No.	Part No.	Description	Remark
R924	1-249-427-11	CARBON 6.8K 5% 1/4W F	
R925	1-249-431-11	CARBON 15K 5% 1/4W	
R926	1-249-437-11	CARBON 47K 5% 1/4W	
R927	1-249-437-11	CARBON 47K 5% 1/4W	
R940	1-249-431-11	CARBON 15K 5% 1/4W	
		< VARIABLE RESISTOR >	
RV501	1-223-332-11	RES. VAR. CARBON 10K (REC LEVEL)	
RV502	1-223-333-11	RES. VAR. CARBON 100K (BALANCE)	
		< SWITCH >	
S901	1-554-303-21	SWITCH, TACTILE (SYNCHRO DUBBING A→B (HIGH))	
S902	1-554-303-21	SWITCH, TACTILE (SYNCHRO DUBBING A→B (NORMAL))	
S903	1-554-303-21	SWITCH, TACTILE (A+B REC)	
S904	1-554-303-21	SWITCH, TACTILE (COUNTER (RESET)) (DECK B)	
S905	1-554-303-21	SWITCH, TACTILE (COUNTER (MEMORY)) (DECK B)	
S906	1-554-303-21	SWITCH, TACTILE (COUNTER (MEMORY)) (DECK A)	
S907	1-554-303-21	SWITCH, TACTILE (AUTO CALIBRATION) (DECK A)	
S908	1-554-303-21	SWITCH, TACTILE (AUTO CALIBRATION) (DECK B)	
S909	1-554-303-21	SWITCH, TACTILE (■) (DECK A)	
S910	1-554-303-21	SWITCH, TACTILE (▷) (DECK A)	
S911	1-554-303-21	SWITCH, TACTILE (<◁) (DECK A)	
S912	1-554-303-21	SWITCH, TACTILE (PAUSE) (DECK A)	
S913	1-554-303-21	SWITCH, TACTILE (○ REC MUTE) (DECK A)	
S914	1-554-303-21	SWITCH, TACTILE (● REC) (DECK A)	
S915	1-554-303-21	SWITCH, TACTILE (◀◀) (DECK A)	
S916	1-554-303-21	SWITCH, TACTILE (▶▶) (DECK A)	
S917	1-554-303-21	SWITCH, TACTILE (■) (DECK B)	
S918	1-554-303-21	SWITCH, TACTILE (▷) (DECK B)	
S919	1-554-303-21	SWITCH, TACTILE (<◁) (DECK B)	
S920	1-554-303-21	SWITCH, TACTILE (PAUSE) (DECK B)	
S921	1-554-303-21	SWITCH, TACTILE (○ REC MUTE) (DECK B)	
S922	1-554-303-21	SWITCH, TACTILE (◀◀) (DECK B)	
S923	1-554-303-21	SWITCH, TACTILE (▶▶) (DECK B)	
S924	1-554-303-21	SWITCH, TACTILE (● REC) (DECK B)	
S925	1-692-465-11	SWITCH, SLIDE (DIR MODE)	
S927	1-554-118-00	SWITCH, PUSH (1 KEY) (MPX FILTER)	
S928	1-692-466-11	SWITCH, ROTARY (DOLBY NR)	
S930	1-554-303-21	SWITCH, TACTILE (COUNTER (RESET)) (DECK A)	
S931	1-554-118-00	SWITCH, PUSH (1 KEY) (POWER)	

The components identified by mark △ or dotted line with mark △ are critical for safety. Replace only with part number specified.

Les composants identifiés par une marque △ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

Ref. No. Part No. Description Remark

< FLUORESCENT INDICATOR >

VFD901 1-517-162-11 INDICATOR TUBE, FLUORESCENT

* 1-634-841-14 SW-A BOARD

< CONNECTOR >

* CNP81 1-568-852-11 SOCKET, CONNECTOR 9P

< IC >

IC81 8-719-710-03 IC PHOTO REFLECTOR NJL5165K-B (H1)
IC82 8-719 710 03 IC PHOTO REFLECTOR NJL5165K-B (H1)

< RESISTOR >

R81 1-249-414-11 CARBON 560 5% 1/4W
R82 1-247-818-11 CARBON 300 5% 1/4W
R83 1-247-834-11 CARBON 1.3K 5% 1/4W
R84 1 249 417-11 CARBON 1K 5% 1/4W
R85 1-249-408 11 CARBON 180 5% 1/4W

R86 1-249-408-11 CARBON 180 5% 1/4W

< SWITCH >

S81 1-571-958-11 SWITCH, PUSH (1 KEY) (STOP DET)
S82 1-571-281-21 SWITCH, LEAF (70H DET)
S83 1-571-281-21 SWITCH, LEAF (METAL DET)
S84 1-571-281-21 SWITCH, LEAF (ERASE PROOF (SIDE A))
S85 1-571-281-21 SWITCH, LEAF (ERASE PROOF (SIDE B))

S86 1-571-281-21 SWITCH, LEAF (HALF DET)

MISCELLANEOUS

11 1 575 730-11 WIRE, FLAT TYPE (5 CORE)
12 1 590 217-11 WIRE, FLAT TYPE (20 CORE)
△13 1-558-945-21 CORD, POWER (POLAR, SPT-1)
(WR735S:Canadian, WR701ES)
△13 1-575-651-21 CORD, POWER (WR735S:AEP, G)
△13 1-696-845-11 CORD, POWER (WR735S:AUS)

66 1-575-905-11 WIRE, FLAT TYPE (9 CORE)
70 1-690-589-31 WIRE, FLAT TYPE (13 CORE)
71 1-690-729-11 WIRE, FLAT TYPE (27 CORE)
73 1-575-905-11 WIRE, FLAT TYPE (9 CORE)
84 1-590-241-11 WIRE, FLAT TYPE (7 CORE)

85 1-590-241-11 WIRE, FLAT TYPE (11 CORE)
120 1-638-983-11 MOTOR FLEXIBLE BOARD
HRPE101 A-2003-838-F DECK ASSY, HEAD (RECORD/PLAYBACK/ERASE)
M1 X-3365-377-1 MOTOR (CAPSTAN) ASSY

Ref. No. Part No. Description Remark

M2 X-3363-501-1 MOTOR (RELL) ASSY
△T701 1-450-869-11 TRANSFORMER, POWER (WR735S:Canadian,
WR701ES)
△T701 1-450-870-11 TRANSFORMER, POWER (WR735S:AEP, G, AUS)

ACCESSORIES & PACKING MATERIALS

1-465-738-11 REMOTE COMMANDER (RM-J903)
(WR735S:Canadian)
1-558-271-11 CORD, CONNECTION
1-696-170-11 CORD, CONNECTION
2-181-754-01 COVER, BATTERY (WR735S:Canadian)
* 3-354-913-01 CUSHION

* 3-389-330-01 INDIVIDUAL CARTON (WR701ES)
* 3-389-330-11 INDIVIDUAL CARTON (WR735S)
3 755-288-11 MANUAL, INSTRUCTION (RM) (ENGLISH, FRENCH)
(WR735S:Canadian)
3-756 576-11 MANUAL, INSTRUCTION (ENGLISH, FRENCH,
SPANISH, PORTUGUESE) (WR735S:AEP)
3-756-576-21 MANUAL, INSTRUCTION (ENGLISH)
(WR735S:Canadian, AUS, WR701ES)

3-756-576-31 MANUAL, INSTRUCTION (FRENCH)
(WR735S:Canadian)
3-756-576-41 MANUAL, INSTRUCTION (GERMAN, DUTCH,
SWEDISH, ITALIAN) (WR735S:AEP)
3-756-576-51 MANUAL, INSTRUCTION (GERMAN) (WR735S:G)

HARDWARE LIST

#1 7-682-548-09 SCREW +BVTI 3X8 (S)
#2 7-685-534-19 SCREW -BTP 2.6X8 TYPE2 N-S
#3 7-682-547-09 SCREW -BVTI 3X6 (S)
#4 7-621-849-00 SCREW (BV/RING)
#5 7-685-646-79 SCREW -BVTP 3X8 TYPE2 IT-3

#6 7-621-770-XX SCREW +BVTI 2.6X8 (S)
#7 7-621-773-95 SCREW +BVTI 2.6X6 (S)
#8 7-685-134-19 SCREW (+ PTPWH) (2.6X8)
#9 7-621-775-00 SCREW +B 2.6X3
#10 7-627-556-08 SCREW +P 2.6X2.8

The components identified by mark △ or dotted line with mark △ are critical for safety. Replace only with part number specified.	Les composants identifiés par une marque △ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.
--	--

TC-WR701ES/WR735S

SONY[®] SERVICE MANUAL

US Model

TC-WR701ES

Canadian Model

AEP Model

Australian Model


TC-WR735S

SUPPLEMENT-1

File this supplement with the service manual.

BLOCK DIAGRAM

BLOCK DIAGRAM

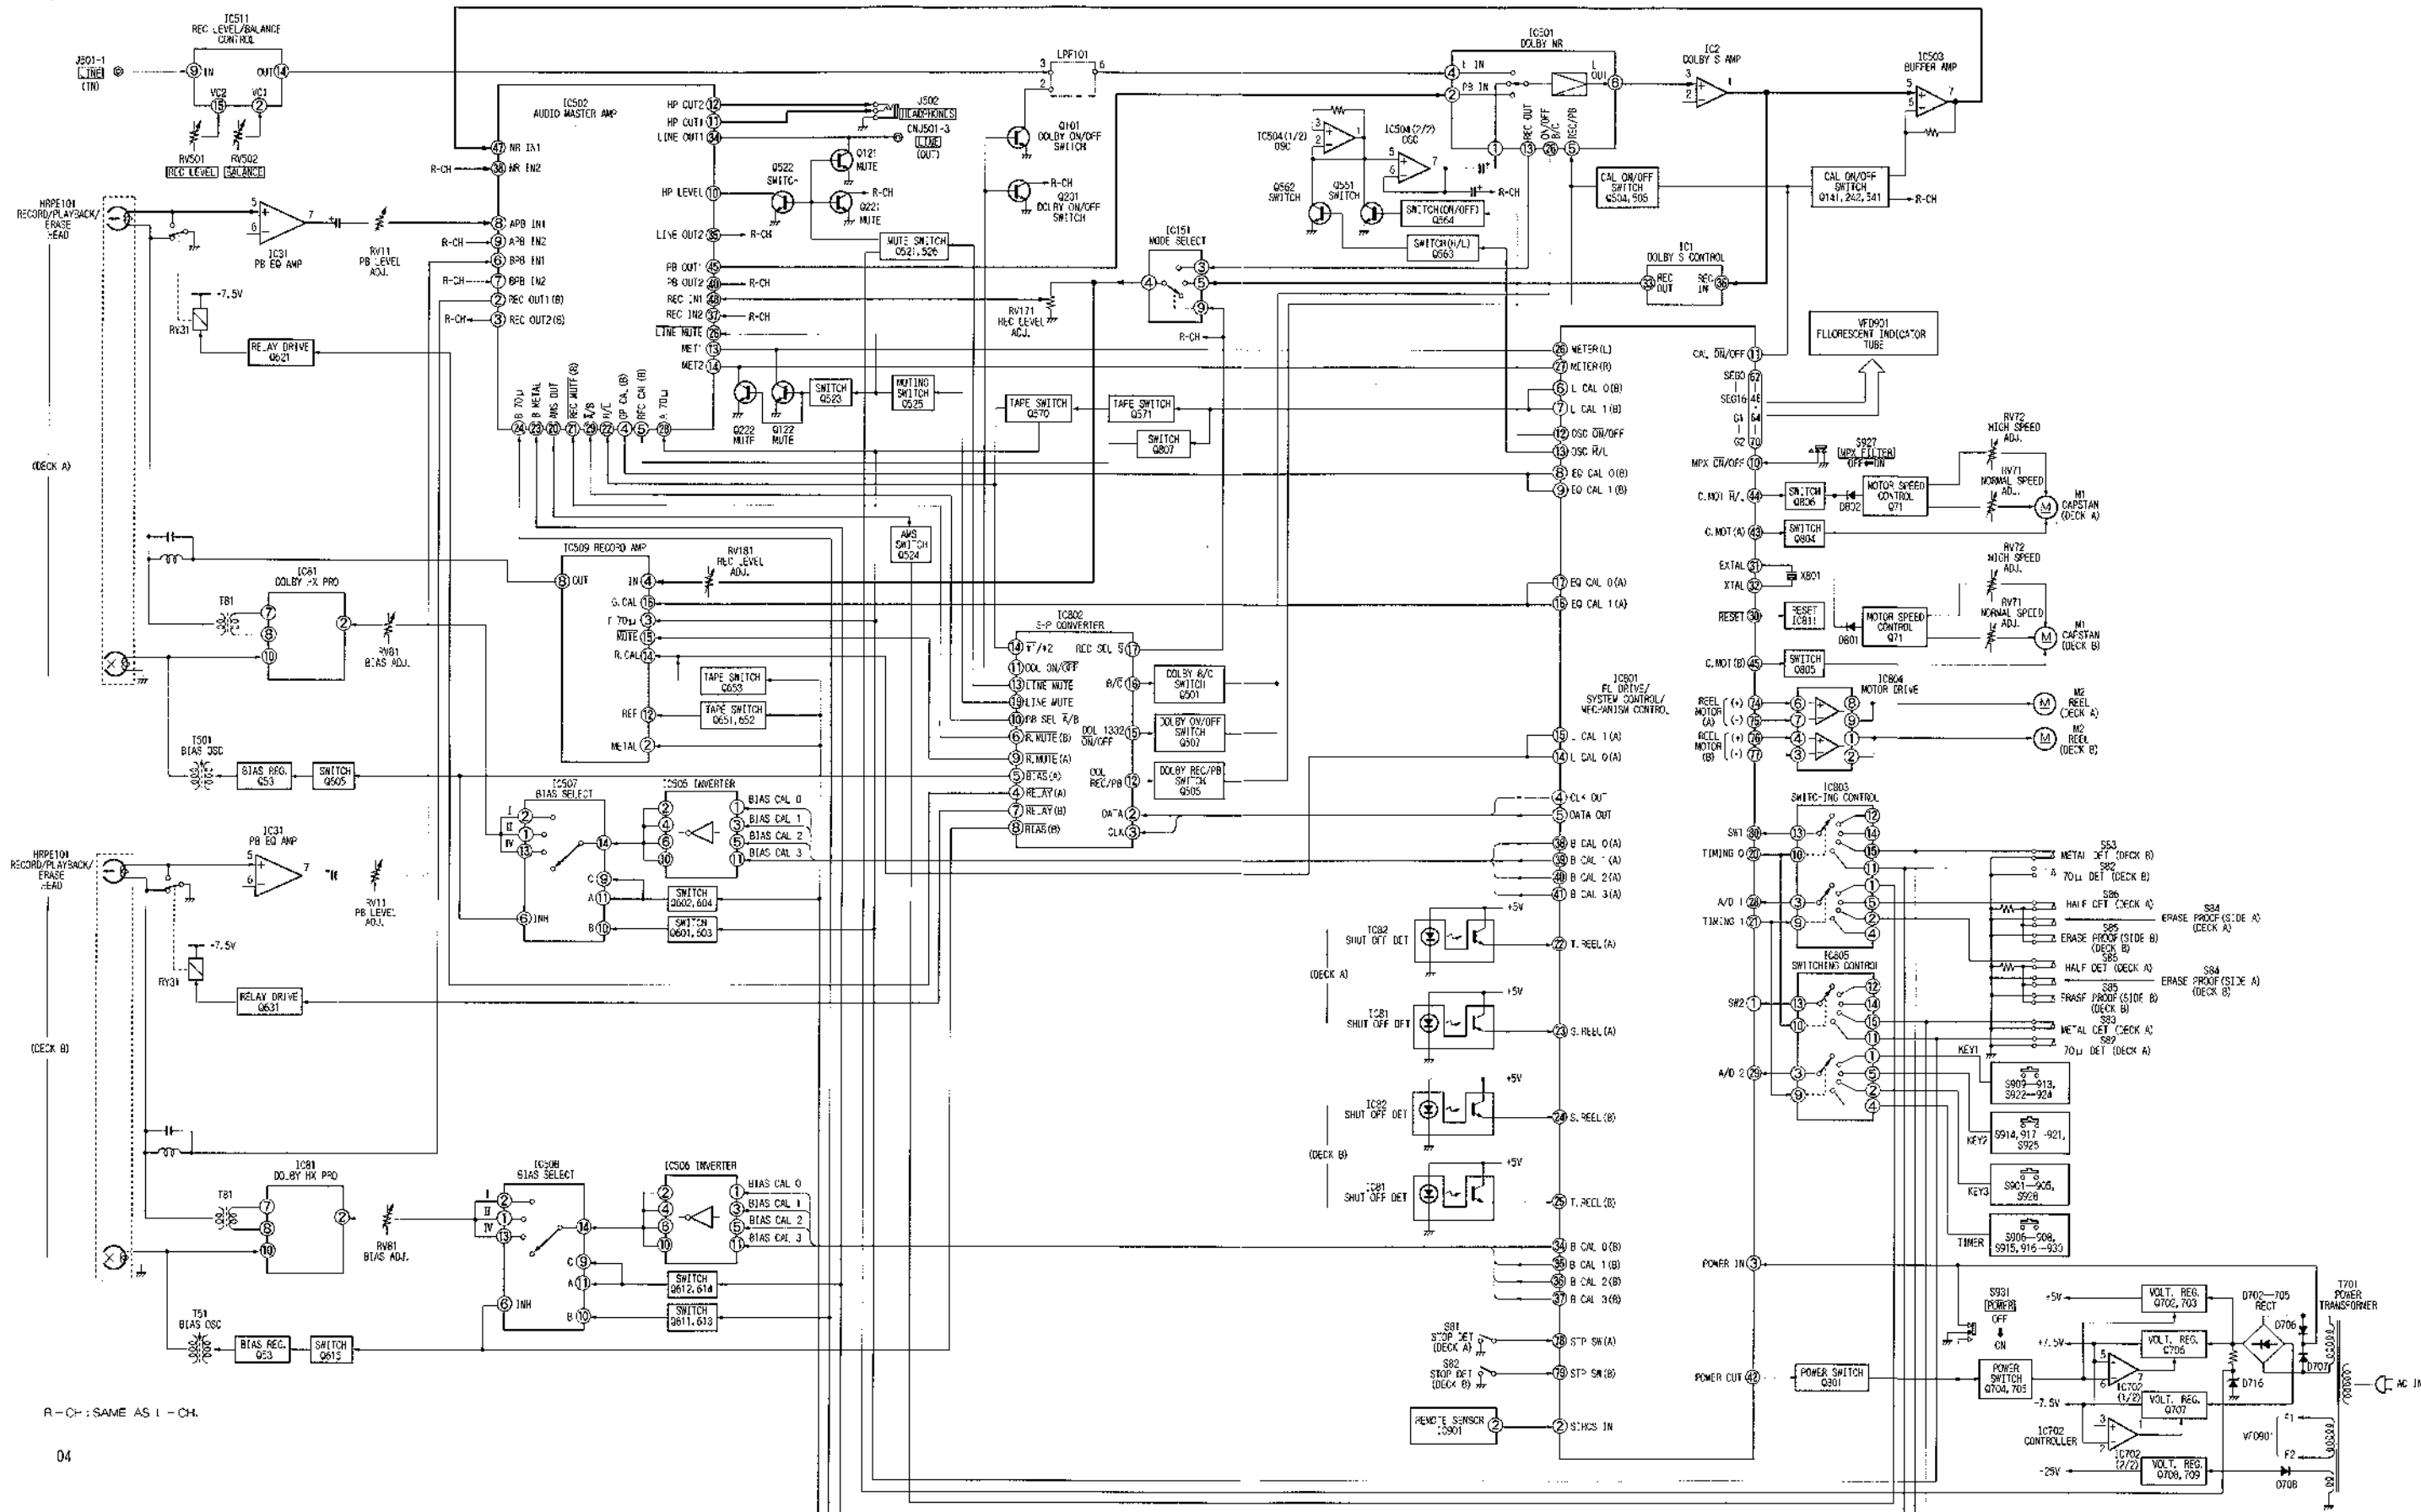

R-CH: SAME AS L-CH.