

SPECIFICATIONS

Recording System:	2 (incl. 1 channel) monoaural
Fast winding time:	Approx. 2 min. (w/ Sony Cassette CR-30)
Frequency Response:	100 - 9,000 Hz
Tape Speed:	4.8 cm/sec (1 7/8 ips) Approx. +30% -20% adjustable in playback
Speaker:	Approx. 4.5 cm (1 3/4 inches) d/ø
Power Output:	360 mW (at 10% harmonic distortion)
Input:	Microphone input jack (mini-jack) sensitivity 0.2 mV (-72 dB) for low impedance microphone
Output:	Earphone jack (mini-jack) for earphone from 8-ohm to 300 ohm or load impedance 10 kilohms or higher
Other Jack:	Remote control jack
Power Requirements:	3 V dc, 2 batteries size AA (IEC designation R6) DC IN 3 V jack accepts: 120 V ac, 60 Hz with supplied Sony AC-39 ac power adaptor (US model) 120 V ac, 60 Hz with optional Sony AC 39 ac power adaptor (Canadian model) 110, 220 or 240 V ac, 50/60 Hz with optional Sony AC-38 ac power adaptor (AEP, UK, E model) car battery cord (optional) DCC-127A for use on 12 V car battery

Battery Life:	Approx. 3 hours with Sony SLIM-3 (R6) New Super batteries or Eveready No. 12 Heavy Duty batteries and 7 hours with Eveready AM3 alkaline batteries
Dimensions:	Approx. 85.8 x 134.5 x 31.5 mm (w/h/d) (3 1/2 x 5 1/4 x 1 1/4 inches) incl. projecting parts and controls
Weight:	Approx. 390 g (14 oz) incl. batteries

G dB=0.775 V

TAPE TRANSPORT MECHANISM MT-7-22




MICROFILM

SERVICE MANUAL

FEATURES


- Logic-controlled mechanism allows rapid switching directly from one mode to another.
- Extremely compact size for easy one-hand operation.
- Simplicity of recording—merely insert a cassette and press one button.
- Built-in electret condenser microphone with adjustable sensitivity.
- Adjustable tape speed in playback mode.
- Automatic recording control system automatically adjusts and maintains a proper recording level.
- SAFETY switch for preventing the set from changing to another mode if, by accident, a tape operation button is pressed.
- All-mode shut-off mechanism which activates at the end of the tape in any operating mode.
- Three different power sources: batteries, house current and 12 V car battery.

SECTION 1 LOCATION

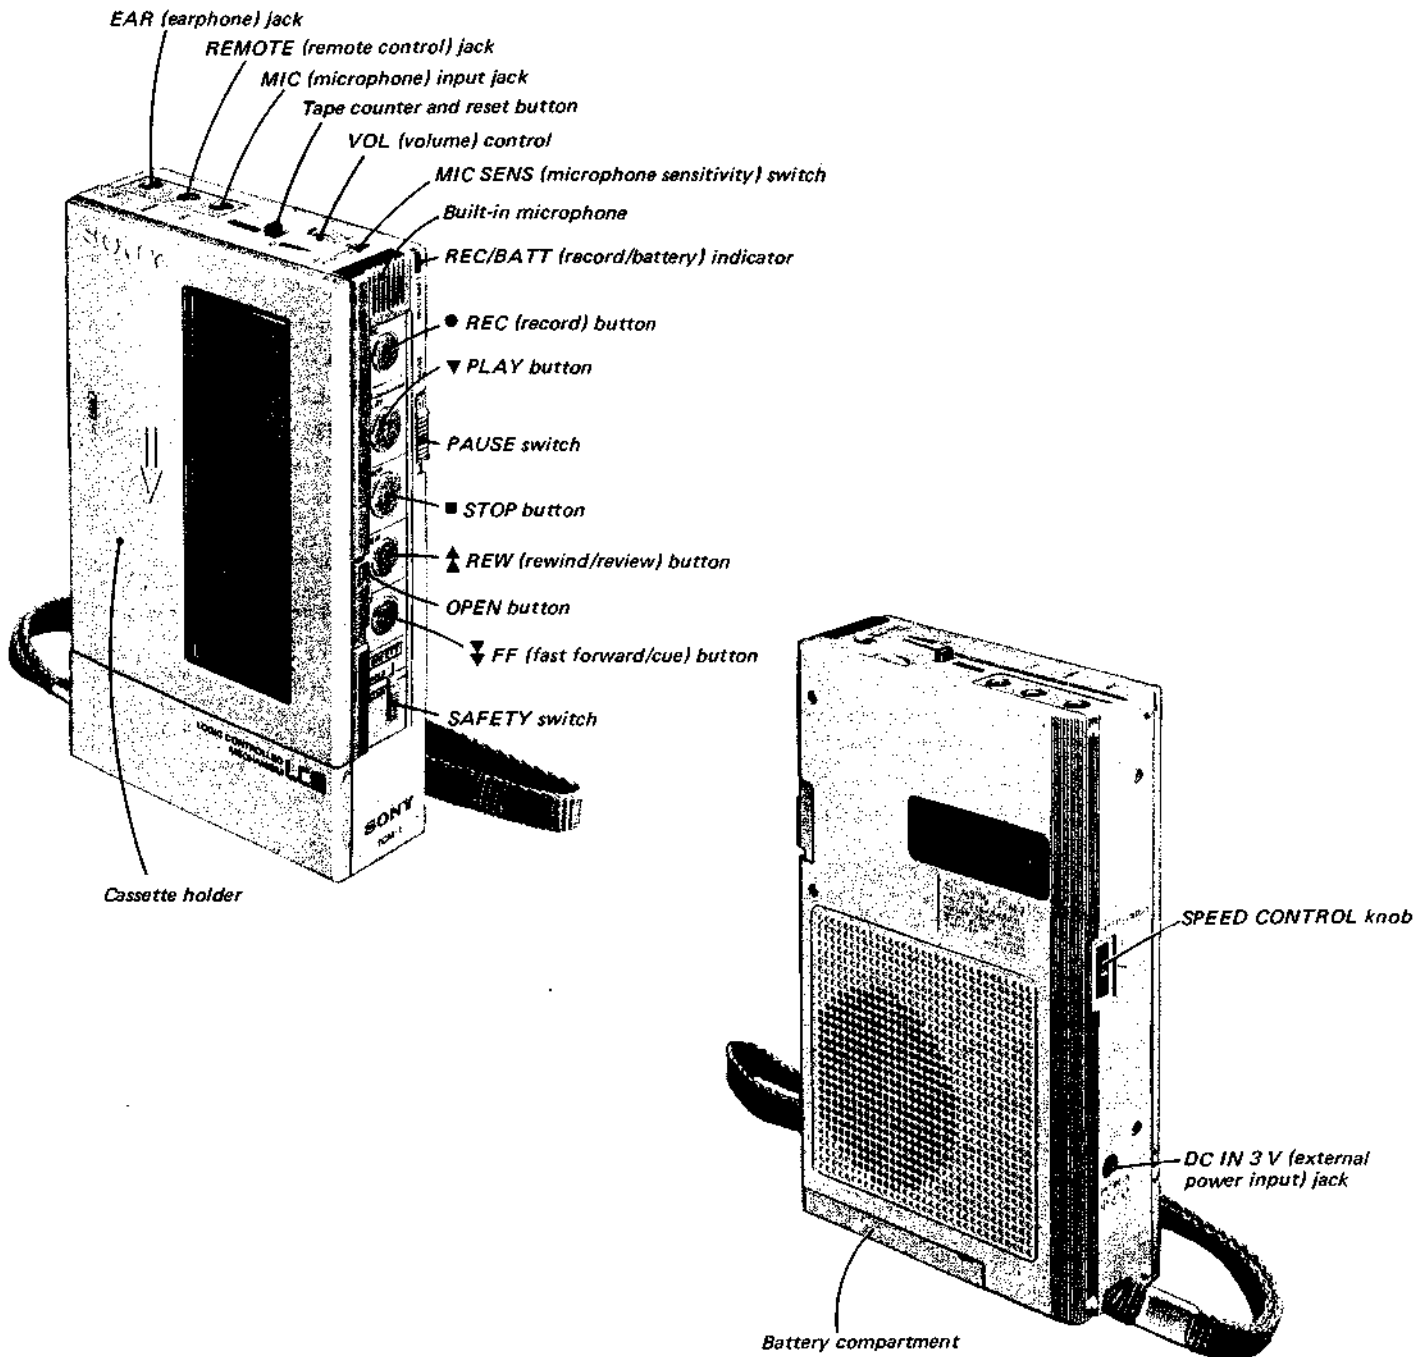



SECTION 2 OUTLINE

BLOCK DIAGRAM

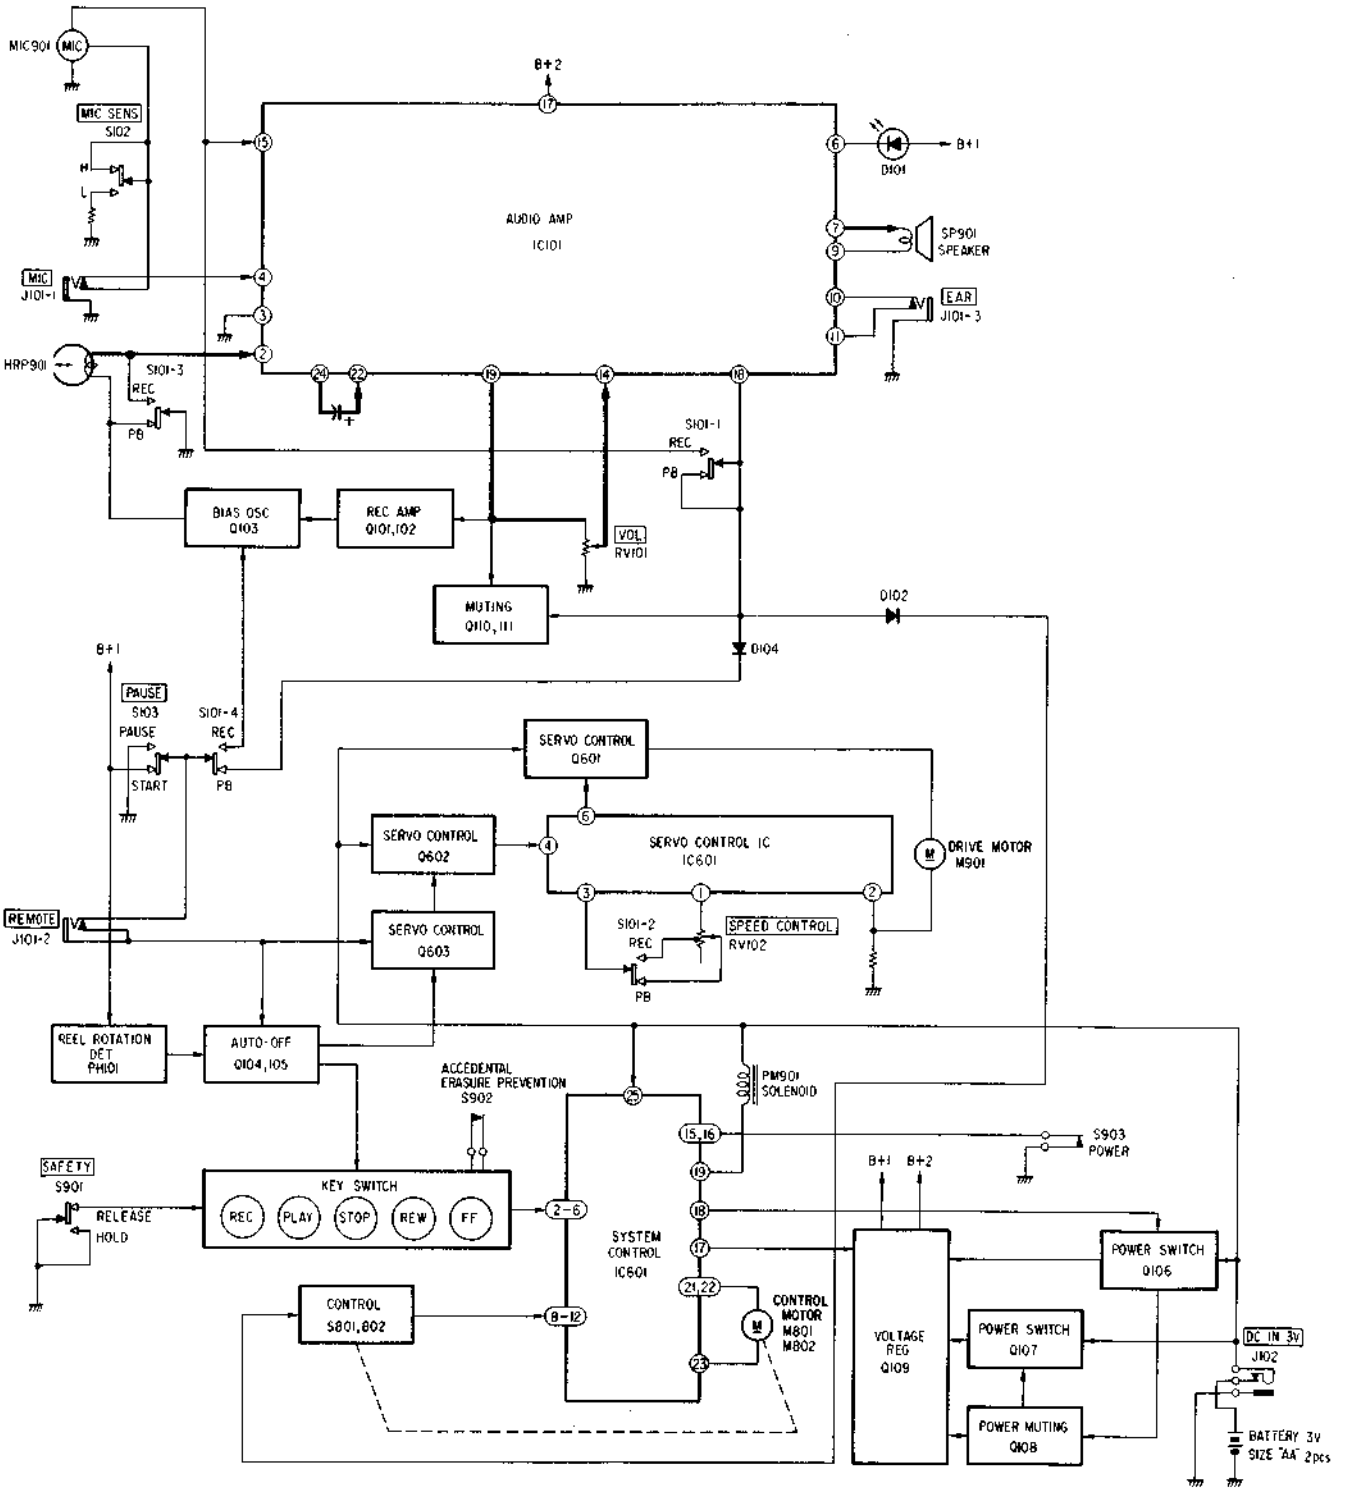


**SECTION 3
DISASSEMBLY**


Note: Follow the disassembly procedure in the numerical order given.

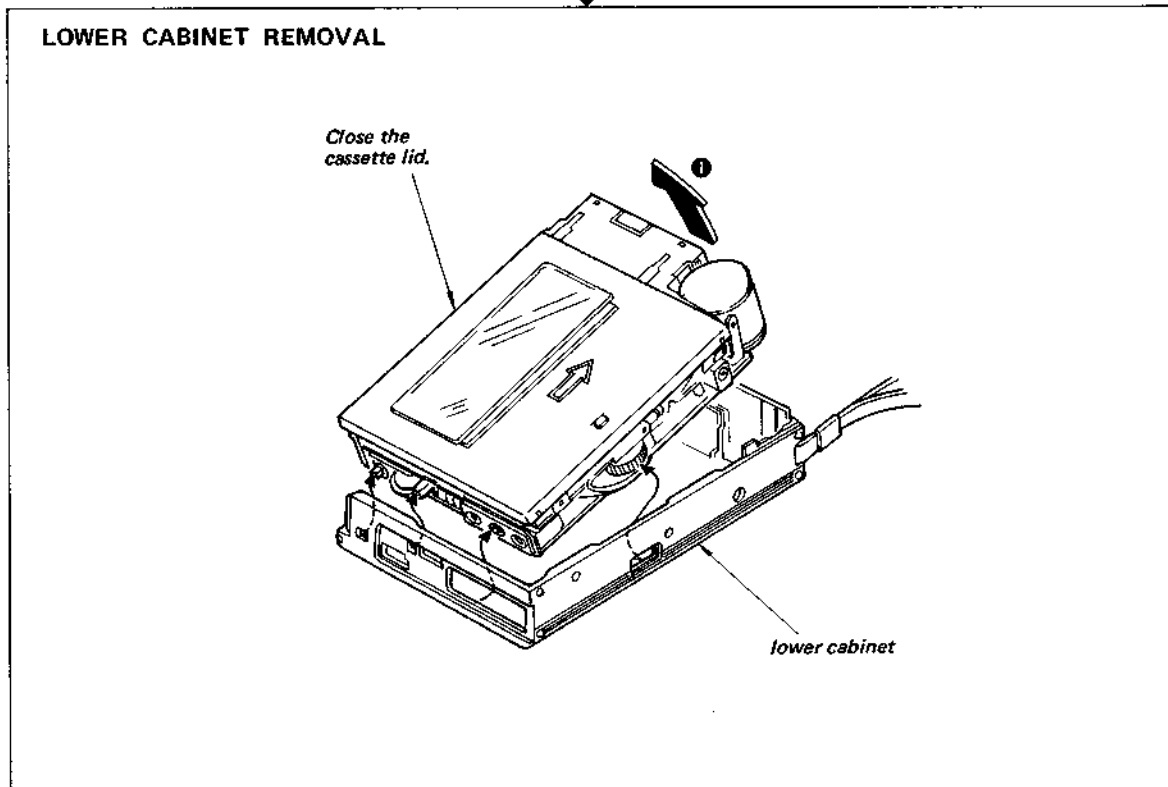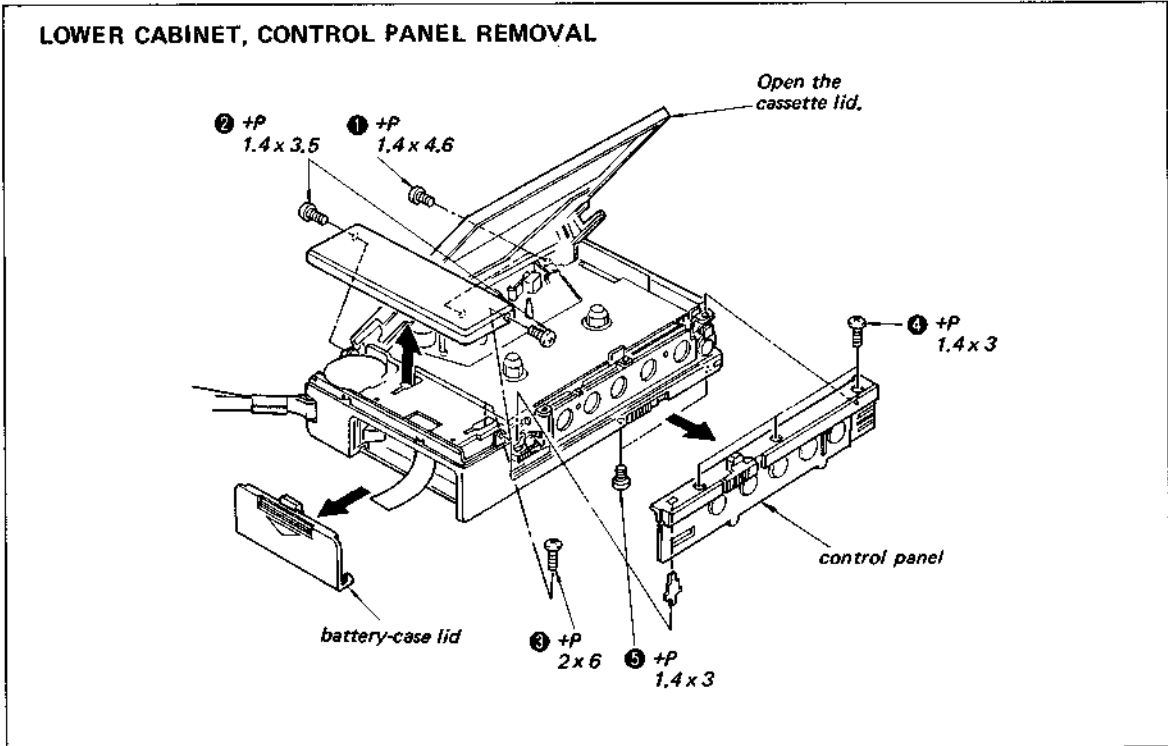


CASSETTE LID REMOVAL

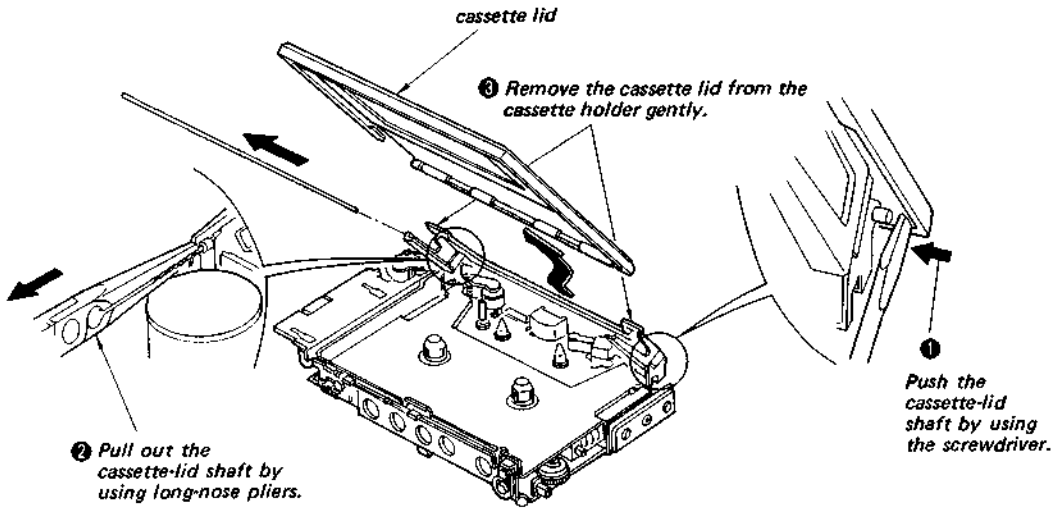


CASSETTE HOLDER, PINCH LEVER REMOVAL

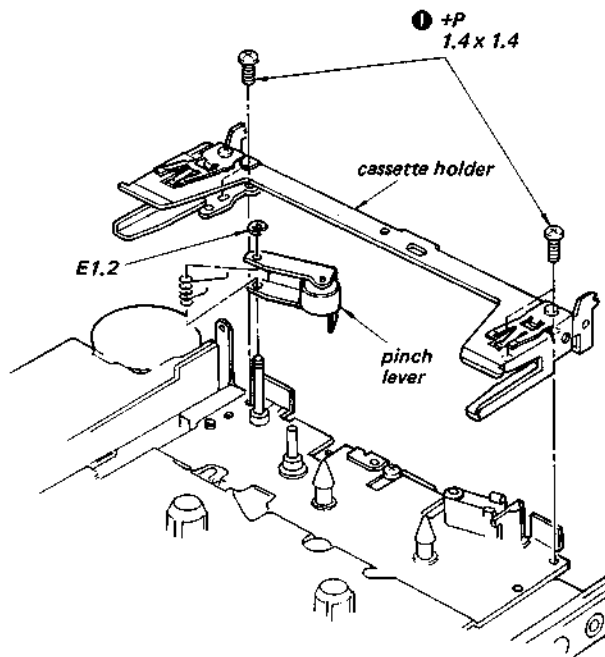


REEL PANEL REMOVAL

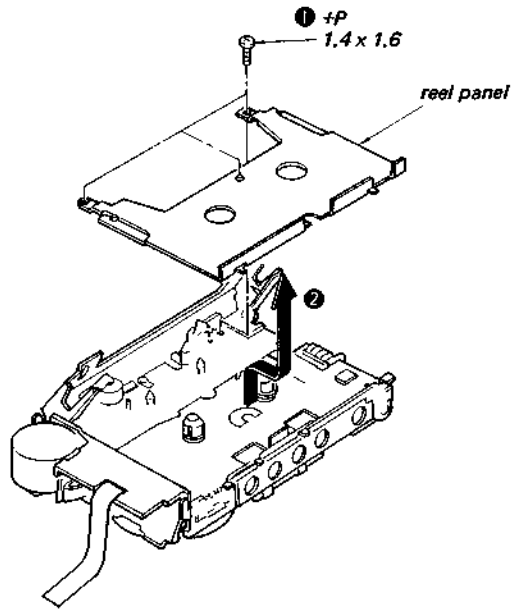


AUDIO BOARD REMOVAL

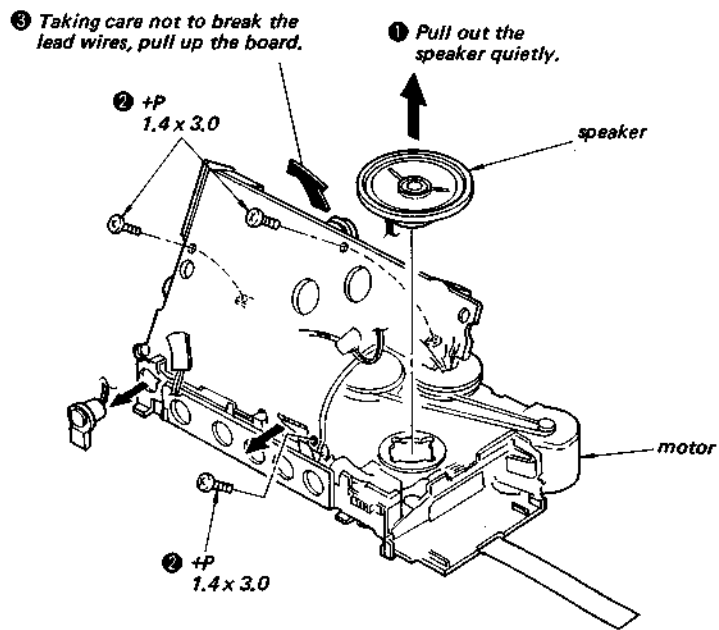

CONTROL BOARD REMOVAL

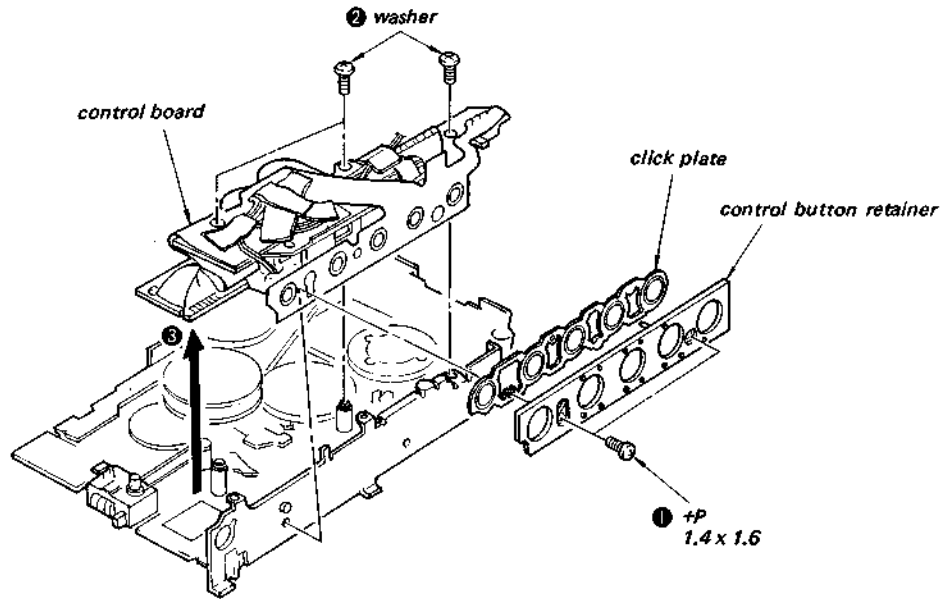

MOTOR REMOVAL

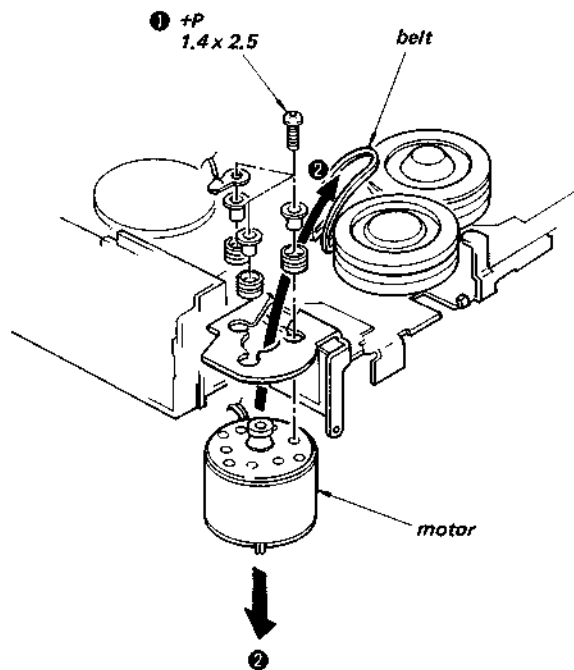

**SECTION 4
ADJUSTMENTS**

4.1. MECHANICAL ADJUSTMENTS AND MEASUREMENT

PRECAUTION

1. Clean the following parts with a denatured-alcohol-moistened swab:

record/playback head	pinch roller
erase head	rubber belts
capstan	idlers
2. Demagnetize the record/playback head with a head demagnetizer.
3. Do not use a magnetized screwdriver for the adjustments.
4. After the adjustments, apply suitable locking compound to the parts adjusted.
5. The adjustments should be performed with the rated power supply voltage unless otherwise noted.

Torque Measurement


Torque	Torque meter	Meter reading
Forward	CQ-102B	26 – 36 g·cm (0.36 – 0.50 oz·inch)
Fast Forward	CQ-201A	More than 85 g·cm (More than 1.18 oz·inch)
Rewind	CQ-201A	More than 75 g·cm (More than 1.04 oz·inch)
Back Tension	CQ-102B	2.5 – 4 g·cm

Tape Pulling Force Measurement


Meter	Meter Reading
CQ-403	150 g ± 30 g (4.23 – 6.34 oz)

Head Height Adjustment

1. Prepare an adjustment cassette as shown below.

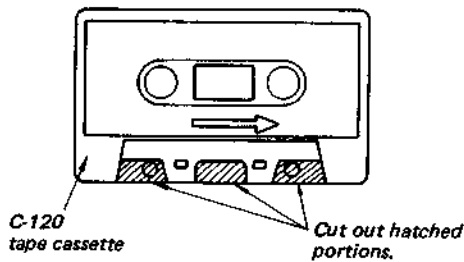


2. In record mode and viewing from the front, adjust the head heights to eliminate tape curl and tape twist at portions shown by arrows.

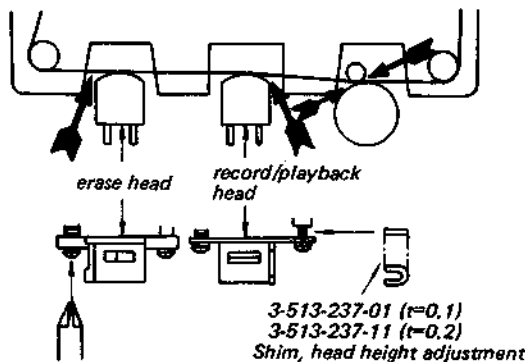



torque measurement

tape pulling force measurement

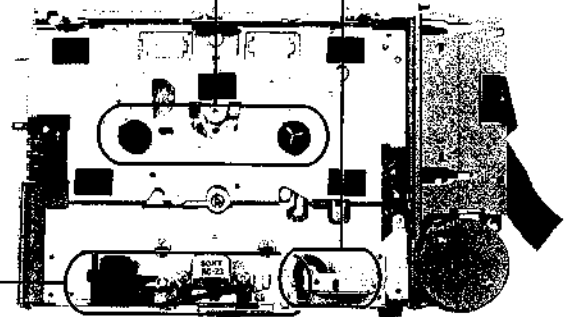



Pinch Roller Pressure Measurement

— Playback Mode —

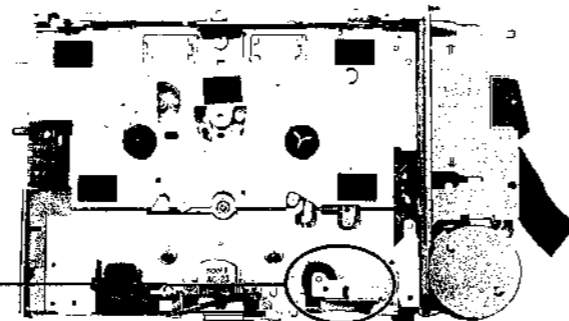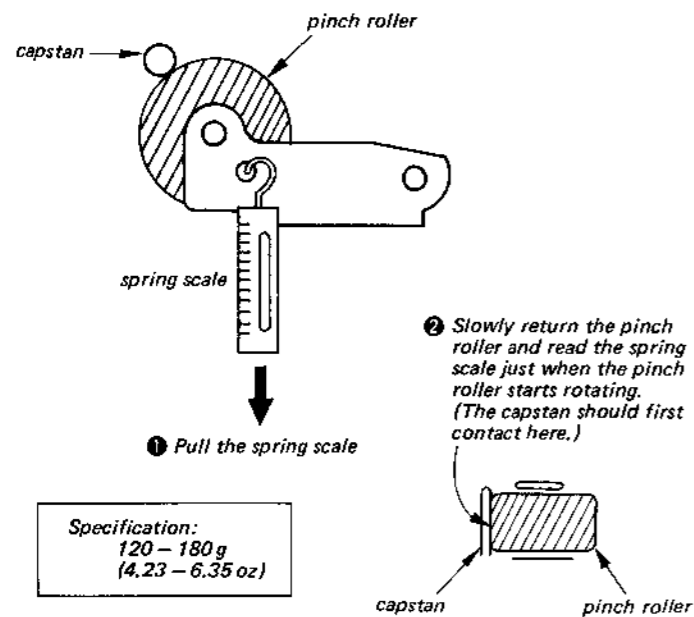

Solenoid Position Adjustment

— CUE or REV Mode —

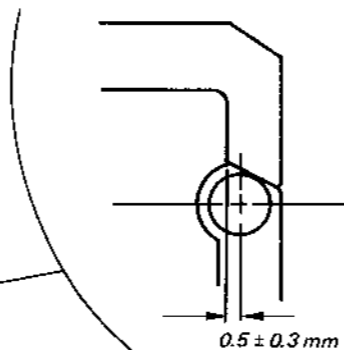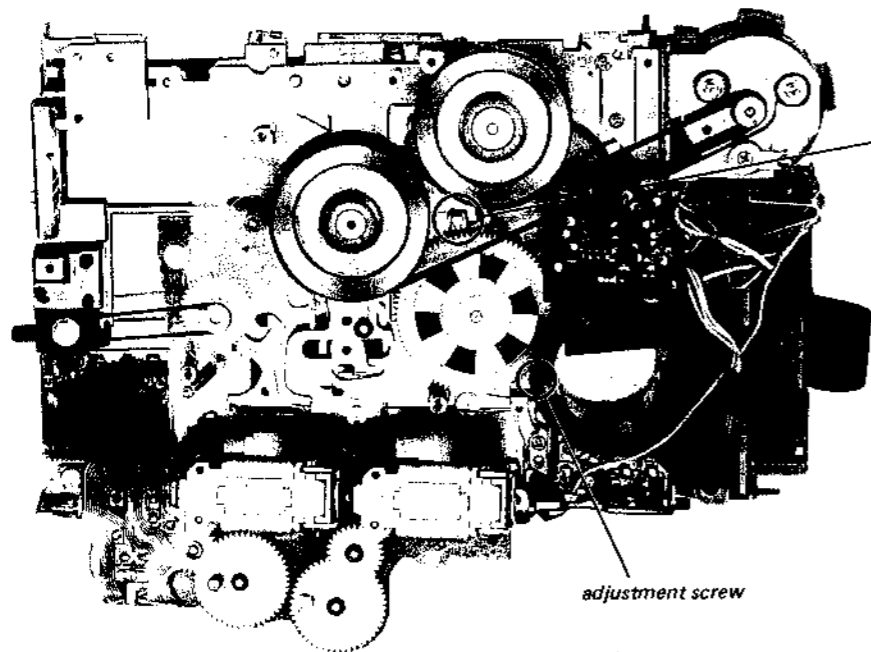

Adjust the screw for the specified clearance.

4-2. ELECTRICAL ADJUSTMENTS


Tape Speed Adjustment

Setting:

VOLUME control: mechanical mid
SPEED control: mechanical mid

Procedure:

Mode: playback

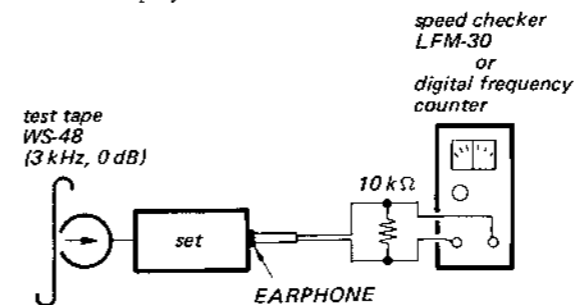


Specification:

Speed checker	Digital frequency counter
-3 to +2%	2,910 ~ 3,060 Hz

Frequency difference between the beginning and the end of the tape should be within 1% (30 Hz).

Adjustment Location:

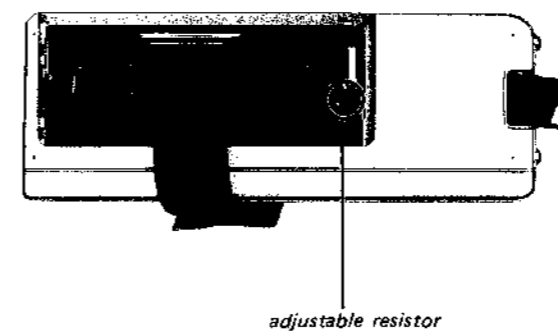


Record/playback Head Azimuth Adjustment

Setting:

VOLUME control: mechanical mid
SPEED control: mechanical mid

Procedure:

1. Mode: playback

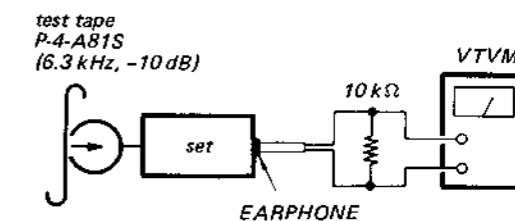


2. Turn the adjustment screw to obtain the maximum reading on VTVM.

Note: Several peaks may appear, but take the maximum.

3. After the adjustment, lock the adjustment screw with suitable locking compound.

Adjustment Location:

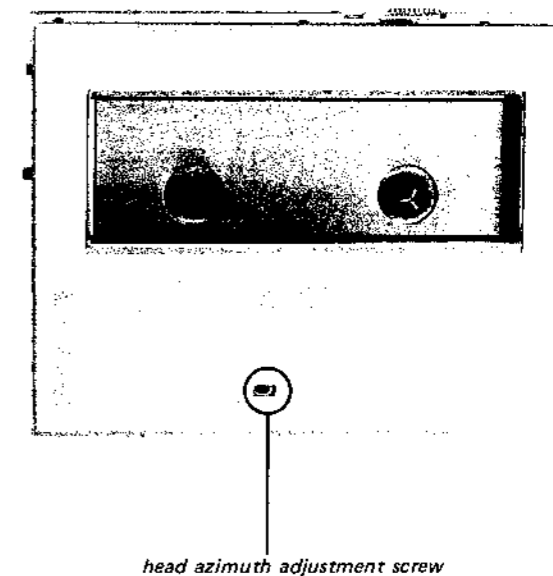

4-2. ELECTRICAL ADJUSTMENTS


Tape Speed Adjustment

Setting:

VOLUME control: mechanical mid
 SPEED control: mechanical mid

Procedure:

Mode: playback

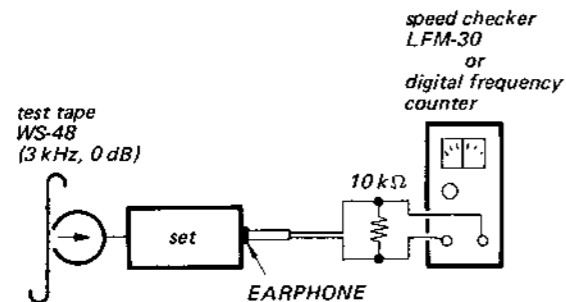


Specification:

Speed checker	Digital frequency counter
-3 to +2%	2,910 - 3,060 Hz

Frequency difference between the beginning and the end of the tape should be within 1% (30 Hz).

Adjustment Location:

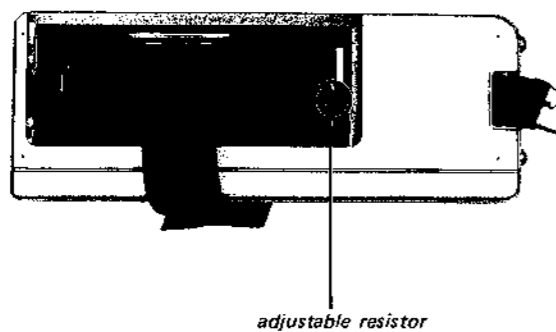

adjustable resistor

Record/playback Head Azimuth Adjustment


Setting:

VOLUME control: mechanical mid
 SPEED control: mechanical mid

Procedure:

1. Mode: playback

test tape
 P-4-AB1S
 (6.3 kHz, -10 dB)

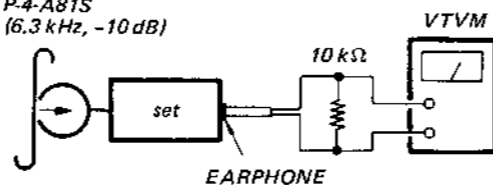


2. Turn the adjustment screw to obtain the maximum reading on VTVM.

Note: Several peaks may appear, but take the maximum.

3. After the adjustment, lock the adjustment screw with suitable locking compound.

Adjustment Location:

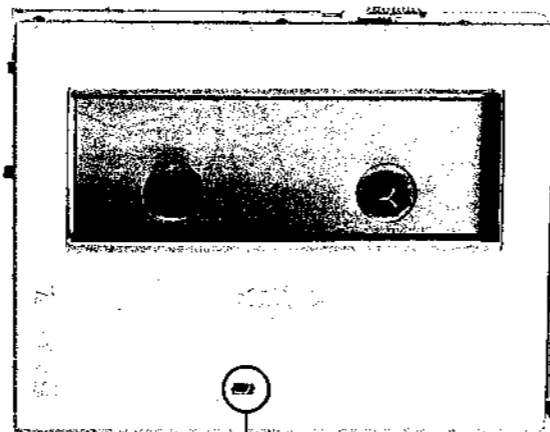


head azimuth adjustment screw


Record Bias Adjustment

Procedure:

1. Mode: record

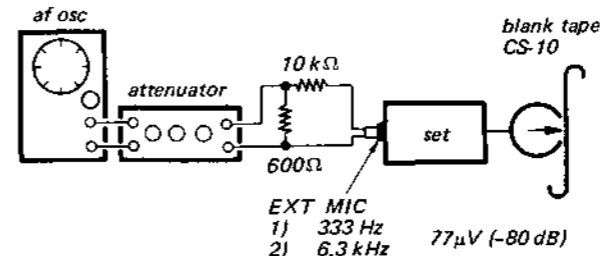

2. Mode: playback

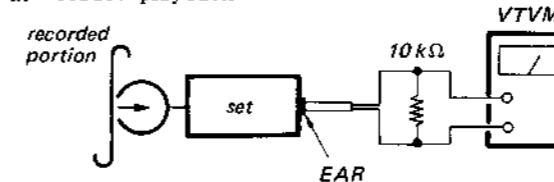


1. Play back the 330 Hz signal.

2. Adjust the VOL control for -20 dB (77.5 mV) reading on VTVM.

3. Change the pattern connection (A or B) so that the output level of 6.3 kHz signal is within 6 dB relative to that of 333 Hz signal.

Adjustment Location: Audio Board


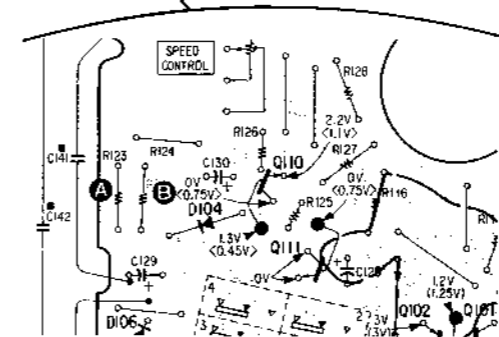


Microphone Sensitivity Adjustment


When replacing the microphone, perform this adjustment.

Mark of Microphone	Pattern Connection
BLACK	B
RED	R

Adjustment Location: Audio Board (Conductor Side)

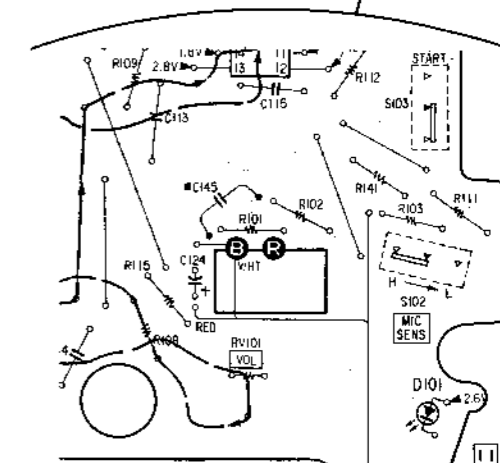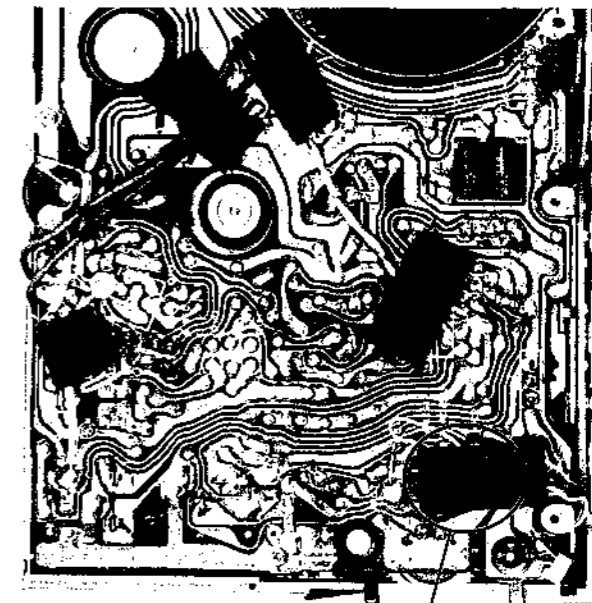


● Semiconductor Lead Layouts

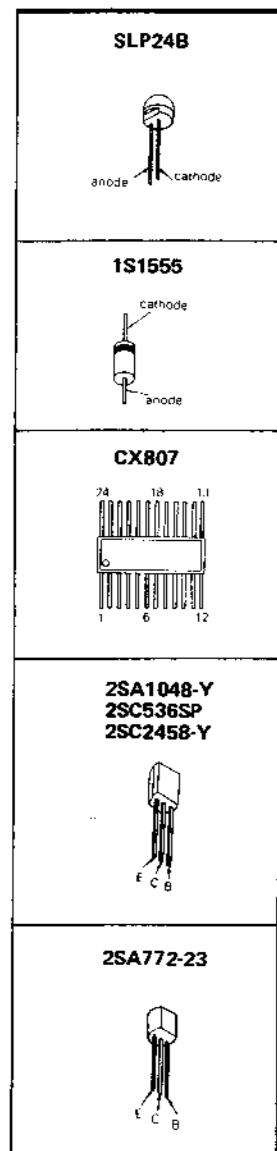




Note:

- Color code of sleeving over the end of the jacket.




- : parts extracted from the component side.
- : parts extracted from the conductor side.
- : part mounted on the conductor side.
- ⋯ : B + pattern
- : signal path
- : L-CH signal path
- : R-CH signal path

5-1. MOUNTING DIAGRAM

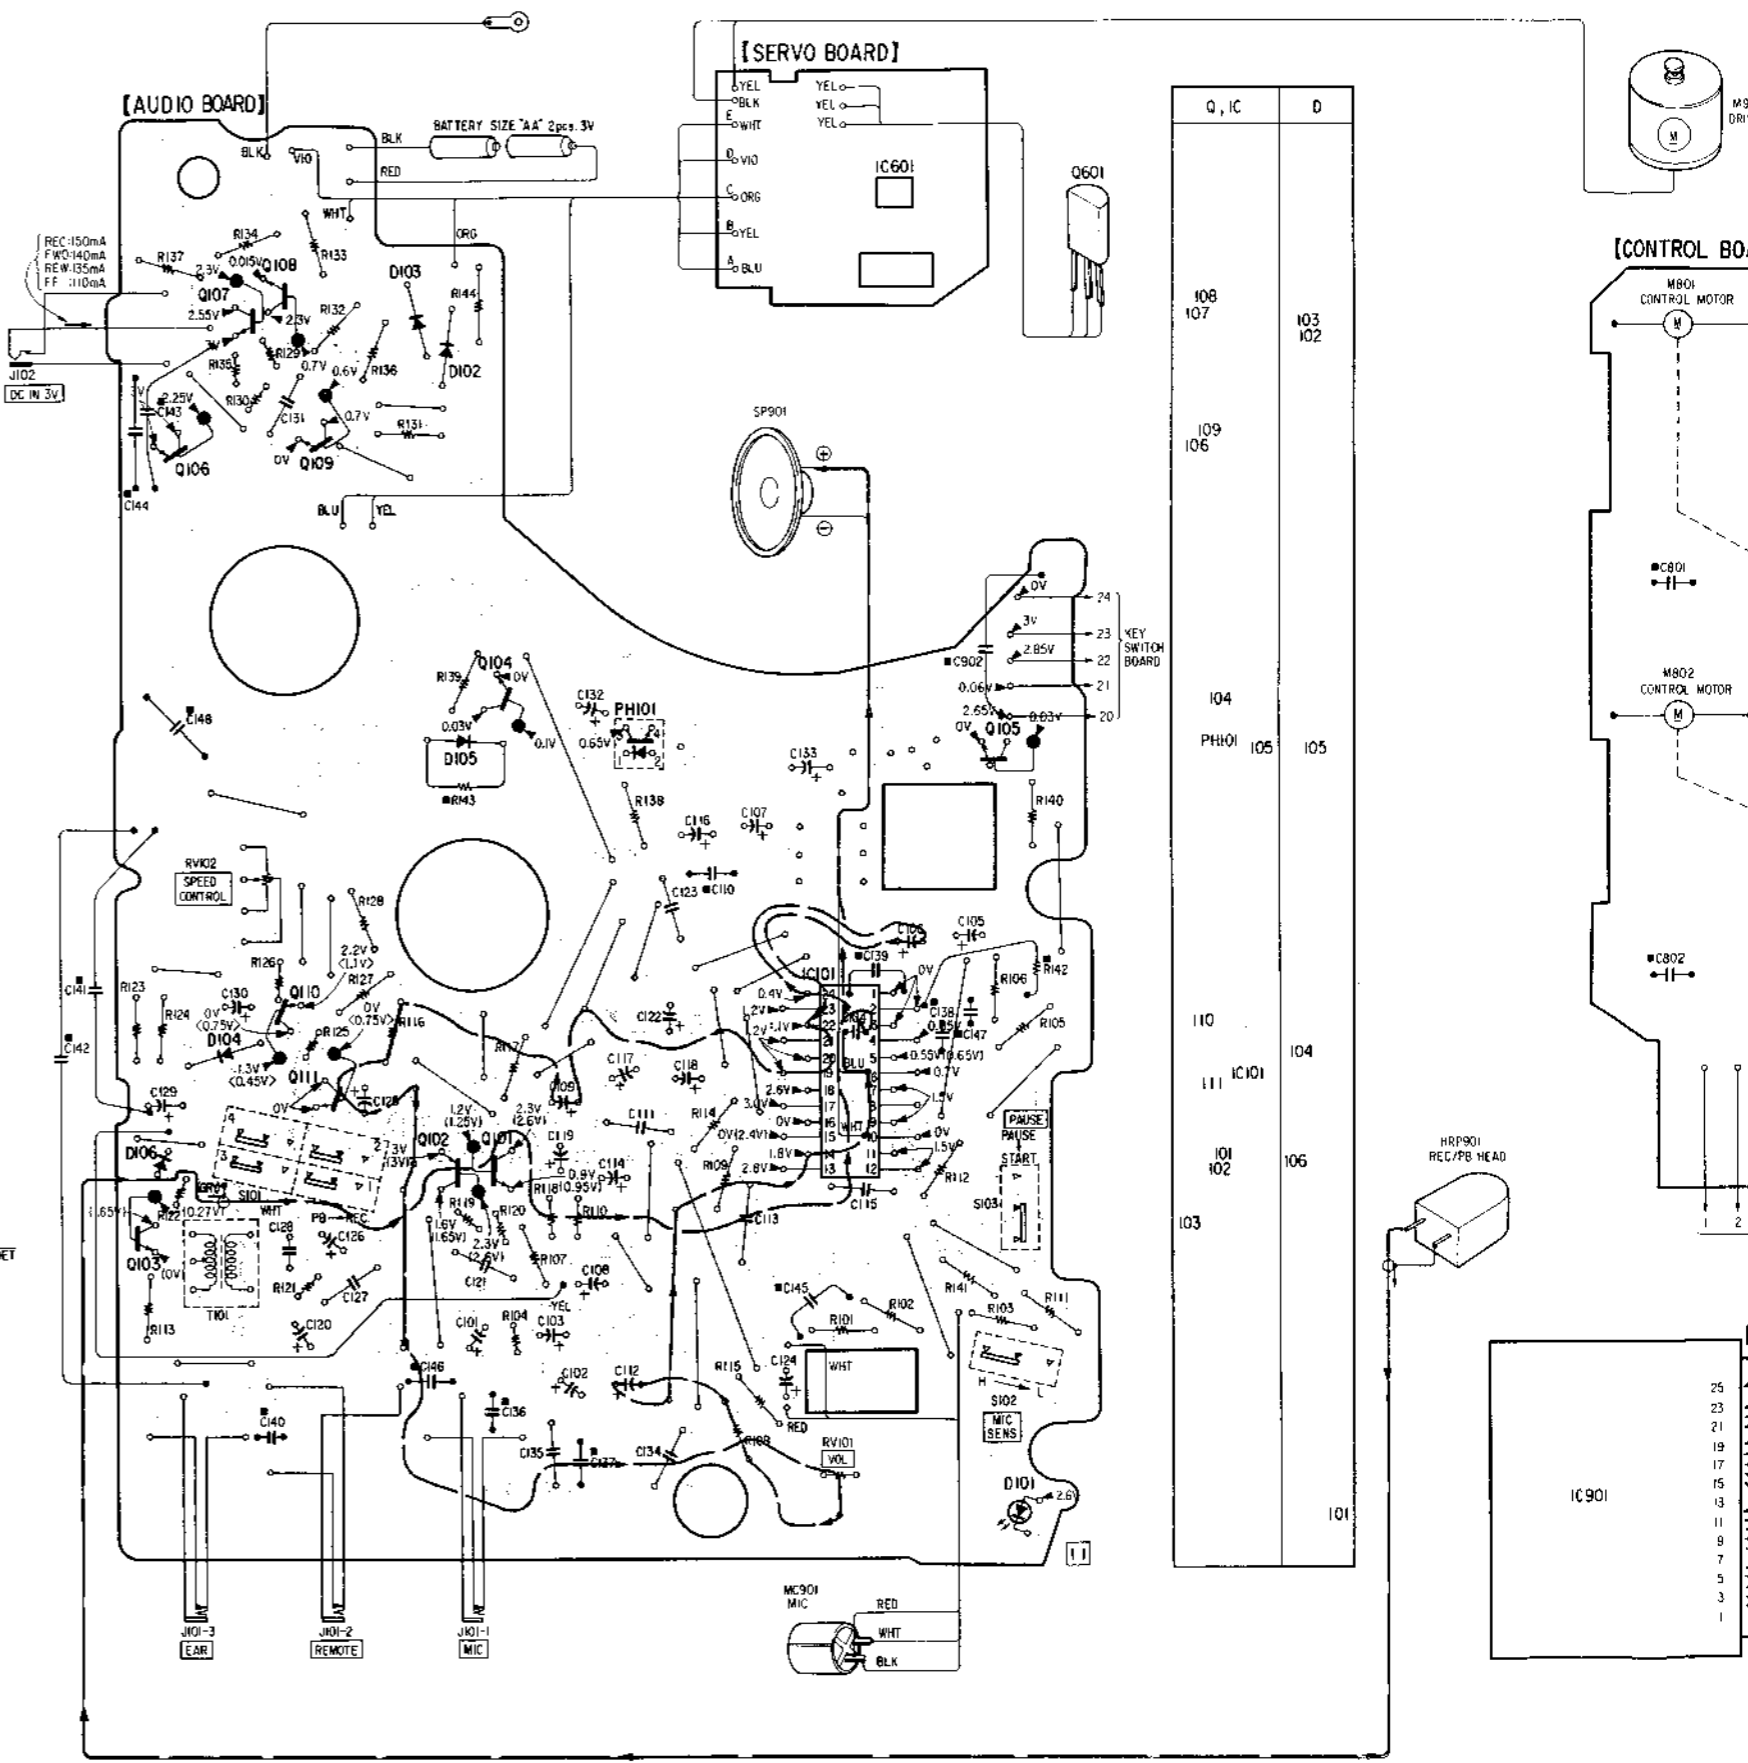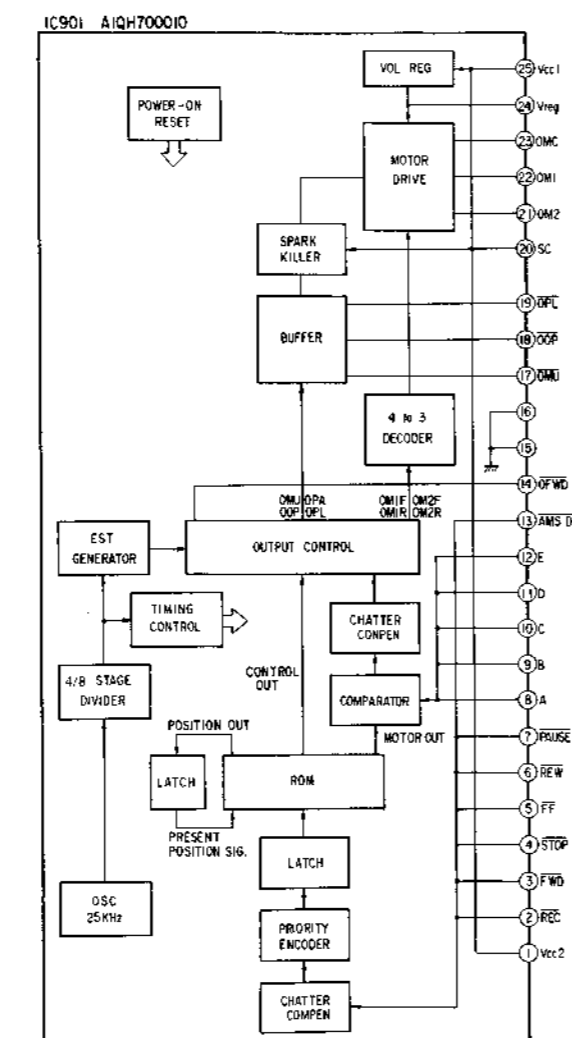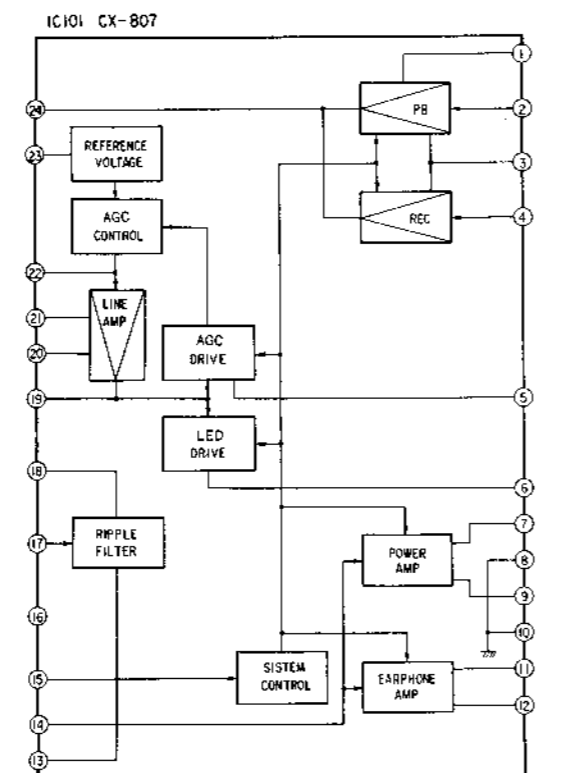


Q, IC	D
108	103
107	102
109	
106	
104	
PH101	105
110	104
111	IC101
101	106
103	101


C D E F G H I J

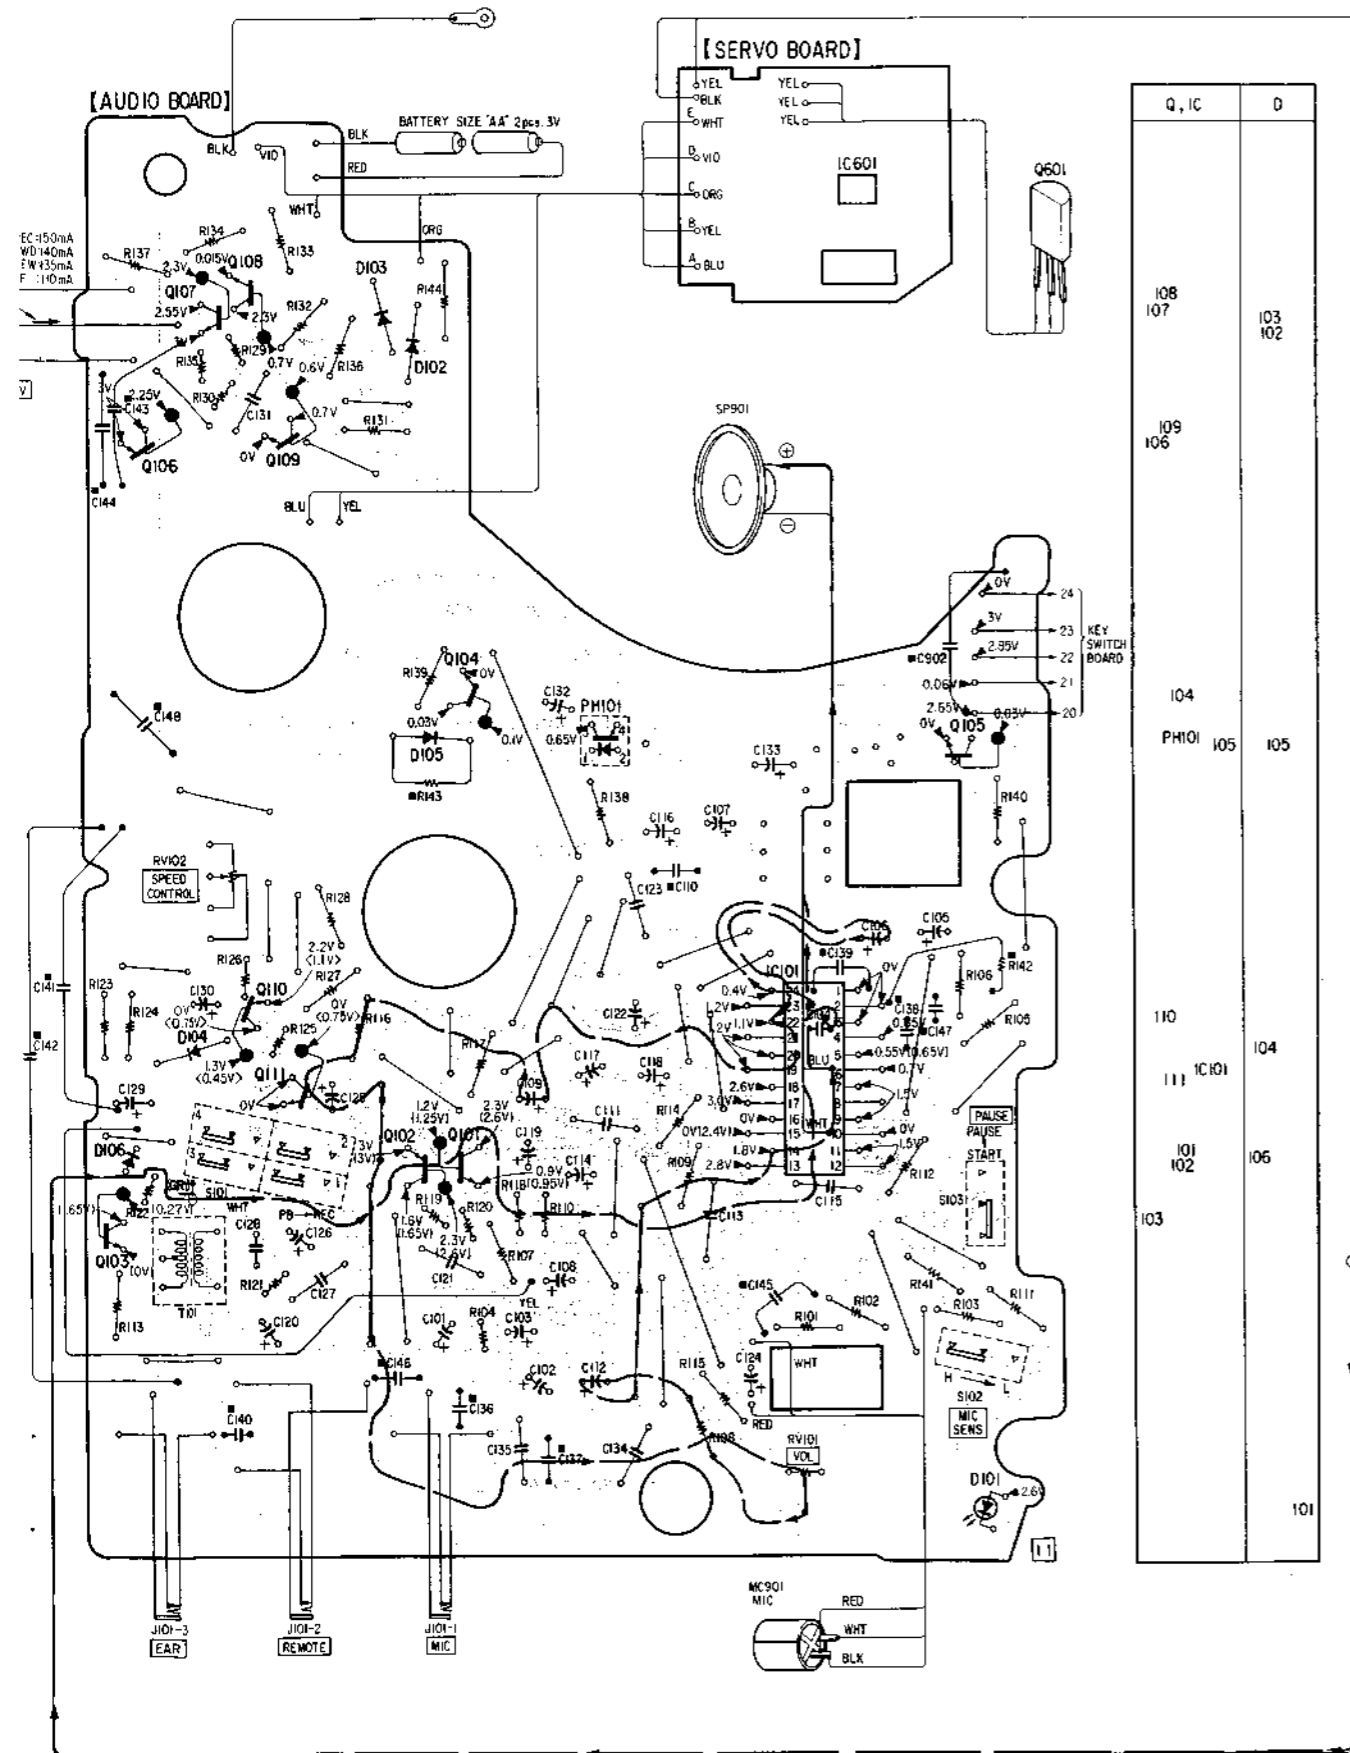

Q, IC	D
108	103
107	102
109	
106	
104	105
PH101	105
110	104
111	IC101
101	106
102	
103	101

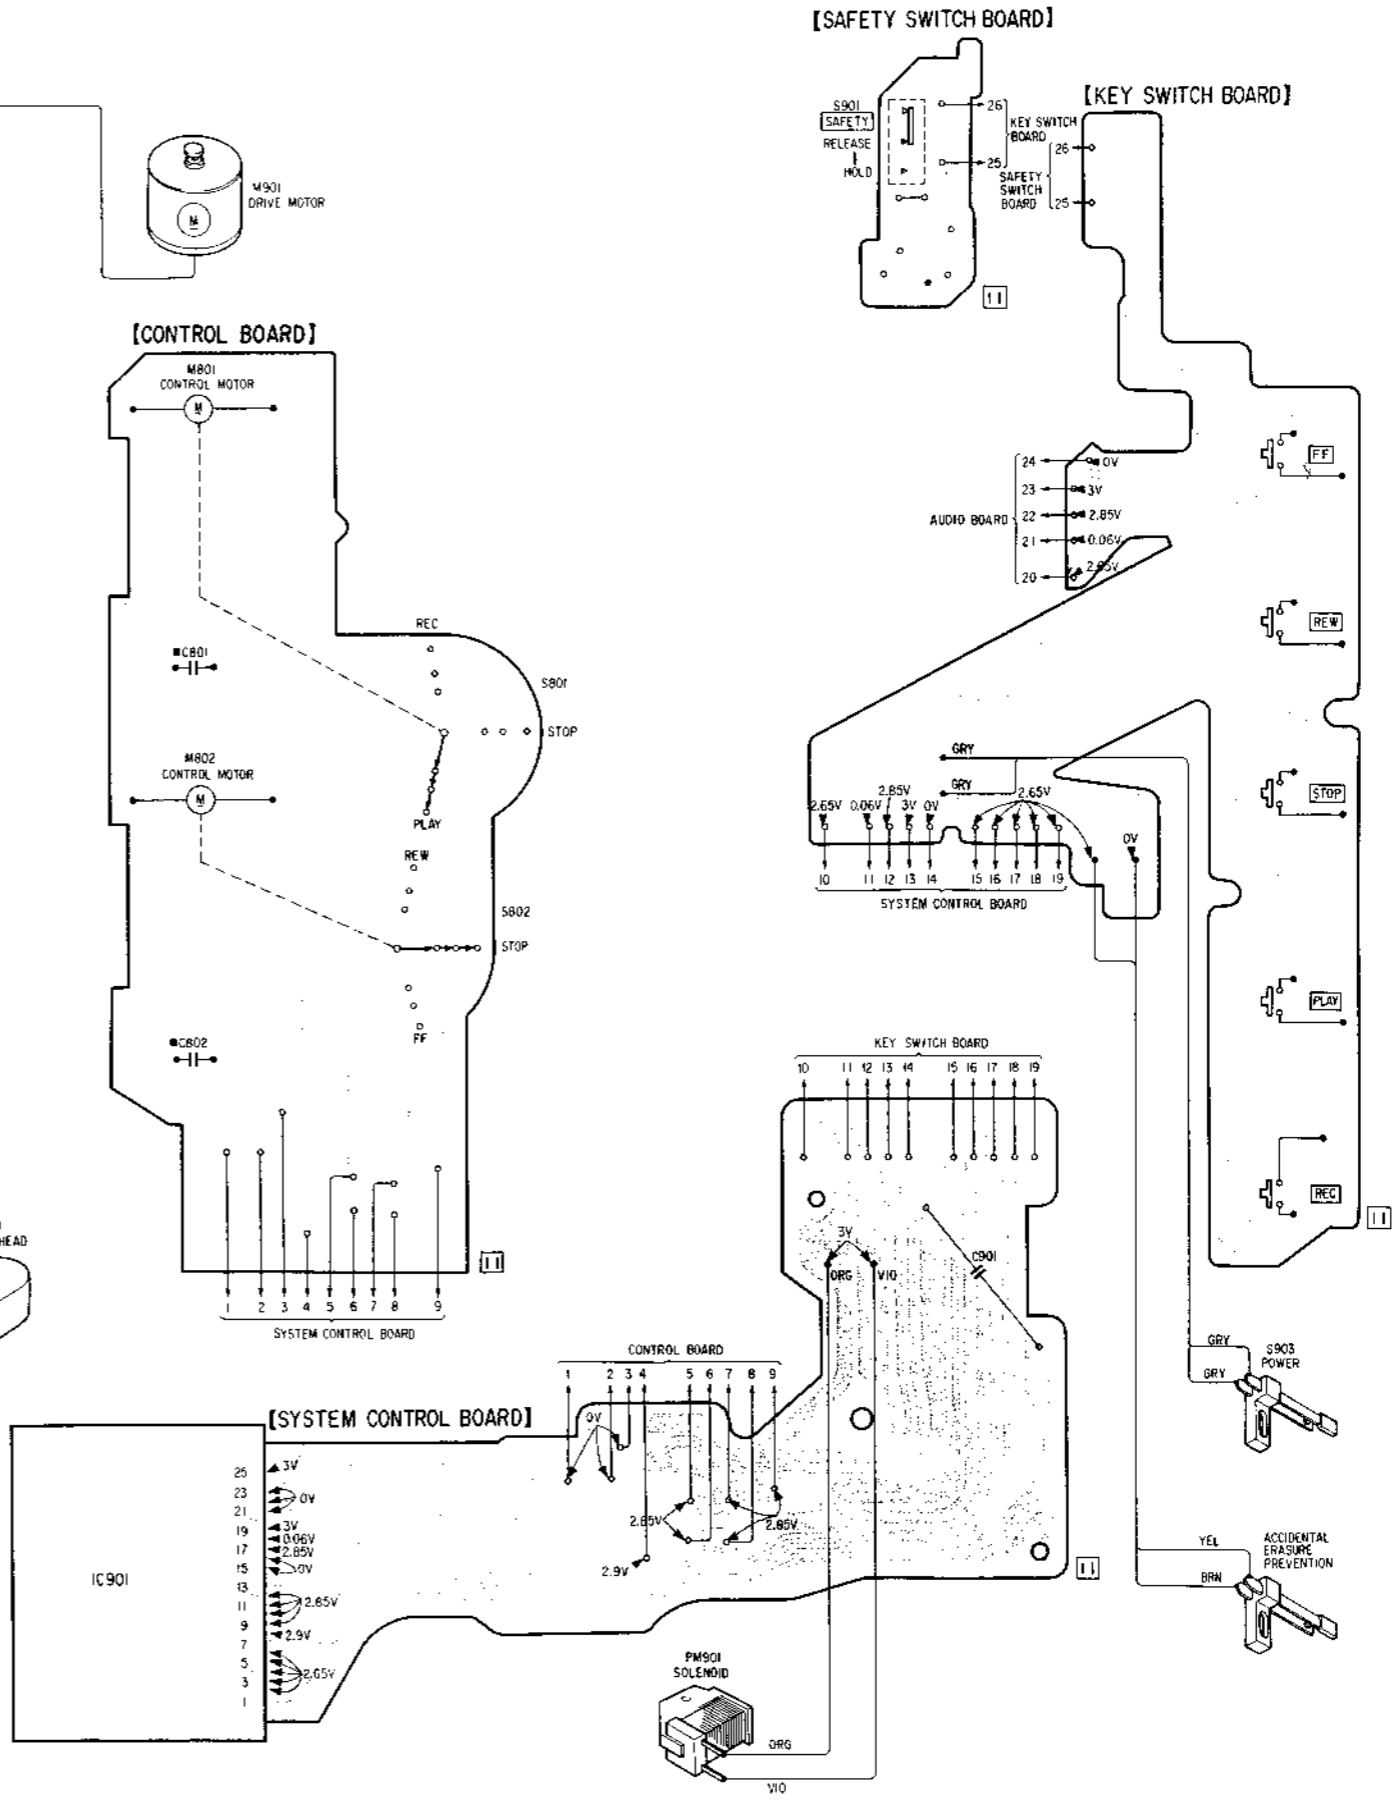

5-2. SCHEMATIC DIAGRAM

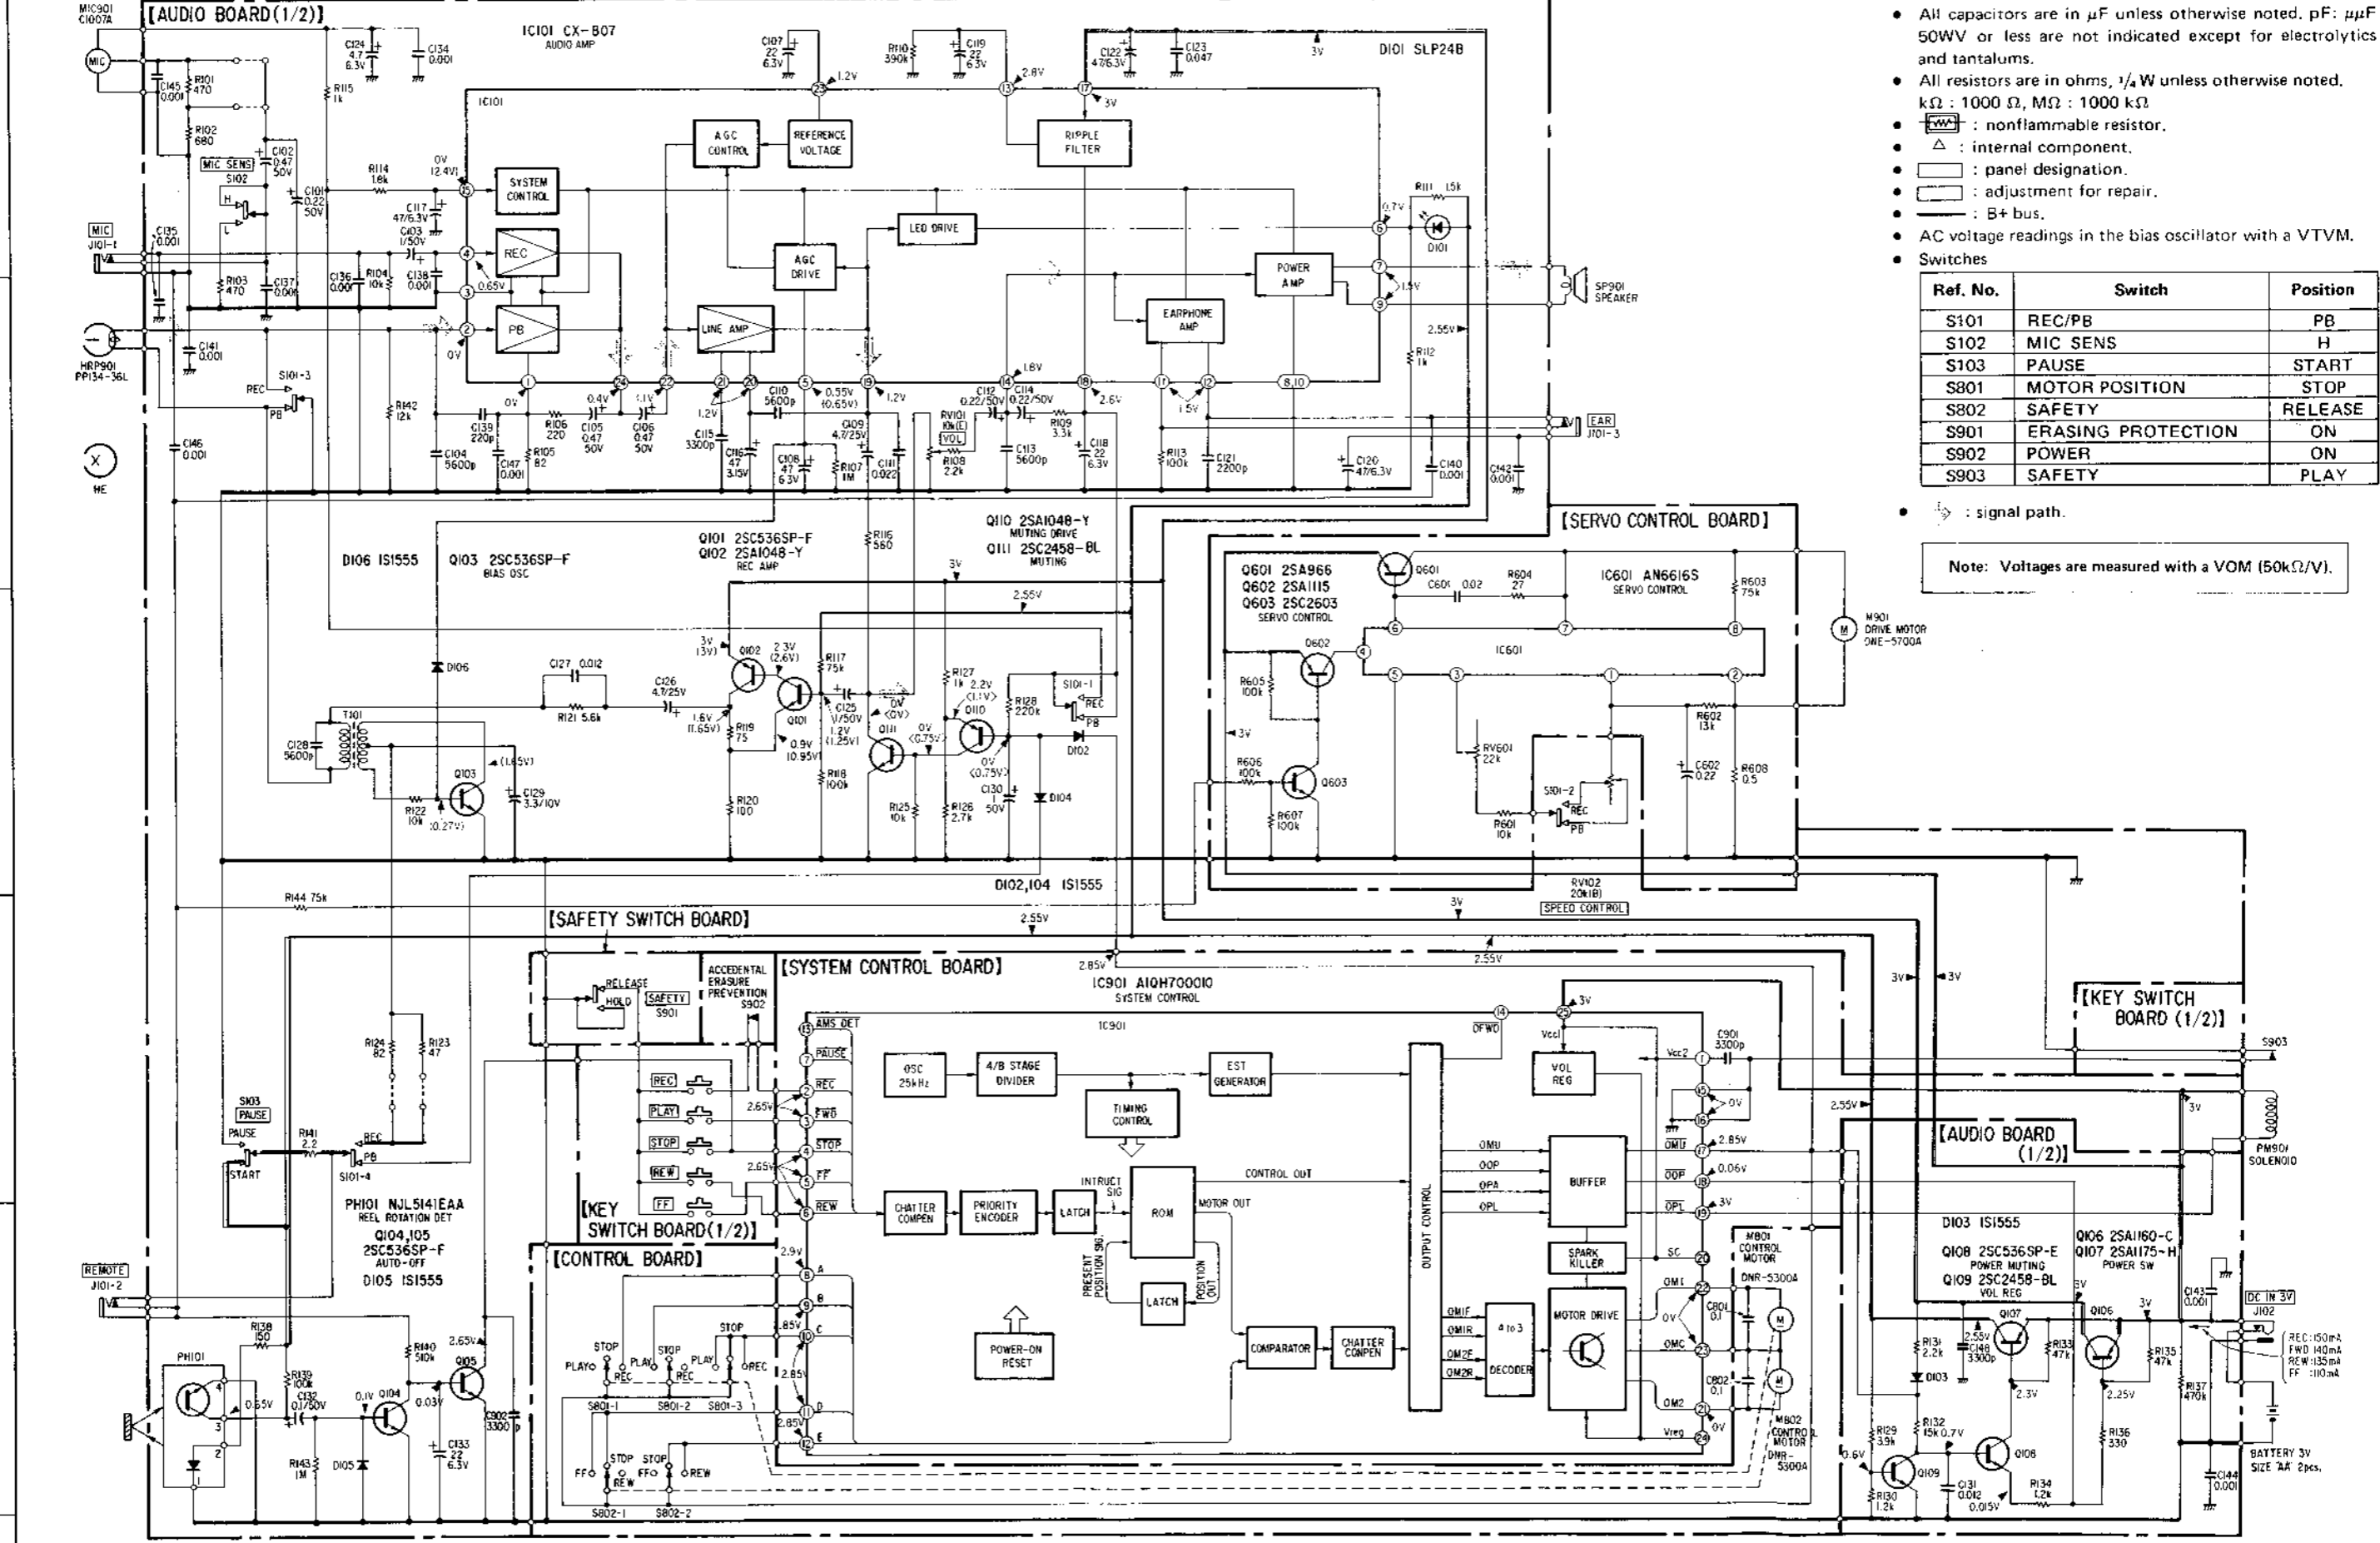

- Note:**
- All capacitors are in μF unless otherwise noted. pF : μpF 50WV or less are not indicated except for electrolytics and tantalums.
 - All resistors are in ohms, $\frac{1}{4}$ W unless otherwise noted. $\text{k}\Omega$: 1000 Ω , $\text{M}\Omega$: 1000 $\text{k}\Omega$
 - \square : nonflammable resistor.
 - \triangle : internal component.
 - \square : panel designation.
 - \square : adjustment for repair.
 - --- : B+ bus.
 - AC voltage readings in the bias oscillator with a VTVM.
 - Switches

Ref. No.	Switch	Position
S101	REC/PB	PB
S102	MIC SENS	H
S103	PAUSE	START
S801	MOTOR POSITION	STOP
S802	SAFETY	RELEASE
S901	ERASING PROTECTION	ON
S902	POWER	ON
S903	SAFETY	PLAY

Note: Voltages are measured with a VOM (50k Ω /V).

1



2


3


4

5

SECTION 6
EXPLODED VIEWS AND PARTS LIST

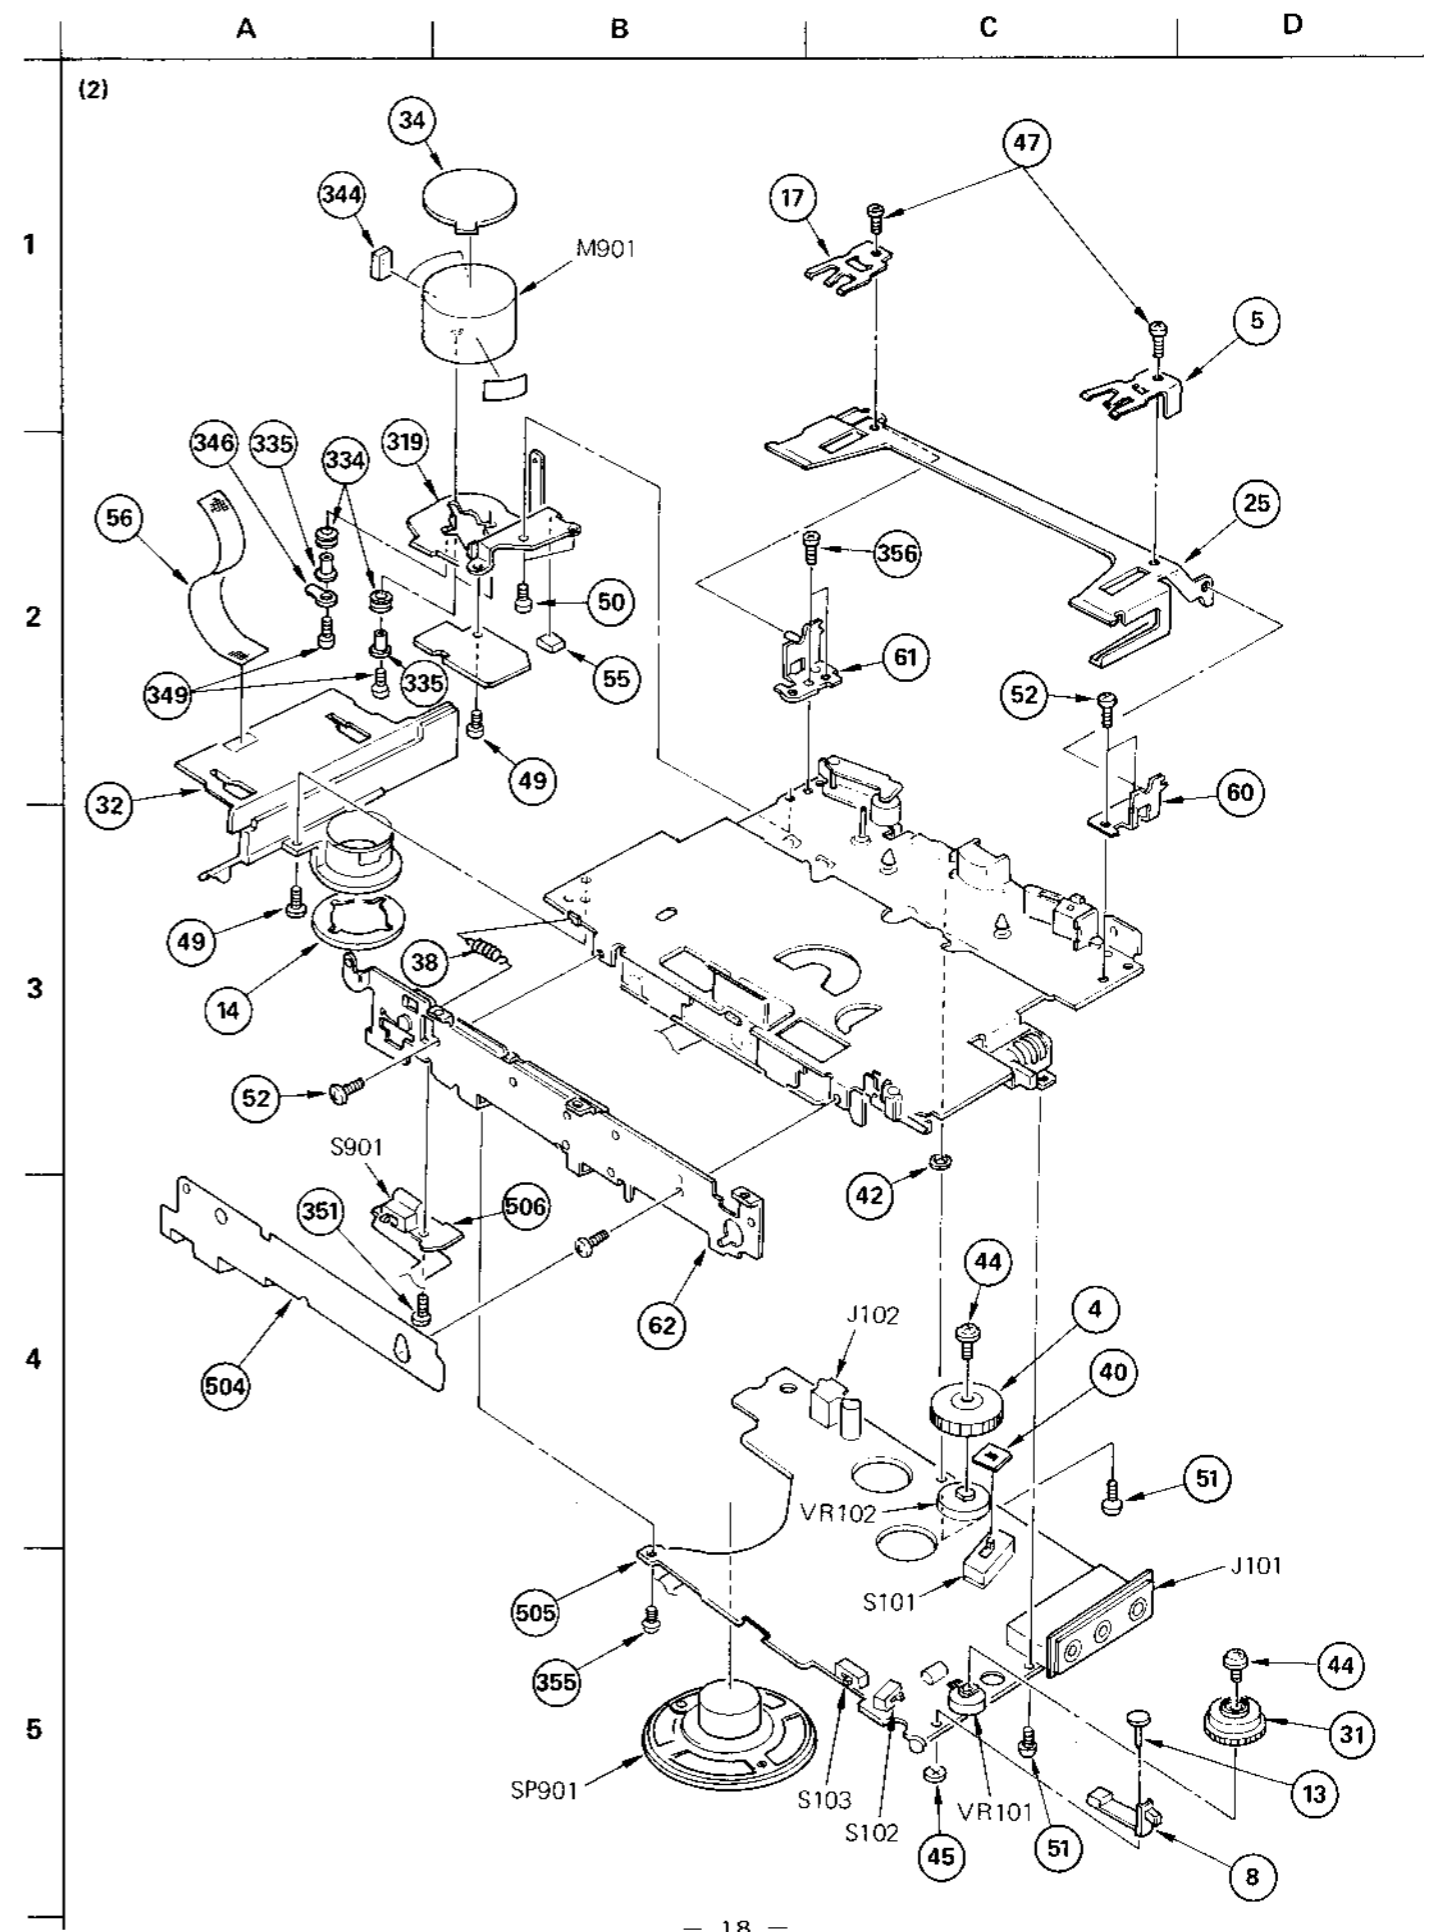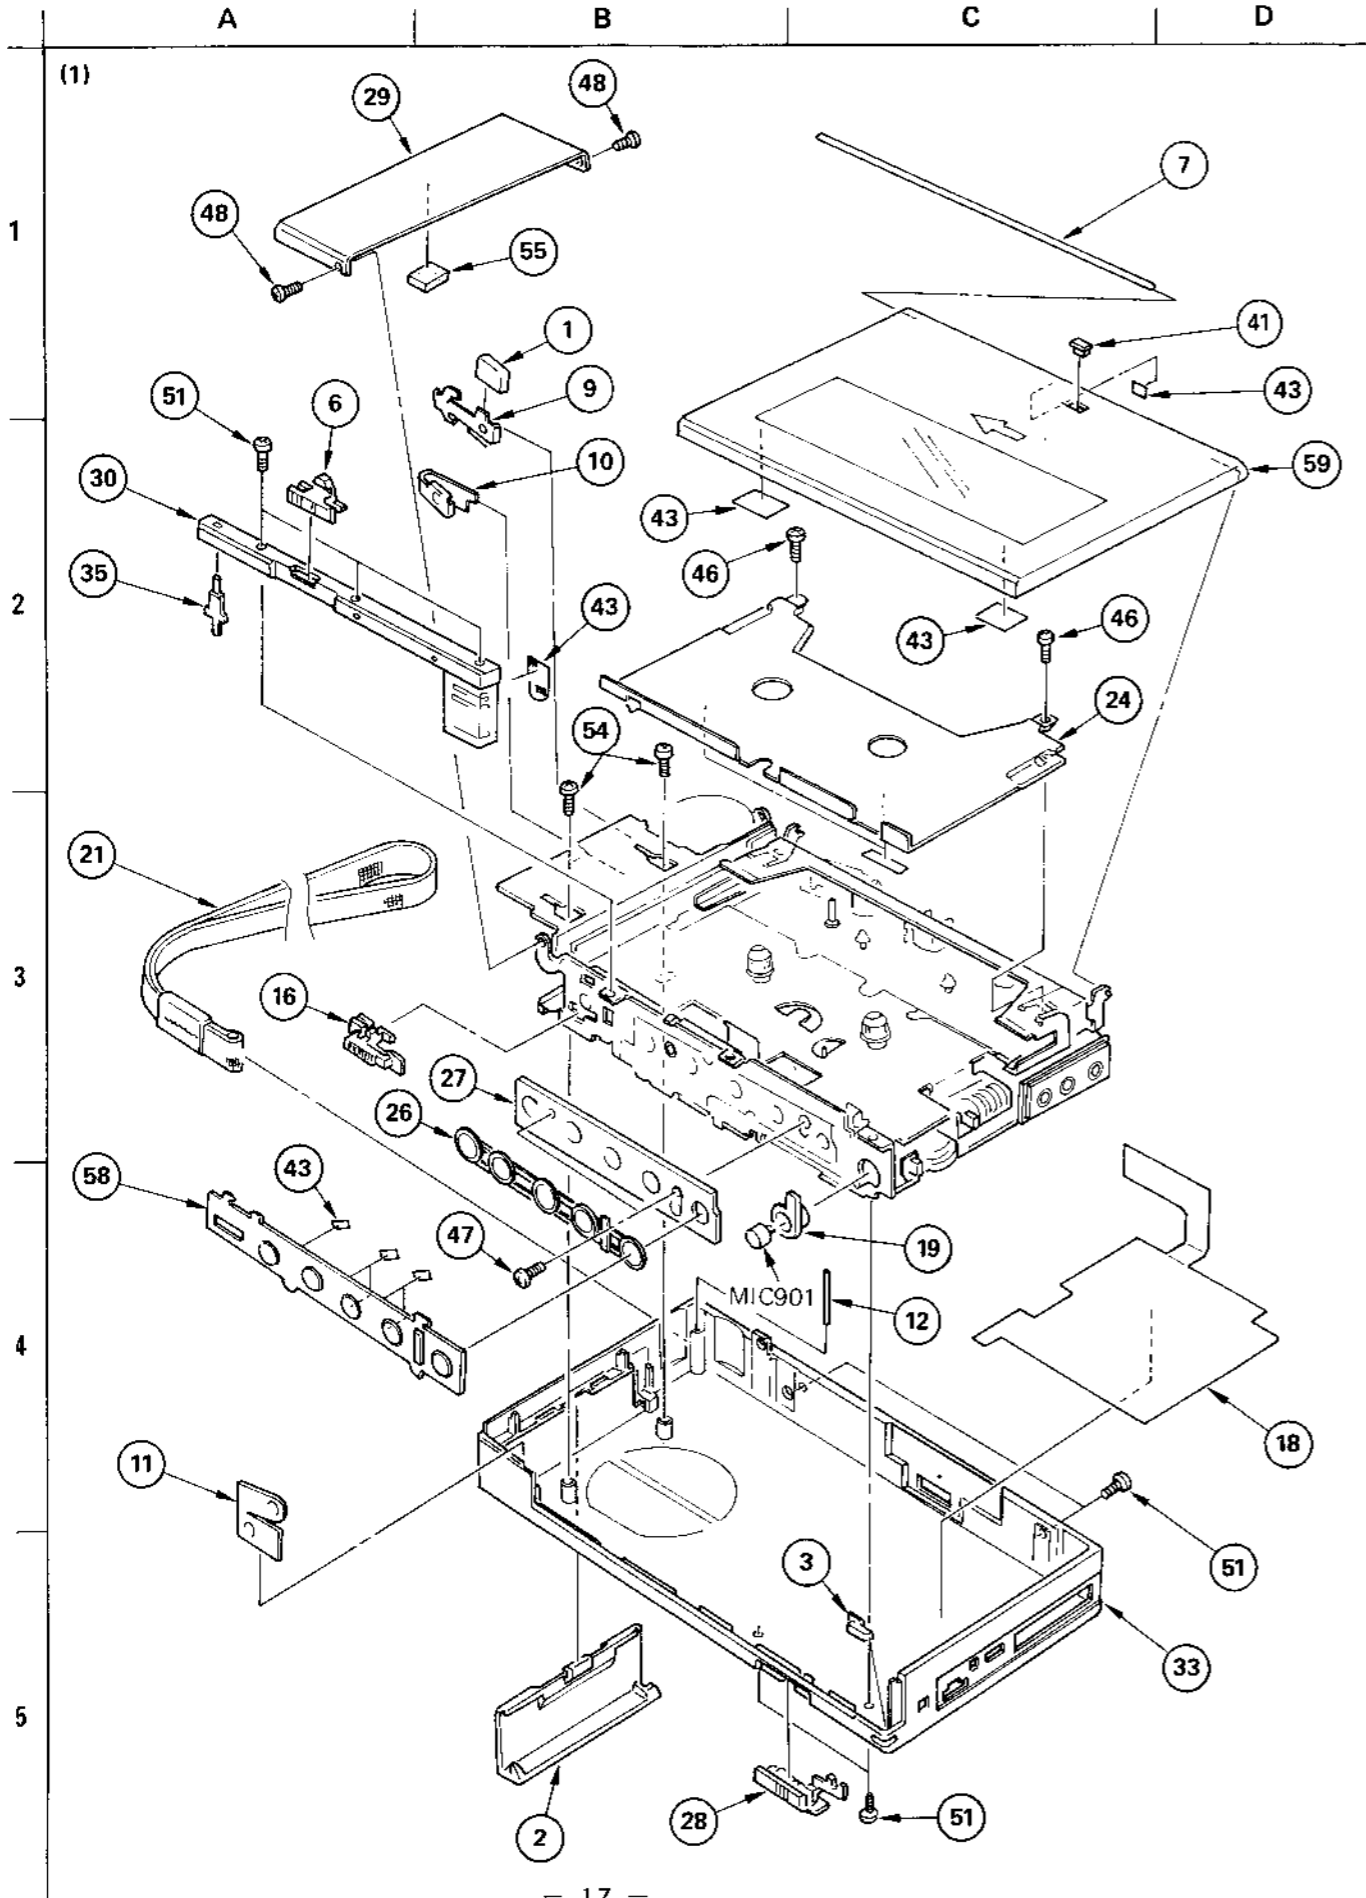

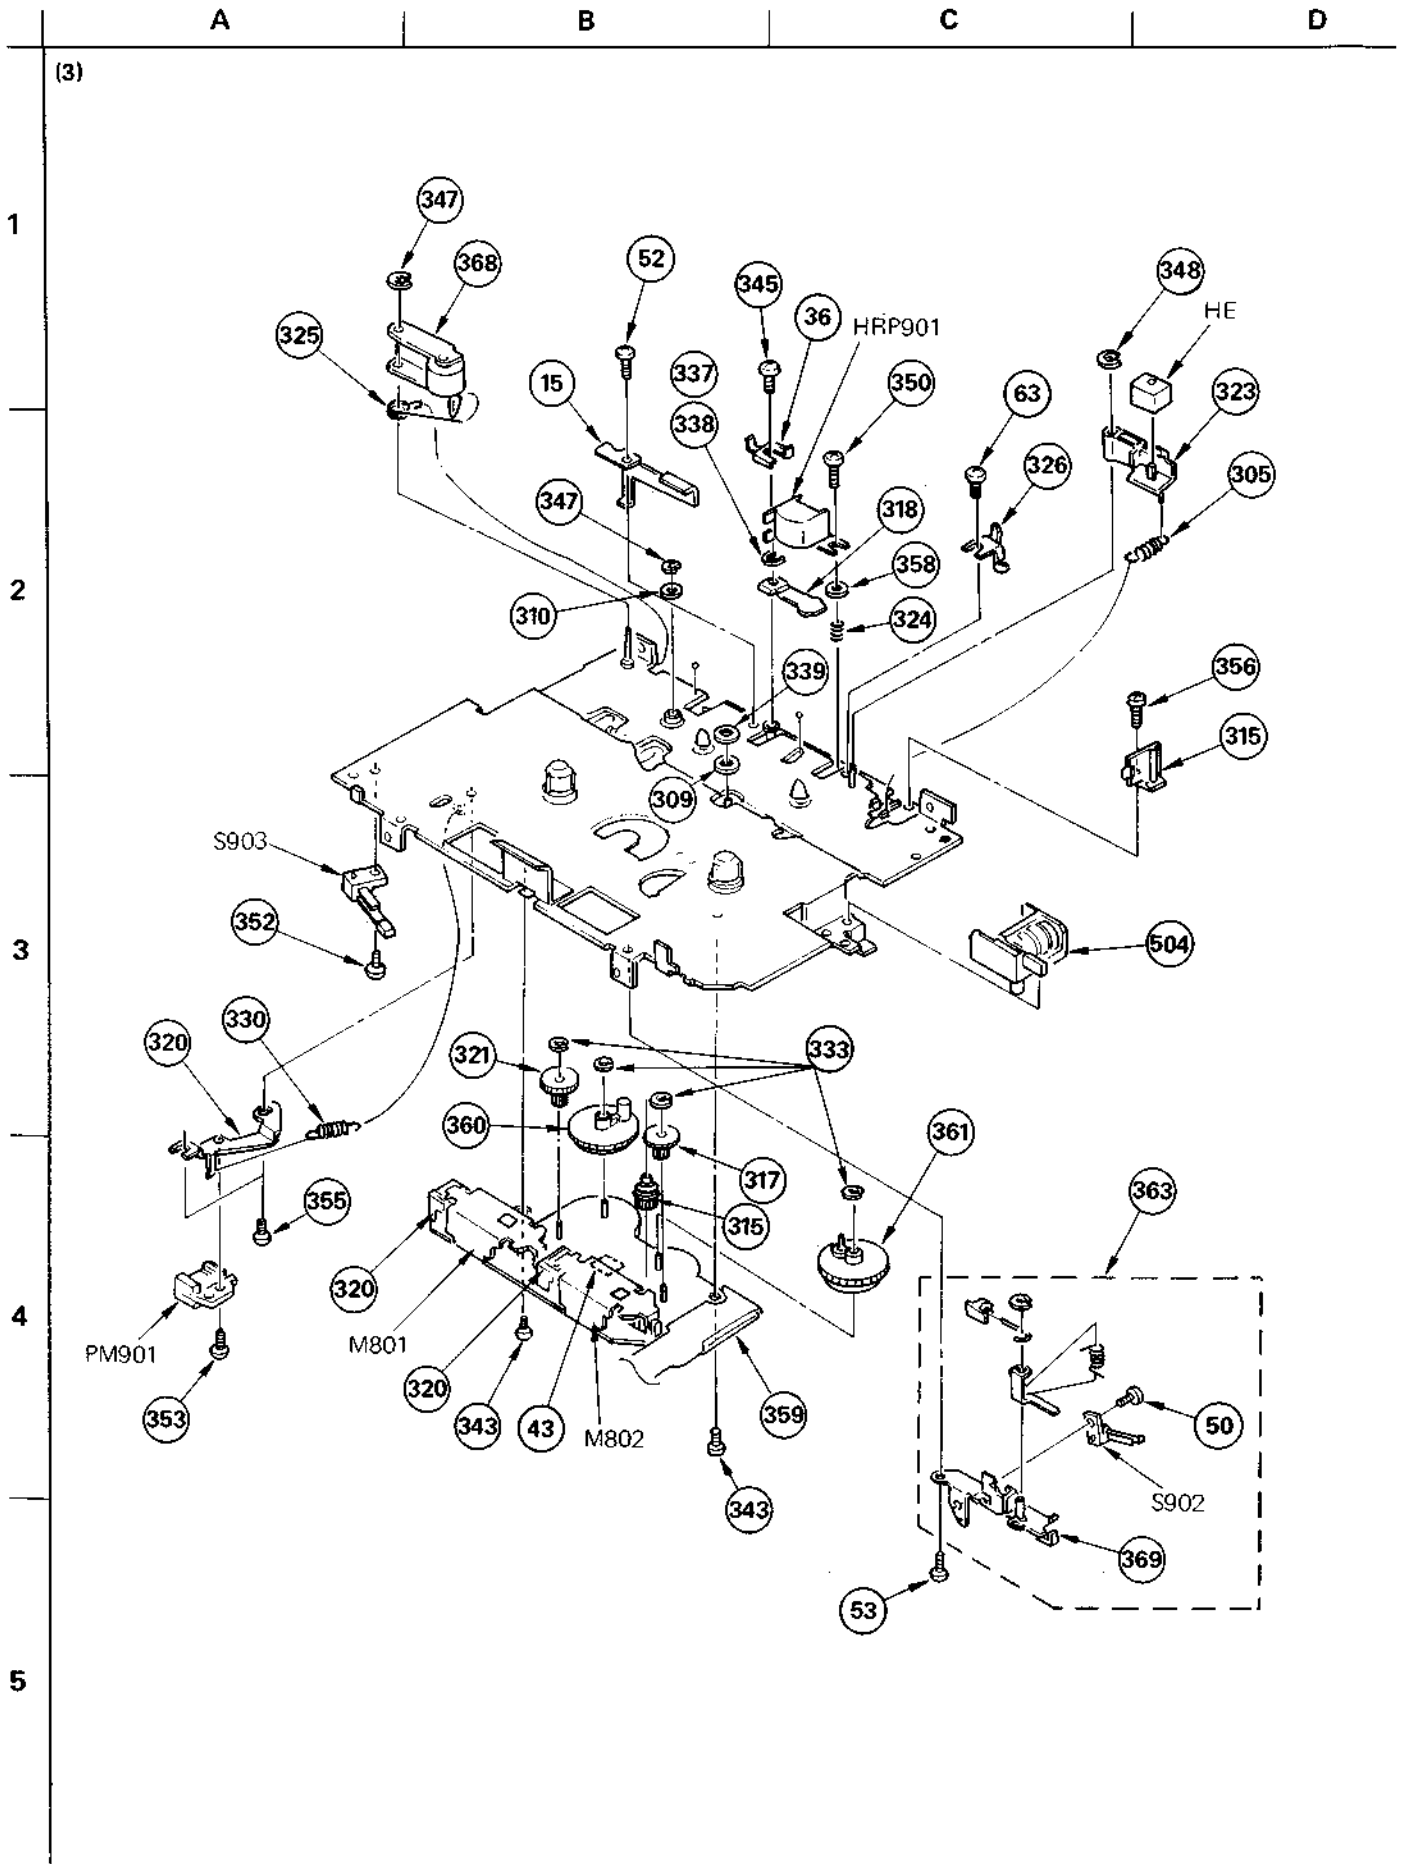

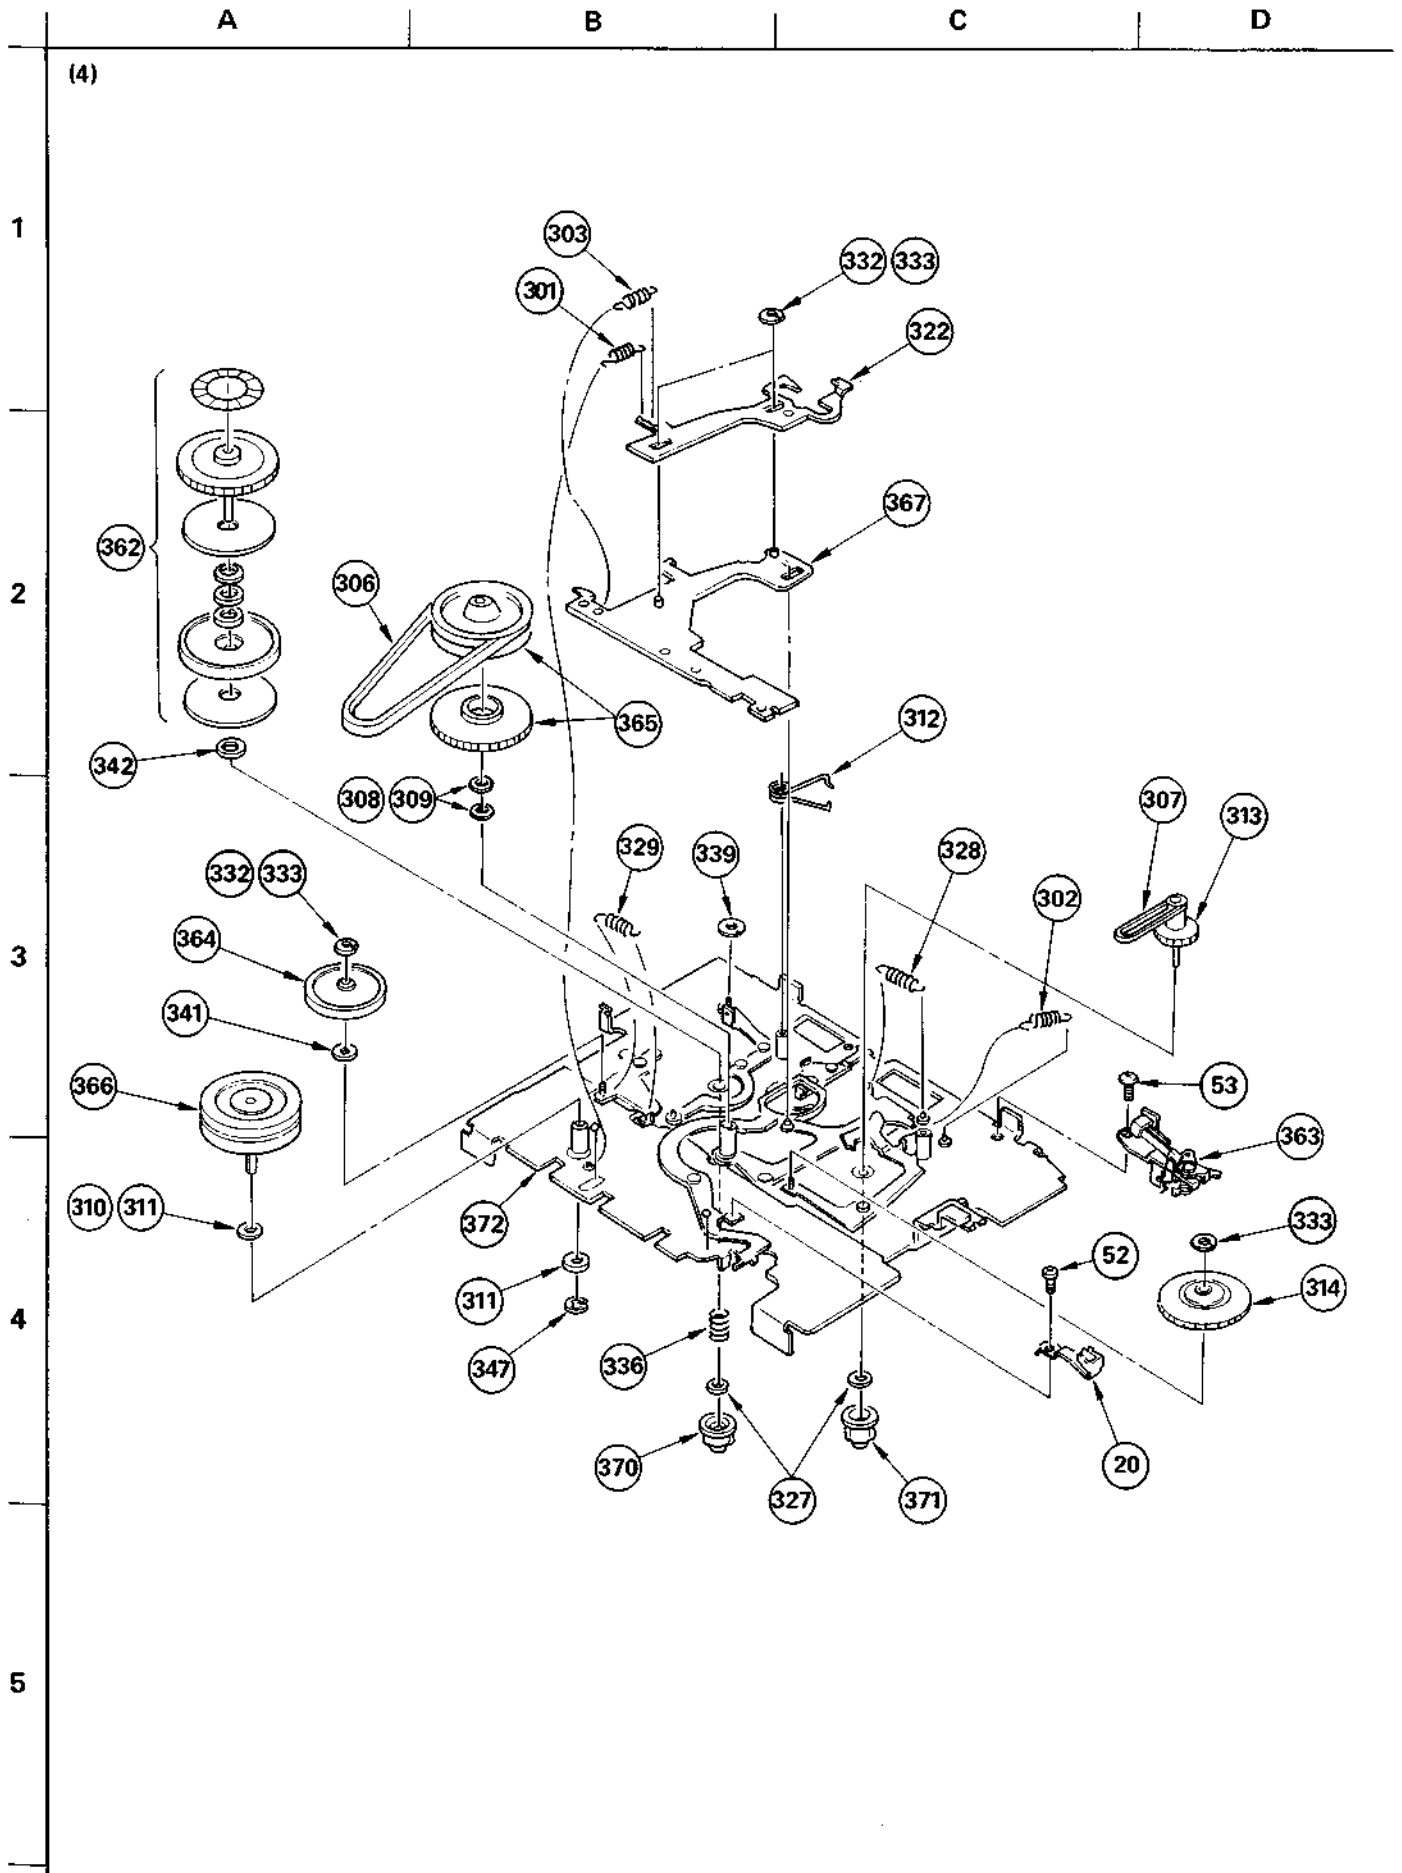

GENERAL SECTION

No.	Part No.	Description
1	3-308-401-00	RETAINER, BATTERY
2	3-308-404-00	(BLACK)...LID, BATTERY CASE
2	3-308-404-01	(SILVER)...LID, BATTERY CASE
3	3-308-405-00	WINDOW, LED
4	3-308-406-00	KNOB, SPEED CONTROL
5	3-308-409-00	SPRING (A)
6	3-308-410-11	(BLACK)...KNOB, EJECT
6	3-308-410-00	(SILVER)...KNOB, EJECT
7	3-308-411-00	SHAFT, LID, CASSETTE
8	3-308-413-00	KNOB, MICROPHONE SENSITIVITY
9	3-308-414-00	PIECE (A), CONTACT, BATTERY
10	3-308-415-00	PIECE (B), CONTACT, BATTERY
11	3-308-416-00	PIECE (C), CONTACT, BATTERY
12	3-308-417-00	SHAFT, STRAP
13	3-308-418-00	SHAFT, KNOB, MIC SENSITIVITY
14	3-308-419-00	CUSHION, SPEAKER
15	3-308-420-00	STOPPER, PC BOARD
16	3-308-421-00	KNOB, SAFETY
17	3-308-422-00	SPRING (B)
18	3-308-424-00	PAPER, SHIELD
19	3-308-425-00	CUSHION, MICROPHONE
20	3-308-427-00	SPRING
21	3-308-428-00	STRAP
22	3-308-430-00	RETAINER, REFLECTOR, PHOTO
23	3-308-431-00	SHEET, INSULATING
24	3-308-432-00	PANEL, REEL
25	3-308-434-00	HOLDER, CASSETTE
26	3-308-436-00	PLATE, CLICK
27	3-308-438-00	RETAINER, BUTTON, CONTROL
28	3-308-440-00	(BLACK)...KNOB, PAUSE
28	3-308-440-01	(SILVER)...KNOB, PAUSE
29	3-308-441-00	(SILVER)...PANEL
29	3-308-441-11	(BLACK)...PANEL
30	3-308-442-00	(SILVER)...STRIP, ORNAMENTAL
30	3-308-442-11	(BLACK)...STRIP, ORNAMENTAL
31	3-308-443-00	KNOB, CONTROL
32	3-308-446-00	CASE, BATTERY
33	3-308-447-00	(SILVER)...CABINET (LOWER)
33	3-308-447-11	(BLACK)...CABINET (LOWER)
34	3-308-546-00	PLATE, SHIELD, MOTOR
35	3-308-547-00	KNOB, DETECTION
36	3-308-551-00	RETAINER (B), HEAD LEAD
37	3-527-213-00	(Canadian,AEP,UK,E)..LABEL, SERIAL NUMBER
38	3-570-590-00	SPRING, TENSION
39	3-570-611-00	SHEET, PROTECTION, LTD
40	3-570-921-00	SPACER, SWITCH

GENERAL SECTION

No.	Part No.	Description
41	3-579-767-00	(SILVER)...ORNAMENT, HOLE, ADJUSTMENT
41	3-579-767-11	(BLACK)...ORNAMENT, HOLE, ADJUSTMENT
42	3-701-437-11	WASHER
43	3-831-441-XX	CUSHION
44	3-880-990-00	SCREW (1.7X3), FLAT, (+) SPECIAL
45	7-624-200-00	PUSH NUT 1.5
46	7-627-551-07	SCREW, PRECISION +P 1.4X1.6
47	7-627-551-47	SCREW, PRECISION +P 1.4X1.4
48	7-627-551-67	(SILVER)...SCREW, PRECISION +P 1.4X3.5
48	7-627-551-68	(BLACK)...SCREW, PRECISION +P 1.4X3.5
49	7-627-850-07	SCREW, PRECISION +P 1.4X2
50	7-627-850-17	SCREW, PRECISION +P 1.4X2.5
51	7-627-850-27	(SILVER)...SCREW, PRECISION +P 1.4X3
51	7-627-850-28	(BLACK)...SCREW, PRECISION +P 1.4X3
52	7-627-850-47	(SILVER)...SCREW, PRECISION +P 1.4X1.6
52	7-627-850-48	(BLACK)...SCREW, PRECISION +P 1.4X1.6
53	7-627-850-37	SCREW, PRECISION +P 1.4X1.4
54	7-685-104-21	SCREW +P 2X6 TYPE2 SLIT
55	9-911-815-01	CUSHION
56	9-911-816-01	RIBBON, BATTERY
57	9-911-840-XX	STOPPER
58	A-3019-036-A	ORNAMENT ASSY, CONTROL BUTTON
59	X-3308-420-1	(BLACK)...LID ASSY, CASSETTE
59	X-3308-421-1	(SILVER)...LID ASSY, CASSETTE
60	X-3308-401-0	PLATE (A) ASSY, BEARING
61	X-3308-402-0	PLATE (B) ASSY, BEARING
62	X-3308-403-0	PLATE ASSY, CONTROL

ACCESSORY & PACKING MATERIAL

No.	Part No.	Description
101	3-308-445-00	CASE, CARRYING
102	3-308-535-00	SPACER
103	3-308-537-00	CUSHION
104	3-308-540-00	(US,Canadian)...CARTON, ADAPTER
105	3-308-542-00	(US,Canadian)...INDIVIDUAL CARTON
106	3-527-213-02	(AEP,UK,E,Canadian)..LABEL, SERIAL NUMBER
106	3-701-999-00	(US).....LABEL, SERIAL NUMBER
107	3-570-631-71	BAG, POLYETHYLENE
108	3-701-308-00	LABEL, PRODUCT COLOR
109	3-701-309-00	LABEL, PRODUCT COLOR
110	3-701-624-00	BAG, POLYETHYLENE
111	3-773-099-11	MANUAL, INSTRUCTION
112	3-793-828-11	QUESTIONNAIRE
113	8-893-527-00	TAPE, DEMO (CD-814)

MECHANISM SECTION

No.	Part No.	Description
301	2-270-832-00	SPRING, TENSION
302	3-308-426-00	CLAMP, LEAD, HEAD
303	3-308-450-00	SPRING, TENSION
304	3-308-451-00	SPRING, TENSION
305	3-308-452-00	SPRING, TENSION
306	3-308-460-00	BELT, CAPSTAN
307	3-308-463-00	BELT, COUNTER
308	3-308-471-01	WASHER (FR)
309	3-308-471-11	WASHER (FR)
310	3-308-472-01	WASHER (C) (t=0.25)
311	3-308-472-11	WASHER (C) (t=0.25)
312	3-308-475-00	SPRING
313	3-308-479-00	GEAR, S
314	3-308-486-00	GEAR, REW
315	3-308-500-00	GUIDE, TAPE
316	3-308-502-00	WHEEL, WORM
317	3-308-503-00	GEAR (B), FR-C
318	3-308-505-00	SPRING
319	3-308-513-00	BRACKET, MOTOR
320	3-308-515-00	BRACKET, PL
321	3-308-523-00	GEAR (C), FWD-C
322	3-308-525-00	LIMITER, HEAD CHASSIS
323	3-308-527-00	LEVER, ERASE HEAD
324	3-308-534-00	SPRING, COMPRESSION
325	3-308-544-00	SPRING (B)
326	3-308-551-00	RETAINER (B), HEAD LEAD
327	3-533-073-00	WASHER
328	3-545-588-00	SPRING, TENSION
329	3-547-668-00	SPRING, TENSION
330	3-559-402-00	SPRING, TENSION
331	3-563-105-00	SHEET, INSULATING, MOTOR PCB
332	3-570-615-00	POLY-WASHER (DIA.1.2)
333	3-570-615-11	POLY-WASHER (DIA.1.2)(t=0.4)
334	3-570-770-00	CUSHION (A), MOTOR
335	3-570-772-00	SPACER (M)
336	3-578-123-00	SPRING, COMPRESSION
337	3-578-138-01	SEAM
338	3-578-138-11	SEAM
339	3-578-242-00	WASHER
340	3-578-254-00	RING, RETAINING, E1.2
341	3-701-436-01	WASHER, 1.6
342	3-701-437-01	WASHER
343	3-703-502-11	SCREW
344	3-831-441-XX	CUSHION, CABINET UPPER
345	7-621-772-08	SCREW #8 2X3

NOTE:
 * Items with no part number and no description are not stocked because they are seldom required for routine service.
 * Items marked "▲" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
 * Due to standardization, parts with part numbers (Δ-ΔΔΔ-ΔΔΔ-XX or Δ-ΔΔΔΔ-ΔΔΔ-X) may be different from those used in the set.

CAPACITORS:
 * All capacitors are in μF. Common capacitors are omitted. Refer to the following lists for their part numbers.
 MF:μF, PF:μμF.
 RESISTORS
 * All resistors are in ohms. Common 1/4W, 1/8W and 1/16W carbon resistors are omitted. Refer to the following lists for their part numbers.
 * F : nonflammable

SEMICONDUCTORS
 In each case, U : μ, for example:
 UA...: μA..., UPA...: μPA..., UPC...: μPC,
 UPD...: μPD...
 COILS
 * MMH : mH, UH : μH

NOTE:
 * Items with no part number and no description are not stocked because they are seldom required for routine service.
 * Items marked "▲" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
 * Due to standardization, parts with part numbers (Δ-ΔΔΔ-ΔΔΔ-XX or Δ-ΔΔΔΔ-ΔΔΔ-X) may be different from those used in the set.

CAPACITORS:
 * All capacitors are in μF. Common capacitors are omitted. Refer to the following lists for their part numbers.
 MF:μF, PF:μμF.
 RESISTORS
 * All resistors are in ohms. Common 1/4W, 1/8W and 1/16W carbon resistors are omitted. Refer to the following lists for their part numbers.
 * F : nonflammable

SEMICONDUCTORS
 In each case, U : μ, for example:
 UA...: μA..., UPA...: μPA..., UPC...: μPC,
 UPD...: μPD...
 COILS
 * MMH : mH, UH : μH

MECHANISM SECTION

No.	Part No.	Description
346	7-623-505-01	LUG, 2
347	7-624-101-01	RING, RETAINING E-1.2
348	7-624-102-04	STOP RING 1.5, TYPE -E
349	7-627-552-67	SCREW, PRECISION +P 1.7X4.5
350	7-627-554-27	SCREW, PRECISION 2X6 TYPE 1
351	7-627-850-07	SCREW, PRECISION +P 1.4X2
352	7-627-850-17	SCREW, PRECISION +P 1.4X2.5
353	7-627-850-27	SCREW, PRECISION +P 1.4X3
354	7-627-850-37	SCREW, PRECISION +P 1.4X1.4
355	7-627-850-47	SCREW, PRECISION +P 1.4X1.6
356	7-627-850-67	SCREW, PRECISION +P 1.4X4
357	7-671-110-01	STEEL BALL 1.2MM
358	7-688-001-01	W 2, SMALL
359	A-3120-019-A	PC BOARD (A) ASSY, CONTROL
360	A-3120-020-A	GEAR (A) ASSY, FWD (C)
361	A-3120-021-A	GEAR (A) ASSY, FRC
362	A-3130-028-A	TABLE ASSY, REEL, T
363	A-3152-019-A	LEVER ASSY, ERASING PROTECTION
364	X-3308-404-0	IDLER ASSY, FWD
365	X-3308-405-0	PULLEY ASSY, FR
366	X-3308-406-0	FLYWHEEL ASSY
367	◆;X-3308-411-0	CHASSIS ASSY, HEAD
368	X-3308-412-0	PINCH LEVER ASSY
369	◆;X-3308-413-0	BRACKET ASSY, SWITCH
370	X-3308-414-0	CLAW ASSY, T REEL
371	X-3308-418-0	CLAW ASSY, S REEL
372	◆;X-3308-419-0	CHASSIS ASSY, MECHANICAL

ELECTRICAL PARTS

Ref.No.	Part No.	Description
501	1-454-326-00	SOLENOID, PLUNGER
502	1-463-339-00	ADAPTOR, AC (AC-39)
503	1-548-541-31	COUNTER
504	◆;1-608-116-00	PC BOARD, KEY SWITCH
505	◆;1-608-117-00	PC BOARD, AUDIO
506	◆;1-608-118-00	PC BOARD, SAFETY
507	◆;A-3070-074-A	MOUNTED PCB, AUDIO
508	A-3120-019-A	PC BOARD (A) ASSY, CONTROL
C104	1-163-018-00	CHIP COMPONENT 0.0056MF 10% 50V
C110	1-163-056-00	CHIP COMPONENT 0.0056MF 10% 50V
C136	1-163-065-00	CHIP COMPONENT 0.001MF 50V
C137	1-163-065-00	CHIP COMPONENT 0.001MF 50V
C138	1-163-025-00	CHIP COMPONENT 0.001MF 50V
C139	1-163-001-00	CHIP COMPONENT 220PF 10% 50V
C140	1-163-065-00	CHIP COMPONENT 0.001MF 50V
C146	1-163-065-00	CHIP COMPONENT 0.001MF 50V
C148	1-163-056-00	CHIP COMPONENT 0.0056MF 10% 50V
C801	1-163-038-00	CHIP COMPONENT 0.1MF 25V
C802	1-163-038-00	CHIP COMPONENT 0.1MF 25V
C901	1-161-007-00	CAP, CERAMIC 0.0033MF
C902	1-161-007-00	CAP, CERAMIC 0.0033MF
D101	8-719-900-24	DIODE SLP24B
D102	8-719-815-55	DIODE 1S1555
D103	8-719-815-55	DIODE 1S1555
D104	8-719-815-55	DIODE 1S1555
D105	8-719-815-55	DIODE 1S1555
D106	8-719-815-55	DIODE 1S1555
HE	8-825-542-10	HEAD, REC/PB
HRP901	8-829-336-30	HEAD PP134-36L, ERASE
IC101	8-759-608-07	IC CX-807
IC901	1-464-203-13	CIRCUIT UNIT, SYSTEM CONTROL(1)
J101	1-507-668-11	JACK, 3-GANG
J102	1-507-723-00	JACK, EXTENTION POWER
M801	8-835-067-01	MOTOR, DC (DNR-5300A)
M802	8-835-067-01	MOTOR, DC (DNR-5300A)
M901	8-835-076-01	MOTOR, DC (DNE-5700A)
MIC901	8-814-189-00	MICROPHONE, BUILT-IN (C-1007A)
PH101	8-719-751-42	DIODE NJL5141E-AC
Q101	8-729-853-63	TRANSISTOR 2SC536SP
Q102	8-729-204-82	TRANSISTOR 2SA1048-Y
Q103	8-729-853-63	TRANSISTOR 2SC536SP

ELECTRICAL PARTS

Ref.No.	Part No.	Description
Q104	8-729-853-63	TRANSISTOR 2SC536SP
Q105	8-729-853-63	TRANSISTOR 2SC536SP
Q106	8-760-523-10	TRANSISTOR 2SA772-23
Q107	8-729-612-77	TRANSISTOR 2SA1027R
Q108	8-729-853-63	TRANSISTOR 2SC536SP
Q109	8-729-245-83	TRANSISTOR 2SC2458
Q110	8-729-204-82	TRANSISTOR 2SA1048-Y
Q111	8-729-245-83	TRANSISTOR 2SC2458
R101	1-247-823-00	CARBON 470 5% 1/6W
R102	1-247-827-00	CARBON 680 5% 1/6W
R103	1-247-823-00	CARBON 470 5% 1/6W
R104	1-247-855-00	CARBON 10K 5% 1/6W
R105	1-247-805-00	CARBON 82 5% 1/6W
R106	1-247-815-00	CARBON 220 5% 1/6W
R107	1-247-903-00	CARBON 1M 5% 1/6W
R108	1-247-839-00	CARBON 2.2K 5% 1/6W
R109	1-247-843-00	CARBON 3.3K 5% 1/6W
R110	1-247-893-00	CARBON 390K 5% 1/6W
R111	1-247-835-00	CARBON 1.5K 5% 1/6W
R112	1-247-831-00	CARBON 1K 5% 1/6W
R113	1-247-879-00	CARBON 100K 5% 1/6W
R114	1-247-837-00	CARBON 1.8K 5% 1/6W
R115	1-247-831-00	CARBON 1K 5% 1/6W
R118	1-247-879-00	CARBON 100K 5% 1/6W
R119	1-247-804-00	CARBON 75 1/6W
R120	1-247-807-00	CARBON 100 5% 1/6W
R121	1-247-849-00	CARBON 5.6K 5% 1/6W
R122	1-247-855-00	CARBON 10K 5% 1/6W
R123	1-247-799-00	CARBON 47 5% 1/6W
R124	1-247-805-00	CARBON 82 5% 1/6W
R125	1-247-855-00	CARBON 10K 5% 1/6W
R126	1-247-841-00	CARBON 2.7K 5% 1/6W
R129	1-214-571-00	METAL 3.9K 1% 1/8W
R130	1-214-559-00	METAL 1.2K 1% 1/8W
R131	1-247-839-00	CARBON 2.2K 5% 1/6W
R132	1-247-859-00	CARBON 15K 5% 1/6W
R133	1-247-871-00	CARBON 47K 5% 1/6W
R134	1-247-833-00	CARBON 1.2K 5% 1/6W
R135	1-247-871-00	CARBON 47K 5% 1/6W
R136	1-247-819-00	CARBON 330 5% 1/6W
R137	1-247-895-00	CARBON 470K 5% 1/6W
R138	1-247-811-00	CARBON 150 5% 1/6W
R139	1-247-879-00	CARBON 100K 5% 1/6W
R140	1-247-896-00	CARBON 510K 5% 1/6W
R141	1-247-767-00	CARBON 2.2 5% 1/6W
R144	1-247-876-00	CARBON 75K 5% 1/6W

ELECTRICAL PARTS

Ref.No.	Part No.	Description
S101	1-554-029-00	SWITCH, SLIDE
S102	1-553-510-00	SWITCH, SLIDE
S103	1-553-510-00	SWITCH, SLIDE
S901	1-553-510-00	SWITCH, SLIDE
S902	1-553-682-00	SWITCH, LEAF
S903	1-553-682-21	SWITCH, LEAF
SP901	1-503-162-00	SPEAKER
T101	1-433-238-00	TRANSFORMER, BIAS OSCILLATOR
VR101	1-226-743-00	RES, VAR, CARBON 10K
VR102	1-228-382-00	RES, VAR, CARBON 20K

NOTE:

- Items with no part number and no description are not stocked because they are seldom required for routine service.
- Items marked "◆" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- Due to standardization, parts with part numbers (Δ-ΔΔΔ-ΔΔΔ-XX or Δ-ΔΔΔΔ-ΔΔΔ-X) may be different from those used in the set.

CAPACITORS:

- All capacitors are in μF. Common capacitors are omitted. Refer to the following lists for their part numbers. MF: μF, PF: μF.

RESISTORS

- All resistors are in ohms. Common 1/4W, 1/8W and 1/16W carbon resistors are omitted. Refer to the following lists for their part numbers.

- F : nonflammable

SEMICONDUCTORS

- In each case, U : μ, for example: UA...: μA..., UPA...: μPA..., UPC...: μPC, UPD...: μPD...

COILS

- MMH : mH, UH : μH

NOTE:

- Items with no part number and no description are not stocked because they are seldom required for routine service.
- Items marked "◆" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- Due to standardization, parts with part numbers (Δ-ΔΔΔ-ΔΔΔ-XX or Δ-ΔΔΔΔ-ΔΔΔ-X) may be different from those used in the set.

CAPACITORS:

- All capacitors are in μF. Common capacitors are omitted. Refer to the following lists for their part numbers. MF: μF, PF: μF.

RESISTORS

- All resistors are in ohms. Common 1/4W, 1/8W and 1/16W carbon resistors are omitted. Refer to the following lists for their part numbers.

- F : nonflammable

COILS

- MMH : mH, UH : μH

SEMICONDUCTORS

- In each case, U : μ, for example: UA...: μA..., UPA...: μPA..., UPC...: μPC, UPD...: μPD...

TCM-7

SERVICE MANUAL

US Model
Canadian Model
AEP Model
UK Model
E Model

CORRECTION

File this supplement with the service manual.

No. 1
May, 1984

Add and correct the following parts to the parts list.

GENERAL SECTION

<u>No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Remarks</u>
6	3-308-410-00	(SILVER)...KNOB, EJECT	
6	3-308-410-11	(BLACK)...KNOB, EJECT	ADDED
29	3-308-441-00	(SILVER)...PANEL	CORRECT
29	3-308-441-11	(BLACK)...PANEL	CORRECT
30	3-308-442-00	(SILVER)...STRIP, ORNAMENTAL	
30	3-308-442-11	(BLACK)...STRIP, ORNAMENTAL	ADDED
59	X-3308-420-1	(BLACK)...LID ASSY, CASSETTE	ADDED
59	X-3308-421-1	(SILVER)...LID ASSY, CASSETTE	CORRECT



9-950-975-92

Sony Corporation

CASSETTE CORDER

SONY®

English
84E06136-1
Printed in Japan
© 1984

TC

CASSETTE-CORDER

TCM-7

TCM-7

SUPPLEMENT

File this supplement with the service manual.

MECHANISM OPERATION


US Model
Canadian Model
AEP Model
UK Model
E Model

No. 1
March, 1983

SONY
SERVICE MANUAL


1. Operation Order

[Example: STOP → PLAY]

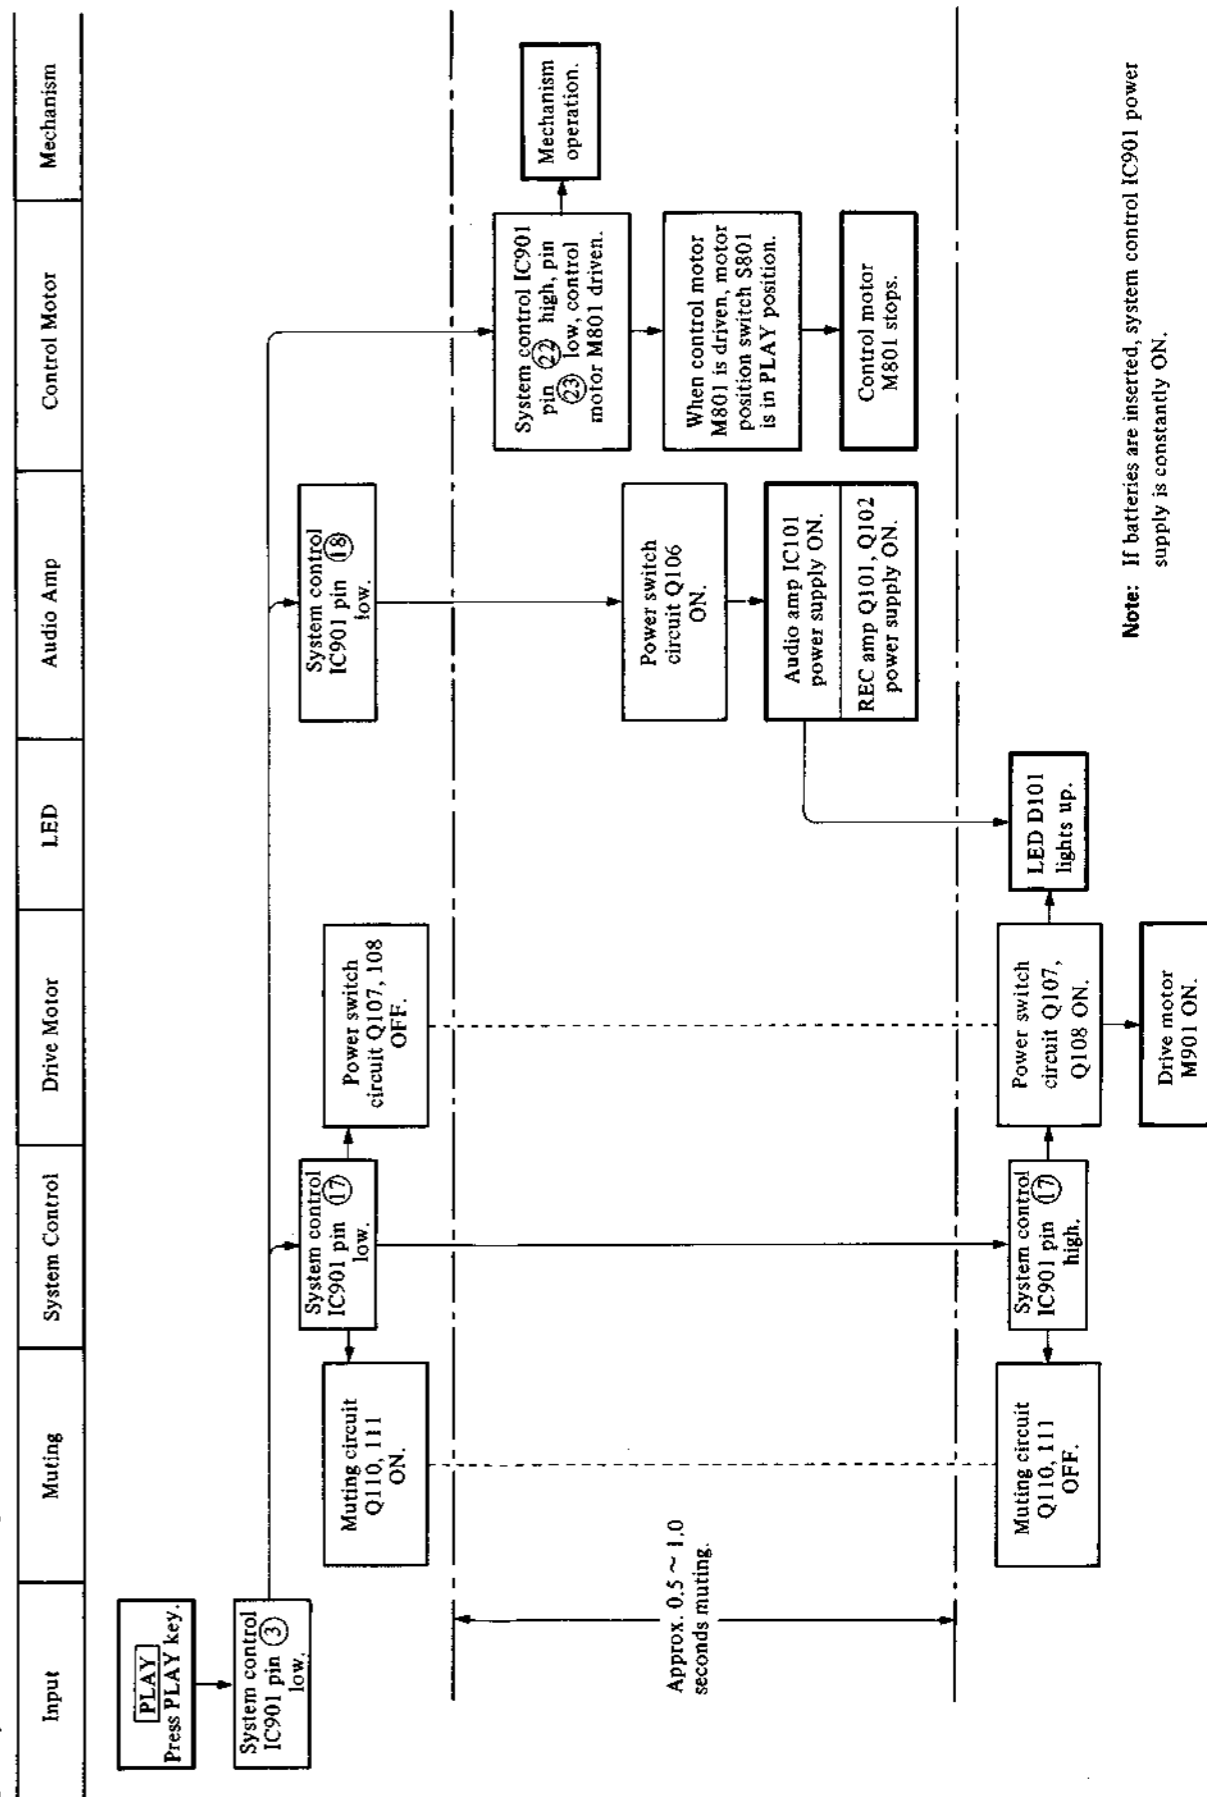


Note: If batteries are inserted, system control IC901 power supply is constantly ON.

2. System Control IC901 Timing Chart

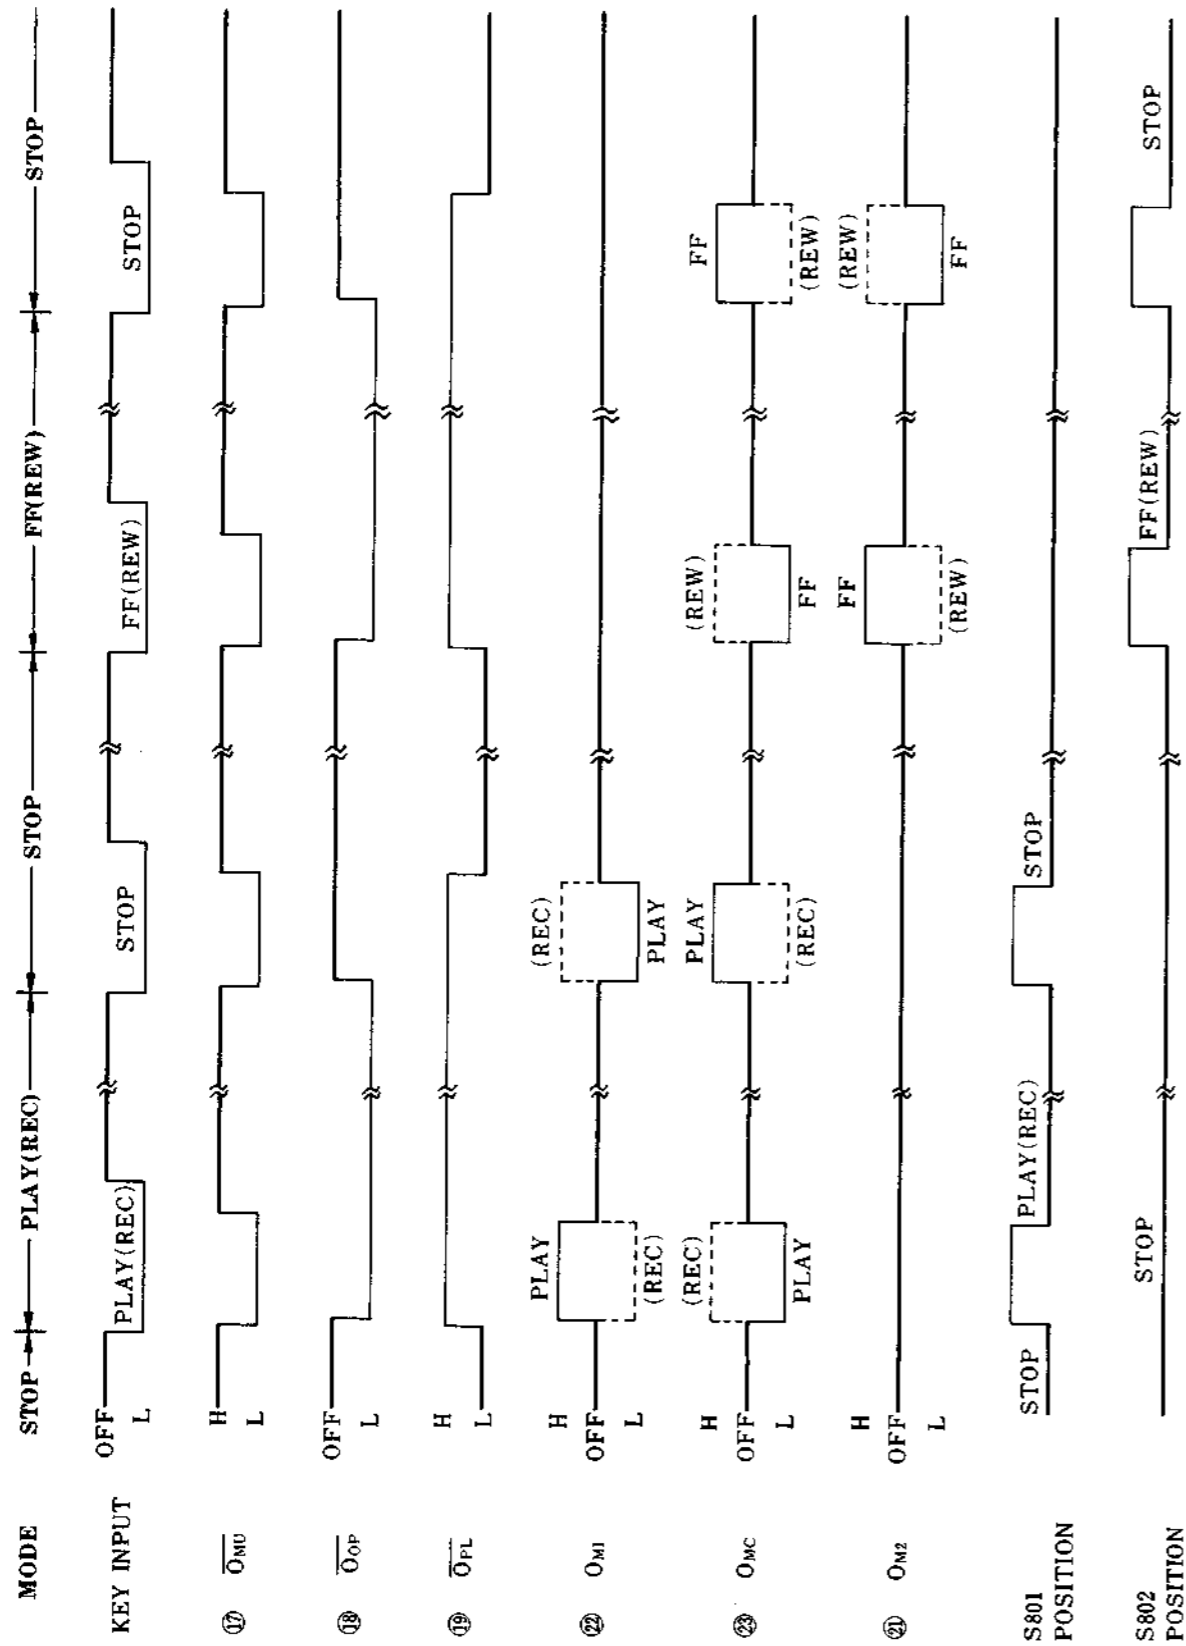

3. Troubleshooting

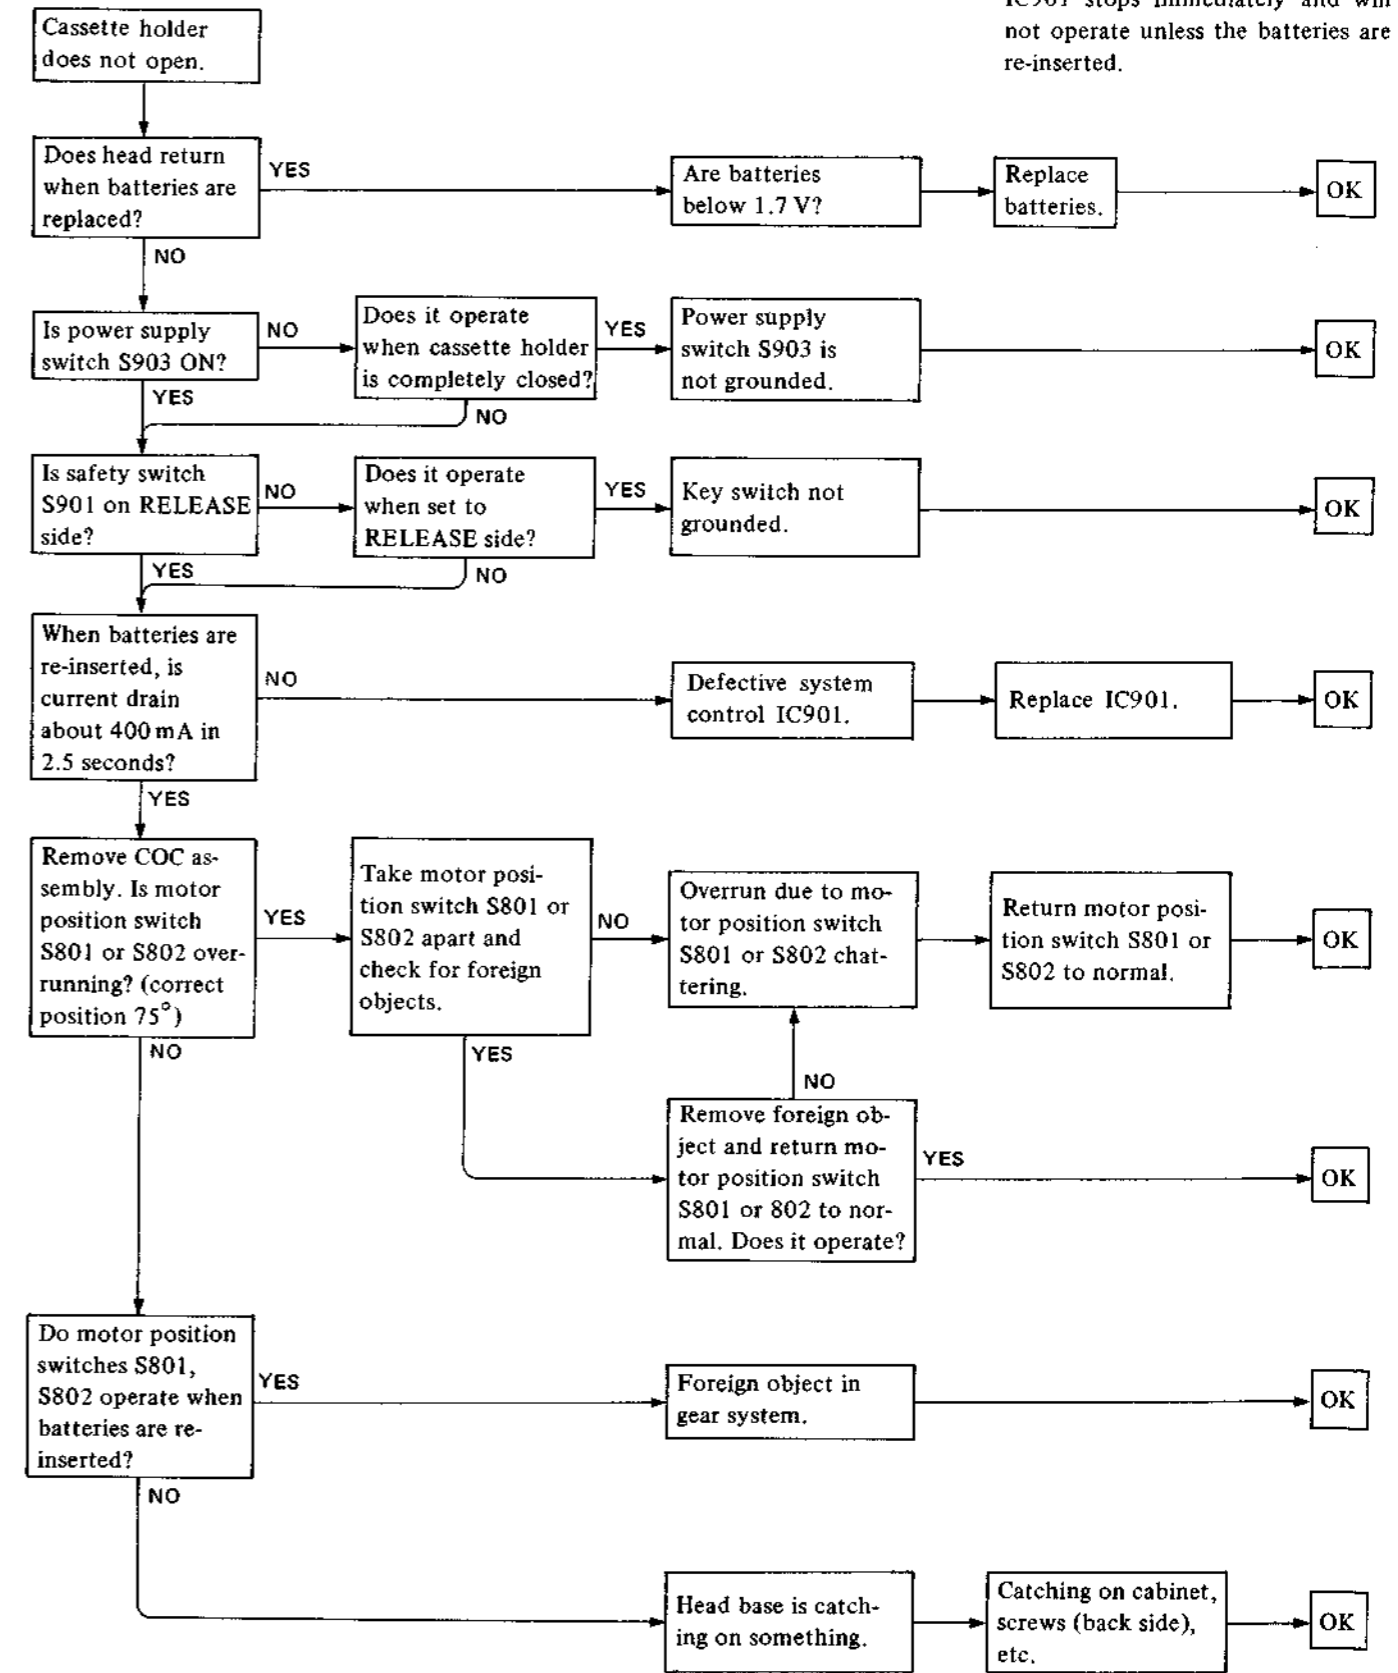

Note: If the control motor is not driven within 2.5 seconds, system control IC901 stops immediately and will not operate unless the batteries are re-inserted.

4. System Control IC901 Function Description

Pin No.	I/O	Symbol	Signal Name	Function	Termination
1	—	V _{CC2}	power supply 2	Logic IC ₁ power supply, connected to pin 25 V _{CC1} inside module.	—
2	input	$\overline{\text{REC}}$	record	REC mode at low level.	PU
3	input	$\overline{\text{FWD}}$	forward	FWD mode at low level.	PU
4	input	$\overline{\text{STOP}}$	stop	STOP mode at low level.	PU
5	input	$\overline{\text{FF}}$	FF	FF mode at low level. CUE during FWD.	PU
6	input	$\overline{\text{REW}}$	rewind	REW mode at low level. REVIEW during FWD.	PU
7					
8	input	$\overline{\text{A}}$	position A	Indicates control motor M801 stop position in FWD, STOP, REC modes. Position detection input.	PU
9	input	$\overline{\text{B}}$	position B		
10	input	$\overline{\text{C}}$	position C		
11	input	$\overline{\text{D}}$	position D	Indicates control motor M802 stop position in FF, STOP, REW modes. Position detection input.	PU
12	input	$\overline{\text{E}}$	position E		
13					
14					
15	—	GND ₁	ground 1	Ground for logic IC ₁ and voltage regulator IC ₃ , connected to pin 16 inside module.	—
16	—	GND ₂	ground 2	Ground for driver IC ₂ , connected to pin 15 inside module.	—
17	output	$\overline{\text{OMU}}$	muting output	ON output when control motor M801 or M802 operated.	PU
18	output	$\overline{\text{OOP}}$	operation output	ON output except during STOP mode.	OC
19	output	$\overline{\text{OPL}}$	plunger output	ON output in CUE or REVIEW mode.	OC
20					
21	output	O _{M2}	motor output 2	Output to rotate control motor M802. High for FF, low for REW.	PP
22	output	O _{M1}	motor output 1	Output to rotate control motor M801. High for FWD, low for REC.	PP
23	output	O _{MC}	motor common output	Output to rotate control motors M801, M802. Low for F, high for R.	PP
24					
25	—	V _{CC1}	power supply 1	Power supply for voltage regulator IC ₃ . Connected to pin 1 V _{CC2} inside module.	—

*Termination Symbols PU: pull-up PP: push-pull
OC: open collector

*Logic IC_{1, 2, 3} are ICs inside system control IC901.


MEMO

Lined area for writing the memo content.

Suppl



5. Mechanism Operation

FF Operation

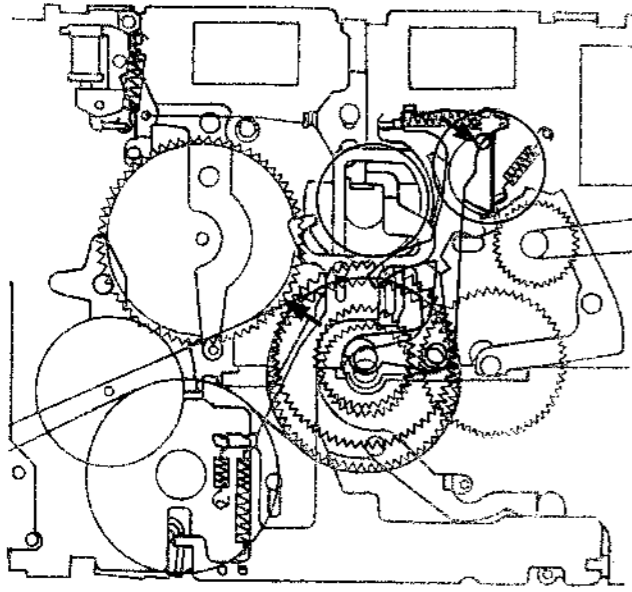


Note: Black: STOP mode
Red: Mechanism position for each mode operation
Blue: Control board ass'y for each mode operation


PLAY Operation

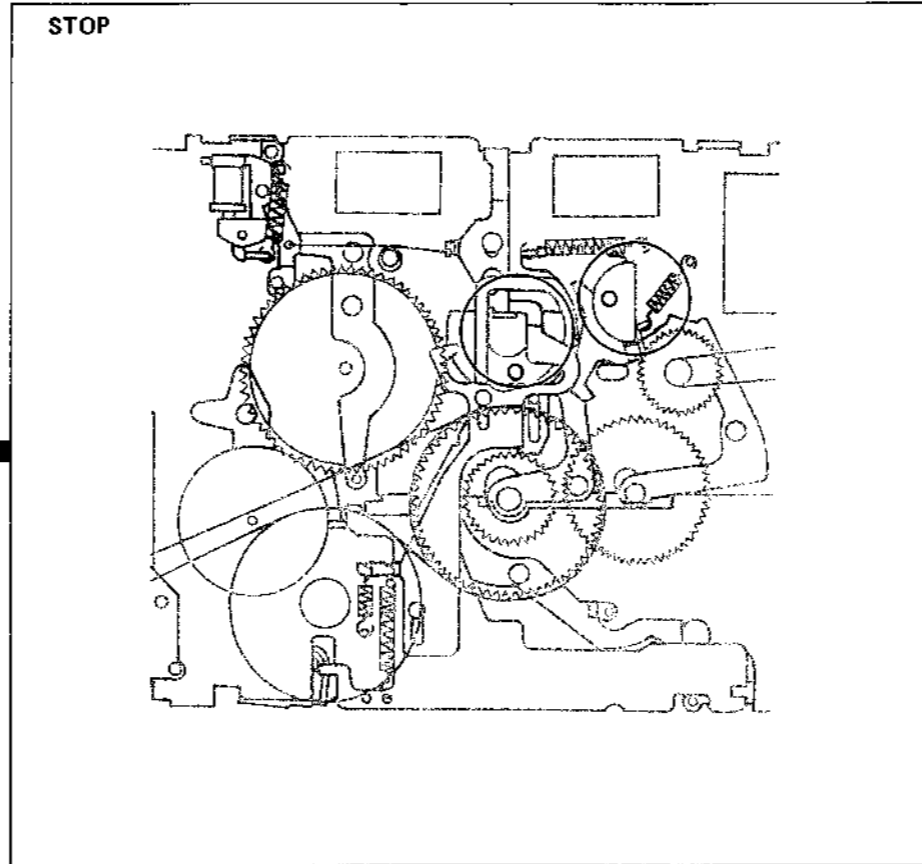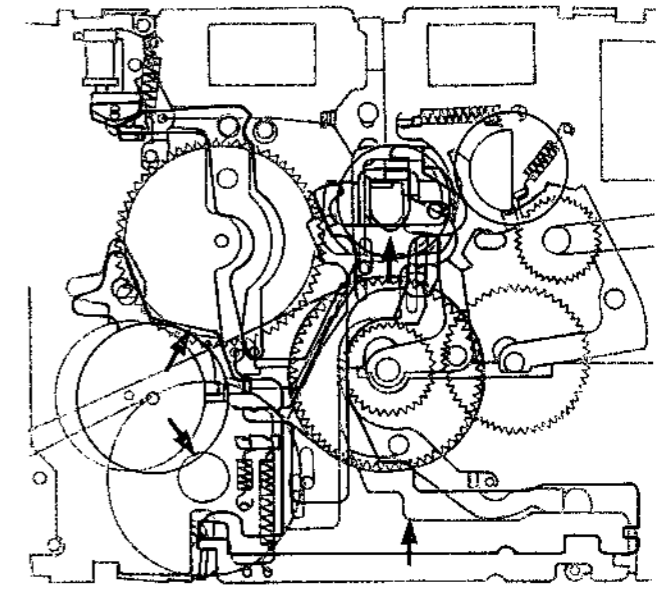

REC Operation





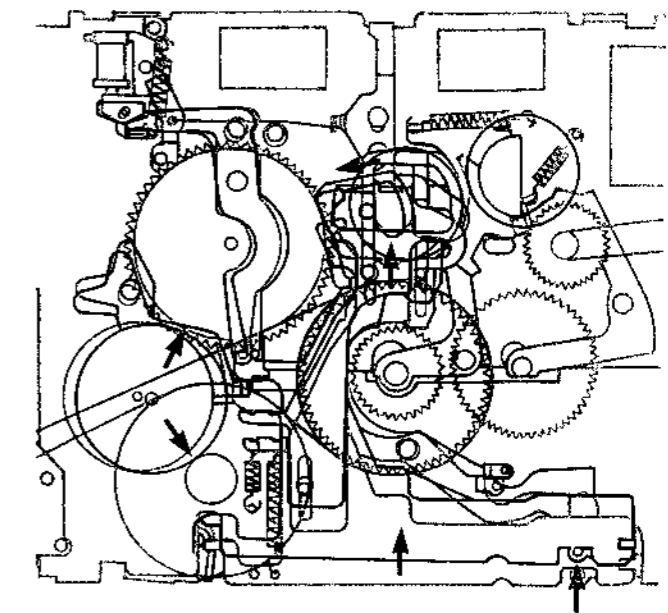


REW Operation

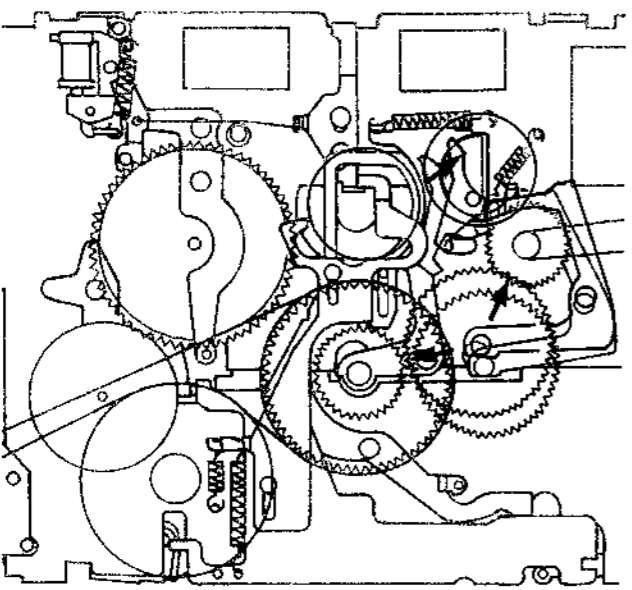


Suppl


Note: Black: STOP mode
 Red: Mechanism position for each mode operation
 Blue: Control board ass'y for each mode operation

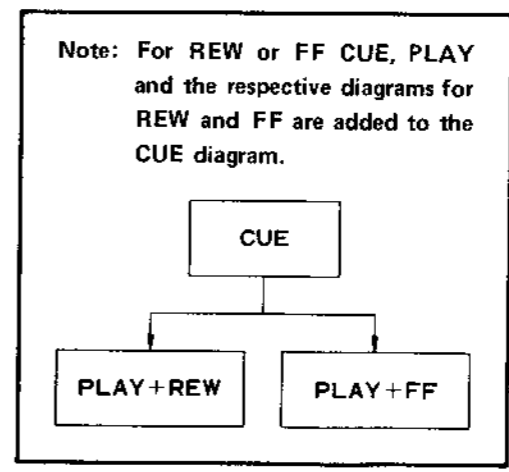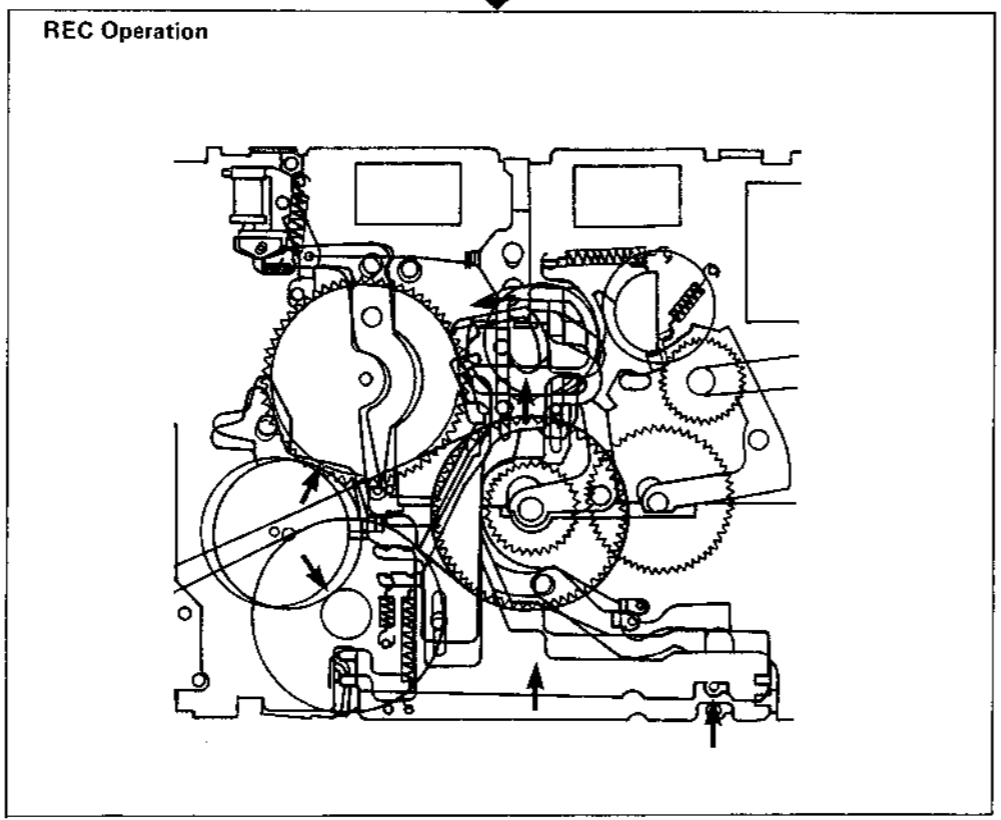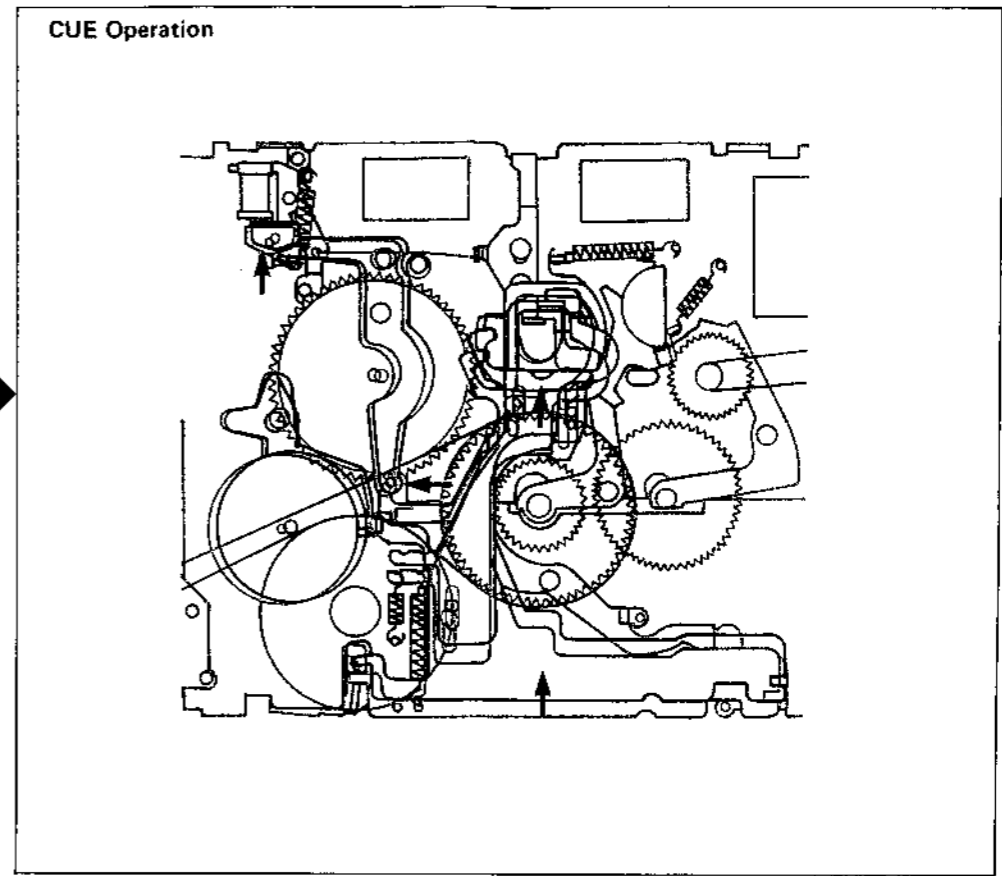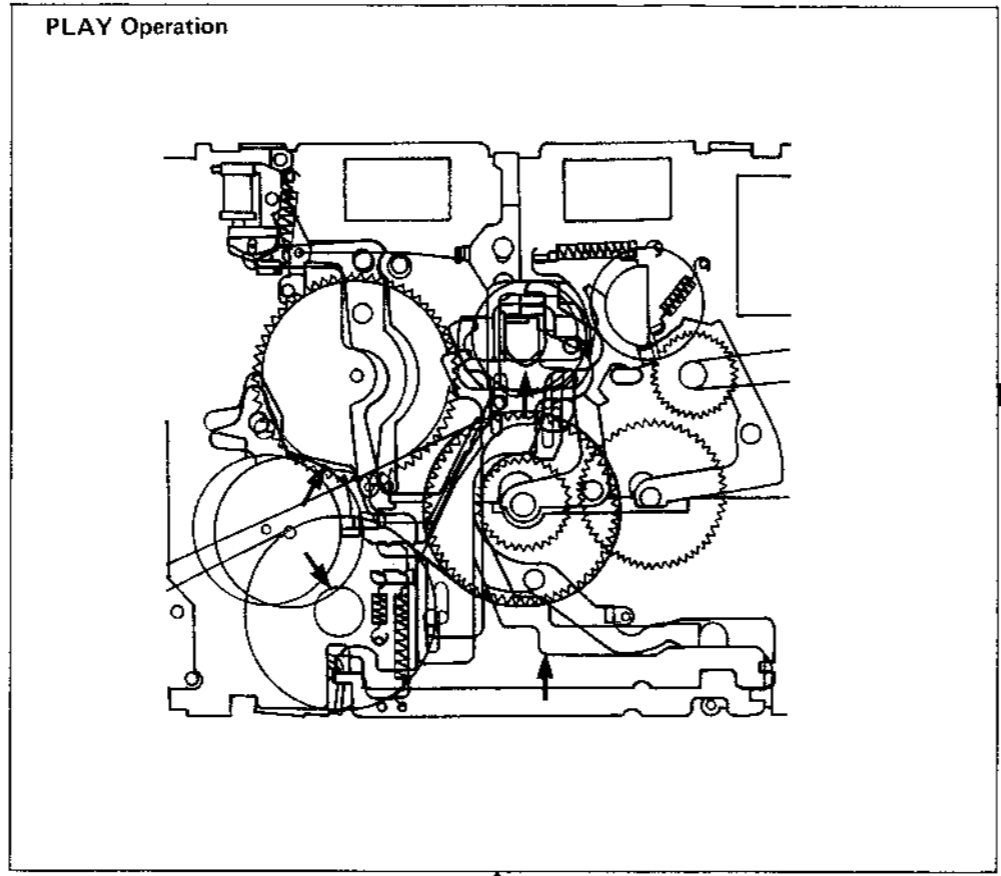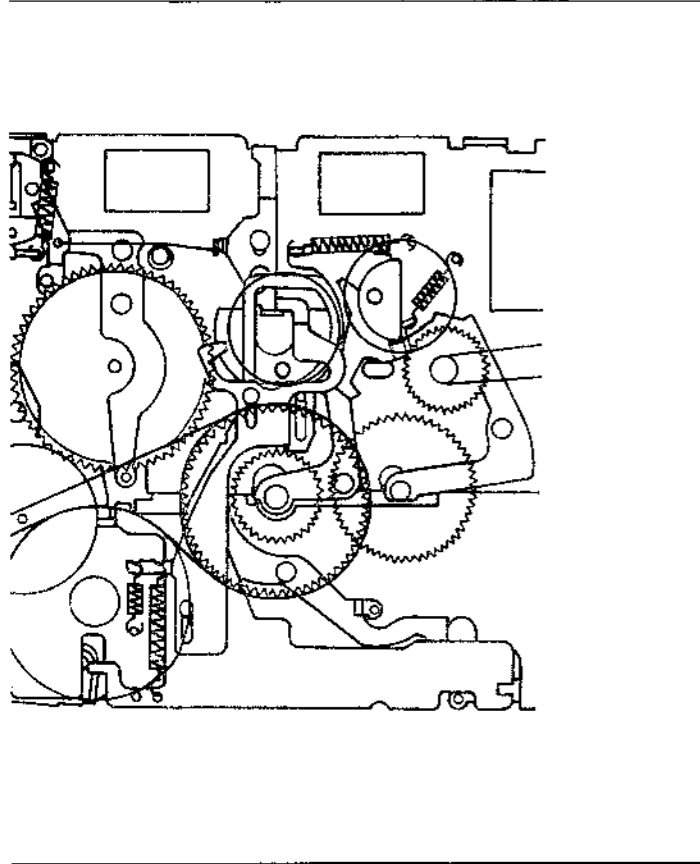

• Semiconductor Lead Layouts


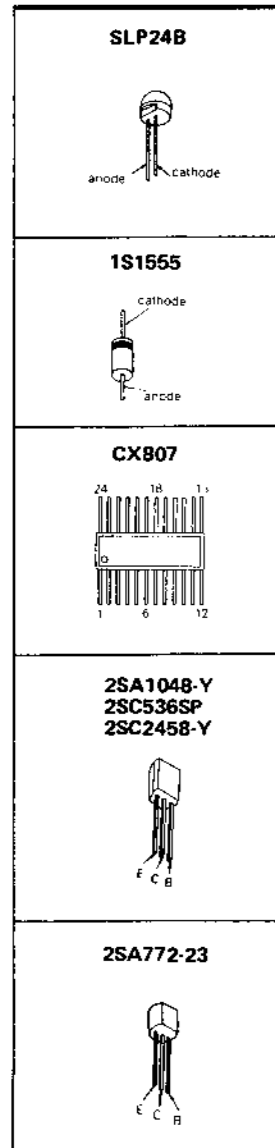


Note:
• Color code of sleeving over the end of the jacket.



- — : parts extracted from the component side.
- — : parts extracted from the conductor side.
- ■ : part mounted on the conductor side.
- : B+ pattern
- — : signal path
- — : L-CH signal path
- — : R-CH signal path



6. MOUNTING DIAGRAM — Conductor Side —

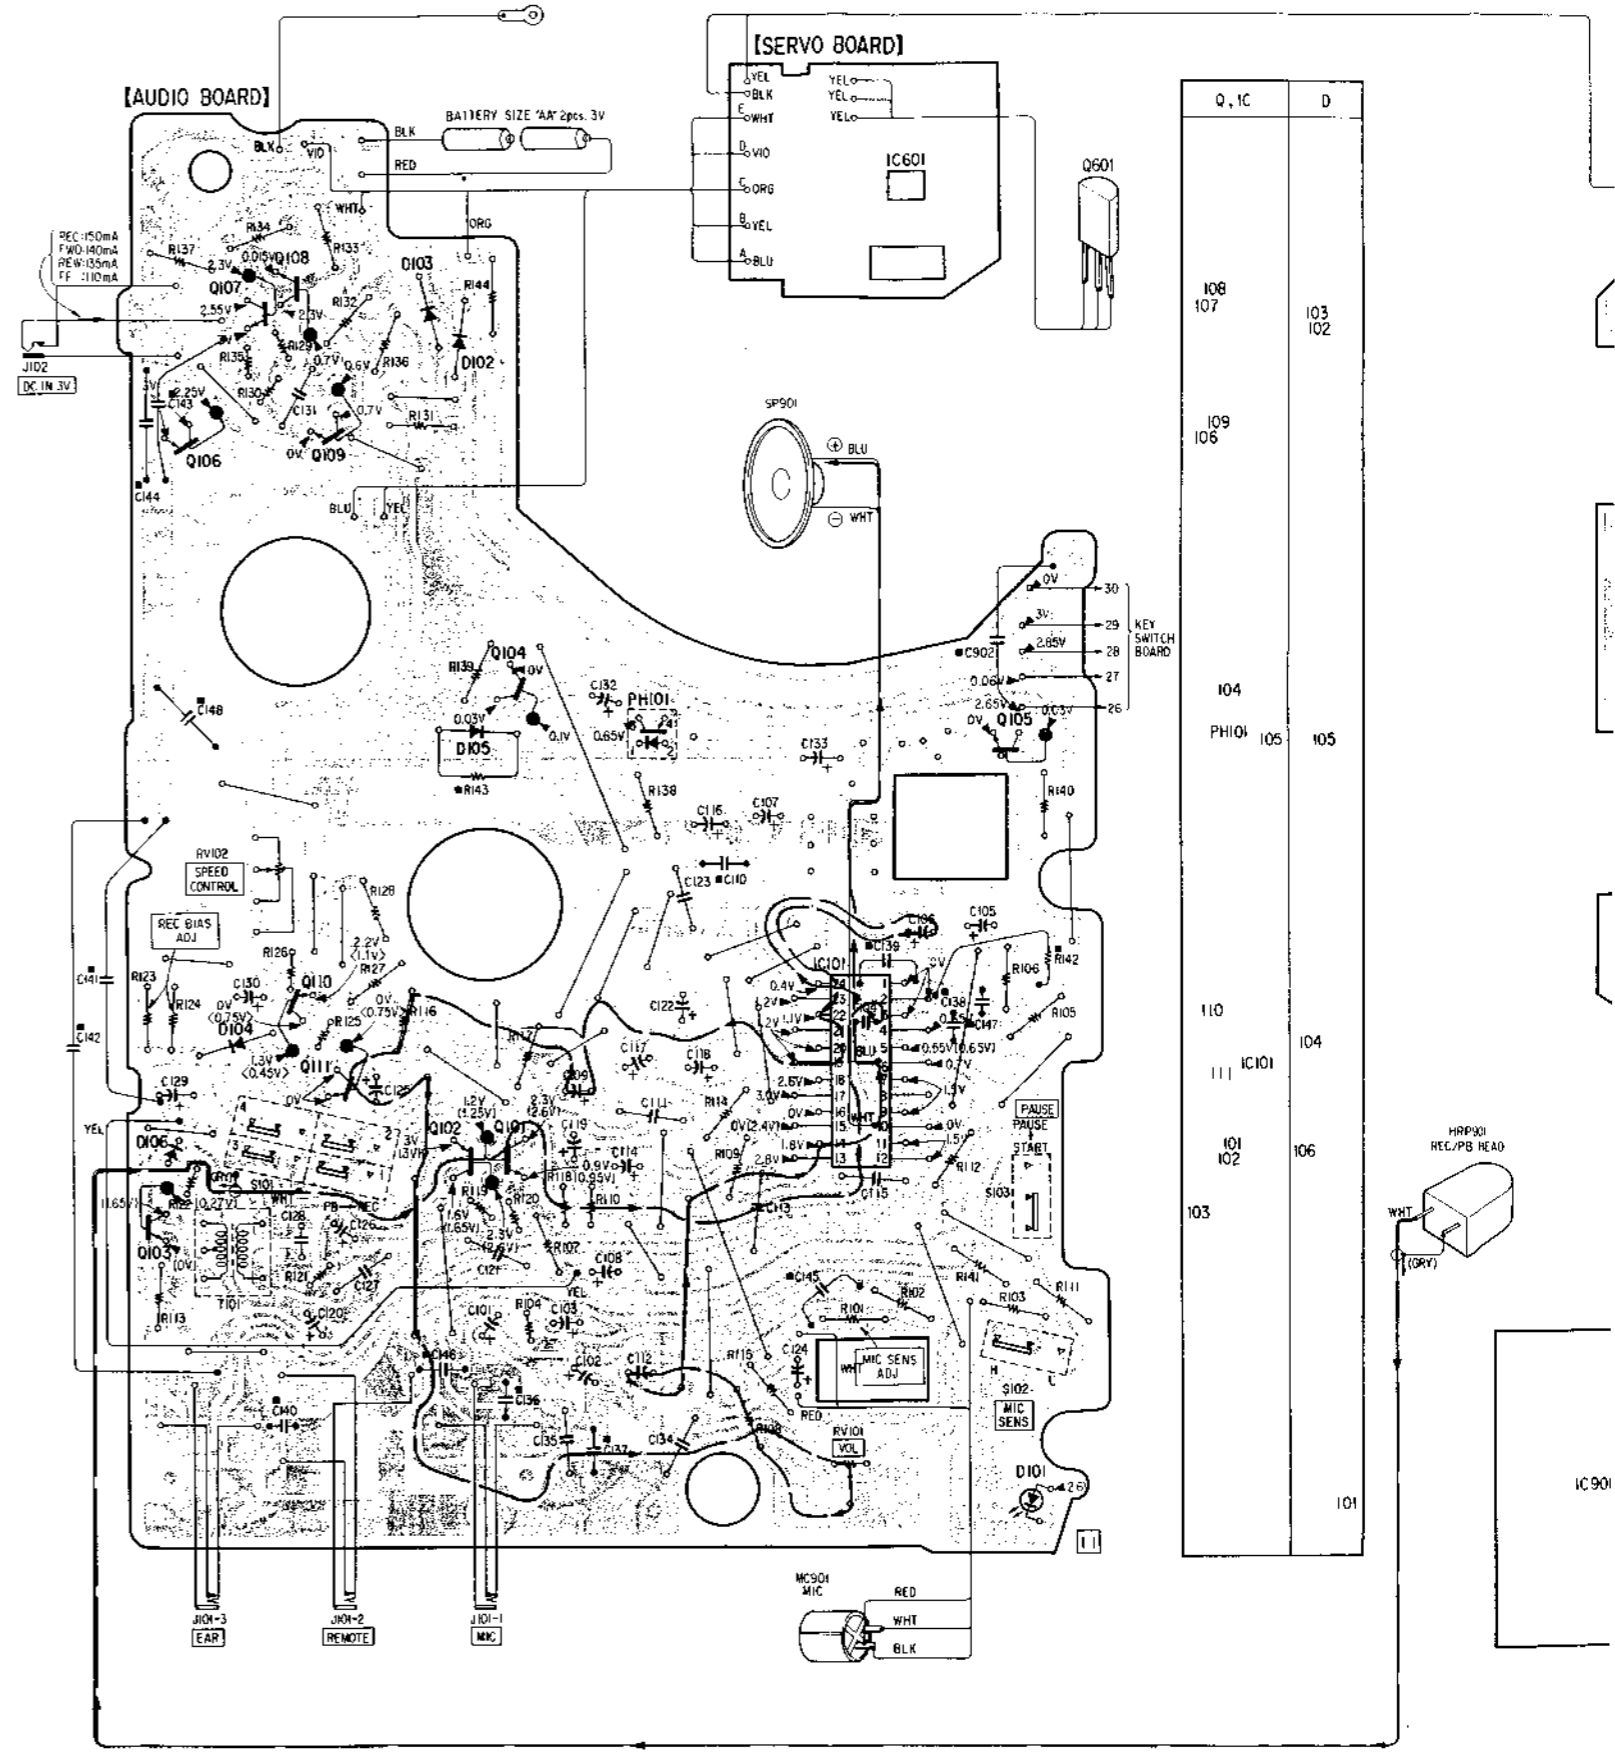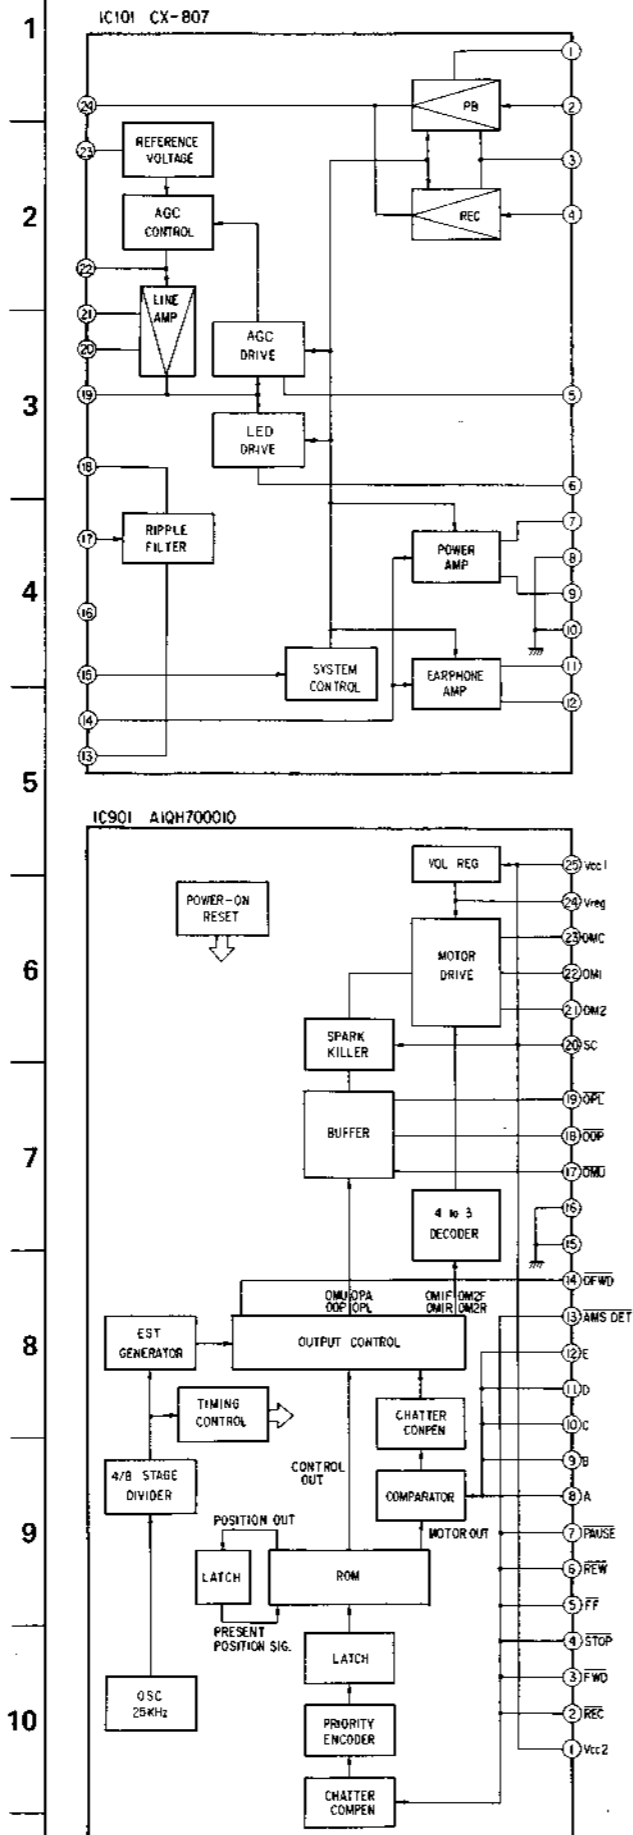

Suppl


TCM-7 TCM-7

E F G H I J K L M N O P Q R S T

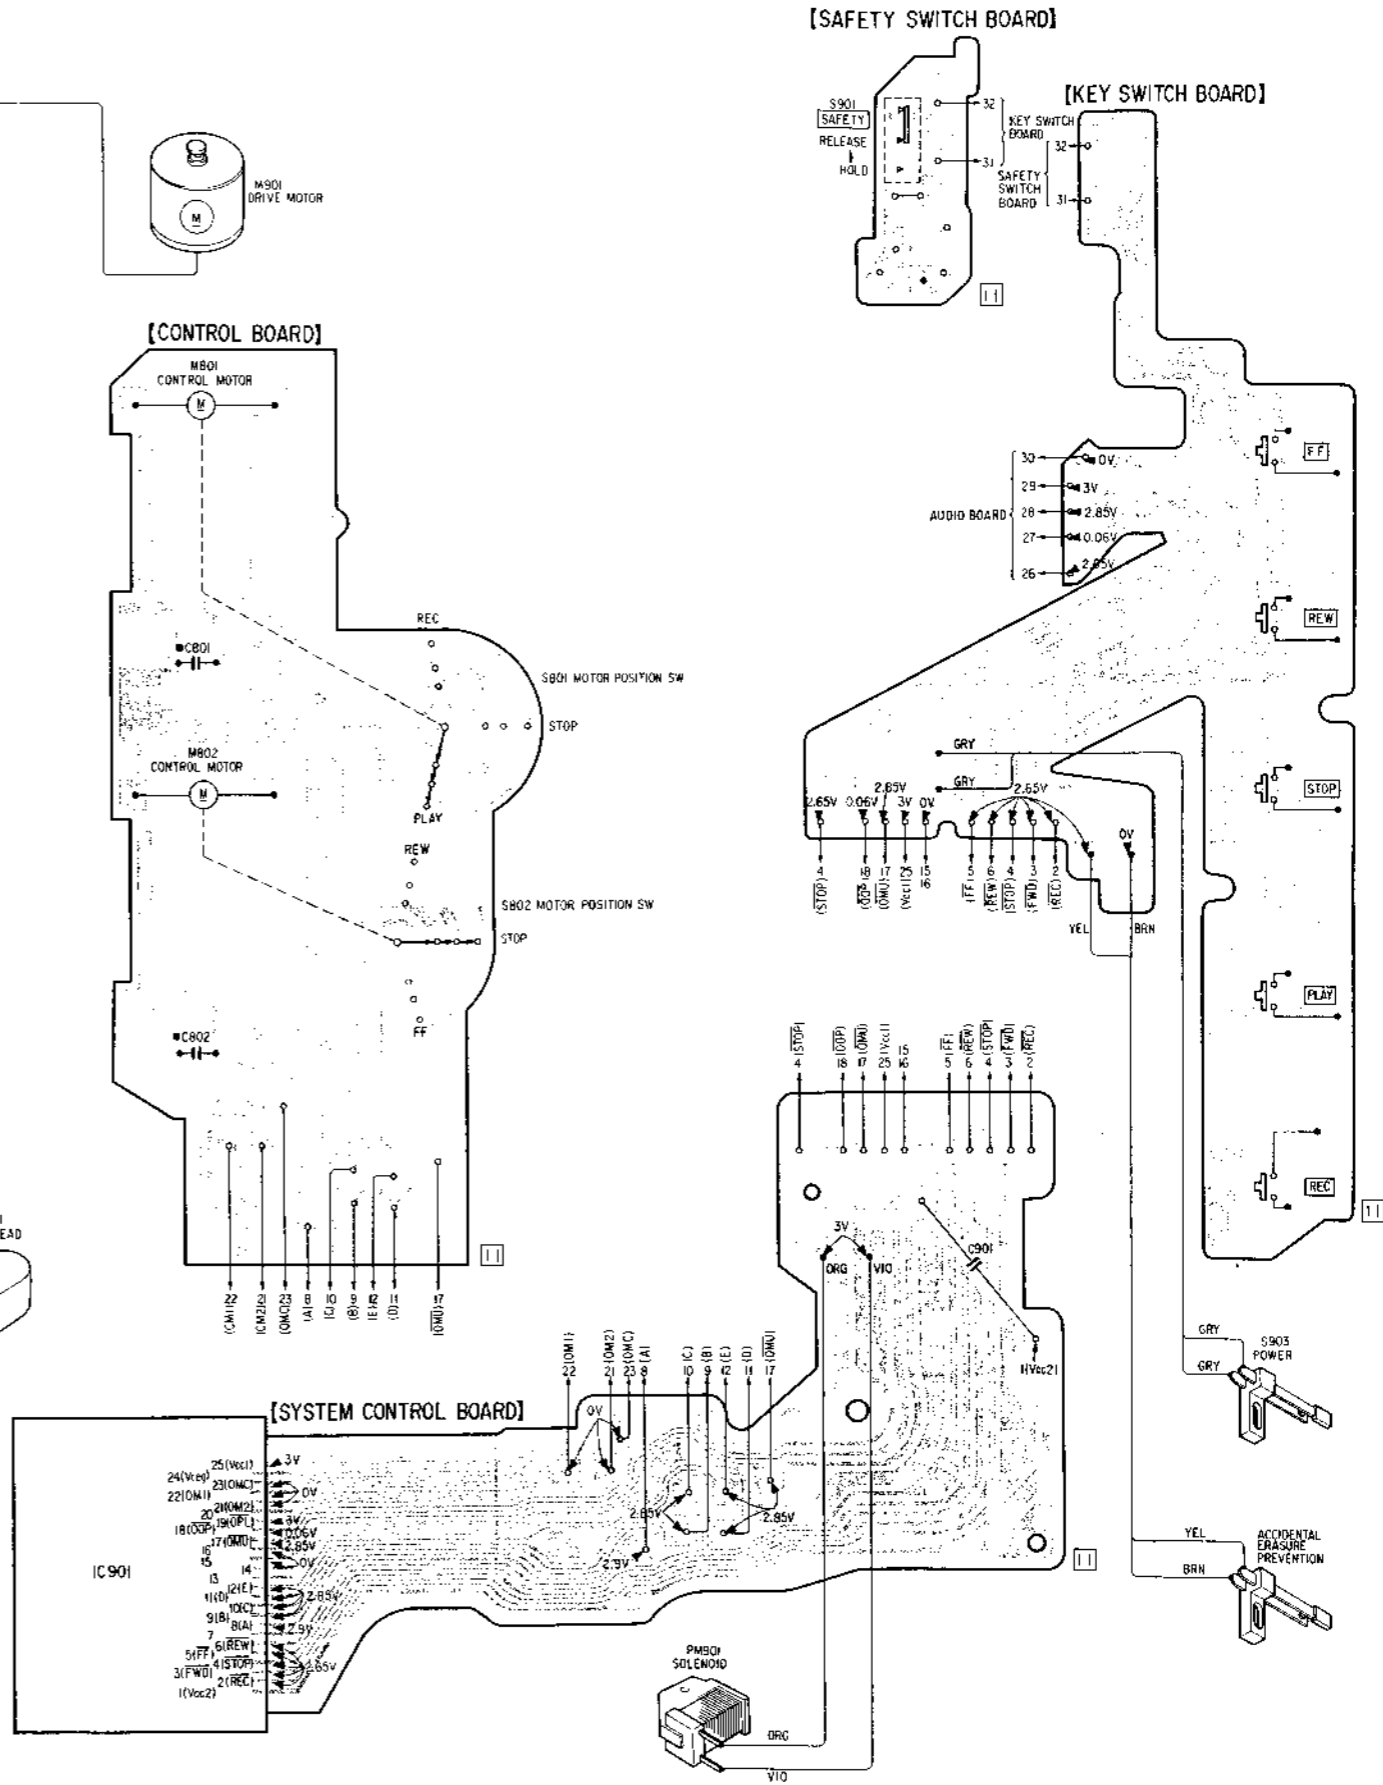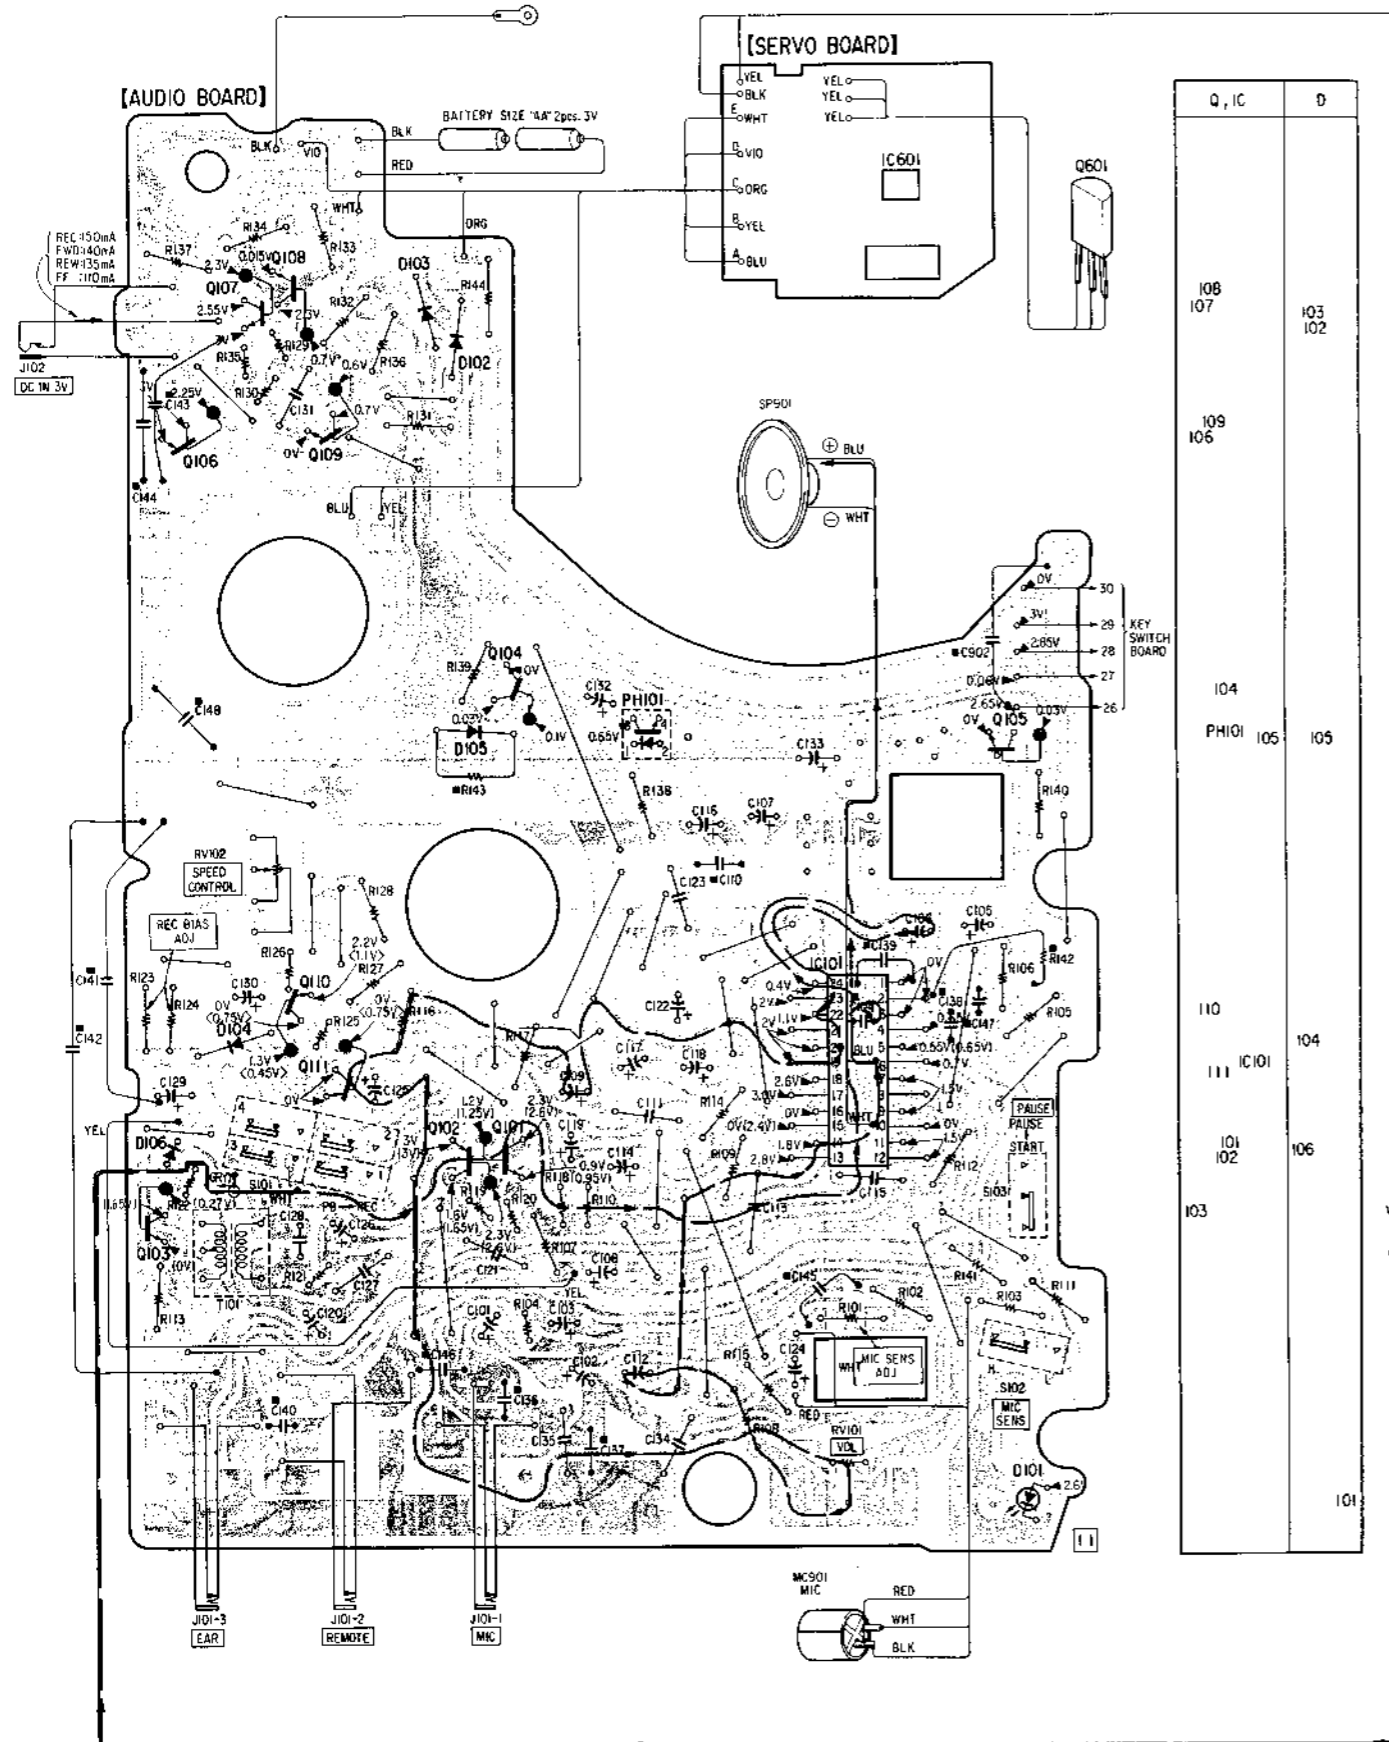

Suppl

7. SCHEMATIC DIAGRAM

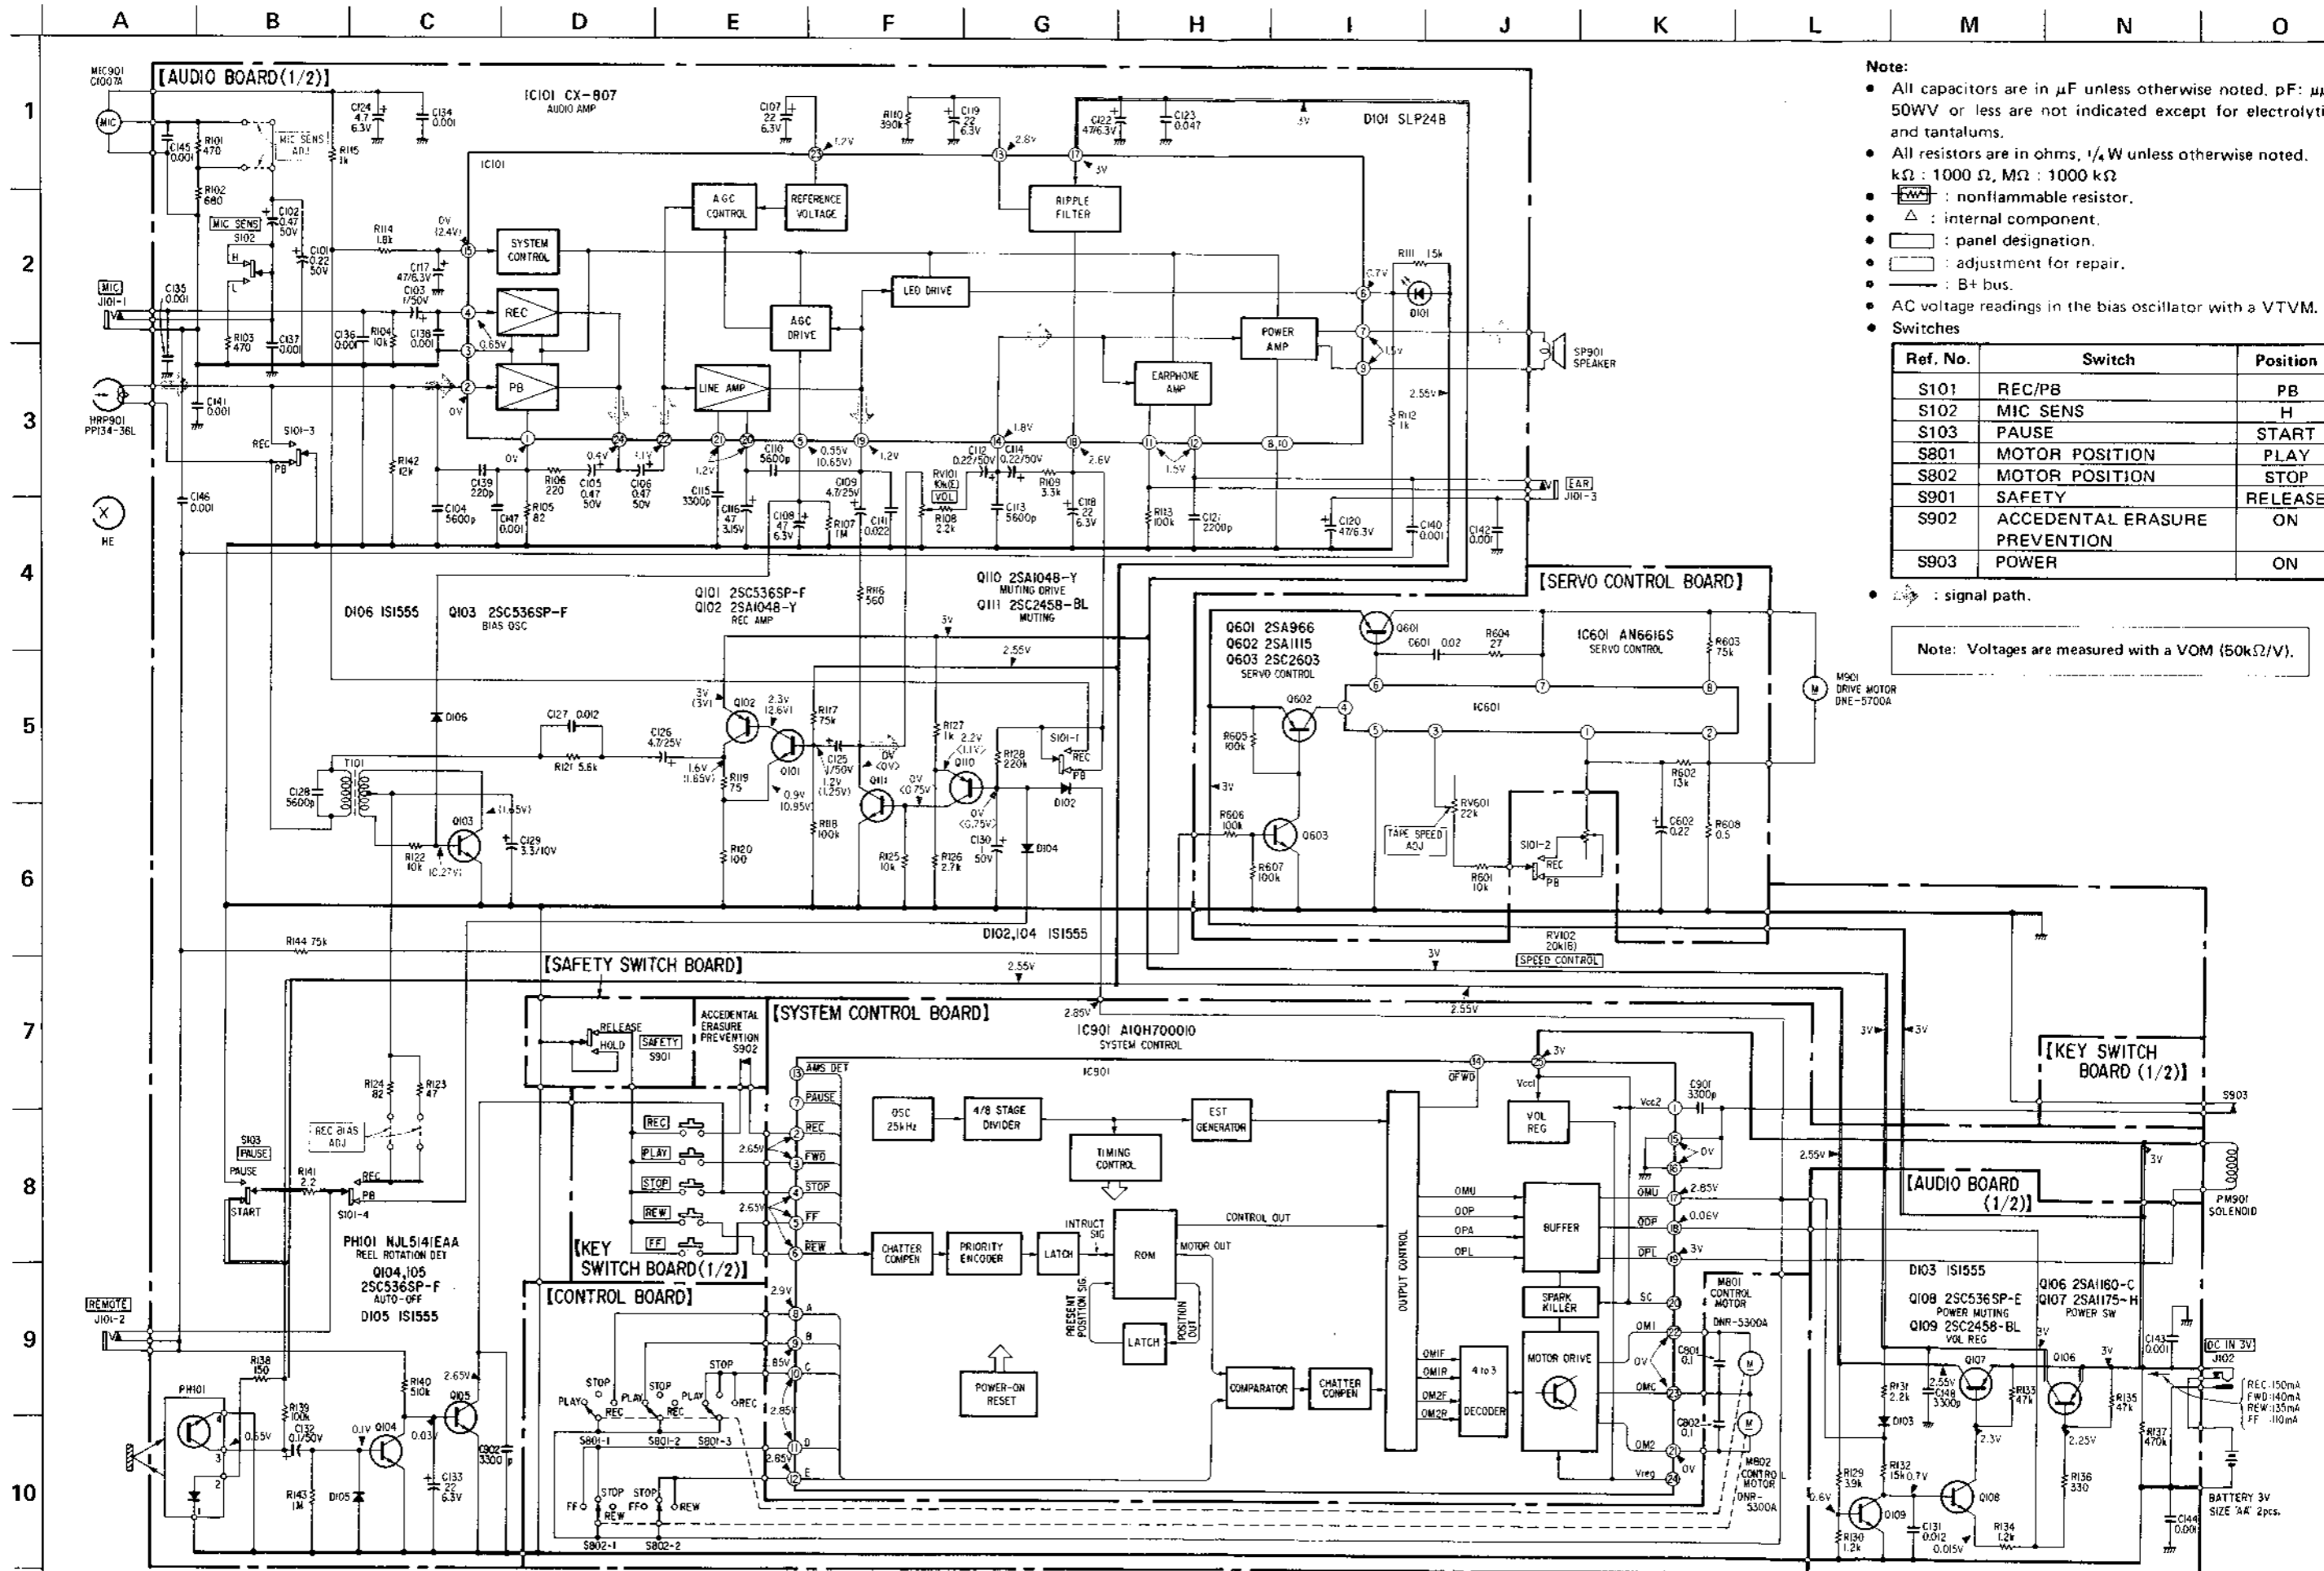

- Note:**
- All capacitors are in μF unless otherwise noted. pF : μF 50WV or less are not indicated except for electrolytics and tantalums.
 - All resistors are in ohms, $\frac{1}{4}$ W unless otherwise noted. $\text{k}\Omega$: 1000 Ω , $\text{M}\Omega$: 1000 $\text{k}\Omega$
 - \square : nonflammable resistor.
 - \triangle : internal component.
 - \square : panel designation.
 - \square : adjustment for repair.
 - \square : B+ bus.
 - AC voltage readings in the bias oscillator with a VTVM.
 - Switches

Ref. No.	Switch	Position
S101	REC/PB	PB
S102	MIC SENS	H
S103	PAUSE	START
S801	MOTOR POSITION	PLAY
S802	MOTOR POSITION	STOP
S901	SAFETY	RELEASE
S902	ACCEDENTAL ERASURE PREVENTION	ON
S903	POWER	ON

Note: Voltages are measured with a VOM (50k Ω /V).