

17 1/4" x 13 1/2"

OUTLINE OF MINIMUM SIZE MOTOR BOARD

OUTLINE OF HOLE TO BE CUT IN MOTOR BOARD

NOTE - IF SECTION OF BOARD IS CONSIDERED INADEQUATE HERE, AND AT FRONT OF UNIT, THE ALTERNATIVE CHAIN DOTTED LINE MAY BE USED IN BOTH PLACES.

TEMPLATE FOR GARRARD MODEL 4 HF RECORD PLAYER


CAUTION - THIS TEMPLATE MUST NOT BE MOISTENED

POSITION OF TURNTABLE CENTRE

NOTE - DIMENSIONAL CLEARANCES (ALLOWING 1/4" BETWEEN UNIT PLATE AND MOTOR BOARD FOR SPRING MOUNTING)

ABOVE TOP OF MOTOR BOARD - 3 1/2"
BELOW TOP OF MOTOR BOARD - 3 3/8"

DETAILS OF SUSPENSION SPRING HOLES TO BE CUT IN MOTOR BOARD.

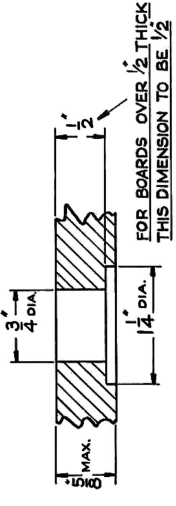

TRANSIT SCREW HOLE 3/32" DIA. HOLE

ALTERNATIVE APERTURE

2 35/32"

5 9/16"

5 9/16"

2 35/32"

13 4/16"

13 4/16"

9 3/8"

8 1/16"