


# SONY SERVICING GUIDE

## TR - 810

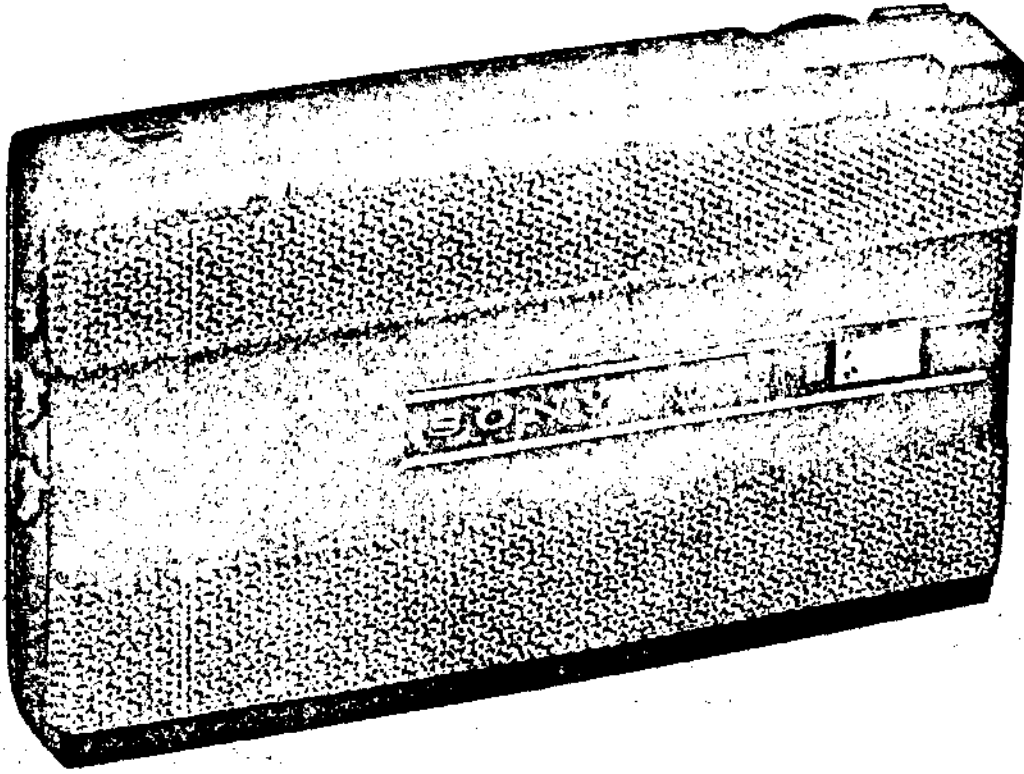

### Specifications for TR-810

- Circuit : 8 transistor superheterodyne
- Covering range : 535~1,605 Kc
- IF frequency : 455 Kc
- Sensitivity : 60  $\mu$ V/m with built-in ferrite bar antenna  
5  $\mu$ V/m with external aerial (effective height 5 m)
- Selectivity : 20 db (10 Kc off resonance)
- Output power : 50 mW (non-distorted)
- Current drain : 8 mA at 0 signal
- Speaker : 2 $\frac{1}{4}$ " PM dynamic speaker (8 $\Omega$ )
- Battery : 9 volts (BL-006 P, Eveready 216 or equivalent)
- Dimensions : 134 x 82 x 23 mm (5 $\frac{1}{4}$ " x 3 $\frac{3}{16}$ " x 1 $\frac{1}{16}$ " )
- Weight : 300 gr. (10.7 ozs.)
- Color : Black and White

## AGC circuit.

This model uses separated oscillator. S/N is considerably improved comparing with former pocket model as the result of using bigger sized ferrite bar antenna.

Furthermore, not only  $X_1$  and  $X_2$ , but  $X_3$  also joins AGC action. Principle of AGC action of  $X_3$  is based on the nature of the mixer whose converting gain drops suddenly when the collector current reaches certain value\* as it is increased.

In TR-810, AGC action is performed by the IF stage when the field intensity is weaker than 200 mV/m, while it is taken place by the mixer for stronger field intensity. By this means, the tone quality and the stability under extremely strong field intensity were much improved.

Actual operation is as follows.

Base bias current for  $X_3$  is fed through  $R_{10}$ , which is connected in series with  $X_3$  collector. Emitter resistor and base bias resistor of  $X_3$  are fixed so that base voltage of  $X_3$  increases as the result of decreased  $X_3$  collector current due to AGC action in the IF stage. This increases  $X_3$  collector current. Consequently the converting gain drops as the voltage between the collector and the emitter decreases.

As described above, there is intimate relation between each bias circuit and AGC circuit. Therefore, it should be noted that a single trouble will influence upon various points.

For example, open circuit in  $D_1$  or  $R_{10}$  will cause increase of base bias of  $X_3$ , which increases  $X_3$  collector current.

This changes voltage and current of  $X_1$  and  $X_2$ .

\* At this point when  $X_3$  collector current increases by  $100 \mu\text{A}$ , the converting gain will decrease by approximately 20 db.

## To take out circuit board from the cabinet

Remove two fixing screws on variable condenser mounting plate and one screw on the lower right of the circuit board.

## Adjustment on high frequency section

### Current adjustment

$X_3$  collector current must be  $300 \sim 400 \mu\text{A}$ . This can be done by replacing  $R_8$  ( $82 \sim 150 \text{ k}\Omega$ ).

Printed circuit between the  $X_3$  collector and the IFT, has a gap which is bridged with the solder. This gap enables one to measure current easily by connecting mill-ammeter across it after removing solder.

During voltage and current measurement, the set must be detuned to any station with the volume control set at minimum.

### High frequency adjustment

The set must be adjusted to receive 520 Kc with the variable condenser set at maximum, 1,680 Kc at minimum. Tracking adjustment must be done at 620 Kc and 1,400 Kc.

## Audio stage

### Transistor

2T6 group is used for audio stage. For  $X_3$ , it is recommendable to use lower  $\alpha$  transistor than  $X_1$  and  $X_2$ . (Value of  $\alpha$  decreases in the order of 2T64 (2SD64)-2T65 (2SD65)-2T66 (2SD66).)

### Transformer

#### Input transformer

TI-002-03       $6 \text{ k}\Omega : 3 \text{ k}\Omega$

DC resistance       $500 \Omega : 280 \Omega$

#### Output transformer

TX-002-03       $1.4 \text{ k}\Omega : 8 \Omega$

DC resistance       $100 \Omega : 0.5 \Omega$



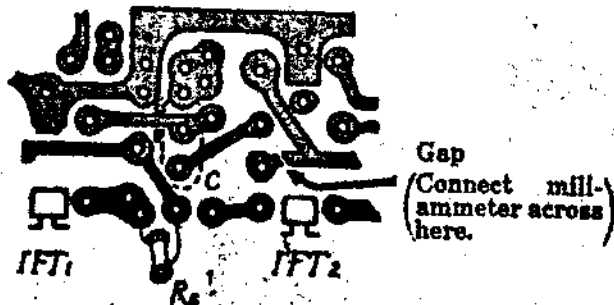



Diagram of TR-810 (printed side)

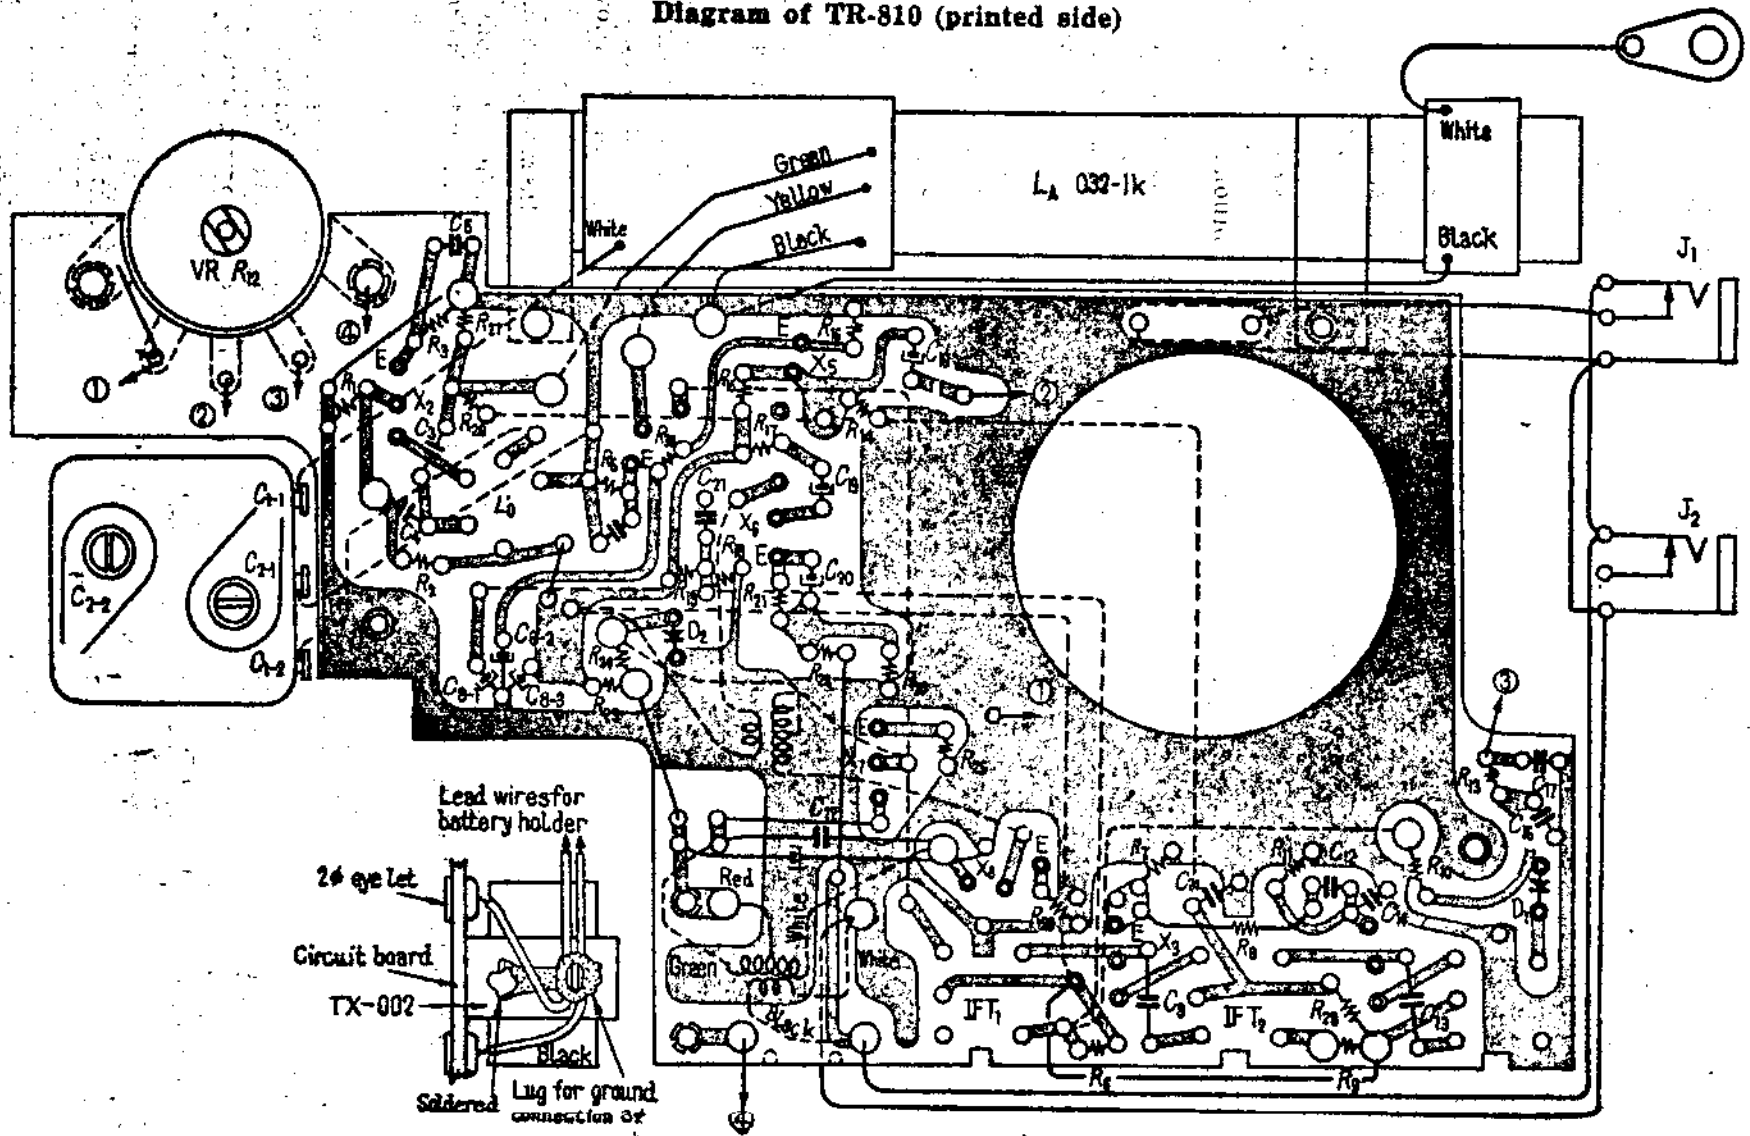


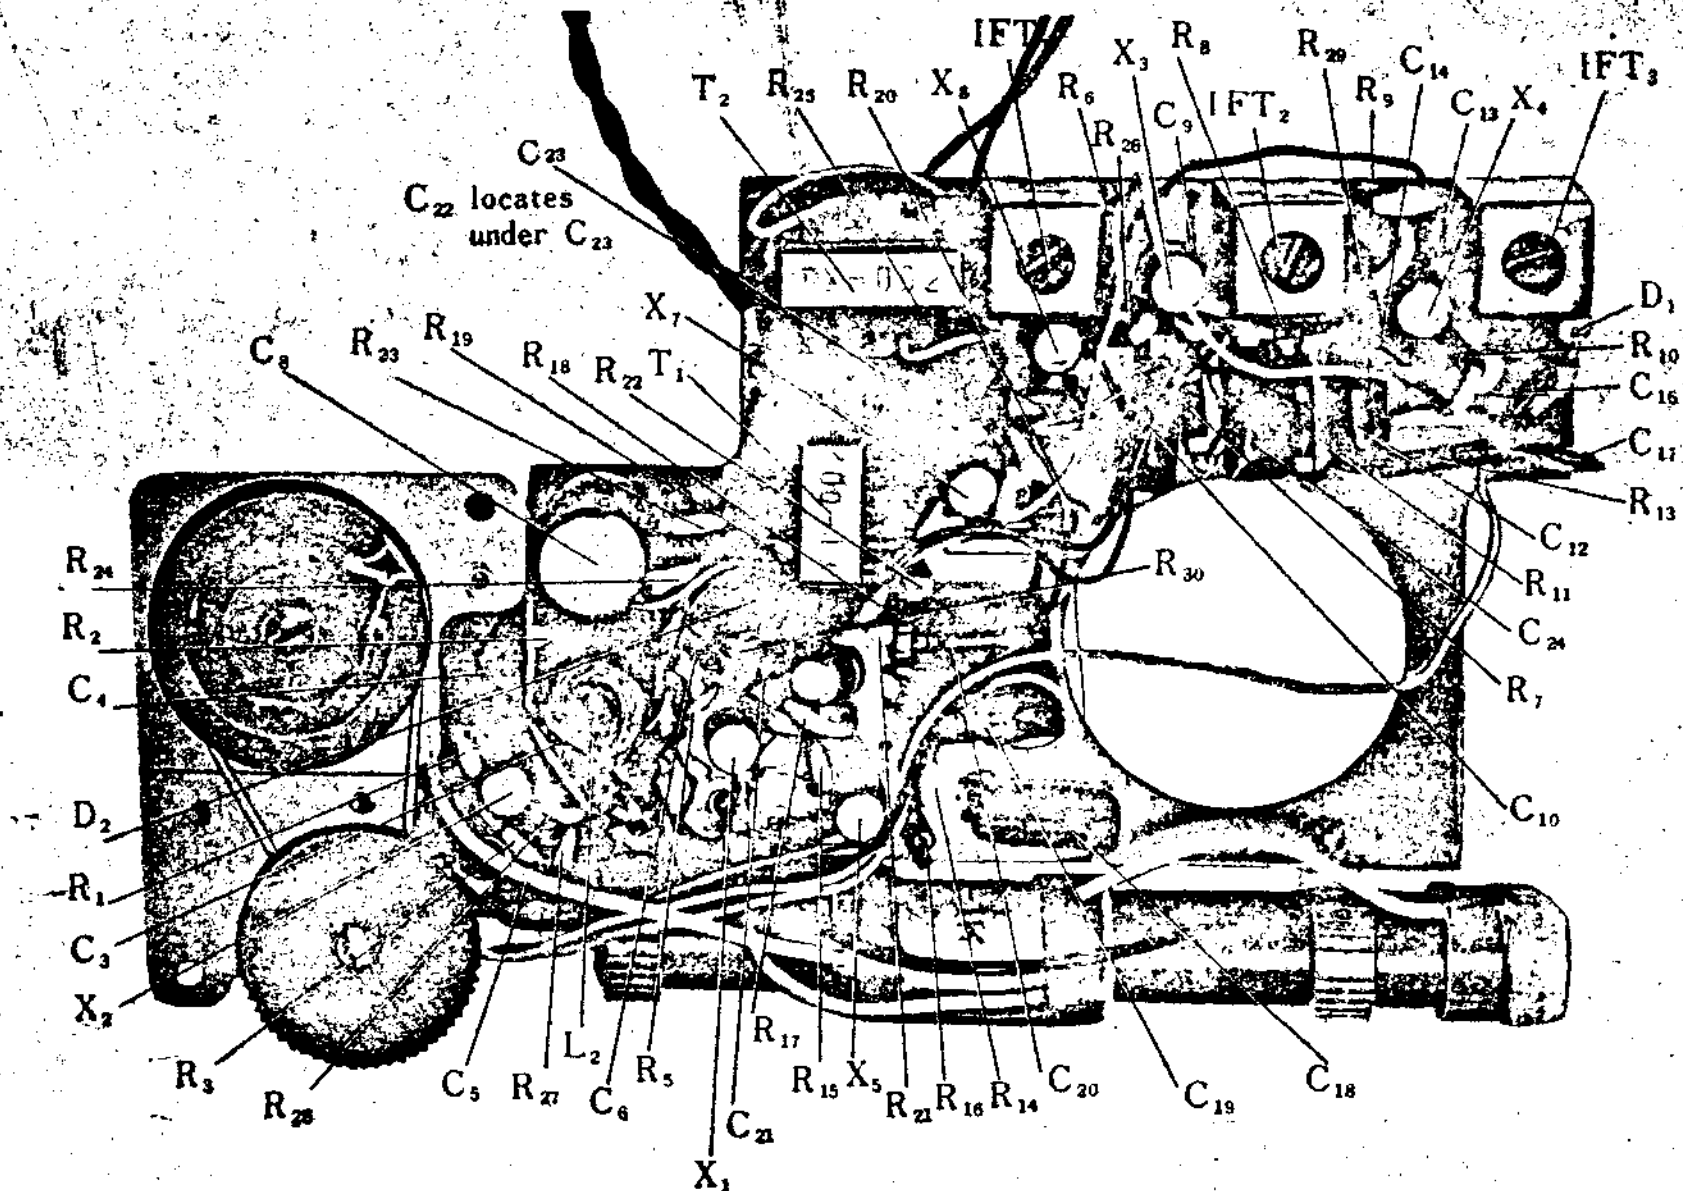


Mounting of TR-810

Diagram of TR-810 (printed side)

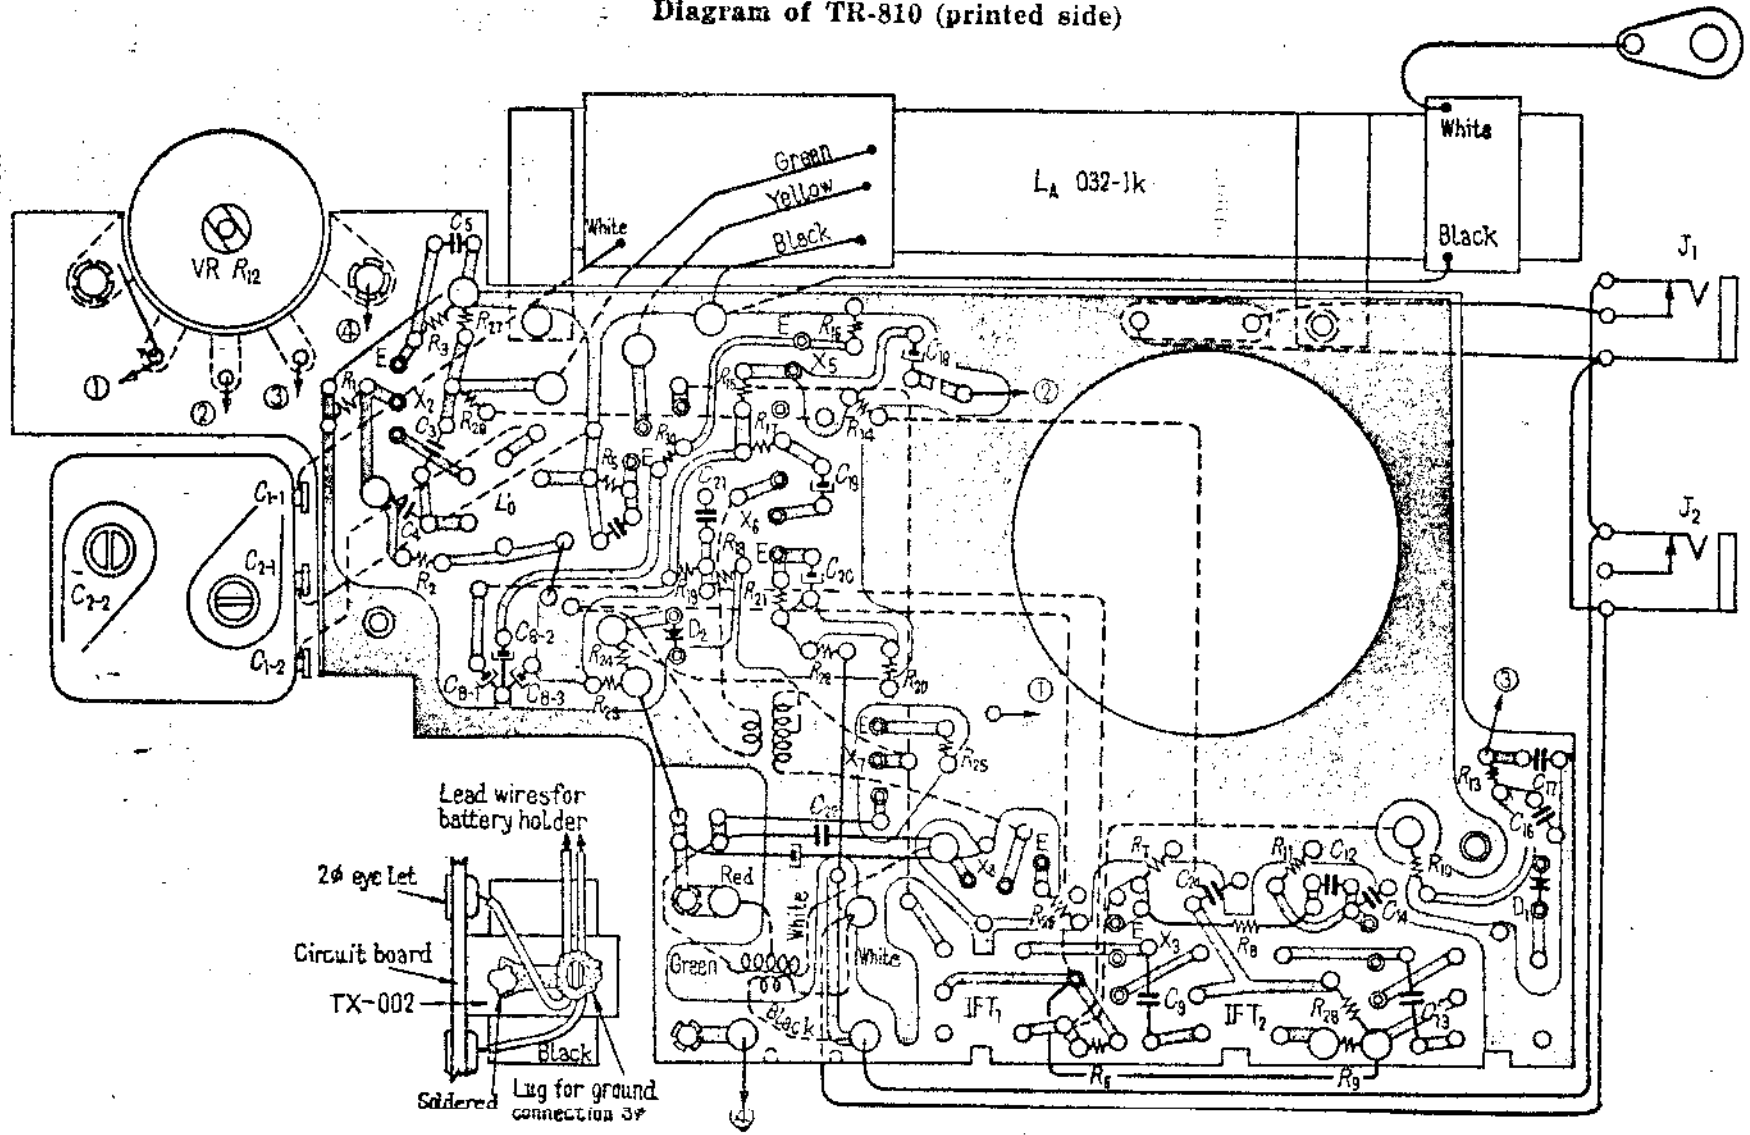

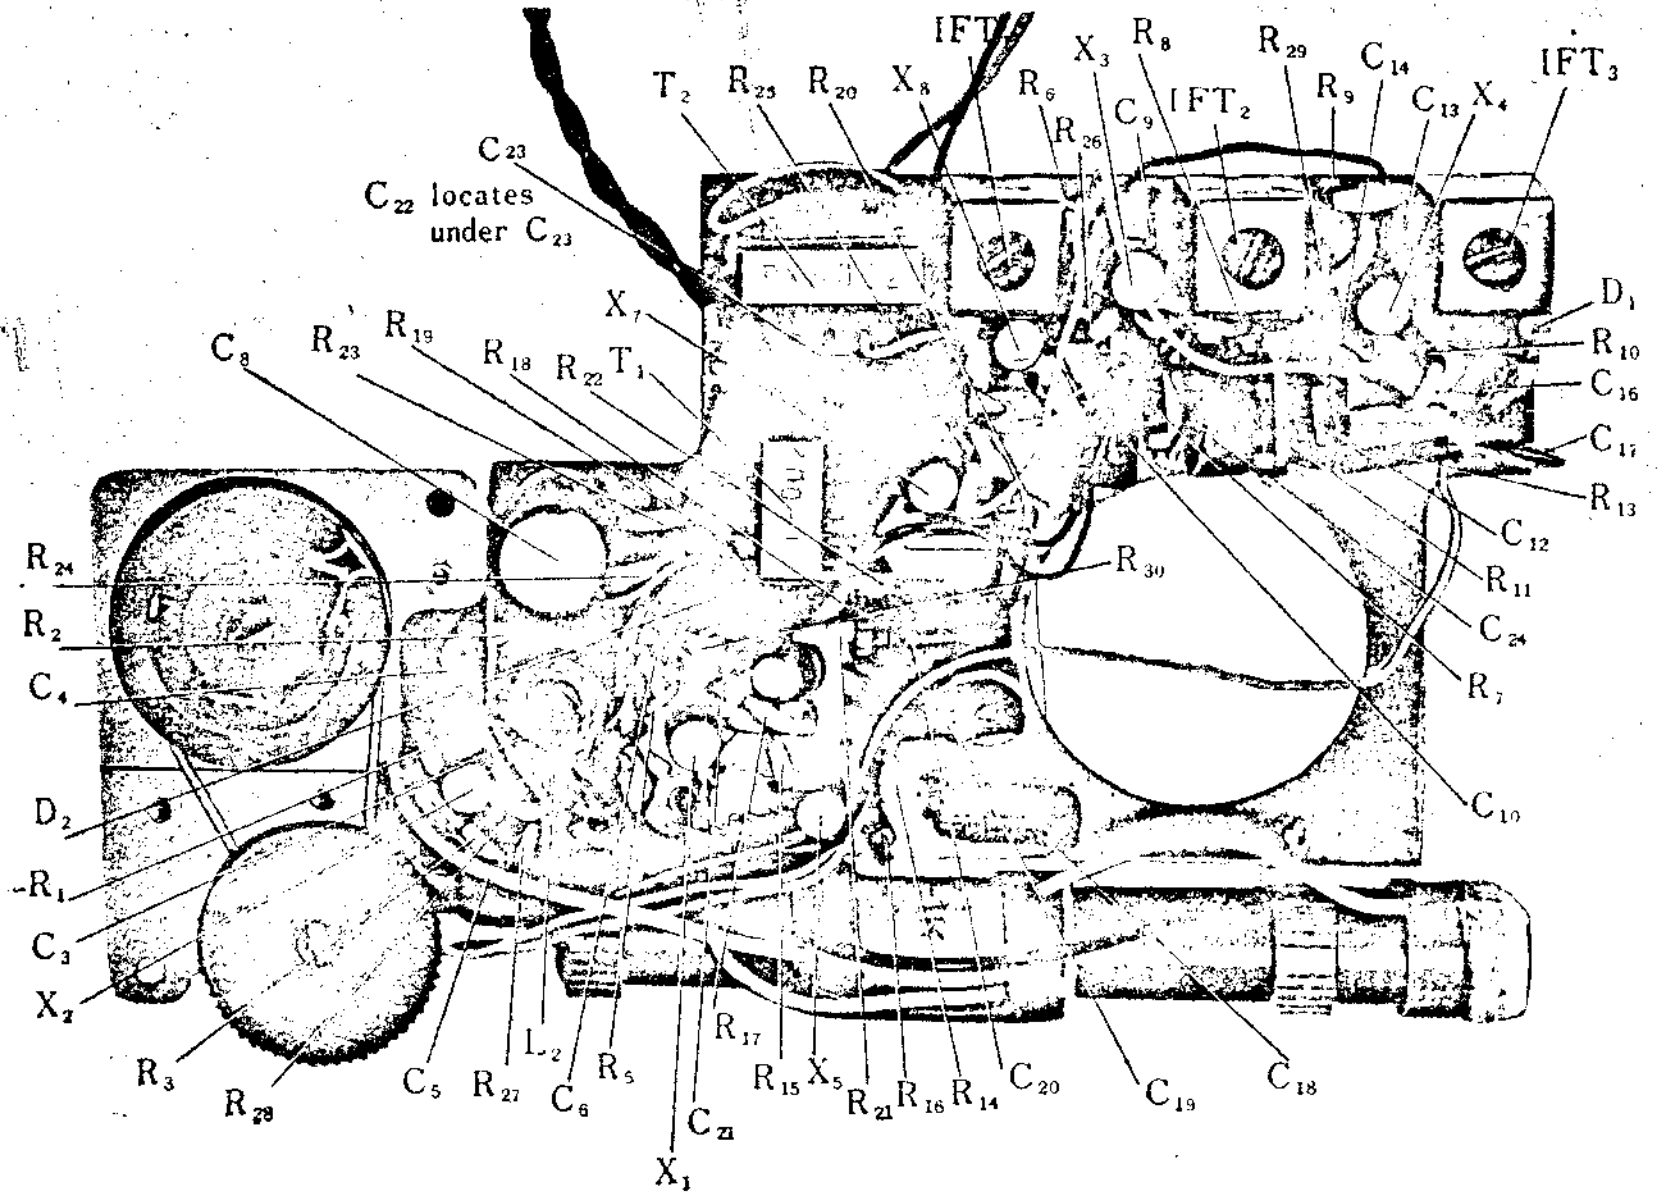

Mounting of TR-810

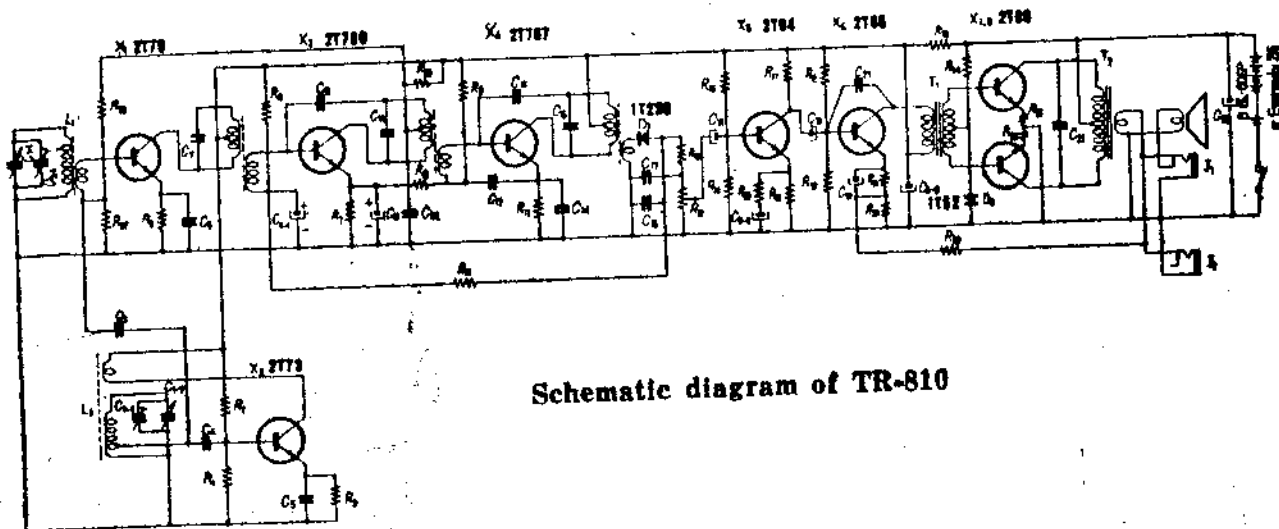

Schematic diagram of TR-810

Parts list for TR-810

Symbol	Description	Symbol	Description	Symbol	Description
L <sub>1</sub>	Antenna coil	R <sub>12</sub> ①	Volume control	C <sub>1</sub>	0.01 μF (MXL)
L <sub>2</sub>	Oscillator coil	R <sub>13</sub>	2.2 KΩ 5% 1/8W	C <sub>2</sub>	0.005 μF ( " )
IFT <sub>1</sub>	LI-008-AP	R <sub>14</sub>	10 KΩ " "	C <sub>3</sub>	0.01 μF ( " )
IFT <sub>2</sub>	LI-008-BP	R <sub>15</sub>	56 KΩ " "	C <sub>7</sub> ③	180 PF (Titanium)
IFT <sub>3</sub>	LI-008-CP	R <sub>16</sub>	820 Ω " "	C <sub>2-1, 2-2</sub> ④	20 μF 10 V × 3
T <sub>1</sub>	TI-002-03	R <sub>17</sub>	820 Ω " "	C <sub>8</sub>	2 PF (Styrol)
T <sub>2</sub>	TX-002-03	R <sub>18</sub>	10 KΩ " "	C <sub>9</sub>	10 μF 3 V (Electrolytic)
SP	2 1/4" 8 Ω	R <sub>19</sub>	56 KΩ " "	C <sub>11</sub> ③	180 PF (Styrol)
J <sub>1</sub>	Earphone jack	R <sub>20</sub>	5 Ω " "	C <sub>12</sub>	0.01 μF (MXL)
J <sub>2</sub>	" "	R <sub>21</sub>	680 Ω " "	C <sub>13</sub>	2 PF (Titanium)
B	Battery 9 V	R <sub>22</sub>	220 Ω " "	C <sub>14</sub>	0.02 μF (MXL)
R <sub>1</sub>	10 KΩ 5% 1/8 W	R <sub>23</sub>	220 Ω " "	C <sub>15</sub> ③	180 PF (Styrol)
R <sub>2</sub>	56 KΩ " "	R <sub>24</sub>	5.6 KΩ " "	C <sub>16</sub>	0.02 μF (MXL)
R <sub>3</sub>	2.2 KΩ " "	R <sub>25</sub>	22 Ω " "	C <sub>17</sub>	0.01 μF ( " )
R <sub>4</sub>		R <sub>26</sub>	22 Ω " "	C <sub>18</sub> ⑤	5 μF 6 V (Electrolytic)
R <sub>5</sub>	15 KΩ " "	R <sub>27</sub>	100 KΩ " "	C <sub>19</sub> ⑥	5 μF 6 V ( " )
R <sub>6</sub> ①	100 KΩ " "	R <sub>28</sub>	10 KΩ " "	C <sub>20</sub> ⑥	30 μF 6 V ( " )
R <sub>7</sub>	470 Ω " "	R <sub>29</sub>	10 KΩ " "	C <sub>21</sub>	0.001 μF (MXL)
R <sub>8</sub>	820 Ω " "	R <sub>30</sub>	100 Ω " "	C <sub>22</sub>	0.05 μF ( " )
R <sub>9</sub>	22 KΩ " "	C <sub>1-1, 1-2</sub>	PVC-2X	C <sub>23</sub>	12 μF 15 V or 10 μF 10 V (Electrolytic)
R <sub>10</sub>	7.5 KΩ " "	C <sub>2-1, 2-2</sub>		C <sub>24</sub>	0.01 μF (MXL)
R <sub>11</sub>	470 Ω " "	C <sub>1</sub>	0.005 μF (MXL)		

- ① To be adjusted    ② Built in IFT    ③ Single ended  
 ④ With switch    ⑤ Block type

Voltage and current distribution for TR-810

	Collector current	Collector voltage Volt	Emitter voltage Volt	Voltage between base and emitter Volt
X <sub>1</sub>	230~270 $\mu$ A	8.0 <sub>25</sub>	3.5 <sub>25</sub>	0.07~0.1 <sub>1</sub>
X <sub>2</sub>	400~500 $\mu$ A	8.0 <sub>25</sub>	1.0 <sub>1</sub>	0.1 ~0.15 <sub>1</sub>
X <sub>3</sub>	300~400 $\mu$ A	4.2 <sub>25</sub>	0.3 <sub>1</sub>	0.12~0.18 <sub>1</sub>
X <sub>4</sub>	600~800 $\mu$ A	8.0 <sub>25</sub>	0.25 <sub>1</sub>	0.2 ~0.25 <sub>1</sub>
X <sub>5</sub>	0.9~1.0 mA	7.5 <sub>25</sub>	0.7 <sub>1</sub>	0.1 ~0.15 <sub>1</sub>
X <sub>6</sub>	1.0~1.3 mA	7.5 <sub>25</sub>	0.7 <sub>1</sub>	0.1 ~0.15 <sub>1</sub>
X <sub>7,8</sub>	750 $\mu$ A	8.0 <sub>25</sub>	+ <sub>1</sub>	0.1 ~0.15 <sub>1</sub>

(a) Battery current: 8 mA  $\pm$  20% at 0 signal

Battery voltage: 9.0 Volts

(b) Data show approximate value at 0 signal (the set is not tuned to any station with the volume control set at minimum).

(c) Internal resistance of the voltmeter used for measurement is 20 K $\Omega$ /V.

(d) Small figures next to data show meter range.